

APPENDIX A: SAR TEST DATA

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22733

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.892 \text{ S/m}$; $\epsilon_r = 42.209$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/06/2021; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7308; ConvF(10.17, 10.17, 10.17) @ 820.1 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA, BC 10, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.35 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.205 W/kg

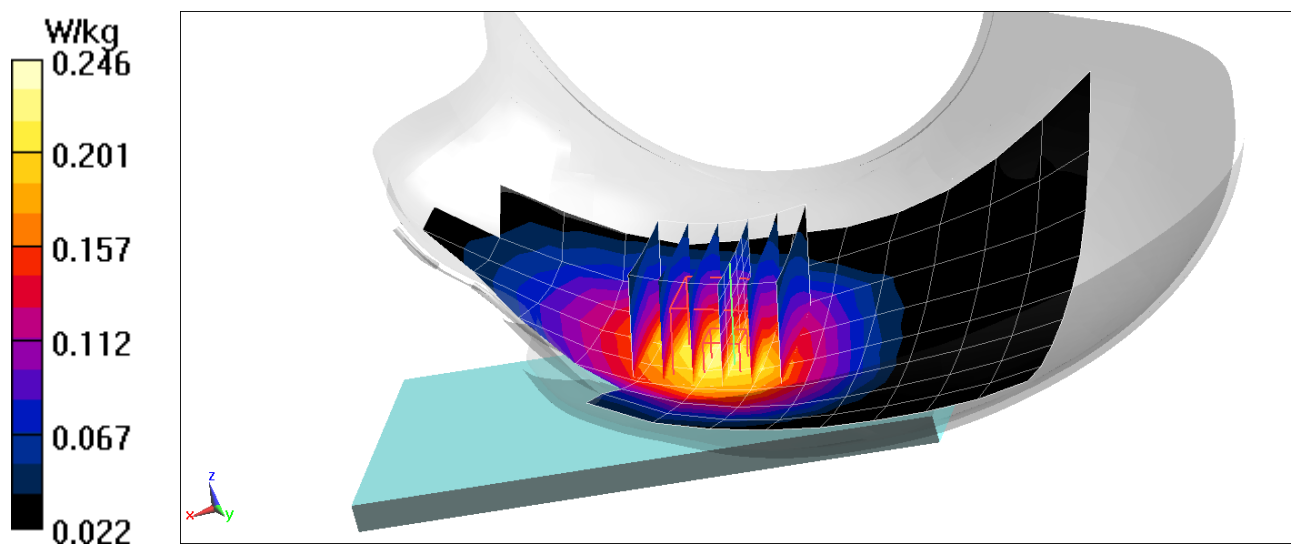

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22733

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.984$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 01/06/2021; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7308; ConvF(10.17, 10.17, 10.17) @ 836.52 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA, BC 0, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.81 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.217 W/kg

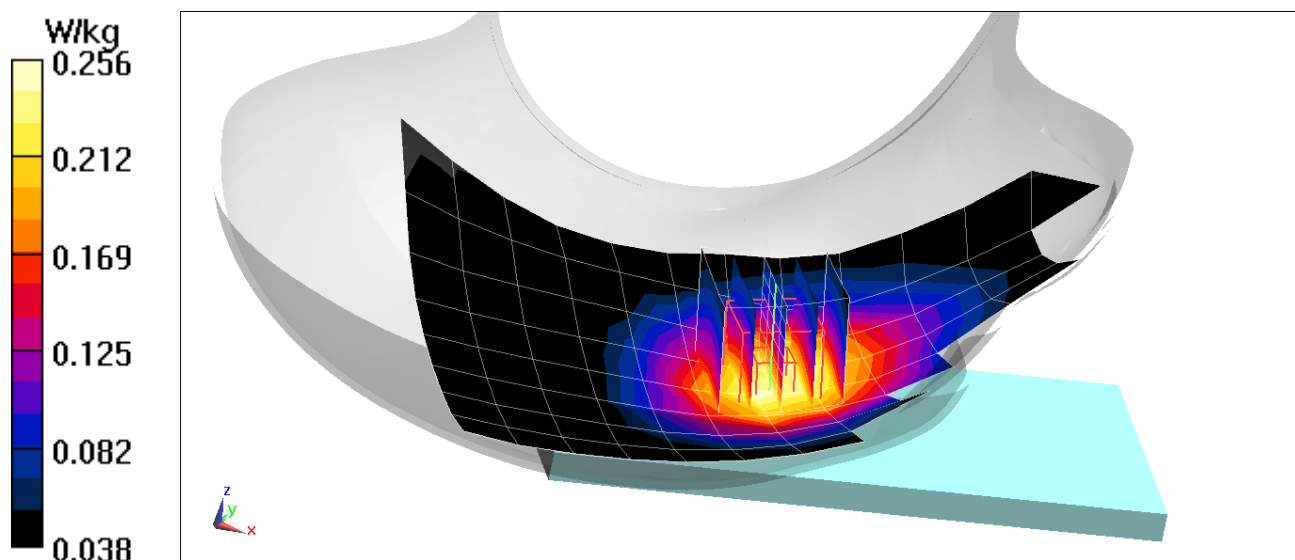

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.387 \text{ S/m}$; $\epsilon_r = 38.856$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/05/2021; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7539; ConvF(8.03, 8.03, 8.03) @ 1880 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS EVDO Rev A, Left Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.68 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.281 W/kg

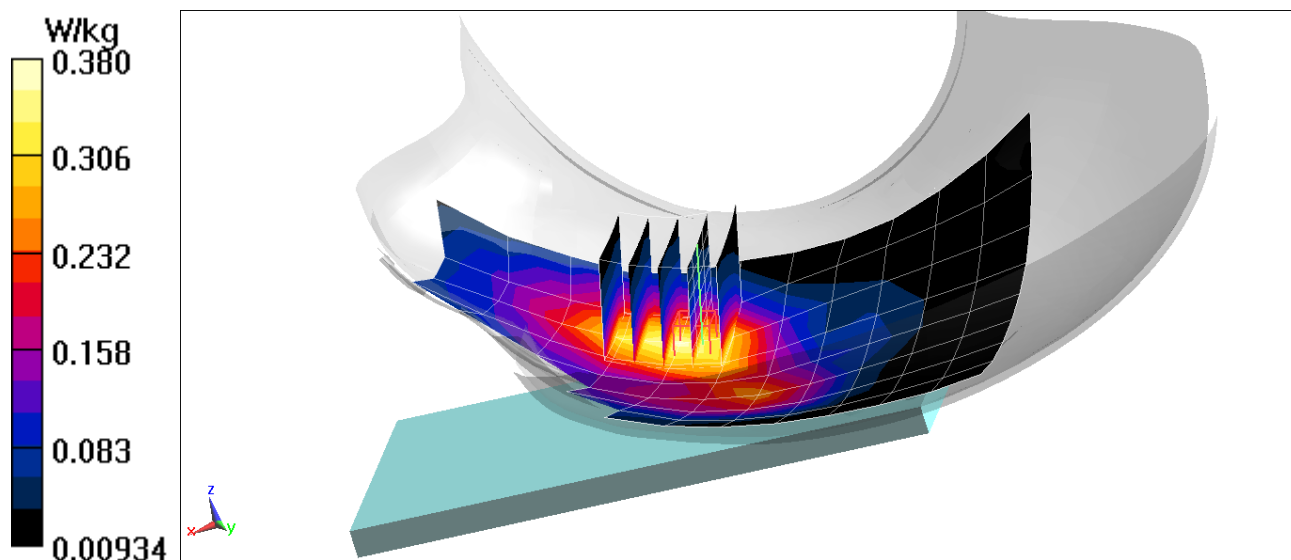

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.983$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01/06/2021; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7308; ConvF(10.17, 10.17, 10.17) @ 836.6 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 850, Right Head, Cheek, Mid.ch, 4 Tx slots


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.34 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.298 W/kg

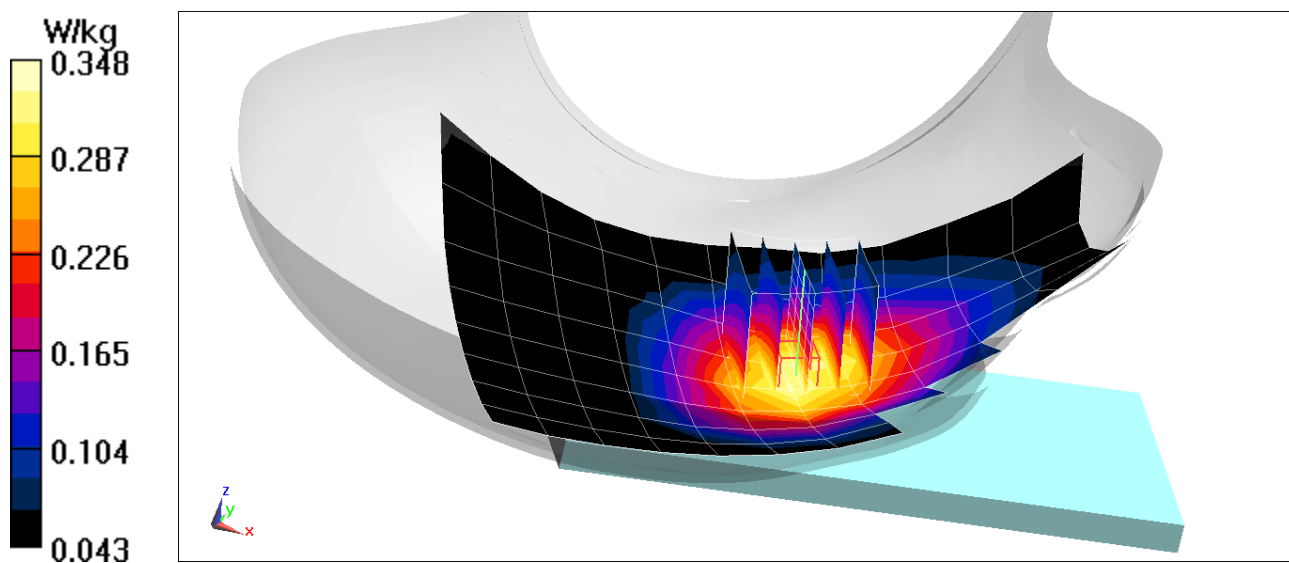

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.387 \text{ S/m}$; $\epsilon_r = 38.856$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/05/2021; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7539; ConvF(8.03, 8.03, 8.03) @ 1880 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 1900, Left Head, Cheek, Mid.ch, 4 Tx slots


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.13 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.226 W/kg

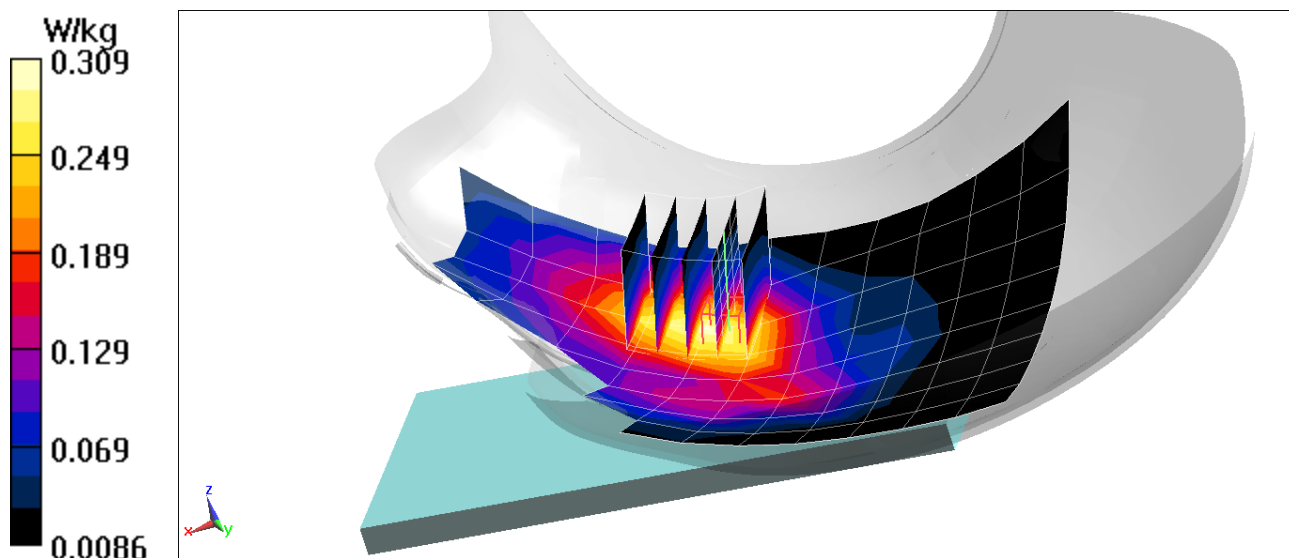

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22733

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.983$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01/06/2021; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7308; ConvF(10.17, 10.17, 10.17) @ 836.6 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.31 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.233 W/kg

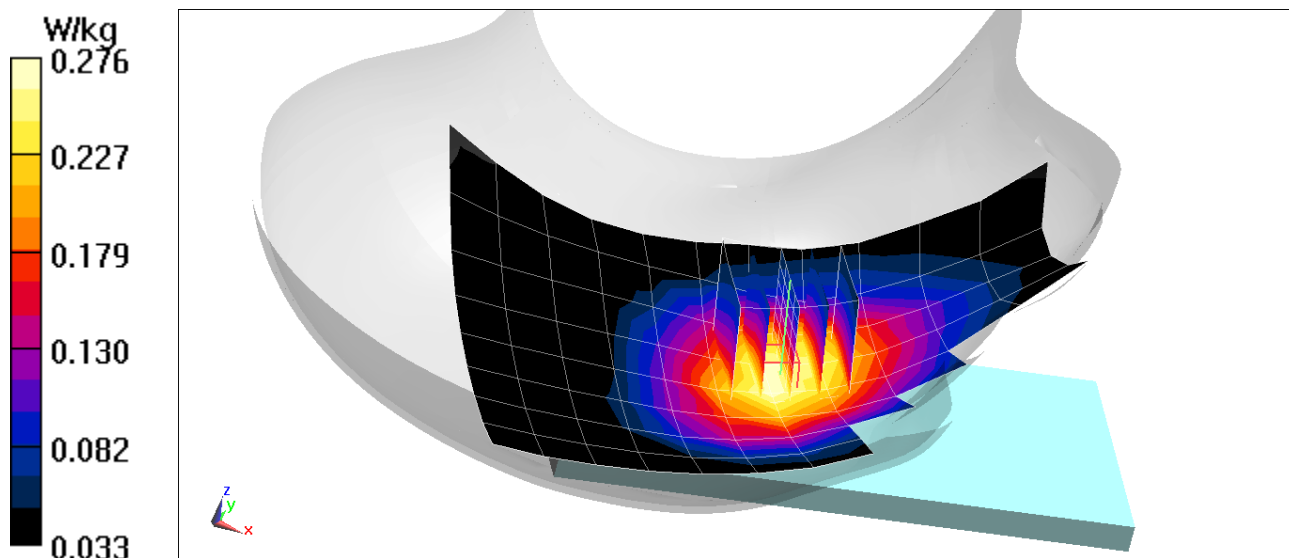

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.665$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 01/20/2021; Ambient Temp: 22.6°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7357; ConvF(8.69, 8.69, 8.69) @ 1732.4 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 30; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.10 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.231 W/kg

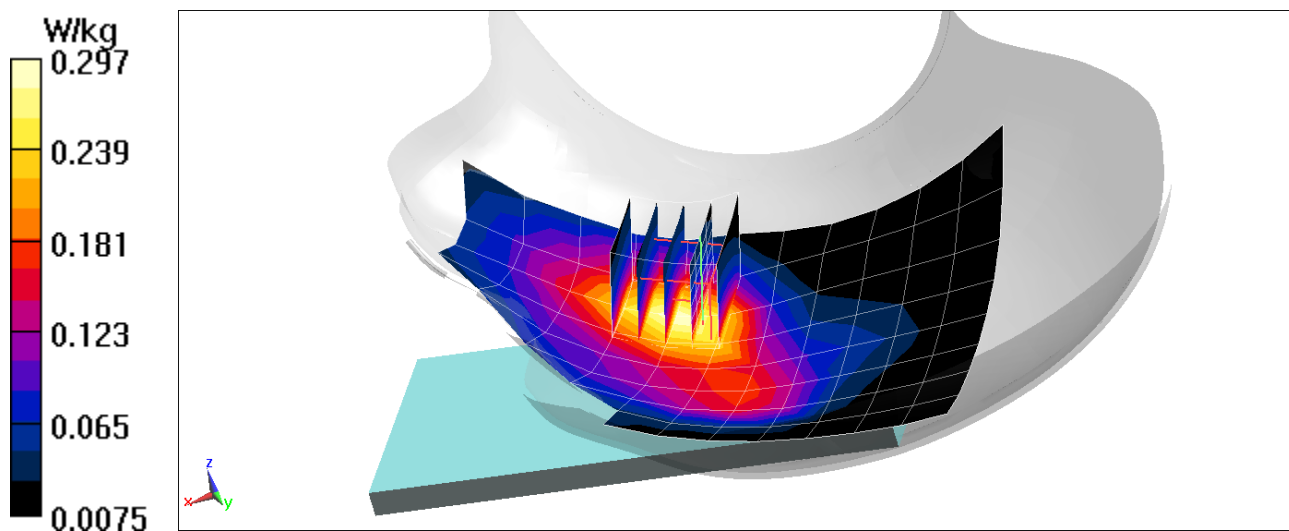

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.387 \text{ S/m}$; $\epsilon_r = 38.856$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/05/2021; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7539; ConvF(8.03, 8.03, 8.03) @ 1880 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.17 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.310 W/kg

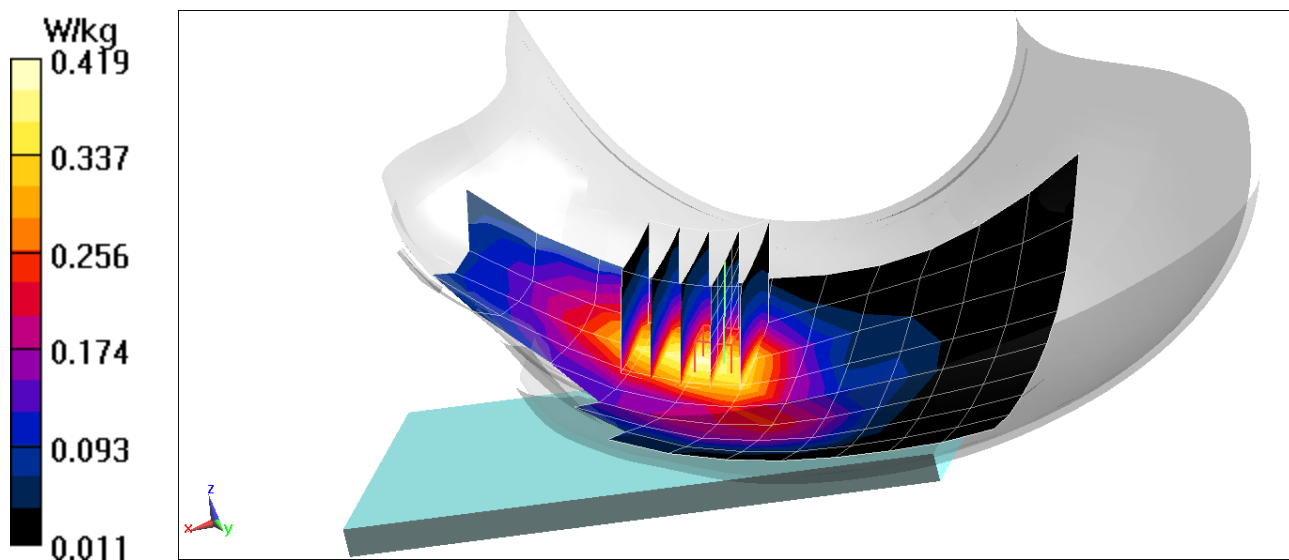

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.86 \text{ S/m}$; $\epsilon_r = 42.376$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/11/2021; Ambient Temp: 20.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.23, 10.23, 10.23) @ 680.5 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 30; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.77 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.172 W/kg

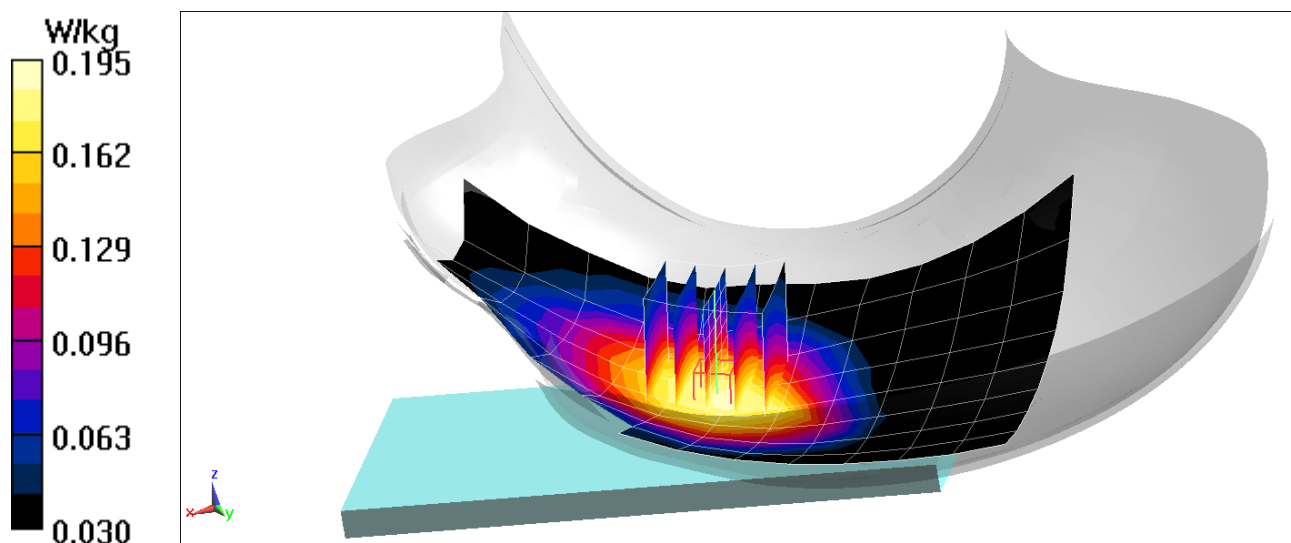

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.285$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 01/11/2021; Ambient Temp: 20.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.23, 10.23, 10.23) @ 707.5 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 30; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.43 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.213 W/kg

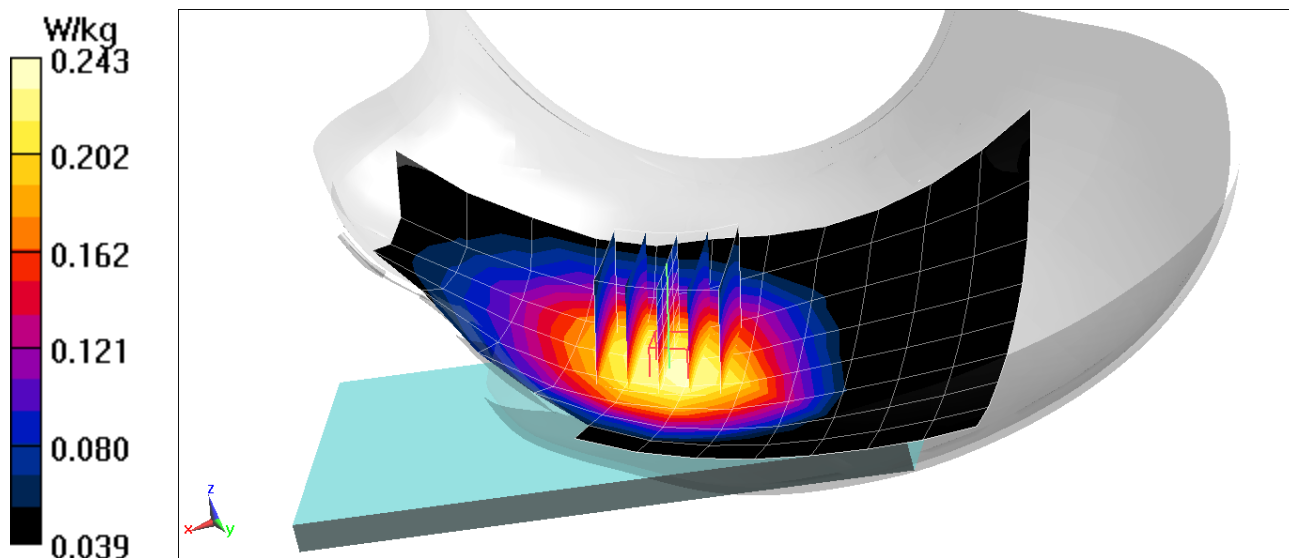

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 42.065$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01/11/2021; Ambient Temp: 20.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.23, 10.23, 10.23) @ 782 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 30; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.21 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.188 W/kg

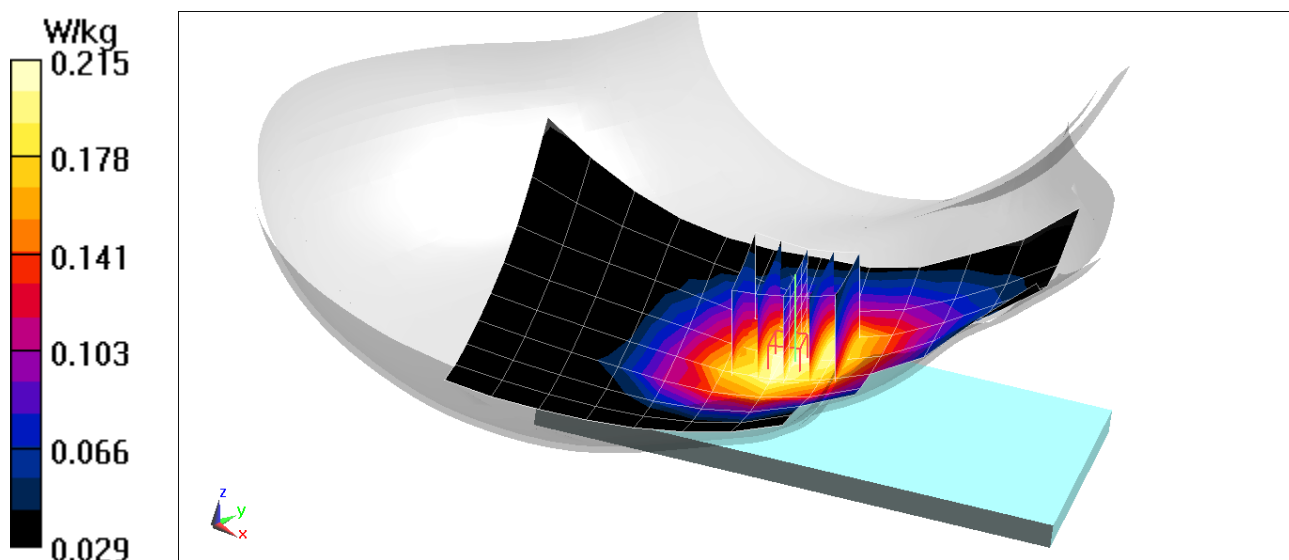

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22733

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.054$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 01/06/2021; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7308; ConvF(10.17, 10.17, 10.17) @ 831.5 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Left Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 36 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.17 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.246 W/kg

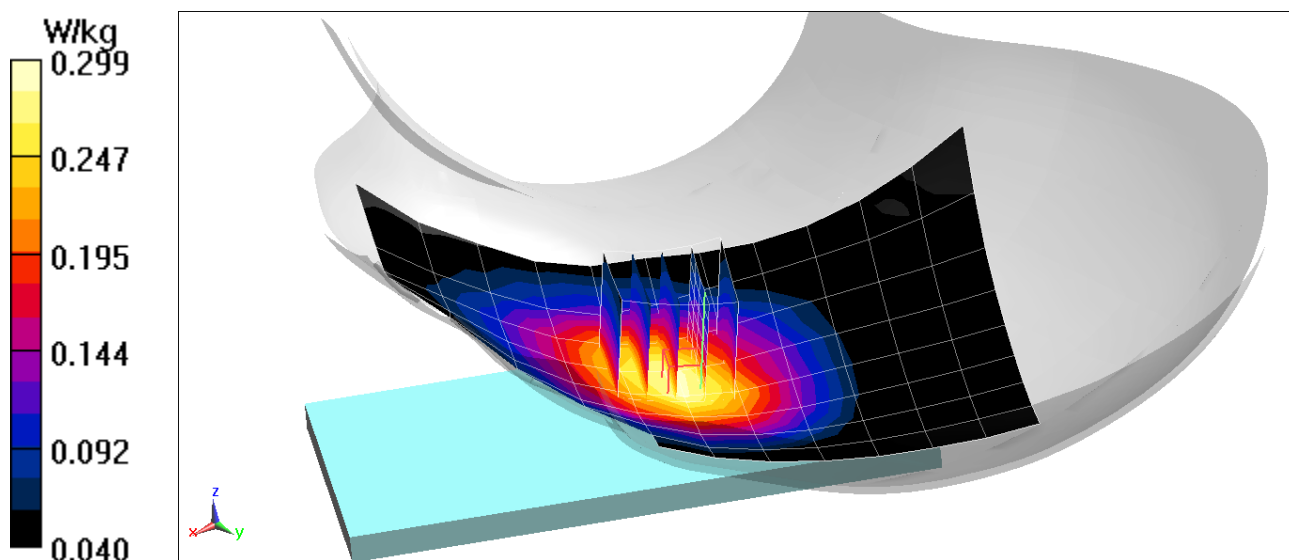

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 39.408$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/20/2021; Ambient Temp: 22.6°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7357; ConvF(8.69, 8.69, 8.69) @ 1770 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 30; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Left Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.01 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.246 W/kg

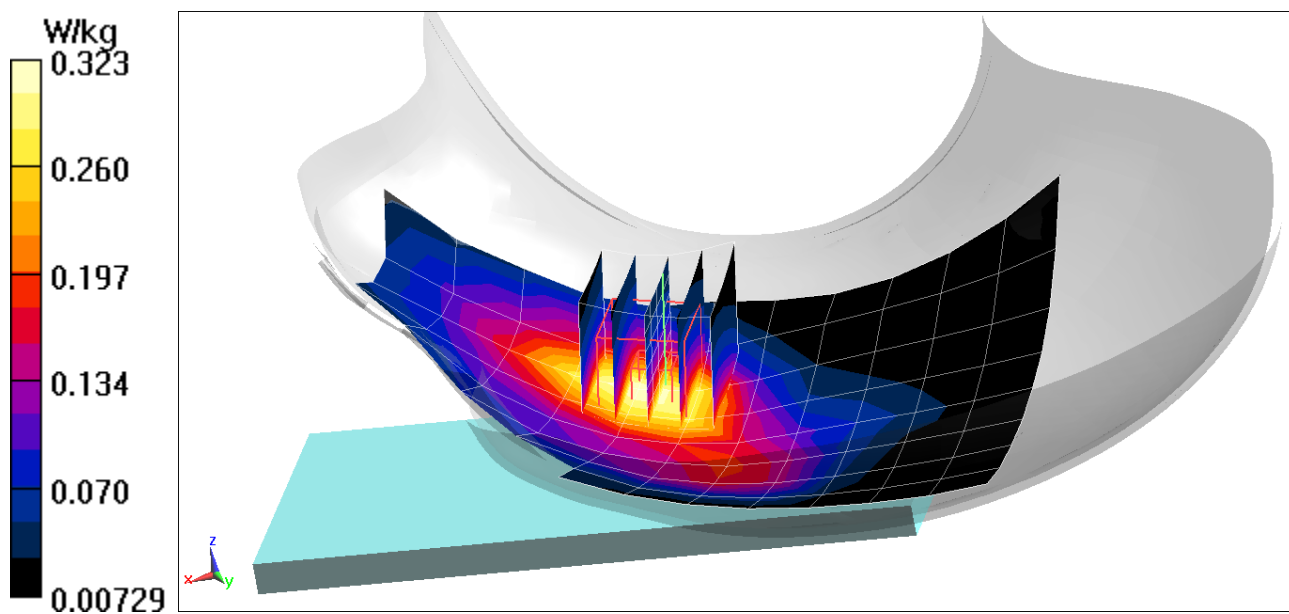

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 38.846$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/05/2021; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7539; ConvF(8.03, 8.03, 8.03) @ 1882.5 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.28 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.284 W/kg

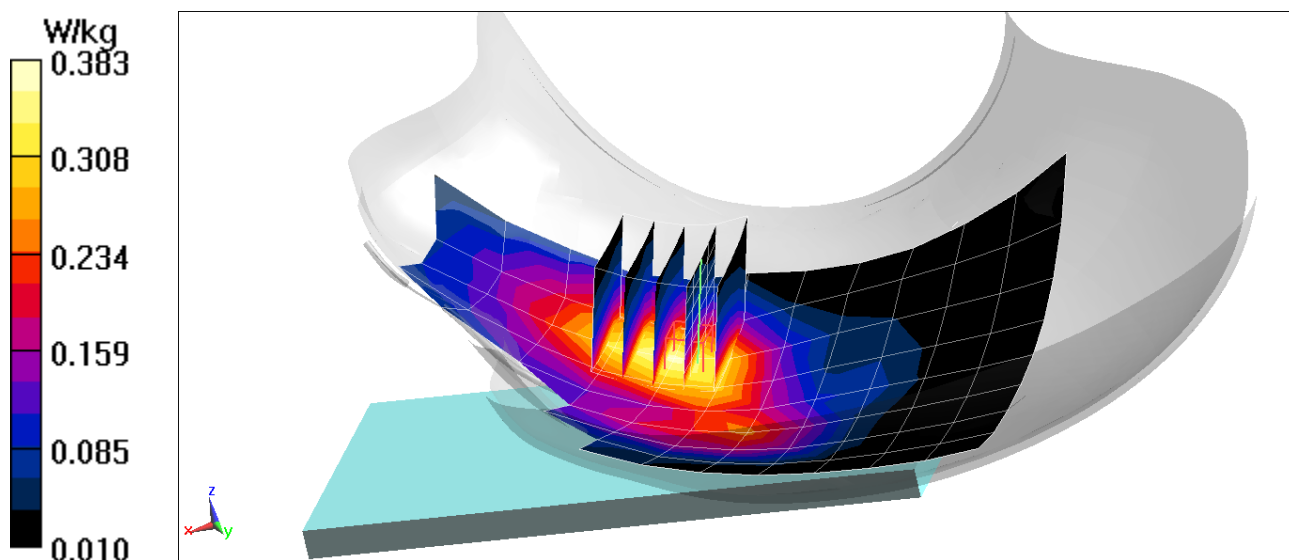

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, _LTE Band 41 (Class 2); Frequency: 2680 MHz; Duty Cycle: 1:2.31

Medium: 2450 Head; Medium parameters used:

$f = 2680 \text{ MHz}$; $\sigma = 2.102 \text{ S/m}$; $\epsilon_r = 38.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/28/2021; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7571; ConvF(7.05, 7.05, 7.05) @ 2680 MHz; Calibrated: 12/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/7/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 Power Class 2, Left Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.66 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.184 W/kg

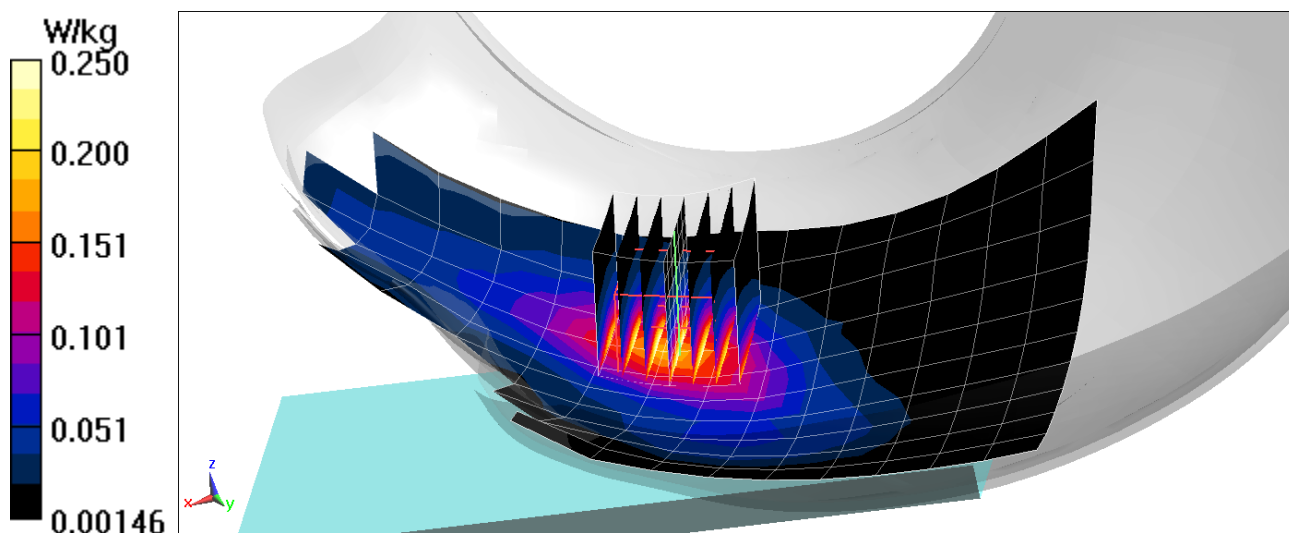

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 17451

Communication System: UID 0, 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.817 \text{ S/m}$; $\epsilon_r = 39.594$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/10/2021; Ambient Temp: 22.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7571; ConvF(7.28, 7.28, 7.28) @ 2437 MHz; Calibrated: 12/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/7/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Left Head, Cheek, Ch 6, 1 Mbps


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.284 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.625 W/kg

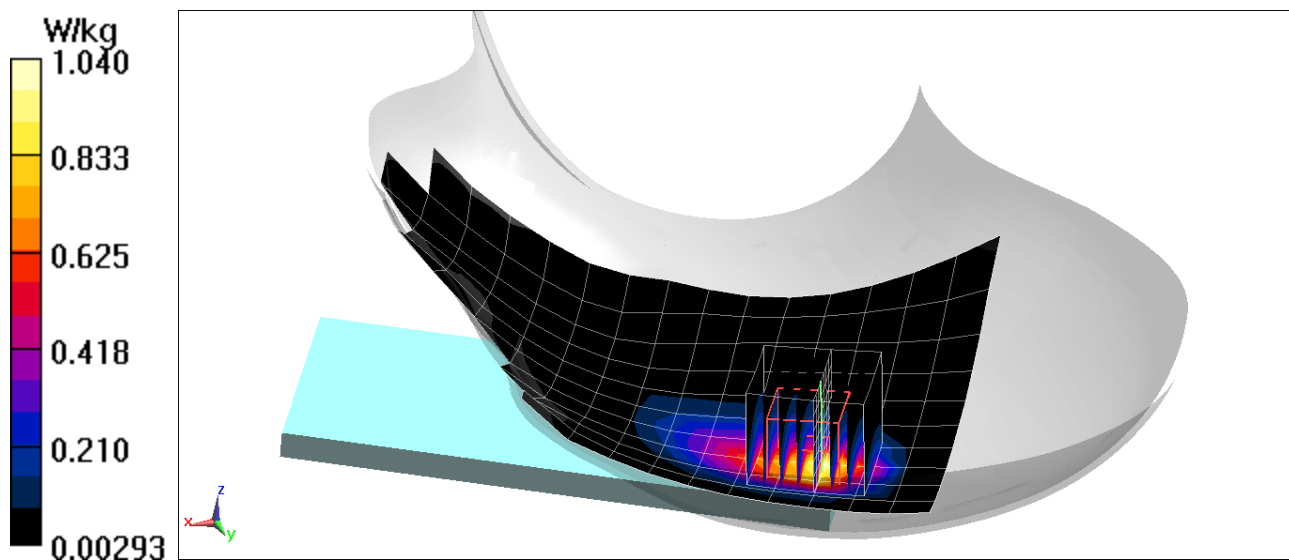

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 20232

Communication System: UID 0, IEEE 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head; Medium parameters used:

$f = 5500$ MHz; $\sigma = 4.976$ S/m; $\epsilon_r = 34.517$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 01/05/2021; Ambient Temp: 20.7°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7357; ConvF(4.93, 4.93, 4.93) @ 5500 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth, Left Head, Tilt, Ch 100, 6 Mbps


Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.854 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 5.78 W/kg

SAR(1 g) = 1.18 W/kg

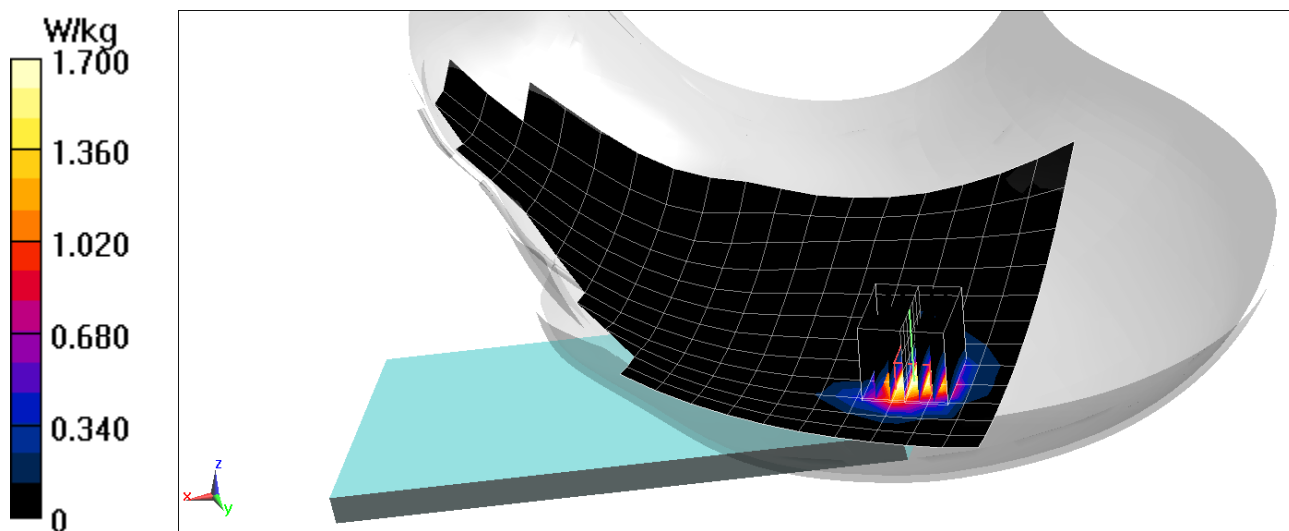

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 17451

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.837 \text{ S/m}$; $\epsilon_r = 39.754$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01/07/2021; Ambient Temp: 23.1°C; Tissue Temp: 24.7°C

Probe: EX3DV4 - SN7571; ConvF(7.28, 7.28, 7.28) @ 2441 MHz; Calibrated: 12/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/7/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Left Head, Cheek, Ch 39, 1 Mbps


Area Scan (11x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.004 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.089 W/kg

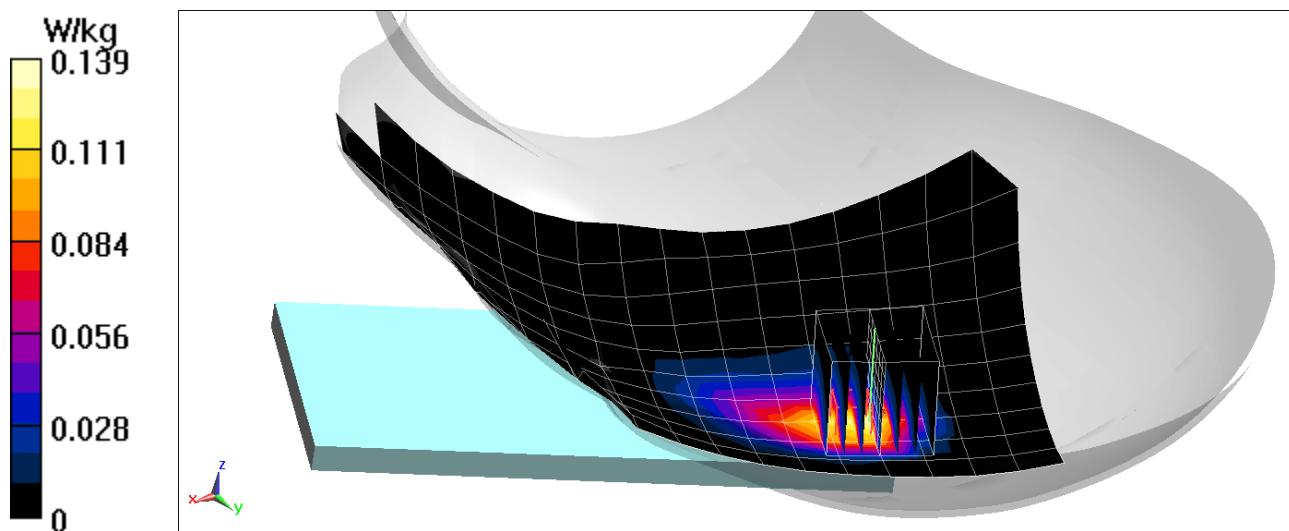

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 54.628$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 820.1 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA BC10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.13 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.300 W/kg

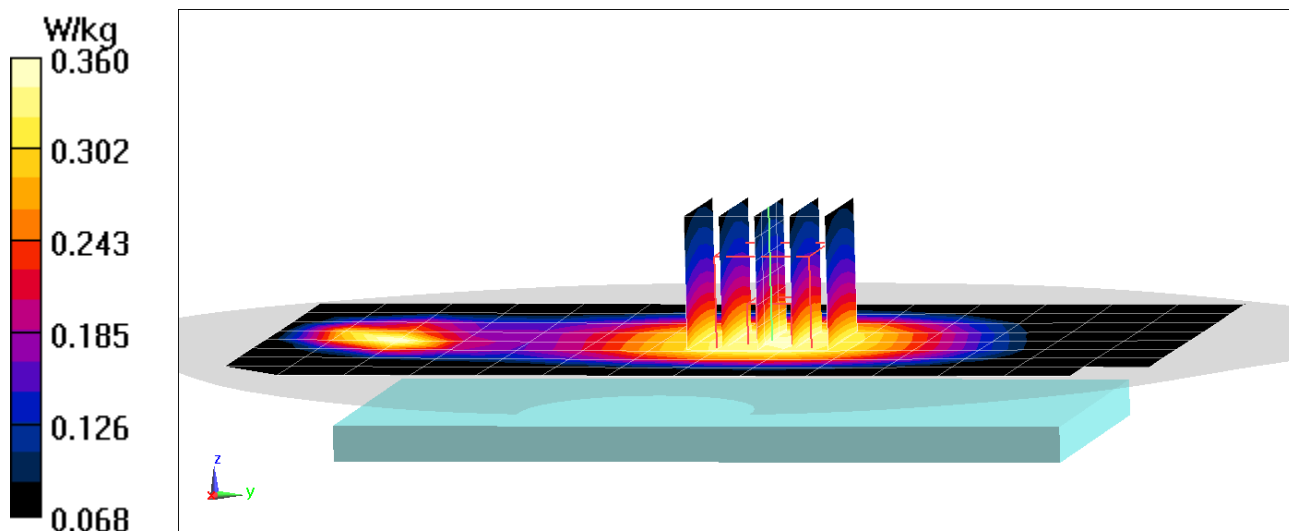

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 54.628$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 820.1 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. EVDO BC10 Rev.0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.87 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.259 W/kg

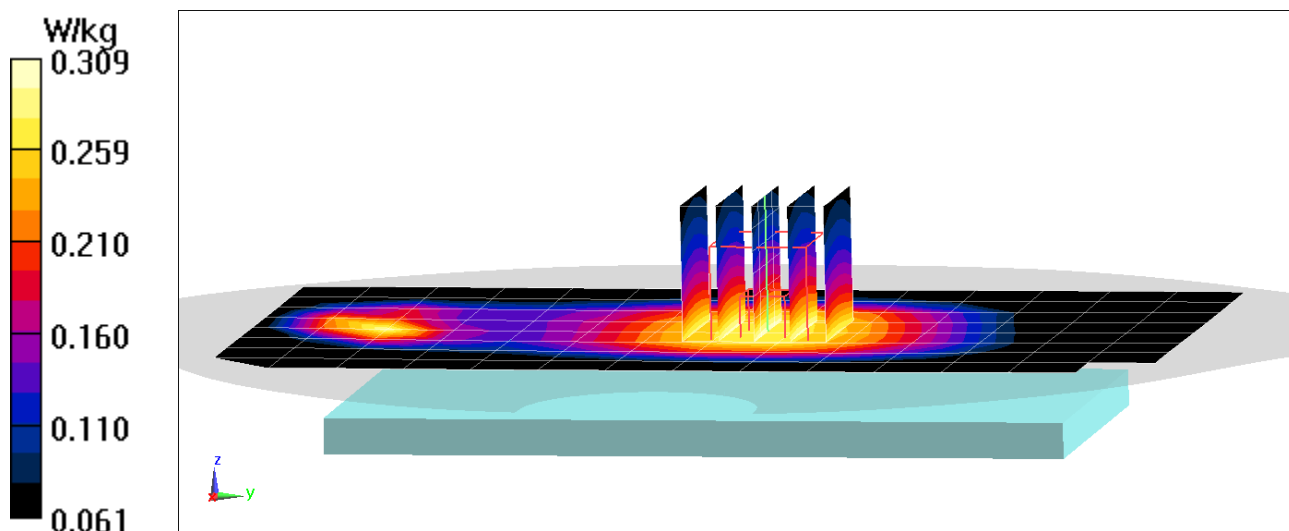

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 836.52 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. CDMA, BC 0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.48 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.369 W/kg

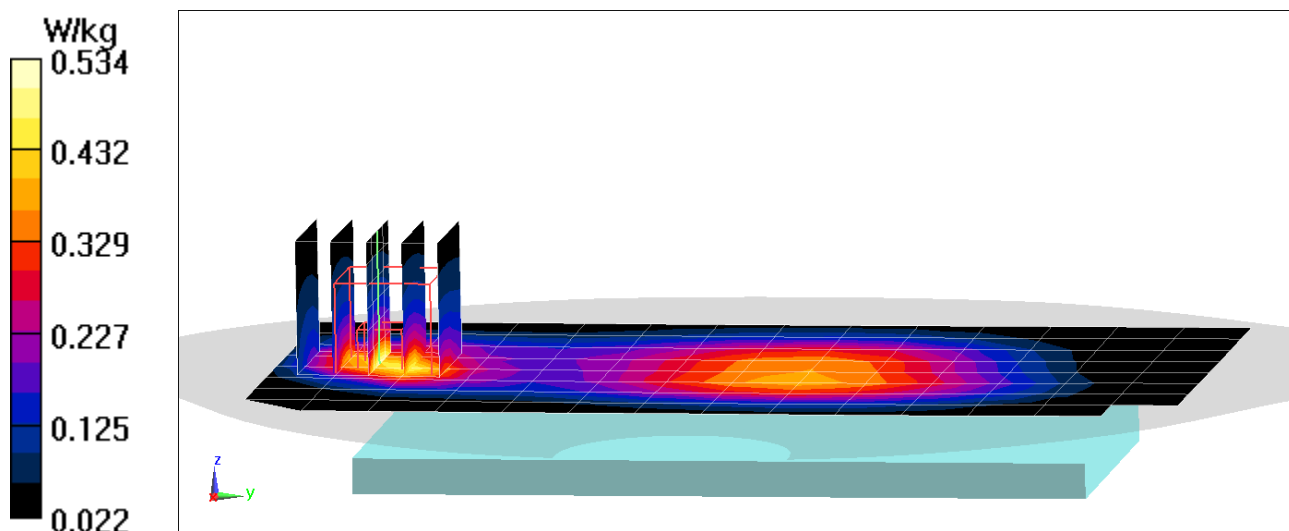

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 836.52 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Cell. EVDO Rev.0, BC 0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.68 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.308 W/kg

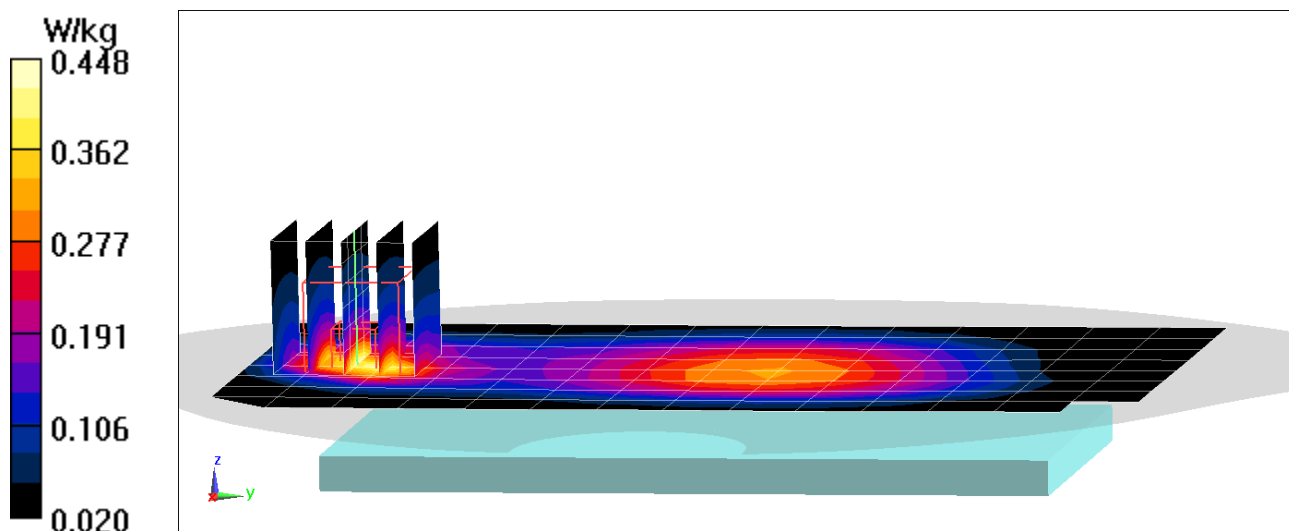

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1908.75$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 53.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/14/2021; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7308; ConvF(7.77, 7.77, 7.77) @ 1908.75 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS CDMA, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.20 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.747 W/kg

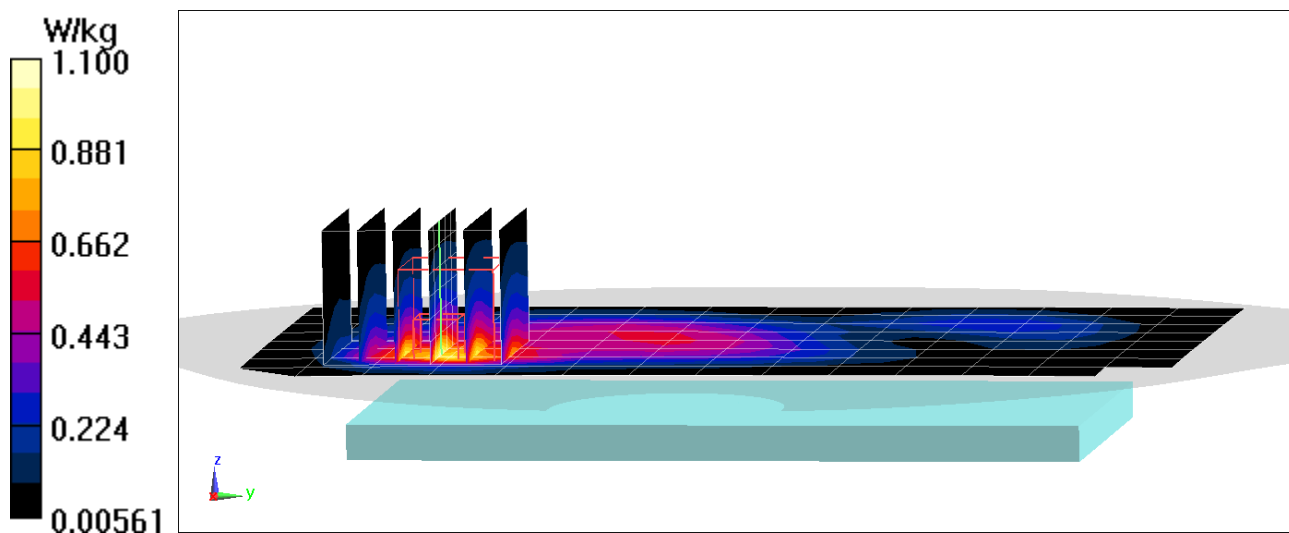

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1908.75$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 53.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/14/2021; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7308; ConvF(7.77, 7.77, 7.77) @ 1908.75 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS EVDO Rev.0, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.33 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.650 W/kg

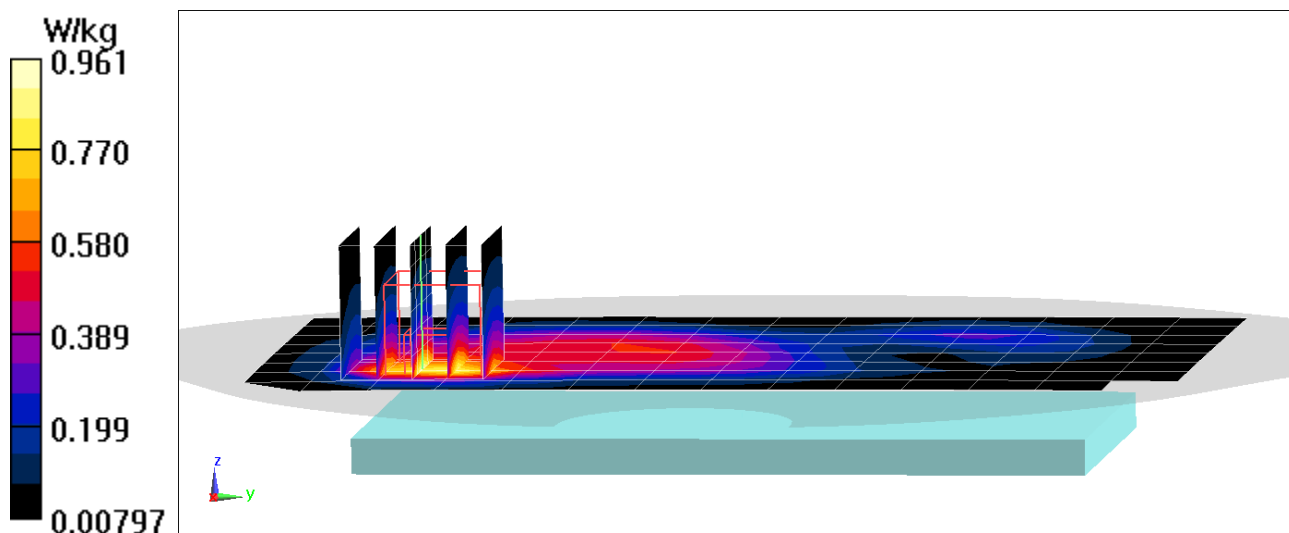

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 836.6 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 4 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.53 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.500 W/kg

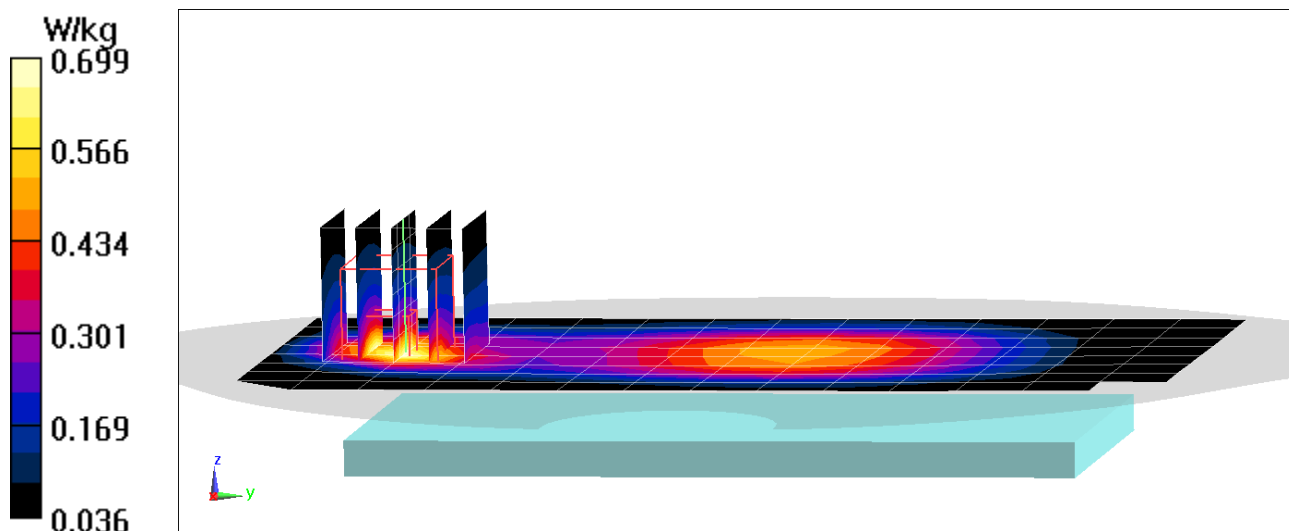

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22733

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 53.435$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 21.4°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7551; ConvF(7.84, 7.84, 7.84) @ 1880 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/16/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 4 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.10 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.504 W/kg

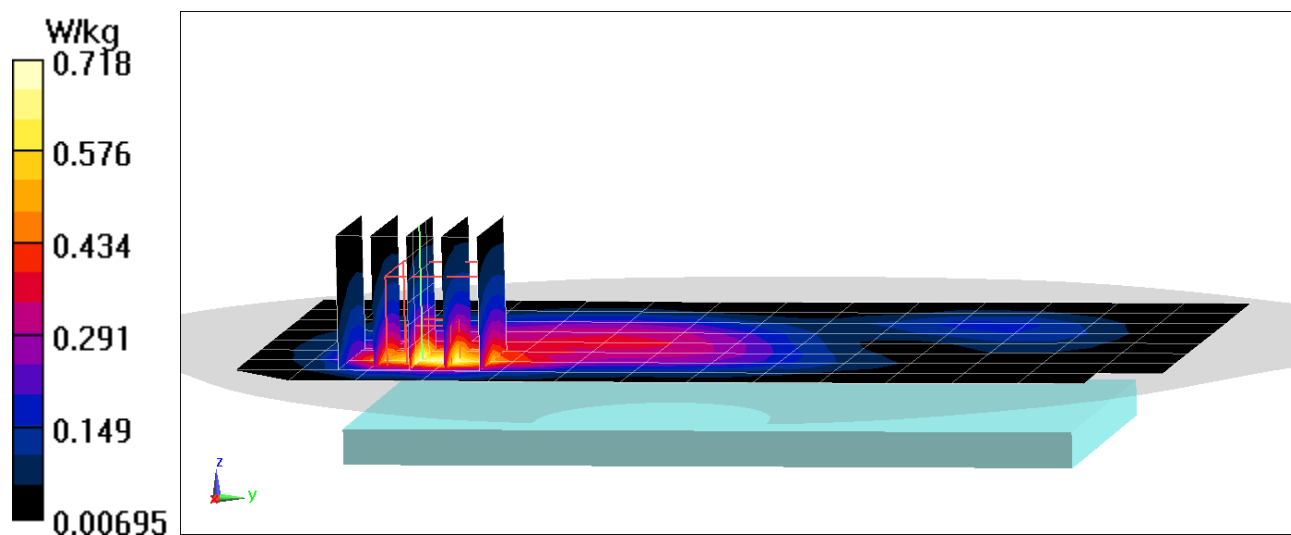

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 836.6 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.12 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.424 W/kg

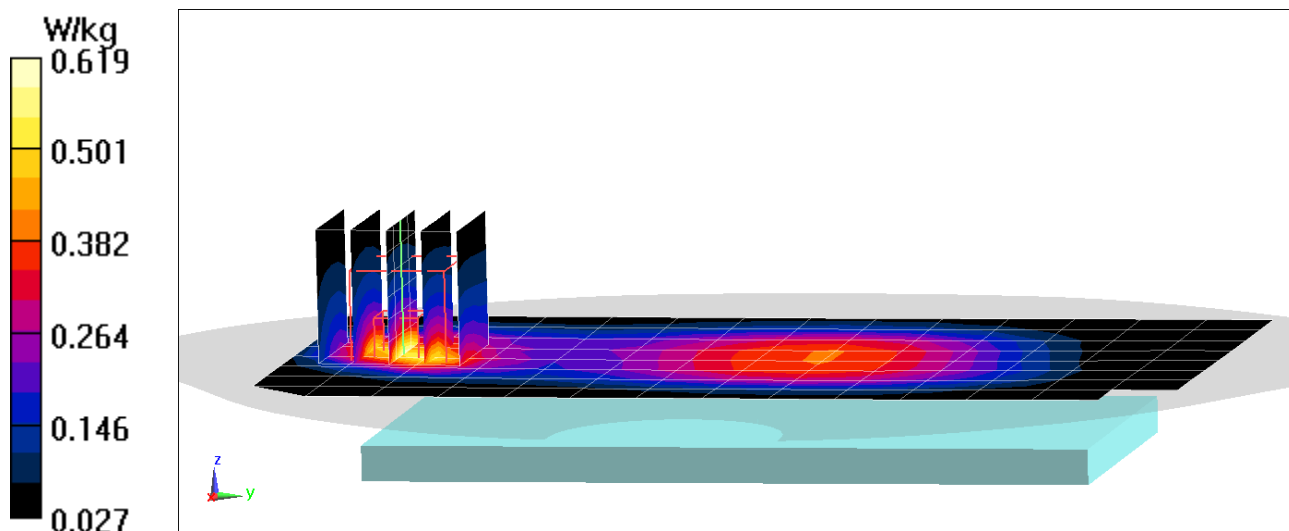

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22733

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1752.6$ MHz; $\sigma = 1.549$ S/m; $\epsilon_r = 51.129$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/14/2021; Ambient Temp: 21.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7357; ConvF(8.17, 8.17, 8.17) @ 1752.6 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.11 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.654 W/kg

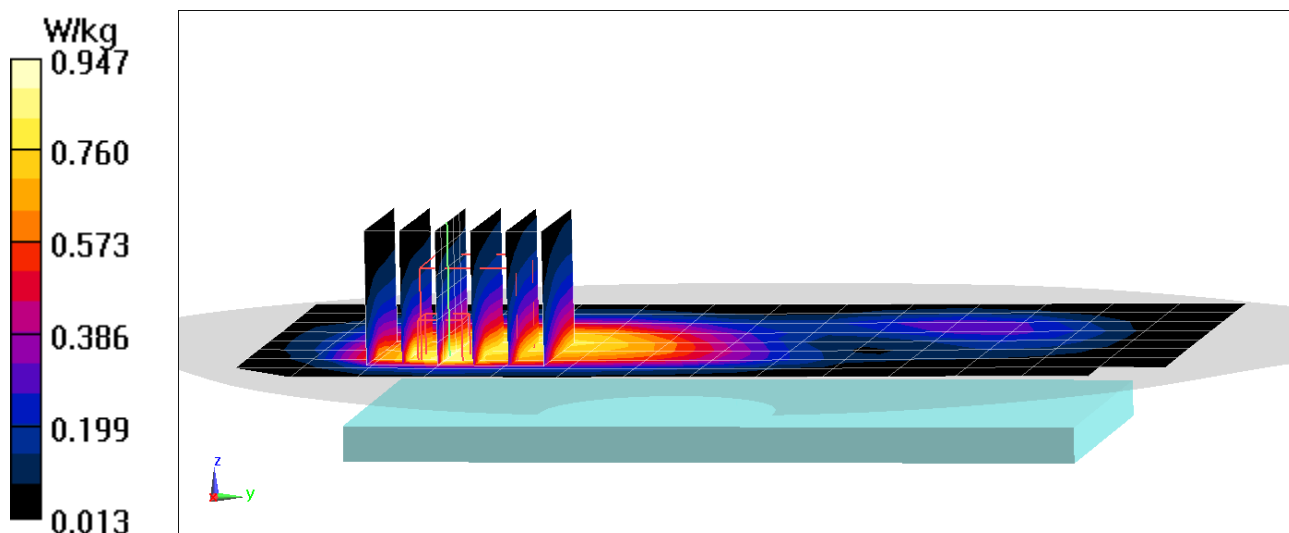

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 53.649$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/14/2021; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7308; ConvF(7.77, 7.77, 7.77) @ 1880 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.49 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.641 W/kg

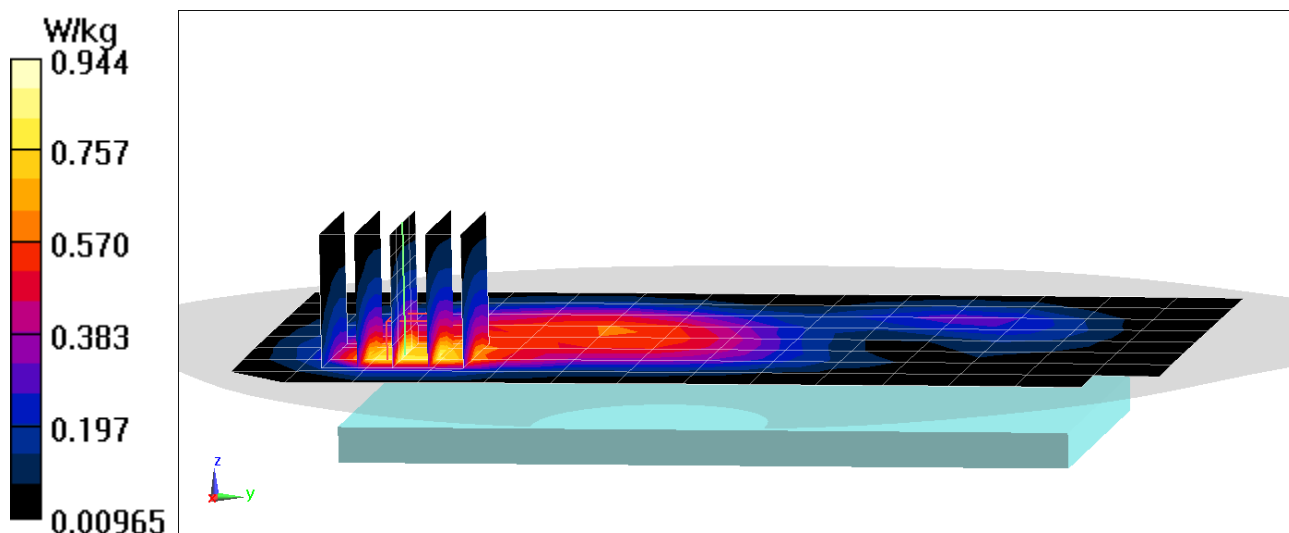

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 54.38$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 20.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7539; ConvF(10.24, 10.24, 10.24) @ 680.5 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.36 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.414 W/kg

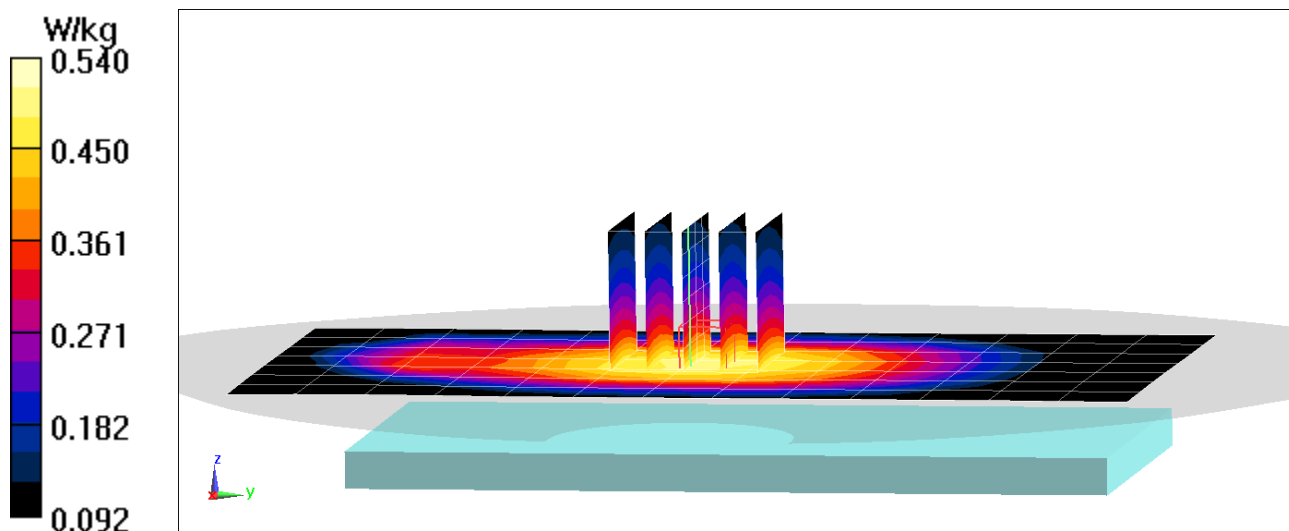

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 54.38$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 20.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7539; ConvF(10.24, 10.24, 10.24) @ 680.5 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Right Edge, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.03 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.474 W/kg

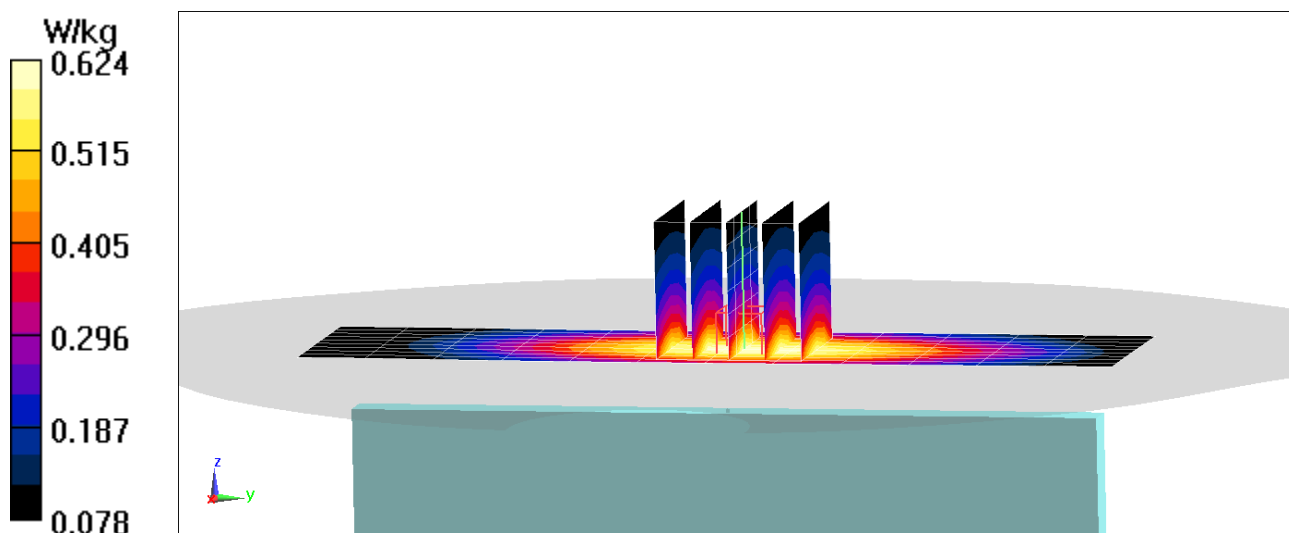

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 54.319$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 20.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7539; ConvF(10.24, 10.24, 10.24) @ 707.5 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.18 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.414 W/kg

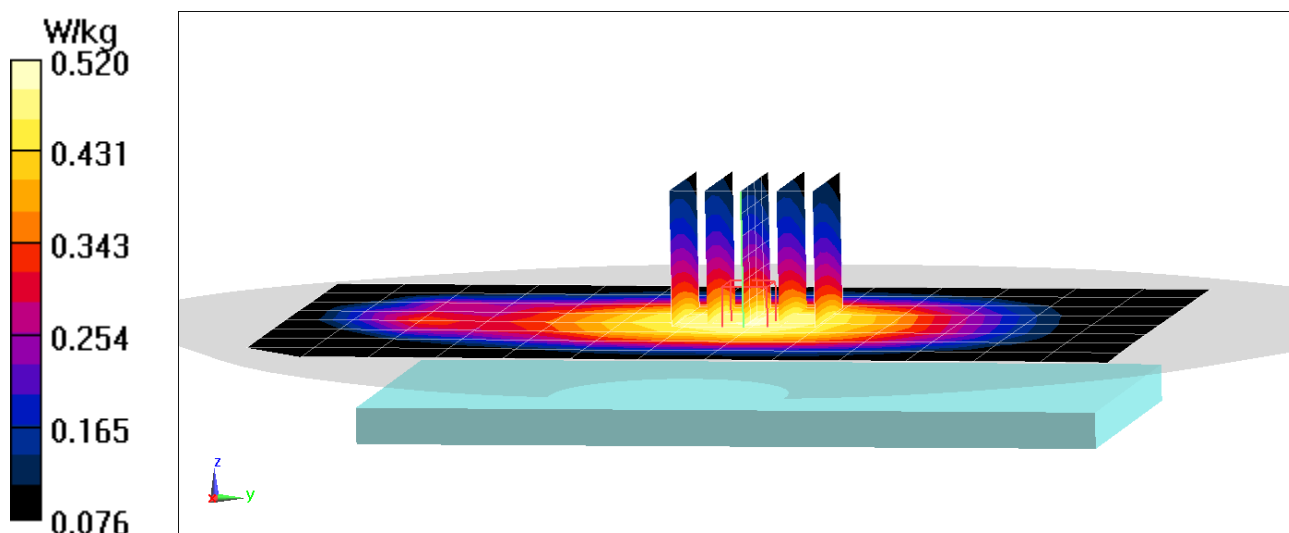

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 54.319$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 20.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7539; ConvF(10.24, 10.24, 10.24) @ 707.5 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Right Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.40 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.437 W/kg

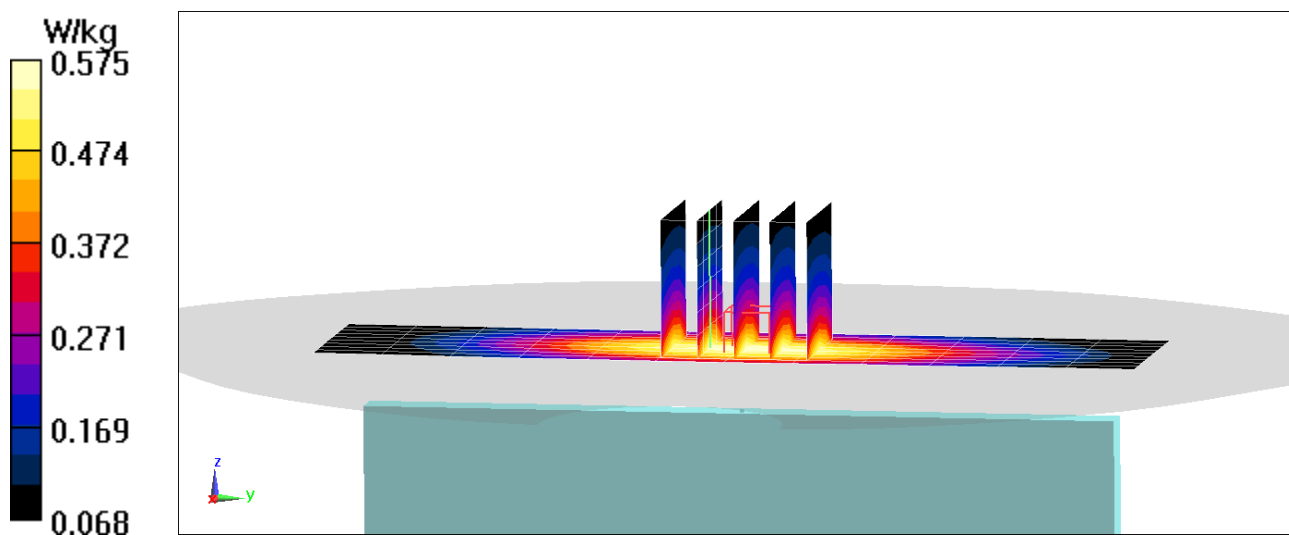

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 54.134$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 20.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7539; ConvF(10.24, 10.24, 10.24) @ 782 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.84 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.340 W/kg

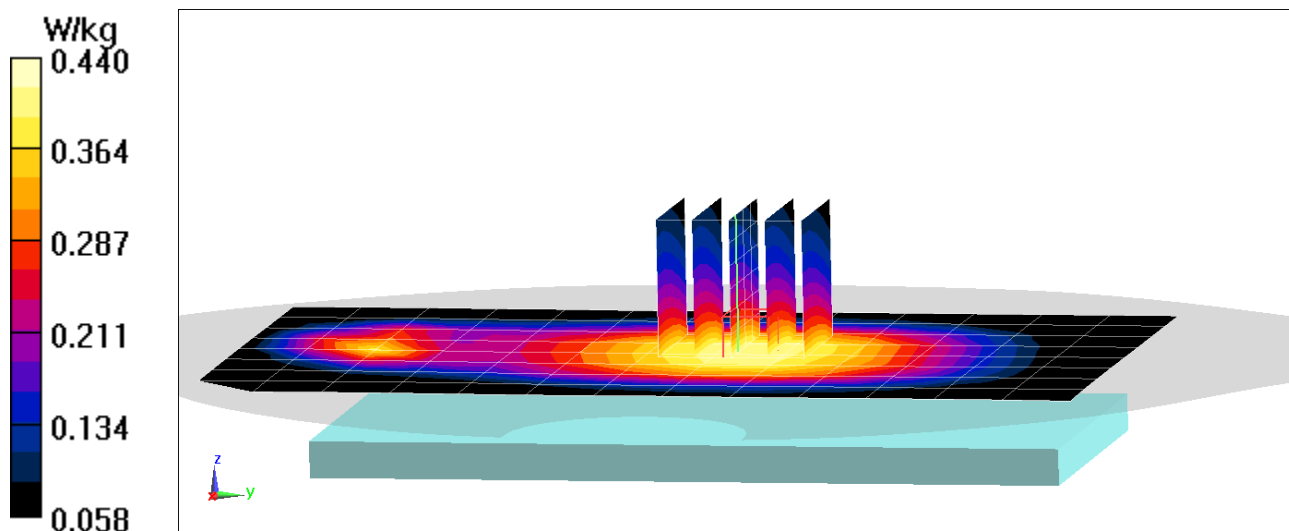

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 54.134$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 20.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7539; ConvF(10.24, 10.24, 10.24) @ 782 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Right Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.59 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.345 W/kg

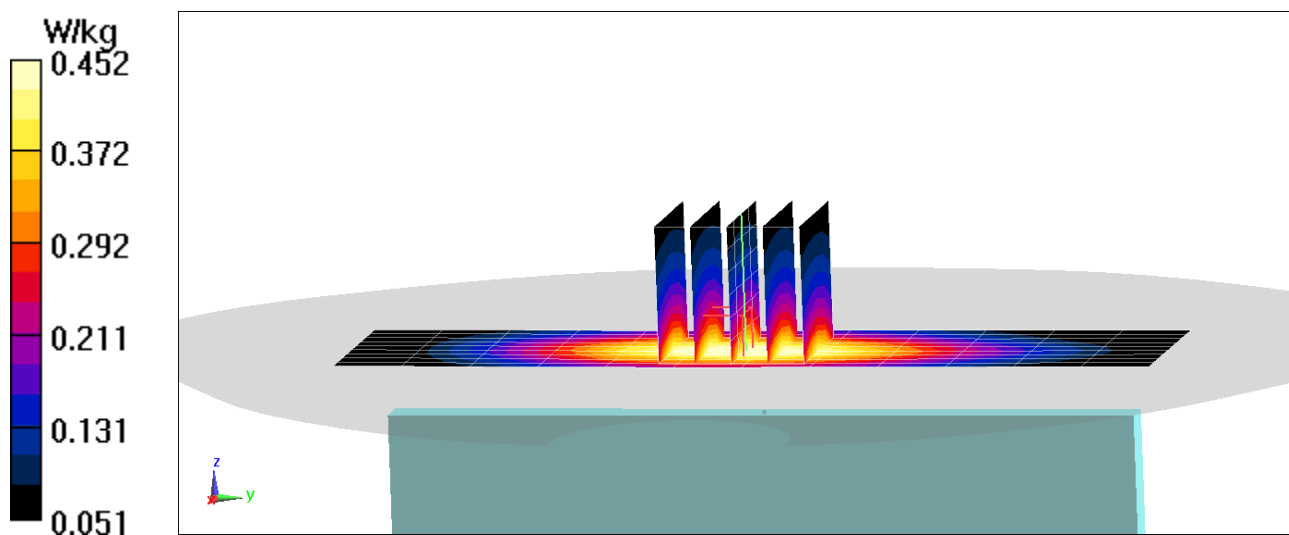

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 54.516$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 831.5 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 36 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.63 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.346 W/kg

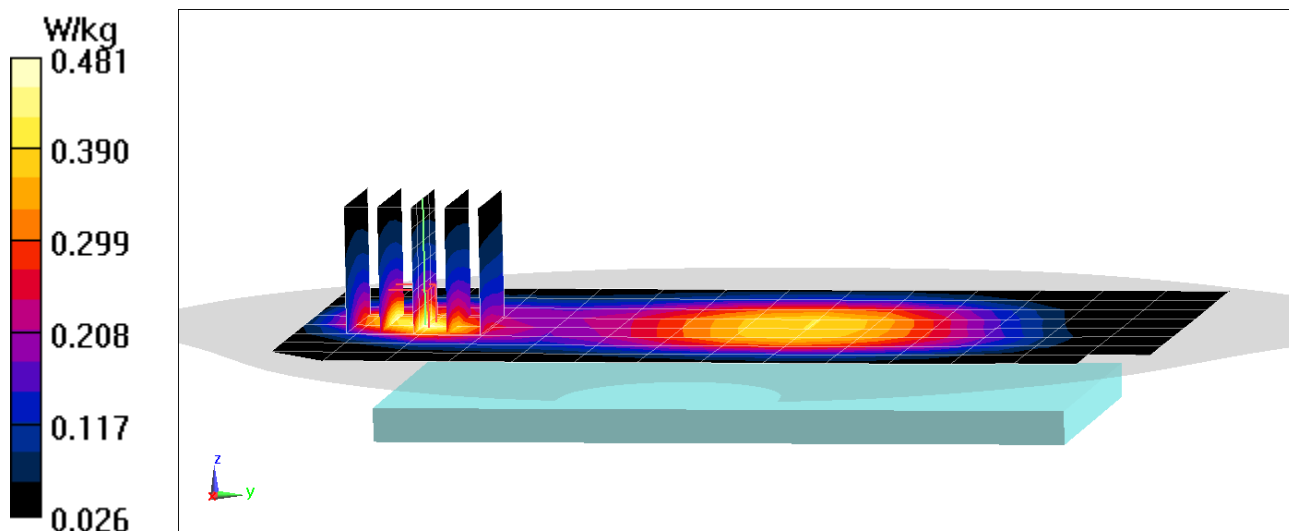

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.551 \text{ S/m}$; $\epsilon_r = 51.444$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 22.4°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7357; ConvF(8.17, 8.17, 8.17) @ 1770 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.84 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.630 W/kg

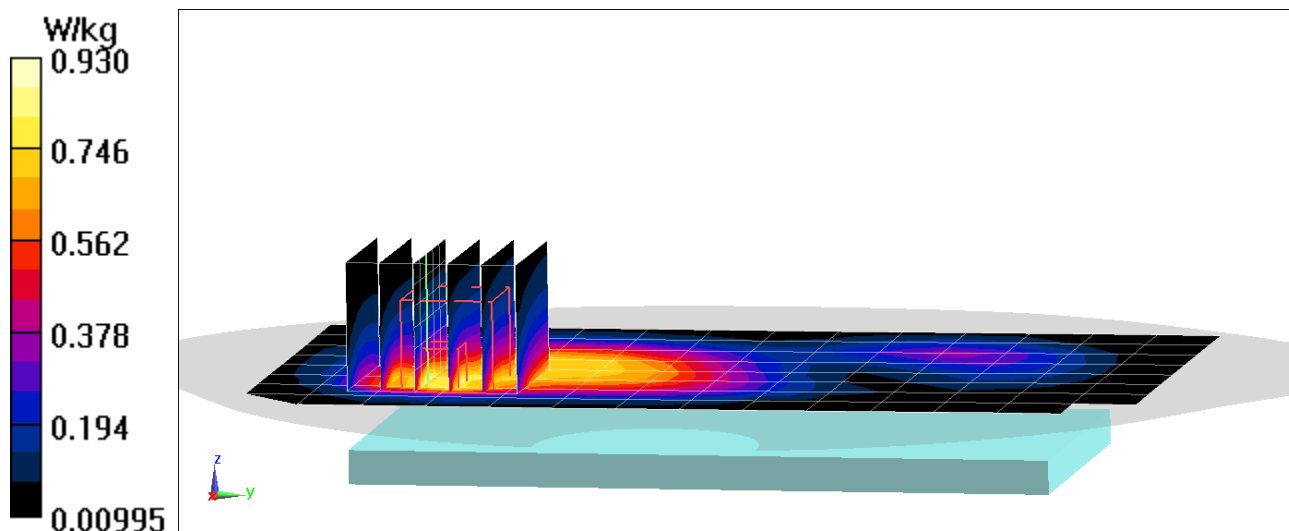

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.551 \text{ S/m}$; $\epsilon_r = 51.444$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 22.4°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7357; ConvF(8.17, 8.17, 8.17) @ 1770 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Body SAR, Left Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (11x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.18 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.642 W/kg

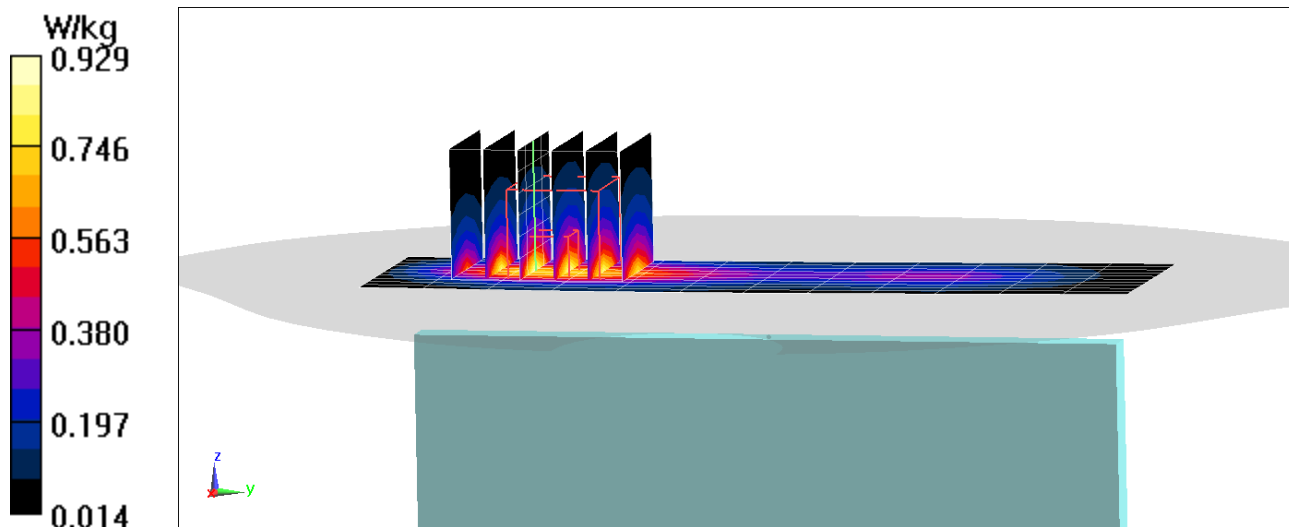

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1882.5$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.579$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/07/2021; Ambient Temp: 21.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7551; ConvF(7.84, 7.84, 7.84) @ 1882.5 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/16/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.27 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.767 W/kg

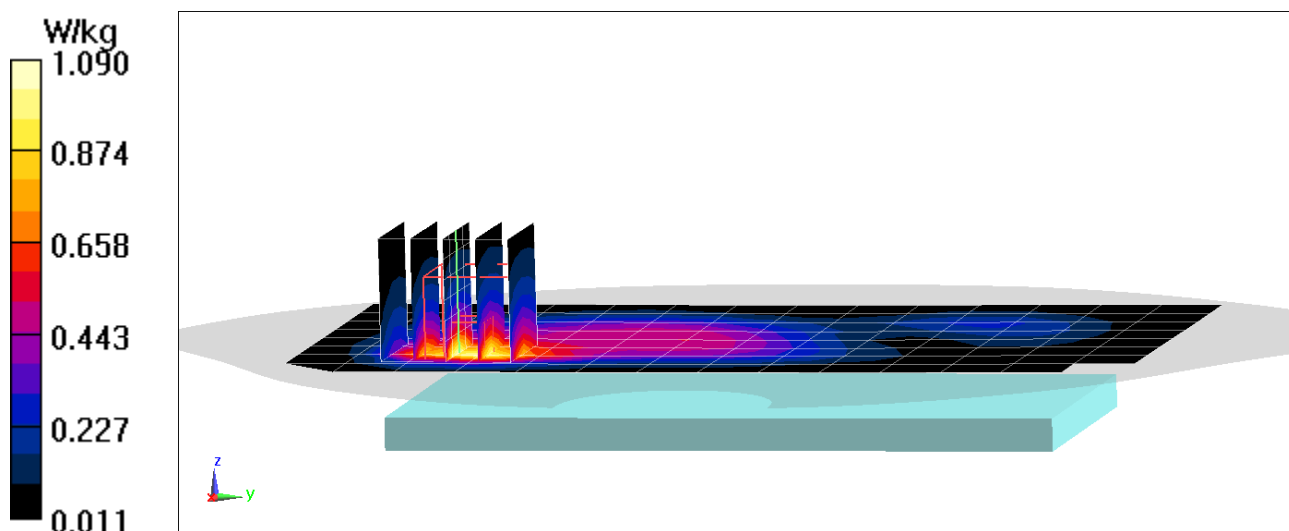

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2680 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used:

$f = 2680 \text{ MHz}$; $\sigma = 2.309 \text{ S/m}$; $\epsilon_r = 50.386$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/27/2021; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2680 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 Power Class 2, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.54 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.790 W/kg

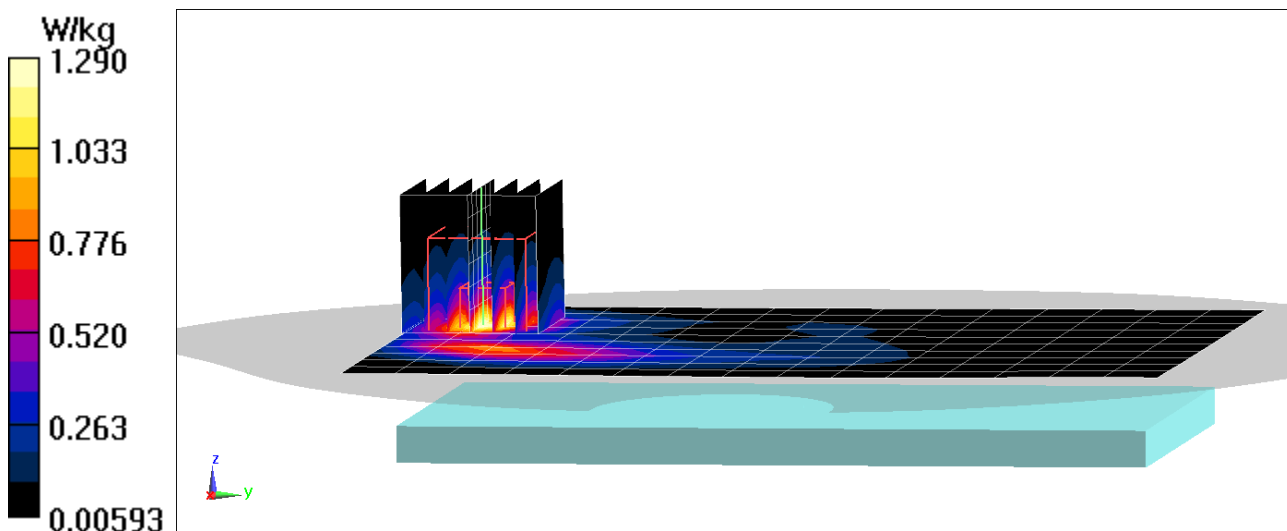

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, _LTE Band 41 (Class 2); Frequency: 2506 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2506$ MHz; $\sigma = 2.104$ S/m; $\epsilon_r = 51.014$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/06/2021; Ambient Temp: 22.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2506 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 Power Class 2, Body SAR, Bottom Edge, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB 50 RB Offset**


Area Scan (11x10x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.61 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.56 W/kg

SAR(1 g) = 1.23 W/kg

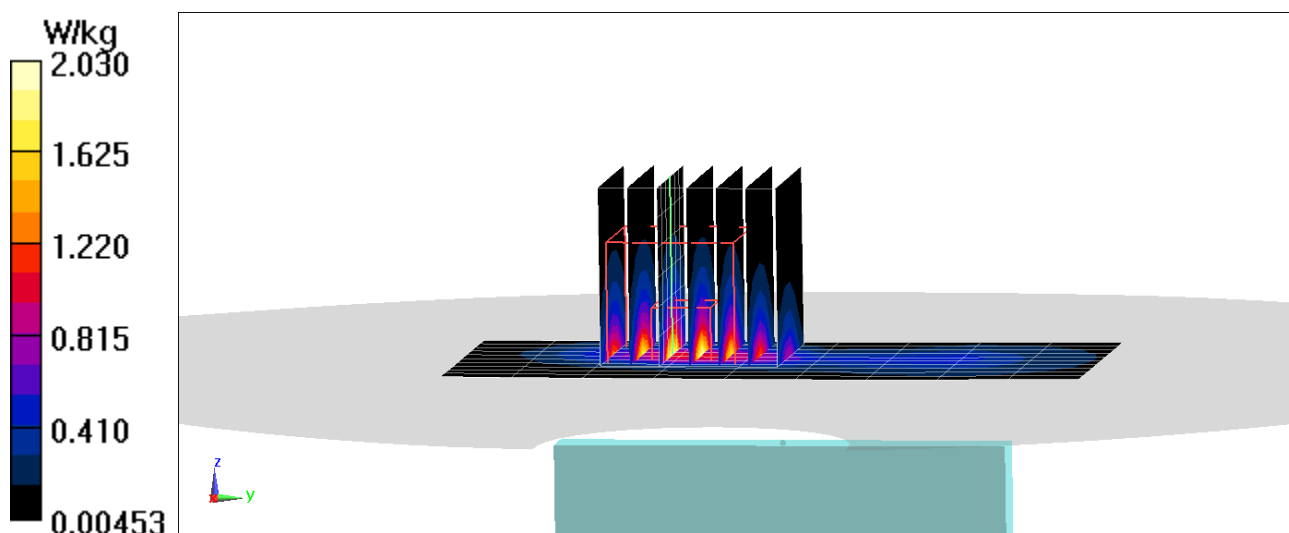

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 20026

Communication System: UID 0, 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.987 \text{ S/m}$; $\epsilon_r = 51.736$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(7.41, 7.41, 7.41) @ 2437 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 6, 1 Mbps, Back Side**


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.298 W/kg

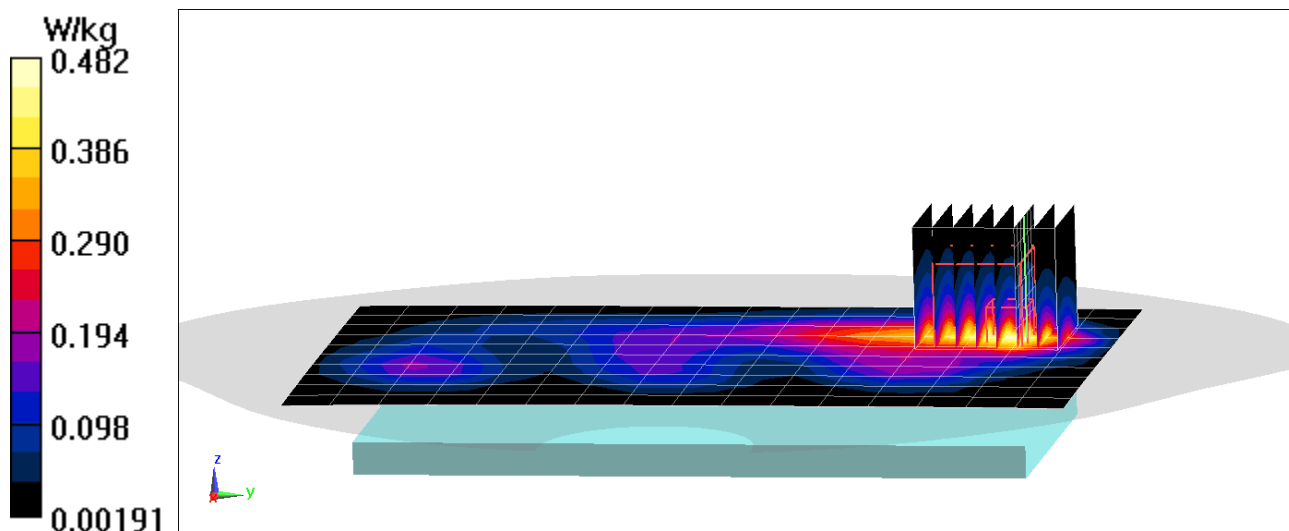

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 20026

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5520 \text{ MHz}$; $\sigma = 5.896 \text{ S/m}$; $\epsilon_r = 46.365$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/18/2021; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7406; ConvF(4.37, 4.37, 4.37) @ 5520 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a, UNII-2C, 20 MHz Bandwidth,
Body SAR, Ch 104, 6 Mbps, Back Side**


Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 10.38 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.572 W/kg

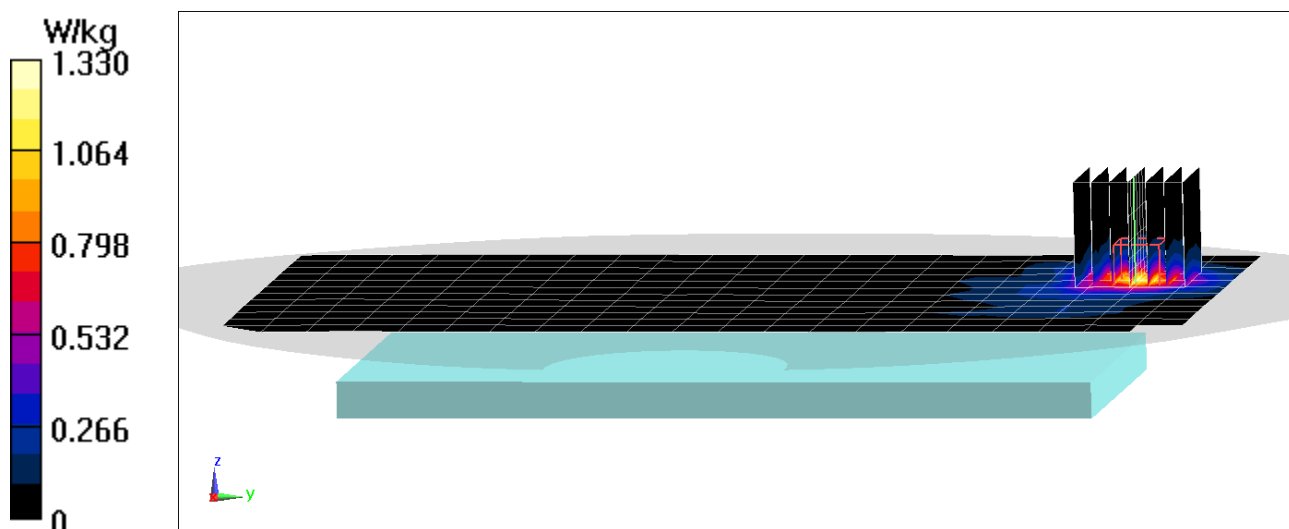

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 20026

Communication System: UID 0, IEEE 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5745 \text{ MHz}$; $\sigma = 6.196 \text{ S/m}$; $\epsilon_r = 46.439$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.8°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7406; ConvF(4.56, 4.56, 4.56) @ 5745 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a, U-NII-3, 20 MHz Bandwidth,
Body SAR, Ch 149, 6 Mbps, Top Edge**


Area Scan (11x15x1): Measurement grid: $dx=5\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 5.186 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 0.794 W/kg

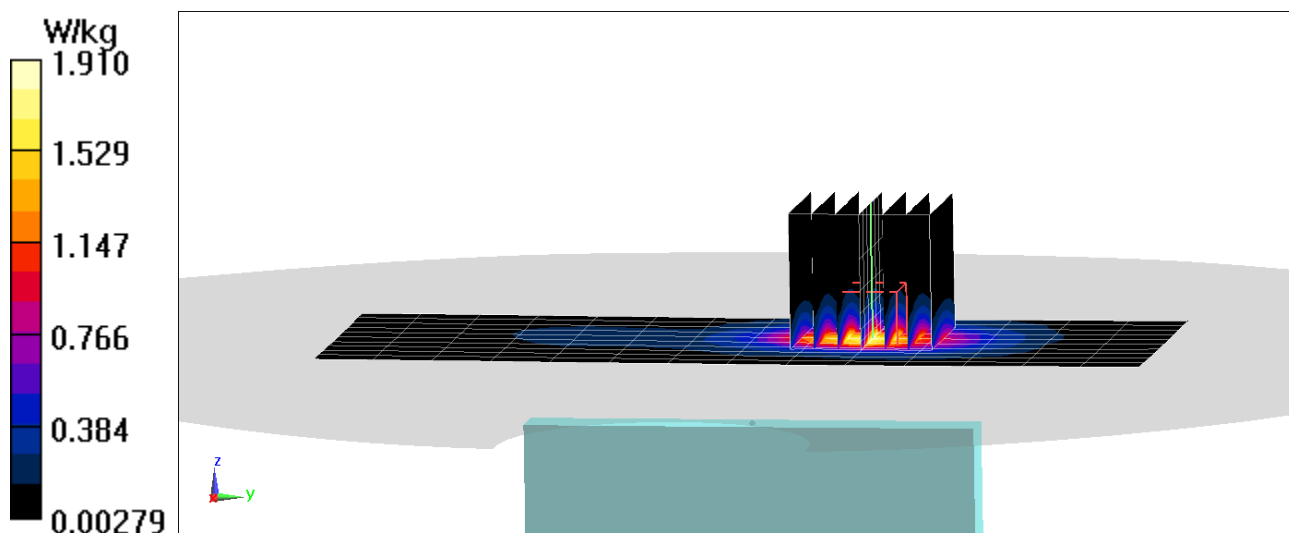

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 20026

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.992 \text{ S/m}$; $\epsilon_r = 51.72$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(7.41, 7.41, 7.41) @ 2441 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.730 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.029 W/kg

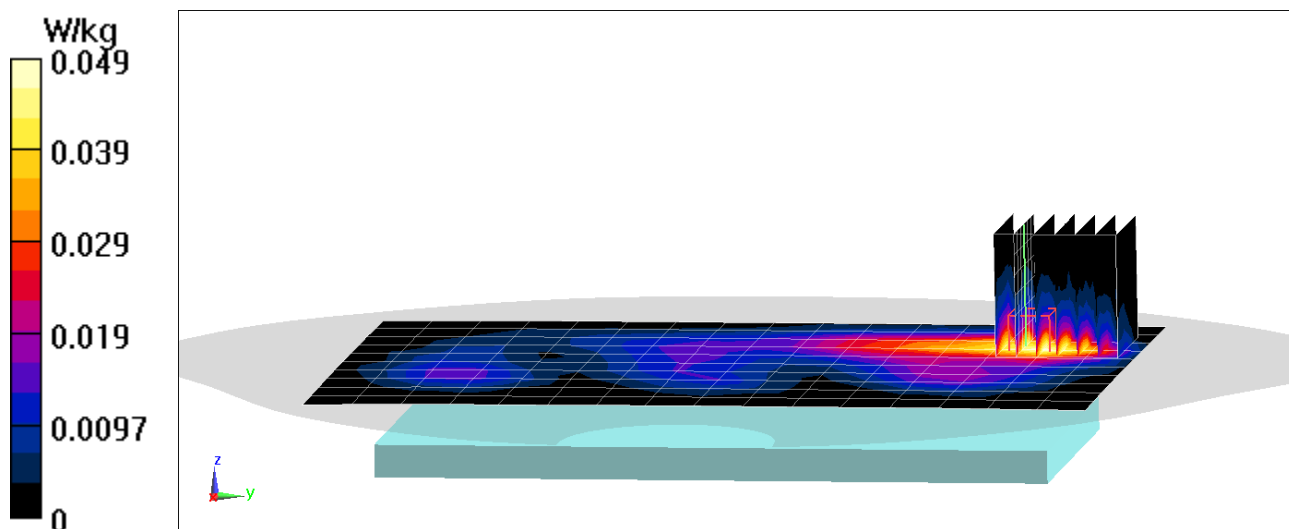

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1908.75 \text{ MHz}$; $\sigma = 1.545 \text{ S/m}$; $\epsilon_r = 53.556$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01/14/2021; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7308; ConvF(7.77, 7.77, 7.77) @ 1908.75 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: PCS EVDO Rev.0, Phablet SAR, Left Edge, High.ch


Area Scan (10x13x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (9x11x8)/Cube 0: Measurement grid: $dx=3.8\text{mm}$, $dy=3.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 61.46 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 22.3 W/kg

SAR(10 g) = 2.31 W/kg

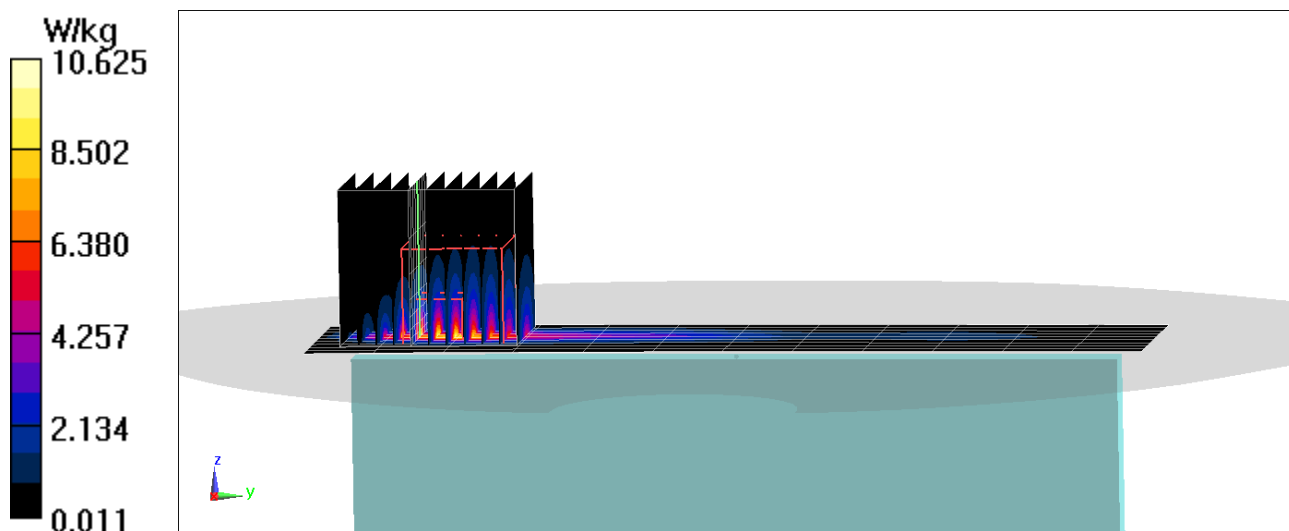

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 22782

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1752.6 \text{ MHz}$; $\sigma = 1.531 \text{ S/m}$; $\epsilon_r = 50.799$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01/21/2021; Ambient Temp: 21.3°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7308; ConvF(8.2, 8.2, 8.2) @ 1752.6 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Phablet SAR, Front side, High.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (10x10x8)/Cube 0: Measurement grid: $dx=3.8\text{mm}$, $dy=3.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 57.46 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 12.7 W/kg

SAR(10 g) = 2.29 W/kg

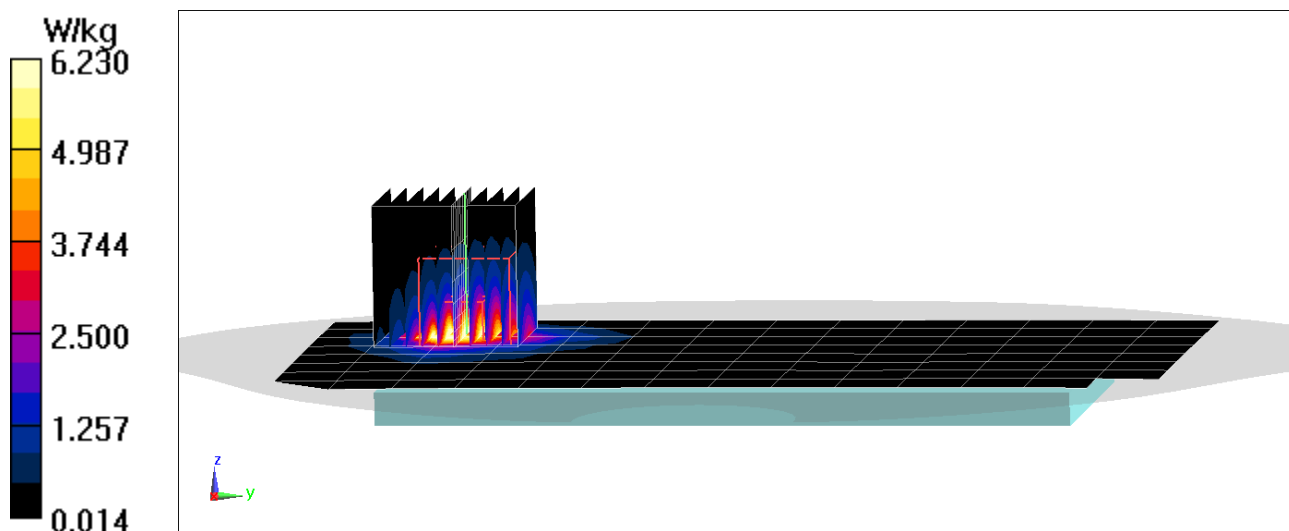

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 53.649$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01/14/2021; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7308; ConvF(7.77, 7.77, 7.77) @ 1880 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Phablet SAR, Left Edge, Mid.ch


Area Scan (10x13x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (10x10x8)/Cube 0: Measurement grid: $dx=3.8\text{mm}$, $dy=3.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 66.15 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 26.3 W/kg

SAR(10 g) = 2.36 W/kg

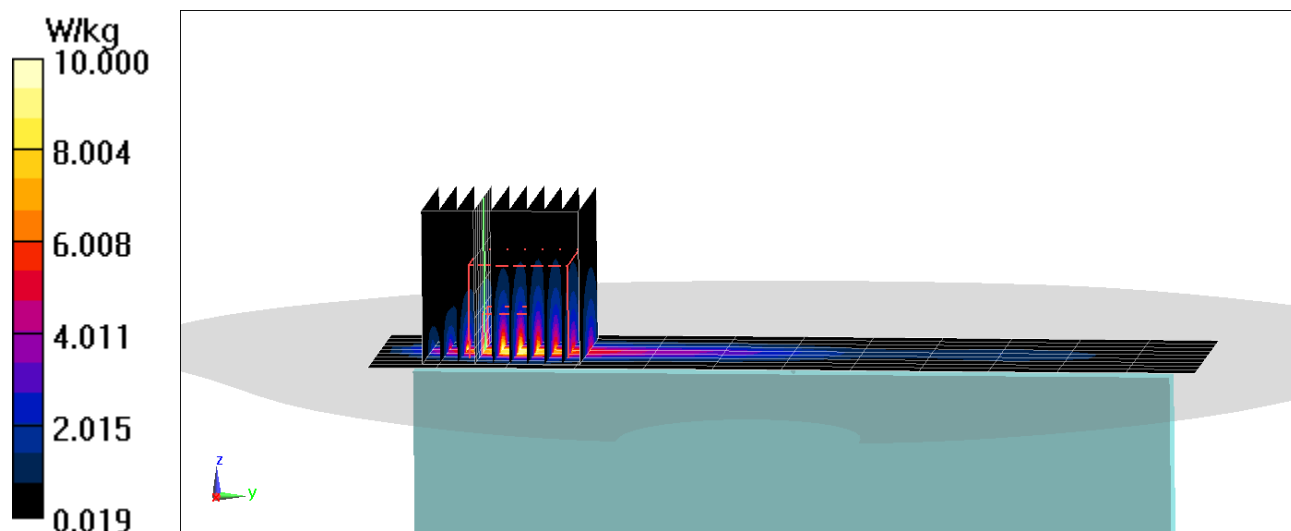

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.548 \text{ S/m}$; $\epsilon_r = 51.423$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01/14/2021; Ambient Temp: 20.3°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN7410; ConvF(8.17, 8.17, 8.17) @ 1770 MHz; Calibrated: 7/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/15/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Phablet SAR, Left Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (10x13x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (10x11x8)/Cube 0: Measurement grid: $dx=3.8\text{mm}$, $dy=3.8\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 60.93 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 22.8 W/kg

SAR(10 g) = 2.39 W/kg

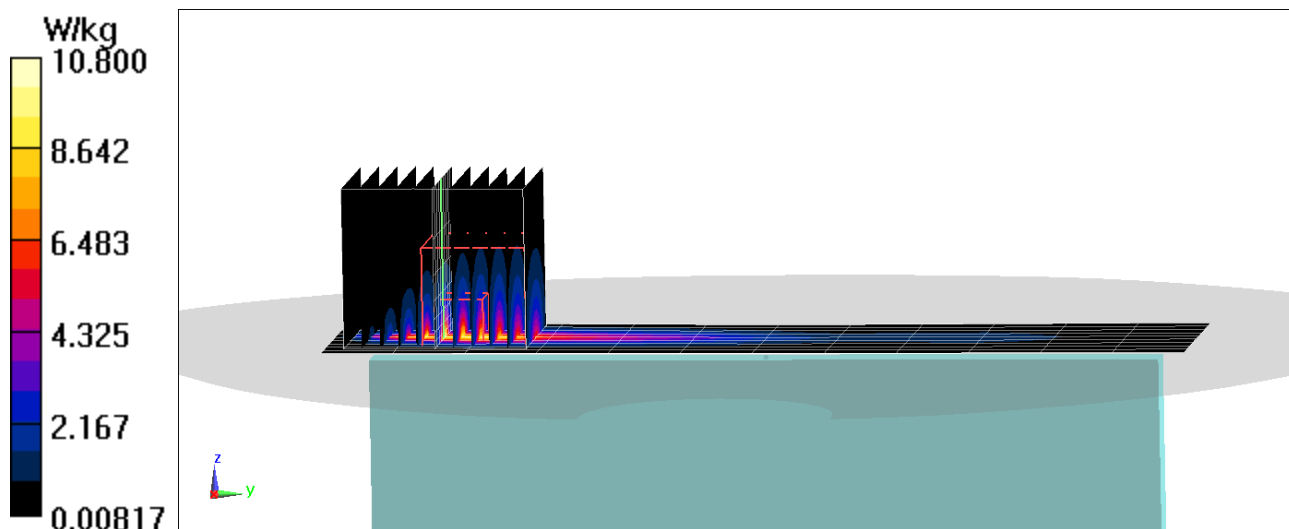

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 23830

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1882.5$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.579$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01/07/2021; Ambient Temp: 21.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7551; ConvF(7.84, 7.84, 7.84) @ 1882.5 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/16/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Phablet SAR, Left Edge, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (11x15x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (10x13x8)/Cube 0: Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 62.33 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(10 g) = 2.07 W/kg

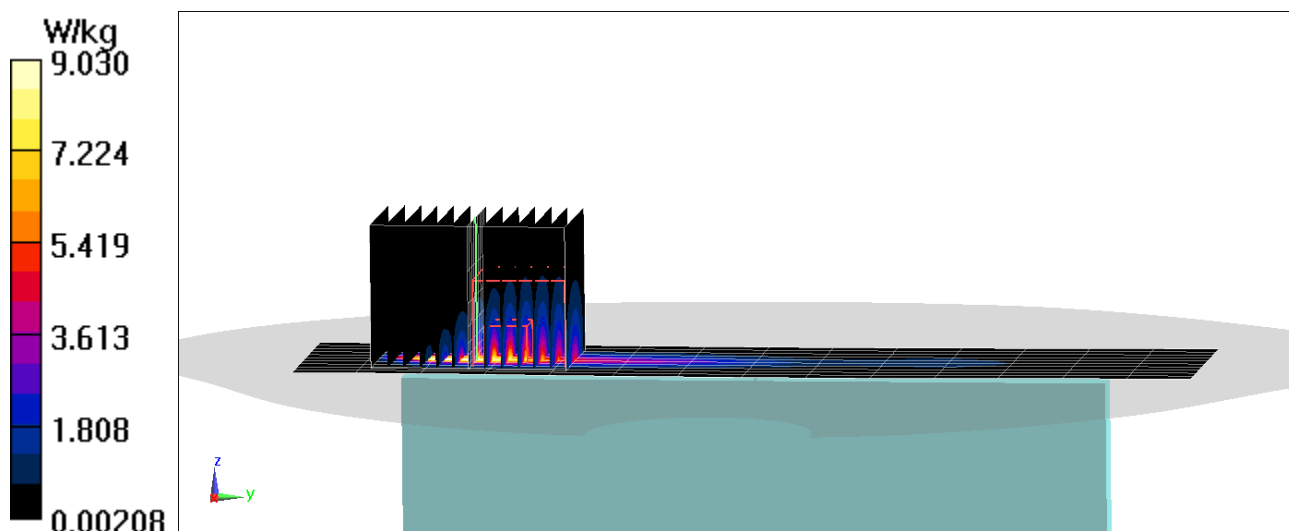

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 21222

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2680 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used:

$f = 2680 \text{ MHz}$; $\sigma = 2.309 \text{ S/m}$; $\epsilon_r = 50.386$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01/27/2021; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2680 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 Power Class 2, Phablet SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (14x14x8)/Cube 0: Measurement grid: $dx=2.4\text{mm}$, $dy=2.4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 58.90 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(10 g) = 2.59 W/kg

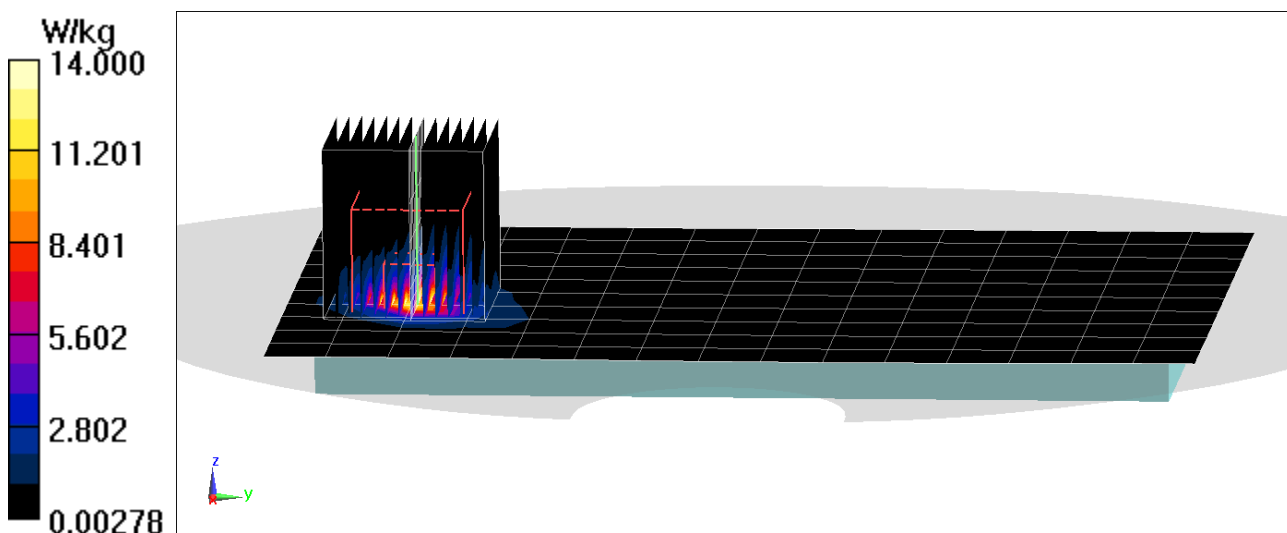

PCTEST

DUT: ZNFK420TM; Type: Portable Handset; Serial: 20026

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5540 \text{ MHz}$; $\sigma = 5.915 \text{ S/m}$; $\epsilon_r = 46.795$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.8°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7406; ConvF(4.37, 4.37, 4.37) @ 5540 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth,
Phablet SAR, Ch 108, 6 Mbps, Top Edge**


Area Scan (10x15x1): Measurement grid: dx=5mm, dy=10mm

Zoom Scan (17x17x7)/Cube 0: Measurement grid: dx=1.9mm, dy=1.9mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 7.575 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 104 W/kg

SAR(10 g) = 2.01 W/kg

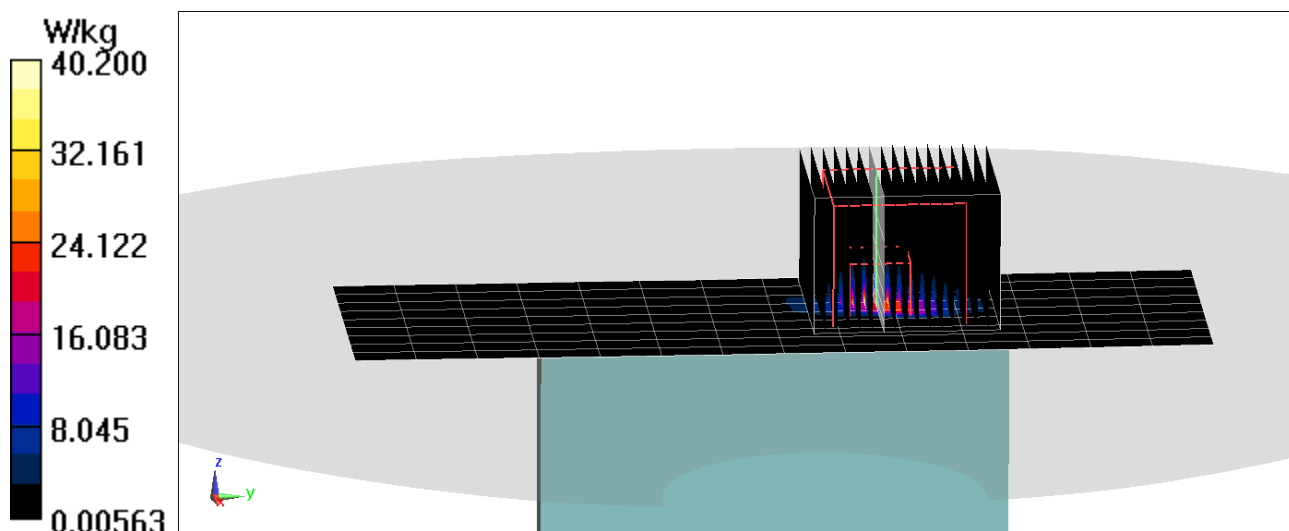

APPENDIX B: SYSTEM VERIFICATION

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 42.153$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01/11/2021; Ambient Temp: 20.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7357; ConvF(10.23, 10.23, 10.23) @ 750 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 30; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.62 W/kg

Deviation(1 g) = -7.74%

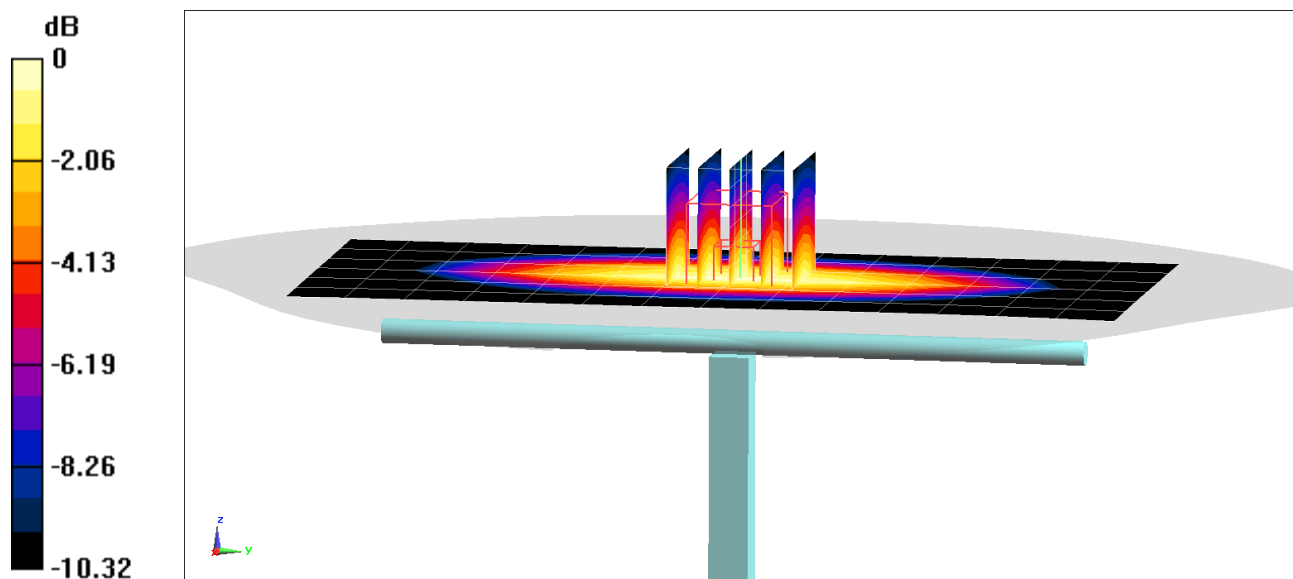

0 dB = 2.13 W/kg = 3.28 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 42.006$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01/06/2021; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7308; ConvF(10.17, 10.17, 10.17) @ 835 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 1.94 W/kg

Deviation(1 g) = 0.52%

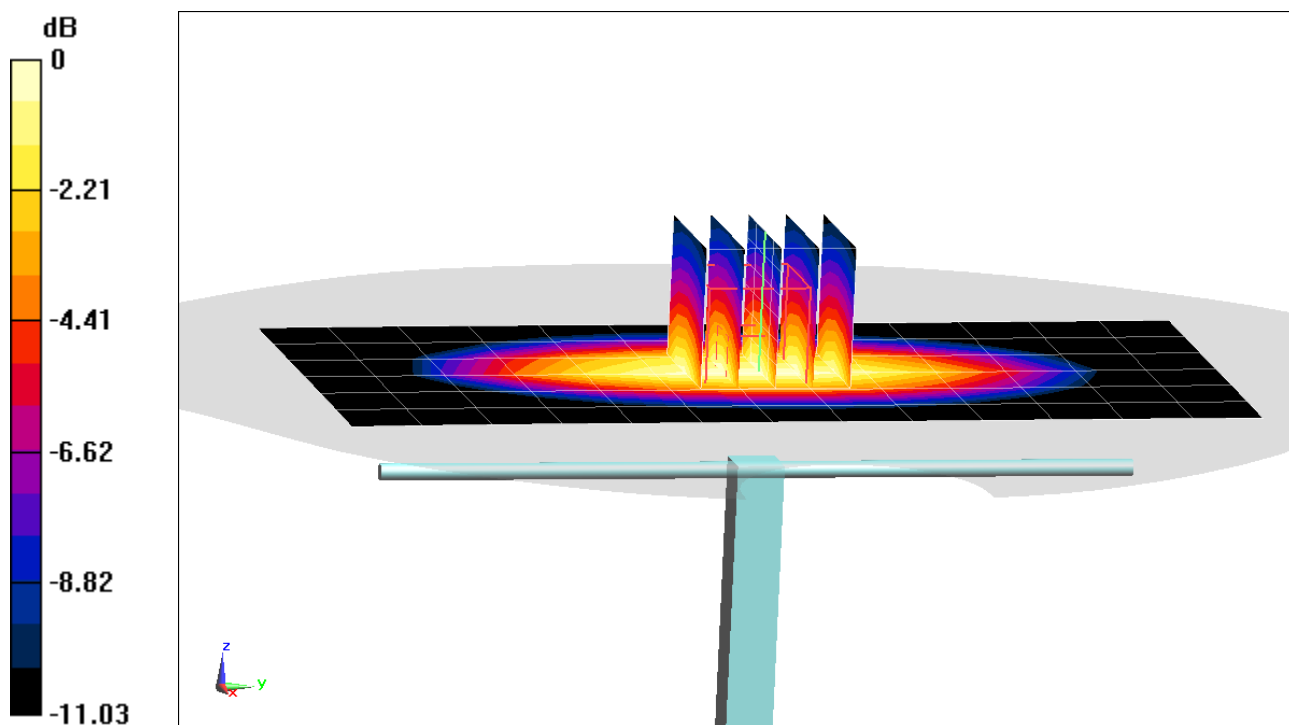

0 dB = 2.65 W/kg = 4.23 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.399 \text{ S/m}$; $\epsilon_r = 39.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/20/2021; Ambient Temp: 22.6°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7357; ConvF(8.69, 8.69, 8.69) @ 1750 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 30; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.01 W/kg

SAR(1 g) = 3.79 W/kg

Deviation(1 g) = 3.84%

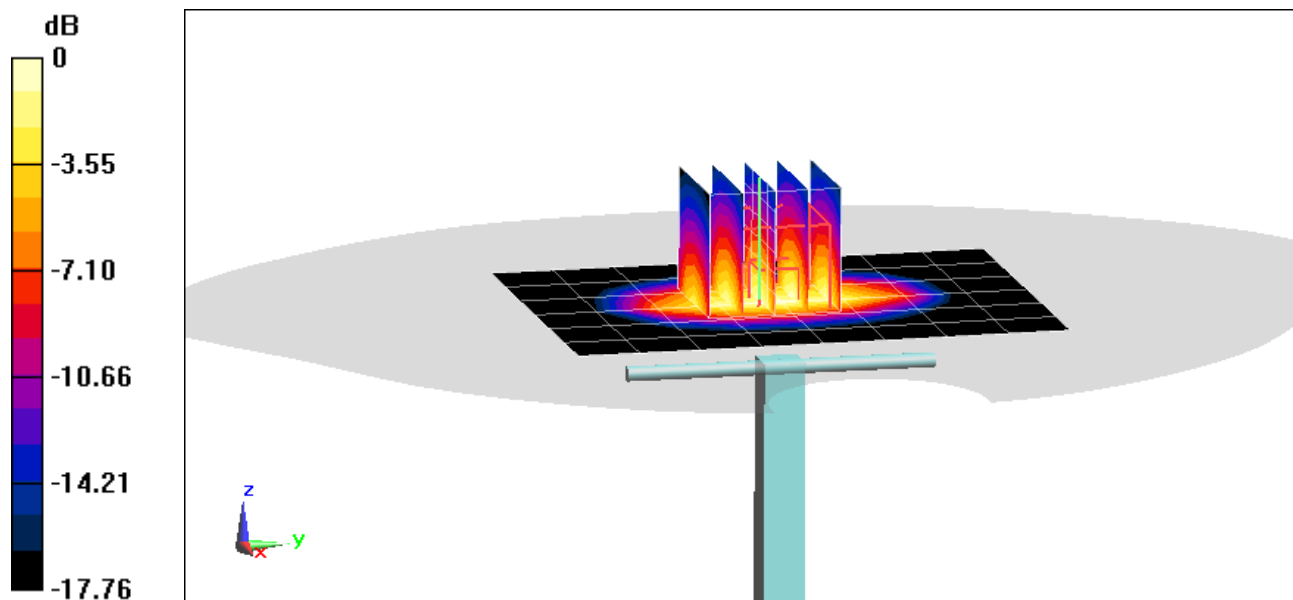

0 dB = 5.80 W/kg = 7.63 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.408 \text{ S/m}$; $\epsilon_r = 38.778$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/05/2021; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7539; ConvF(8.03, 8.03, 8.03) @ 1900 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.90 W/kg

SAR(1 g) = 4.16 W/kg

Deviation(1 g) = 6.39%

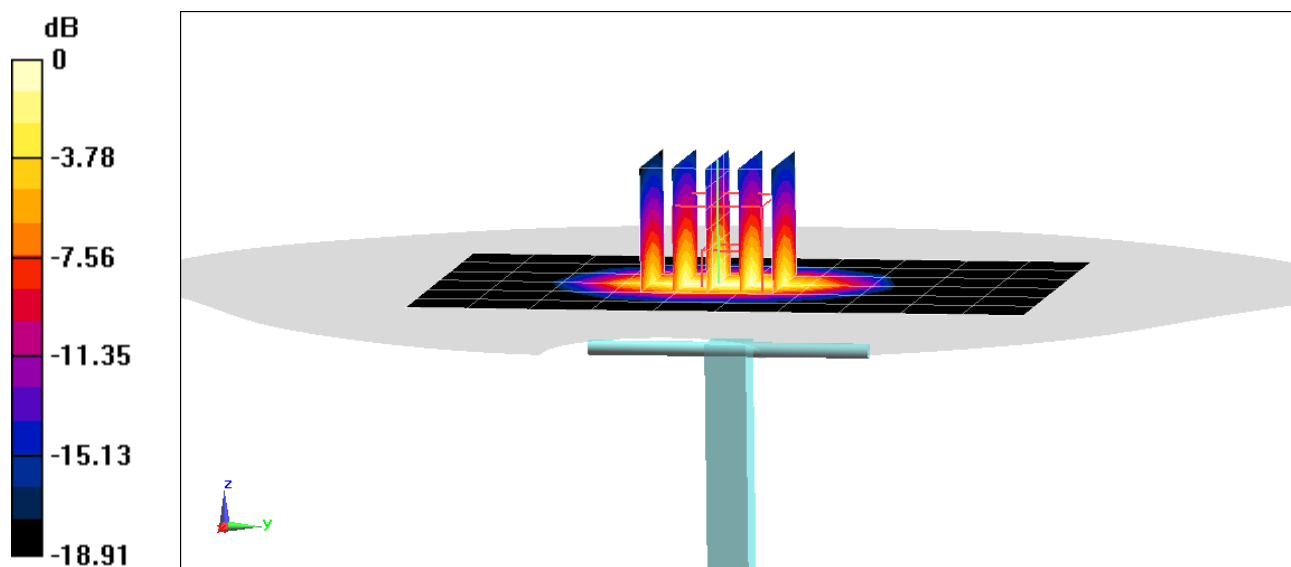

0 dB = 6.57 W/kg = 8.18 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.847 \text{ S/m}$; $\epsilon_r = 39.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/07/2021; Ambient Temp: 23.1°C; Tissue Temp: 24.7°C

Probe: EX3DV4 - SN7571; ConvF(7.28, 7.28, 7.28) @ 2450 MHz; Calibrated: 12/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/7/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.18 W/kg

Deviation(1 g) = 0.78%

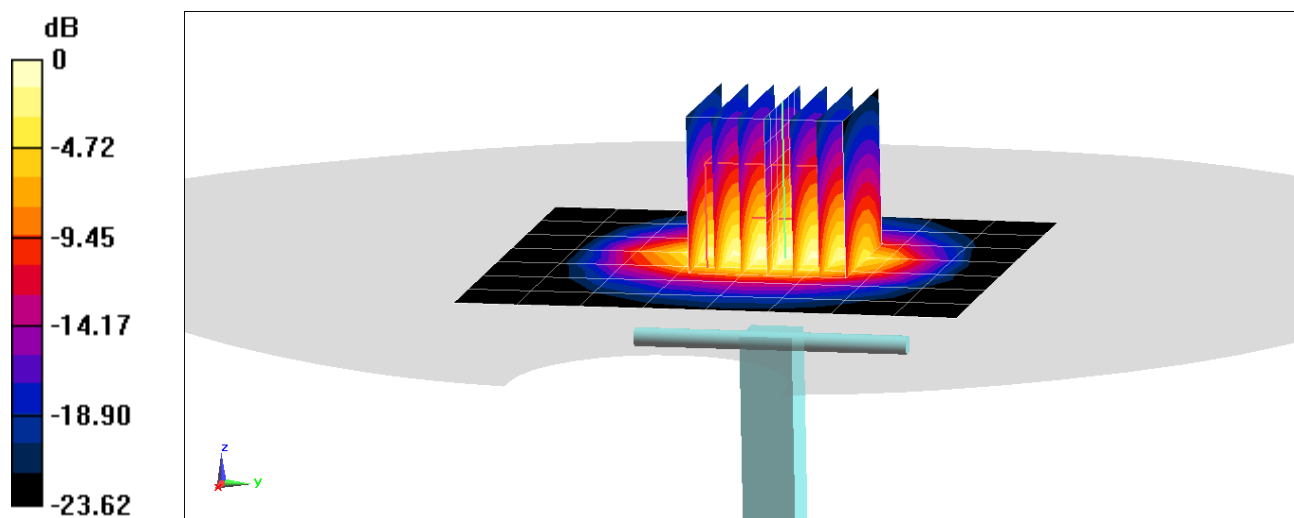

0 dB = 8.90 W/kg = 9.49 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.832 \text{ S/m}$; $\epsilon_r = 39.546$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/10/2021; Ambient Temp: 22.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7571; ConvF(7.28, 7.28, 7.28) @ 2450 MHz; Calibrated: 12/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/7/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 4.97 W/kg

Deviation(1 g) = -3.31%

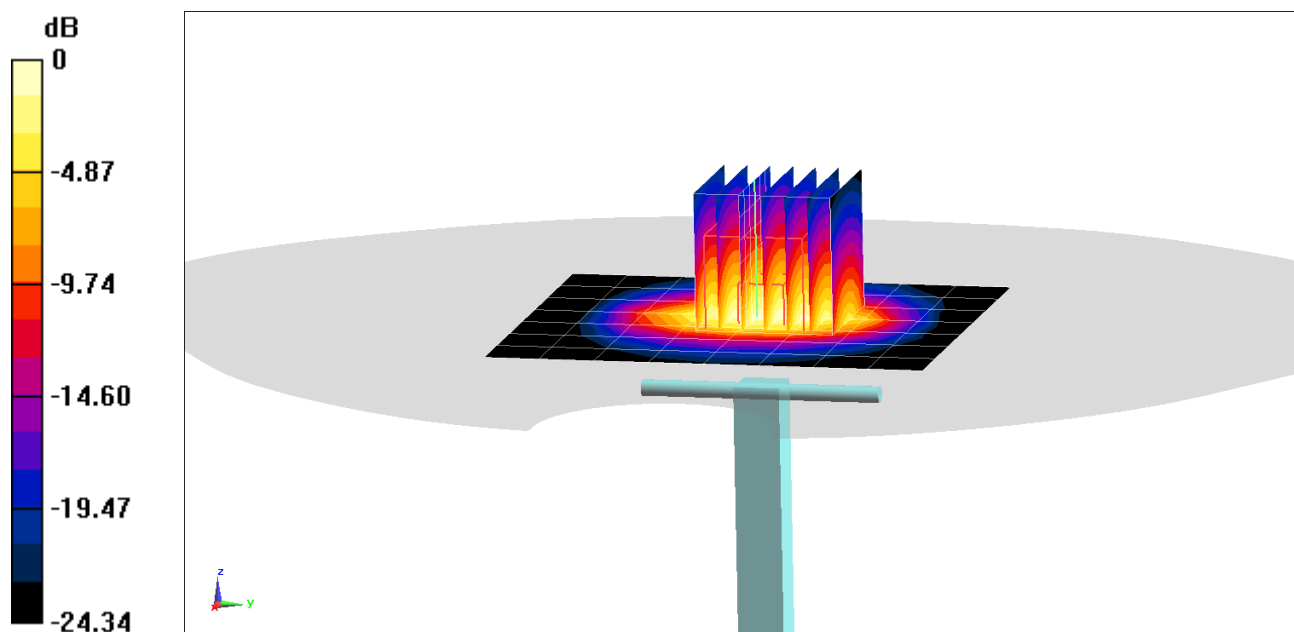

0 dB = 8.51 W/kg = 9.30 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.832 \text{ S/m}$; $\epsilon_r = 39.277$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/28/2021; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7571; ConvF(7.28, 7.28, 7.28) @ 2450 MHz; Calibrated: 12/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/7/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5 W/kg

Deviation(1 g) = -4.40%

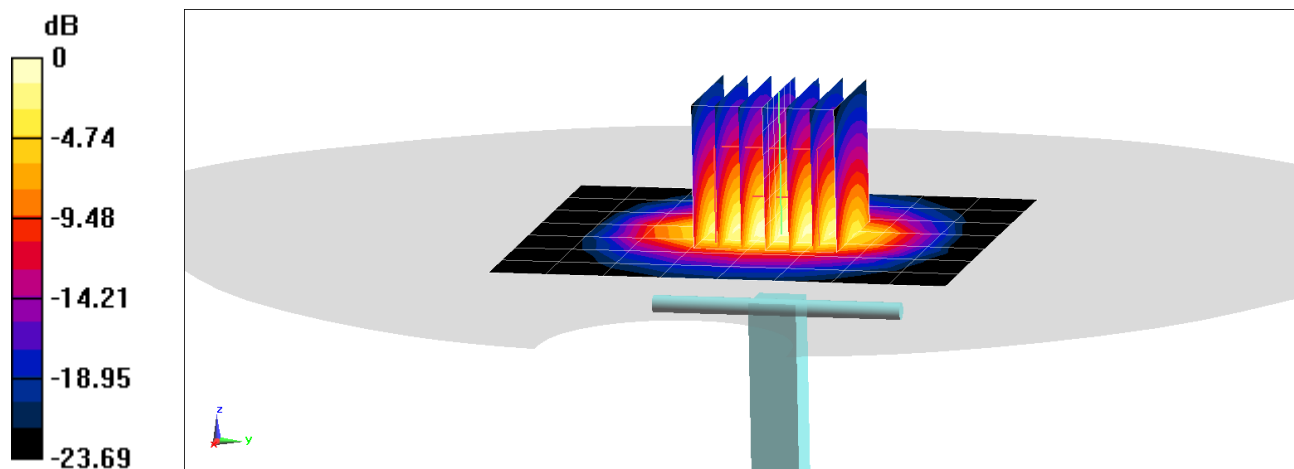

0 dB = 8.23 W/kg = 9.15 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.012 \text{ S/m}$; $\epsilon_r = 38.661$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/28/2021; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7571; ConvF(7.05, 7.05, 7.05) @ 2600 MHz; Calibrated: 12/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/7/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 5.79 W/kg

Deviation(1 g) = 3.21%

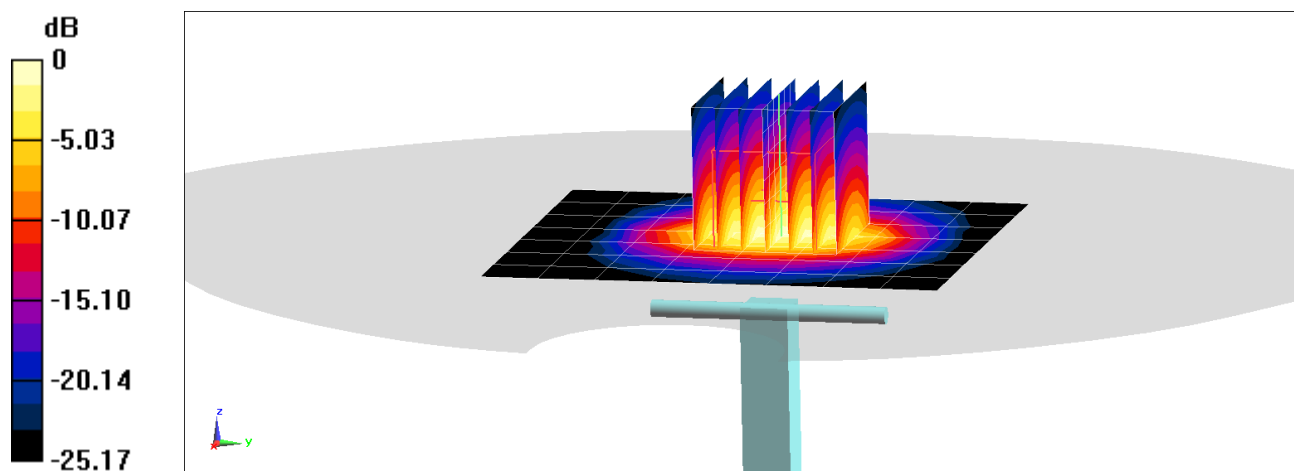

0 dB = 10.3 W/kg = 10.13 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5250$ MHz; $\sigma = 4.692$ S/m; $\epsilon_r = 34.957$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/05/2021; Ambient Temp: 20.7°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7357; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 3.86 W/kg

Deviation(1 g) = -2.53%

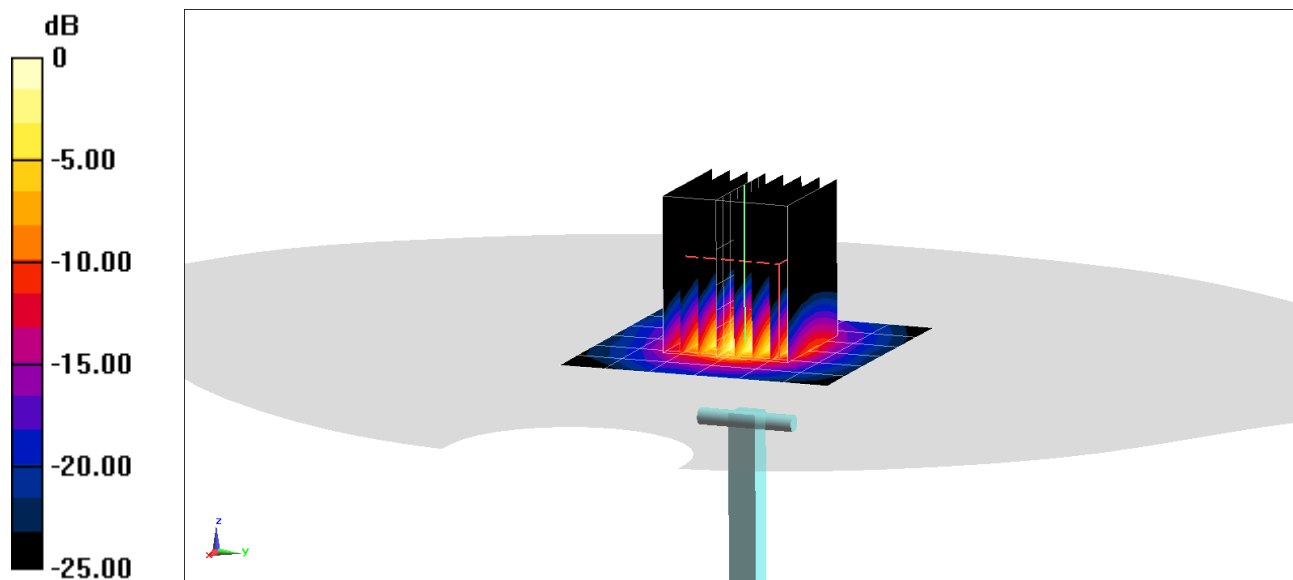

0 dB = 9.03 W/kg = 9.56 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5600$ MHz; $\sigma = 5.087$ S/m; $\epsilon_r = 34.331$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/05/2021; Ambient Temp: 20.7°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7357; ConvF(4.93, 4.93, 4.93) @ 5600 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 3.98 W/kg

Deviation(1 g) = -5.35%

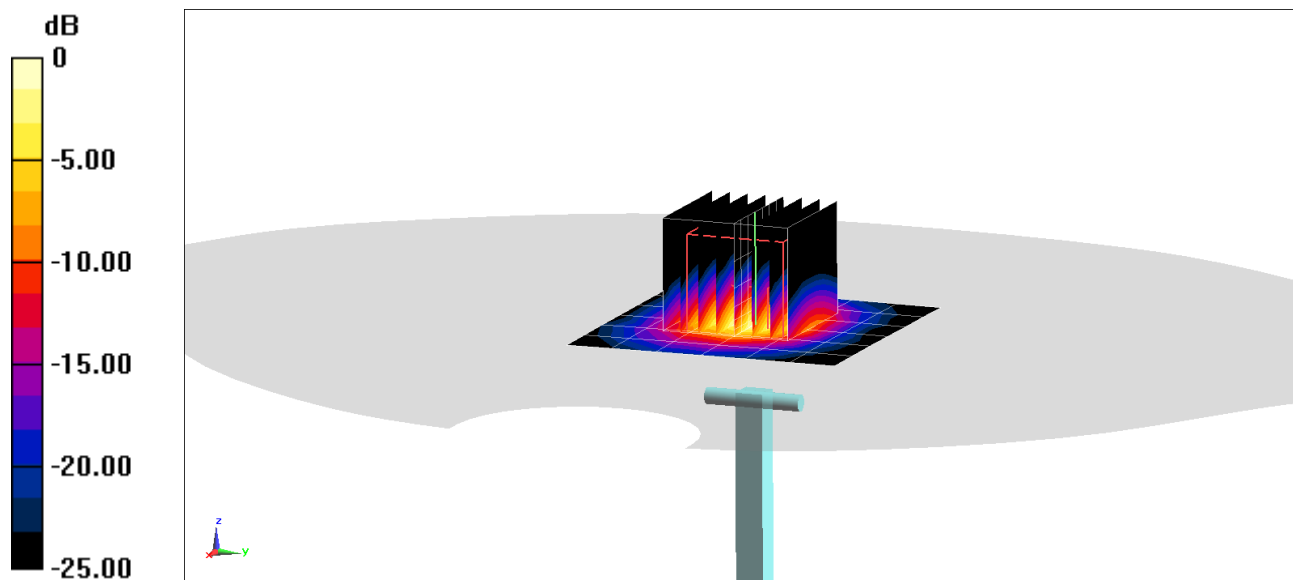

0 dB = 9.78 W/kg = 9.90 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5750 \text{ MHz}$; $\sigma = 5.272 \text{ S/m}$; $\epsilon_r = 34.085$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/05/2021; Ambient Temp: 20.7°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7357; ConvF(5.05, 5.05, 5.05) @ 5750 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 3.79 W/kg

Deviation(1 g) = -5.84%

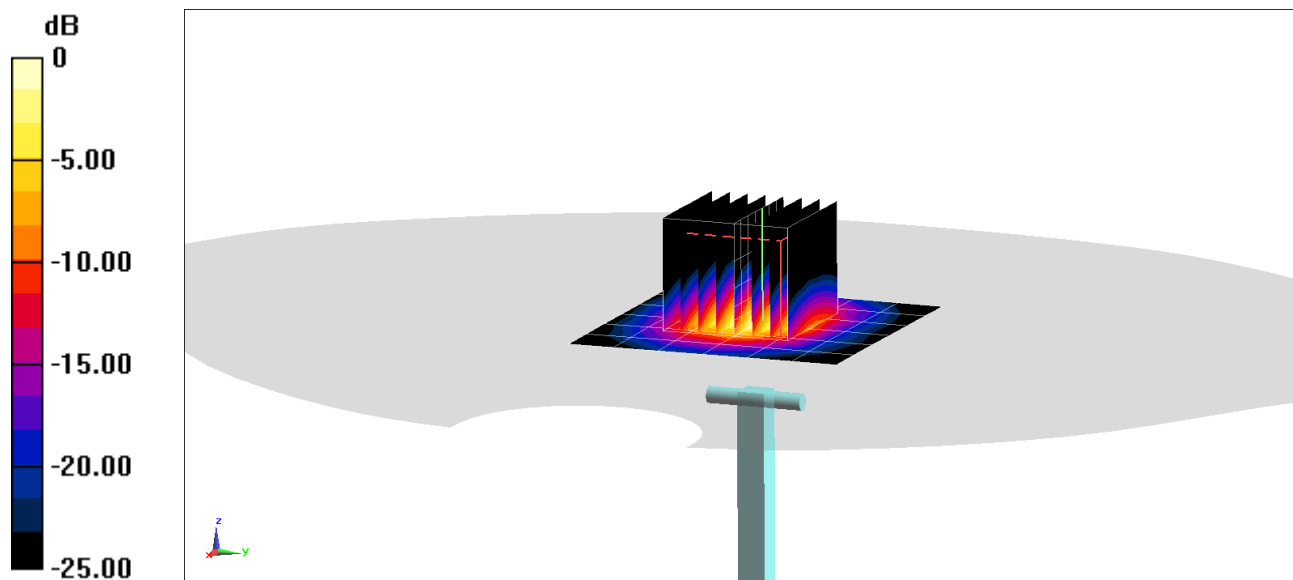

0 dB = 9.56 W/kg = 9.80 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5250$ MHz; $\sigma = 4.504$ S/m; $\epsilon_r = 34.612$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/22/2021; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7357; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.7 W/kg

SAR(1 g) = 3.75 W/kg

Deviation(1 g) = -7.75%

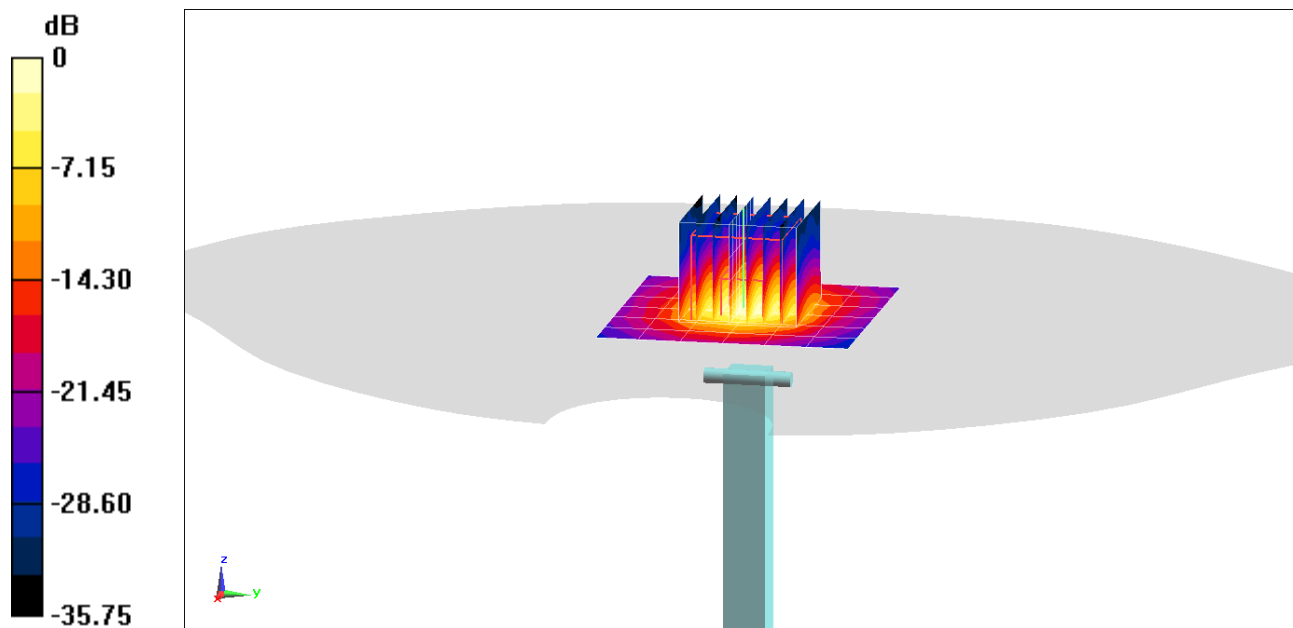

0 dB = 8.71 W/kg = 9.40 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5600$ MHz; $\sigma = 4.889$ S/m; $\epsilon_r = 34.021$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/22/2021; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7357; ConvF(4.93, 4.93, 4.93) @ 5600 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.89 W/kg

Deviation(1 g) = -9.22%

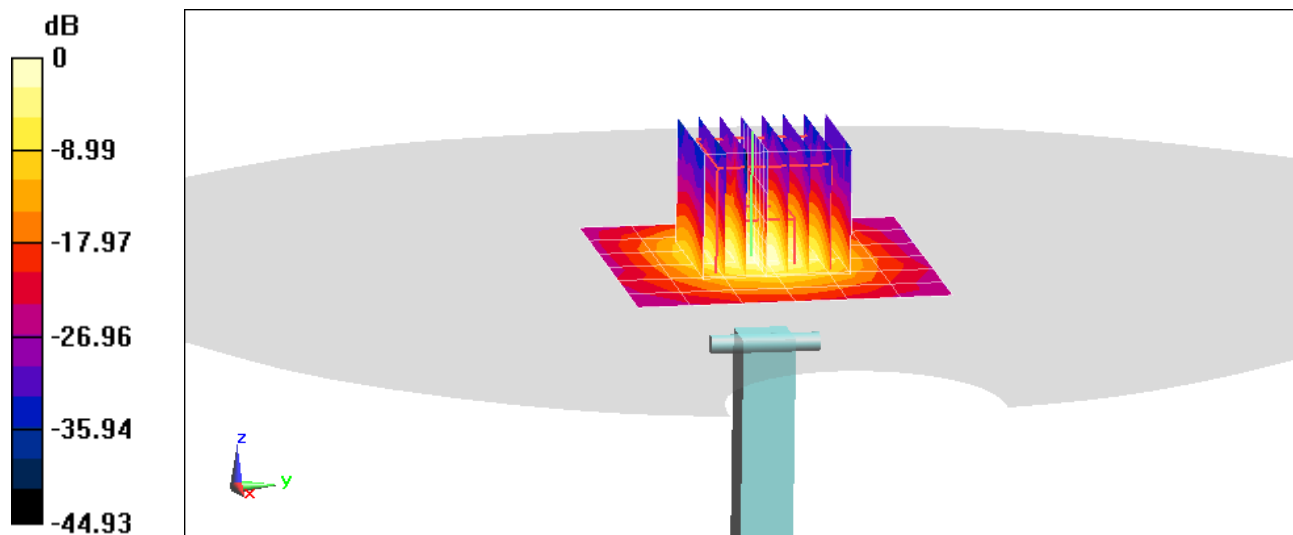

0 dB = 9.41 W/kg = 9.74 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5750 \text{ MHz}$; $\sigma = 5.053 \text{ S/m}$; $\epsilon_r = 33.784$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/22/2021; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7357; ConvF(5.05, 5.05, 5.05) @ 5750 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.9 W/kg

Deviation(1 g) = -3.23%

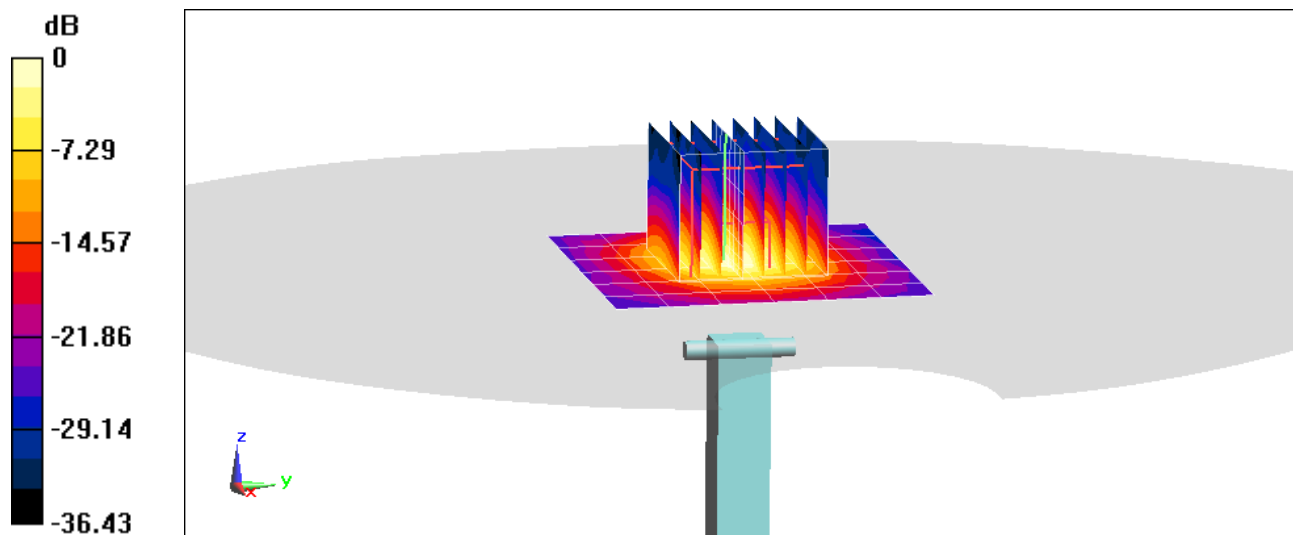

0 dB = 9.51 W/kg = 9.78 dBW/kg

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.947 \text{ S/m}$; $\epsilon_r = 54.217$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12/28/2020; Ambient Temp: 20.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7539; ConvF(10.24, 10.24, 10.24) @ 750 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/20/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 1.74 W/kg

Deviation(1 g) = 3.20%

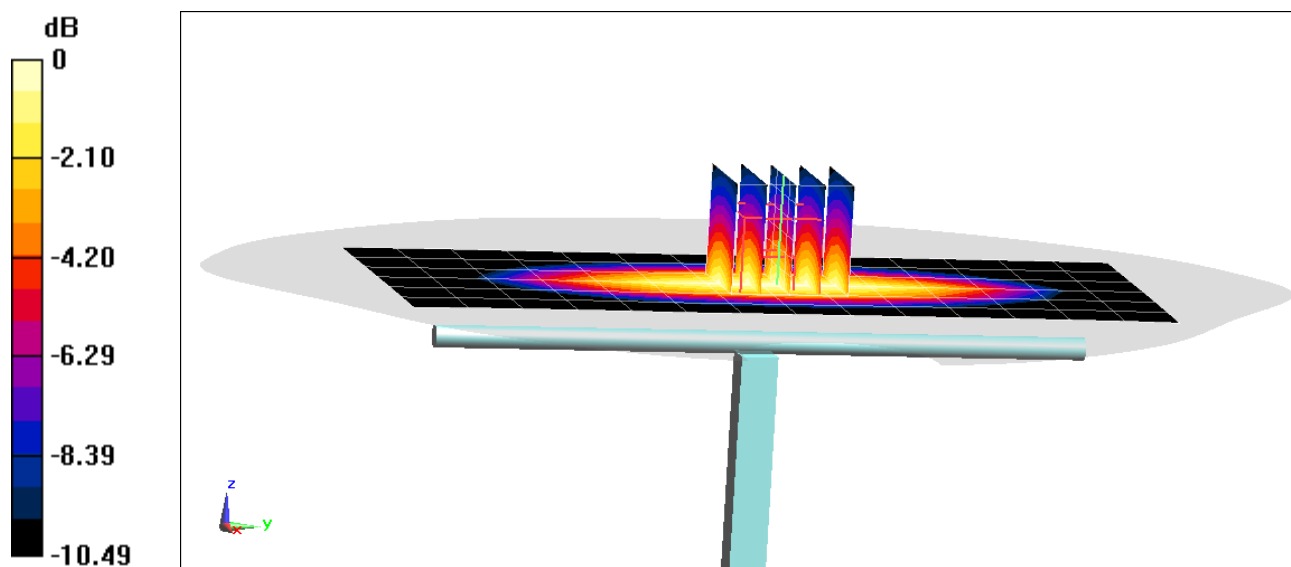

0 dB = 2.34 W/kg = 3.69 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 54.481$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01/11/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7552; ConvF(9.96, 9.96, 9.96) @ 835 MHz; Calibrated: 9/11/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/10/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.87 W/kg

SAR(1 g) = 1.87 W/kg

Deviation(1 g) = -4.10%

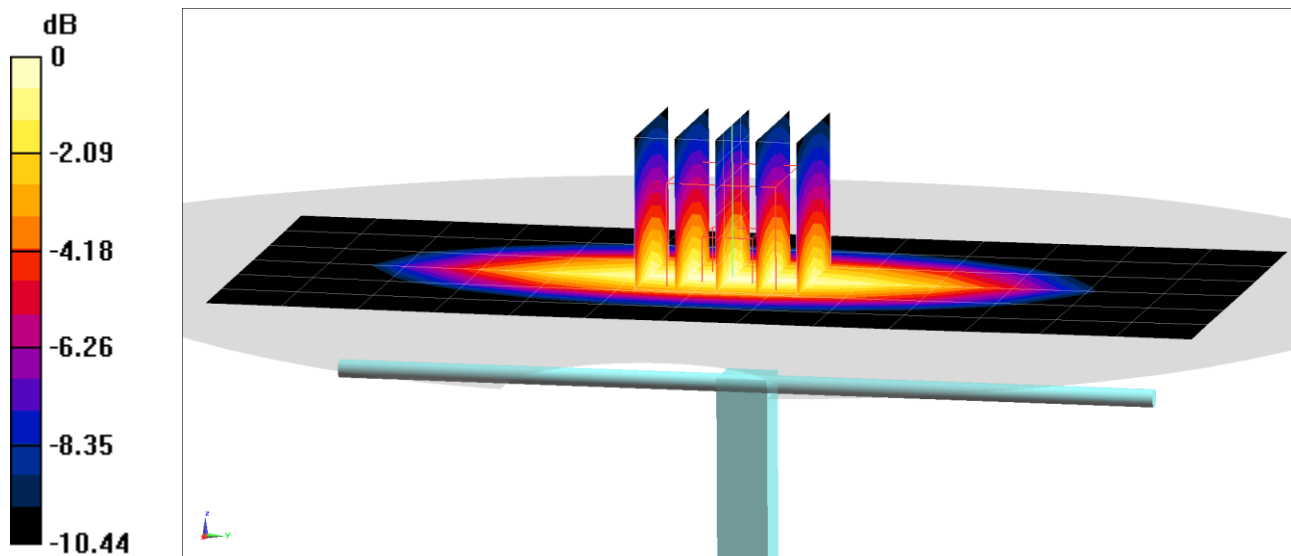

0 dB = 2.53 W/kg = 4.03 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.529 \text{ S/m}$; $\epsilon_r = 51.512$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12/28/2020; Ambient Temp: 22.4°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7357; ConvF(8.17, 8.17, 8.17) @ 1750 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.08 W/kg

SAR(1 g) = 3.89 W/kg

Deviation(1 g) = 4.01%

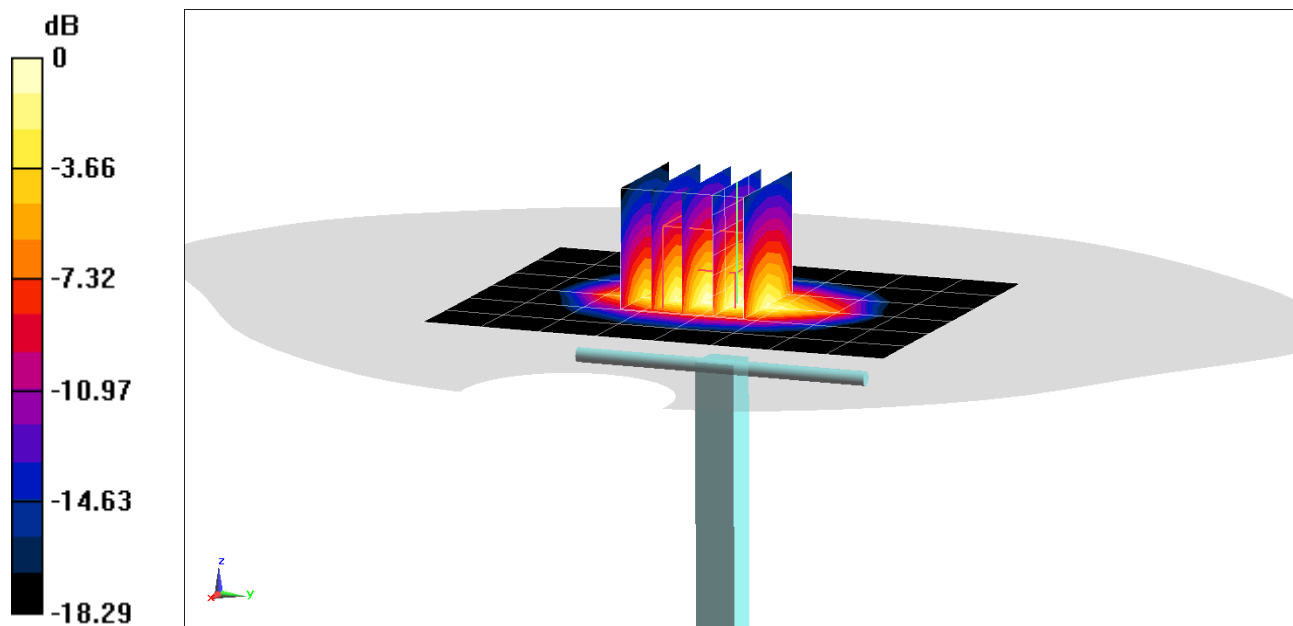

0 dB = 5.89 W/kg = 7.70 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.546$ S/m; $\epsilon_r = 51.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/14/2021; Ambient Temp: 21.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7357; ConvF(8.17, 8.17, 8.17) @ 1750 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.98 W/kg

SAR(1 g) = 3.84 W/kg

Deviation(1 g) = 4.92%

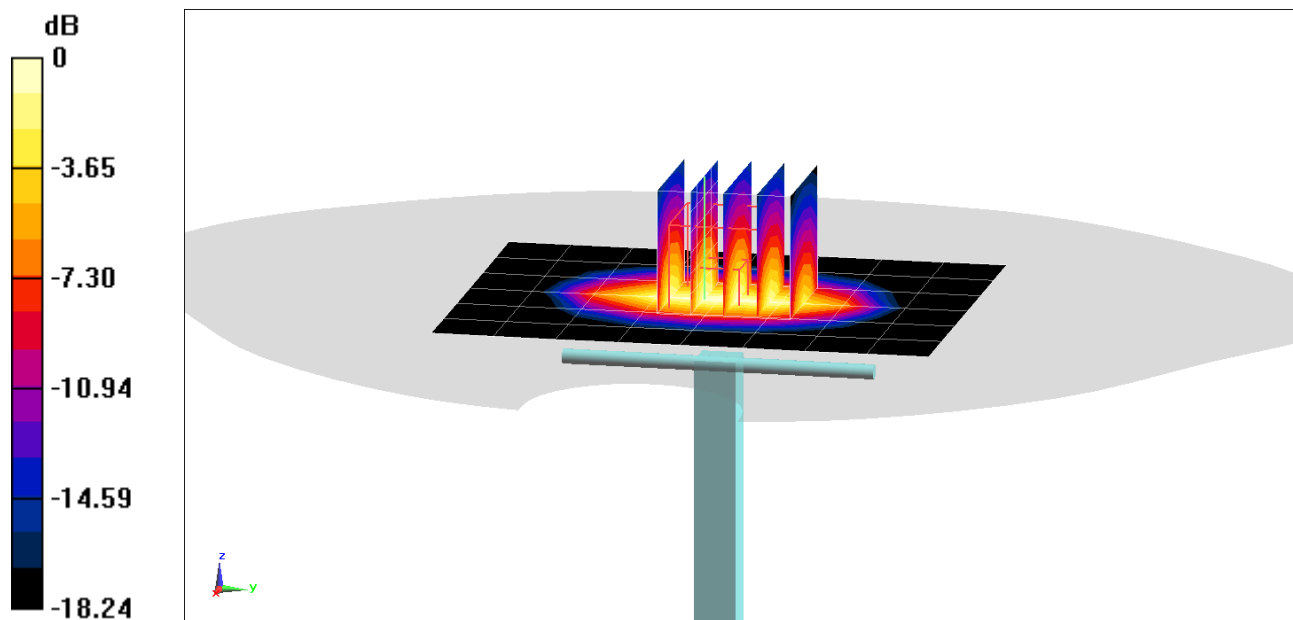

PCTEST

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.526 \text{ S/m}$; $\epsilon_r = 51.508$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/14/2021; Ambient Temp: 20.3°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN7410; ConvF(8.17, 8.17, 8.17) @ 1750 MHz; Calibrated: 7/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/15/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.18 W/kg

SAR(10 g) = 2.03 W/kg

Deviation(10 g) = 2.01%

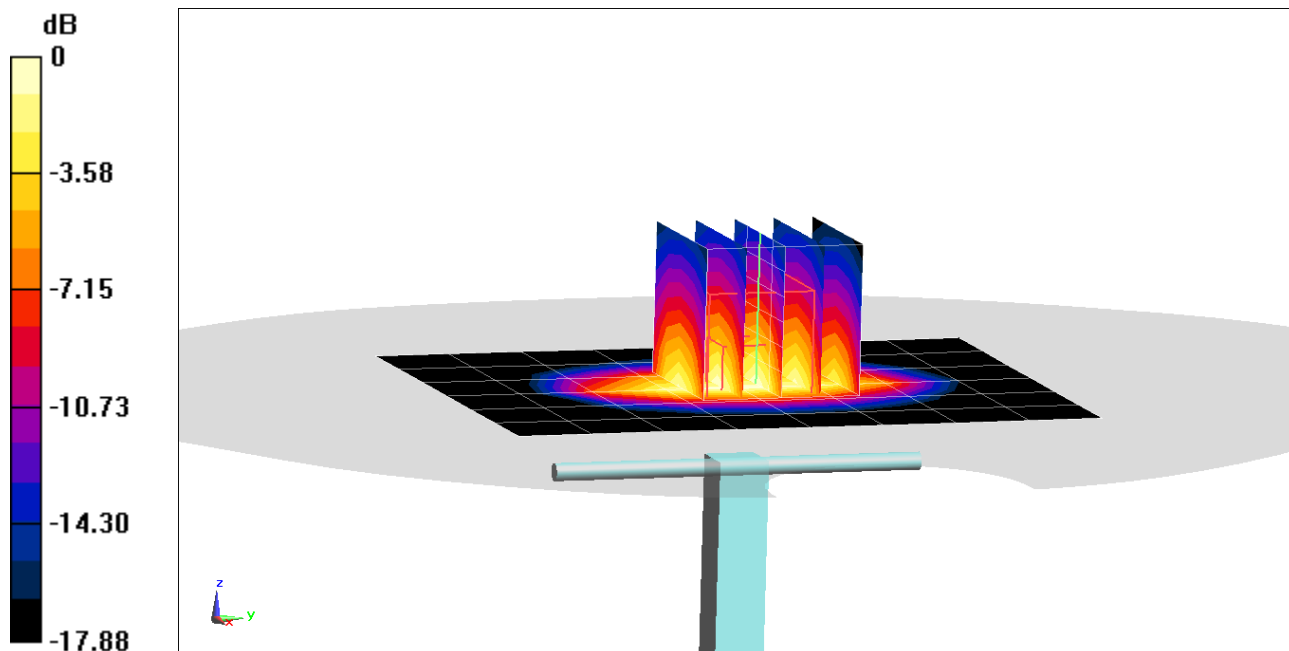

0 dB = 5.93 W/kg = 7.73 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.528 \text{ S/m}$; $\epsilon_r = 50.808$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/21/2021; Ambient Temp: 21.3°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7308; ConvF(8.2, 8.2, 8.2) @ 1750 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.98 W/kg

SAR(10 g) = 2 W/kg

Deviation(10 g) = 3.63%

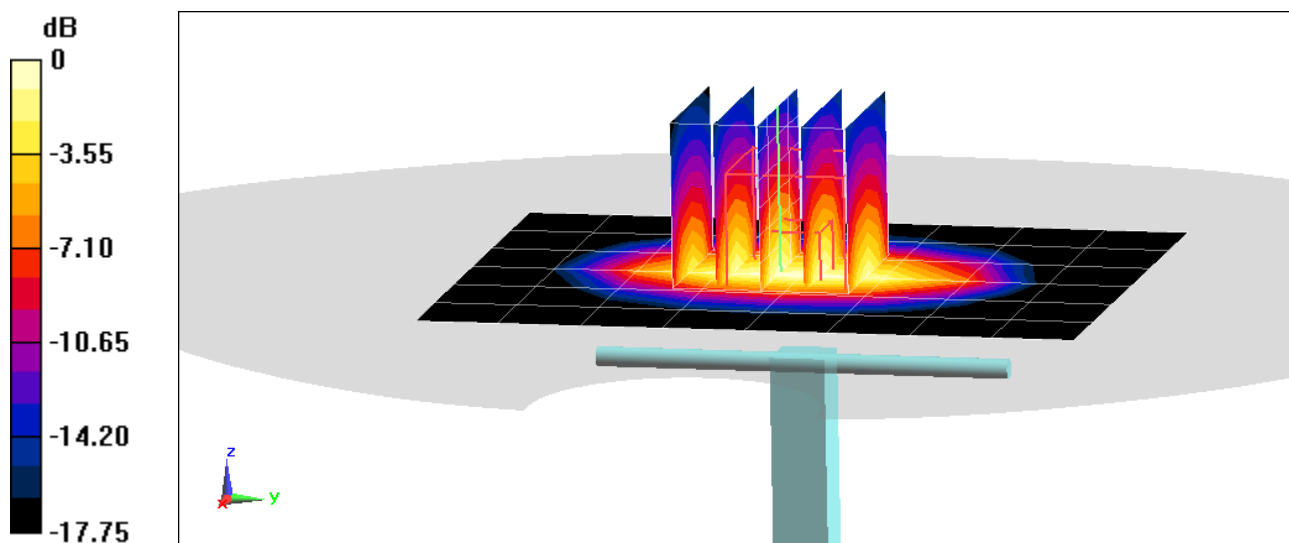

0 dB = 5.69 W/kg = 7.55 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.531 \text{ S/m}$; $\epsilon_r = 53.531$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/07/2021; Ambient Temp: 21.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7551; ConvF(7.84, 7.84, 7.84) @ 1900 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/16/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.29 W/kg

SAR(1 g) = 4.06 W/kg; SAR(10 g) = 2.11 W/kg

Deviation(1 g) = 3.05%; Deviation(10 g) = 1.93%

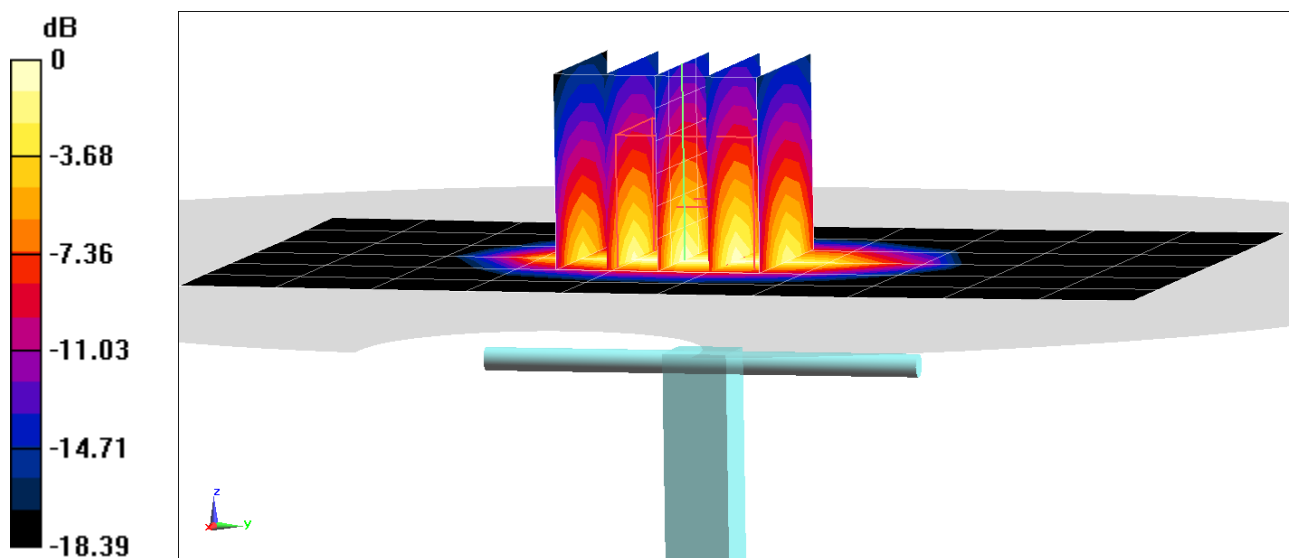

0 dB = 6.16 W/kg = 7.90 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.512 \text{ S/m}$; $\epsilon_r = 53.389$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/11/2021; Ambient Temp: 21.4°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7551; ConvF(7.84, 7.84, 7.84) @ 1900 MHz; Calibrated: 10/20/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/16/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.15 W/kg

SAR(1 g) = 4.02 W/kg

Deviation(1 g) = 2.03%

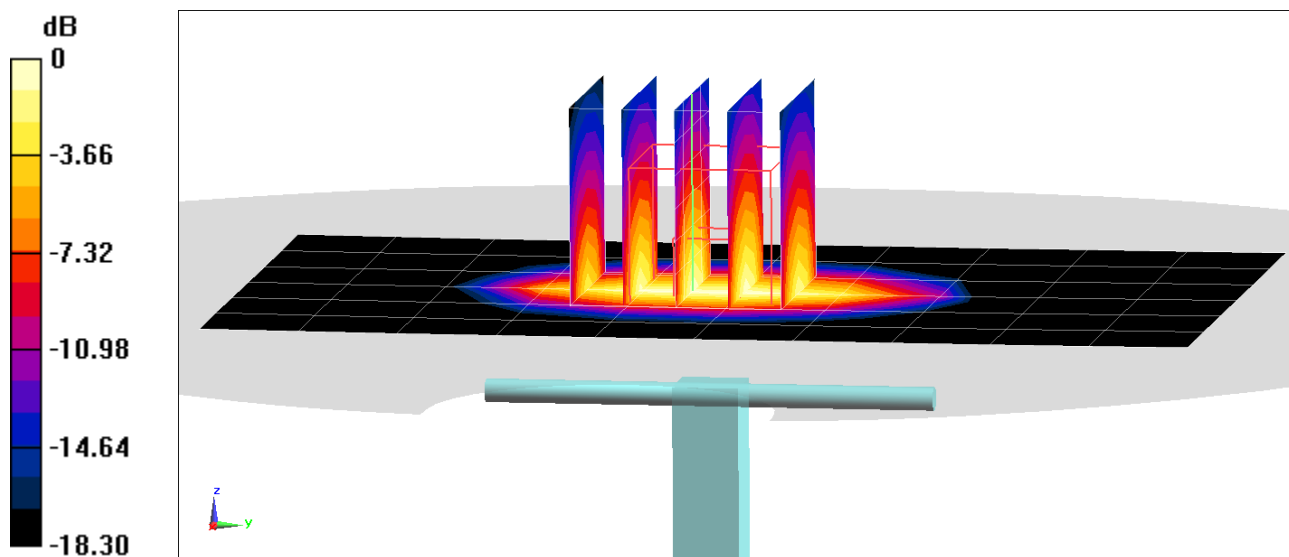

0 dB = 6.05 W/kg = 7.82 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900$ MHz; $\sigma = 1.536$ S/m; $\epsilon_r = 53.585$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/14/2021; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7308; ConvF(7.77, 7.77, 7.77) @ 1900 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.40 W/kg

SAR(1 g) = 3.93 W/kg; SAR(10 g) = 2.02 W/kg

Deviation(1 g) = 0.51%; Deviation(10 g) = -1.46%

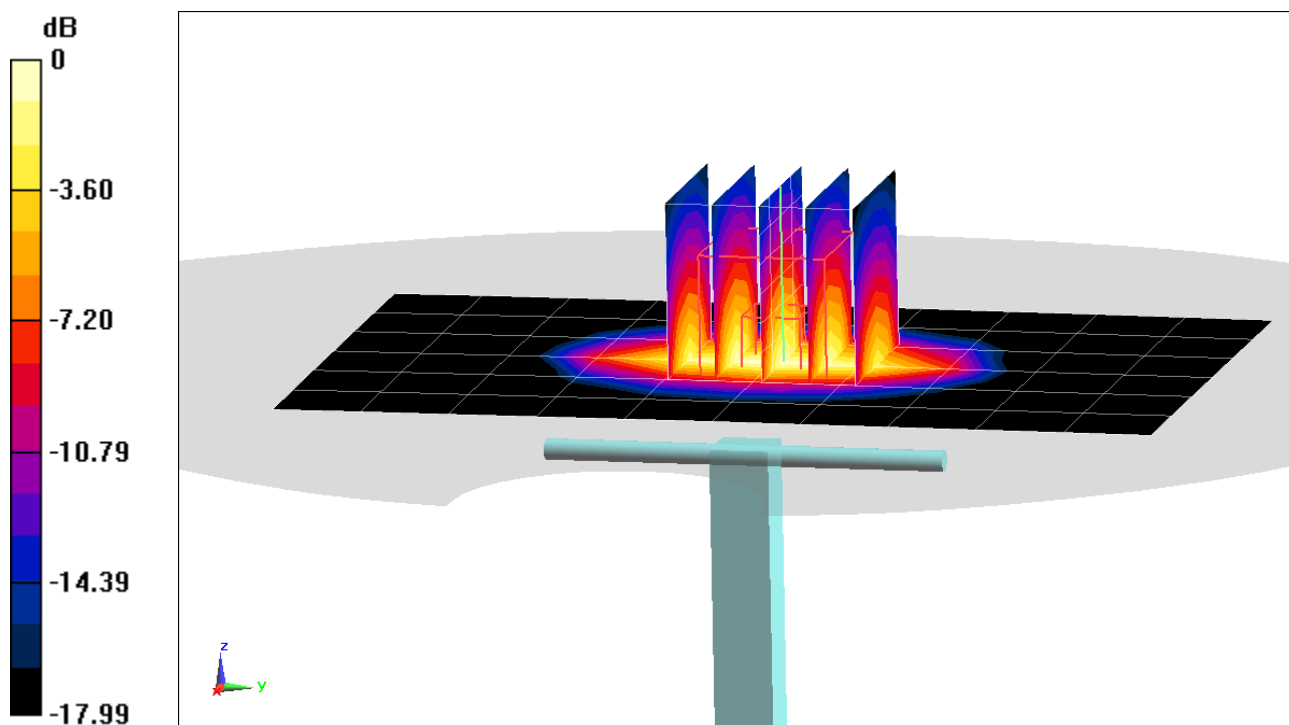

0 dB = 6.22 W/kg = 7.94 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 51.686$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7308; ConvF(7.41, 7.41, 7.41) @ 2450 MHz; Calibrated: 7/31/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 8/11/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 4.95 W/kg

Deviation(1 g) = 0.20%

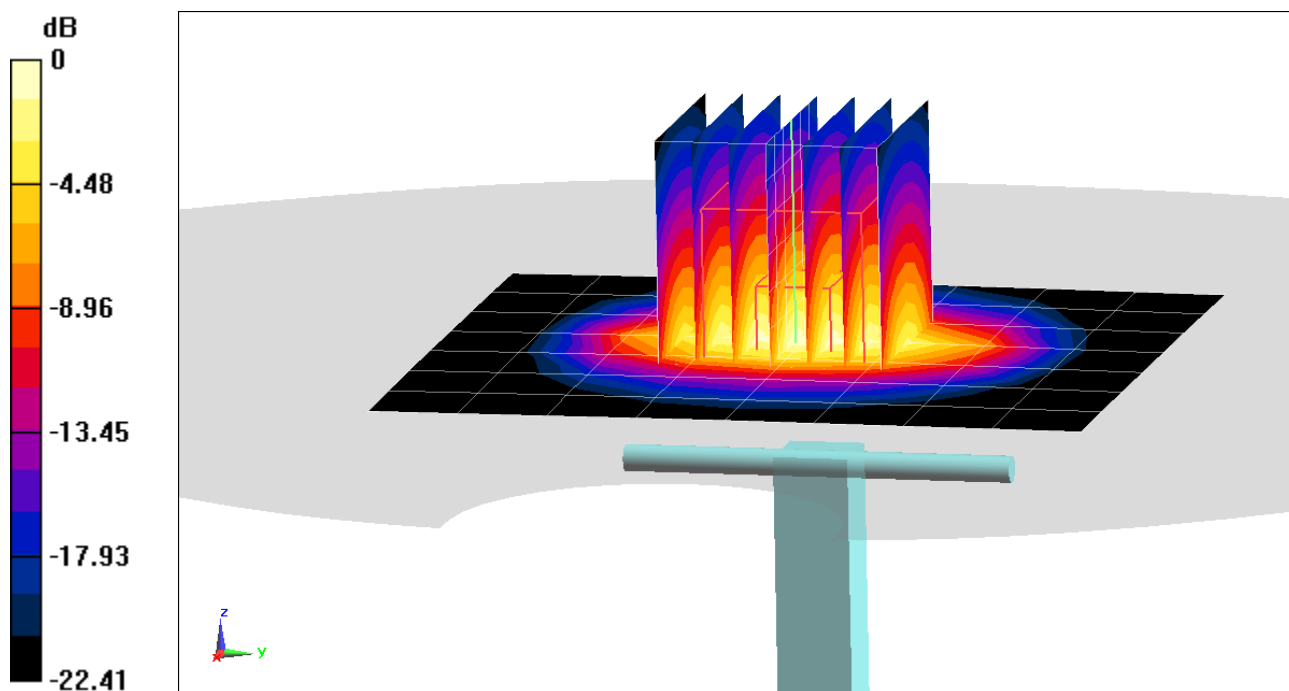

0 dB = 8.46 W/kg = 9.27 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.04 \text{ S/m}$; $\epsilon_r = 51.171$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/06/2021; Ambient Temp: 22.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2450 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.34 W/kg

Deviation(1 g) = 4.91%

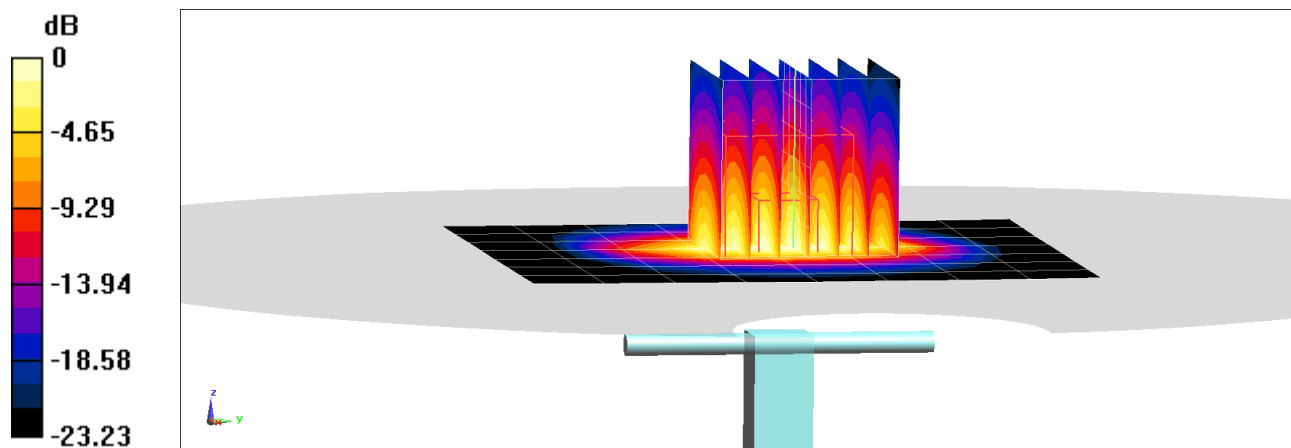

0 dB = 8.96 W/kg = 9.52 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.215$ S/m; $\epsilon_r = 50.736$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/06/2021; Ambient Temp: 22.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2600 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.42 W/kg

Deviation(1 g) = -1.09%

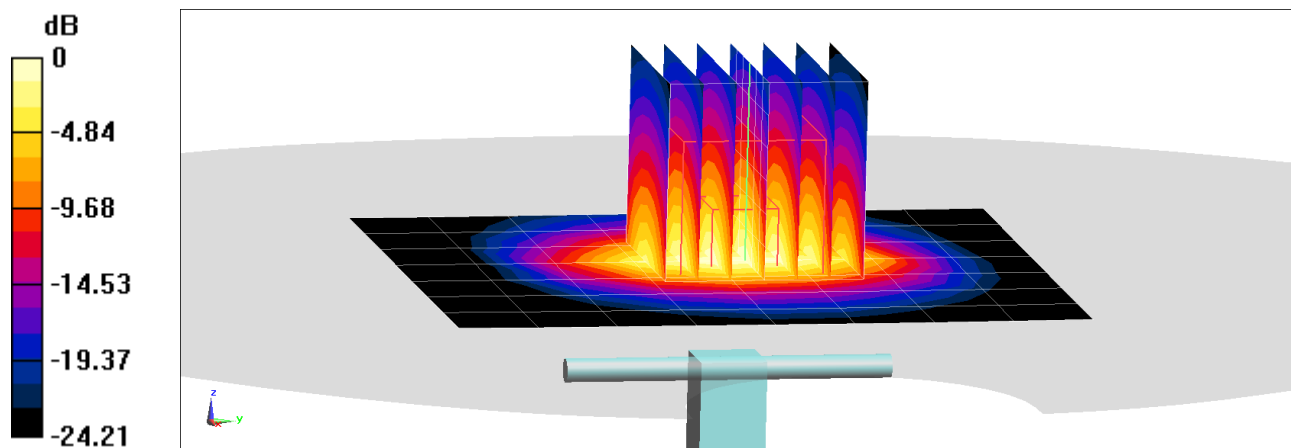

0 dB = 9.46 W/kg = 9.76 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 2.038$ S/m; $\epsilon_r = 51.079$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/27/2021; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2450 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.28 W/kg; SAR(10 g) = 2.42 W/kg

Deviation(1 g) = 4.14%; Deviation(10 g) = 1.26%

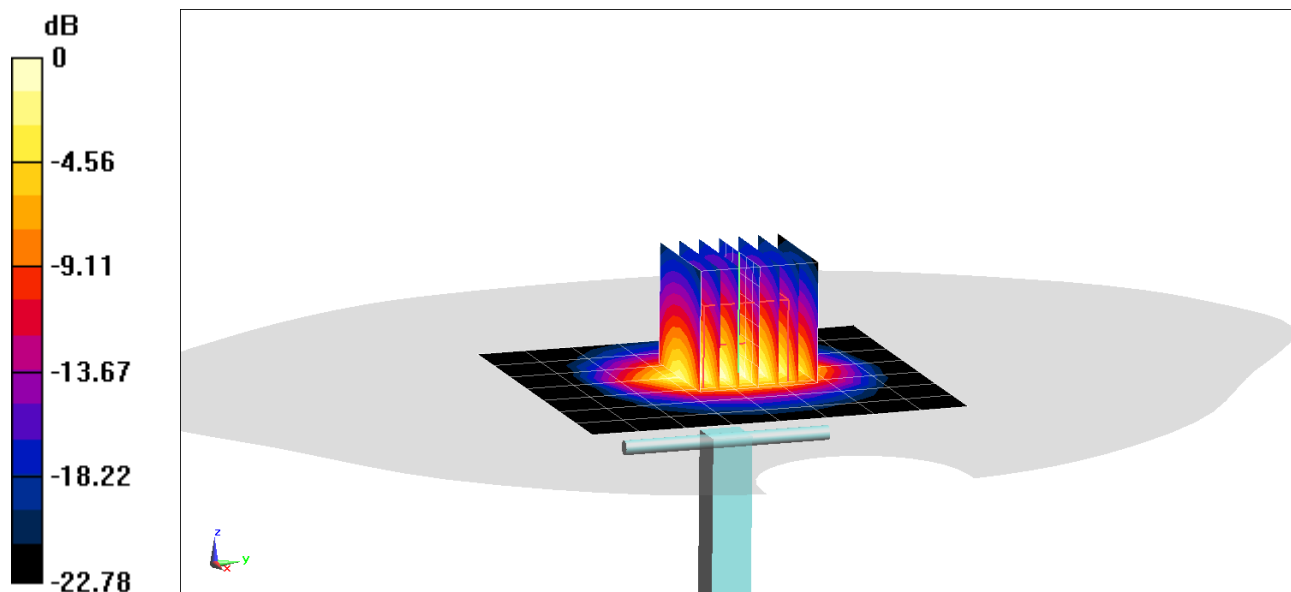

0 dB = 8.79 W/kg = 9.44 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.212 \text{ S/m}$; $\epsilon_r = 50.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/27/2021; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2600 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 13.0 W/kg

SAR(1 g) = 5.87 W/kg; SAR(10 g) = 2.58 W/kg

Deviation(1 g) = 7.12%; Deviation(10 g) = 4.45%

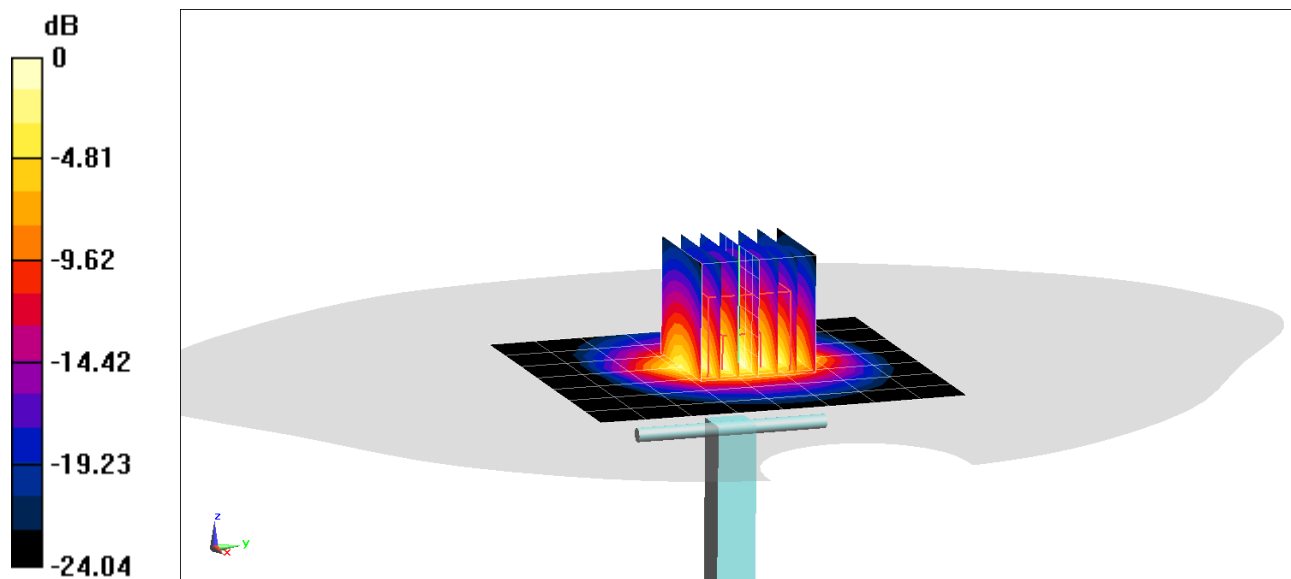

0 dB = 10.2 W/kg = 10.09 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 2.043$ S/m; $\epsilon_r = 51.089$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0

Test Date: 01/30/2021; Ambient Temp: 23.0°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2450 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.39 W/kg; SAR(10 g) = 2.47 W/kg

Deviation(1 g) = 6.31%; Deviation(10 g) = 3.35%

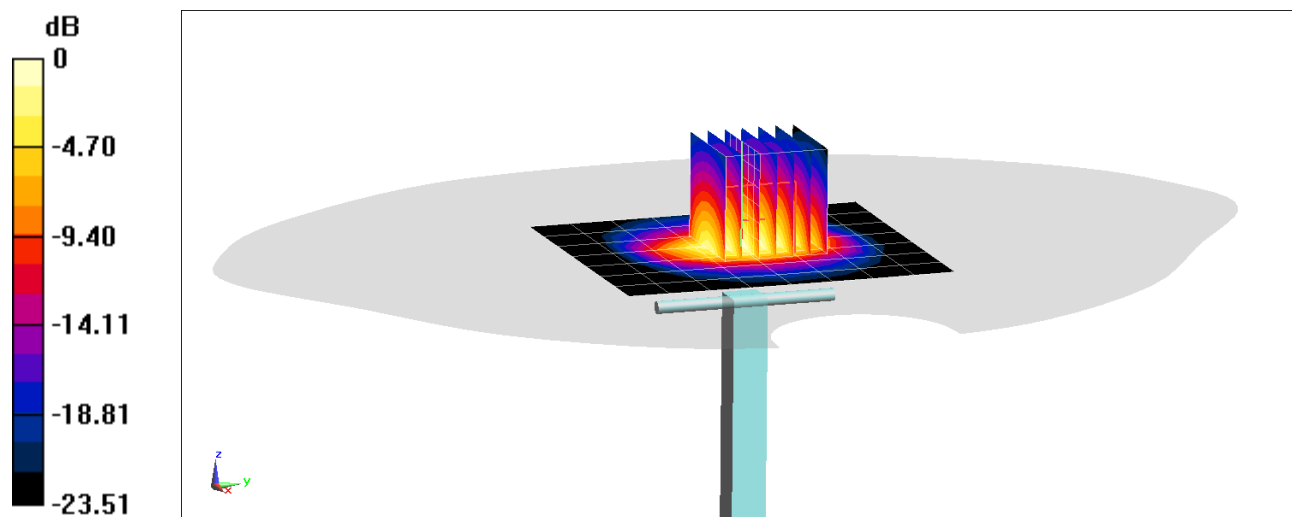

0 dB = 9.06 W/kg = 9.57 dBW/kg

PCTEST

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.227$ S/m; $\epsilon_r = 50.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0

Test Date: 01/30/2021; Ambient Temp: 23.0°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2600 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

2600 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.13 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.58 W/kg; SAR(10 g) = 2.45 W/kg

Deviation(1 g) = 1.82%; Deviation(10 g) = -0.81%

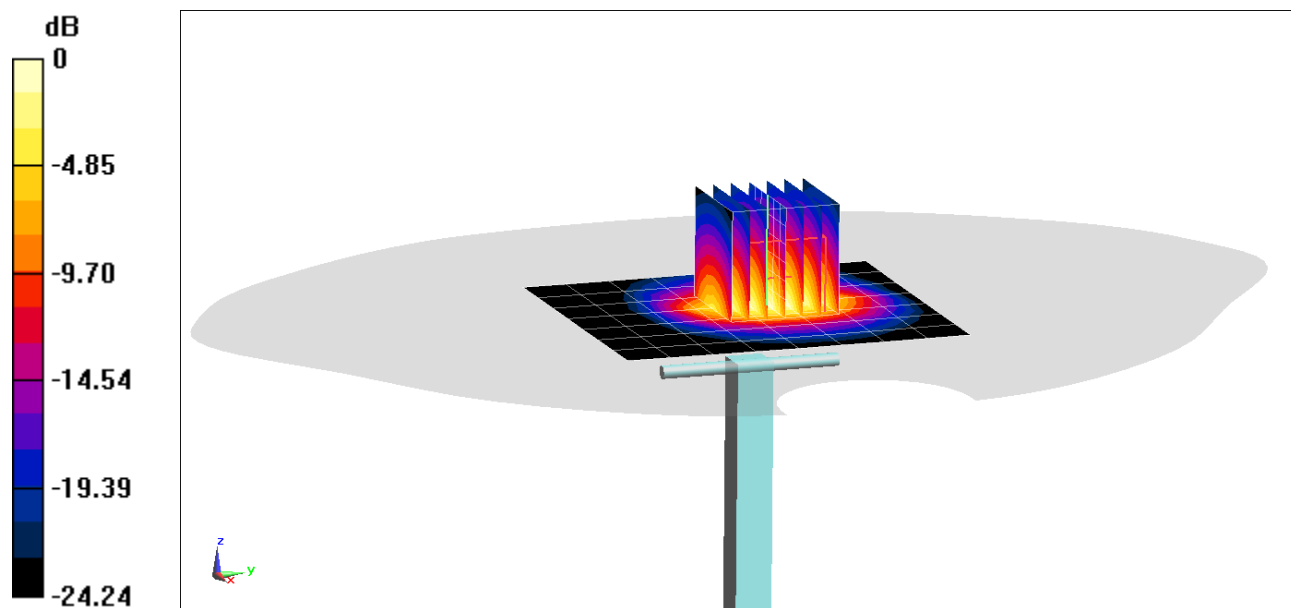

0 dB = 9.75 W/kg = 9.89 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5250$ MHz; $\sigma = 5.531$ S/m; $\epsilon_r = 47.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.8°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7406; ConvF(5.05, 5.05, 5.05) @ 5250 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.3 W/kg

SAR(1 g) = 3.51 W/kg; SAR(10 g) = 0.981 W/kg

Deviation(1 g) = -7.14%; Deviation(10 g) = -7.45%

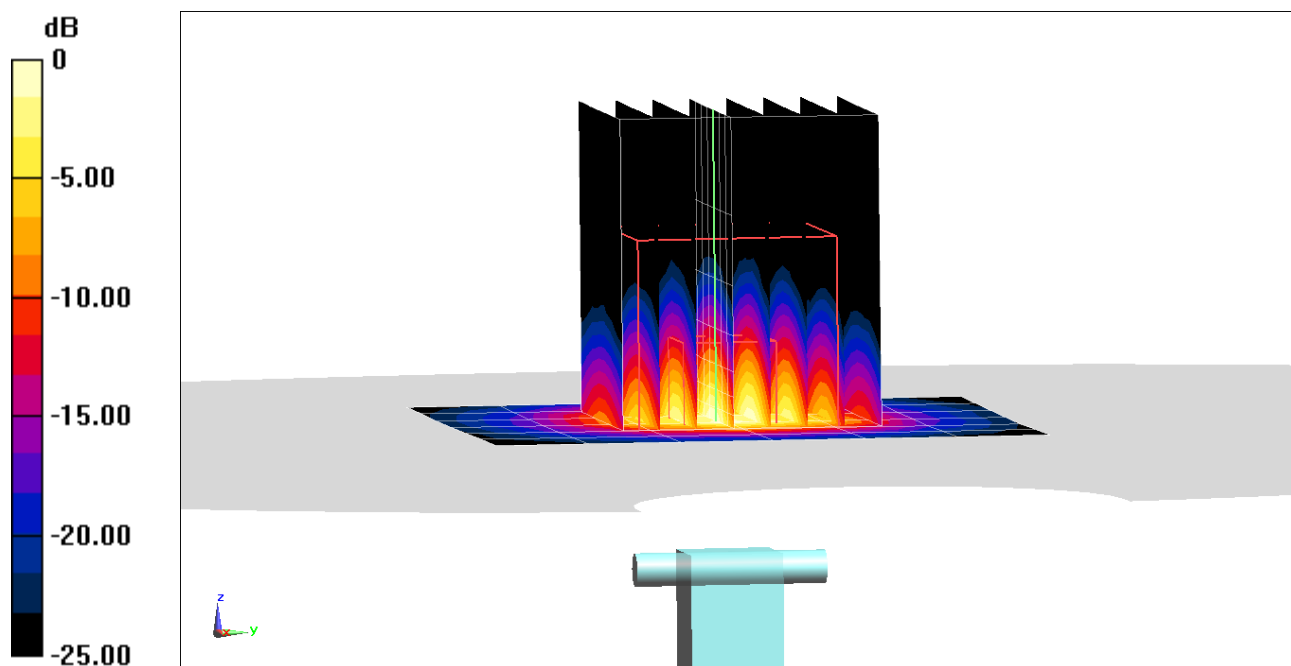

0 dB = 8.21 W/kg = 9.14 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5600$ MHz; $\sigma = 5.989$ S/m; $\epsilon_r = 46.681$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.8°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7406; ConvF(4.37, 4.37, 4.37) @ 5600 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.86 W/kg; SAR(10 g) = 1.07 W/kg

Deviation(1 g) = -1.66%; Deviation(10 g) = -2.73%

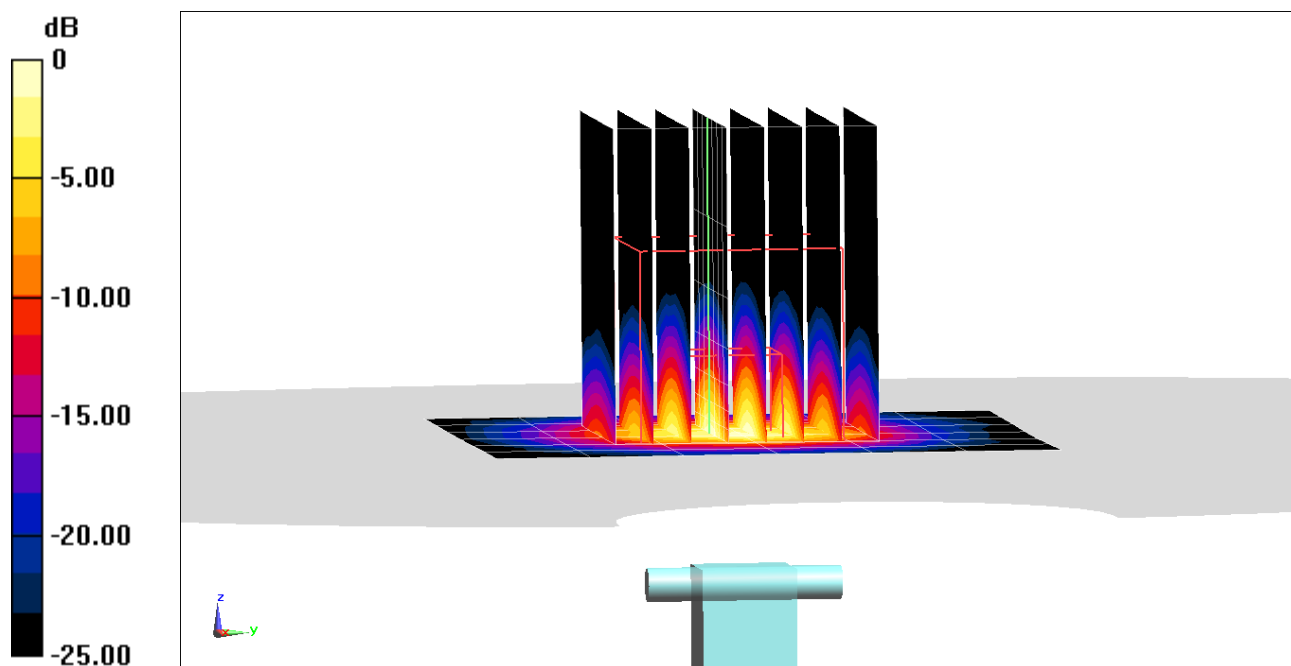

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5750 \text{ MHz}$; $\sigma = 6.203 \text{ S/m}$; $\epsilon_r = 46.43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/04/2021; Ambient Temp: 22.8°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7406; ConvF(4.56, 4.56, 4.56) @ 5750 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 3.6 W/kg; SAR(10 g) = 0.989 W/kg

Deviation(1 g) = -5.14%; Deviation(10 g) = -6.70%

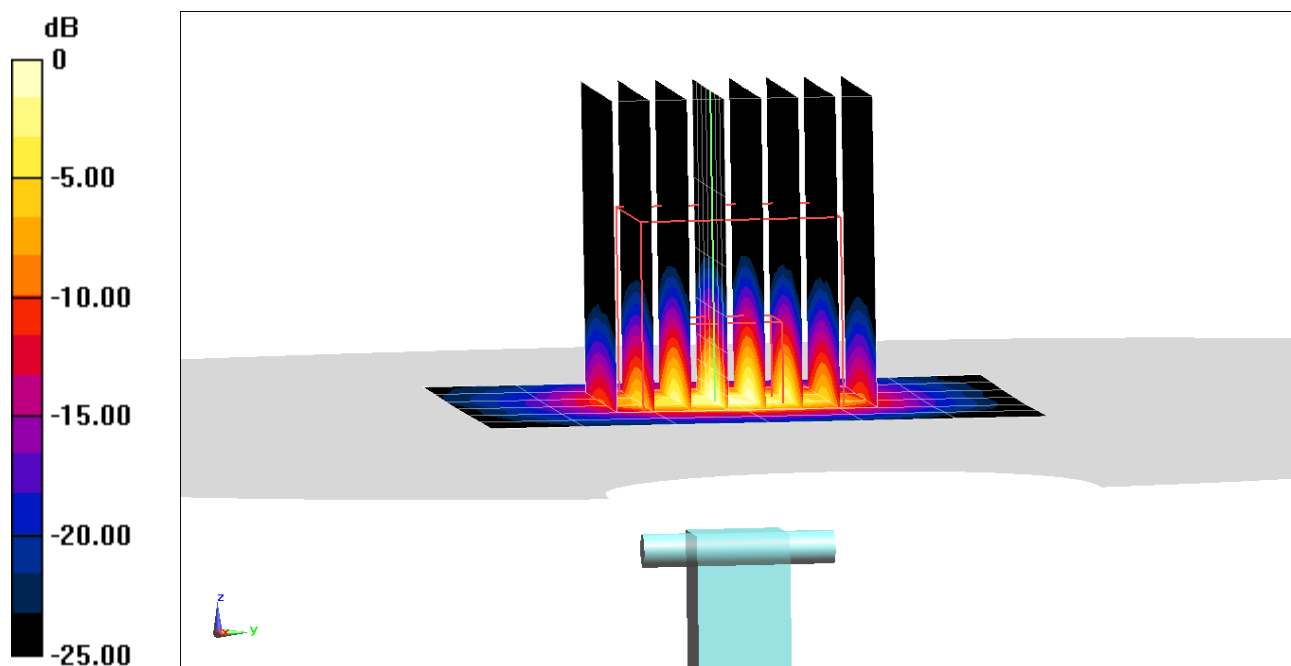

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5250$ MHz; $\sigma = 5.528$ S/m; $\epsilon_r = 46.833$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/18/2021; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7406; ConvF(5.05, 5.05, 5.05) @ 5250 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 3.57 W/kg

Deviation(1 g) = -4.29%

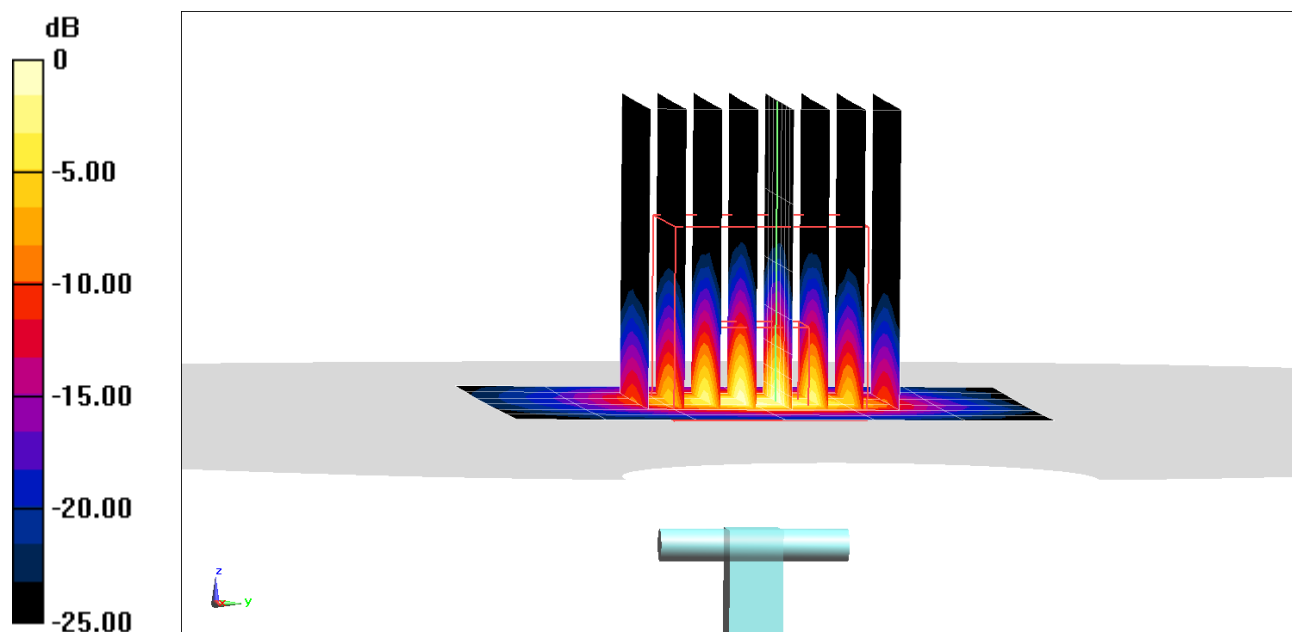

0 dB = 8.39 W/kg = 9.24 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5600$ MHz; $\sigma = 6.001$ S/m; $\epsilon_r = 46.239$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01/18/2021; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7406; ConvF(4.37, 4.37, 4.37) @ 5600 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 3.94 W/kg

Deviation(1 g) = 0.90%

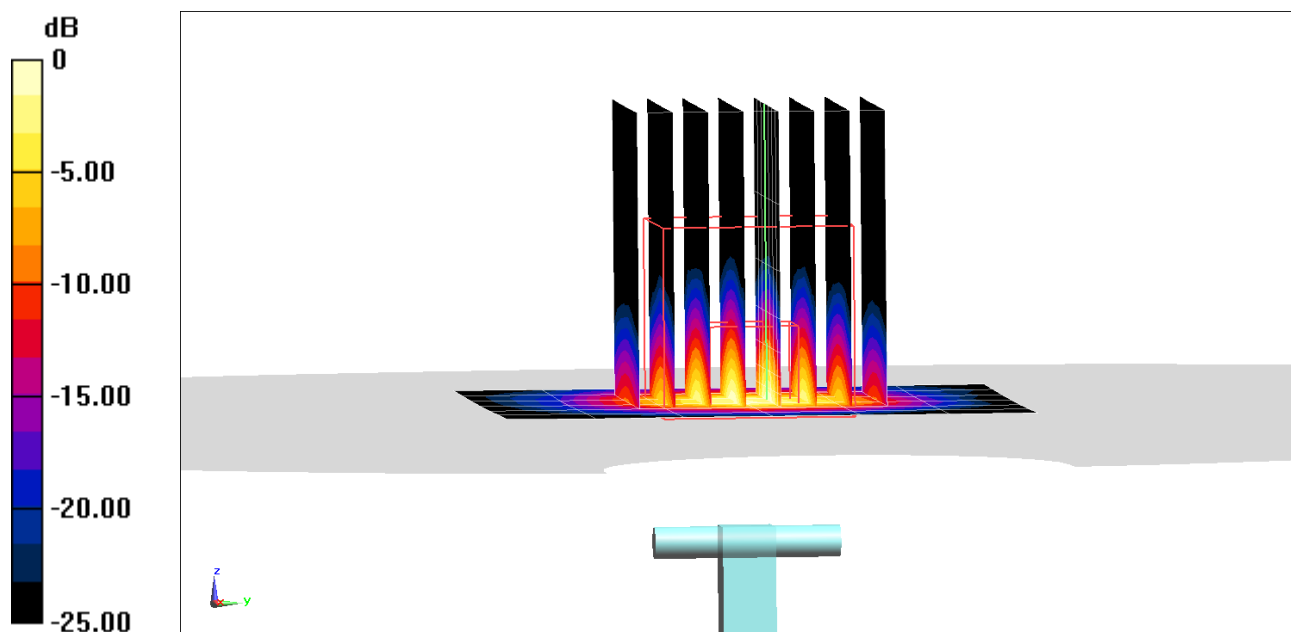

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5750 \text{ MHz}$; $\sigma = 6.219 \text{ S/m}$; $\epsilon_r = 45.985$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0cm

Test Date: 01/18/2021; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7406; ConvF(4.56, 4.56, 4.56) @ 5750 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 3.59 W/kg

Deviation(1 g) = -4.14%

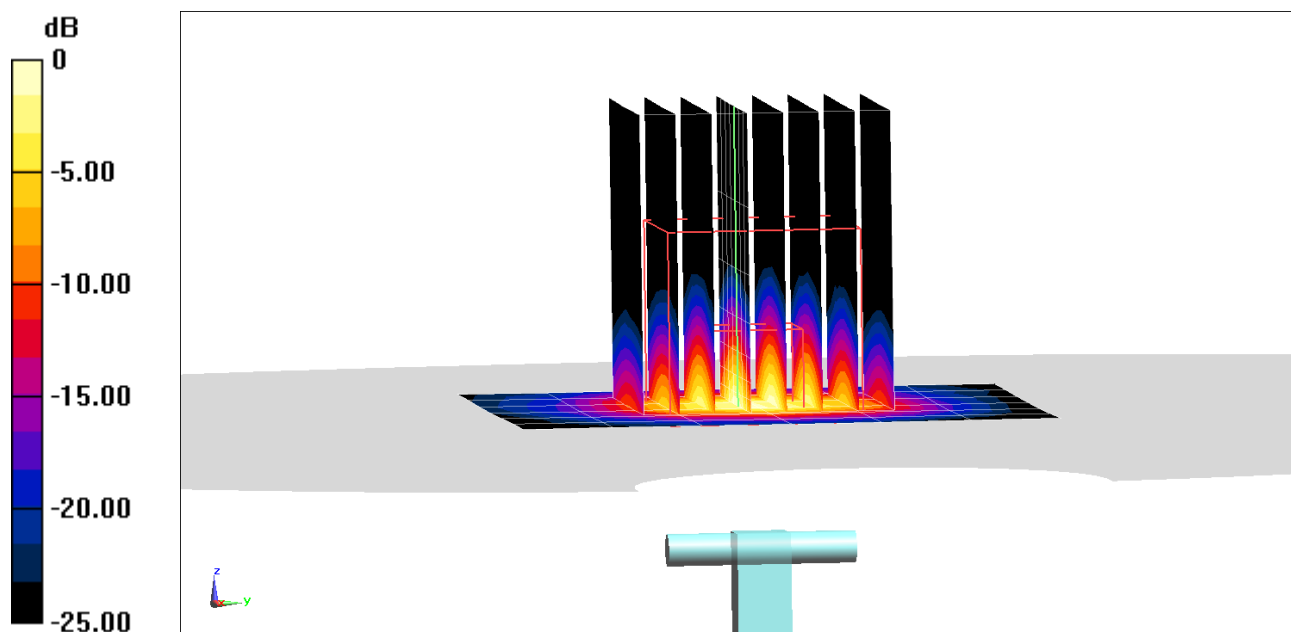

APPENDIX C: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ' can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho' \cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

3 Composition / Information on ingredients

3.2 Mixtures

Description: Aqueous solution with surfactants and inhibitors

Declarable, or hazardous components:

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	Ethanediol STOT RE 2, H373; Acute Tox. 4, H302	>1.0-4.9%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	Sodium petroleum sulfonate Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	Alkoxylated alcohol, > C₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

Additional information:

For the wording of the listed risk phrases refer to section 16.

Not mentioned CAS-, EINECS- or registration numbers are to be regarded as Proprietary/Confidential.

The specific chemical identity and/or exact percentage concentration of proprietary components is withheld as a trade secret.

Figure C-1

Note: Liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

FCC ID: ZNFK420TM	 PCTEST Product to be part of	SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 12/28/20 – 1/30/21	DUT Type: Portable Handset			APPENDIX C: Page 1 of 3

Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MBL600-6000V6)
Product No.	SL AAM U16 BC (Batch: 200803-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the KDB 865664 compliance standard.

Test Condition



Ambient Condition 22°C ; 30% humidity
 TSL Temperature 22°C
 Test Date 6-Aug-20
 Operator CL

Additional Information

TSL Density
 TSL Heat-capacity

Results

f [MHz]	Measured			Target		Diff.to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
600	56.3	26.8	0.89	56.1	0.95	0.3	-6.3
750	55.8	22.6	0.94	55.5	0.96	0.5	-2.1
800	55.7	21.6	0.96	55.3	0.97	0.7	-1.0
825	55.7	21.1	0.97	55.2	0.98	0.8	-1.0
835	55.7	20.9	0.98	55.1	0.99	1.0	-0.5
850	55.6	20.7	0.98	55.2	0.99	0.8	-1.0
900	55.5	19.9	1.00	55.0	1.05	0.9	-4.8
1400	54.7	15.9	1.24	54.1	1.28	1.1	-3.1
1450	54.6	15.8	1.27	54.0	1.30	1.1	-2.3
1600	54.4	15.3	1.36	53.8	1.39	1.1	-2.2
1625	54.4	15.3	1.38	53.8	1.41	1.2	-2.1
1640	54.4	15.2	1.39	53.7	1.42	1.3	-2.1
1650	54.3	15.2	1.39	53.7	1.43	1.1	-2.8
1700	54.2	15.1	1.43	53.6	1.46	1.2	-2.1
1750	54.2	15.0	1.46	53.4	1.49	1.4	-2.0
1800	54.1	14.9	1.50	53.3	1.52	1.5	-1.3
1810	54.1	14.9	1.51	53.3	1.52	1.5	-0.7
1825	54.1	14.9	1.52	53.3	1.52	1.5	0.0
1850	54.0	14.9	1.53	53.3	1.52	1.3	0.7
1900	54.0	14.8	1.57	53.3	1.52	1.3	3.3
1950	53.9	14.8	1.60	53.3	1.52	1.1	5.3
2000	53.8	14.8	1.64	53.3	1.52	0.9	7.9
2050	53.8	14.7	1.68	53.2	1.57	1.1	7.0
2100	53.7	14.7	1.72	53.2	1.62	1.0	6.2
2150	53.7	14.7	1.76	53.1	1.66	1.1	6.0
2200	53.6	14.7	1.80	53.0	1.71	1.1	5.3
2250	53.5	14.8	1.85	53.0	1.76	1.0	5.1
2300	53.5	14.8	1.89	52.9	1.81	1.1	4.4
2350	53.4	14.8	1.94	52.8	1.85	1.1	4.9
2400	53.3	14.8	1.98	52.8	1.90	1.0	4.2
2450	53.3	14.9	2.03	52.7	1.95	1.1	4.1
2500	53.2	14.9	2.07	52.6	2.02	1.1	2.5
2550	53.1	15.0	2.12	52.6	2.09	1.0	1.4
2600	53.0	15.0	2.17	52.5	2.16	0.9	0.5



3500	51.4	16.0	3.11	51.3	3.31	0.2	-6.0
3700	51.1	16.2	3.34	51.1	3.55	0.1	-5.9
5200	48.3	18.7	5.42	49.0	5.30	-1.5	2.3
5250	48.2	18.8	5.50	49.0	5.36	-1.6	2.5
5300	48.1	18.9	5.57	48.9	5.42	-1.7	2.8
5500	47.7	19.2	5.86	48.6	5.65	-2.0	3.8
5600	47.5	19.3	6.01	48.5	5.77	-2.1	4.2
5700	47.3	19.4	6.16	48.3	5.88	-2.3	4.8
5800	47.0	19.6	6.32	48.2	6.00	-2.4	5.3
6000	46.6	19.8	6.62	47.9	6.23	-2.7	6.3

Figure C-2
600 – 5800 MHz Body Tissue Equivalent Matter

FCC ID: ZNFK420TM	 PCTEST Proud to be part of 	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Test Dates: 12/28/20 – 1/30/21	DUT Type: Portable Handset			APPENDIX C: Page 2 of 3

Measurement Certificate / Material Test

Item Name Head Tissue Simulating Liquid (HBBL600-10000V6)
 Product No. SL AAH U16 BC (Batch: 200805-4)
 Manufacturer SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition



Ambient Condition 22°C ; 30% humidity
 TSL Temperature 22°C
 Test Date 6-Aug-20
 Operator CL

Additional Information

TSL Density
 TSL Heat-capacity

Results

f [MHz]	Measured			Target		Diff.to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
600	44.7	25.7	0.86	42.7	0.88	4.6	-2.5
750	44.1	21.7	0.90	41.9	0.89	5.1	0.7
800	44.0	20.7	0.92	41.7	0.90	5.6	2.5
825	43.9	20.3	0.93	41.6	0.91	5.6	2.6
835	43.9	20.1	0.94	41.5	0.91	5.7	3.1
850	43.8	19.9	0.94	41.5	0.92	5.5	2.6
900	43.7	19.1	0.96	41.5	0.97	5.3	-1.0
1400	42.7	15.1	1.18	40.6	1.18	5.2	0.0
1450	42.6	14.9	1.20	40.5	1.20	5.2	0.0
1600	42.4	14.4	1.28	40.3	1.28	5.2	-0.3
1625	42.4	14.4	1.30	40.3	1.30	5.3	0.1
1640	42.4	14.3	1.31	40.3	1.31	5.3	0.3
1650	42.3	14.3	1.31	40.2	1.31	5.1	-0.2
1700	42.2	14.2	1.34	40.2	1.34	5.1	-0.2
1750	42.2	14.1	1.37	40.1	1.37	5.3	-0.1
1800	42.1	14.0	1.40	40.0	1.40	5.3	0.0
1810	42.1	14.0	1.41	40.0	1.40	5.3	0.7
1825	42.1	13.9	1.42	40.0	1.40	5.3	1.4
1850	42.0	13.9	1.43	40.0	1.40	5.0	2.1
1900	41.9	13.8	1.46	40.0	1.40	4.7	4.3
1950	41.9	13.8	1.49	40.0	1.40	4.7	6.4
2000	41.8	13.7	1.53	40.0	1.40	4.5	9.3
2050	41.7	13.7	1.56	39.9	1.44	4.5	8.0
2100	41.7	13.7	1.60	39.8	1.49	4.7	7.5
2150	41.6	13.6	1.63	39.7	1.53	4.7	6.3
2200	41.5	13.6	1.67	39.6	1.58	4.7	5.8
2250	41.5	13.6	1.70	39.6	1.62	4.9	4.8
2300	41.4	13.6	1.74	39.5	1.67	4.9	4.4
2350	41.3	13.6	1.78	39.4	1.71	4.9	4.0
2400	41.2	13.6	1.82	39.3	1.76	4.9	3.7
2450	41.2	13.6	1.85	39.2	1.80	5.1	2.8
2500	41.1	13.6	1.89	39.1	1.85	5.0	1.9
2550	41.0	13.7	1.94	39.1	1.91	4.9	1.6
2600	40.9	13.7	1.98	39.0	1.96	4.8	0.8



3500	39.4	14.2	2.77	37.9	2.91	3.7	-5.1
3700	39.0	14.3	2.95	37.7	3.12	3.5	-5.3
5200	36.4	15.9	4.61	36.0	4.66	1.3	-1.0
5250	36.4	16.0	4.67	35.9	4.71	1.2	-0.9
5300	36.3	16.0	4.72	35.9	4.76	1.1	-0.7
5500	35.9	16.2	4.96	35.6	4.96	0.7	-0.1
5600	35.7	16.3	5.07	35.5	5.07	0.5	0.2
5700	35.5	16.4	5.19	35.4	5.17	0.3	0.4
5800	35.4	16.5	5.31	35.3	5.27	0.1	0.7
6000	35.0	16.6	5.54	35.1	5.48	-0.2	1.2
6500	34.1	17.1	6.17	34.5	6.07	-1.1	1.6
7000	33.2	17.4	6.78	33.9	6.65	-2.0	2.0
7500	32.3	17.7	7.40	33.3	7.24	-2.9	2.2
8000	31.5	18.0	8.01	32.7	7.84	-3.8	2.2
8500	30.6	18.2	8.63	32.1	8.45	-4.7	2.1
9000	29.8	18.4	9.24	31.5	9.08	-5.6	1.8
9500	29.0	18.6	9.84	31.0	9.71	-6.5	1.3
10000	28.1	18.8	10.44	30.4	10.36	-7.4	0.8

Figure C-3
 600 – 5800 MHz Head Tissue Equivalent Matter

FCC ID: ZNFK420TM	 PCTEST Product to be part of 5G network	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Test Dates: 12/28/20 – 1/30/21	DUT Type: Portable Handset			APPENDIX C: Page 3 of 3

APPENDIX D: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table D-1
SAR System Validation Summary – 1g

SAR System	Freq. (MHz)	Date	Probe SN	Probe Cal Point		Cond. (σ)	Perm. (ϵ_r)	CW VALIDATION			MOD. VALIDATION		
								SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
H	750	12/22/2020	7357	750	Head	0.881	42.984	PASS	PASS	PASS	N/A	N/A	N/A
P	835	9/10/2020	7308	835	Head	0.936	42.190	PASS	PASS	PASS	GMSK	PASS	N/A
H	1750	1/20/2021	7357	1750	Head	1.399	39.491	PASS	PASS	PASS	N/A	N/A	N/A
L	1900	11/25/2020	7539	1900	Head	1.402	40.110	PASS	PASS	PASS	GMSK	PASS	N/A
E	2450	1/7/2021	7571	2450	Head	1.847	39.716	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
E	2600	1/7/2021	7571	2600	Head	2.025	39.117	PASS	PASS	PASS	TDD	PASS	N/A
H	5250	5/7/2020	7357	5250	Head	4.644	35.124	PASS	PASS	PASS	OFDM	N/A	PASS
H	5600	5/7/2020	7357	5600	Head	5.030	34.514	PASS	PASS	PASS	OFDM	N/A	PASS
H	5750	5/7/2020	7357	5750	Head	5.207	34.257	PASS	PASS	PASS	OFDM	N/A	PASS
L	750	12/17/2020	7539	750	Body	0.941	57.099	PASS	PASS	PASS	N/A	N/A	N/A
D	835	1/7/2021	7552	835	Body	0.956	54.674	PASS	PASS	PASS	GMSK	PASS	N/A
H	1750	5/14/2020	7357	1750	Body	1.531	51.701	PASS	PASS	PASS	N/A	N/A	N/A
I	1900	1/5/2021	7551	1900	Body	1.520	53.063	PASS	PASS	PASS	GMSK	PASS	N/A
P	1900	12/7/2020	7308	1900	Body	1.571	52.788	PASS	PASS	PASS	GMSK	PASS	N/A
P	2450	9/9/2020	7308	2450	Body	2.028	52.651	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
K	2450	7/7/2020	7409	2450	Body	2.018	51.176	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
K	2600	7/8/2020	7409	2600	Body	2.194	50.726	PASS	PASS	PASS	TDD	PASS	N/A
G	5250	11/2/2020	7406	5250	Body	5.533	47.077	PASS	PASS	PASS	OFDM	N/A	PASS
G	5600	11/2/2020	7406	5600	Body	6.006	46.433	PASS	PASS	PASS	OFDM	N/A	PASS
G	5750	11/2/2020	7406	5750	Body	6.210	46.185	PASS	PASS	PASS	OFDM	N/A	PASS

Table D-2
SAR System Validation Summary – 10g

SAR System	Freq. (MHz)	Date	Probe SN	Probe Cal Point		Cond. (σ)	Perm. (ϵ_r)	CW VALIDATION			MOD. VALIDATION		
								SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
J	1750	12/18/2020	7410	1750	Body	1.456	51.188	PASS	PASS	PASS	N/A	N/A	N/A
P	1750	9/8/2020	7308	1750	Body	1.478	52.861	PASS	PASS	PASS	N/A	N/A	N/A
I	1900	1/5/2021	7551	1900	Body	1.520	53.063	PASS	PASS	PASS	GMSK	PASS	N/A
P	1900	12/7/2020	7308	1900	Body	1.571	52.788	PASS	PASS	PASS	GMSK	PASS	N/A
K	2450	7/7/2020	7409	2450	Body	2.018	51.176	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
K	2600	7/8/2020	7409	2600	Body	2.194	50.726	PASS	PASS	PASS	TDD	PASS	N/A
G	5250	11/2/2020	7406	5250	Body	5.533	47.077	PASS	PASS	PASS	OFDM	N/A	PASS
G	5600	11/2/2020	7406	5600	Body	6.006	46.433	PASS	PASS	PASS	OFDM	N/A	PASS
G	5750	11/2/2020	7406	5750	Body	6.210	46.185	PASS	PASS	PASS	OFDM	N/A	PASS

FCC ID ZNFK420TM	 PCTEST Proud to be part of the solution	SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX D: Page 1 of 2		

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

FCC ID ZNFK420TM	 PCTEST Should to be part of element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset			APPENDIX D: Page 2 of 2

APPENDIX F: LTE LOWER BANDWIDTH RF CONDUCTED POWERS

F.1 LTE Lower Bandwidth RF Conducted Powers

F.1.1 LTE Band 71

Table 1-1
LTE Band 71 Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.89	0	0
	1	36	25.03		0
	1	74	24.87		0
	36	0	23.99	0-1	1
	36	18	24.07		1
	36	37	24.09		1
	75	0	24.00		1
16QAM	1	0	24.17	0-1	1
	1	36	24.20		1
	1	74	24.20		1
	36	0	22.93	0-2	2
	36	18	23.00		2
	36	37	23.04		2
	75	0	22.97		2
64QAM	1	0	23.05	0-2	2
	1	36	23.17		2
	1	74	23.18		2
	36	0	21.96	0-3	3
	36	18	22.05		3
	36	37	22.07		3
	75	0	22.00		3

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFK420TM	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset			APPENDIX F: Page 1 of 20

Table 1-2
LTE Band 71 Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 71 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.84	24.92	24.97	0	0
	1	25	24.95	25.10	25.08		0
	1	49	24.88	24.96	24.92		0
	25	0	23.90	24.00	24.04	0-1	1
	25	12	23.99	24.06	24.07		1
	25	25	23.92	24.08	24.08		1
16QAM	50	0	23.93	24.04	24.07	0-1	1
	1	0	24.13	24.17	24.18		1
	1	25	24.16	24.20	24.20		1
	1	49	24.13	24.20	24.10	0-2	1
	25	0	22.85	22.99	23.02		2
	25	12	22.95	23.04	23.04		2
64QAM	25	25	22.88	23.05	23.05	0-2	2
	50	0	22.88	23.03	23.02		2
	1	0	23.06	23.14	23.15		0-2
	1	25	23.20	23.20	23.20	2	
	1	49	23.01	23.08	23.09	2	
	25	0	21.84	22.00	22.04	0-3	3
25	12	21.93	22.08	22.04	3		
25	25	21.87	22.05	21.99	3		
	50	0	21.89	22.04	22.06		3

Table 1-3
LTE Band 71 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 71 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.73	24.84	24.83	0	0
	1	12	24.97	25.12	25.10		0
	1	24	24.70	24.70	24.80		0
	12	0	23.76	23.94	23.94	0-1	1
	12	6	23.93	24.04	24.01		1
	12	13	23.79	23.97	23.92		1
16QAM	25	0	23.83	23.97	24.00	0-1	1
	1	0	24.09	24.08	24.10		1
	1	12	24.20	24.20	24.20		1
	1	24	23.93	24.10	24.00	0-2	1
	12	0	22.77	22.96	22.95		2
	12	6	22.93	23.06	22.99		2
64QAM	12	13	22.84	23.03	22.95	0-2	2
	25	0	22.82	22.94	22.94		2
	1	0	22.98	23.00	23.01		0-2
	1	12	23.17	23.20	23.20	2	
	1	24	22.84	23.01	22.96	2	
	12	0	21.77	21.97	21.95	0-3	3
12	6	21.93	22.05	22.01	3		
12	13	21.85	22.02	21.95	3		
	25	0	21.83	21.98	21.96		3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 2 of 20		

F.1.2 LTE Band 12

Table 1-4
LTE Band 12 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.75	24.69	24.69	0	0
	1	12	25.02	24.92	24.94		0
	1	24	24.76	24.60	24.65		0
	12	0	23.83	23.78	23.80	0-1	1
	12	6	23.87	23.85	23.83		1
	12	13	23.73	23.83	23.72		1
	25	0	23.73	23.83	23.77		1
16QAM	1	0	23.77	23.93	24.15	0-1	1
	1	12	24.01	24.15	24.20		1
	1	24	23.80	23.90	24.09		1
	12	0	22.82	22.80	22.90	0-2	2
	12	6	22.90	22.90	22.93		2
	12	13	22.75	22.88	22.70		2
	25	0	22.73	22.83	22.80		2
64QAM	1	0	22.90	22.89	23.02	0-2	2
	1	12	23.17	23.08	23.19		2
	1	24	22.94	22.85	22.91		2
	12	0	21.89	21.81	21.74	0-3	3
	12	6	21.96	21.89	21.79		3
	12	13	21.84	21.87	21.66		3
	25	0	21.80	21.79	21.76		3

Table 1-5
LTE Band 12 Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.84	24.79	24.84	0	0
	1	7	24.95	24.92	24.92		0
	1	14	24.77	24.76	24.77		0
	8	0	23.82	23.82	23.80	0-1	1
	8	4	23.90	23.87	23.83		1
	8	7	23.83	23.83	23.77		1
	15	0	23.83	23.79	23.76		1
16QAM	1	0	23.80	23.75	24.07	0-1	1
	1	7	23.93	23.84	24.19		1
	1	14	23.72	23.68	24.04		1
	8	0	22.83	22.93	22.85	0-2	2
	8	4	22.90	22.97	22.88		2
	8	7	22.83	22.94	22.83		2
	15	0	22.76	22.86	22.80		2
64QAM	1	0	22.92	23.09	22.88	0-2	2
	1	7	23.09	23.20	23.00		2
	1	14	22.83	23.07	22.88		2
	8	0	21.77	21.94	21.84	0-3	3
	8	4	21.83	21.96	21.86		3
	8	7	21.77	21.91	21.81		3
	15	0	21.88	21.85	21.81		3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 3 of 20		

Table 1-6
LTE Band 12 Maximum Conducted Powers - 1.4 MHz Bandwidth

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.78	24.66	24.74	0	0
	1	2	24.89	24.83	24.85		0
	1	5	24.79	24.68	24.72		0
	3	0	24.83	24.80	24.73		0
	3	2	24.84	24.83	24.75		0
	3	3	24.82	24.88	24.72		0
	6	0	23.83	23.81	23.76	0-1	1
16QAM	1	0	24.04	23.79	23.70	0-1	1
	1	2	24.14	23.79	23.79		1
	1	5	24.07	23.75	23.70		1
	3	0	23.94	24.00	23.70		1
	3	2	23.94	24.02	23.71		1
	3	3	23.95	24.01	23.71		1
	6	0	22.68	23.02	22.84	0-2	2
64QAM	1	0	22.84	22.90	23.02	0-2	2
	1	2	22.96	23.01	23.17		2
	1	5	22.86	22.90	23.03		2
	3	0	22.92	22.78	22.96		2
	3	2	22.95	22.80	22.99		2
	3	3	22.94	22.78	22.99		2
	6	0	22.09	21.90	21.70	0-3	3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 4 of 20		

F.1.3 LTE Band 13

Table 1-7
LTE Band 13 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.92	0	0
	1	12	24.14		0
	1	24	23.84		0
	12	0	22.98	0-1	1
	12	6	23.10		1
	12	13	22.92		1
	25	0	22.94		1
16QAM	1	0	23.20	0-1	1
	1	12	23.20		1
	1	24	23.16		1
	12	0	22.04	0-2	2
	12	6	22.14		2
	12	13	21.98		2
	25	0	21.94		2
64QAM	1	0	22.20	0-2	2
	1	12	22.20		2
	1	24	22.07		2
	12	0	21.03	0-3	3
	12	6	21.13		3
	12	13	20.94		3
	25	0	20.95		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFK420TM	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset			APPENDIX F: Page 5 of 20

F.1.4 LTE Band 26

Table 1-8
LTE Band 26 (Cell) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.92	24.84	24.93	0	0
	1	25	25.02	25.00	25.02		0
	1	49	24.87	24.90	24.94		0
	25	0	24.05	24.08	24.03	0-1	1
	25	12	24.04	24.01	24.06		1
	25	25	24.06	23.96	23.91		1
16QAM	50	0	24.05	24.04	23.95	0-1	1
	1	0	24.00	23.88	23.98		1
	1	25	23.99	24.00	24.04		1
	1	49	23.94	24.03	24.03	0-2	1
	25	0	22.78	22.83	22.82		2
	25	12	22.79	22.78	22.85		2
64QAM	25	25	22.84	22.76	22.67	0-2	2
	50	0	22.83	22.78	22.72		2
	1	0	23.10	23.06	23.20		0-2
	1	25	23.20	23.20	23.20	2	
	1	49	23.10	23.17	23.20	0-3	
	25	0	21.99	22.07	22.05		3
25	12	22.00	22.00	22.07	3		
64QAM	25	25	22.08	21.96	21.91	0-3	3
	50	0	22.08	22.04	21.97		3

Table 1-9
LTE Band 26 (Cell) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.84	24.79	24.84	0	0
	1	12	25.10	25.09	25.11		0
	1	24	24.83	24.82	24.85		0
	12	0	24.03	23.97	24.09	0-1	1
	12	6	24.07	24.01	24.07		1
	12	13	24.01	23.94	23.94		1
	25	0	24.05	23.97	24.05		1
16QAM	1	0	23.90	23.88	23.86	0-1	1
	1	12	24.10	24.10	24.09		1
	1	24	23.90	23.94	23.82		1
	12	0	22.77	22.75	22.89	0-2	2
	12	6	22.82	22.83	22.88		2
	12	13	22.78	22.74	22.73		2
	25	0	22.75	22.72	22.83		2
64QAM	1	0	23.03	23.00	23.08	0-2	2
	1	12	23.20	23.20	23.20		2
	1	24	23.05	23.07	23.17		2
	12	0	21.99	21.99	22.08	0-3	3
	12	6	22.02	22.00	22.08		3
	12	13	21.98	21.93	21.95		3
	25	0	22.00	21.98	22.03		3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 6 of 20		

Table 1-10
LTE Band 26 (Cell) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.94	24.92	24.98	0	0
	1	7	25.09	25.07	25.12		0
	1	14	24.92	24.93	24.95		0
	8	0	24.02	23.96	24.05	0-1	1
	8	4	24.07	23.98	24.06		1
	8	7	24.03	23.98	24.01		1
	15	0	24.03	24.00	24.05		1
16QAM	1	0	24.01	23.99	23.94	0-1	1
	1	7	24.10	24.12	24.06		1
	1	14	24.00	23.98	23.97		1
	8	0	22.84	22.82	22.92	0-2	2
	8	4	22.84	22.84	22.90		2
	8	7	22.84	22.76	22.88		2
	15	0	22.75	22.77	22.84		2
64QAM	1	0	23.13	23.07	23.16	0-2	2
	1	7	23.20	23.20	23.20		2
	1	14	23.12	23.11	23.20		2
	8	0	22.00	22.00	22.05	0-3	3
	8	4	22.05	22.00	22.14		3
	8	7	21.99	22.00	22.05		3
	15	0	22.00	22.00	22.06		3

Table 1-11
LTE Band 26 (Cell) Maximum Conducted Powers - 1.4 MHz Bandwidth

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.92	24.89	24.94	0	0
	1	2	25.04	25.02	25.08		0
	1	5	24.91	24.88	24.92		0
	3	0	25.00	24.98	25.06		0
	3	2	25.04	24.99	25.09		0
	3	3	25.02	24.97	25.03		0
	6	0	24.10	24.02	24.09	0-1	1
16QAM	1	0	24.00	23.97	24.01	0-1	1
	1	2	24.04	24.04	24.08		1
	1	5	23.95	23.90	23.98		1
	3	0	23.83	23.82	23.84		1
	3	2	23.88	23.84	23.88		1
	3	3	23.85	23.83	23.86		1
	6	0	22.81	22.82	22.90	0-2	2
64QAM	1	0	23.12	23.06	23.20	0-2	2
	1	2	23.20	23.20	23.20		2
	1	5	23.10	23.05	23.16		2
	3	0	23.05	23.06	23.12		2
	3	2	23.10	23.08	23.15		2
	3	3	23.11	23.04	23.15		2
	6	0	22.05	22.03	22.12	0-3	3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 7 of 20		

F.1.5 LTE Band 66

Table 1-12
LTE Band 66 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.54	24.52	24.55	0	0
	1	36	24.65	24.67	24.63		0
	1	74	24.56	24.67	24.53		0
	36	0	23.77	23.82	23.82	0-1	1
	36	18	23.77	23.80	23.81		1
	36	37	23.77	23.84	23.78		1
	75	0	23.81	23.85	23.82		1
16QAM	1	0	23.61	23.63	23.63	0-1	1
	1	36	23.72	23.84	23.77		1
	1	74	23.61	23.78	23.62		1
	36	0	22.50	22.53	22.58	0-2	2
	36	18	22.53	22.55	22.52		2
	36	37	22.47	22.57	22.52		2
	75	0	22.50	22.53	22.56		2
64QAM	1	0	22.79	22.82	22.80	0-2	2
	1	36	22.91	22.96	22.93		2
	1	74	22.81	22.97	22.79		2
	36	0	21.75	21.81	21.80	0-3	3
	36	18	21.76	21.80	21.78		3
	36	37	21.73	21.80	21.77		3
	75	0	21.76	21.80	21.81		3

Table 1-13
LTE Band 66 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.57	24.59	24.58	0	0
	1	25	24.73	24.73	24.73		0
	1	49	24.60	24.63	24.55		0
	25	0	23.77	23.81	23.76	0-1	1
	25	12	23.78	23.80	23.77		1
	25	25	23.76	23.80	23.76		1
	50	0	23.80	23.81	23.78		1
16QAM	1	0	23.69	23.69	23.72	0-1	1
	1	25	23.84	23.89	23.83		1
	1	49	23.73	23.75	23.64		1
	25	0	22.52	22.54	22.52	0-2	2
	25	12	22.52	22.56	22.51		2
	25	25	22.52	22.54	22.50		2
	50	0	22.53	22.53	22.53		2
64QAM	1	0	22.85	22.83	22.90	0-2	2
	1	25	23.02	23.05	22.94		2
	1	49	22.91	22.93	22.84		2
	25	0	21.75	21.78	21.74	0-3	3
	25	12	21.75	21.79	21.69		3
	25	25	21.72	21.79	21.73		3
	50	0	21.76	21.80	21.78		3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 8 of 20		

Table 1-14
LTE Band 66 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.49	24.55	24.45	0	0
	1	12	24.75	24.86	24.75		0
	1	24	24.49	24.55	24.45		0
	12	0	23.73	23.78	23.65	0-1	1
	12	6	23.79	23.83	23.74		1
	12	13	23.73	23.76	23.66		1
16QAM	25	0	23.73	23.79	23.66	0-1	1
	1	0	23.60	23.70	23.65		1
	1	12	23.98	23.97	23.82		1
	1	24	23.64	23.63	23.55	0-2	1
	12	0	22.51	22.56	22.45		2
	12	6	22.56	22.61	22.52		2
64QAM	12	13	22.50	22.55	22.47	0-2	2
	25	0	22.46	22.55	22.42		2
	1	0	22.79	22.79	22.78	0-2	2
	1	12	23.02	23.06	23.02		2
	1	24	22.77	22.85	22.68	0-3	2
	12	0	21.67	21.75	21.65		3
12	6	21.79	21.84	21.73	3		
12	13	21.71	21.79	21.67	3		
	25	0	21.66	21.77	21.67		3

Table 1-15
LTE Band 66 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.59	24.67	24.58	0	0	
	1	7	24.76	24.82	24.67		0	
	1	14	24.60	24.65	24.66		0	
	8	0	23.72	23.78	23.71	0-1	1	
	8	4	23.76	23.80	23.70		1	
	8	7	23.72	23.77	23.67		1	
16QAM	15	0	23.73	23.76	23.67	0-1	1	
	1	0	23.71	23.73	23.68		1	
	1	7	23.88	23.88	23.74		1	
	1	14	23.72	23.78	23.68	0-2	1	
	8	0	22.58	22.60	22.51		2	
	8	4	22.57	22.65	22.53		2	
64QAM	8	7	22.56	22.62	22.51	0-2	2	
	15	0	22.48	22.53	22.41		2	
	64QAM	1	0	22.87	22.92	22.85	0-2	2
		1	7	22.96	23.06	23.00		2
		1	14	22.89	22.94	22.80		2
		8	0	21.75	21.77	21.67	0-3	3
8		4	21.77	21.81	21.69	3		
8		7	21.73	21.79	21.66	3		
	15	0	21.70	21.78	21.68		3	

FCC ID: ZNFK420TM	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset			APPENDIX F: Page 9 of 20

Table 1-16
LTE Band 66 (AWS) Maximum Conducted Powers - 1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.57	24.61	24.50	0	0
	1	2	24.73	24.77	24.65		0
	1	5	24.59	24.64	24.52		0
	3	0	24.68	24.70	24.61		0
	3	2	24.71	24.72	24.63		0
	3	3	24.66	24.72	24.63		0
	6	0	23.79	23.82	23.70	0-1	1
16QAM	1	0	23.70	23.76	23.62	0-1	1
	1	2	23.84	23.86	23.70		1
	1	5	23.68	23.81	23.64		1
	3	0	23.55	23.61	23.55		1
	3	2	23.58	23.67	23.51		1
	3	3	23.58	23.65	23.51	1	
64QAM	6	0	22.61	22.63	22.57	0-2	2
	1	0	22.83	22.92	22.81	0-2	2
	1	2	22.98	23.07	22.95		2
	1	5	22.86	22.90	22.77		2
	3	0	22.76	22.83	22.70		2
	3	2	22.81	22.90	22.75		2
	3	3	22.80	22.86	22.73	0-3	2
	6	0	21.82	21.80	21.70		3

Table 1-17
LTE Band 66 (AWS) Reduced Conducted Powers - Grip Sensor Mode Active - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.68	22.74	22.81	0	0
	1	36	22.76	22.97	22.99		0
	1	74	22.46	22.77	22.72		0
	36	0	22.85	22.83	23.11	0-1	0
	36	18	22.83	22.90	23.04		0
	36	37	22.84	22.83	23.02		0
	75	0	22.82	22.84	23.07		0
16QAM	1	0	22.57	22.51	23.11	0-1	0
	1	36	22.66	22.74	23.12		0
	1	74	22.45	22.64	22.99		0
	36	0	22.45	22.37	22.41	0-2	0
	36	18	22.44	22.40	22.45		0
	36	37	22.40	22.38	22.40		0
	75	0	22.40	22.36	22.41		0
64QAM	1	0	22.70	22.81	22.72	0-2	0
	1	36	22.79	23.00	22.88		0
	1	74	22.77	22.66	22.61		0
	36	0	21.81	21.77	21.85	0-3	1
	36	18	21.57	21.83	21.92		1
	36	37	21.76	21.77	21.82		1
	75	0	21.83	21.69	21.75		1

FCC ID: ZNFK420TM	 PCTEST Proud to be part of  element	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F:		Page 10 of 20

Table 1-18
LTE Band 66 (AWS) Reduced Conducted Powers - Grip Sensor Mode Active - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.76	22.69	22.91	0	0
	1	25	22.78	22.88	22.93		0
	1	49	22.63	22.72	22.79		0
	25	0	22.79	22.86	23.03	0-1	0
	25	12	22.81	22.87	22.98		0
	25	25	22.77	22.83	23.05		0
	50	0	22.80	22.85	23.02		0
16QAM	1	0	22.49	22.95	22.80	0-1	0
	1	25	22.66	23.14	22.90		0
	1	49	22.45	23.01	22.74		0
	25	0	22.50	22.46	22.49	0-2	0
	25	12	22.50	22.47	22.49		0
	25	25	22.47	22.50	22.47		0
	50	0	22.45	22.43	22.42		0
64QAM	1	0	22.73	22.76	22.45	0-2	0
	1	25	22.81	22.68	22.63		0
	1	49	22.59	22.79	22.88		0
	25	0	21.68	21.63	21.55	0-3	1
	25	12	21.62	21.58	21.50		1
	25	25	21.62	21.58	21.51		1
	50	0	21.58	21.58	21.55		1

Table 1-19
LTE Band 66 (AWS) Reduced Conducted Powers - Grip Sensor Mode Active - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.72	22.71	22.78	0	0
	1	12	22.93	22.98	22.98		0
	1	24	22.60	22.70	22.73		0
	12	0	22.80	22.80	22.94	0-1	0
	12	6	22.85	22.85	22.99		0
	12	13	22.79	22.83	22.91		0
	25	0	22.81	22.80	22.97		0
16QAM	1	0	22.61	22.99	22.79	0-1	0
	1	12	22.84	23.01	23.07		0
	1	24	22.56	23.20	22.78		0
	12	0	22.44	22.41	22.37	0-2	0
	12	6	22.47	22.52	22.42		0
	12	13	22.38	22.47	22.41		0
	25	0	22.40	22.48	22.34		0
64QAM	1	0	22.68	22.59	22.41	0-2	0
	1	12	22.65	22.50	22.39		0
	1	24	22.37	22.32	22.09		0
	12	0	21.66	21.62	21.50	0-3	1
	12	6	21.72	21.61	21.61		1
	12	13	21.59	21.54	21.52		1
	25	0	21.88	21.85	21.93		1

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 11 of 20		

Table 1-20
LTE Band 66 (AWS) Reduced Conducted Powers - Grip Sensor Mode Active - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.73	22.67	22.77	0	0
	1	7	22.87	22.86	22.98		0
	1	14	22.71	22.71	22.80		0
	8	0	22.82	22.72	22.93	0-1	0
	8	4	22.86	22.81	22.96		0
	8	7	22.80	22.77	22.93		0
	15	0	22.81	22.78	22.93		0
16QAM	1	0	22.57	22.97	22.65	0-1	0
	1	7	22.60	23.15	22.86		0
	1	14	22.70	23.05	22.67		0
	8	0	22.46	22.54	22.46	0-2	0
	8	4	22.55	22.62	22.54		0
	8	7	22.46	22.56	22.44		0
	15	0	22.46	22.45	22.43		0
64QAM	1	0	22.60	22.87	22.61	0-2	0
	1	7	22.55	22.51	22.59		0
	1	14	22.49	22.92	22.48		0
	8	0	21.68	21.61	21.58	0-3	1
	8	4	21.64	21.67	21.59		1
	8	7	21.62	21.67	21.54		1
	15	0	21.70	21.62	21.54		1

Table 1-21
LTE Band 66 (AWS) Reduced Conducted Powers - Grip Sensor Mode Active - 1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.79	22.66	22.94	0	0
	1	2	22.82	22.84	23.03		0
	1	5	22.74	22.63	22.97		0
	3	0	22.93	22.83	22.96		0
	3	2	22.92	22.87	22.98		0
	3	3	23.02	22.83	22.97		0
	6	0	22.81	22.82	22.95		0-1
16QAM	1	0	23.03	22.81	22.88	0-1	0
	1	2	22.90	22.92	22.84		0
	1	5	23.00	22.79	22.85		0
	3	0	23.03	22.79	23.01		0
	3	2	23.05	22.87	22.99		0
	3	3	23.02	22.83	23.01		0
	6	0	22.59	22.64	22.66		0-2
64QAM	1	0	22.81	22.78	22.65	0-2	0
	1	2	22.97	22.82	22.66		0
	1	5	22.94	22.96	22.70		0
	3	0	22.78	22.78	22.63		0
	3	2	22.82	22.72	22.60		0
	3	3	22.69	23.02	22.58		0
	6	0	21.63	21.78	21.23		0-3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 12 of 20		

F.1.6 LTE Band 25

Table 1-22
LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.02	24.18	24.13	0	0
	1	36	24.23	24.32	24.23		0
	1	74	24.14	24.25	24.08		0
	36	0	23.20	23.39	23.29	0-1	1
	36	18	23.22	23.37	23.34		1
	36	37	23.27	23.35	23.27		1
	75	0	23.20	23.35	23.27		1
16QAM	1	0	23.07	23.19	23.24	0-1	1
	1	36	23.25	23.33	23.35		1
	1	74	23.20	23.30	23.14		1
	36	0	21.86	22.05	22.01	0-2	2
	36	18	21.89	22.04	22.05		2
	36	37	21.94	22.01	21.97		2
	75	0	21.91	22.03	21.97		2
64QAM	1	0	22.30	22.42	22.48	0-2	2
	1	36	22.46	22.60	22.60		2
	1	74	22.41	22.46	22.39		2
	36	0	21.16	21.35	21.30	0-3	3
	36	18	21.22	21.34	21.37		3
	36	37	21.28	21.31	21.29		3
	75	0	21.21	21.32	21.28		3

Table 1-23
LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.11	24.27	24.17	0	0
	1	25	24.25	24.38	24.26		0
	1	49	24.20	24.28	24.11		0
	25	0	23.20	23.38	23.33	0-1	1
	25	12	23.20	23.35	23.29		1
	25	25	23.25	23.33	23.20		1
	50	0	23.24	23.36	23.29		1
16QAM	1	0	23.16	23.28	23.31	0-1	1
	1	25	23.30	23.42	23.35		1
	1	49	23.24	23.30	23.18		1
	25	0	21.96	22.11	22.07	0-2	2
	25	12	21.90	22.05	22.03		2
	25	25	21.98	22.04	21.94		2
	50	0	21.91	22.05	22.00		2
64QAM	1	0	22.32	22.49	22.56	0-2	2
	1	25	22.48	22.62	22.64		2
	1	49	22.47	22.55	22.43		2
	25	0	21.18	21.36	21.37	0-3	3
	25	12	21.20	21.34	21.32		3
	25	25	21.23	21.30	21.23		3
	50	0	21.20	21.34	21.30		3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F:		Page 13 of 20

Table 1-24
LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.99	24.19	24.07	0	0
	1	12	24.31	24.44	24.28		0
	1	24	24.04	24.16	24.02		0
	12	0	23.16	23.30	23.25	0-1	1
	12	6	23.22	23.35	23.27		1
	12	13	23.18	23.30	23.17		1
16QAM	25	0	23.17	23.30	23.22	0-1	1
	1	0	23.05	23.20	23.17		1
	1	12	23.32	23.53	23.35		1
	1	24	23.10	23.25	23.10	0-2	1
	12	0	21.88	22.05	22.06		2
	12	6	21.93	22.10	22.03		2
64QAM	12	13	21.89	22.03	21.92	0-2	2
	25	0	21.88	22.00	21.94		2
	1	0	22.23	22.40	22.40		0-2
	1	12	22.51	22.69	22.63	2	
	1	24	22.29	22.42	22.33	0-3	
	12	0	21.15	21.30	21.28		3
12	6	21.21	21.34	21.35	3		
12	13	21.17	21.26	21.21	3		
	25	0	21.14	21.25	21.23		3

Table 1-25
LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.08	24.28	24.15	0	0
	1	7	24.25	24.44	24.28		0
	1	14	24.13	24.29	24.12		0
	8	0	23.15	23.30	23.23	0-1	1
	8	4	23.19	23.35	23.22		1
	8	7	23.15	23.31	23.17		1
	15	0	23.16	23.27	23.24		1
16QAM	1	0	23.12	23.27	23.25	0-1	1
	1	7	23.27	23.24	23.28		1
	1	14	23.14	23.30	23.18		1
	8	0	21.95	22.10	22.05	0-2	2
	8	4	21.98	22.10	22.07		2
	8	7	21.96	22.06	22.00		2
	15	0	21.86	21.98	21.94		2
64QAM	1	0	22.31	22.48	22.48	0-2	2
	1	7	22.50	22.69	22.55		2
	1	14	22.39	22.53	22.47		2
	8	0	21.20	21.32	21.34	0-3	3
	8	4	21.20	21.36	21.35		3
	8	7	21.19	21.27	21.27		3
	15	0	21.17	21.29	21.25		3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 14 of 20		

Table 1-26
LTE Band 25 (PCS) Maximum Conducted Powers - 1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.10	24.22	24.08	0	0
	1	2	24.21	24.34	24.20		0
	1	5	24.09	24.22	24.07		0
	3	0	24.15	24.28	24.18		0
	3	2	24.19	24.32	24.19		0
	3	3	24.17	24.29	24.19		0
	6	0	23.19	23.32	23.26	0-1	1
16QAM	1	0	23.12	23.29	23.19	0-1	1
	1	2	23.23	23.45	23.26		1
	1	5	23.12	23.14	23.19		1
	3	0	22.98	23.12	23.04		1
	3	2	22.99	23.15	23.04		1
	3	3	22.96	23.10	23.00		1
	6	0	21.93	22.07	22.02	0-2	2
64QAM	1	0	22.27	22.47	22.38	0-2	2
	1	2	22.48	22.62	22.54		2
	1	5	22.27	22.46	22.42		2
	3	0	22.21	22.39	22.32		2
	3	2	22.31	22.44	22.35		2
	3	3	22.26	22.42	22.31		2
	6	0	21.19	21.32	21.33	0-3	3

Table 1-27
LTE Band 25 (PCS) Reduced Conducted Powers - Grip Sensor Mode Active - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.58	22.70	22.70	0	0
	1	36	22.70	22.83	22.80		0
	1	74	22.66	22.74	22.68		0
	36	0	22.69	22.88	22.80	0-1	0
	36	18	22.73	22.86	22.83		0
	36	37	22.78	22.85	22.77		0
	75	0	22.71	22.85	22.75		0
16QAM	1	0	22.89	23.01	23.10	0-1	0
	1	36	23.04	23.17	23.20		0
	1	74	23.00	23.12	22.97		0
	36	0	21.86	22.04	22.00	0-2	0.5
	36	18	21.89	22.03	22.05		0.5
	36	37	21.94	22.02	21.97		0.5
	75	0	21.89	22.03	21.99		0.5
64QAM	1	0	22.30	22.40	22.48	0-2	0.5
	1	36	22.47	22.57	22.61		0.5
	1	74	22.35	22.45	22.39		0.5
	36	0	21.17	21.35	21.29	0-3	1.5
	36	18	21.20	21.35	21.35		1.5
	36	37	21.26	21.31	21.29		1.5
	75	0	21.20	21.32	21.27		1.5

FCC ID: ZNFK420TM	 PCTEST Proud to be part of  element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 15 of 20		

Table 1-28
LTE Band 25 (PCS) Reduced Conducted Powers - Grip Sensor Mode Active - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.61	22.80	22.78	0	0
	1	25	22.74	22.92	22.84		0
	1	49	22.68	22.79	22.71		0
	25	0	22.70	22.91	22.82	0-1	0
	25	12	22.71	22.86	22.80		0
	25	25	22.75	22.83	22.70		0
	50	0	22.74	22.86	22.80		0
16QAM	1	0	22.95	23.17	23.14	0-1	0
	1	25	23.11	23.20	23.20		0
	1	49	23.03	23.15	23.02		0
	25	0	21.92	22.09	22.07	0-2	0.5
	25	12	21.91	22.05	22.05		0.5
	25	25	21.95	22.04	21.95		0.5
	50	0	21.94	22.07	22.01		0.5
64QAM	1	0	22.37	22.50	22.59	0-2	0.5
	1	25	22.52	22.60	22.62		0.5
	1	49	22.46	22.56	22.46		0.5
	25	0	21.17	21.36	21.38	0-3	1.5
	25	12	21.20	21.32	21.32		1.5
	25	25	21.23	21.30	21.24		1.5
	50	0	21.20	21.34	21.29		1.5

Table 1-29
LTE Band 25 (PCS) Reduced Conducted Powers - Grip Sensor Mode Active - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.55	22.71	22.66	0	0
	1	12	22.80	22.98	22.87		0
	1	24	22.58	22.70	22.59		0
	12	0	22.67	22.82	22.76	0-1	0
	12	6	22.71	22.85	22.78		0
	12	13	22.67	22.79	22.67		0
	25	0	22.67	22.80	22.73		0
16QAM	1	0	22.86	23.00	22.97	0-1	0
	1	12	23.08	23.20	23.15		0
	1	24	22.91	23.03	22.90		0
	12	0	21.88	22.06	22.04	0-2	0.5
	12	6	21.94	22.08	22.04		0.5
	12	13	21.90	22.04	21.93		0.5
	25	0	21.89	22.01	21.95		0.5
64QAM	1	0	22.25	22.40	22.42	0-2	0.5
	1	12	22.50	22.70	22.60		0.5
	1	24	22.28	22.45	22.34		0.5
	12	0	21.13	21.30	21.30	0-3	1.5
	12	6	21.19	21.35	21.34		1.5
	12	13	21.15	21.27	21.20		1.5
	25	0	21.15	21.22	21.23		1.5

FCC ID: ZNFK420TM	 PCTEST Proud to be part of  element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 16 of 20		

Table 1-30
LTE Band 25 (PCS) Reduced Conducted Powers - Grip Sensor Mode Active - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.63	22.78	22.70	0	0
	1	7	22.80	22.96	22.85		0
	1	14	22.66	22.78	22.70		0
	8	0	22.66	22.80	22.73	0-1	0
	8	4	22.69	22.82	22.75		0
	8	7	22.66	22.80	22.70		0
	15	0	22.66	22.79	22.73		0
16QAM	1	0	22.95	23.11	23.08	0-1	0
	1	7	23.07	23.20	23.11		0
	1	14	23.03	23.12	23.00		0
	8	0	21.92	22.10	22.06	0-2	0.5
	8	4	21.97	22.12	22.08		0.5
	8	7	21.94	22.10	22.02		0.5
	15	0	21.84	21.98	21.96		0.5
64QAM	1	0	22.33	22.52	22.47	0-2	0.5
	1	7	22.50	22.70	22.65		0.5
	1	14	22.37	22.55	22.42		0.5
	8	0	21.17	21.33	21.31	0-3	1.5
	8	4	21.20	21.30	21.30		1.5
	8	7	21.17	21.30	21.24		1.5
	15	0	21.13	21.29	21.25		1.5

Table 1-31
LTE Band 25 (PCS) Reduced Conducted Powers - Grip Sensor Mode Active - 1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.57	22.74	22.66	0	0
	1	2	22.74	22.89	22.77		0
	1	5	22.60	22.75	22.64		0
	3	0	22.69	22.84	22.73		0
	3	2	22.70	22.85	22.75		0
	3	3	22.67	22.83	22.71		0
	6	0	22.68	22.83	22.76	0-1	0
16QAM	1	0	22.94	23.10	23.00	0-1	0
	1	2	23.06	23.20	23.06		0
	1	5	22.86	23.08	22.95		0
	3	0	22.74	22.94	22.82		0
	3	2	22.83	22.97	22.88		0
	3	3	22.77	22.95	22.82		0
	6	0	21.91	22.08	22.05	0-2	0.5
64QAM	1	0	22.30	22.48	22.41	0-2	0.5
	1	2	22.49	22.60	22.54		0.5
	1	5	22.28	22.40	22.40		0.5
	3	0	22.23	22.40	22.30		0.5
	3	2	22.26	22.43	22.33		0.5
	3	3	22.24	22.41	22.31		0.5
	6	0	21.19	21.32	21.31	0-3	1.5

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 17 of 20		

F.1.7 LTE Band 41

Table 1-32
LTE Band 41 PC3 Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.71	23.72	23.54	23.40	23.83	0	0
	1	36	23.68	23.92	23.69	23.70	23.90		0
	1	74	23.56	23.70	23.55	23.60	23.61		0
	36	0	22.70	22.94	22.83	22.77	23.00	0-1	1
	36	18	22.93	22.92	22.78	22.79	22.92		1
	36	37	22.90	22.90	22.78	22.80	22.89		1
	75	0	22.83	22.64	22.68	22.74	22.86		1
16QAM	1	0	22.99	22.92	22.86	22.75	22.95	0-1	1
	1	36	22.97	23.03	22.93	22.89	22.99		1
	1	74	22.83	22.93	22.76	22.86	22.82		1
	36	0	21.89	22.02	21.89	21.75	22.04	0-2	2
	36	18	21.95	22.04	21.84	21.75	22.00		2
	36	37	21.79	22.02	21.85	21.80	21.91		2
	75	0	21.90	22.12	21.95	21.94	21.97		2
64QAM	1	0	21.62	21.64	21.83	21.66	21.63	0-2	2
	1	36	21.71	21.70	21.76	21.78	21.65		2
	1	74	21.68	21.66	21.72	21.76	21.66		2
	36	0	20.87	20.91	20.79	20.70	20.88	0-3	3
	36	18	20.86	20.93	20.80	20.70	20.85		3
	36	37	20.80	20.89	20.75	20.75	20.80		3
	75	0	20.87	20.96	20.80	20.80	20.83		3

Table 1-33
LTE Band 41 PC3 Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.88	23.89	23.70	23.60	23.89	0	0
	1	25	23.85	23.85	23.66	23.62	23.91		0
	1	49	23.78	23.93	23.70	23.80	23.83		0
	25	0	22.89	23.00	22.84	22.77	22.97	0-1	1
	25	12	22.90	22.98	22.83	22.74	22.97		1
	25	25	22.88	22.94	22.80	22.75	22.90		1
	50	0	22.83	22.91	22.78	22.67	22.85		1
16QAM	1	0	22.95	22.99	22.89	22.87	23.02	0-1	1
	1	25	22.95	23.05	22.87	22.88	22.97		1
	1	49	22.90	23.01	22.80	22.97	22.96		1
	25	0	22.09	22.10	21.80	21.80	22.00	0-2	2
	25	12	21.80	22.15	21.82	21.72	21.97		2
	25	25	21.81	22.11	21.78	21.80	21.78		2
	50	0	21.94	22.16	21.85	22.04	21.95		2
64QAM	1	0	21.99	21.84	21.85	21.72	21.91	0-2	2
	1	25	21.89	21.75	21.77	21.70	21.83		2
	1	49	21.93	21.81	21.80	21.79	21.84		2
	25	0	20.86	20.88	20.82	20.72	20.87	0-3	3
	25	12	20.88	20.95	20.80	20.70	20.89		3
	25	25	20.83	20.90	20.74	20.83	20.86		3
	50	0	20.92	21.03	20.96	20.90	20.90		3

FCC ID: ZNFK420TM	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F:		Page 18 of 20

Table 1-34
LTE Band 41 PC3 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.69	23.80	23.34	23.25	23.85	0	0
	1	12	23.94	24.00	23.62	23.60	24.02		0
	1	24	23.73	23.83	23.66	23.65	23.75		0
	12	0	22.79	22.92	22.62	22.80	22.94	0-1	1
	12	6	22.84	22.97	22.68	22.86	22.95		1
	12	13	22.79	22.92	22.70	22.82	22.85		1
	25	0	22.85	22.81	22.65	22.73	22.63		1
16QAM	1	0	22.80	22.80	22.85	22.78	22.90	0-1	1
	1	12	23.01	23.16	22.94	22.87	22.70		1
	1	24	22.80	22.90	22.80	22.80	22.79		1
	12	0	21.86	21.97	21.77	21.84	21.86	0-2	2
	12	6	21.91	22.07	21.86	21.77	21.94		2
	12	13	21.83	21.95	21.81	21.67	21.88		2
	25	0	21.93	22.00	21.87	21.77	21.90		2
64QAM	1	0	21.95	21.96	21.90	21.80	21.93	0-2	2
	1	12	22.16	22.17	22.14	22.06	22.20		2
	1	24	21.83	21.98	21.82	21.85	21.87		2
	12	0	20.63	20.70	20.68	20.60	20.82	0-3	3
	12	6	20.80	20.88	20.81	20.68	20.85		3
	12	13	20.66	20.81	20.70	20.55	20.78		3
	25	0	20.79	20.83	20.75	20.64	20.83		3

Table 1-35
LTE Band 41 PC3 Reduced Conducted Powers - Grip Sensor Mode Active - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.85	22.86	22.88	22.87	23.12	0	0
	1	36	22.94	23.01	23.01	23.02	23.20		0
	1	74	22.82	22.76	22.83	23.03	23.01		0
	36	0	22.71	22.80	22.57	22.69	22.85	0-1	0
	36	18	22.78	22.80	22.63	22.76	22.80		0
	36	37	22.82	22.81	22.60	22.78	22.85		0
	75	0	22.81	22.65	22.60	22.70	22.85		0
16QAM	1	0	22.39	22.36	22.58	22.55	22.93	0-1	0
	1	36	22.55	22.55	22.68	22.58	22.92		0
	1	74	22.32	22.30	22.49	22.58	22.79		0
	36	0	21.73	21.65	21.66	21.71	22.00	0-2	1
	36	18	21.75	21.66	21.70	21.77	21.98		1
	36	37	21.70	21.63	21.63	21.76	21.99		1
	75	0	21.74	21.64	21.60	21.75	21.93		1
64QAM	1	0	21.37	21.62	21.36	21.53	21.62	0-2	1
	1	36	21.44	21.70	21.43	21.73	21.65		1
	1	74	21.28	21.57	21.30	21.57	21.52		1
	36	0	20.77	20.72	20.50	20.63	20.85	0-3	2
	36	18	20.82	20.71	20.57	20.65	20.85		2
	36	37	20.74	20.70	20.56	20.67	20.85		2
	75	0	20.79	20.71	20.53	20.62	20.82		2

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 19 of 20		

Table 1-36
LTE Band 41 PC3 Reduced Conducted Powers - Grip Sensor Mode Active - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.96	23.06	23.01	22.90	23.18	0	0
	1	25	23.03	22.99	22.93	23.04	23.17		0
	1	49	22.92	22.92	22.92	22.96	23.10		0
	25	0	22.91	22.81	22.82	22.57	22.69	0-1	0
	25	12	22.83	22.81	22.76	22.60	22.71		0
	25	25	22.82	22.80	22.78	22.63	22.59		0
	50	0	22.81	22.76	22.69	22.54	22.61		0
16QAM	1	0	22.51	22.66	22.29	22.32	22.67	0-1	0
	1	25	22.37	22.90	22.40	22.49	22.73		0
	1	49	22.45	22.63	22.34	22.37	22.68		0
	25	0	21.68	21.78	21.69	21.84	21.58	0-2	1
	25	12	21.68	21.78	21.64	21.78	21.56		1
	25	25	21.68	21.79	21.65	21.87	21.55		1
	50	0	21.70	21.69	21.67	21.74	21.45		1
64QAM	1	0	21.82	21.58	21.26	21.13	21.54	0-2	1
	1	25	21.86	21.80	21.72	21.53	21.67		1
	1	49	21.57	21.52	21.25	21.19	21.51		1
	25	0	20.76	20.79	20.73	20.66	20.72	0-3	2
	25	12	20.73	20.73	20.76	20.61	20.70		2
	25	25	20.72	20.79	20.75	20.66	20.71		2
	50	0	20.72	20.74	20.66	20.53	20.70		2

Table 1-37
LTE Band 41 PC3 Reduced Conducted Powers - Grip Sensor Mode Active - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.41	22.60	22.59	22.64	22.66	0	0
	1	12	22.61	23.01	22.60	22.95	22.97		0
	1	24	22.40	22.62	22.43	22.66	22.60		0
	12	0	22.59	22.72	22.69	22.85	22.79	0-1	0
	12	6	22.63	22.82	22.74	22.90	22.88		0
	12	13	22.58	22.81	22.76	22.85	22.70		0
	25	0	22.52	22.80	22.67	22.80	22.75		0
16QAM	1	0	22.32	22.50	22.45	22.50	22.50	0-1	0
	1	12	22.49	22.79	22.68	22.83	22.76		0
	1	24	22.28	22.51	22.40	22.53	22.45		0
	12	0	21.31	21.56	21.46	21.51	21.50	0-2	1
	12	6	21.29	21.57	21.48	21.56	21.49		1
	12	13	21.25	21.52	21.34	21.47	21.46		1
	25	0	21.34	21.52	21.40	21.50	21.50		1
64QAM	1	0	21.26	21.33	21.39	21.40	21.35	0-2	1
	1	12	21.39	21.65	21.45	21.66	21.59		1
	1	24	21.27	21.39	21.29	21.40	21.34		1
	12	0	20.56	20.80	20.67	20.62	20.82	0-3	2
	12	6	20.58	20.84	20.68	20.68	20.85		2
	12	13	20.55	20.82	20.58	20.64	20.75		2
	25	0	20.56	20.81	20.65	20.60	20.78		2

FCC ID: ZNFK420TM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 12/28/20 - 1/30/21	DUT Type: Portable Handset	APPENDIX F: Page 20 of 20		

APPENDIX G POWER REDUCTION VERIFICATION

Per the May 2017 TCBC Workshop Notes, demonstration of proper functioning of the power reduction mechanisms is required to support the corresponding SAR configurations. The verification process was divided into two parts: (1) evaluation of output power levels for individual or multiple triggering mechanisms and (2) evaluation of the triggering distances for proximity-based sensors.

Power reduction verification was fully addressed in the original filing.

G.1 Power Verification Procedure

The power verification was performed according to the following procedure:

1. A base station simulator was used to establish a conducted RF connection and the output power was monitored. The power measurements were confirmed to be within expected tolerances for all states before and after a power reduction mechanism was triggered.
2. Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
3. Steps 1 and 2 were repeated for all individual power reduction mechanisms and combinations thereof. For the combination cases, one mechanism was switched to a 'triggered' state at a time; powers were confirmed to be within tolerances after each additional mechanism was activated.

G.2 WIFI Verification Summary

Table G-1
Power Measurement Verification WIFI

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
1st		Un-triggered (Max)	Mechanism #1 (Reduced)
Held-to-Ear	802.11a	17.09	14.15
Held-to-Ear	802.11n (5GHz, 20MHz BW)	16.60	14.05
Held-to-Ear	802.11ac (20MHz BW)	16.92	14.13
Held-to-Ear	802.11n (5GHz, 40MHz BW)	14.18	13.98
Held-to-Ear	802.11ac (40MHz BW)	14.60	14.13

FCC ID: ZNFK420TM	 PCTEST Proud to be part of the 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/28/2020 – 01/30/2021	DUT Type: Portable Handset			APPENDIX G: Page 1 of 1

APPENDIX H: PROBE AND DIPOLE CALIBRATION CERTIFICATES



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1057_Jan18**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1057**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **January 16, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	30-Dec-17 (No. EX3-3503_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** **Name** **Function**
Laboratory Technician

Approved by: **Katja Pokovic** **Name** **Function**
Technical Manager

Signature

[Signature]

[Signature]

Issued: January 18, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.2 $\pm$ 6 %	4.55 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.91 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.2 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.8 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.8 ± 6 %	4.90 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.5 ± 6 %	5.06 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.41 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.36 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.2 ± 6 %	5.48 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.64 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	6.15 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.72 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	6.22 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	50.0 Ω - 5.5 j Ω
Return Loss	- 25.2 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	54.7 Ω - 2.1 j Ω
Return Loss	- 26.2 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	52.7 Ω + 0.0 j Ω
Return Loss	- 31.5 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.3 Ω - 6.7 j Ω
Return Loss	- 23.4 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	48.4 Ω - 3.9 j Ω
Return Loss	- 27.4 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.3 Ω - 1.6 j Ω
Return Loss	- 25.6 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	52.6 Ω + 1.1 j Ω
Return Loss	- 31.2 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	51.8 Ω - 0.4 j Ω
Return Loss	- 34.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.203 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions (f=5200 MHz)

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.6 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.6 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.6 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.6 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg ± 19.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	5.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.7 W/kg ± 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	1.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	17.7 W/kg ± 19.9 % (k=2)

Measurement Conditions (f=5800 MHz)

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.62 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	86.3 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.1 W/kg $\pm$ 19.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.88 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	88.9 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.44 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg $\pm$ 19.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.4 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg $\pm$ 19.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	5.68 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	56.8 W/kg $\pm$ 20.3 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	1.89 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	18.9 W/kg $\pm$ 19.9 % (k=2)

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.9$ S/m; $\epsilon_r = 35.8$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)



DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2017, ConvF(5.05, 5.05, 5.05); Calibrated: 30.12.2017, ConvF(4.98, 4.98, 4.98); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601 - modified; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 72.54 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 27.5 W/kg
SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.28 W/kg
Maximum value of SAR (measured) = 17.7 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 72.77 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 32.2 W/kg
SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.4 W/kg
Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 70.93 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 31.4 W/kg
SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.3 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

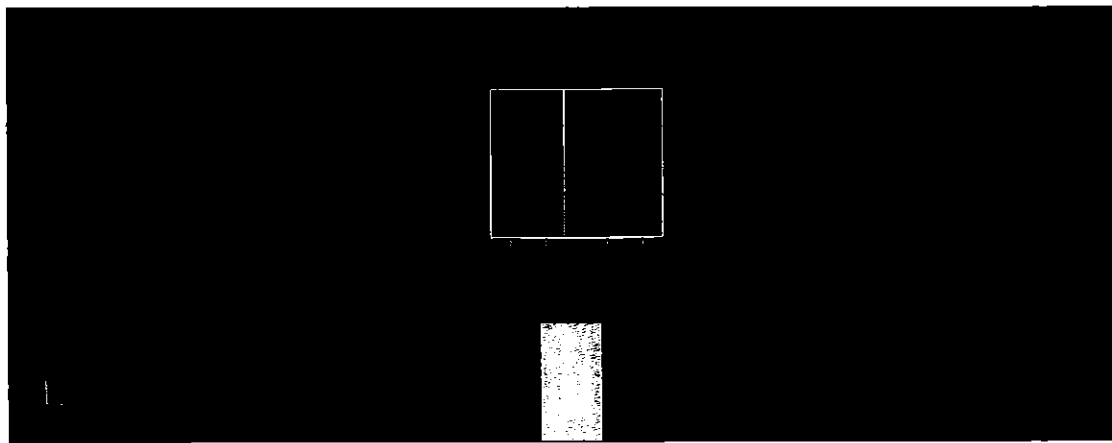

0 dB = 18.9 W/kg = 12.76 dBW/kg

Impedance Measurement Plot for Head TSL

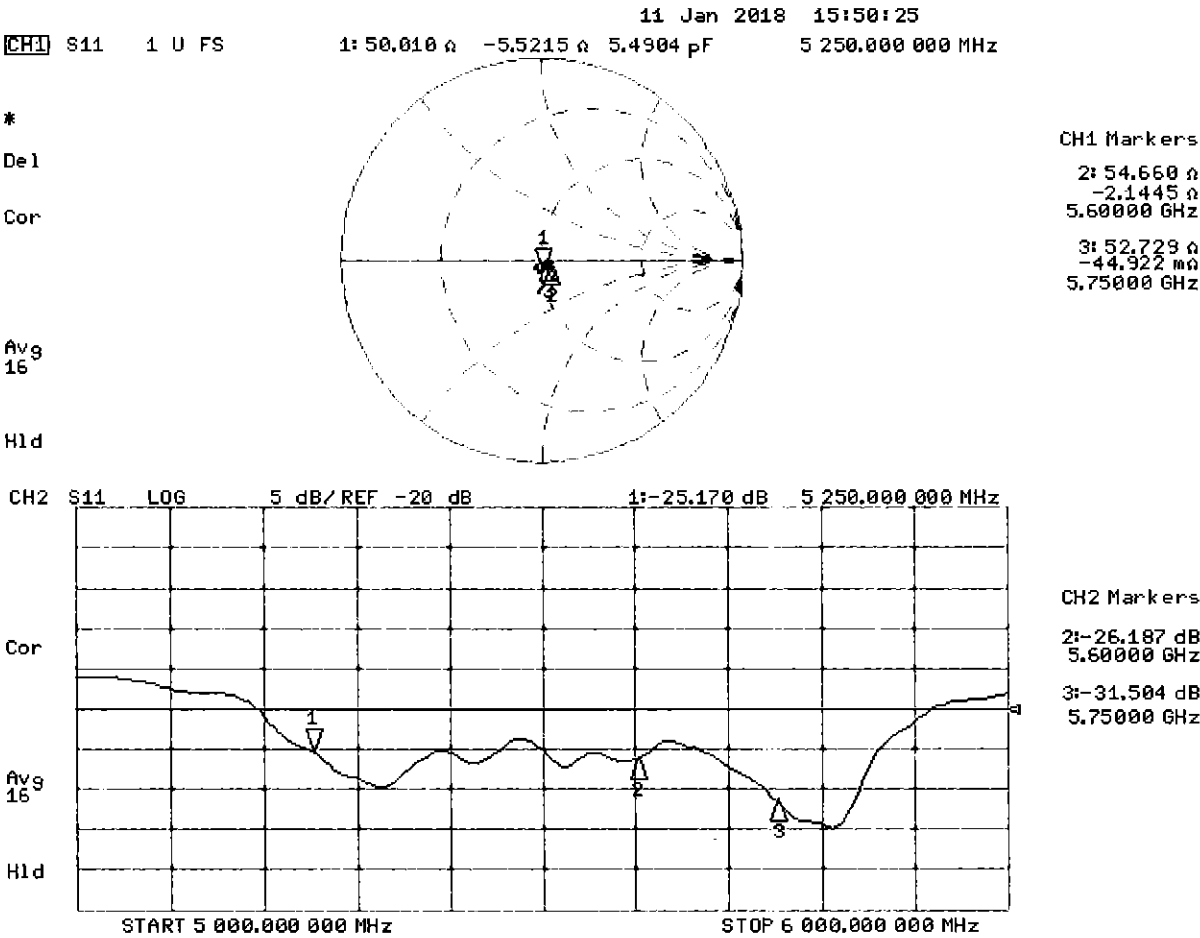

DASY5 Validation Report for Body TSL

Date: 10.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.48$ S/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.94$ S/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.22$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.35, 5.35, 5.35); Calibrated: 30.12.2017, ConvF(5.26, 5.26, 5.26); Calibrated: 30.12.2017, ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2017, ConvF(4.57, 4.57, 4.57); Calibrated: 30.12.2017, ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.05 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 7.36 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 17.1 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 29.4 W/kg


SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.09 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 34.0 W/kg
SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.25 W/kg
Maximum value of SAR (measured) = 19.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.45 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 32.9 W/kg
SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.14 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.14 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 33.3 W/kg
SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.13 W/kg

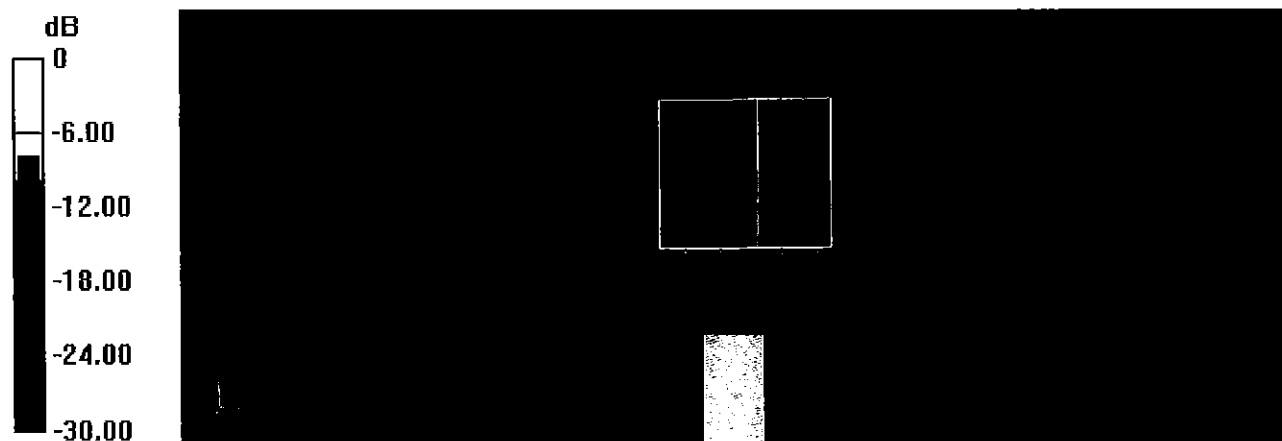


0 dB = 18.9 W/kg = 12.76 dBW/kg

Impedance Measurement Plot for Body TSL

10 Jan 2018 17:45:41
 CH1 S11 1 U FS 1: 49.266 Ω -6.6719 Ω 4.5874 pF 5 200.000 000 MHz

*
 Del
 Cor
 Avg
 16
 H1d

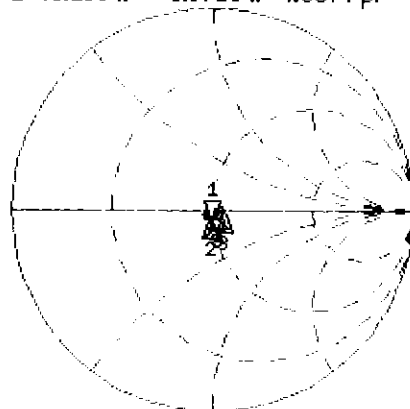


CH1 Markers

2: 48.449 Ω
 -3.9297 Ω
 5.25000 GHz
 3: 55.279 Ω
 -1.5723 Ω
 5.60000 GHz
 4: 52.627 Ω
 1.0625 Ω
 5.75000 GHz
 5: 51.801 Ω
 -375.00 m Ω
 5.80000 GHz

CH2 S11 LOG 5 dB/ REF -20 dB 1: -23.417 dB 5 200.000 000 MHz

Cor
 Avg
 16
 H1d

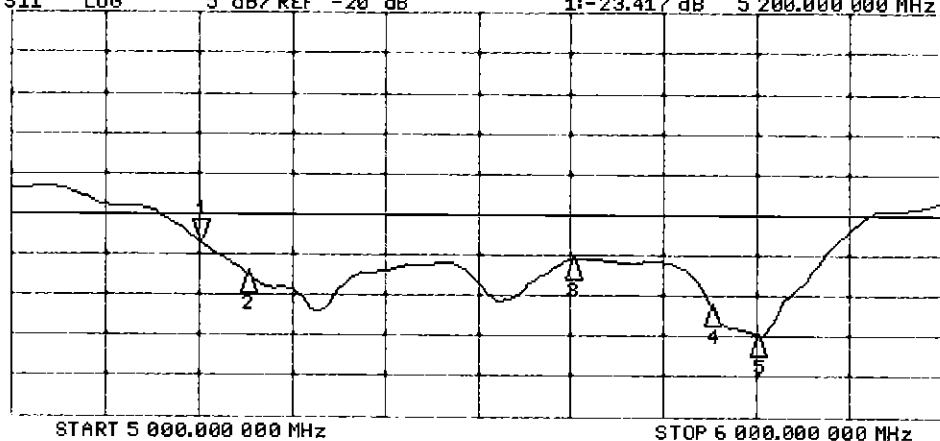

CH2 Markers

2: -27.356 dB
 5.25000 GHz
 3: -25.621 dB
 5.60000 GHz
 4: -31.162 dB
 5.75000 GHz
 5: -34.851 dB
 5.80000 GHz

DASY5 Validation Report for SAM Head

Date: 16.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.5$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.75, 5.75, 5.75); Calibrated: 30.12.2017, ConvF(4.96, 4.96, 4.96); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 72.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

SAM Head/Top - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 73.00 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 8.62 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 21.9 W/kg

SAM Head/Mouth - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 72.79 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 8.54 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

SAM Head/Mouth - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.69 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 8.88 W/kg; SAR(10 g) = 2.44 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

SAM Head/Neck - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.48 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

SAM Head/Neck - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.90 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 21.8 W/kg

SAM Head/Ear - 5200/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.68 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 5.16 W/kg; SAR(10 g) = 1.76 W/kg

Maximum value of SAR (measured) = 11.1 W/kg

SAM Head/Ear - 5800/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.96 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 21.2 W/kg

SAR(1 g) = 5.68 W/kg; SAR(10 g) = 1.89 W/kg

Maximum value of SAR (measured) = 13.8 W/kg



0 dB = 13.8 W/kg = 11.40 dBW/kg

Certification of Calibration

Object D5GHzV2 – SN: 1057

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extension Calibration date: 1/16/2019

Description: SAR Validation Dipole at 5250, 5600, and 5750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	2/8/2018	Annual	2/8/2019	US39170122
Agilent	N5182A	MXG Vector Signal Generator	4/18/2018	Annual	4/18/2019	MY47420800
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1207364
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1339018
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Seekonk	NC-100	Torque Wrench	7/11/2018	Annual	7/11/2019	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/3/2018	Annual	10/3/2019	1558
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/11/2018	Annual	9/11/2019	1091
SPEAG	EX3DV4	SAR Probe	8/23/2018	Annual	8/23/2019	7308
SPEAG	EX3DV4	SAR Probe	6/25/2018	Annual	6/25/2019	7409

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 17.0 dBm	Measured Head SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 17.0 dBm	Measured Head SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5250	1/16/2018	1/16/2019	1.203	3.95	3.63	-8.33%	1.14	1.04	-8.77%	50	47.6	2.4	-5.5	-6.7	1.2	-25.2	-22.8	9.50%	PASS
5600	1/16/2018	1/16/2019	1.203	4.205	3.84	-8.68%	1.2	1.09	-9.17%	54.7	52.5	2.2	-2.1	1.6	3.7	-26.2	-30.6	-16.80%	PASS
5750	1/16/2018	1/16/2019	1.203	4.025	3.76	-6.58%	1.15	1.07	-6.96%	52.7	54.4	1.7	0	0.1	0.1	-31.5	-27.5	12.70%	PASS
Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 17.0 dBm	Measured Body SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 17.0 dBm	Measured Body SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5250	1/16/2018	1/16/2019	1.203	3.795	3.73	-1.71%	1.06	1.03	-2.37%	48.4	45.9	2.5	-3.9	-4	0.1	-27.4	-24.5	10.50%	PASS
5600	1/16/2018	1/16/2019	1.203	3.995	4.06	1.63%	1.12	1.12	0.45%	55.3	51	4.3	-1.6	2.8	4.4	-25.6	-30.7	-20.00%	PASS
5750	1/16/2018	1/16/2019	1.203	3.835	3.65	-4.82%	1.06	1.02	-3.77%	52.6	52.9	0.3	1.1	0.6	0.5	-31.2	-30.7	1.60%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

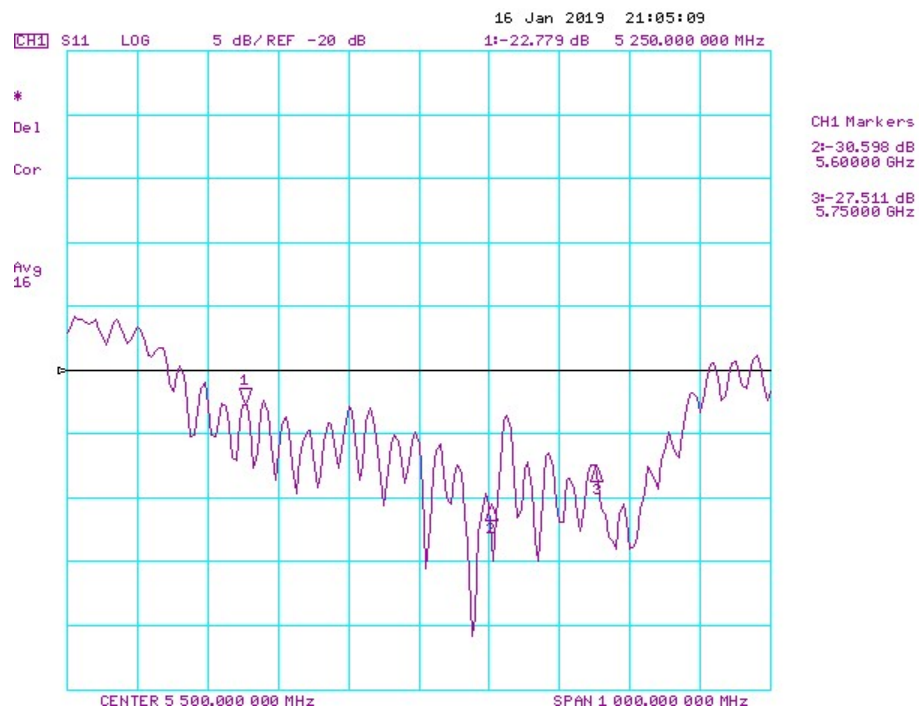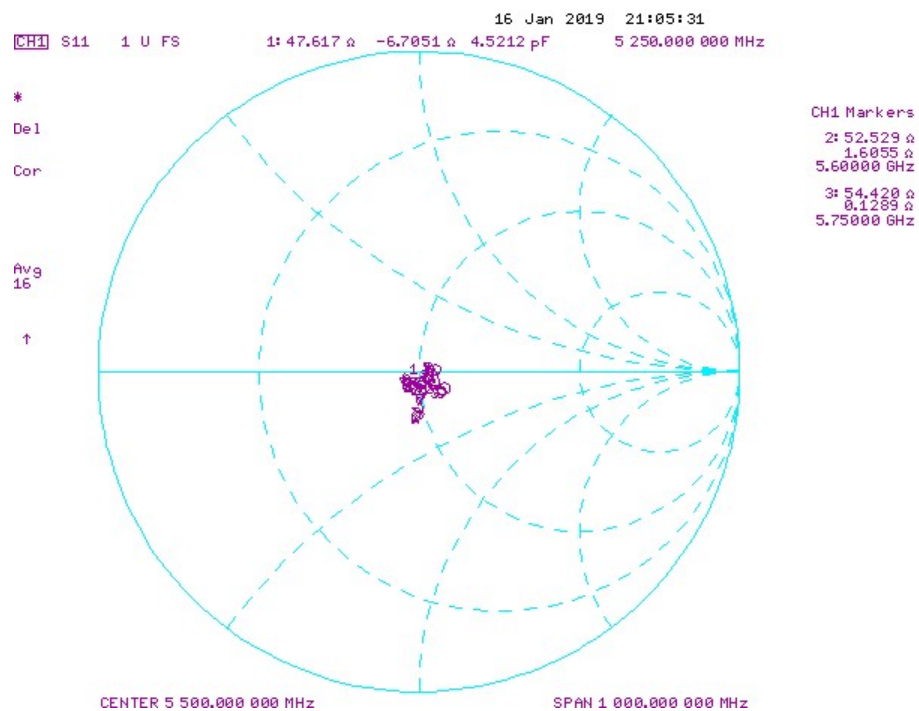

Impedance & Return-Loss Measurement Plot for Body TSL

