

TEST RESULT SUMMARY

UNITED STATES STANDARD 47 CFR PART 15, SUBPART C

MANUFACTURER NAME	DIRECTED ELECTRONICS, INC.
NAME OF EQUIPMENT	475 Transmitter*
MODEL NUMBER	475
MANUFACTURER ADDRESS	2560 Progress Street Vista, CA 92083
TEST REPORT NUMBER	S8320-06
TEST DATE	25 June 1998


According to testing performed at TÜV Product Service, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in United States Standard 47 CFR Part 15, Subpart C, Paragraphs 15.207(a) and 15.209(a), 15.231(a)(1), (b), (c).


TÜV Product Service reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV Product Service, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service, Inc. issued reports.

As the responsible EMC Project/Division Managers, we hereby declare that the equipment tested at TÜV Product Service, Inc. as specified above conforms to the requirements of United States Standard 47 CFR Part 15, Radio Frequency Devices, Subpart C, Intentional Radiators.

Date: 29 June 1998

Location: San Diego, California
USA

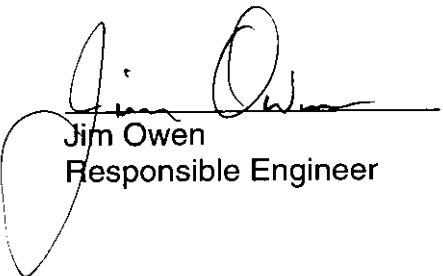
Jim Owen
Responsible Engineer


Floyd R. Fleury
EMC Manager, EIC

(*) FCC ID: EZSDEI475

Not Transferable

EMC EMISSION - TEST REPORT

UNITED STATES STANDARD 47 CFR PART 15, SUBPART C

Test Report File No. : **S8320-06** Date of Issue: 29 June 1998

Model / Serial No. : 475 / 475 #1

Product Type : 475 Transmitter*

Applicant : DIRECTED ELECTRONICS, INC.

Manufacturer : ----

License holder : DIRECTED ELECTRONICS, INC.

Address : 2560 Progress Street
: Vista, CA 92083

Test Result : ☒ **Positive** ☐ **Negative**

Test Project Number
Reference(s) : **S901832001-06**

Total pages - Test Report : 12

(*) FCC ID: EZSDEI475

TÜV Product Service, Inc. is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV Product Service, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service, Inc. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service, Inc. and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

DIRECTORY - EMISSIONS
Test Report

	Pages
Test Report	<u>1 - 12</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
General Remarks and Summary	<u>12</u>
Equipment	<u></u>
Conducted Emissions 10/150/450 kHz - 30 MHz	<u>6</u>
Radiated Emissions 10 kHz - 30 MHz	<u>7</u>
Radiated Emissions 30 MHz - 1000 MHz	<u>8</u>
Interference Power 30 MHz - 300 MHz	<u>9</u>
Equivalent Radiated Emissions 1 GHz - 18 GHz	<u>10</u>

Technical Documentation

Test Data Sheets and Test Setup Drawing(s)	<u>TD1</u>
--	------------

Appendices

Appendix A	<u>A1</u>
Test Setups (Photographs)	
Appendix B	<u>B1</u>
Product Information Form(s)	
Appendix C	<u>C1</u>
Change History	
Appendix D	<u>D1</u>
Supplemental Information	

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to the following regulations:

- | | | |
|--|---|--|
| ☐ - EN 50081-1 / 1991 | | |
| ☐ - EN 55011 / 1991 | ☐ - Group 1 | ☐ - Group 2 |
| | ☐ - Class A | ☐ - Class B |
| ☐ - EN 55013 / 1990 | | |
| ☐ - EN 55014 / 1987 | ☐ - Household appliances and similar | |
| | ☐ - Portable tools | |
| | ☐ - Semiconductor devices | |
| ☐ - EN 55014 / 1993 | ☐ - Household appliances and similar | |
| | ☐ - Portable tools | |
| | ☐ - Semiconductor devices | |
| ☐ - EN 55015 / 1987 | | |
| ☐ - EN 55015 / A1:1990 | | |
| ☐ - EN 55015 / 1993 | | |
| ☐ - EN 55022 / 1987 | ☐ - Class A | ☐ - Class B |
| ☐ - EN 55022 / 1994 | ☐ - Class A | ☐ - Class B |
| ☐ - BS | | |
| ☐ - VCCI | ☐ - Class A ITE | ☐ - Class B ITE |
| ☐ - 47 CFR Part 15, Subpart B | | |
| ☐ - 107(b) | | |
| ☐ - 107(a) | | |
| ☐ - 107(e) | ☐ - Class A | ☐ - Class B |
| ☐ - 109(b) | | |
| ☐ - 109(a) | | |
| ☐ - 109(g) | ☐ - Class A | ☐ - Class B |
| ■ - 47 CFR Part 15, Subpart C | | |
| ■ - 207(a) | | |
| ■ - 209(a) | | |
| ■ - 231(a)(1) | | |
| ■ - 231(b) | | |
| ■ - 231(c) | | |
| ☐ - AS/NZS 3548: 1995 | ☐ - Class A | ☐ - Class B |
| ☐ - CISPR 11 (1990) | ☐ - Group 1 | ☐ - Group 2 |
| | ☐ - Class A | ☐ - Class B |
| ☐ - CISPR 22 (1993) | ☐ - Class A | ☐ - Class B |

Environmental Conditions In The Laboratory:

	<u>Actual</u>
Temperature:	: 23 °C
Relative Humidity:	: 50 %
Atmospheric Pressure:	: 100.0 kPa

Power Supply Utilized:

Power supply system : Battery

Symbol Definitions:

- - Applicable
- - Not Applicable

Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements were performed at the following test location:

■ - Test not performed - see remarks

- ☐ - SR-2, Shielded Room, 12' x 24' x 10', Metal Chamber
- ☐ - SR-3, Shielded Room, 12' x 20' x 8', Metal Chamber
- ☐ - SR-4, Shielded Room, 10' x 17' x 8', Copper Screen Chamber
- ☐ - SR-5, Shielded Room, 16' x 28' x 15', Metal, Semi-Anechoic Chamber
- ☐ - CSR-1, Shielded Room, 10' x 7' x 7', Metal Chamber

Test Equipment Used :

Model No.	Prop. No.	Description	Manufacturer	Serial No.
☐ - NM-7A, NM-17/27, NM-37/57, NM-67, CCA-7, & H/P 9836 HP-1B Computer	156, 162-166	Automated RFI Measurement System (ARMS), NO. 1	Eaton/Ailtech	(multiple)
☐ - NM-17/27, NM-37/57, CA-7, and H/P 9826 Computer	168, 170, 177, 178	Automated RFI Measurement System (ARMS), NO. 2	Eaton/Ailtech	(multiple)
☐ - H/P Spectrum Analyzer, Model 8568B; Display Section RF Analyzer Section; H/P 85650A, Quasi-Peak Adapter H/P Computer System, Model 310 with HP 85869A Software	187, 188	Automated RFI Measurement System (ARMS)	Various	(multiple)
☐ - LISN-3, 50 A	262-263	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	3-4
☐ - LISN-3, 50 A	264, 265	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	5-6
☐ - LISN-2, 25 A	413	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	7
☐ - LISN-2, 25 A	--	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	7
☐ - FCC-LISN-50-25-2	553	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	112
☐ - FCC-LISN-50-25-2	552	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	113
☐ - 8012-50-R-12-BNC	266	LISN, 50 μ H/50 Ω /0.1 μ F	Solar Electronics Co.	--
☐ - 9252-50-R-24-BNC	458	LISN, 50 μ H/250 μ H/50 Ω /0.25 μ F	Solar Electronics Co.	941719
☐ - 9252-50-R-24-BNC	457	LISN, 50 μ H/250 μ H/50 Ω /0.25 μ F	Solar Electronics Co.	941720
☐ - MDS-21	277	Absorbing Clamp	Rohde & Schwarz	821023
☐ - ESHS 20	428	EMI Test Receiver	Rohde & Schwarz	837055/001
☐ - ESHS 30	459	EMI Test Receiver	Rohde & Schwarz	832354/004
☐ - CAT-20	598	20 dB Attenuator	Mini-Circuits	--
☐ - CAT-20	615	20 dB Attenuator	Mini-Circuits	--

Remarks: EUT battery operated.

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)
The RADIATED EMISSIONS (MAGNETIC FIELD) measurements were performed at the following test location:
■ - Test not applicable

- ☐ - SR-2, Shielded Room, 12' x 24' x 10', Metal Chamber
- ☐ - SR-3, Shielded Room, 12' x 20' x 8', Metal Chamber
- ☐ - SR-4, Shielded Room, 10' x 17' x 8', Copper Screen Chamber
- ☐ - SR-5, Shielded Room, 16' x 28' x 15', Metal, Semi-Anechoic Chamber
- ☐ - TR-1, Shielded Room, 16.5' x 10' x 7.5', Copper Screen Chamber
- ☐ - CSR-1, Shielded Room, 10' x 7' x 7', Metal Chamber

Testing was performed at a test distance of :

- ☐ - 3 meters
- ☐ - 30 meters

Test Equipment Used :

Model No.	Prop. No.	Description	Manufacturer	Serial No.
☐ - NM-7A, NM-17/27, NM-37/57, NM-87, CCA-7, and H/P 9836 HP-1B Computer	156 162-166	Automated RFI Measurement System (ARMS), NO. 1	Eaton/Ailtech	(multiple)
☐ - NM-17/27, NM-37/57, CA-7, & H/P 9836 Computer	168, 170, 177, 178	Automated RFI Measurement System (ARMS), NO. 2	Eaton/Ailtech	(multiple)
☐ - AT-205/URM-6	201	Loop Antenna	Eaton/Ailtech	64090
☐ - 94593-1	205	Loop Antenna	Eaton/Ailtech	0264

Remarks: _____

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

■ - Test not performed - see remarks

- ☐ - Roof (Small Open Area Test Site)
- ☐ - Canyon #1 (10- and 30-Meter Open Area Test Site), Carroll Canyon, San Diego
- ☐ - Canyon #2 (3- and 10-Meter Open Area Test Site), Carroll Canyon, San Diego

Testing was performed at a test distance of :

- ☐ - 3 meters
- ☐ - 10 meters
- ☐ - 30 meters

Test Equipment Used :

	Model No.	Prop. No.	Description	Manufacturer	Serial No.
☐	NM-37/57A	420	OATS measurement set (Roof)	Eaton/Ailtech	0561-09261
	CCA-7	373			0773-03117
☐	NM-37/57	171	OATS measurement set (Canyon)	Eaton/Ailtech	0709-82078
	CCA-7	172			0187-0322
☐	HFH 2-Z2	208	Antenna, Loop	Rohde & Schwarz	880
☐	3104	235	Antenna, Biconical	EMCO	3031
☐	3110	451	Antenna, Biconical	EMCO	1378
☐	94455-1	231	Antenna, Biconical	Eaton/Ailtech	0811
☐	3110B	491	Antenna, Biconical	EMCO	9508-2
☐	CBL6111	460	Antenna, Bilog	Chase	1013
☐	CBL6111	461	Antenna, Bilog	Chase	1291
☐	3146	242	Antenna, Log Periodic Dipole	EMCO	1597
☐	3146	243	Antenna, Log Periodic Dipole	EMCO	106X
☐	3146	244	Antenna, Log Periodic Dipole	EMCO	1063
☐	7405	570	Loop Probes	EMCO	9104-1959
☐	8566B	404	Spectrum Analyzer	Hewlett Packard	2311A02209
☐	85662B	406	Spectrum Analyzer Display	Hewlett Packard	2309A04682
☐	ESVS 30	427	EMI Test Receiver	Rohde & Schwarz	830350/006
☐	ESVS 30	466	EMI Test Receiver	Rohde & Schwarz	833825/003

Remarks: Prescan in shielded room detected no measurable emissions from 30 MHz - 1 GHz.

Emissions Test Conditions: INTERFERENCE POWER

The **INTERFERENCE POWER** measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

■ - Test not applicable

- ☐ - SR-2, Shielded Room, 12' x 24' x 10', Metal Chamber
- ☐ - SR-3, Shielded Room, 12' x 20' x 8', Metal Chamber
- ☐ - SR-4, Shielded Room, 10' x 17' x 8', Copper Screen Chamber
- ☐ - SR-5, Shielded Room, 16' x 28' x 15', Metal, Semi-Anechoic Chamber
- ☐ - CSR-1, Shielded Room, 10' x 7' x 7', Metal Chamber

Test Equipment Used :

Model No.	Prop. No.	Description	Manufacturer	Serial No.
☐ - MDS-21	277	Absorbing Clamp	Rohde & Schwarz	821023
☐ - NM-7A, NM-17/27, NM-37/57, NM-67, CCA-7, & H/P 9836 HP-1B Computer	156, 162-166	Automated RFI Measurement System (ARMS), NO. 1	Eaton/Aitech	(multiple)
☐ - NM-17/27, NM-37/57, CA-7, & H/P 9825 Computer	168, 170, 177, 178	Automated RFI Measurement System (ARMS), NO. 2	Eaton/Aitech	(multiple)
☐ - H/P Spectrum Analyzer, Model 8566B, Display Section RF Analyzer Section, H/P 85650A, Quasi-Peak Adapter H/P Computer System, Model 310 with HP 85869A Software	187, 188	Automated RFI Measurement System (ARMS)	Hewlett Packard	2304A04531 2304A02500 2811A01325
☐ - ESVS 30	427	EMI Test Receiver	Rohde & Schwarz	830350/006
☐ - ESVS 30	466	EMI Test Receiver	Rohde & Schwarz	830350/003

Remarks: _____

Emissions Test Conditions: RADIATED EMISSIONS (FCC Part 15, 15.231)

The *EQUIVALENT RADIATED EMISSIONS* measurements were performed at the following test location :

☐ - Test not applicable

- - Roof (Small Open Area Test Site)
- ☐ - Canyon #1 (10- and 30-Meter Open Area Test Site), Carroll Canyon, San Diego
- ☐ - Canyon #2 (3- and 10-Meter Open Area Test Site), Carroll Canyon, San Diego

Testing was performed at a test distance of:

- ☐ - 1 meters
- - 3 meters
- ☐ - 10 meters

Test Equipment Used :

Model No.	Prop. No.	Description	Manufacturer	Serial No.
■ - 8566	407	Spectrum Analyzer	Hewlett Packard	2311A02209
■ - 85662B	406	Spectrum Analyzer Display	Hewlett Packard	2309A04682
☐ - 3115	453	Antenna, Double Ridge Guide	EMCO	9412-4363
■ - 3115	251	Antenna, Double Ridge Guide	EMCO	2495
■ - 3146	243	Antenna, Log Periodic Dipole	EMCO	106Z
☐ - 3110	451	Broadband Antenna	EMCO	1378
■ - AFD3-0208-40-ST	367	Pre-amplifier, 2 - 8 GHz	Miteq, Inc.	155382
■ - ZJL-3G	469	Pre-amplifier, 1 - 2 GHz	MiniCircuits	--
☐ - 91889-2	253	Horn Antenna (2 to 3.6 GHz)	Eaton	101
☐ - 91892-1	254	Reflector Antenna (3.6 to 18 GHz)	Eaton	--
☐ - 94613-1	255	Horn Antenna (3.6 to 7.6 GHz)	Eaton	--
☐ - 91891-2	256	Horn Antenna (7.3 to 12 GHz)	Eaton	--
☐ - 94614-1	257	Horn Antenna (12 to 18 GHz)	Eaton	--

Remarks: _____

Equipment Under Test (EUT) Test Operation Mode - Emissions Tests :

The equipment under test was operated under the following conditions during emissions testing:

- ☐ - Standby
- ☐ - Test Program (H - Pattern)
- ☐ - Test Program (Color Bar)
- ☐ - Test Program (Customer Specified)
- ☐ - Practice Operation
- ☐ - Normal Operating Mode
- ☒ - Transmit

Configuration of the equipment under test:

- ☐ - See Constructional Data Form in Appendix B - Page B2
- ☒ - See Product Information Form(s) in Appendix B - Page B2

The following peripheral devices and interface cables were connected during the testing:

- | | |
|---|----------------|
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - unshielded power cable | |
| ☐ - unshielded cables | |
| ☐ - shielded cables | MPS.No.: _____ |
| ☐ - customer specific cables | |
| ☐ - _____ | |
| ☐ - _____ | |

Emissions Test Results:

Conducted Emissions, 10/150/450 kHz - 30 MHz

☐ - PASS

☐ - FAIL

☒ - NOT APPLICABLE

Minimum limit margin

_____ dB

at

_____ MHz

Maximum limit exceeding

_____ dB

at

_____ MHz

Remarks: EUT battery operated.

Radiated Emissions (Magnetic Field), 10 kHz - 30 MHz

☐ - PASS

☐ - FAIL

☒ - NOT APPLICABLE

Minimum limit margin

_____ dB

at

_____ MHz

Maximum limit exceeding

_____ dB

at

_____ MHz

Remarks: _____

Radiated Emissions (Electric Field), 30 MHz - 1000 MHz

☒ - PASS

☐ - FAIL

☐ - NOT APPLICABLE

Minimum limit margin

_____ dB

at

_____ MHz

Maximum limit exceeding

_____ dB

at

_____ MHz

Remarks: Prescan in shielded room detected no measurable emissions from 30 MHz - 1 GHz.

Equivalent Radiated Emissions

☒ - PASS

☐ - FAIL

☐ - NOT APPLICABLE

Minimum limit margin

_____ 0.2 dB

at

_____ 867.84 MHz

Maximum limit exceeding

_____ dB

at

_____ MHz

Remarks: _____

GENERAL REMARKS:

- (*) Conducted Emissions - EUT battery operated.
Radiated Emissions - Prescan in shielded room detected no measurable emissions from 30 MHz - 1 GHz.
Part 15, Paragraph 15.231(a)(1) - Transmitter deactivated in less than one second.

SUMMARY:

All tests according to the regulations cited on page 3 were

☐ - Performed

☒ - **Not Performed***

The Equipment Under Test

☒ - **Fulfills** the general approval requirements cited on page 3.

☐ - **Does not** fulfill the general approval requirements cited on page 3.

Statement of Measurement Uncertainty

The data and results referenced in this document are true and accurate. There may be some degree or level of measurement uncertainty. As EN 45001 does not allow recommendations to be included in the test report, the reader is encouraged to request a copy of the TÜV policy concerning pass or fail judgment with respect to possible measurement uncertainties.

Equipment Received Date: 25 June 1998

Testing Start Date: 25 June 1998

Testing End Date: 25 June 1998

- TÜV PRODUCT SERVICE, INC. -

Responsible Engineer:

Responsible Test Engineer:



Jim Owen
(EMC Engineer)




Mary Washington
(EMC Test Engineer)

Technical Documentation

Test Data Sheets
and
Test Setup Drawing(s)

CUSTOMER: DIRECTED ELECTRONICS, INC.
EUT: 475 Transmitter, Model 475, S/N 475#1
NOTE: Radiated Prescan


DATE: 25 June 1998
SPECIFICATION: FCC Part 15, Paragraph 15.209(a)

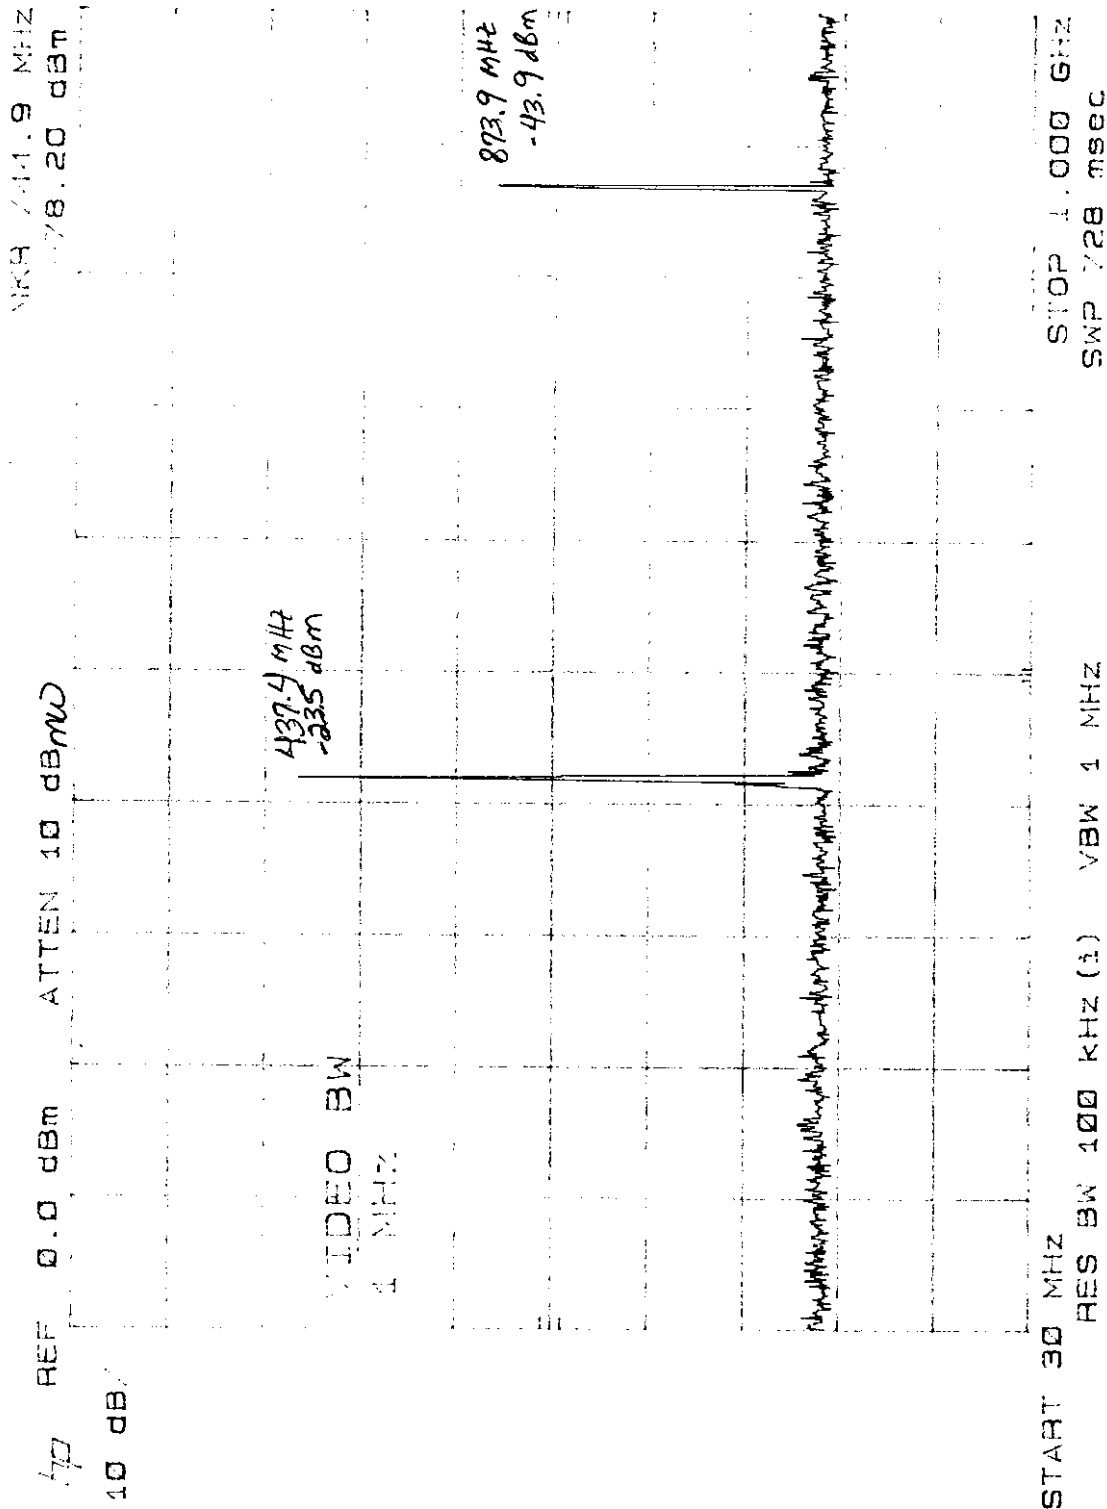

RBW and VBW = 1 MHz above 1 GHz.

TÜV PRODUCT SERVICE 10040 Mesa Rim Road San Diego, CA 92121-2912 Phone 619 546 3999 FAX 619 546 0364

2025 4 21 15 41:21
0.00 03

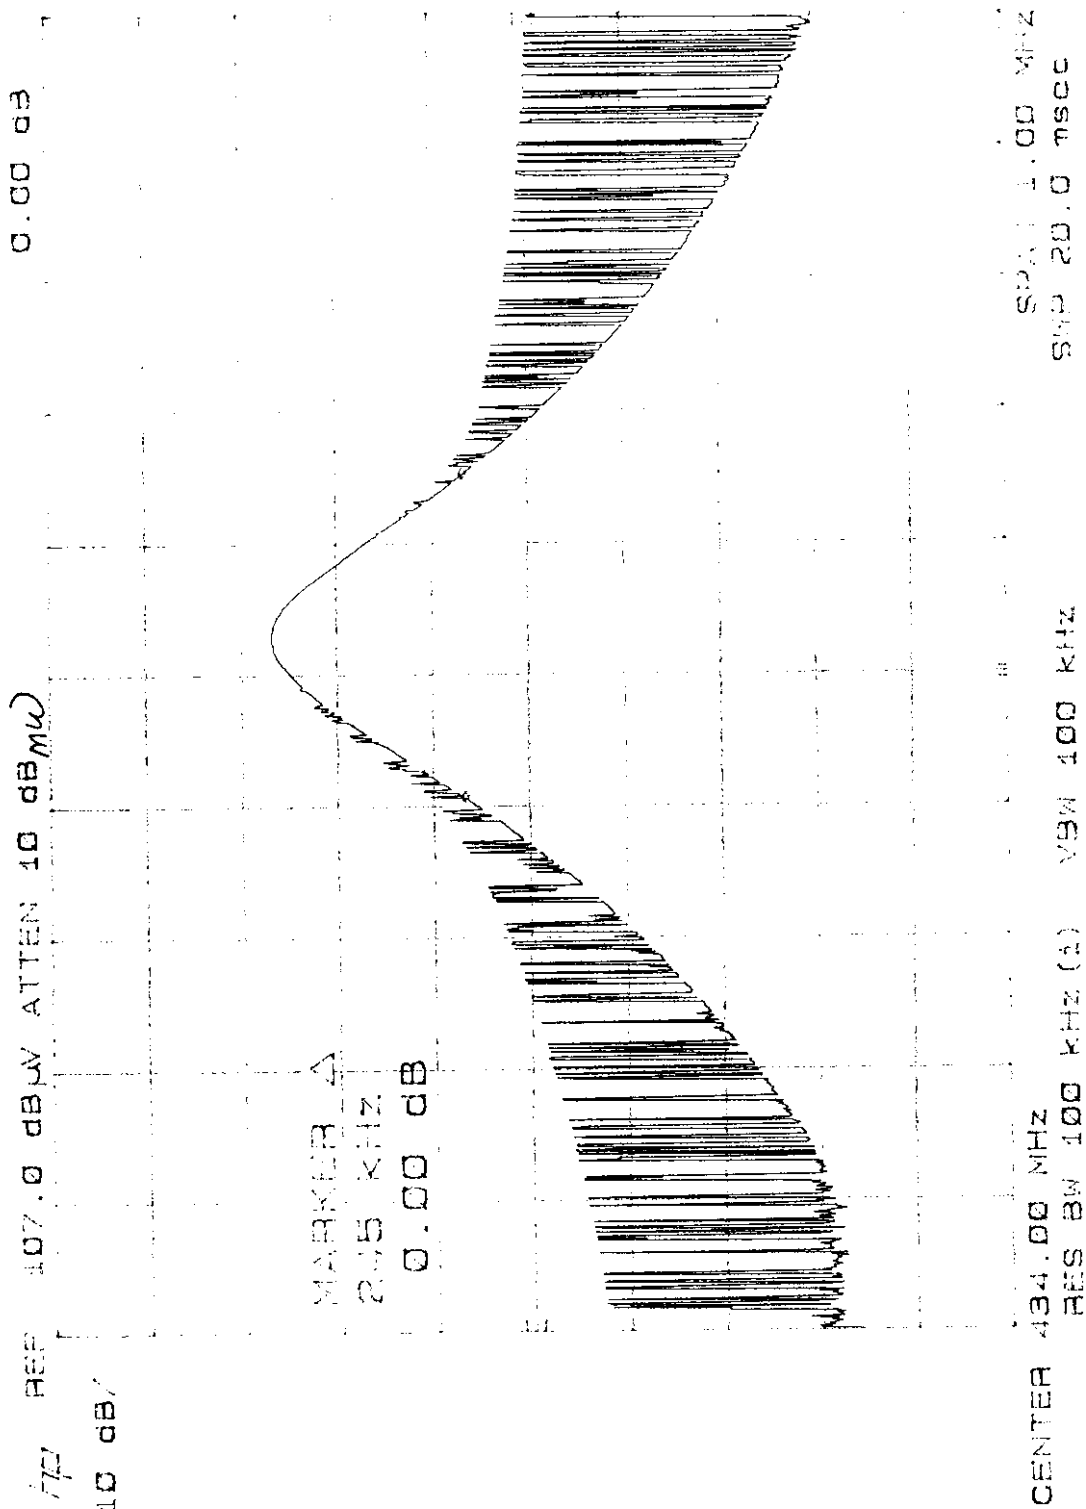

Appendix A

Test Setups
(Photographs)

Appendix B

Product Information Form(s)

CUSTOMER INFORMATION				
COMPANY NAME:		DIRECTED ELECTRONICS, INC.		
COMPANY ADDRESS:		2560 Progress Street		
		Vista, CA 92083		
PHONE NUMBER:		760 599 1366		
FAX NUMBER/E-MAIL ADDRESS:		760 599 1380; marting@directed.com		
CUSTOMER CONTACT:		Martin Gonzales		
PRODUCT DESCRIPTION				
NAME, MODEL, SERIAL # OF EUT:		475 Transmitter, Model 475 (FCC ID: EZSDEI475)		
DESCRIPTION OF EUT:		Automotive security system transmitter		
Components of EUT				
Description	Model Number	Serial Number	FCC ID Number	
N/A				
OPERATING MODE(S):		Transmitting		
I/O CABLES		N/A		
POWER CORDS		N/A		
POWER INTERFACE				
FREQUENCY/AC/DC VOLTAGE:		12 Vdc		
PHASES/CURRENT:		-- / --		
OSCILLATOR FREQUENCIES				
FREQUENCY	EUT LOCATION	DESCRIPTION OF USE		
433.92	--	--		
POWER SUPPLY				
DESCRIPTION	MANUFACTURER	MODEL #	SERIAL #	SWITCHING/LINEAR FREQ.
12 Vdc battery				
POWER LINE FILTERS				
MANUFACTURER	MODEL NO.	QTY.	LOCATION ON EUT	
N/A				
CRITICAL EMI COMPONENTS				
DESCRIPTION	MANUFACTURER	PART # OR VALUE	QTY.	LOCATION ON EUT
N/A				
DESCRIPTION OF ENCLOSURE:		ABS plastic		
INTERFACING AND/OR SIMULATORS PERIPHERAL EQUIPMENT:				
DESCRIPTION	MANUFACTURER	MODEL #	SERIAL #	FCC ID
N/A				
BLOCK DIAGRAM:		See page B3.		

Appendix C

Change History

Not Applicable

Appendix D

Supplemental Information

Duty Cycle Correction for Intentional Radiators

Maximum time the EUT is on in 100ms.


Duty cycle correction, dB = 20 log (DC)


$$DC = (\text{Max. time data is on in 100ms} \div 100\text{ms})(\text{Max. duty cycle})$$


Example from our unit and measured data


$$\begin{aligned} DC &= [(78\text{ms} + 10\text{ms}) \div 100\text{ms}] (.780\text{ms} \div 1.24\text{ms}) \\ &= (88\text{ms} \div 100\text{ms}) (.780\text{ms} \div 1.24\text{ms}) \\ &= (.88) (.629) \\ &= .55352 \\ dB &= 20 \log (DC) \\ &= 20 \log (.55352) \\ &= -5.14 \end{aligned}$$


"Max. time data is on in 100ms" refers to how many word or words are transmitted in 100ms and the length of those words added together. "Max. duty cycle" refers to the maximum bit length divided by the period of a pulse for the words recorded. Use measured data as example.

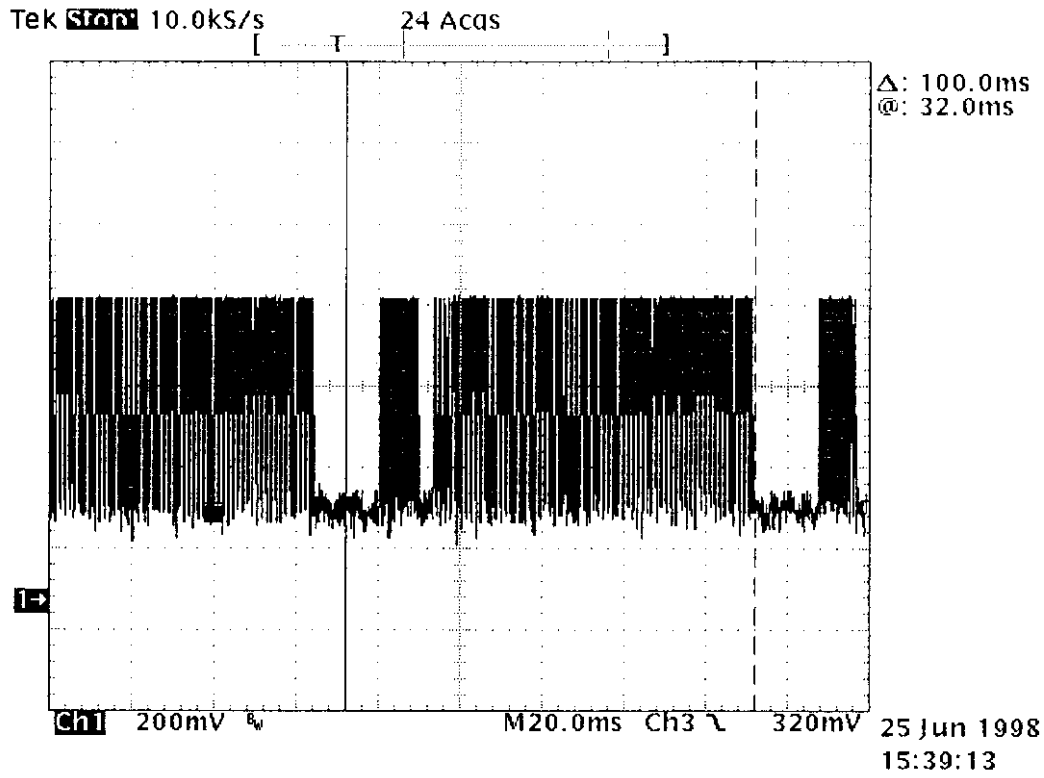

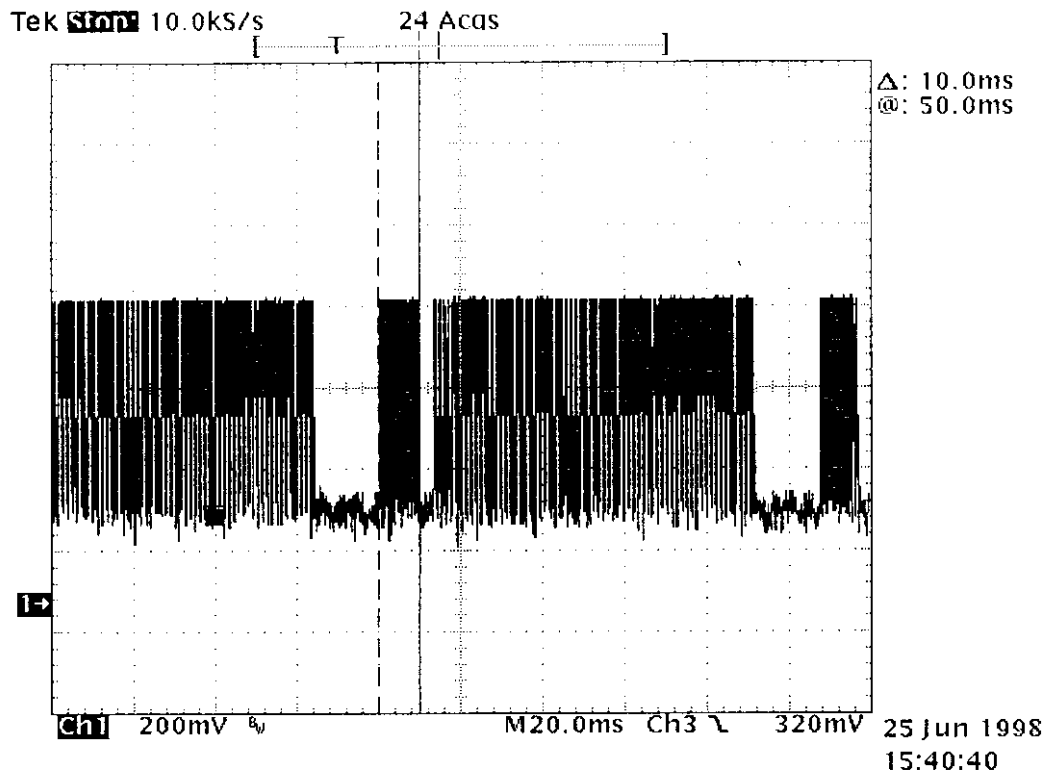

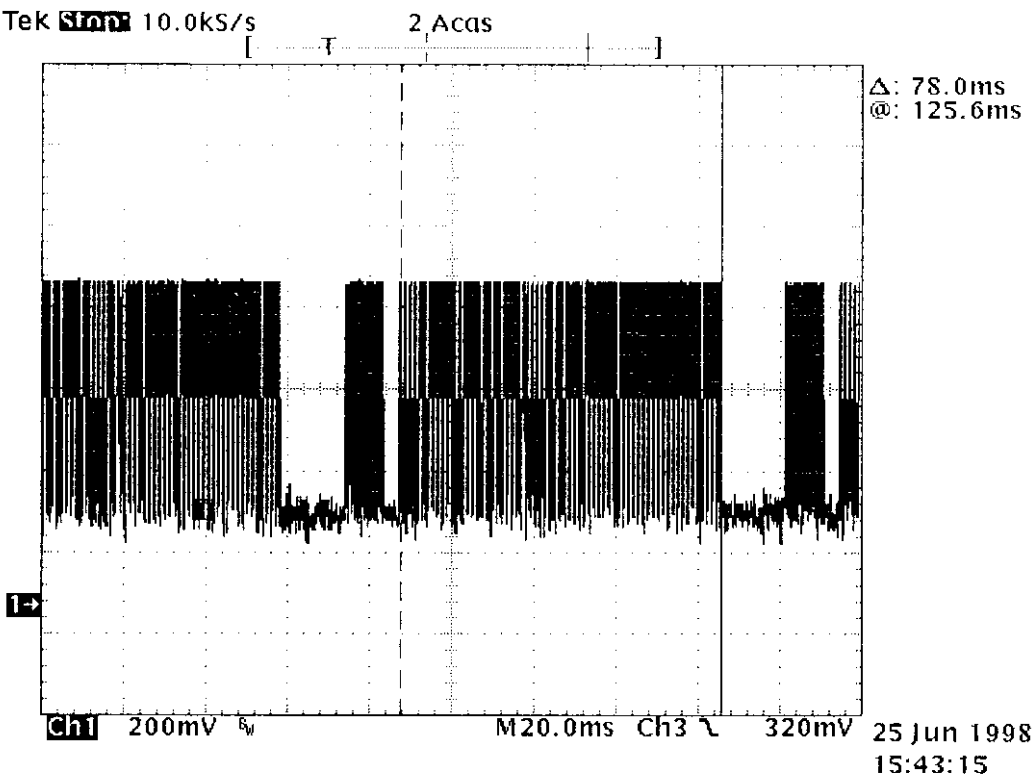

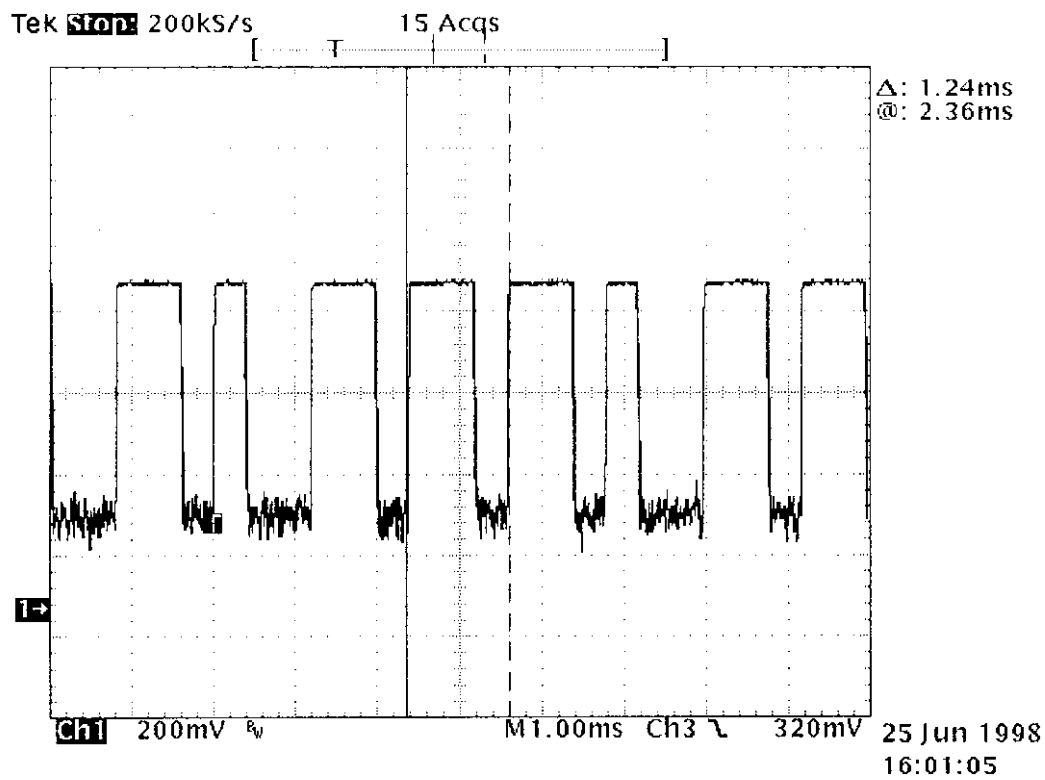

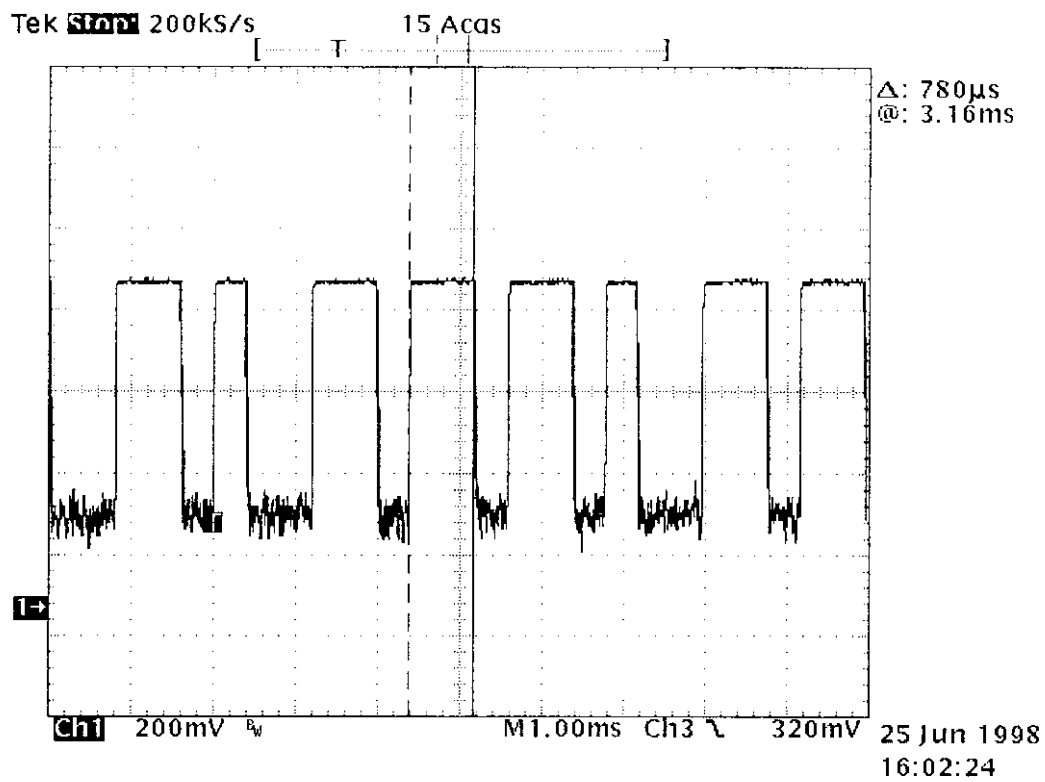

Appendix E

Calibration Dates

Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

Model No.	Prop. #	Description	Manufacturer	Serial #	Cal Date
H/P Spectrum Analyzer, Model 8568B; Display Section RF Analyzer Section; H/P 85650A, Quasi-Peak Adapter H/P Computer System, Model 310 with HP 85869A Software	187, 188	Automated RFI Measurement System (ARMS)	Various	(multiple)	10/1/98
LISN-3, 50 A	262-263	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	3-4	02/22/99
LISN-3, 50 A	264, 265	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	5-6	02/22/99
FCC-LISN-50-25-2	553	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	112	03/15/99
FCC-LISN-50-25-2	552	Power Mains Network (LISN), 50 μ H/250 μ H/50 Ω /0.25 μ F	Fischer Custom Communications, Inc.	113	03/26/99
9252-50-R-24-BNC	458	LISN, 50 μ H /250 μ H/50 Ω / 0.25 μ F	Solar Electronics Co.	941719	08/14/98
9252-50-R-24-BNC	457	LISN, 50 μ H /250 μ H/50 Ω / 0.25 μ F	Solar Electronics Co.	941720	01/04/99
ESHS 20	428	EMI Test Receiver	Rohde & Schwarz	837055/001	02/22/99
ESHS 30	459	EMI Test Receiver	Rohde & Schwarz	832354/004	02/22/99
CAT-20	599	20 dB Attenuator	Mini-Circuits	--	09/12/98
CAT-20	603	20 dB Attenuator	Mini-Circuits	--	09/12/98
CAT-20	608	20 dB Attenuator	Mini-Circuits	--	08/15/98
CAT-20	615	20 dB Attenuator	Mini-Circuits	--	09/12/98
CAT-20	602	20 dB Attenuator	Mini-Circuits	--	09/12/98
CAT-20	611	20 dB Attenuator	Mini-Circuits	--	09/12/98
CAT-20	600	20 dB Attenuator	Mini-Circuits	--	08/15/98

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field) (30 - 1000 MHz)

Model No.	Prop. #	Description	Manufacturer	Serial #	Cal Date
NM-37/57A	420	OATS measurement set	Eaton/Ailtech	0561-09261	12/17/98
CCA-7	373	(Roof)		0773-03117	12/18/98
NM-37/57	171	OATS measurement set	Eaton/Ailtech	0709-82078	12/16/98
CCA-7	172	(Canyon)		0187-0322	12/17/98
3104	235	Antenna, Biconical	EMCO	3031	08/12/98
3110	451	Antenna, Biconical	EMCO	1378	09/26/98
3110B	491	Antenna, Biconical	EMCO	9508-2	04/08/99
3146	242	Antenna, Log Periodic Dipole	EMCO	1597	09/03/98
3146	243	Antenna, Log Periodic Dipole	EMCO	106X	09/26/98
3146	244	Antenna, Log Periodic Dipole	EMCO	1063	08/20/98
ESVS 30	427	EMI Test Receiver	Rohde & Schwarz	830350/006	02/12/99
ESVS 30	466	EMI Test Receiver	Rohde & Schwarz	833825/003	03/21/99

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field) (1 - 18 GHz)

Model No.	Prop. #	Description	Manufacturer	Serial #	Cal Date
8566B	407	Spectrum Analyzer	Hewlett Packard	2311A02209	10/01/98
85662B	406	Spectrum Analyzer Display	Hewlett Packard	2309A04682	10/01/98
8566B	720	Spectrum Analyzer	Hewlett Packard	211500842	02/18/99
8566B	721	Spectrum Analyzer Display	Hewlett Packard	2112A02185	02/18/99
3115	453	Antenna, Double Ridge Guide	EMCO	9412-4363	09/01/98
3115	251	Antenna, Double Ridge Guide	EMCO	2495	08/98
ZJL-3G	649	Pre-Amplifier, 1 to 2 GHz	Minicircuits	--	01/23/99
AMF-5D-010180-35-10P	719	Pre-Amplifier, 1 to 18 GHz	Miteq, Inc.	549460	04/07/99
AFD3-0208-40-ST	367	Pre-Amplifier, 2 to 8 GHz	Miteq, Inc.	155382	10/21/98
AFS4-08001800-70-10P-4	368	Pre-Amplifier, 8 to 18 GHz	Miteq, Inc.	167	03/09/99
91888-2	252	Horn Antenna (1 to 2 GHz)	Eaton	101	10/31/98
91889-2	253	Horn Antenna (2 to 3.6 GHz)	Eaton	101	10/31/98
91892-1	254	Reflector Antenna (3.6 to 18 GHz)	Eaton	--	ncr
94613-1	255	Horn Antenna (3.6 to 7.6 GHz)	Eaton	--	10/31/98
91891-2	256	Horn Antenna (7.3 to 12 GHz)	Eaton	--	10/31/98
94614-1	257	Horn Antenna (12 to 18 GHz)	Eaton	--	10/31/98