

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)



## Test Report

Product Name: TRANSMITTER

FCC ID: JFZT210D

Applicant:

**AUDIO TECHNICA CORPORATION  
2206 NARUSE, MACHIDA  
TOKYO, 194  
JAPAN**

**Date Receipt: OCTOBER 20, 2004**

**Date Tested: OCTOBER 27, 2004**

**APPLICANT: AUDIO TECHNICA CORPORATION**

**FCC ID: JFZT210D**

**REPORT #: A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc**

**COVER SHEET**

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

## TABLE OF CONTENTS LIST

### TEST REPORT CONTAINING:

PAGE 1.....GENERAL INFORMATION & TECHNICAL DESCRIPTION  
PAGE 2.....TECHNICAL DESCRIPTIONS CONT.  
RF POWER OUTPUT  
PAGE 3.....MODULATION CHARACTERISTICS  
AUDIO FREQUENCY RESPONSE GRAPH  
AUDIO LOW PASS FILTER  
PAGE 4.....MODULATION LIMITING PLOT  
PAGE 5-6.....OCCUPIED BANDWIDTH  
PAGE 7.....RADIATED SPURIOUS EMISSIONS TEST DATA  
PAGE 8.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 9.....FREQUENCY STABILITY TEST DATA  
PAGE 10-11.....EQUIPMENT LIST

### EXHIBITS CONTAINING:

CONFIDENTIALITY LETTER  
BLOCK DIAGRAM  
SCHEMATICS  
PARTS LIST  
LABEL SAMPLE  
LABEL LOCATION  
USERS MANUAL  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
ALIGNMENT PROCEDURE  
OPERATIONAL DESCRIPTION  
TEST SET UP PHOTOGRAPH

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

**REPORT #:** A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

**TABLE OF CONTENTS**

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## GENERAL INFORMATION REQUIRED FOR TYPE ACCEPTANCE

2.1033(c)(1) AUDIO TECHNICA CORPORATION will manufacture the T210D  
2.1033(c)(2) in quantity, for use under FCC RULES PART 74.801, LOW  
POWER AUXILIARY STATIONS.

AUDIO TECHNICA CORPORATION  
2206 NARUSE, MACHIDA  
TOKYO, 194  
JAPAN

## 2.1033 TECHNICAL DESCRIPTION

(c)(1) Maximum Output Power Rating: 1 Watt into 50 ohms  
resistive load.

(c)(3) Instruction book. The instruction manual is included  
in the exhibits.

(c)(4) Type of Emission: 100K0F3E

Bn = 2M + 2DK

M = 20 kHz

D = 30 kHz

K = 1

Bn = 2(20k) + 2(30k)(1) = 100k

74.861 (e)(5) ALLOWED AUTHORIZED BANDWIDTH = 200 kHz.

(c)(6) Frequency Range: 655-680 MHz

(c)(7) Power Range and Controls: UNIT has no controls.

(c)(9) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

High

Vce = 3.0 VDC

Ice = 0.3 A

Pin = 0.9 Watts

(c)(10) Tune-up procedure. The tune-up procedure is included  
in the exhibits.

(c)(11) Complete Circuit Diagrams: The circuit diagram and  
block diagram are included in the exhibits.

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

**REPORT #:** A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1033(c)(12) Photo or Drawing of Label and sketch of location:  
Please see the exhibits.

2.1033(c)(13) Photos of Equipment:  
Please see the exhibits.

(c)(14) Description of all circuitry and devices provided  
for determining and stabilizing frequency.

Description of any circuits or devices employed for  
suppression of spurious radiation, for limiting  
modulation, and for limiting power.

This circuitry is included in the exhibits.

Limiting Modulation:  
The transmitter audio circuitry is contained in  
IC101, IC102 and IC103.

Limiting Power:  
There is no provision for limiting power.


(15) Digital modulation. This unit does not use digital  
modulation.

2.1033(c)(16) The data required by 2.1046 through 2.1057 is  
submitted below.

2.1046 RF power output  
RF power measured is:

OUTPUT POWER: 0.025 WATTS ERP

## R.F. POWER OUTPUT TEST PROCEDURE

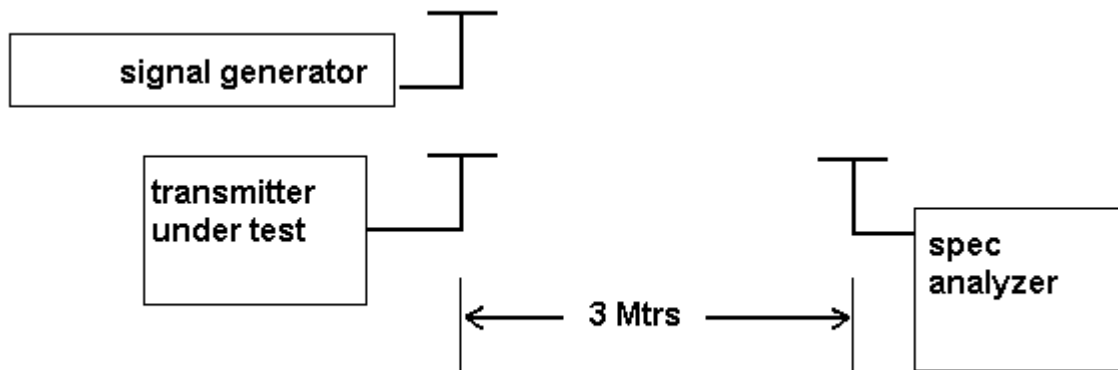

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT210D

REPORT #: A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)


2.1047(a)(b)

## Modulation characteristics:

### AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown below.

## Audio Frequency Response

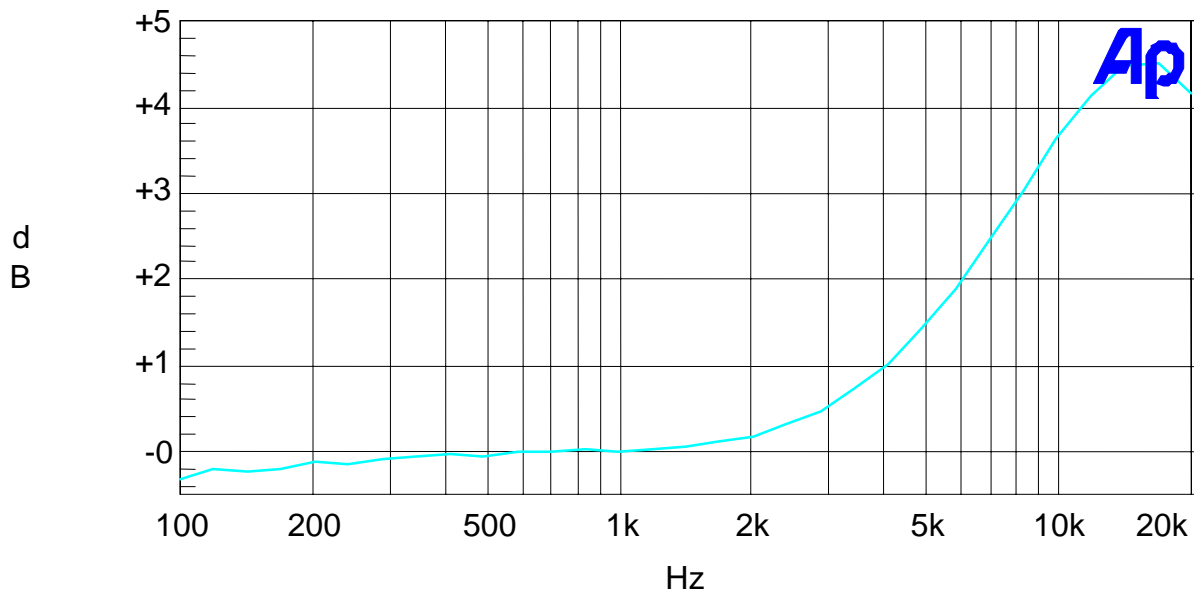

### AUDIO LOW PASS FILTER

The audio low pass filter is not required in this unit.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT210D

REPORT #: A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)


2.1047(b)

## Audio input versus modulation

A plot of the audio input versus deviation is shown in the following plots.

### Modulation Limiting Plots:

15KHz (Green), 2.5KHz (Blue), and 300 Hz (Yellow)

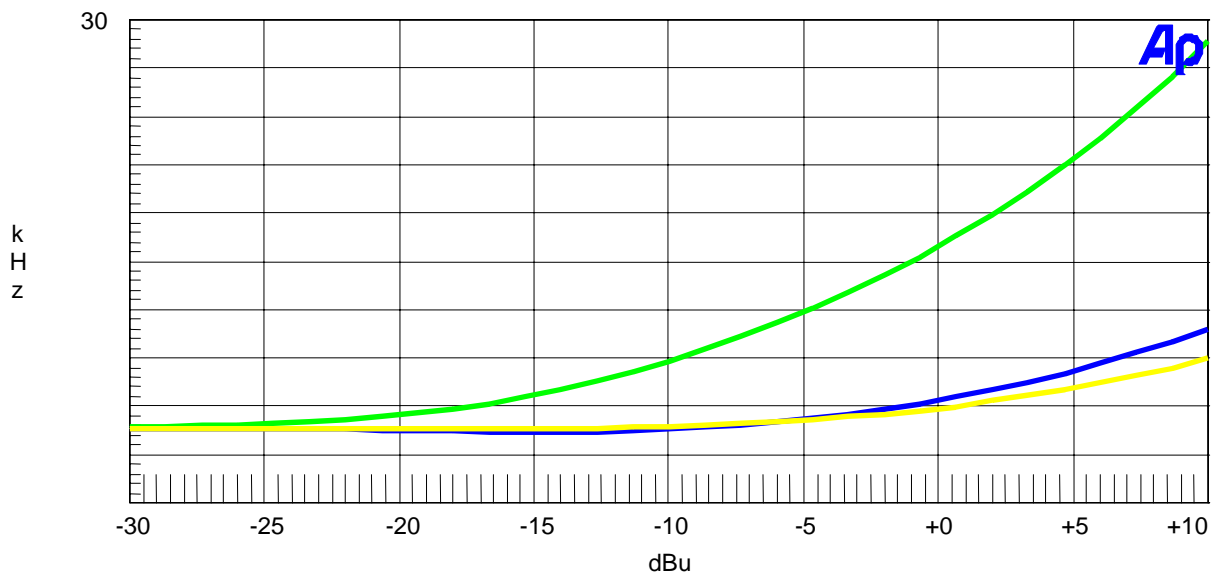

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT210D

REPORT #: A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1049


## Occupied bandwidth:

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35 dB and beyond 250%  $43 + \log(P_o)$  dB. The plot show the transmitter modulated with 15000 Hz(the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the un-modulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

## Microphone transmitter

## Test procedure diagram

### OCCUPIED BANDWIDTH MEASUREMENT

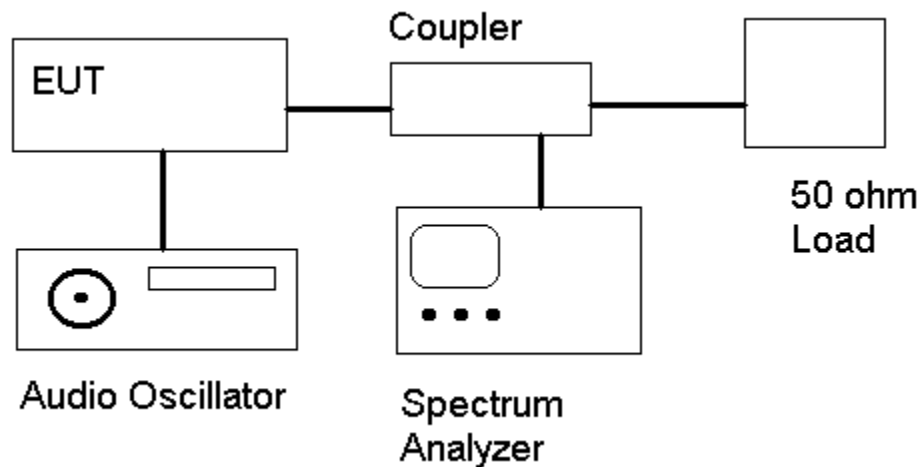

**REQUIREMENT: 200kHz EMISSION BANDWIDTH**

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

**REPORT #:** A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## OCCUPIED BANDWIDTH

### NOTES:

AUDIO TECHNICA CORPORATION - FCC ID: JFZT210D  
OCCUPIED BANDWIDTH PLOT

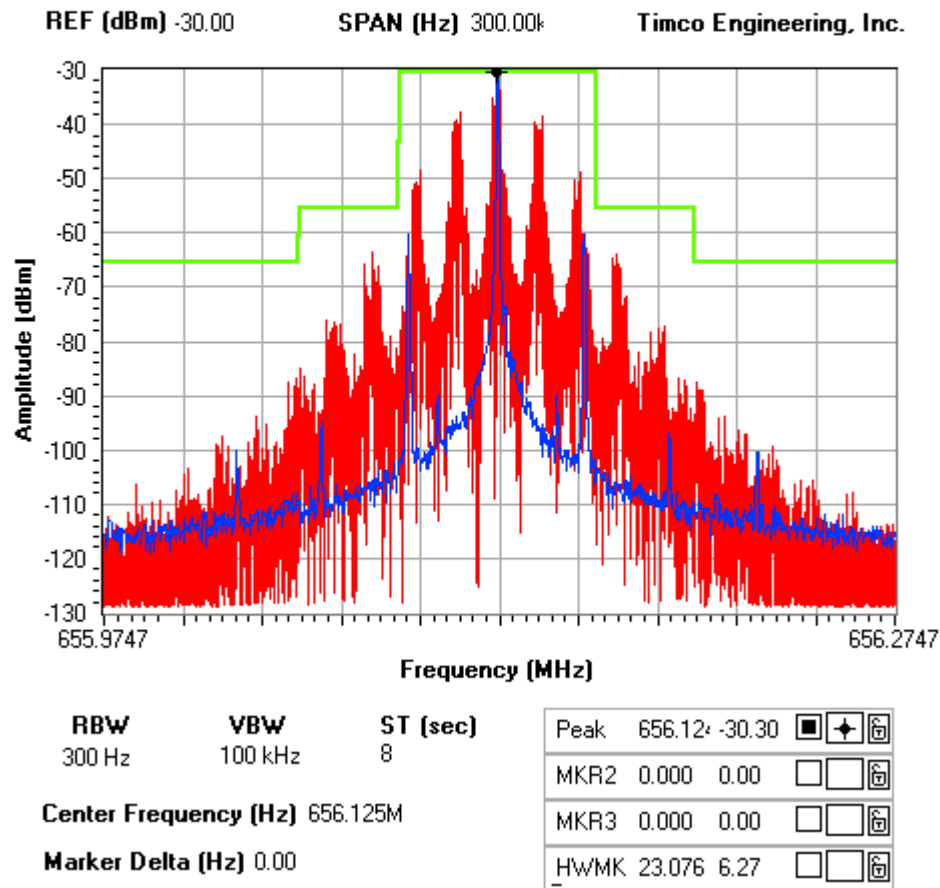

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT210D

REPORT #: A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1051

**Spurious emissions at antenna terminals(conducted):**

Not Applicable no antenna connector.

2.1053(a)(b)

**Field strength of spurious emissions:**

**NAME OF TEST:**

RADIATED SPURIOUS EMISSIONS

**REQUIREMENTS:**

Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.

$$43 + 10 \log(0.025) = 26.98 \text{ dB}$$

**TEST DATA:**

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
656.00	V	14.00	0.00	0.45	0.00
1,312.00	V	-52.60	1.06	4.66	63.45
1,968.00	V	-52.70	1.19	5.86	62.48
2,624.00	V	-53.00	1.31	7.27	61.49
3,280.00	V	-44.50	1.38	7.82	52.51
3,936.00	V	-46.20	1.44	7.74	54.35
4,592.00	V	-37.50	1.52	8.51	44.96
5,248.00	V	-51.00	1.65	8.21	58.89
5,904.00	H	-57.40	1.86	9.00	64.71
6,560.00	H	-59.20	1.96	9.32	66.29

**TEST DATA:**

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
678.50	V	14.00	0.00	0.56	0.00
1,357.00	H	-58.70	1.07	4.80	69.53
2,035.50	V	-57.80	1.21	5.98	67.59
2,714.00	V	-62.30	1.32	7.36	70.82
3,392.50	V	-49.40	1.39	7.88	57.47
4,071.00	H	-55.10	1.46	7.65	63.47
4,749.50	V	-51.50	1.55	8.29	59.32
6,106.50	V	-54.90	1.91	9.26	62.11
6,785.00	V	-58.10	1.98	9.12	65.52

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

**REPORT #:** A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Method of Measuring Radiated Spurious Emissions

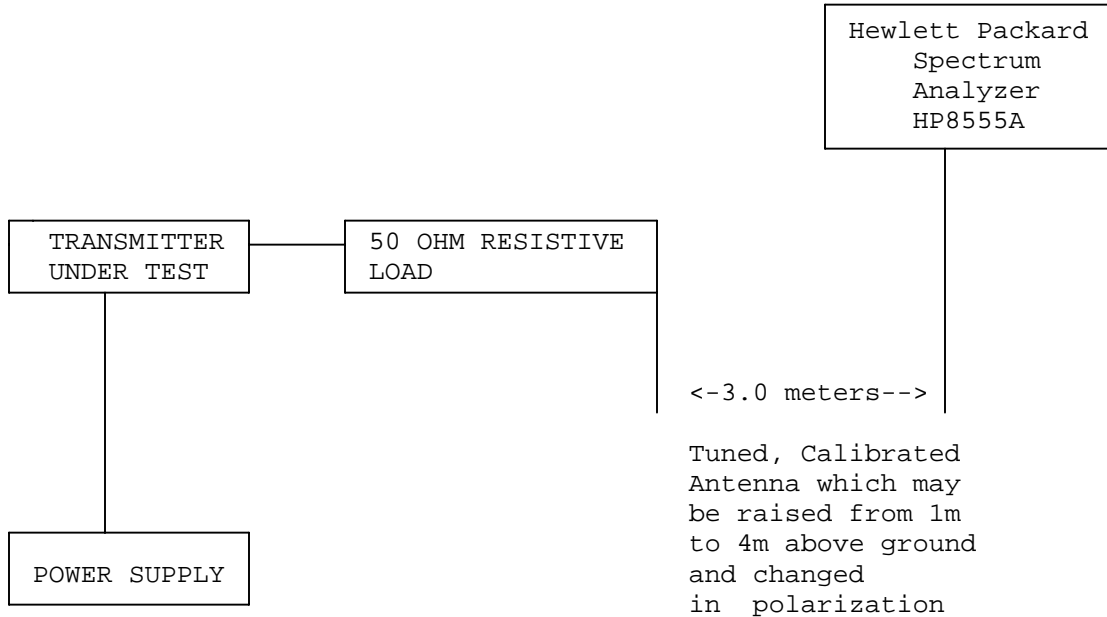

Equipment placed 80 cm above ground  
on a rotatable platform.

**METHOD OF MEASUREMENT:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, FL 32669.

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

**REPORT #:** A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## 2.1055 Frequency stability: 74.861(e)(4)

-----  
Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm) (74.861 e.4) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

### MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 656.124 620

<u>TEMPERATURE°C</u>	<u>FREQUENCY_MHz</u>	<u>PPM</u>
REFERENCE	656.124 620	
-30	656.125 894	+ 1.94
-20	656.128 070	+ 5.26
-10	656.128 799	+ 6.37
0	656.128 305	+ 5.62
10	656.127 060	+ 3.72
20	656.125 449	+ 1.26
30	656.123 936	- 1.04
40	656.123 053	- 2.39
50	656.123 212	- 2.15
<u>Batt. Data</u>		<u>Batt. PPM</u>
656.125 444		+ 1.26

**RESULTS OF MEASUREMENTS:** The test results indicates that the EUT meets the requirements.

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

**REPORT #:** A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/12/06
AC Voltmeter	HP	400FL	2213A14499	CAL 7/19/04	7/19/06
Blue Tower	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Quasi-Peak Adapter					
Blue Tower	HP	85685A	2620A00294	CAL 4/27/04	4/27/06
RF					
Preselector					
Blue Tower	HP	8568B	2928A04729	CAL 4/15/03	4/15/05
Spectrum Analyzer			2848A18049		
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
Dipole	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CAL 9/26/02	9/26/05
Dipole	Electro-Metrics				
Antenna Kit	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
Frequency Counter					
Hygro-Thermometer	Extech	445703	0602	CAL 10/4/02	10/4/04
Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 8/26/04	8/26/06
Measuring Tape-7.5M	Kraftixx	7.5M PROF		CHAR 2/1/02	2/1/04
Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
Multimeter	Fluke	FLUKE-77-3	79510405	CHAR 9/26/01	9/26/03
Silver Tower	HP	8449B	3008A01075	CAL 3/22/04	3/22/06
Preamplifier					
Silver Tower	HP	85650A	3303A01844	CAL 3/22/04	3/22/06
Quasi-Peak Adapter					
Silver Tower	HP	85685A	2926A00983	CAL 3/22/04	3/22/06
RF					
Preselector					
Silver Tower	HP	8566B Opt 462	3552A22064	CAL 3/22/04	3/22/06
Spectrum Analyzer			3638A08608		
System One	Audio Precision	System One	SYS1-45868	CHAR 4/25/02	4/25/04
Tan Tower	HP	8449B-H02	3008A00372	CAL 9/23/03	9/23/05

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT210D

REPORT #: A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Preamplifier

Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 9/23/03	9/23/05
Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 9/23/03	9/23/05
Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 9/23/03	9/23/05
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04

**APPLICANT:** AUDIO TECHNICA CORPORATION

**FCC ID:** JFZT210D

**REPORT #:** A\AudioTechnica\_JFZ\1722UT4\1722UT4TestReport.doc