

Test Plot 40#: WCDMA Band 5_Head Left Tilt_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0838 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.371 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.0847 W/kg

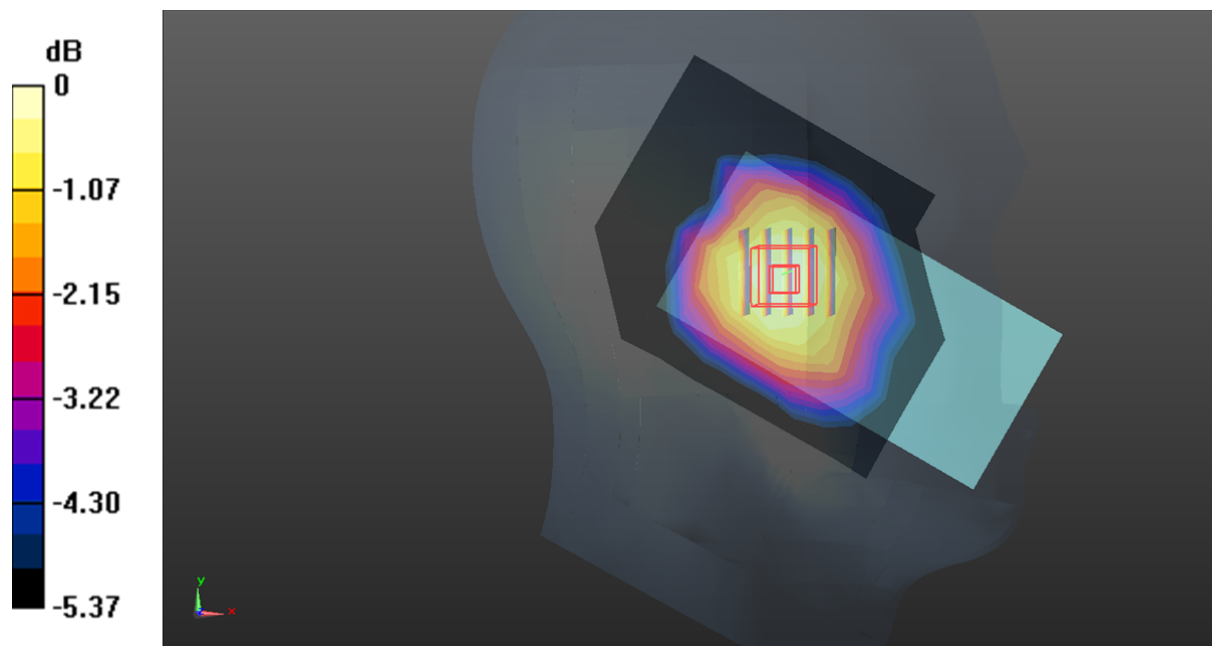

0 dB = 0.0847 W/kg = -10.72 dB dBW/kg

Test Plot 41#: WCDMA Band 5_Head Right Cheek_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.149 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.095 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

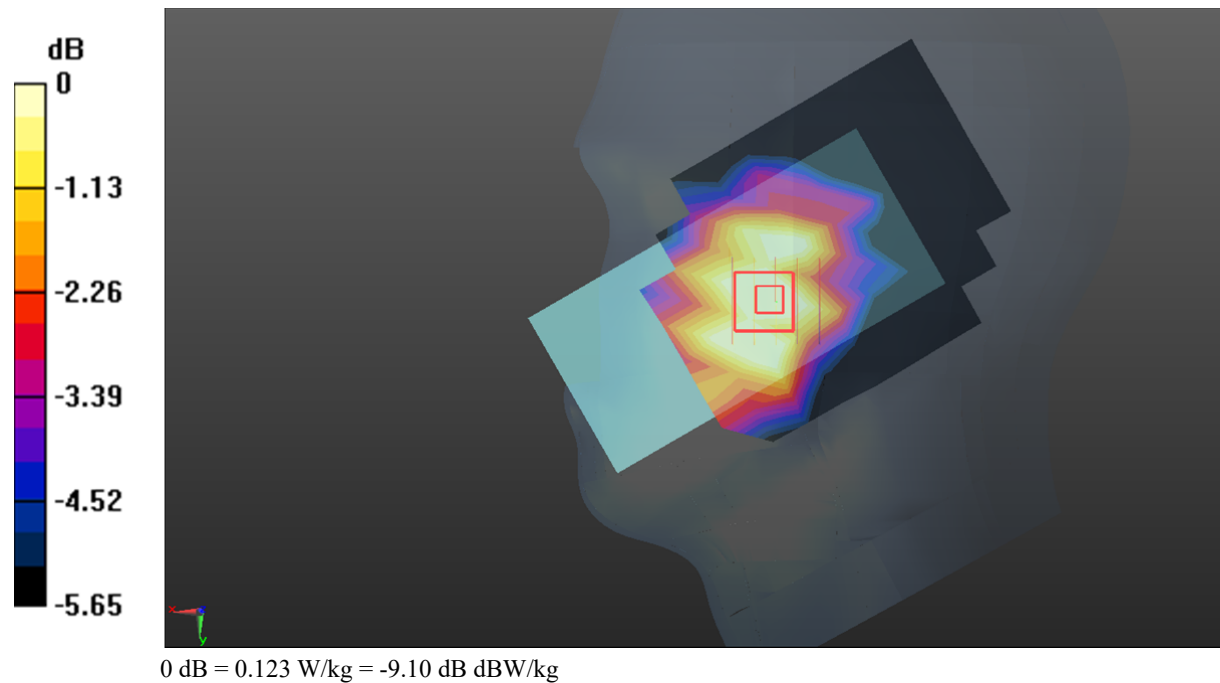

Test Plot 42#: WCDMA Band 5_Head Right Tilt_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0651 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.942 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0530 W/kg

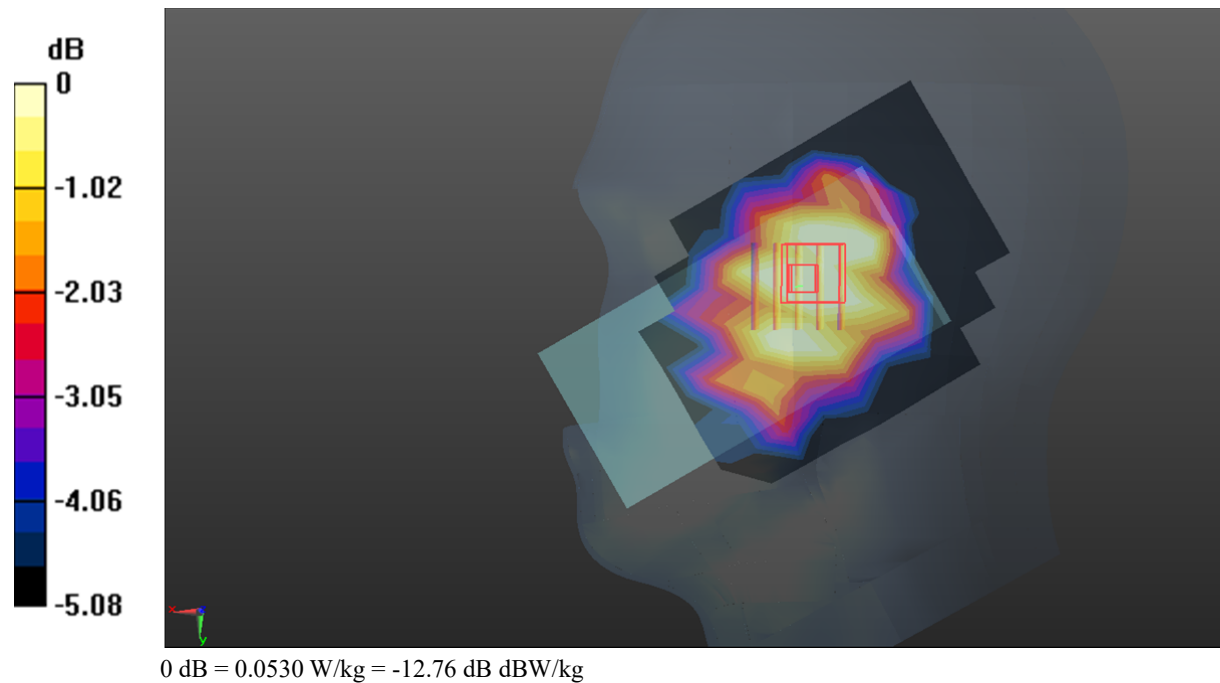

Test Plot 43#: WCDMA Band 5_Body Front_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.57 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.143 W/kg

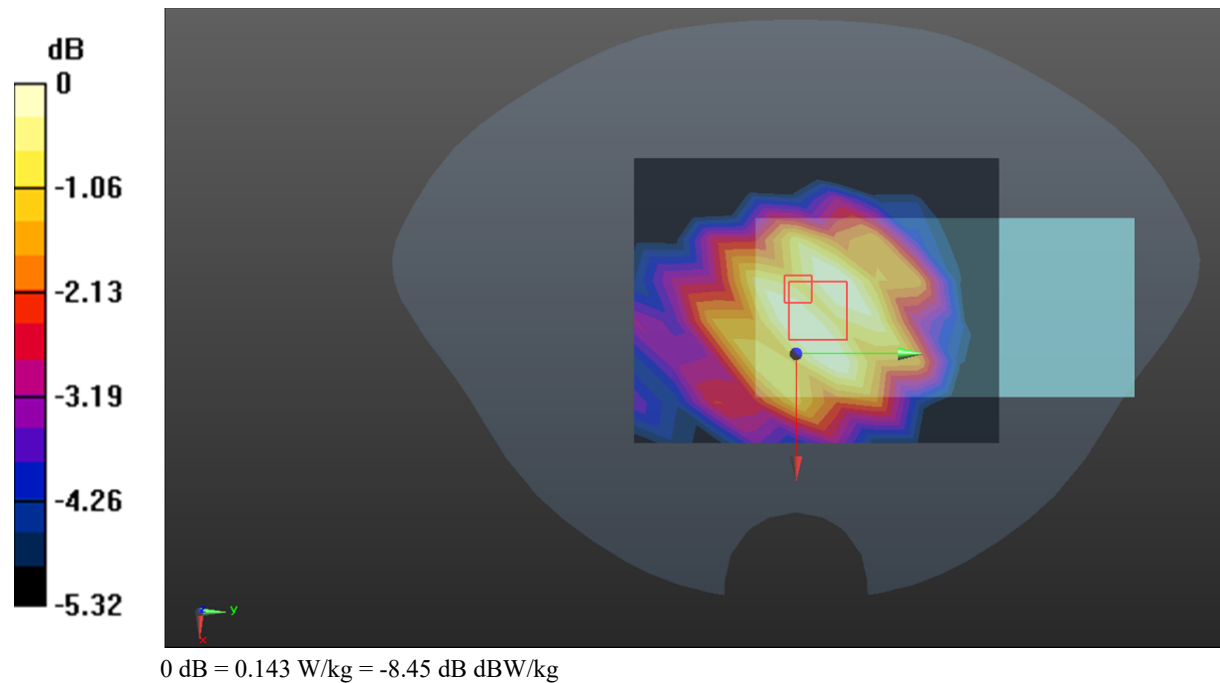

Test Plot 44#: WCDMA Band 5_Body Back_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.203 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.62 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

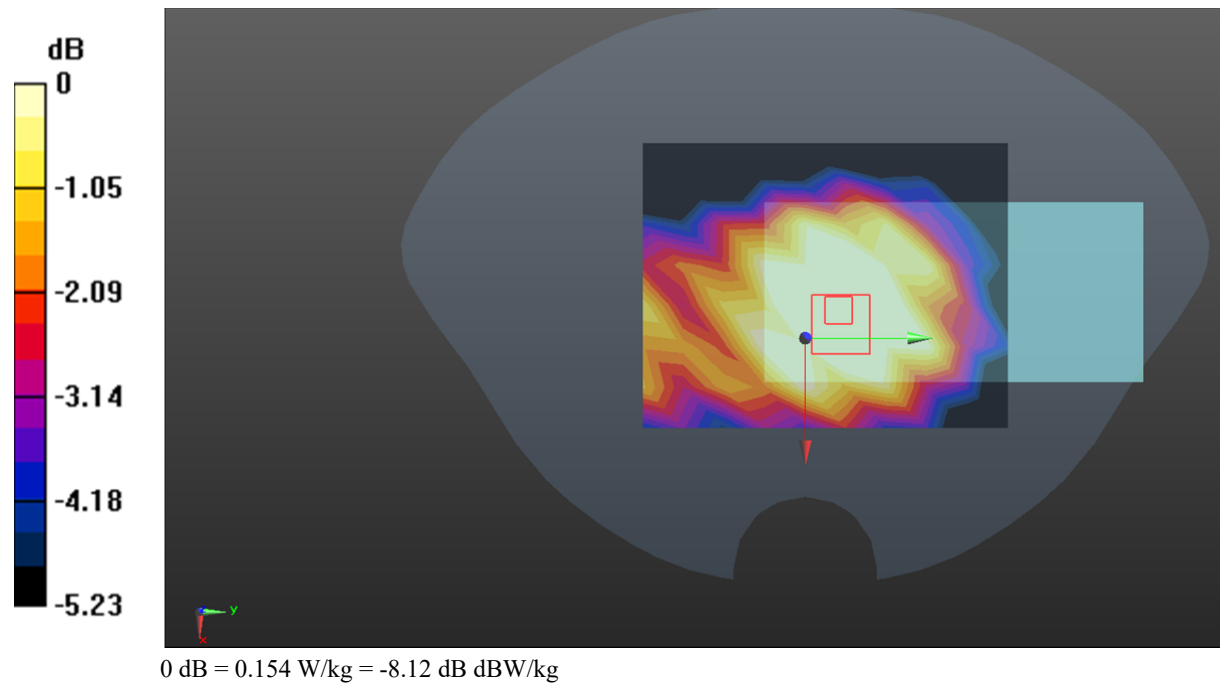

Test Plot 45#: WCDMA Band 5_Body Left_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.189 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.30 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

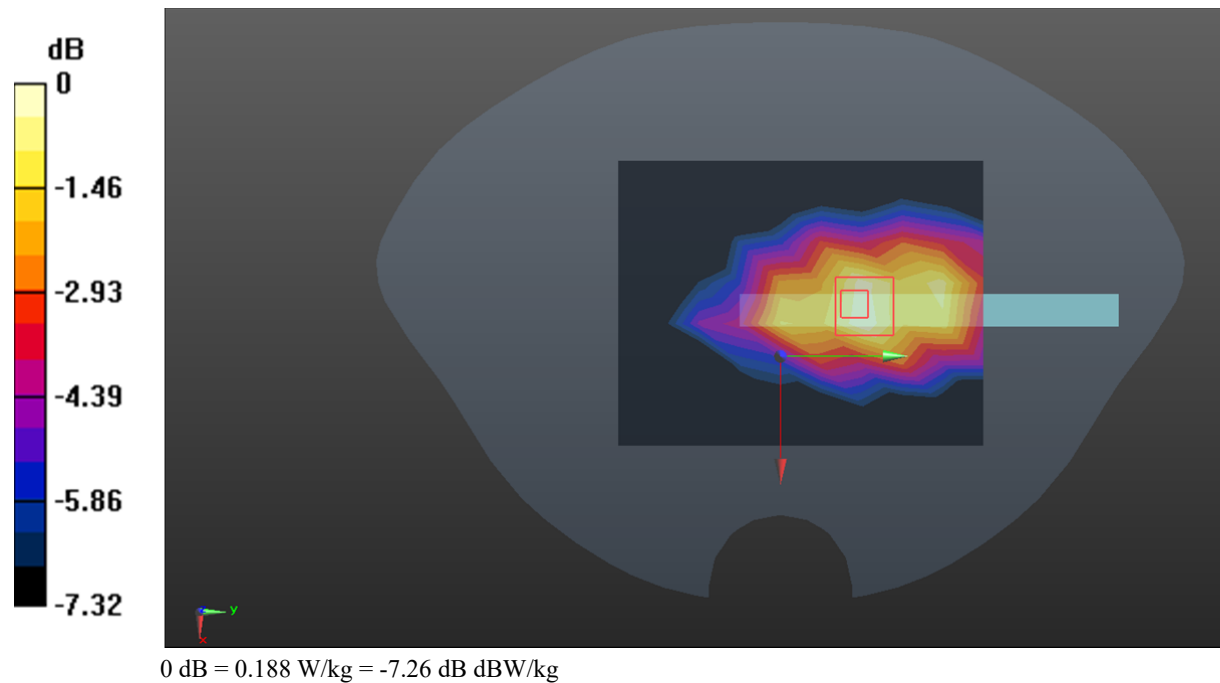

Test Plot 46#: WCDMA Band 5_Body Right_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.173 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.23 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

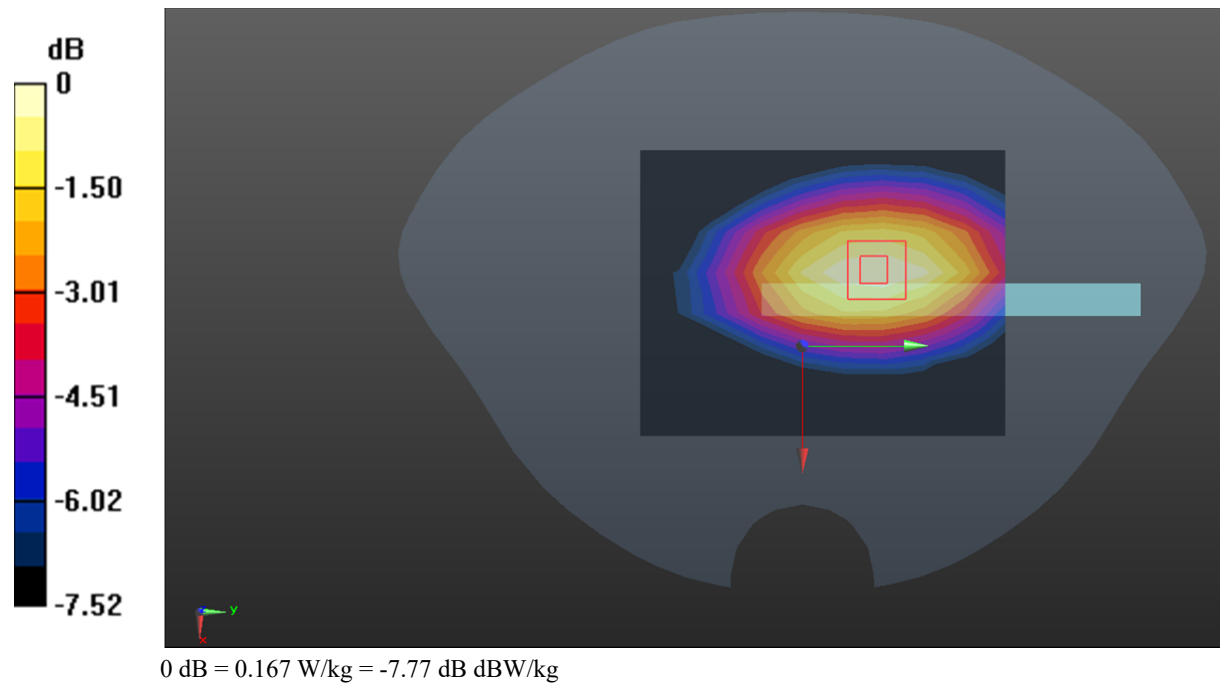

Test Plot 47#: WCDMA Band 5_Body Bottom_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0350 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.275 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0266 W/kg

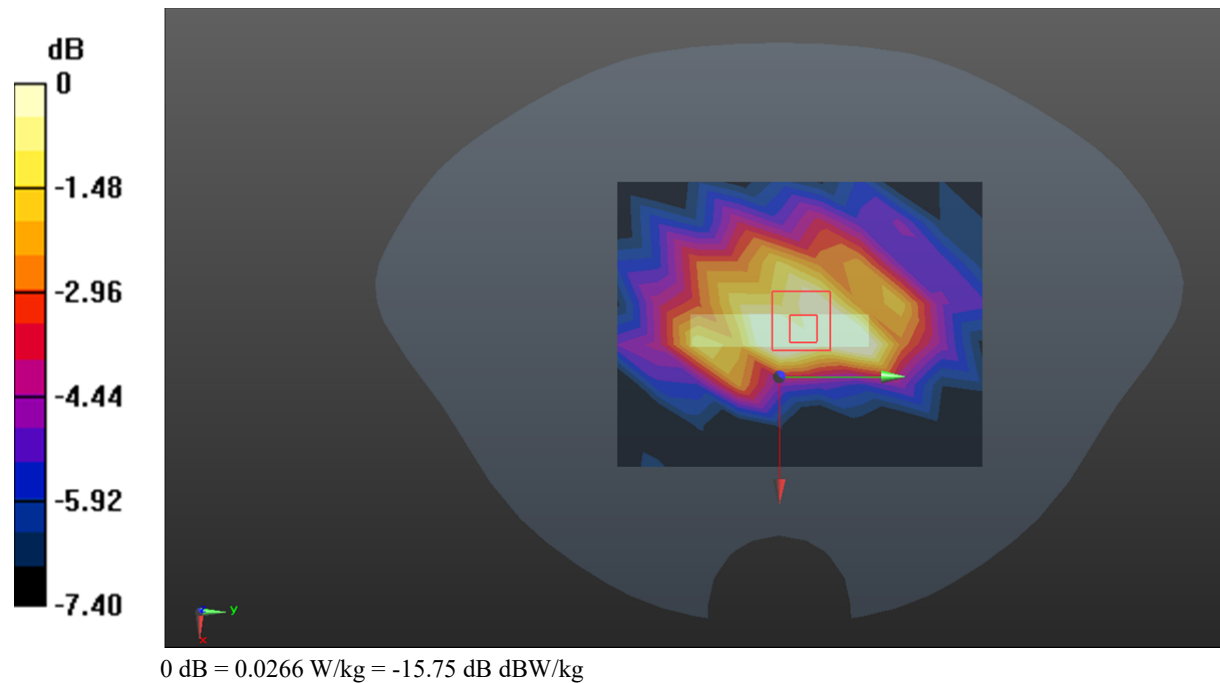

Test Plot 48#: LTE Band 2_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0213 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.334 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0132 W/kg

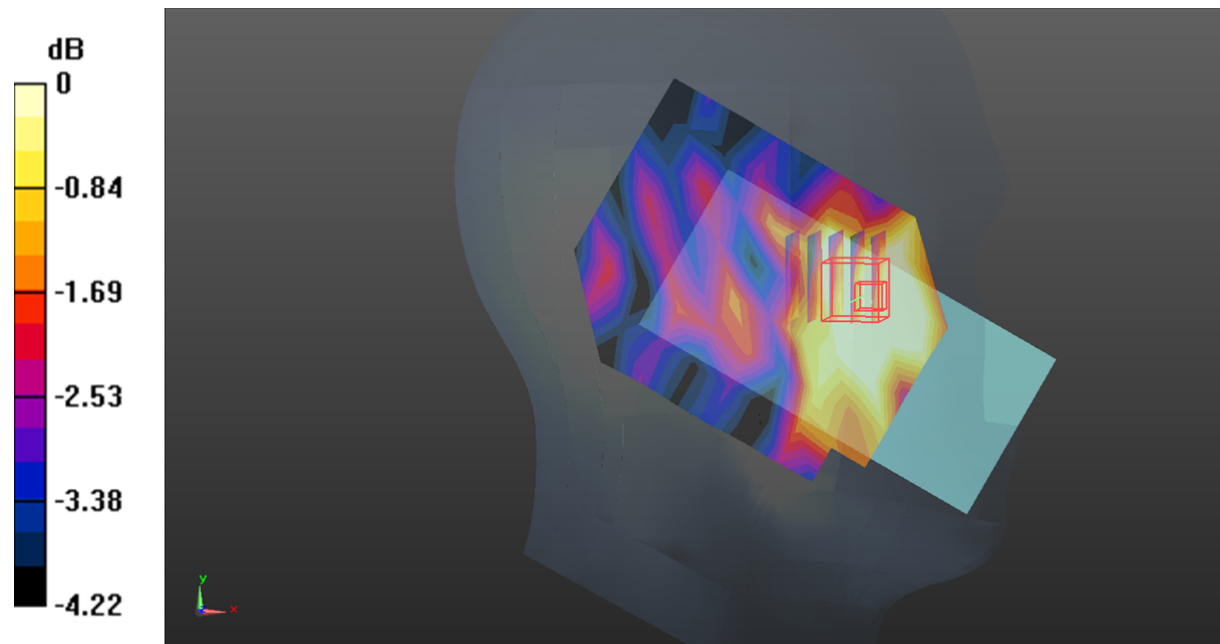

0 dB = 0.0132 W/kg = -18.79 dB dBW/kg

Test Plot 49#: LTE Band 2_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0105 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.946 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00987 W/kg

Maximum value of SAR (measured) = 0.0117 W/kg

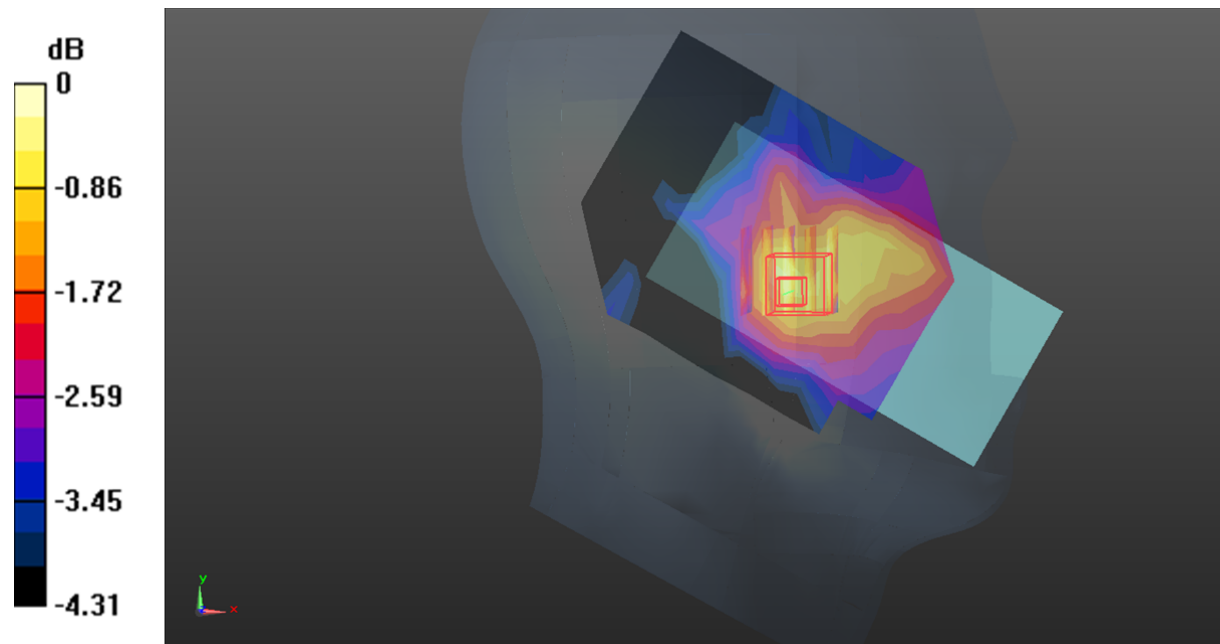

0 dB = 0.0117 W/kg = -19.32 dB dBW/kg

Test Plot 50#: LTE Band 2_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0245 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.613 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0212 W/kg

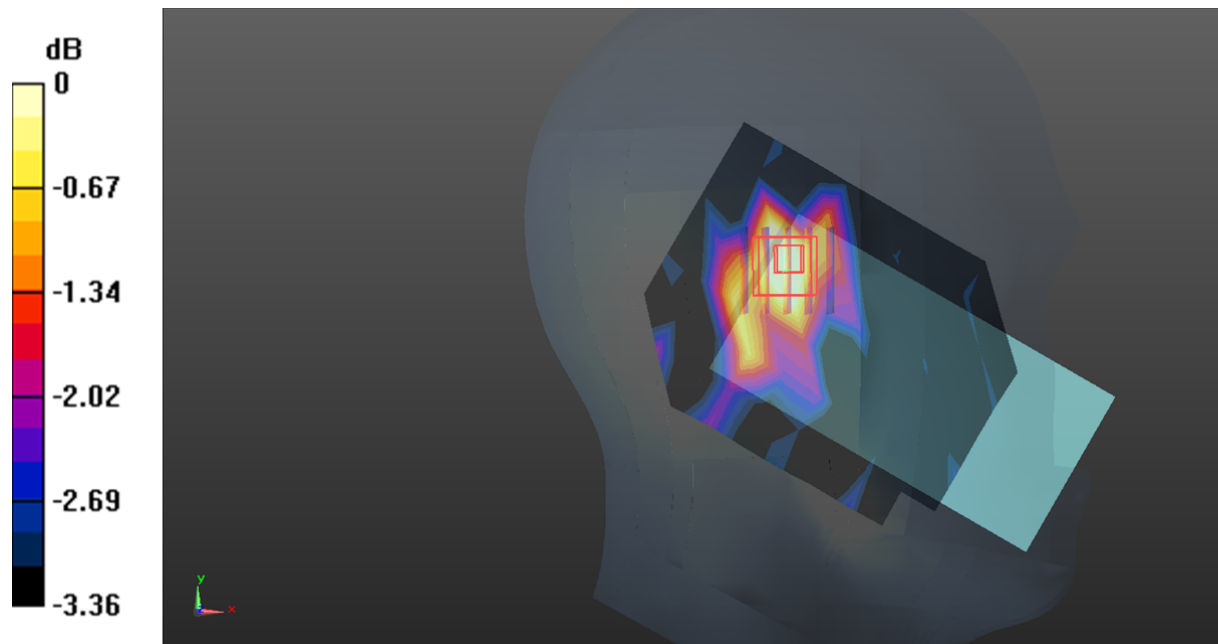

0 dB = 0.0212 W/kg = -16.74 dB dBW/kg

Test Plot 51#: LTE Band 2_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0199 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.307 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0185 W/kg

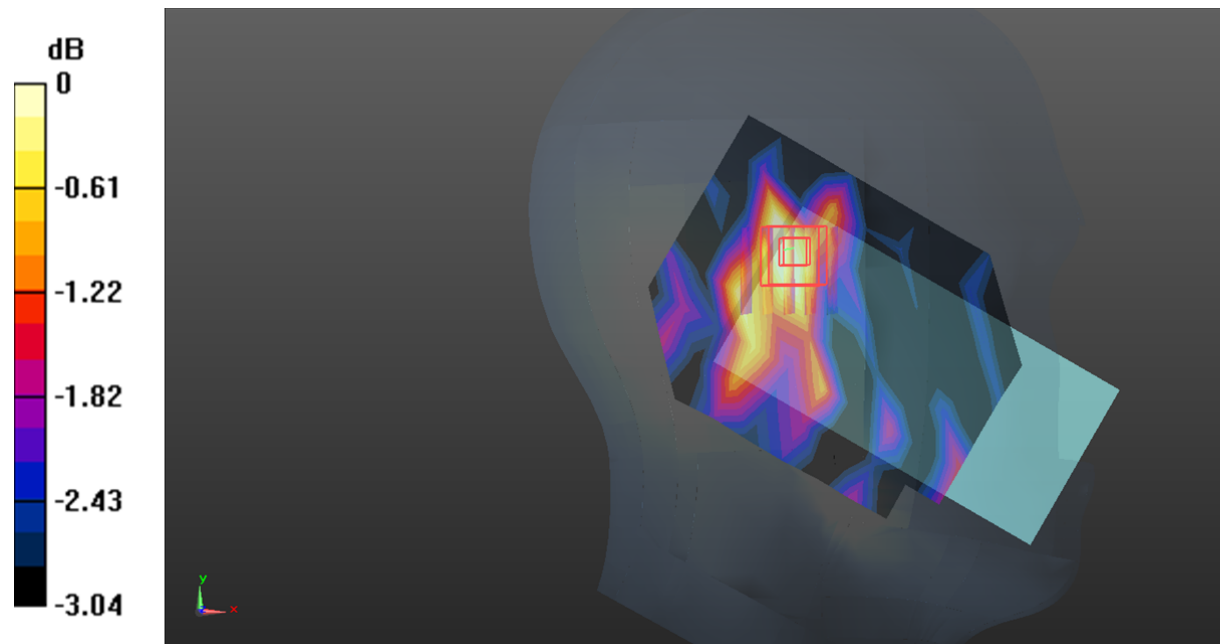

0 dB = 0.0185 W/kg = -17.33 dB dBW/kg

Test Plot 52#: LTE Band 2_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0663 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.802 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0448 W/kg

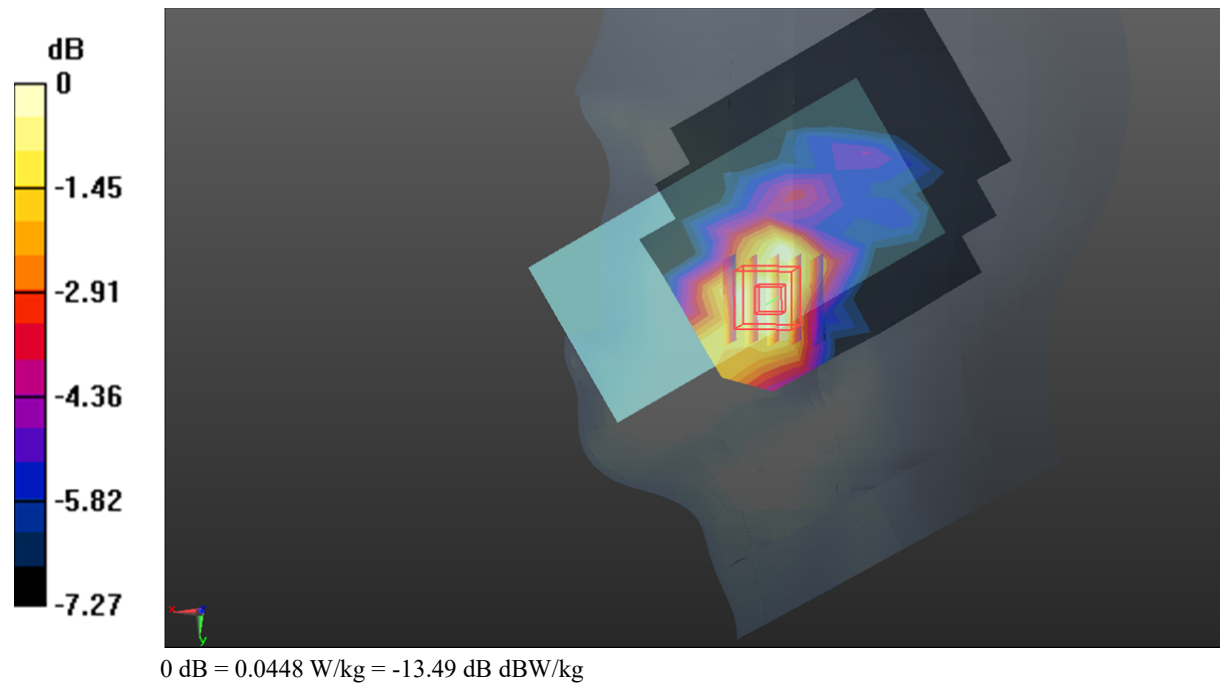

Test Plot 53#: LTE Band 2_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0571 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.708 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0423 W/kg

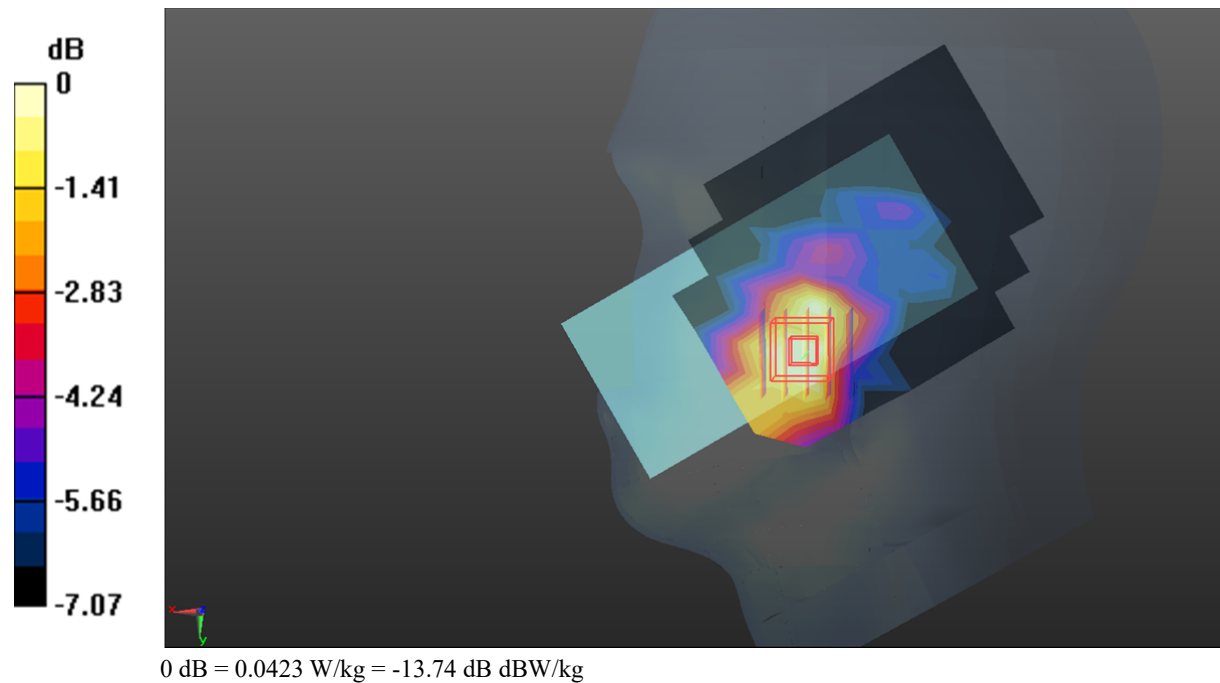

Test Plot 54#: LTE Band 2_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0229 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.809 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0207 W/kg

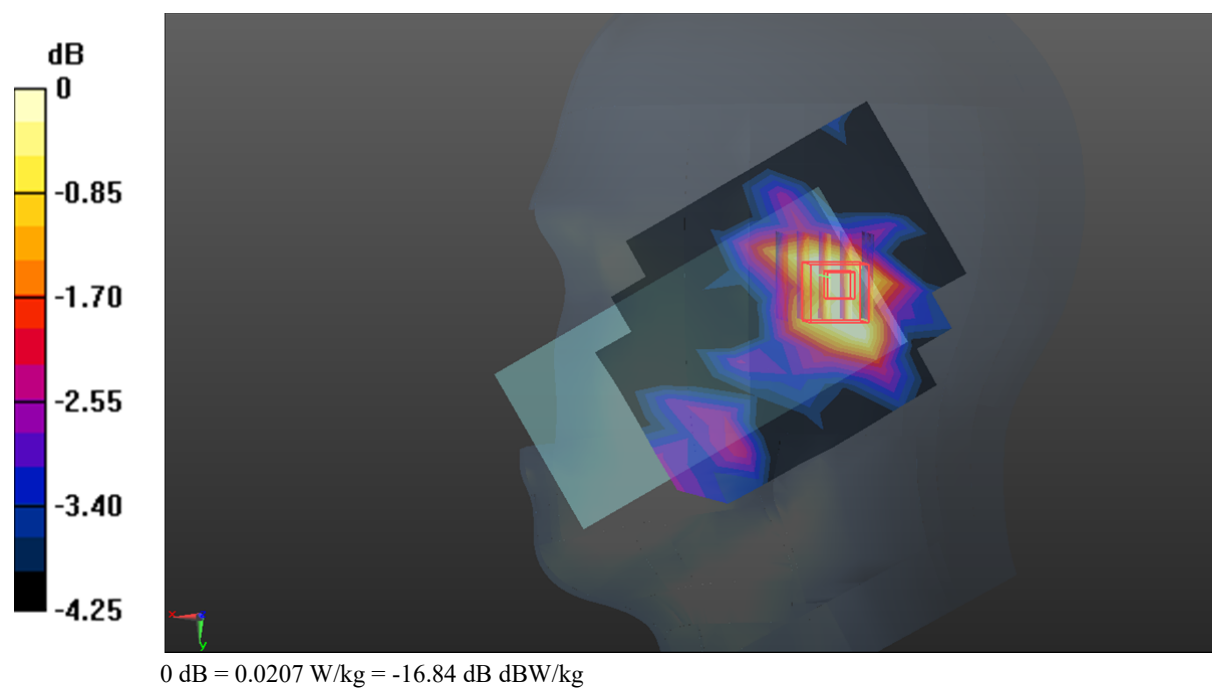

Test Plot 55#: LTE Band 2_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0197 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.496 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0177 W/kg

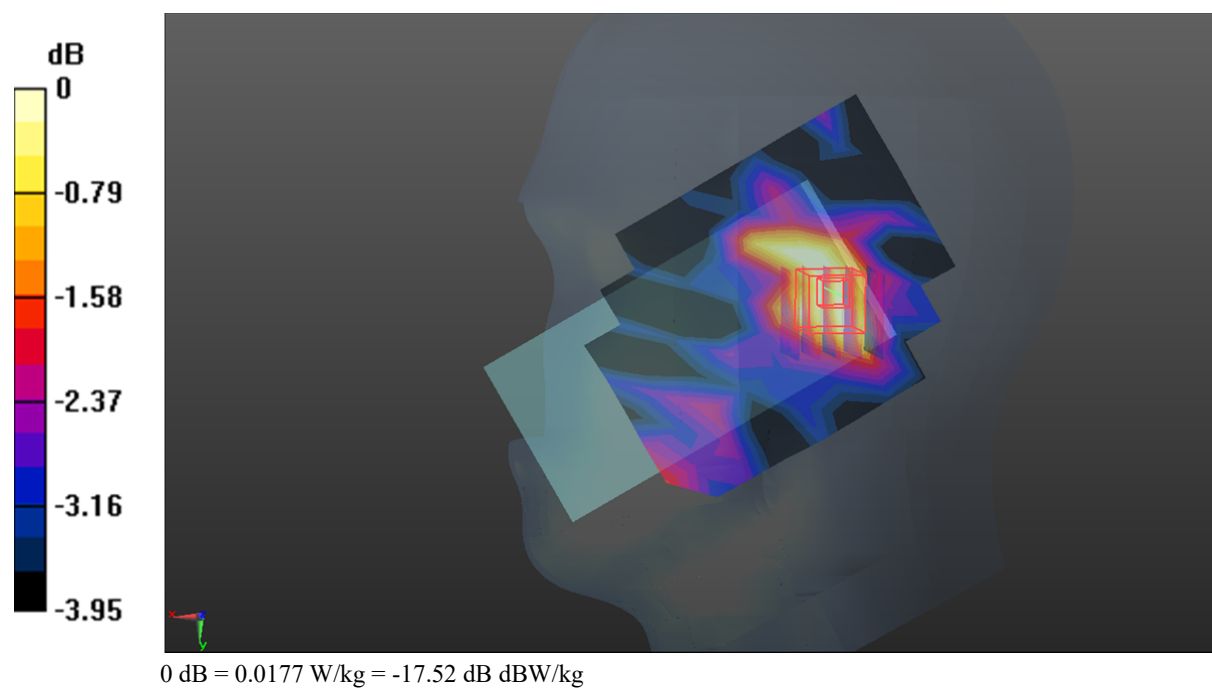

Test Plot 56#: LTE Band 2_Body Front_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0982 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.771 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

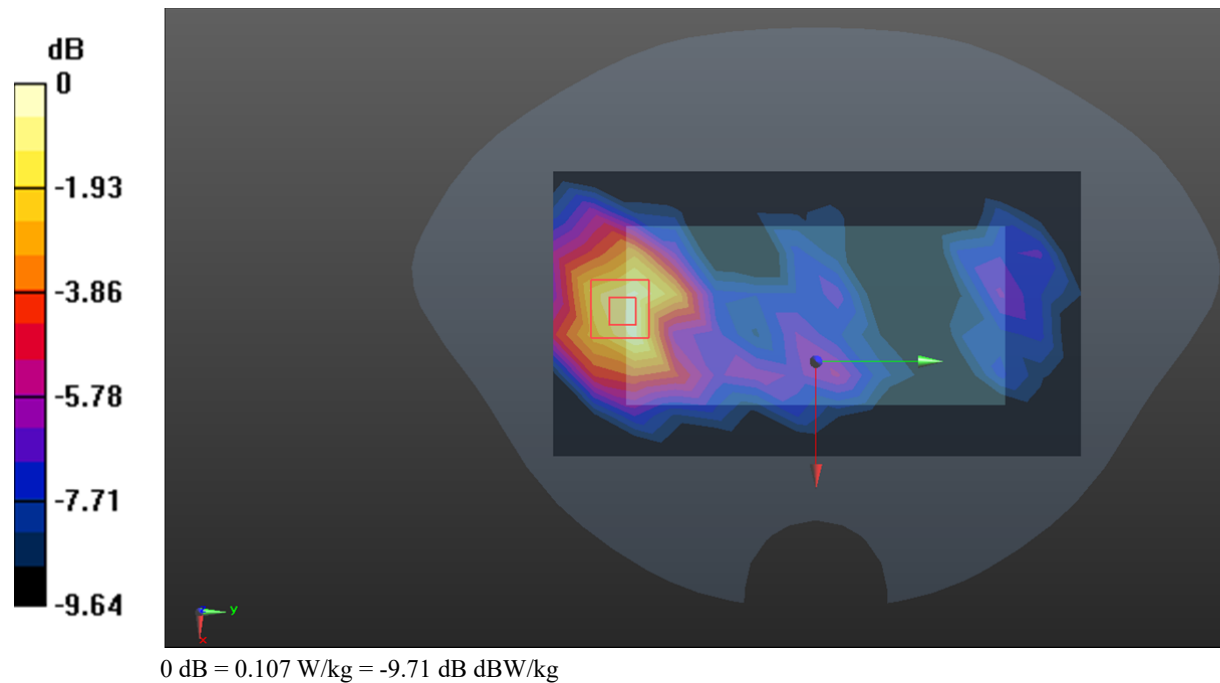

Test Plot 57#: LTE Band 2_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0886 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.579 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.0945 W/kg

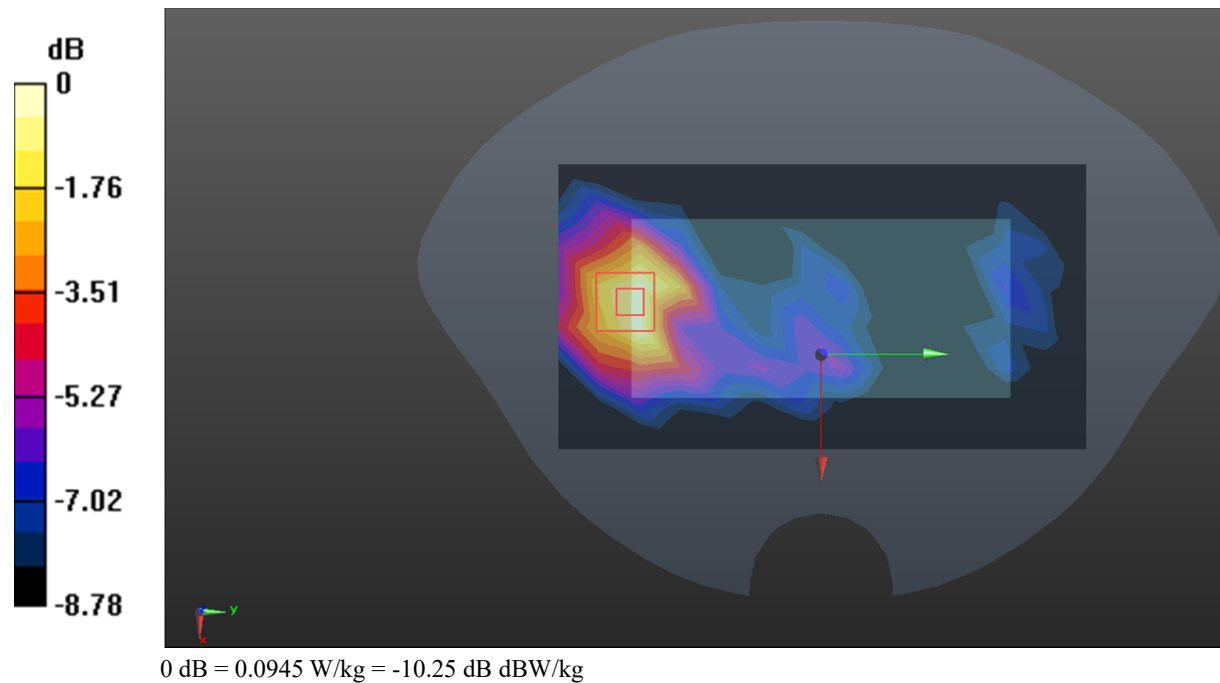

Test Plot 58#: LTE Band 2_Body Back_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.201 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.511 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

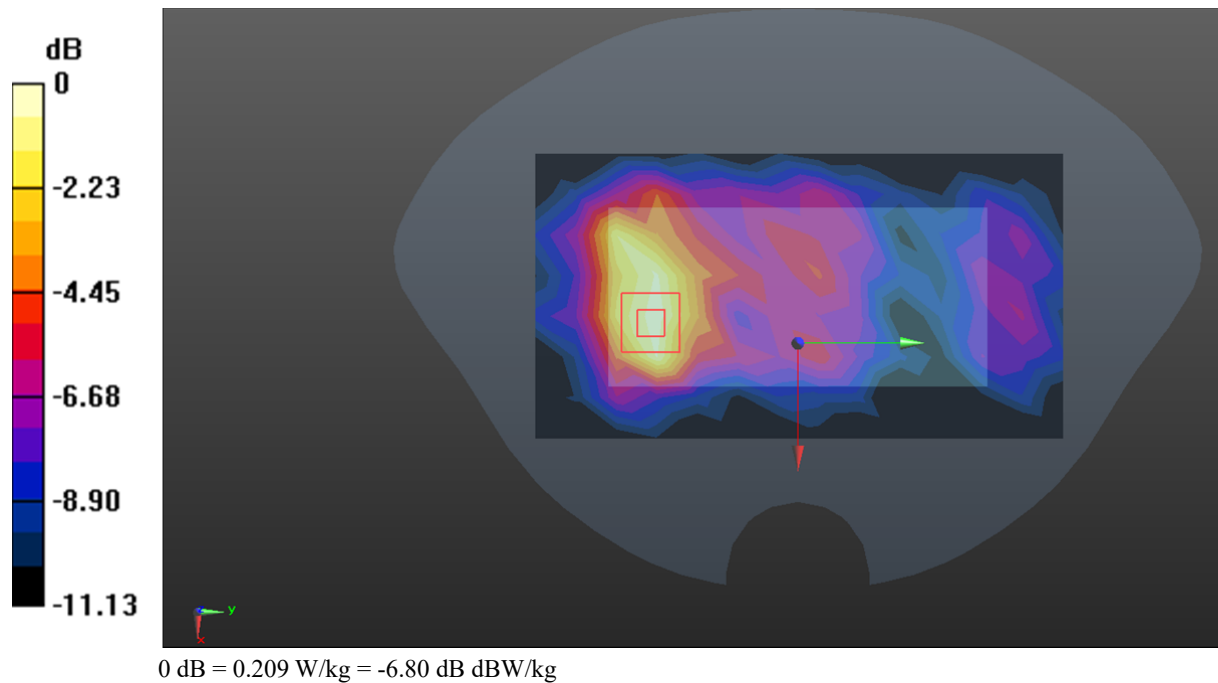

Test Plot 59#: LTE Band 2_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.178 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.323 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

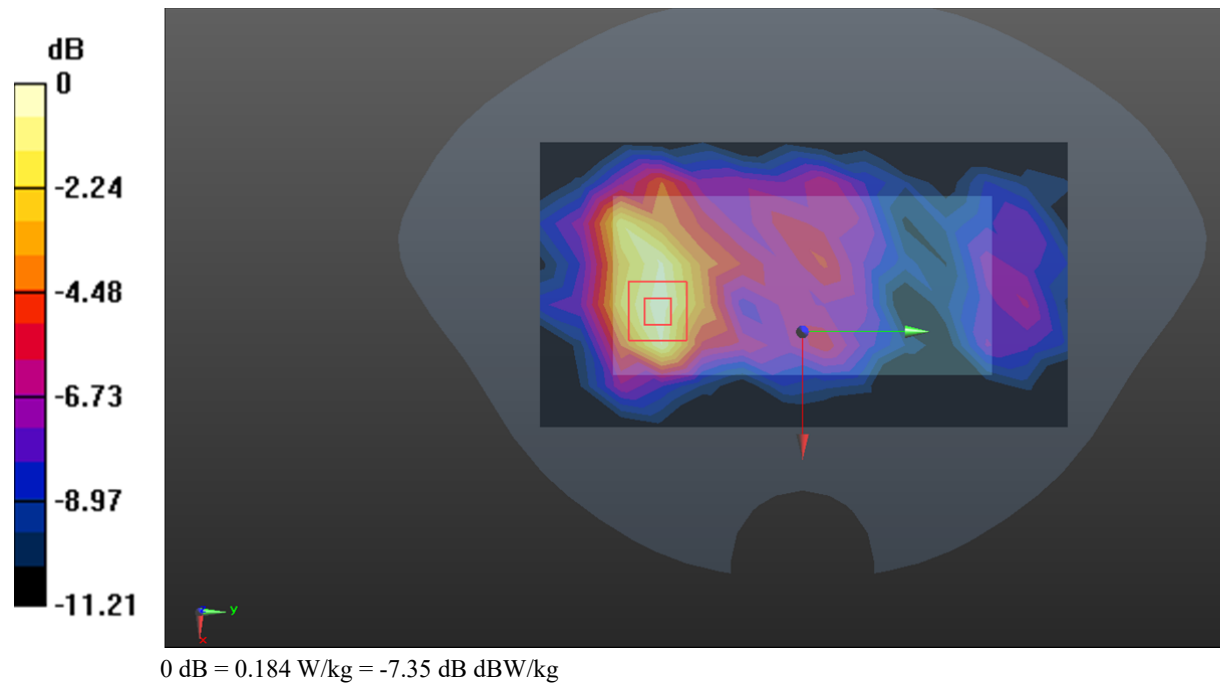

Test Plot 60#: LTE Band 2_Body Left_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0164 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.731 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0123 W/kg

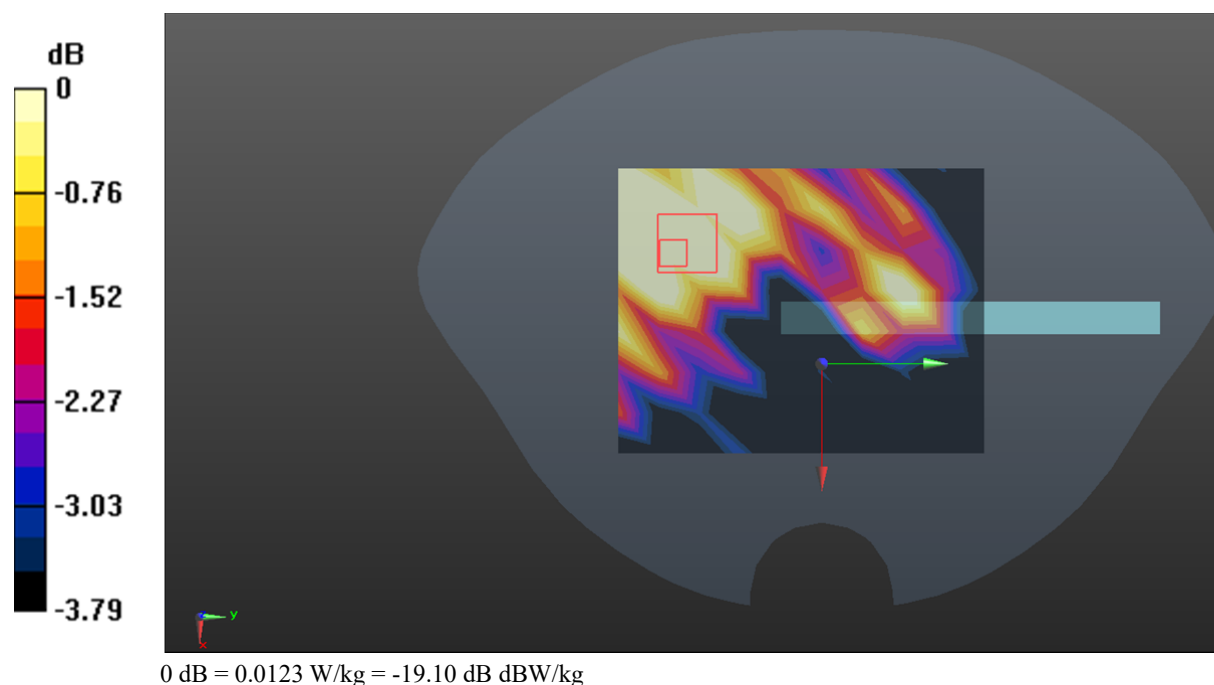

Test Plot 61#: LTE Band 2_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0166 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.694 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0125 W/kg

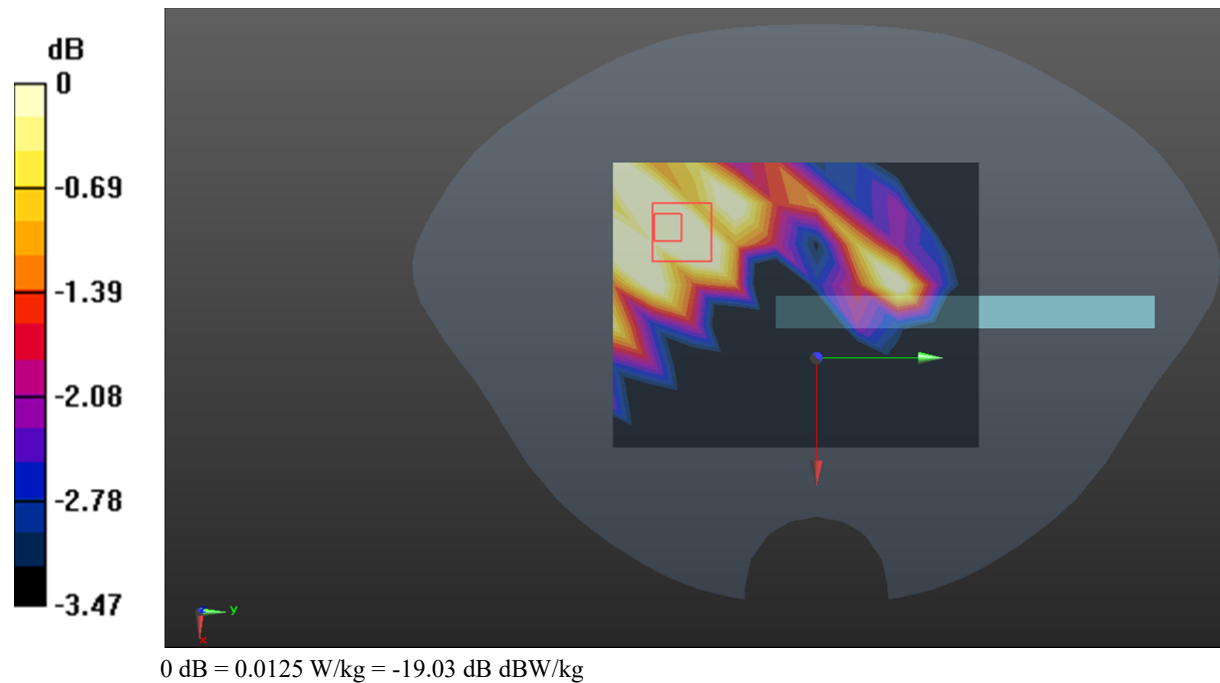

Test Plot 62#: LTE Band 2_Body Right_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0704 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.807 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0521 W/kg

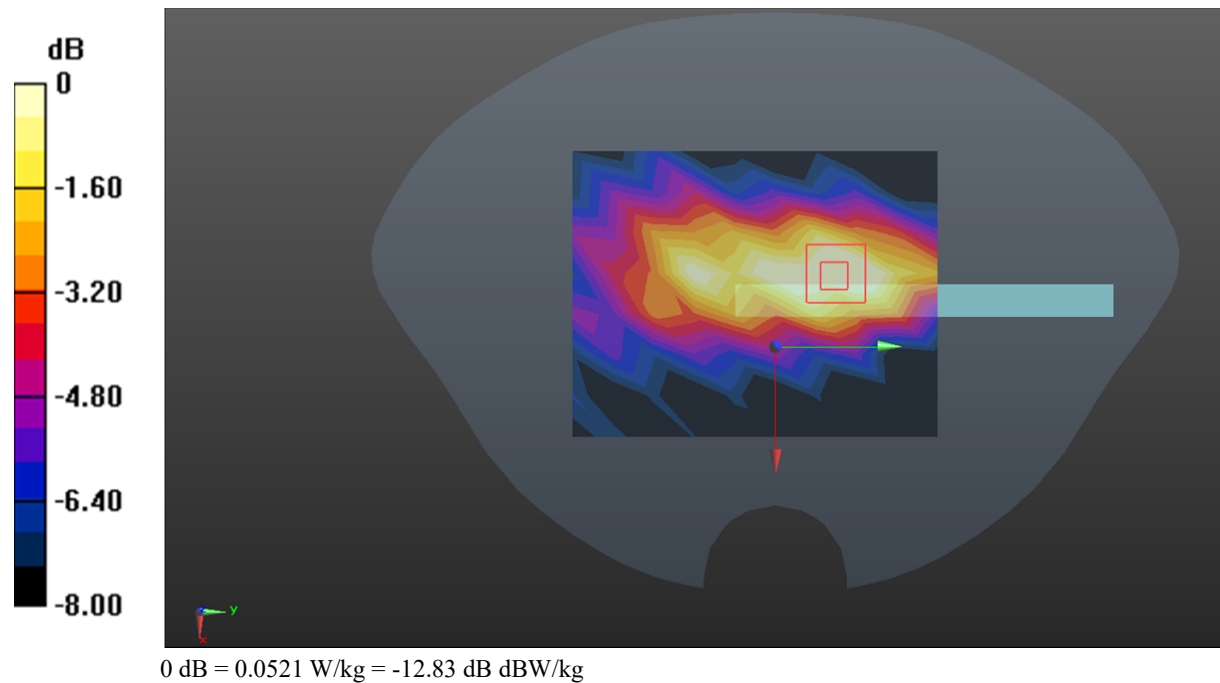

Test Plot 63#: LTE Band 2_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0635 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.575 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0554 W/kg

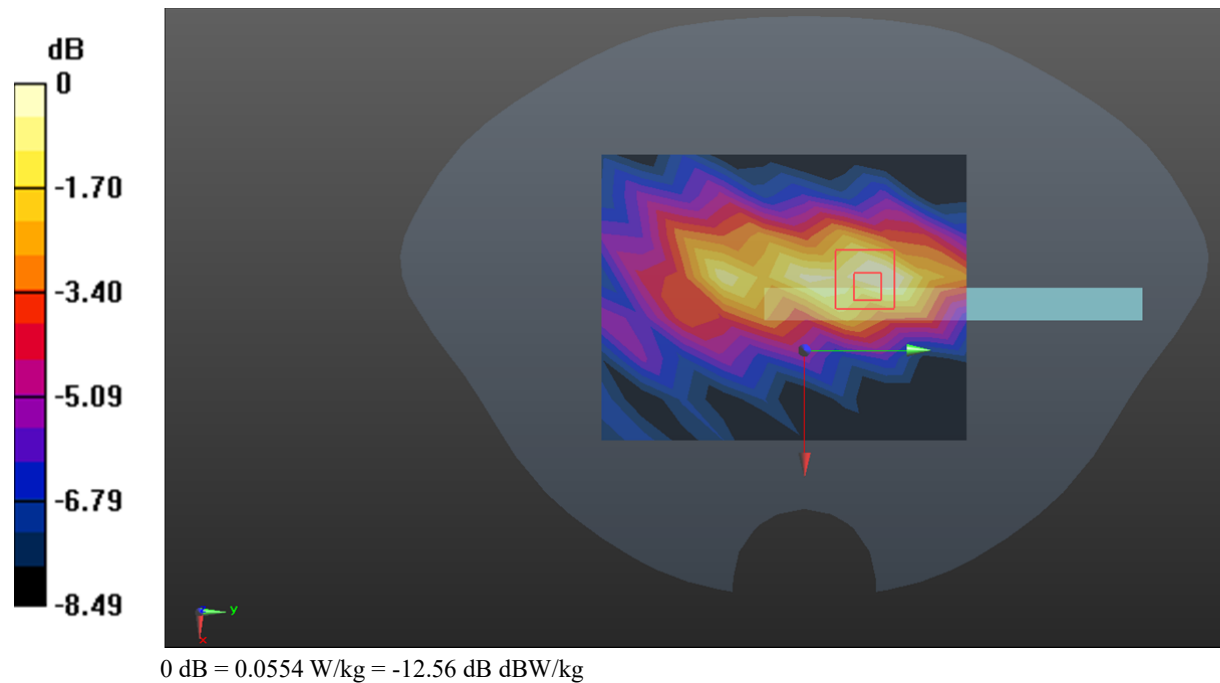

Test Plot 64#: LTE Band 2_Body Bottom_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.318 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.16 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

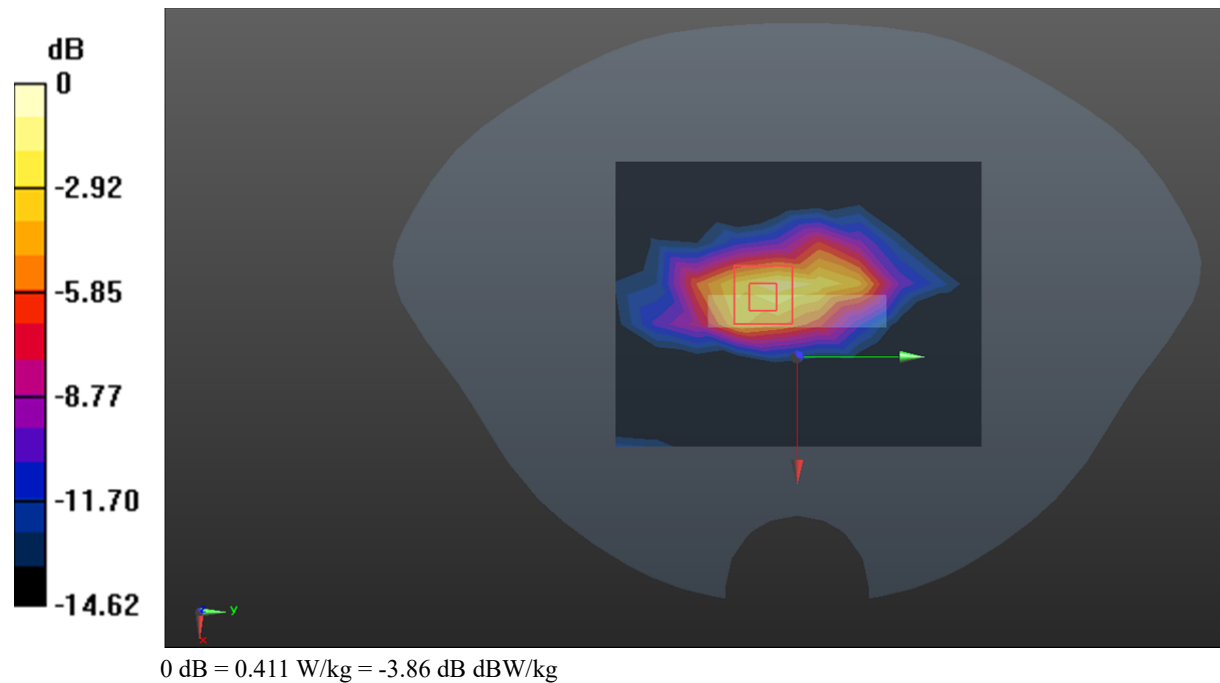

Test Plot 65#: LTE Band 2_Body Bottom_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.242$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.286 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

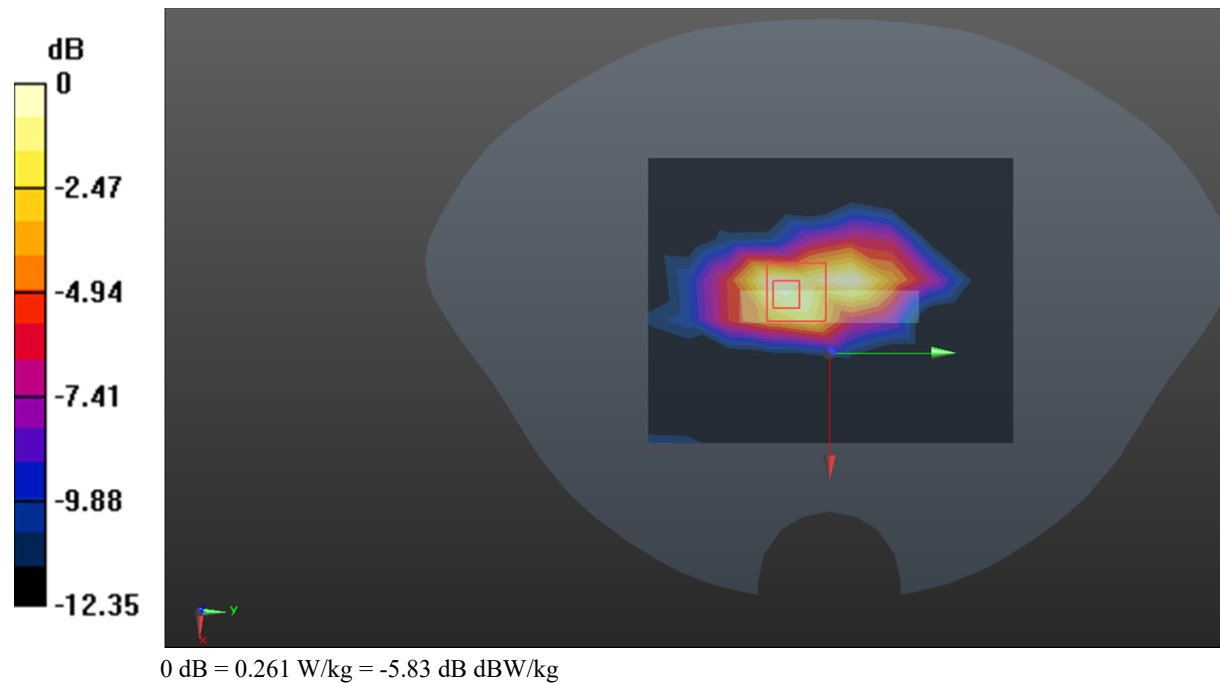

Test Plot 66#: LTE Band 5_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.145 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.610 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

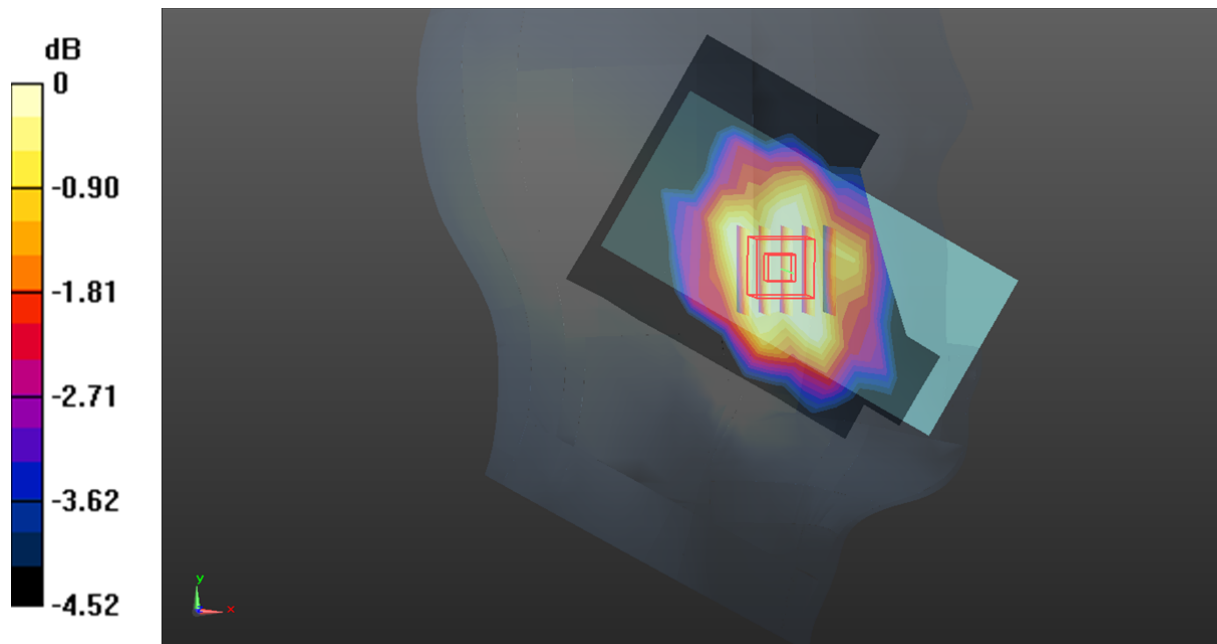

0 dB = 0.119 W/kg = -9.24 dB dBW/kg

Test Plot 67#: LTE Band 5_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=836.5$ MHz; $\sigma=0.926$ S/m; $\epsilon_r=41.548$; $\rho=1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.113 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.226 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.0953 W/kg

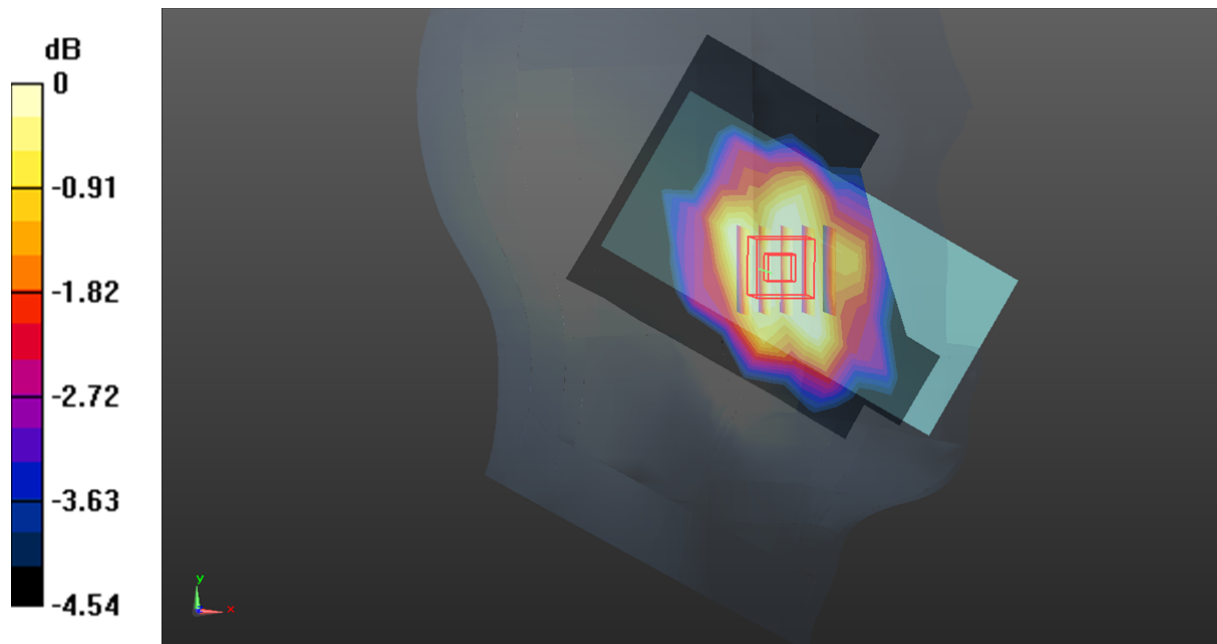

0 dB = 0.0953 W/kg = -10.21 dB dBW/kg

Test Plot 68#: LTE Band 5_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0884 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.794 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.0707 W/kg

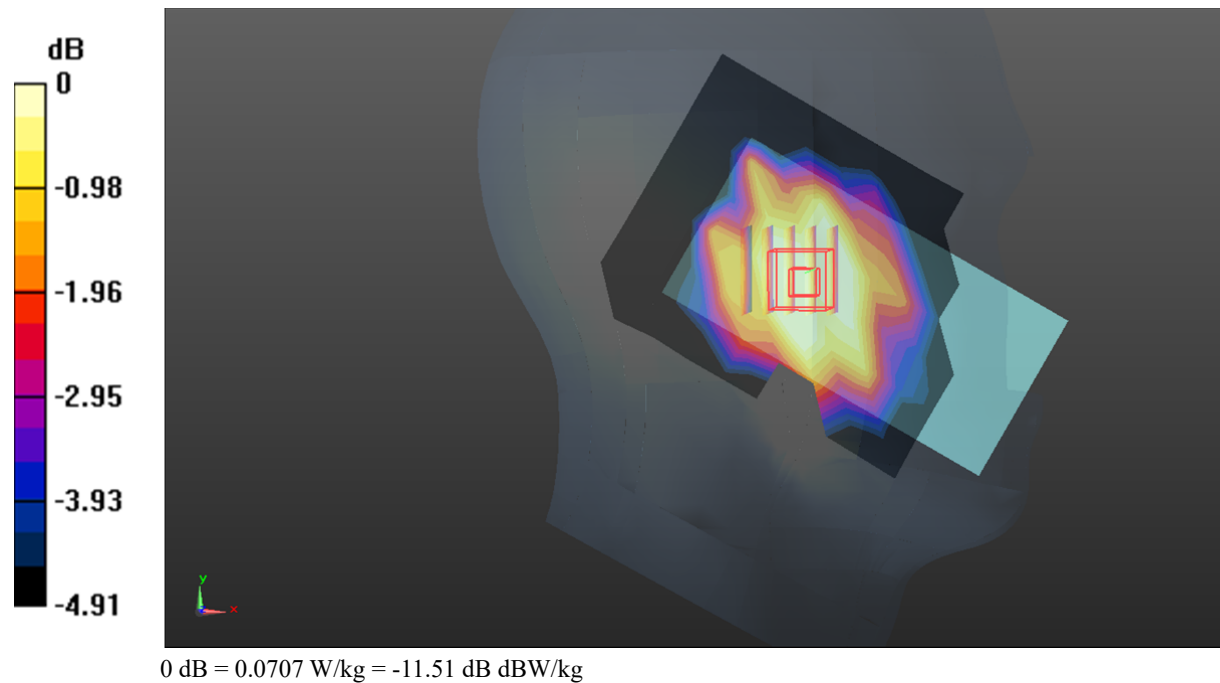

Test Plot 69#: LTE Band 5_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0696 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.289 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0567 W/kg

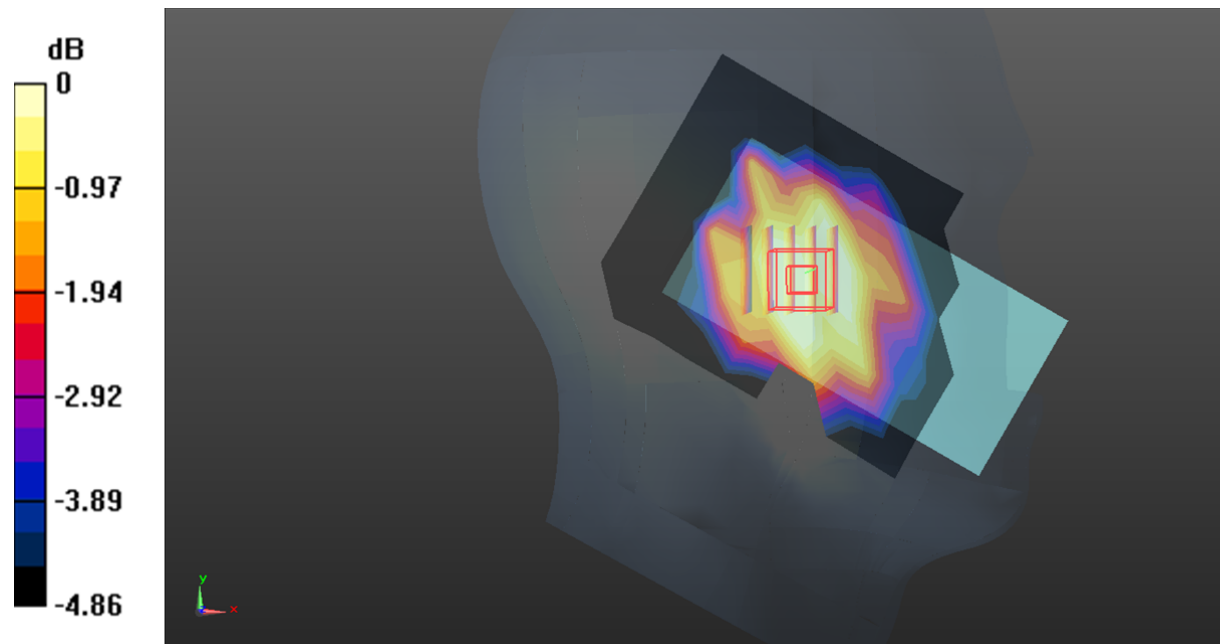

0 dB = 0.0567 W/kg = -12.46 dB dBW/kg

Test Plot 70#: LTE Band 5_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.514 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

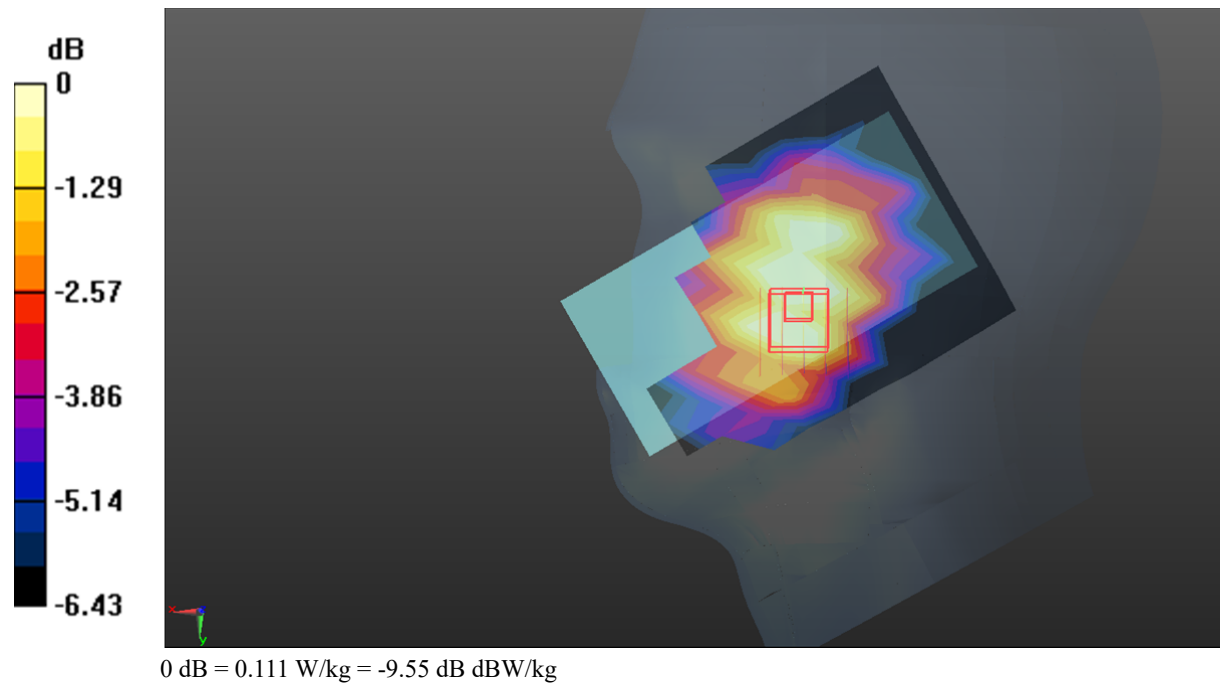

Test Plot 71#: LTE Band 5_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.101 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.505 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.0865 W/kg

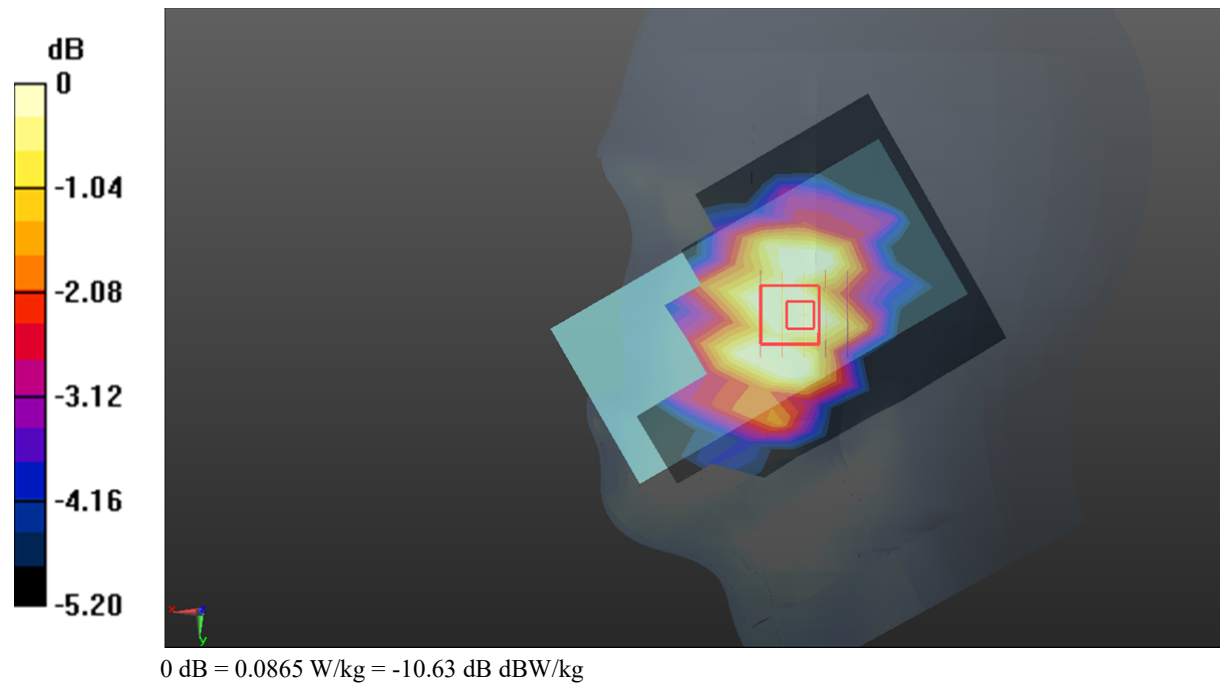

Test Plot 72#: LTE Band 5_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0957 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.882 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.0684 W/kg

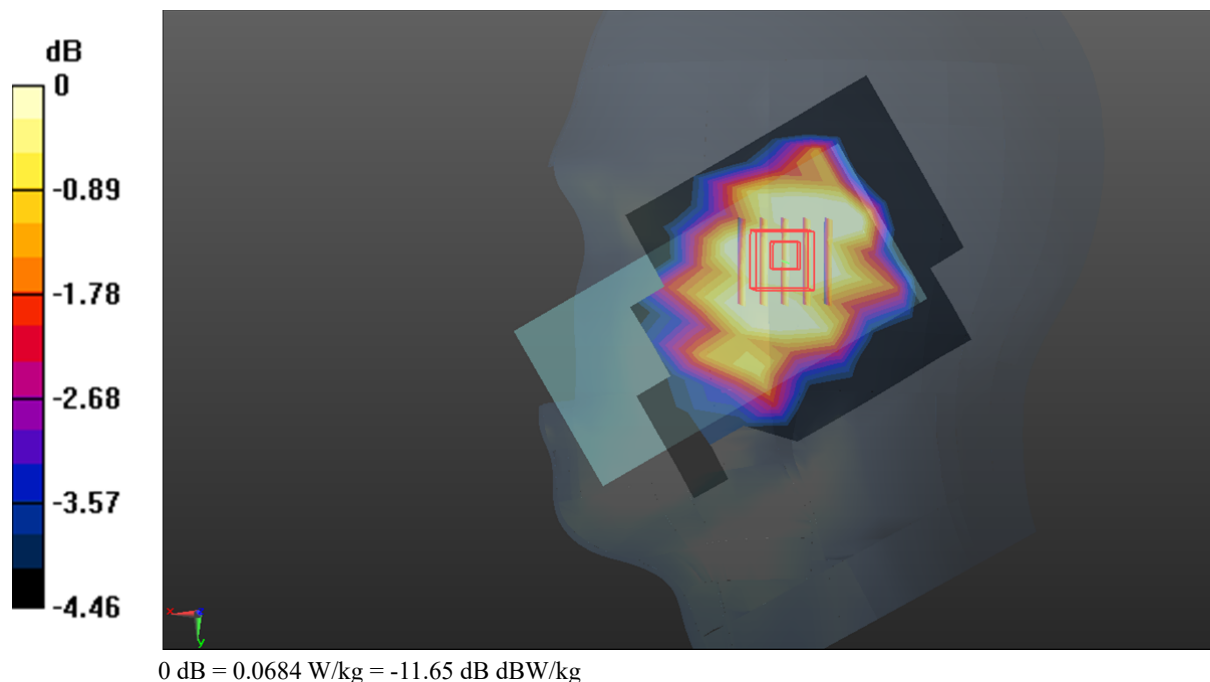

Test Plot 73#: LTE Band 5_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0683 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.955 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0562 W/kg

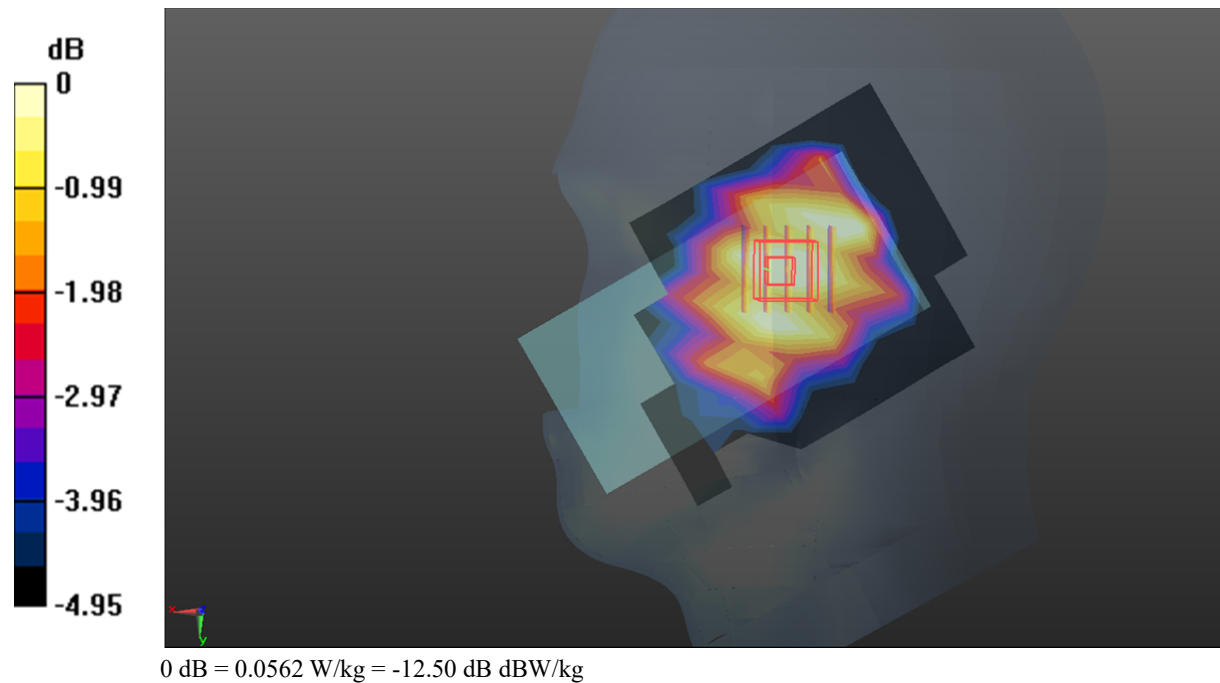

Test Plot 74#: LTE Band 5_Body Front_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.169 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.82 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

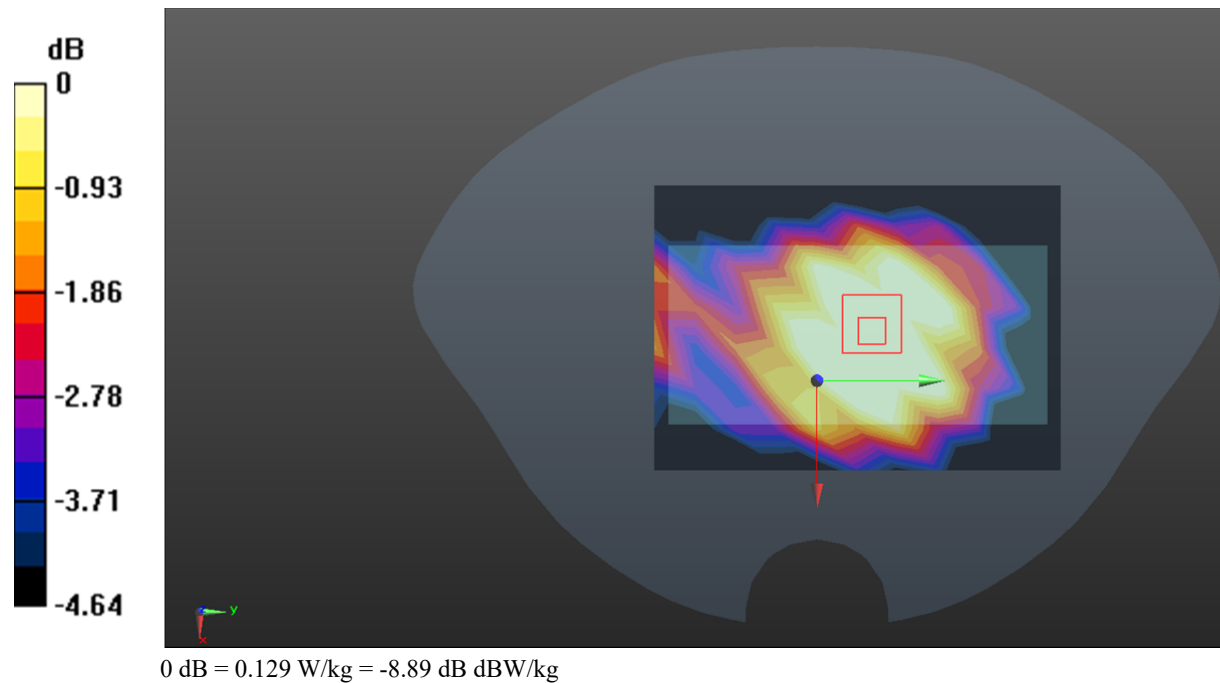

Test Plot 75#: LTE Band 5_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.548$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.127 W/kg

Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.863 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.0996 W/kg

