

# Exhibit 8 User's Manual

# SPB209A

## User's Manual

### Table of Content

<b>1</b>	<b>OVERVIEW .....</b>	<b>3</b>
1.1	Key Features .....	3
<b>2</b>	<b>APPLICATION INFORMATION.....</b>	<b>4</b>
2.1	Power Supply .....	4
2.1.1	Main supply.....	4
2.2	Clock Signals.....	4
2.3	Standby.....	4
2.4	Power save.....	4
2.5	Interfaces .....	5
2.5.1	Host Interface SDIO and UART .....	5
2.5.2	PCM Interface .....	5
2.5.3	PCM .....	5
2.5.4	Host Wake up.....	5
2.5.5	NFC Wake up.....	6
2.6	NFC Interface .....	6
2.7	RF interface.....	6
2.8	Operational Mode.....	6
2.8.1	General .....	6
2.8.2	STA operation using WPA Supplicant.....	7
<b>3</b>	<b>REGULATORY .....</b>	<b>11</b>
3.1	FCC (United States of America).....	11
3.2	ETSI (Europe).....	12

# 1 Overview


SPB209A is a complete WLAN/BT/NFC module with EMC shield, dual band antenna (WiFi and BT), prepared for application specific NFC antenna and ready for quick validation in a hosted environment. SPB209A-EVK has been used as an example in this User Manual. SPB209A-EVK features the SPB209A module mounted on a ready to run SD-card or SMD module for quick product turn-around or SPB209A evaluation. It provides an ultra-low power, high performance and feature rich client solution. It provides up to 433 Mbit/s data rate when operating in the OFDM mode and up to 11 Mbit/s data rate when operating in the DSSS/CCK mode.

SPB209A integrates RF, baseband/MAC, Bluetooth Package Engine, NFC, memory, RF filters, oscillator, antenna or SMA connector and EMC shield into a highly integrated and optimized module solution with high quality and reliability to a complete standalone solution with no need for external components.

This highly integrated solution is optimized for customer applications running on a Linux host platform. The host interface supports SDIO 3.0, High Speed UART and I2C. Internal RAM comprises both code and data memory eliminating the need for external RAM, Flash or ROM memory interfaces. MAC address, trimming values etc. are stored in the on board memory.

## 1.1 Key Features

- Support for 802.11a/b/g/n/ac
- Data Rates: 20MHz CH 1-86Mbps; 40MHz CH 13-200Mbps; 80MHz CH 29-433Mbps
- Modulation: BPSK, CCK, QPSK, 16QAM, 64QAM 256 QAM for WLAN and GFSK/ $\pi$ /4DQPSK/8DPSK/LE
- Open WEP, WPA/WPA2 encryption
- No external components except for the antenna options
- Low power consumption due to efficient PA design and power off mode
- An on-board 32 kHz oscillator maintains real time in power save mode, allows the high frequency clock to be turned off.
- Supporting STA operation mode
- Supports BT-WLAN coexistence and ISM-LTE coexistence
- Extensive DMA hardware support for data flow to reduce CPU load.
- Advanced power management for optimum power consumption at varying load.
- External interfaces 4 bit SDIO 3.0 for WLAN and UART/PCM for BT interface
- On-board High Frequency High Precision Oscillator 37.4 MHz
- Small footprint 14 x 14 mm (196 mm<sup>2</sup>) 41-pin
- RoHS Compliant

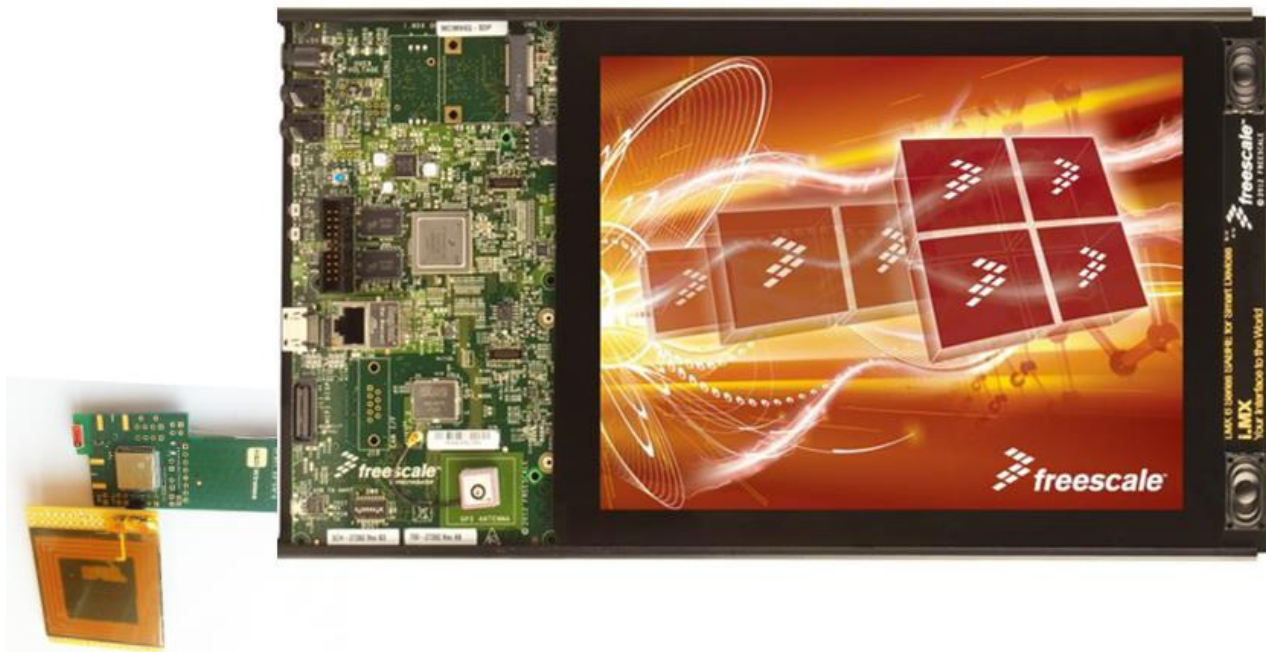

The SPB209A-EVK with SPB209A module and a custom NFC antenna connected to a i.MX6 DL Linux Host Platform.

## 2 APPLICATION INFORMATION

### 2.1 Power Supply

SPB209A should be powered by a single supply voltage on VDD of 3.3V. It generates all required digital and analog supply voltages with the built in DC-DC converter.

#### 2.1.1 Main supply

The main power is connected to VDD. The ripple on VDD should be less than 10mV p-p.

### 2.2 Clock Signals

The SPB209A requires no external clock signals. It has an internal high frequency oscillator with a high precision 37.4 MHz crystal and a low power oscillator to generate the required clock signals.

### 2.3 Standby

The Power Down pin (PDn) shall be set high during normal operation of either connectivity type. Pulling PDn pin low, sets SPB209A in Standby mode. This turns OFF most parts of the circuit and minimizes the current consumption. All I/O interface pins are set to predefined states (high, low or high-z) when in Standby mode.

To end Standby mode set PDn high and reload firmware.

### 2.4 Power save

Power save is an energy saving mode where SPB209A is only listening at regular intervals for the beacons transmitted from an access point and is set in sleep mode in between. During this sleep mode, firmware is kept in RAM but all not needed functions are turned off. Since the receive time is very short compared to the listening interval the average current consumption is reduced significantly.

The timing of the listening interval is based on the low power oscillator clock generated internally.

## 2.5 Interfaces

The SPB209A is equipped with a number of interfaces that can be set up in various ways by the value on GPIO2 and GPIO3 during boot, see section 2.5.1.

### 2.5.1 Host Interface SDIO and UART

The SDIO interface is SDIO 4-bit mode supporting up to 208MHz clock speed.

The High Speed UART interface default supporting Baud Rates from 1200 up to 2764800 bps, 8 bits, no parity, 1 stop bit.

Booth GPIO2 and GPIO3 have internal pull-up and only needs to be connected via a 100kOhm resistor to GND to be set low (0). For high level (1) the pin can be left unconnected. Table 2-1 shows the different options. The default is to leave GPIO2 and GPIO3 unconnected (11) and SDIO as host interface for all services.

Table 2-1: Host Interface Selection

GPIO2	GPIO3	WLAN Host Interface	BT/BLE/NFC Host Interface	FW Download interface	FW Download mode
0	0	SDIO	UART	SDIO	Serial
0	1	SDIO	SDIO	SDIO	Parallel
1	0	SDIO	UART	SDIO+UART	Parallel
1	1	SDIO	SDIO	SDIO	Serial

### 2.5.2 PCM Interface

### 2.5.3 PCM

PCM interface is used for BT audio and can operate in master or slave mode. The interface supports the following:

- 8, 13, 14, 15 or 16-bit samples
- 4 slots per frame with up to 16-bits per slot
- Long or short frame sync

### 2.5.4 Host Wake up

Wake up command via the SDIO interface. This is the normal wake up and is implemented in the FW.

There is options to use defined GPIO:s for Host Wake-up or opposite for SPB209A Wake-Up involving both WLAN, BT and NFC. Below table outline the options.

GPIO No.	Function
GPIO1	WLAN to Host Wake-up

GPIO13	BT/NFC to Host Wake-up
GPIO14	Host to WLAN Wake-up
GPIO15	Host to BT/NFC Wake-up

## 2.5.5 NFC Wake up

The NFC support contactless wake up functionality giving a trigger on a GPIO pin depending on the activities on the RF interface, when an antenna is connected to the NFC\_ANT P and \_N pins.

## 2.6 NFC Interface

The NFC Interface provides RFID and NFC functionality.

Supported features:

- Protocol support for ISO 14443A/B, ISO 15693, NFCIP-2, NFC-Forum, EMV contactless targets with a data rate up to 848 Kbps.
- Reader/Writer, Card Emulation and Peer-to-Peer (P2P) modes
- Low Power and sleep modes
- Programmable Carrier detection level for Card Emulation mode
- Programmable field detection level for RF anti-collision when operating as Reader or Active Target.

The NFC chip can also be accessed via the I2C interface pin SDA and SCL provided that the SPB209A device is powered. Support standard 100kHz and Fast 400kHz mode.

## 2.7 RF interface

The SPB209A EVK is prepared with a chip dual band antenna optimal for quick evaluation of the SPB209A RF module.

Designing custom application board with the SPB209A RF module the following RF parametrical requirements shall be considered:

- The RF output pin impedance is 50 ohm and shall be connected to an antenna with VSWR better than 2:1.
- The RF antenna gain must be maximum 1.8 dBi for the 2.4 GHz band and equal or less than 4.9 dBi for the 5GHz band.

A custom NFC antenna will need to be selected with a maximum size of 45 x 45 mm. NFC antenna is soldered down with two pin interface to the side of the SPB209A EVK.

## 2.8 Operational Mode

### 2.8.1 General

The SPB209A can be operated as STA using a Linux Host platform. The STA operation use the Linux WPA supplicant. RF testing and FCC/ETSI certification shall use equivalent software tools provided by H&D Wireless Sales up on request.

## 2.8.2 STA operation using WPA Supplicant

The wpa\_supplicant is the IEEE 802.1X/WPA component used in the client stations. The WPA supplicant can be configured to control the roaming and IEEE 802.11 authentication/association of the SPB209A device.

The configuration is usually performed in a configuration file, e.g. /etc/wpa\_supplicant.conf. It is also possible to directly issue commands to the WPA Supplicant, using a dedicated shell command, wpa\_cli. The usage of wpa\_cli is out of the scope of this document, but is described in detail in the WPA supplicant documentation [http://hostap.epitest.fi/wpa\\_supplicant/](http://hostap.epitest.fi/wpa_supplicant/).

Below list show supported WPA Supplicant network options

- Key management (key\_mgmt): WPA-PSK, NONE
- Group key encryption (group): CCMP, TKIP
- Pairwise key encryption (pairwise): CCMP, TKIP
- Protocol (proto): WPA, WPA2

Below list show examples of instructions on how to perform the following operations using WPA Supplicant

### 2.8.2.1 Connect to an unencrypted network

To simply instruct the WPA Supplicant to connect to any unencrypted network with ssid hdwireless, the following configuration file should be enough:

```
ctrl_interface=/var/run/wpa_supplicant

network={

    ssid="hdwireless"

    key_mgmt=NONE

}
```

The path to the configuration file and the interface name (owl0) should then be passed as parameters when starting the WPA Supplicant:

```
$ wpa_supplicant -Dwext -iowl0 -c /etc/wpa_supplicant.conf -B
```

The parameter -Dwext informs the WPA Supplicant that the standard Wireless Extensions interface should be used to control the network interface. For detailed information on how to configure and run the WPA supplicant, see the WPA supplicant documentation [http://hostap.epitest.fi/wpa\\_supplicant/](http://hostap.epitest.fi/wpa_supplicant/).

The WPA Supplicant will now periodically scan for networks until one that matches the configuration is found. Once found, a connection will be established. The WPA Supplicant will also handle reconnect if the connection is lost. Therefore, opposed to Wireless Tools, when using the WPA Supplicant, it is not necessary to perform manual scanning and network selection.

Note that the WPA Supplicant configuration can hold several networks and the WPA Supplicant will choose and roam amongst them. However, most importantly, the WPA supplicant implements the key negotiation with a WPA Authenticators.

### **2.8.2.2 Connect to a WPA protected network that uses TKIP encryption**

To connect to a network using WPA key management and TKIP encryption, the following network configuration can be specified in the configuration file:

```
ctrl_interface=/var/run/wpa_supplicant

network={

    ssid="hdwireless"

    key_mgmt=WPA-PSK

    group=TKIP

    pairwise=TKIP

    proto=WPA

    psk="hdwirelesskey"

}
```

The key configured on the access point should be "hdwirelesskey".

To force the WPA Supplicant to re-read its configuration file wpa\_cli can be used

```
$ wpa_cli reconfigure
```

One should remember that all wireless operations performed by both the WPA supplicant and Wireless Tools are done through the same Wireless Extensions API. This means that it will still be possible to e.g. check the connection status with iwconfig:

```
$ iwconfig

owl0      IEEE 802.11bg ESSID:"angr"

          Mode:Managed Frequency:2.422 GHz Access Point:68:7F:74:10:5B:4C

          Bit Rate=54 Mb/s

          Encryption key:472A-7E38-C465-D4EB-6DA7-BAE6-4700-0960-EDB1-40DE-
          18CC-5A02-4AE1-EA96-F3EE-142A Security mode:open
```



```
Power Management timeout:10

Link Quality=24/30 Signal level=-20 dBm Noise level=-44 dBm

Rx invalid nwid:0 Rx invalid crypt:0 Rx invalid frag:0

Tx excessive retries:0 Invalid misc:0 Missed beacon:0
```

Once connected, it is possible to obtain an ip address and perform the ping test:

```
$ udhcpc -i owl0

Sending discover...

Sending select for 192.168.2.102...

Lease of 192.168.2.102 obtained, lease time 172800

adding dns 192.168.2.1

$ ping -c 3 192.168.2.1
```

### **2.8.2.3 Connect to a WPA2 enabled network that uses CCMP encryption**

To connect to a network using the WPA2 protocol and CCMP encryption, the following network configuration can be specified in the configuration file:

```
ctrl_interface=/var/run/wpa_supplicant

network={

    ssid="hdwireless"

    key_mgmt=WPA-PSK

    group=CCMP

    pairwise=CCMP

    proto=WPA2

    psk="hdwirelesskey"

}
```

#### **2.8.2.4 Connect to a network that uses any WPA/WPA2 protocol and TKIP/CCMP encryption**

Note that several encryption parameters can be specified on a single line, allowing connections to a specific ssid using a range of encryption methods. The configuration file below should allow connections to the hdwireless access point regardless of whether the WPA or WPA2 protocol is used or whether CCMP or TKIP is used for pairwise and group key encryption. The actual encryption method used will be the most secure one that is supported by the access point.

```
ctrl_interface=/var/run/wpa_supplicant

network={

    ssid="hdwireless"

    key_mgmt=WPA-PSK

    group=TKIP CCMP

    pairwise=TKIP CCMP

    proto=WPA WPA2

    psk="hdwirelesskey"

}
```

#### **2.8.2.5 Connect to a network with hidden SSID**

To allow the wpa\_supplicant to connect to hidden networks, the scan\_ssid parameter must be added to the network configuration.

```
ctrl_interface=/var/run/wpa_supplicant

network={

    ssid="hdwireless"

    scan_ssid=1

    key_mgmt=WPA-PSK

    group=TKIP CCMP

    pairwise=TKIP CCMP

    proto=WPA WPA2

    psk="hdwirelesskey"

}
```

}

### 2.8.2.6 List of supported WPA Supplicant network options

Key management (key\_mgmt): WPA-PSK, NONE

Group key encryption (group): CCMP, TKIP

Pairwise key encryption (pairwise): CCMP, TKIP

Protocol (proto): WPA, WPA2

## 3 Regulatory

Country	Approval authority	Regulatory	Frequency band
USA	FCC	FCC ID: X02SPB209A-L	2.412 GHz -2.462 GHz 5.250 GHz – 5.725 GHz
Europe	National	ETSI/EN	2.412 GHz -2.4835 GHz 5.150 GHz – 5.725 GHz

Table 3-1: Regulatory standards

### 3.1 FCC (United States of America)

This equipment complies with Part 15 of the FCC rules and regulations.

To fulfill FCC Certification requirements, an OEM manufacturer must comply with the following regulations:

1. The modular transmitter must be labeled with its own FCC ID number, and, if the FCC ID is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following:

Example of label required for OEM product containing SPB209A module

<b>Contains FCCID: X02SPB209A-L</b>
The enclosed device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (i) this device may not cause harmful interference and (ii) this device must accept any interference received, including interference that may cause undesired operation.

2. Only antennas approved may be used with the SPB209A module. The SPB209A module may be integrated with custom design antennas which OEM installer must authorize following the FCC 15.21 requirements.

**IMPORTANT:** This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation (FCC 15.19).

The internal / external antenna(s) used for this mobile transmitter must provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device is approved as a mobile device with respect to RF exposure compliance, and may only be marketed to OEM installers. Use in portable exposure conditions (FCC 2.1093) requires separate equipment authorization.

**IMPORTANT:** Modifications not expressly approved by this company could void the user's authority to operate this equipment (FCC section 15.21).

**IMPORTANT:** The finished product is required to comply with all applicable FCC equipment authorizations regulations, requirements and equipment functions not associated with the transmitter module portion. Compliance for unintentional radiators (Part 15 Subpart B "Unintentional Radiators"), such as digital devices, computer peripherals, radio receivers, etc. has to be demonstrated.

## 3.2 ETSI (Europe)

The SPB209A module has been certified for use in European union countries according to ETSI EN 300 328 (Electromagnetic compatibility and Radio spectrum matters for equipment operating in the 2,4 GHz ISM band using spread spectrum modulation techniques). This standard is harmonized within the European Union and covering essential requirements under article 3.2 of the R&TTE-directive.

If the SPB209A module are incorporated into a product, the manufacturer must ensure compliance of the final end-user product to the European harmonized EMC and low voltage/safety standards. A declaration of conformity must be issued for the product including compliance references to these standards. Underlying the declaration of conformity a technical construction file (TCF), including all relevant test reports and technical documentation, must be issued and kept on file as described in Annex II of the R&TTE-directive.

Furthermore, the manufacturer must maintain a copy of the SPB209A module documentation and ensure the final product does not exceed the specified power ratings, antenna specifications, and/or installation requirements as specified in the user manual. If any of these specifications are exceeded in the final product, a complete re-test must be made in order to comply with all relevant standards as basis for CE-marking. A submission to notified body must be used only if deviations from standards have been found or if non-harmonized standards have been used.