



# TEST REPORT

Applicant Name : Fanvil Technology Co., LTD.  
Address : 10/F Block A, Dualshine Global Science Innovation, Honglang  
North 2nd Road, Bao'an District, Shenzhen, 518101, China  
Report Number : SZNS220815-37077E-RF-00A  
FCC ID: 2APPZ-W611W

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Type: Portable Wi-Fi Phone  
Model No.: W611W  
Multiple Model(s) No.: N/A  
Trade Mark: **LINKVIL**  
Date Received: 2022/08/15  
Report Date: 2022/09/28

|              |       |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

## Approved By:

*Andy Yu*

*Candy Li*

Andy Yu  
EMC Engineer

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

|                                                                         |           |
|-------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                         | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                | 4         |
| OBJECTIVE .....                                                         | 4         |
| TEST METHODOLOGY .....                                                  | 4         |
| MEASUREMENT UNCERTAINTY.....                                            | 5         |
| TEST FACILITY .....                                                     | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                   | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                 | 6         |
| EUT EXERCISE SOFTWARE .....                                             | 6         |
| SPECIAL ACCESSORIES.....                                                | 6         |
| EQUIPMENT MODIFICATIONS .....                                           | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                | 6         |
| EXTERNAL I/O CABLE.....                                                 | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                       | 7         |
| <b>SUMMARY OF TEST RESULTS.....</b>                                     | <b>9</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                        | <b>10</b> |
| <b>§1.1307 &amp; §2.1093 – RF EXPOSURE .....</b>                        | <b>12</b> |
| APPLICABLE STANDARD .....                                               | 12        |
| <b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>                           | <b>13</b> |
| APPLICABLE STANDARD .....                                               | 13        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                    | 13        |
| <b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>              | <b>14</b> |
| APPLICABLE STANDARD .....                                               | 14        |
| EUT SETUP .....                                                         | 14        |
| EMI TEST RECEIVER SETUP.....                                            | 14        |
| TEST PROCEDURE .....                                                    | 14        |
| TRANSD FACTOR & MARGIN CALCULATION.....                                 | 15        |
| TEST DATA .....                                                         | 15        |
| <b>FCC §15.205, §15.209 &amp; §15.247(D) – RADIATED EMISSIONS .....</b> | <b>24</b> |
| APPLICABLE STANDARD .....                                               | 24        |
| EUT SETUP .....                                                         | 24        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                       | 25        |
| TEST PROCEDURE .....                                                    | 25        |
| FACTOR & MARGIN CALCULATION .....                                       | 25        |
| TEST DATA .....                                                         | 25        |
| <b>FCC §15.247(A) (1)-CHANNEL SEPARATION TEST .....</b>                 | <b>37</b> |
| APPLICABLE STANDARD .....                                               | 37        |
| TEST PROCEDURE .....                                                    | 37        |
| TEST DATA .....                                                         | 37        |

|                                                                                         |           |
|-----------------------------------------------------------------------------------------|-----------|
| <b>FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH .....</b> | <b>38</b> |
| APPLICABLE STANDARD .....                                                               | 38        |
| TEST PROCEDURE .....                                                                    | 38        |
| TEST DATA .....                                                                         | 39        |
| <b>FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST .....</b>                  | <b>40</b> |
| APPLICABLE STANDARD .....                                                               | 40        |
| TEST PROCEDURE .....                                                                    | 40        |
| TEST DATA .....                                                                         | 40        |
| <b>FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....</b>                   | <b>41</b> |
| APPLICABLE STANDARD .....                                                               | 41        |
| TEST PROCEDURE .....                                                                    | 41        |
| TEST DATA .....                                                                         | 41        |
| <b>FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>                         | <b>42</b> |
| APPLICABLE STANDARD .....                                                               | 42        |
| TEST PROCEDURE .....                                                                    | 42        |
| TEST DATA .....                                                                         | 42        |
| <b>FCC §15.247(D) - BAND EDGES TESTING.....</b>                                         | <b>43</b> |
| APPLICABLE STANDARD .....                                                               | 43        |
| TEST PROCEDURE .....                                                                    | 43        |
| TEST DATA .....                                                                         | 43        |
| <b>APPENDIX .....</b>                                                                   | <b>44</b> |
| APPENDIX A: 20dB EMISSION BANDWIDTH.....                                                | 44        |
| APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....                                            | 48        |
| APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....                                        | 52        |
| APPENDIX D: CARRIER FREQUENCY SEPARATION .....                                          | 56        |
| APPENDIX E: TIME OF OCCUPANCY .....                                                     | 58        |
| APPENDIX F: NUMBER OF HOPPING CHANNELS .....                                            | 68        |
| APPENDIX G: BAND EDGE MEASUREMENTS .....                                                | 70        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                     |                                                                                                                                    |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range                     | Bluetooth: 2402~2480MHz                                                                                                            |
| Maximum conducted Peak output power | Bluetooth: 8.71dBm                                                                                                                 |
| Modulation Technique                | Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK                                                                                             |
| Antenna Specification*              | 1.8 dBi (provided by the applicant)                                                                                                |
| Voltage Range                       | DC 3.8V from battery or DC 5V from adapter                                                                                         |
| Sample serial number                | SZNS220815-37077E-RF-S1 for Conducted and Radiated Emissions<br>SZNS220815-37077E-RF-S2 for RF Conducted Test<br>(Assigned by ATC) |
| Sample/EUT Status                   | Good condition                                                                                                                     |
| Adapter 1 information               | Model: AS1201A-0502000USL<br>Input: AC100-240V,50/60Hz,0.35A MAX<br>Output: DC5V,2000mA                                            |
| Adapter 2 information               | Model: GQ12-050200-AU<br>Input: AC100-240V,50/60Hz,0.4A Max<br>Output: DC5V,2.0A                                                   |

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

| Parameter                    |                 | Uncertainty |
|------------------------------|-----------------|-------------|
| Occupied Channel Bandwidth   |                 | 5%          |
| RF output power, conducted   |                 | 0.73dB      |
| Unwanted Emission, conducted |                 | 1.6dB       |
| AC Line Conducted emission   |                 | 2.72dB      |
| Emissions,<br>Radiated       | 30MHz - 1GHz    | 4.28dB      |
|                              | 1GHz - 18GHz    | 4.98dB      |
|                              | 18GHz - 26.5GHz | 5.06dB      |
| Temperature                  |                 | 1°C         |
| Humidity                     |                 | 6%          |
| Supply voltages              |                 | 0.4%        |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“Tera Term”\* exercise software was used and the power level is 9\*, which provided by manufacturer.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

| Manufacturer | Description | Model   | Serial Number |
|--------------|-------------|---------|---------------|
| Unknown      | Earphone    | Unknown | Unknown       |


### External I/O Cable

| Cable Description                   | Length (m) | From Port | To      |
|-------------------------------------|------------|-----------|---------|
| Un-shielding Un-Detachable DC Cable | 1.5        | EUT       | Adapter |


**Block Diagram of Test Setup**

Direct charging:

For conducted emission:

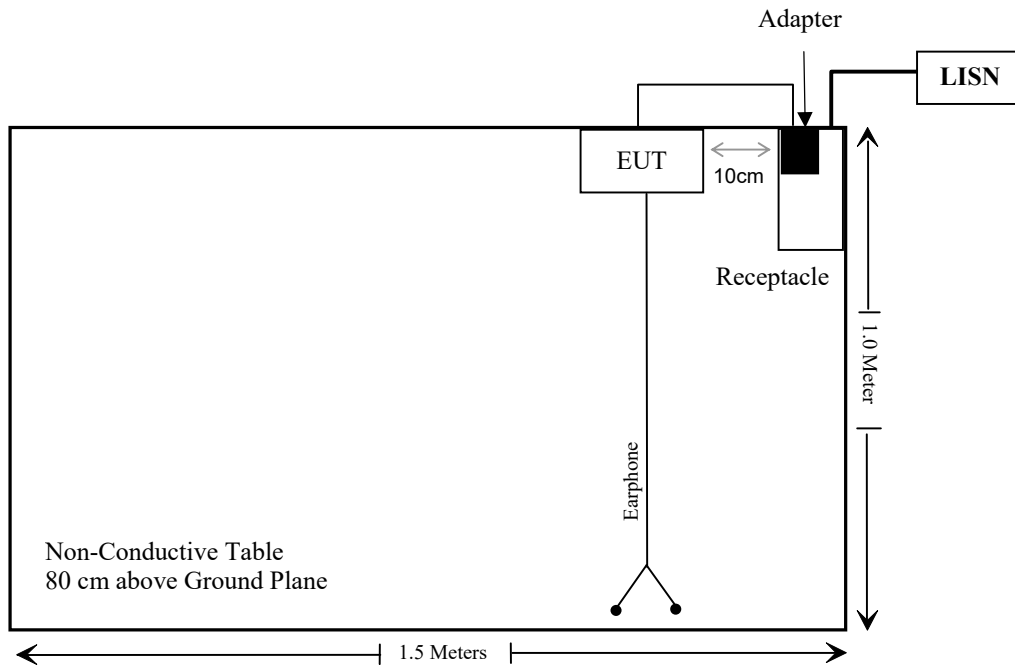


For Radiated Emissions:

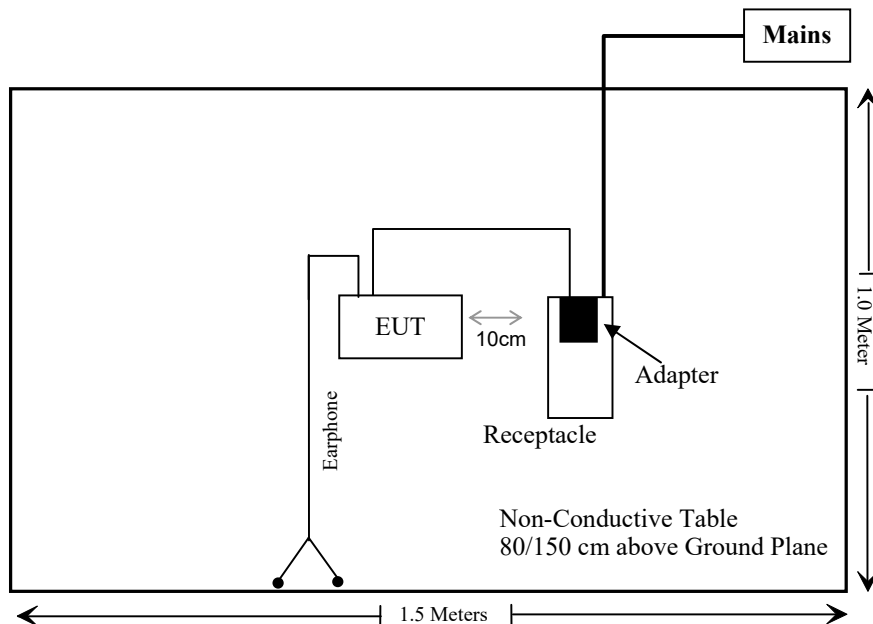


Desktop(base) charging:

For conducted emission:

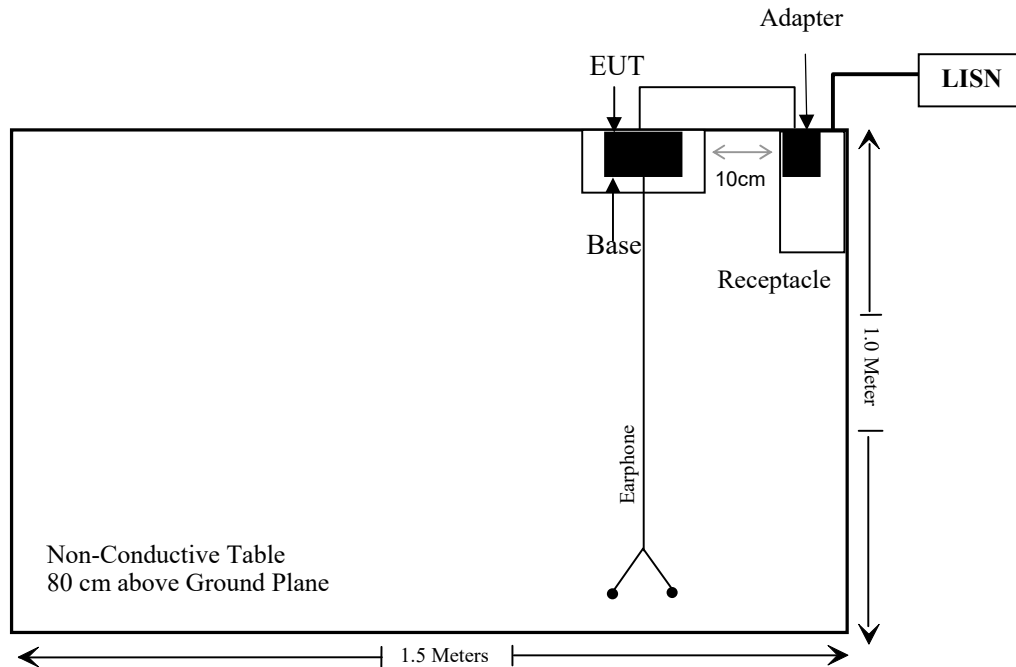

For Radiated Emissions:

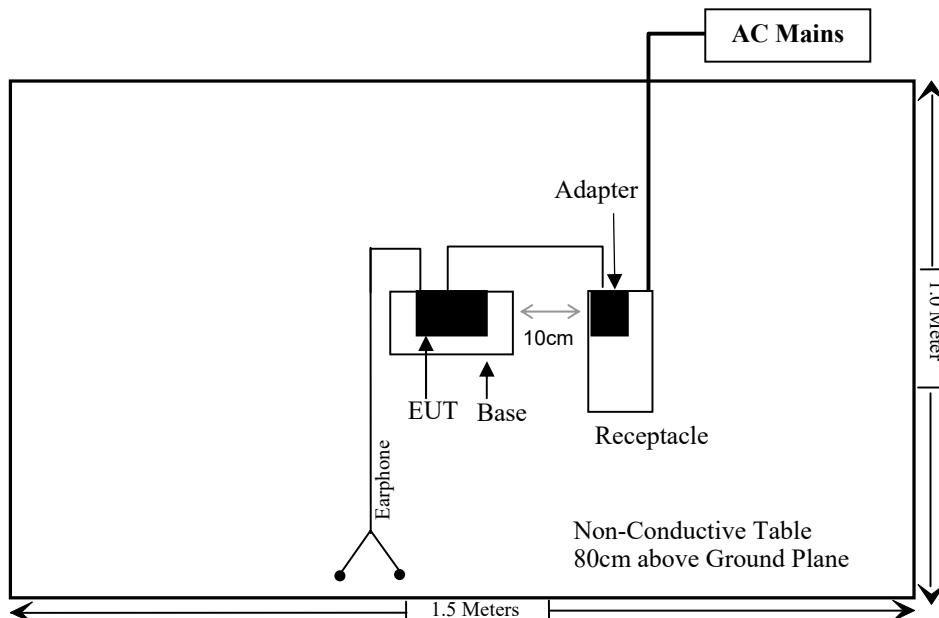



**SUMMARY OF TEST RESULTS**

| FCC Rules                     | Description of Test                               | Result    |
|-------------------------------|---------------------------------------------------|-----------|
| §1.1307 & §2.1093             | RF Exposure                                       | Compliant |
| §15.203                       | Antenna Requirement                               | Compliant |
| §15.207(a)                    | AC Line Conducted Emissions                       | Compliant |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions                                | Compliant |
| §15.247(a)(1)                 | 20 dB Emission Bandwidth & 99% Occupied Bandwidth | Compliant |
| §15.247(a)(1)                 | Channel Separation Test                           | Compliant |
| §15.247(a)(1)(iii)            | Time of Occupancy (Dwell Time)                    | Compliant |
| §15.247(a)(1)(iii)            | Quantity of hopping channel Test                  | Compliant |
| §15.247(b)(1)                 | Peak Output Power Measurement                     | Compliant |
| §15.247(d)                    | Band edges                                        | Compliant |

**TEST EQUIPMENT LIST**

| Manufacturer                                     | Description       | Model             | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------------------------|-------------------|-------------------|---------------|------------------|----------------------|
| Conducted emission test                          |                   |                   |               |                  |                      |
| Rohde& Schwarz                                   | EMI Test Receiver | ESCI              | 100784        | 2021/12/13       | 2022/12/12           |
| Rohde & Schwarz                                  | L.I.S.N.          | ENV216            | 101314        | 2021/12/13       | 2022/12/12           |
| Anritsu Corp                                     | 50 Coaxial Switch | MP59B             | 6100237248    | 2021/12/13       | 2022/12/12           |
| Unknown                                          | RF Coaxial Cable  | No.17             | N0350         | 2021/12/14       | 2022/12/13           |
| Conducted Emission Test Software: e3 19821b (V9) |                   |                   |               |                  |                      |
| Radiated emission test                           |                   |                   |               |                  |                      |
| Rohde& Schwarz                                   | Test Receiver     | ESR               | 102725        | 2021/12/13       | 2022/12/12           |
| Rohde&Schwarz                                    | Spectrum Analyzer | FSV40             | 101949        | 2021/12/13       | 2022/12/12           |
| SONOMA INSTRUMENT                                | Amplifier         | 310 N             | 186131        | 2021/11/09       | 2022/11/08           |
| A.H. Systems, inc.                               | Preamplifier      | PAM-0118P         | 135           | 2021/11/09       | 2022/11/08           |
| Quinstar                                         | Amplifier         | QLW-18405536-J0   | 15964001002   | 2021/11/11       | 2022/11/10           |
| Schwarzbeck                                      | Bilog Antenna     | VULB9163          | 9163-323      | 2021/07/06       | 2024/07/05           |
| Schwarzbeck                                      | Horn Antenna      | BBHA9120D         | 9120D-1067    | 2020/01/05       | 2023/01/04           |
| Schwarzbeck                                      | HORN ANTENNA      | BBHA9170          | 9170-359      | 2020/01/05       | 2023/01/04           |
| Radiated Emission Test Software: e3 19821b (V9)  |                   |                   |               |                  |                      |
| Unknown                                          | RF Coaxial Cable  | No.10             | N050          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.11             | N1000         | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.12             | N040          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.13             | N300          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.14             | N800          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.15             | N600          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.16             | N650          | 2021/12/14       | 2022/12/13           |
| Wainwright                                       | High Pass Filter  | WHKX3.6/18 G-10SS | 5             | 2021/12/14       | 2022/12/13           |

| Manufacturer      | Description       | Model    | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|-------------------|----------|---------------|------------------|----------------------|
| RF conducted test |                   |          |               |                  |                      |
| Rohde&Schwarz     | Spectrum Analyzer | FSV-40   | 101590        | 2022/01/19       | 2023/01/18           |
| Tonscend          | RF Control Unit   | JS0806-2 | 19G8060182    | 2021/10/26       | 2022/10/25           |
| Unknown           | RF Cable          | Unknown  | 1             | Each time        | /                    |

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **§1.1307 & §2.1093 – RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1307 and §2.1093.

### **Measurement Result**

Please refer to SAR test report: SZNS220815-37077E-SA

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is 1.8dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

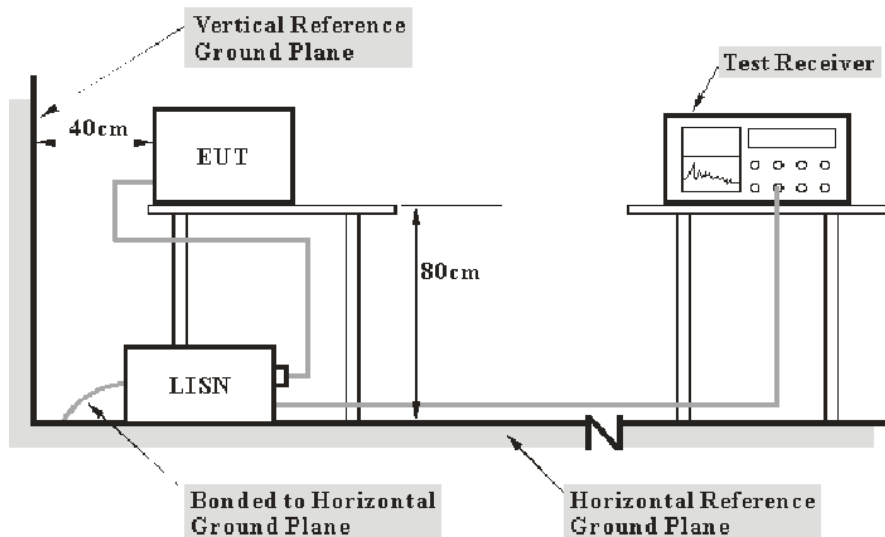

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 24~25 °C  |
| Relative Humidity: | 41~42 %   |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Jason from 2022-08-23 to 2022-09-28.*

*EUT operation mode: Transmitting (the worst case is 8DPSK Mode, Low channel)*

For adapter AS1201A-0502000USL:


AC 120V/60 Hz, Line

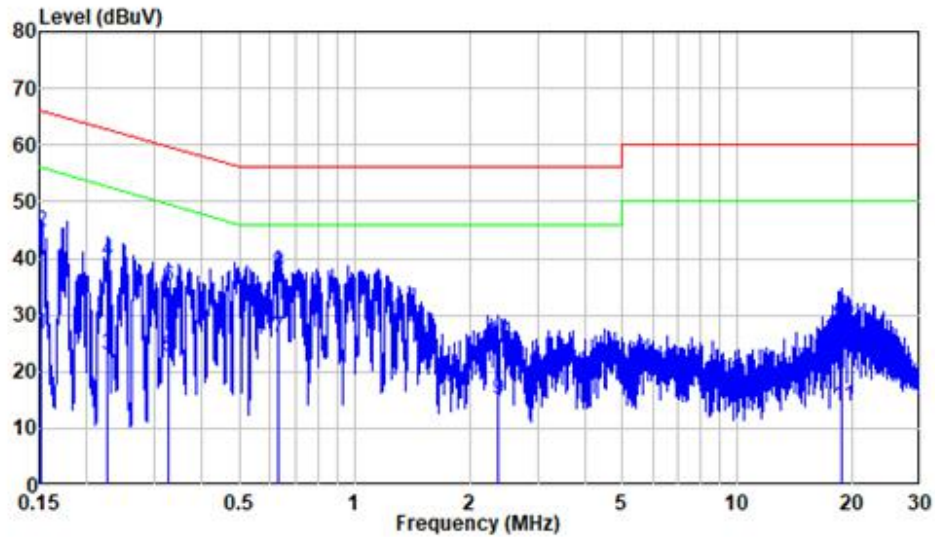

Site : Shielding Room  
Condition: Line  
Job No. : SZNS220815-37077E-RF  
Mode : Charging + BT Transmitting  
Power : AC 120V 60Hz  
Note : Desktop Charging

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.152  | 9.80   | 16.80         | 26.60 | 55.91         | -29.31        | Average |
| 2  | 0.152  | 9.80   | 34.90         | 44.70 | 65.91         | -21.21        | QP      |
| 3  | 0.227  | 9.80   | 13.11         | 22.91 | 52.57         | -29.66        | Average |
| 4  | 0.227  | 9.80   | 29.68         | 39.48 | 62.57         | -23.09        | QP      |
| 5  | 0.327  | 9.80   | 12.78         | 22.58 | 49.54         | -26.96        | Average |
| 6  | 0.327  | 9.80   | 25.27         | 35.07 | 59.54         | -24.47        | QP      |
| 7  | 0.635  | 9.81   | 16.18         | 25.99 | 46.00         | -20.01        | Average |
| 8  | 0.635  | 9.81   | 27.52         | 37.33 | 56.00         | -18.67        | QP      |
| 9  | 2.358  | 9.82   | 5.35          | 15.17 | 46.00         | -30.83        | Average |
| 10 | 2.358  | 9.82   | 15.17         | 24.99 | 56.00         | -31.01        | QP      |
| 11 | 18.783 | 9.99   | 3.78          | 13.77 | 50.00         | -36.23        | Average |
| 12 | 18.783 | 9.99   | 18.16         | 28.15 | 60.00         | -31.85        | QP      |

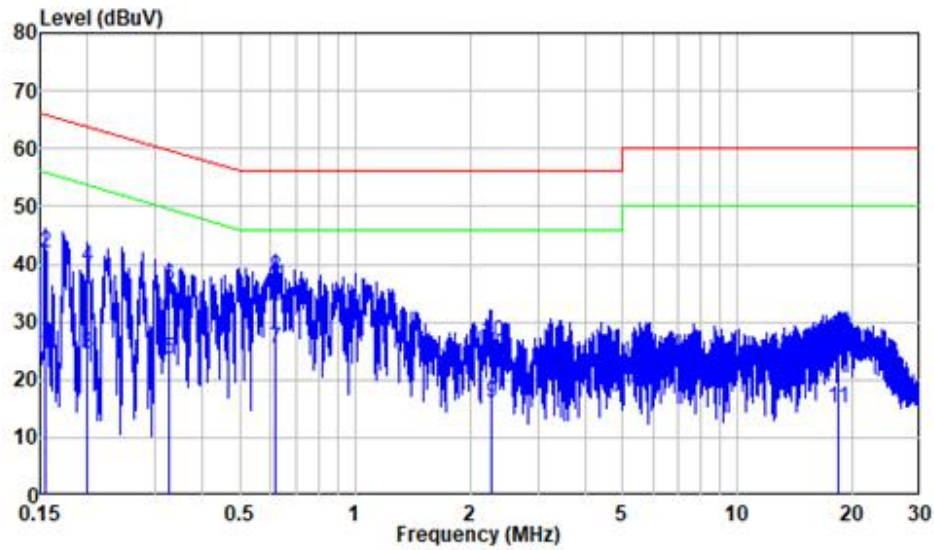


**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
 Condition: Neutral  
 Job No. : SZNS220815-37077E-RF  
 Mode : Charging + BT Transmitting  
 Power : AC 120V 60Hz  
 Note : Desktop Charging


|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.154  | 9.80   | 14.59         | 24.39 | 55.76         | -31.37        | Average |
| 2  | 0.154  | 9.80   | 32.12         | 41.92 | 65.76         | -23.84        | QP      |
| 3  | 0.200  | 9.80   | 14.65         | 24.45 | 53.62         | -29.17        | Average |
| 4  | 0.200  | 9.80   | 29.84         | 39.64 | 63.62         | -23.98        | QP      |
| 5  | 0.327  | 9.80   | 13.88         | 23.68 | 49.52         | -25.84        | Average |
| 6  | 0.327  | 9.80   | 26.45         | 36.25 | 59.52         | -23.27        | QP      |
| 7  | 0.619  | 9.81   | 15.66         | 25.47 | 46.00         | -20.53        | Average |
| 8  | 0.619  | 9.81   | 27.80         | 37.61 | 56.00         | -18.39        | QP      |
| 9  | 2.264  | 9.82   | 6.17          | 15.99 | 46.00         | -30.01        | Average |
| 10 | 2.264  | 9.82   | 16.81         | 26.63 | 56.00         | -29.37        | QP      |
| 11 | 18.256 | 10.08  | 4.98          | 15.06 | 50.00         | -34.94        | Average |
| 12 | 18.256 | 10.08  | 17.26         | 27.34 | 60.00         | -32.66        | QP      |

## AC 120V/60 Hz, Line

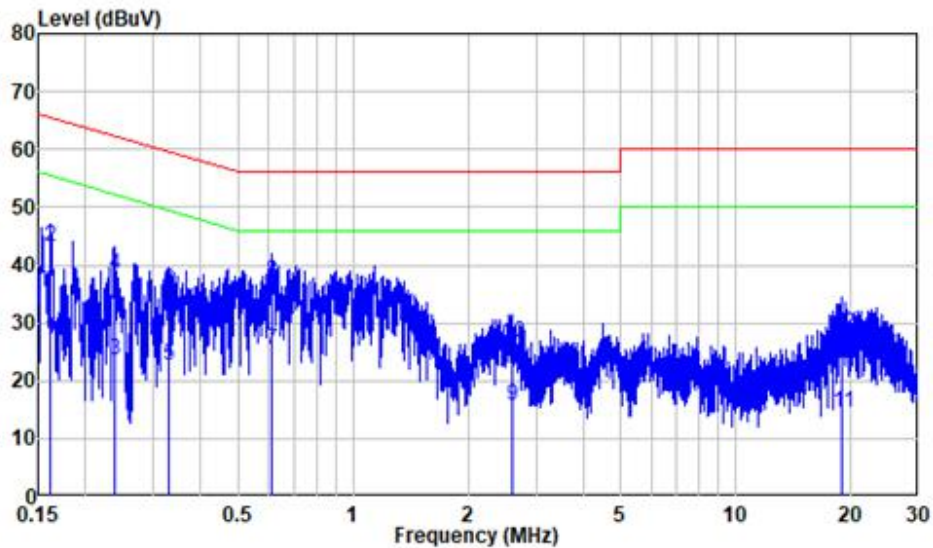

Site : Shielding Room  
 Condition: Line  
 Job No. : SZNS220815-37077E-RF  
 Mode : Charging + BT Transmitting  
 Power : AC 120V 60Hz  
 Note : Direct Charging

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.162  | 9.80   | 17.37         | 27.17 | 55.37         | -28.20        | Average |
| 2  | 0.162  | 9.80   | 33.43         | 43.23 | 65.37         | -22.14        | QP      |
| 3  | 0.237  | 9.80   | 13.63         | 23.43 | 52.20         | -28.77        | Average |
| 4  | 0.237  | 9.80   | 28.48         | 38.28 | 62.20         | -23.92        | QP      |
| 5  | 0.329  | 9.80   | 12.84         | 22.64 | 49.46         | -26.82        | Average |
| 6  | 0.329  | 9.80   | 25.88         | 35.68 | 59.46         | -23.78        | QP      |
| 7  | 0.613  | 9.81   | 15.44         | 25.25 | 46.00         | -20.75        | Average |
| 8  | 0.613  | 9.81   | 27.43         | 37.24 | 56.00         | -18.76        | QP      |
| 9  | 2.612  | 9.83   | 5.89          | 15.72 | 46.00         | -30.28        | Average |
| 10 | 2.612  | 9.83   | 16.63         | 26.46 | 56.00         | -29.54        | QP      |
| 11 | 18.971 | 9.99   | 4.37          | 14.36 | 50.00         | -35.64        | Average |
| 12 | 18.971 | 9.99   | 18.13         | 28.12 | 60.00         | -31.88        | QP      |

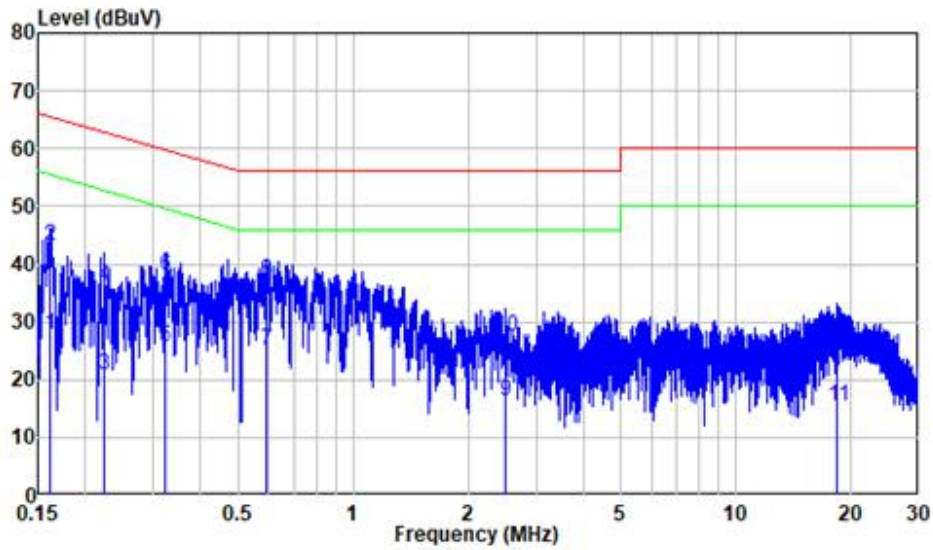
**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
 Condition: Neutral  
 Job No. : SZNS220815-37077E-RF  
 Mode : Charging + BT Transmitting  
 Power : AC 120V 60Hz  
 Note : Direct Charging

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.162  | 9.80   | 18.04         | 27.84 | 55.35         | -27.51        | Average |
| 2  | 0.162  | 9.80   | 33.40         | 43.20 | 65.35         | -22.15        | QP      |
| 3  | 0.224  | 9.80   | 11.08         | 20.88 | 52.67         | -31.79        | Average |
| 4  | 0.224  | 9.80   | 26.56         | 36.36 | 62.67         | -26.31        | QP      |
| 5  | 0.324  | 9.80   | 15.96         | 25.76 | 49.60         | -23.84        | Average |
| 6  | 0.324  | 9.80   | 28.25         | 38.05 | 59.60         | -21.55        | QP      |
| 7  | 0.595  | 9.81   | 15.20         | 25.01 | 46.00         | -20.99        | Average |
| 8  | 0.595  | 9.81   | 27.36         | 37.17 | 56.00         | -18.83        | QP      |
| 9  | 2.503  | 9.82   | 6.42          | 16.24 | 46.00         | -29.76        | Average |
| 10 | 2.503  | 9.82   | 17.75         | 27.57 | 56.00         | -28.43        | QP      |
| 11 | 18.414 | 10.08  | 5.22          | 15.30 | 50.00         | -34.70        | Average |
| 12 | 18.414 | 10.08  | 17.47         | 27.55 | 60.00         | -32.45        | QP      |

For adapter GQ12-050200-AU:


AC 120V/60 Hz, Line

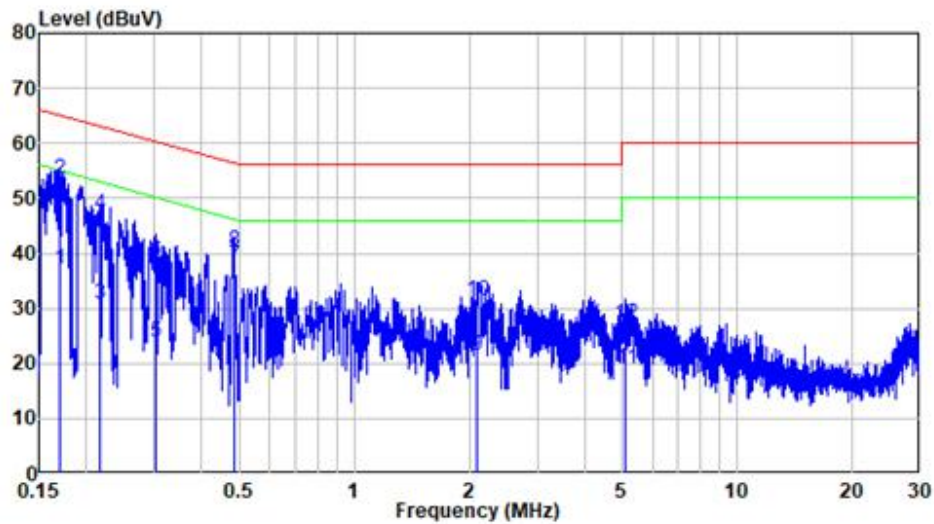

Site : Shielding Room  
Condition: Line  
Job No. : SZNS220815-37077E-RF  
Mode : BT  
Power : AC 120V 60Hz  
Note : Desktop Charging

|    | Freq  | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|-------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz   | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.171 | 9.80   | 27.26         | 37.06 | 54.93         | -17.87        | Average |
| 2  | 0.171 | 9.80   | 43.50         | 53.30 | 64.93         | -11.63        | QP      |
| 3  | 0.218 | 9.80   | 21.07         | 30.87 | 52.91         | -22.04        | Average |
| 4  | 0.218 | 9.80   | 37.32         | 47.12 | 62.91         | -15.79        | QP      |
| 5  | 0.302 | 9.80   | 14.13         | 23.93 | 50.19         | -26.26        | Average |
| 6  | 0.302 | 9.80   | 28.80         | 38.60 | 60.19         | -21.59        | QP      |
| 7  | 0.484 | 9.80   | 27.82         | 37.62 | 46.27         | -8.65         | Average |
| 8  | 0.484 | 9.80   | 30.59         | 40.39 | 56.27         | -15.88        | QP      |
| 9  | 2.099 | 9.82   | 11.76         | 21.58 | 46.00         | -24.42        | Average |
| 10 | 2.099 | 9.82   | 21.70         | 31.52 | 56.00         | -24.48        | QP      |
| 11 | 5.119 | 9.85   | 9.30          | 19.15 | 50.00         | -30.85        | Average |
| 12 | 5.119 | 9.85   | 17.29         | 27.14 | 60.00         | -32.86        | QP      |

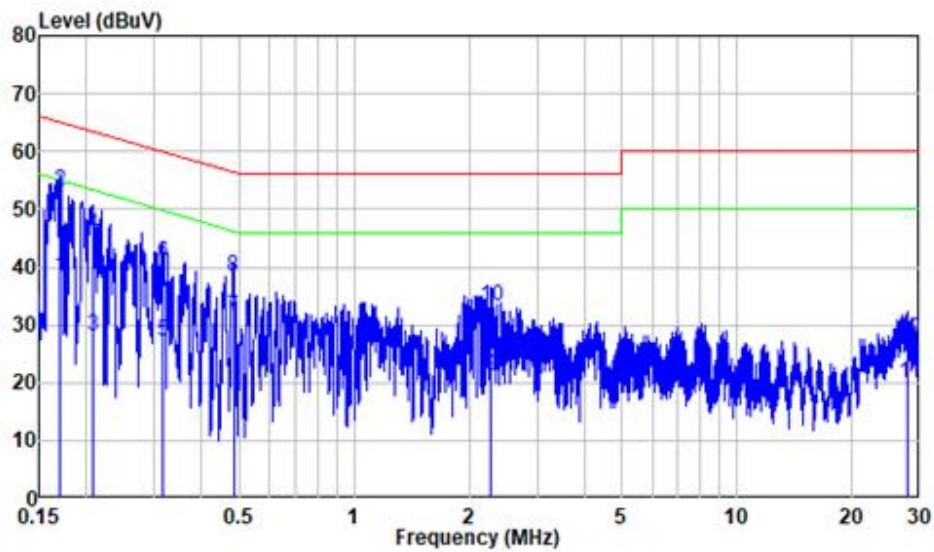


**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
Condition: Neutral  
Job No. : SZNS220815-37077E-RF  
Mode : BT  
Power : AC 120V 60Hz  
Note : Desktop Charging


|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.170  | 9.80   | 28.41         | 38.21 | 54.96         | -16.75        | Average |
| 2  | 0.170  | 9.80   | 43.39         | 53.19 | 64.96         | -11.77        | QP      |
| 3  | 0.207  | 9.80   | 18.21         | 28.01 | 53.33         | -25.32        | Average |
| 4  | 0.207  | 9.80   | 35.78         | 45.58 | 63.33         | -17.75        | QP      |
| 5  | 0.316  | 9.80   | 17.38         | 27.18 | 49.82         | -22.64        | Average |
| 6  | 0.316  | 9.80   | 30.93         | 40.73 | 59.82         | -19.09        | QP      |
| 7  | 0.483  | 9.80   | 21.48         | 31.28 | 46.28         | -15.00        | Average |
| 8  | 0.483  | 9.80   | 28.58         | 38.38 | 56.28         | -17.90        | QP      |
| 9  | 2.268  | 9.82   | 11.42         | 21.24 | 46.00         | -24.76        | Average |
| 10 | 2.268  | 9.82   | 23.50         | 33.32 | 56.00         | -22.68        | QP      |
| 11 | 28.003 | 10.18  | 9.75          | 19.93 | 50.00         | -30.07        | Average |
| 12 | 28.003 | 10.18  | 17.26         | 27.44 | 60.00         | -32.56        | QP      |

## AC 120V/60 Hz, Line

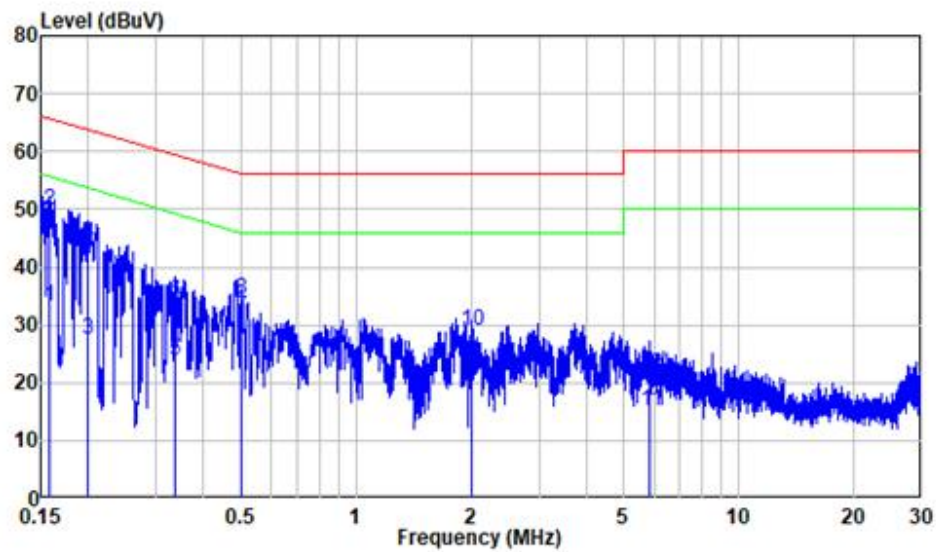

Site : Shielding Room  
 Condition: Line  
 Job No. : SZNS220815-37077E-RF  
 Mode : BT  
 Power : AC 120V 60Hz  
 Note : Direct Charging

|    | Freq  | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|-------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz   | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.158 | 9.80   | 23.29         | 33.09 | 55.59         | -22.50        | Average |
| 2  | 0.158 | 9.80   | 40.16         | 49.96 | 65.59         | -15.63        | QP      |
| 3  | 0.200 | 9.80   | 17.79         | 27.59 | 53.62         | -26.03        | Average |
| 4  | 0.200 | 9.80   | 34.25         | 44.05 | 63.62         | -19.57        | QP      |
| 5  | 0.337 | 9.80   | 13.91         | 23.71 | 49.27         | -25.56        | Average |
| 6  | 0.337 | 9.80   | 24.23         | 34.03 | 59.27         | -25.24        | QP      |
| 7  | 0.501 | 9.80   | 21.54         | 31.34 | 46.00         | -14.66        | Average |
| 8  | 0.501 | 9.80   | 24.64         | 34.44 | 56.00         | -21.56        | QP      |
| 9  | 2.008 | 9.82   | 12.70         | 22.52 | 46.00         | -23.48        | Average |
| 10 | 2.008 | 9.82   | 19.12         | 28.94 | 56.00         | -27.06        | QP      |
| 11 | 5.863 | 9.86   | 5.30          | 15.16 | 50.00         | -34.84        | Average |
| 12 | 5.863 | 9.86   | 11.50         | 21.36 | 60.00         | -38.64        | QP      |

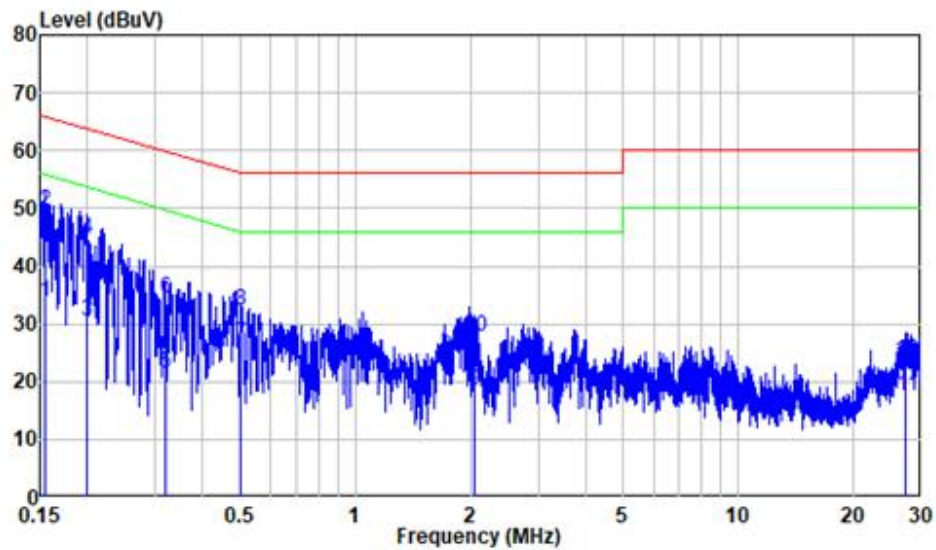**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
 Condition: Neutral  
 Job No. : SZNS220815-37077E-RF  
 Mode : BT  
 Power : AC 120V 60Hz  
 Note : Direct Charging

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.155  | 9.80   | 24.00         | 33.80 | 55.75         | -21.95        | Average |
| 2  | 0.155  | 9.80   | 39.66         | 49.46 | 65.75         | -16.29        | QP      |
| 3  | 0.200  | 9.80   | 20.60         | 30.40 | 53.62         | -23.22        | Average |
| 4  | 0.200  | 9.80   | 34.89         | 44.69 | 63.62         | -18.93        | QP      |
| 5  | 0.320  | 9.80   | 11.67         | 21.47 | 49.70         | -28.23        | Average |
| 6  | 0.320  | 9.80   | 24.65         | 34.45 | 59.70         | -25.25        | QP      |
| 7  | 0.503  | 9.80   | 16.72         | 26.52 | 46.00         | -19.48        | Average |
| 8  | 0.503  | 9.80   | 22.37         | 32.17 | 56.00         | -23.83        | QP      |
| 9  | 2.055  | 9.82   | 8.55          | 18.37 | 46.00         | -27.63        | Average |
| 10 | 2.055  | 9.82   | 17.82         | 27.64 | 56.00         | -28.36        | QP      |
| 11 | 27.362 | 10.17  | 7.29          | 17.46 | 50.00         | -32.54        | Average |
| 12 | 27.362 | 10.17  | 13.51         | 23.68 | 60.00         | -36.32        | QP      |


## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard


FCC §15.205; §15.209; §15.247(d)

### EUT Setup

Below 1 GHz:

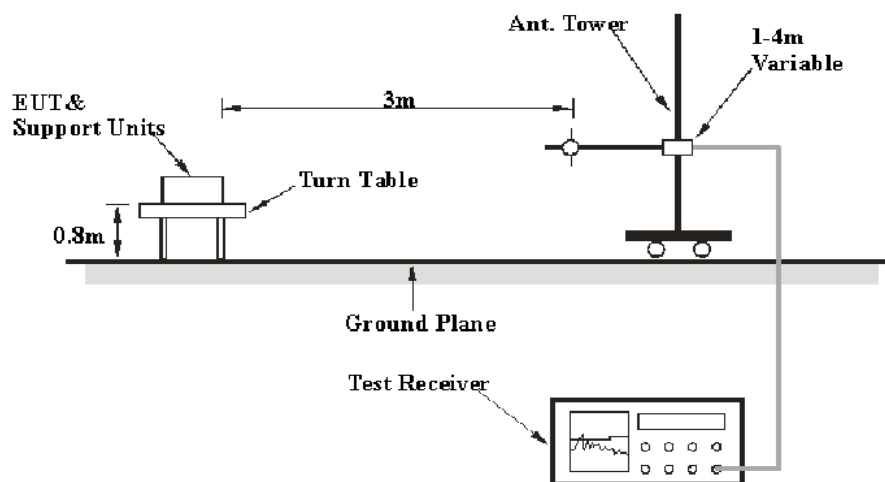

Above 1GHz:

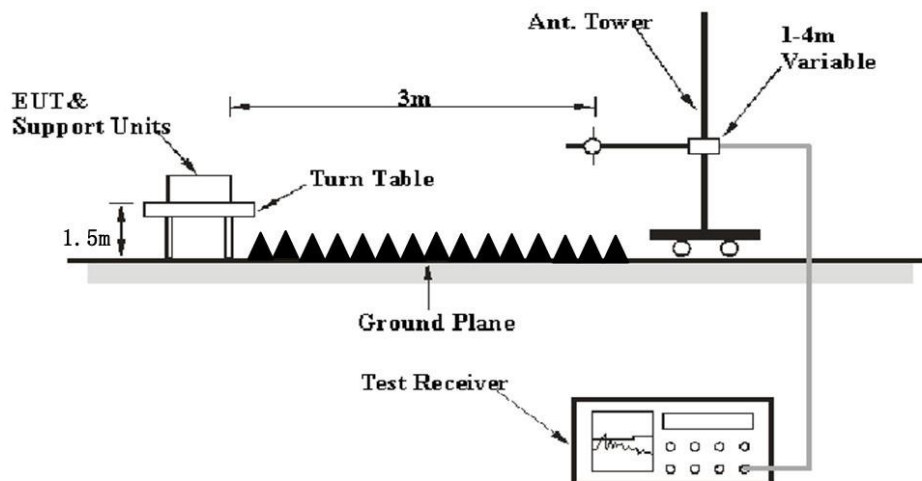

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.



## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1 MHz   | 3 MHz     | /       | PK          |
|                   | 1 MHz   | 10 Hz     | /       | Average     |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 25~25.6 °C |
| Relative Humidity: | 50~62 %    |
| ATM Pressure:      | 101.0 kPa  |

*The testing was performed by Level from 2022-08-22 to 2022-09-27 for below 1GHz ,by Jeff Jiang and Bruce Lin on 2022-09-16 for above 1GHz.*

*EUT operation mode: Transmitting*


*Note 1: Pre-scan in the X,Y and Z axes of orientation, the worst case of orientation was recorded*

*Note 2: Pre-scan GFSK,  $\pi/4$ -DQPSK, 8DPSK mode, the worst case is 8DPSK*

**30MHz-1GHz:** (worst case is 8DPSK Mode, Low channel)

*For adapter AS1201A-0502000USL:*


**Horizontal:**

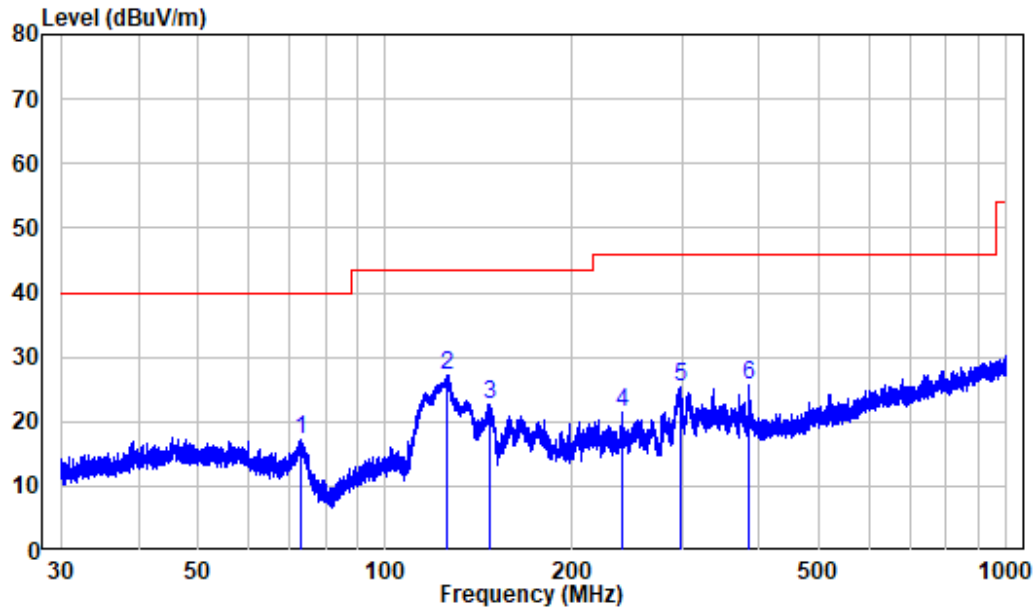

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : SZNS220815-37077E-RF  
Test Mode: Charging+BT Transmitting  
Note : Direct Charging

|   | Freq Factor |        | Read Level |        | Limit | Over   | Remark |
|---|-------------|--------|------------|--------|-------|--------|--------|
|   | MHz         | dB/m   | dBuV       | dBuV/m | Line  | Limit  |        |
| 1 | 73.327      | -15.91 | 33.03      | 17.12  | 40.00 | -22.88 | Peak   |
| 2 | 126.052     | -14.41 | 41.66      | 27.25  | 43.50 | -16.25 | Peak   |
| 3 | 147.145     | -15.44 | 38.21      | 22.77  | 43.50 | -20.73 | Peak   |
| 4 | 239.987     | -10.91 | 32.47      | 21.56  | 46.00 | -24.44 | Peak   |
| 5 | 299.841     | -9.23  | 34.56      | 25.33  | 46.00 | -20.67 | Peak   |
| 6 | 384.100     | -7.08  | 32.60      | 25.52  | 46.00 | -20.48 | Peak   |


## Vertical

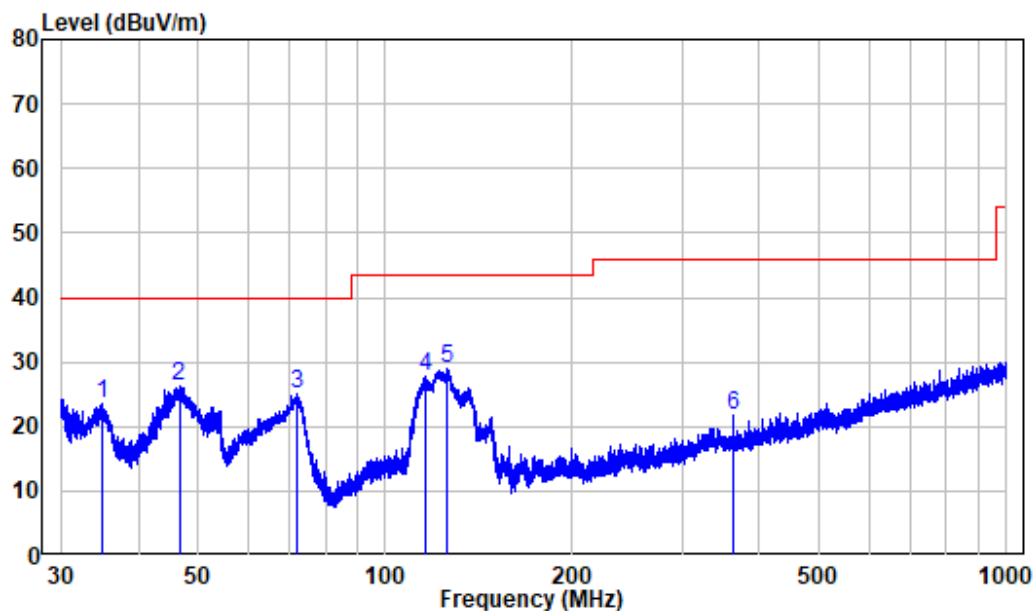

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220815-37077E-RF  
 Test Mode: Charging+BT Transmitting  
 Note : Direct Charging

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 35.005  | -11.54 | 35.14      | 23.60  | 40.00      | -16.40     | Peak   |
| 2 | 46.544  | -10.00 | 36.30      | 26.30  | 40.00      | -13.70     | Peak   |
| 3 | 71.990  | -15.62 | 40.53      | 24.91  | 40.00      | -15.09     | Peak   |
| 4 | 115.827 | -12.77 | 40.40      | 27.63  | 43.50      | -15.87     | Peak   |
| 5 | 125.501 | -14.36 | 43.29      | 28.93  | 43.50      | -14.57     | Peak   |
| 6 | 362.031 | -7.62  | 29.49      | 21.87  | 46.00      | -24.13     | Peak   |


## Horizontal:

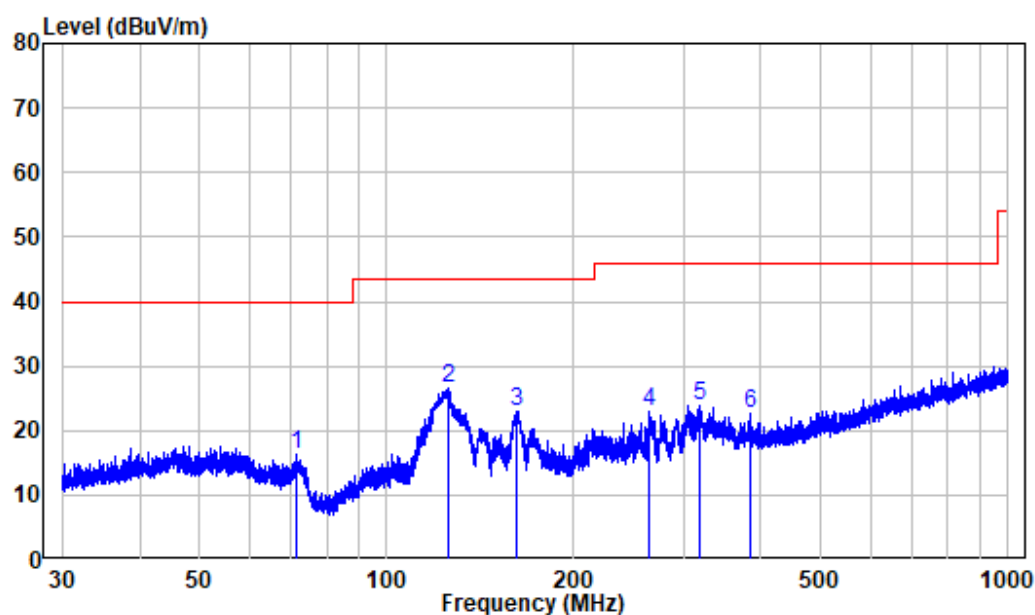

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZNS220815-37077E-RF  
 Test Mode: Charging+BT Transmitting  
 Note : Desktop Charging

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 71.706  | -15.50 | 31.69         | 16.19  | 40.00         | -23.81        | Peak   |
| 2 | 125.391 | -14.35 | 41.02         | 26.67  | 43.50         | -16.83        | Peak   |
| 3 | 162.255 | -14.29 | 37.26         | 22.97  | 43.50         | -20.53        | Peak   |
| 4 | 265.210 | -10.44 | 33.26         | 22.82  | 46.00         | -23.18        | Peak   |
| 5 | 317.840 | -8.57  | 32.38         | 23.81  | 46.00         | -22.19        | Peak   |
| 6 | 384.100 | -7.08  | 29.82         | 22.74  | 46.00         | -23.26        | Peak   |

## Vertical

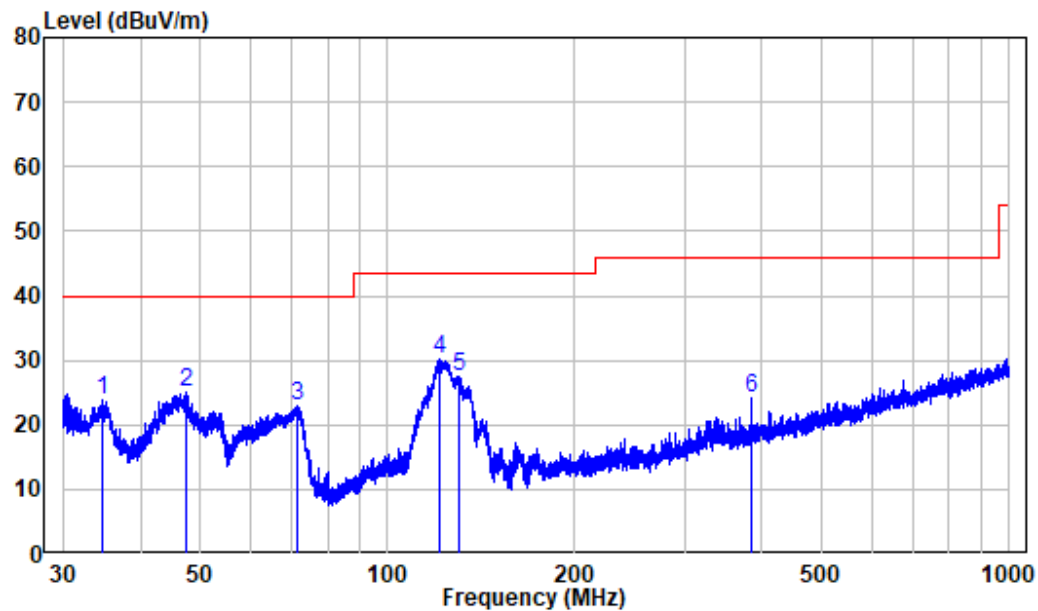


Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220815-37077E-RF  
 Test Mode: Charging+BT Transmitting  
 Note : Desktop Charging

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 34.684  | -11.64 | 35.35      | 23.71  | 40.00      | -16.29     | Peak   |
| 2 | 47.533  | -10.00 | 35.20      | 25.20  | 40.00      | -14.80     | Peak   |
| 3 | 71.361  | -15.35 | 38.15      | 22.80  | 40.00      | -17.20     | Peak   |
| 4 | 121.495 | -13.83 | 43.99      | 30.16  | 43.50      | -13.34     | Peak   |
| 5 | 129.866 | -14.89 | 42.48      | 27.59  | 43.50      | -15.91     | Peak   |
| 6 | 384.100 | -7.08  | 31.11      | 24.03  | 46.00      | -21.97     | Peak   |

*For adapter GQ12-050200-AU:*

*Direct charging:*

**Horizontal:**

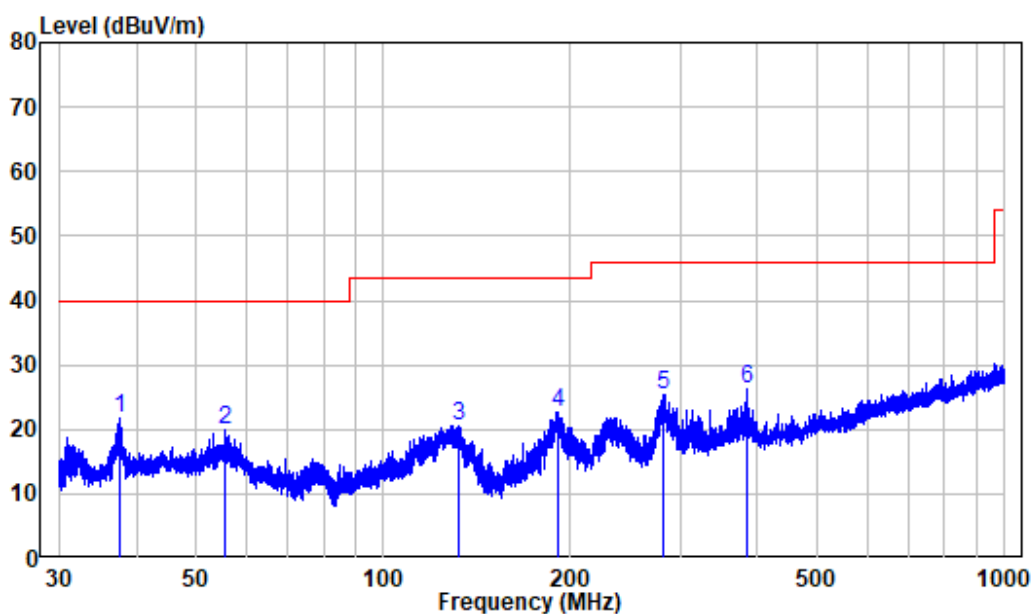

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS220815-37077E-RF

Test Mode: BT

|   | Freq    | Factor | Read Level | Limit Level | Over Limit | Remark      |
|---|---------|--------|------------|-------------|------------|-------------|
|   | MHz     | dB/m   | dBuV       | dBuV/m      | dBuV/m     | dB          |
| 1 | 37.515  | -10.90 | 32.71      | 21.81       | 40.00      | -18.19 Peak |
| 2 | 55.536  | -10.23 | 30.18      | 19.95       | 40.00      | -20.05 Peak |
| 3 | 132.105 | -14.98 | 35.61      | 20.63       | 43.50      | -22.87 Peak |
| 4 | 190.572 | -11.48 | 34.20      | 22.72       | 43.50      | -20.78 Peak |
| 5 | 282.985 | -9.50  | 34.88      | 25.38       | 46.00      | -20.62 Peak |
| 6 | 384.100 | -7.08  | 33.31      | 26.23       | 46.00      | -19.77 Peak |

## Vertical

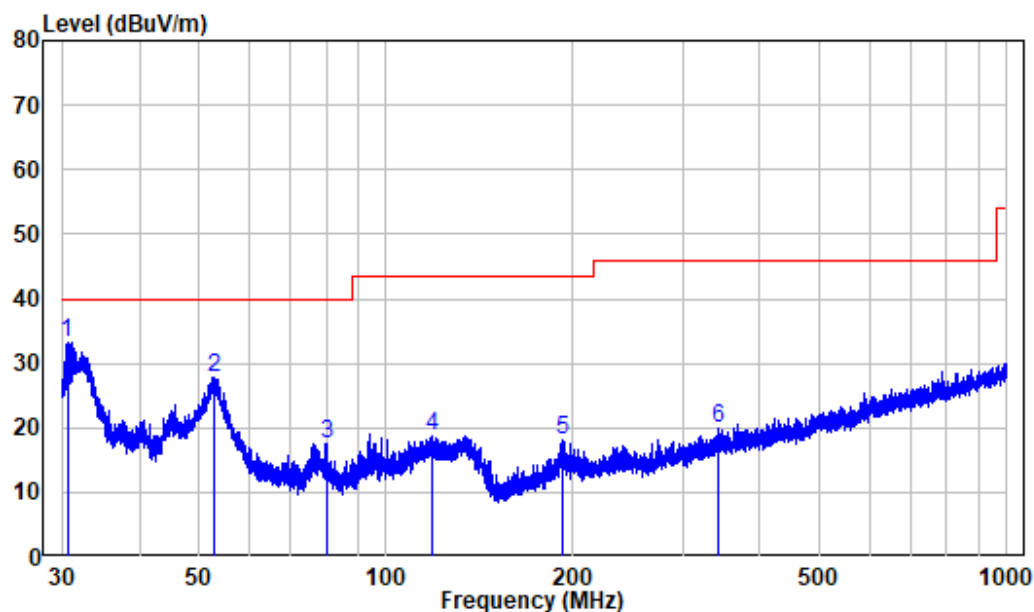


Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS220815-37077E-RF

Test Mode: BT

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 30.611  | -12.33 | 45.64         | 33.31  | 40.00         | -6.69         | Peak   |
| 2 | 52.992  | -10.17 | 38.04         | 27.87  | 40.00         | -12.13        | Peak   |
| 3 | 80.010  | -16.79 | 34.22         | 17.43  | 40.00         | -22.57        | Peak   |
| 4 | 118.498 | -13.25 | 32.06         | 18.81  | 43.50         | -24.69        | Peak   |
| 5 | 192.419 | -11.26 | 29.30         | 18.04  | 43.50         | -25.46        | Peak   |
| 6 | 342.579 | -7.32  | 27.24         | 19.92  | 46.00         | -26.08        | Peak   |

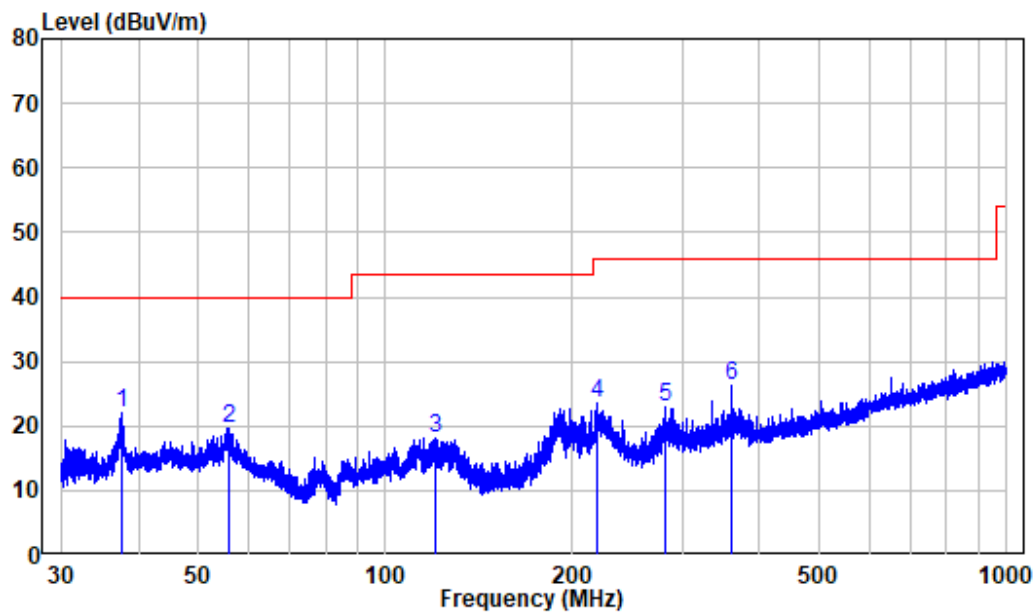
**Desktop charging:****Horizontal:**

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZNS220815-37077E-RF  
 Test Mode: BT  
 Note : Charger base

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 37.531  | -10.90 | 32.88         | 21.98  | 40.00         | -18.02        | Peak   |
| 2 | 55.829  | -10.21 | 29.93         | 19.72  | 40.00         | -20.28        | Peak   |
| 3 | 120.013 | -13.53 | 31.66         | 18.13  | 43.50         | -25.37        | Peak   |
| 4 | 218.596 | -11.49 | 34.95         | 23.46  | 46.00         | -22.54        | Peak   |
| 5 | 282.489 | -9.51  | 32.49         | 22.98  | 46.00         | -23.02        | Peak   |
| 6 | 359.974 | -7.68  | 34.05         | 26.37  | 46.00         | -19.63        | Peak   |



## Vertical

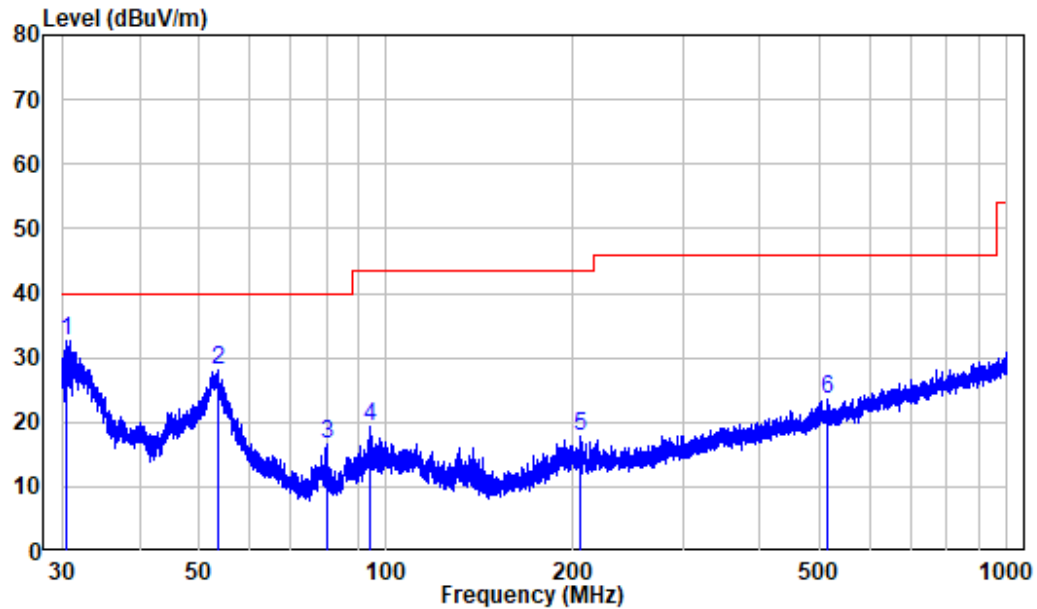

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220815-37077E-RF  
 Test Mode: BT  
 Note : Charger base

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 30.544  | -12.34 | 44.85      | 32.51  | 40.00      | -7.49      | Peak   |
| 2 | 53.458  | -10.25 | 38.26      | 28.01  | 40.00      | -11.99     | Peak   |
| 3 | 80.010  | -16.79 | 33.31      | 16.52  | 40.00      | -23.48     | Peak   |
| 4 | 94.428  | -12.60 | 31.97      | 19.37  | 43.50      | -24.13     | Peak   |
| 5 | 204.596 | -11.80 | 29.47      | 17.67  | 43.50      | -25.83     | Peak   |
| 6 | 515.212 | -4.28  | 27.69      | 23.41  | 46.00      | -22.59     | Peak   |

**Above 1GHz:** (worst case is direct charging+adapter GQ12-050200-AU)

| Frequency<br>(MHz)        | Receiver          |          | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|---------------------------|-------------------|----------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                           | Reading<br>(dBμV) | PK/QP/AV |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2402 MHz)    |                   |          |                     |               |                |                               |                                    |                   |                |
| 2310                      | 67.64             | PK       | 245                 | 2.2           | H              | -7.24                         | 60.40                              | 74                | -13.60         |
| 2310                      | 42.85             | AV       | 245                 | 2.2           | H              | -7.24                         | 35.61                              | 54                | -18.39         |
| 2310                      | 67.70             | PK       | 70                  | 1.9           | V              | -7.24                         | 60.46                              | 74                | -13.54         |
| 2310                      | 42.91             | AV       | 70                  | 1.9           | V              | -7.24                         | 35.67                              | 54                | -18.33         |
| 2390                      | 68.57             | PK       | 18                  | 1             | H              | -7.22                         | 61.35                              | 74                | -12.65         |
| 2390                      | 43.78             | AV       | 18                  | 1             | H              | -7.22                         | 36.56                              | 54                | -17.44         |
| 2390                      | 68.06             | PK       | 120                 | 1.3           | V              | -7.22                         | 60.84                              | 74                | -13.16         |
| 2390                      | 43.27             | AV       | 120                 | 1.3           | V              | -7.22                         | 36.05                              | 54                | -17.95         |
| 4804                      | 55.10             | PK       | 224                 | 1.9           | H              | -3.51                         | 51.59                              | 74                | -22.41         |
| 4804                      | 53.73             | PK       | 310                 | 1.9           | V              | -3.51                         | 50.22                              | 74                | -23.78         |
| Middle Channel (2441 MHz) |                   |          |                     |               |                |                               |                                    |                   |                |
| 4882                      | 54.71             | PK       | 302                 | 2.2           | H              | -3.37                         | 51.34                              | 74                | -22.66         |
| 4882                      | 54.19             | PK       | 42                  | 2.2           | V              | -3.37                         | 50.82                              | 74                | -23.18         |
| High Channel (2480 MHz)   |                   |          |                     |               |                |                               |                                    |                   |                |
| 2483.5                    | 69.37             | PK       | 115                 | 2.2           | H              | -7.20                         | 62.17                              | 74                | -11.83         |
| 2483.5                    | 44.58             | AV       | 115                 | 2.2           | H              | -7.20                         | 37.38                              | 54                | -16.62         |
| 2483.5                    | 68.66             | PK       | 303                 | 1.8           | V              | -7.20                         | 61.46                              | 74                | -12.54         |
| 2483.5                    | 43.87             | AV       | 303                 | 1.8           | V              | -7.20                         | 36.67                              | 54                | -17.33         |
| 2500                      | 68.86             | PK       | 4                   | 2.4           | H              | -7.18                         | 61.68                              | 74                | -12.32         |
| 2500                      | 44.07             | AV       | 4                   | 2.4           | H              | -7.18                         | 36.89                              | 54                | -17.11         |
| 2500                      | 68.80             | PK       | 75                  | 2             | V              | -7.18                         | 61.62                              | 74                | -12.38         |
| 2500                      | 44.01             | AV       | 75                  | 2             | V              | -7.18                         | 36.83                              | 54                | -17.17         |
| 4960                      | 54.49             | PK       | 315                 | 1.7           | H              | -3.01                         | 51.48                              | 74                | -22.52         |
| 4960                      | 53.76             | PK       | 147                 | 1.7           | V              | -3.01                         | 50.75                              | 74                | -23.25         |

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.


1-18GHz

Pre-scan for Low Channel

Horizontal:

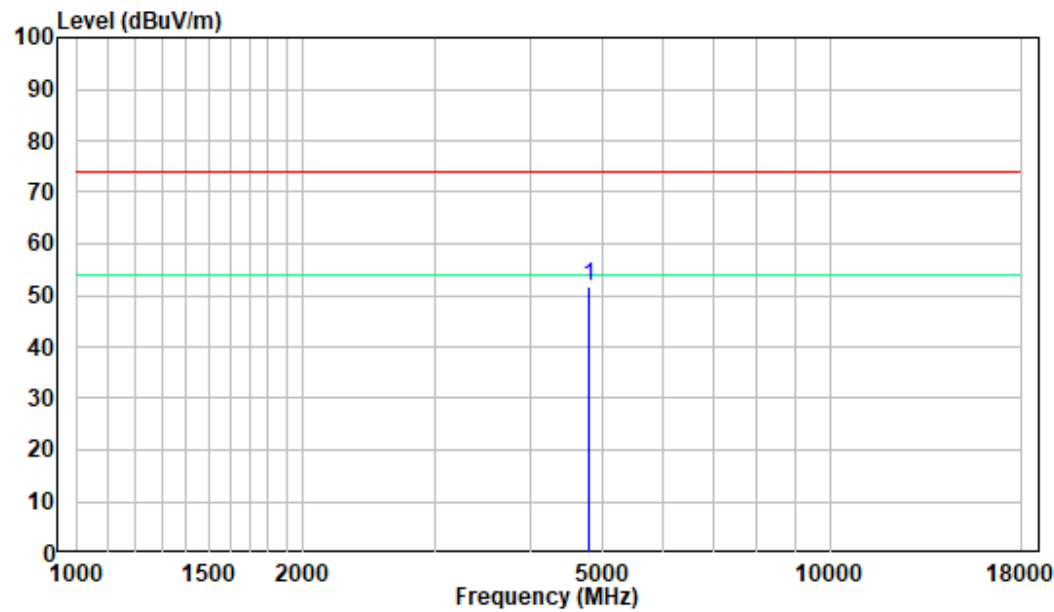


Vertical:

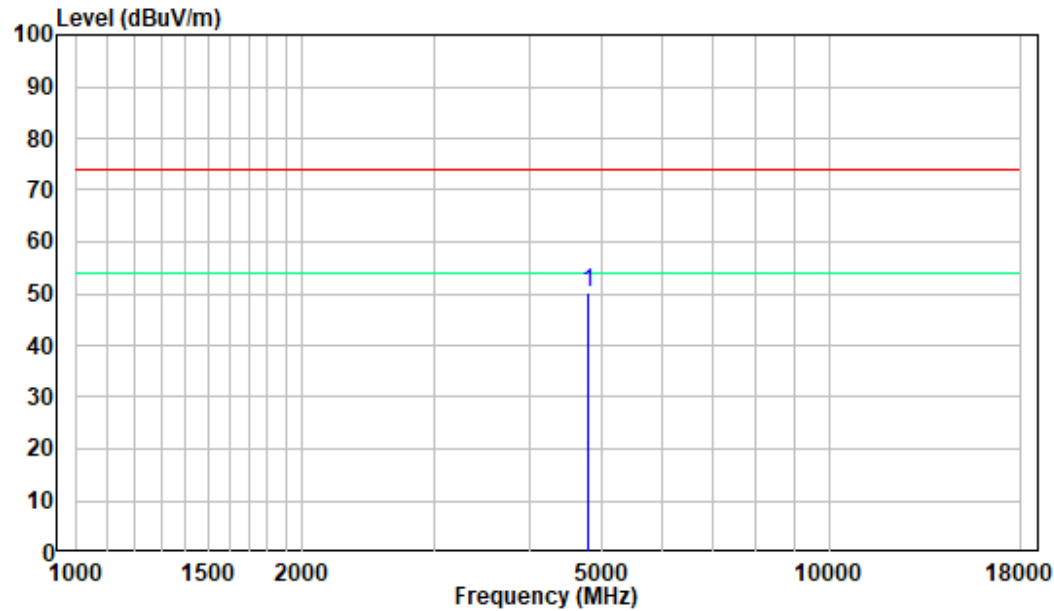


18-25GHz

Pre-scan for Low Channel

Horizontal:

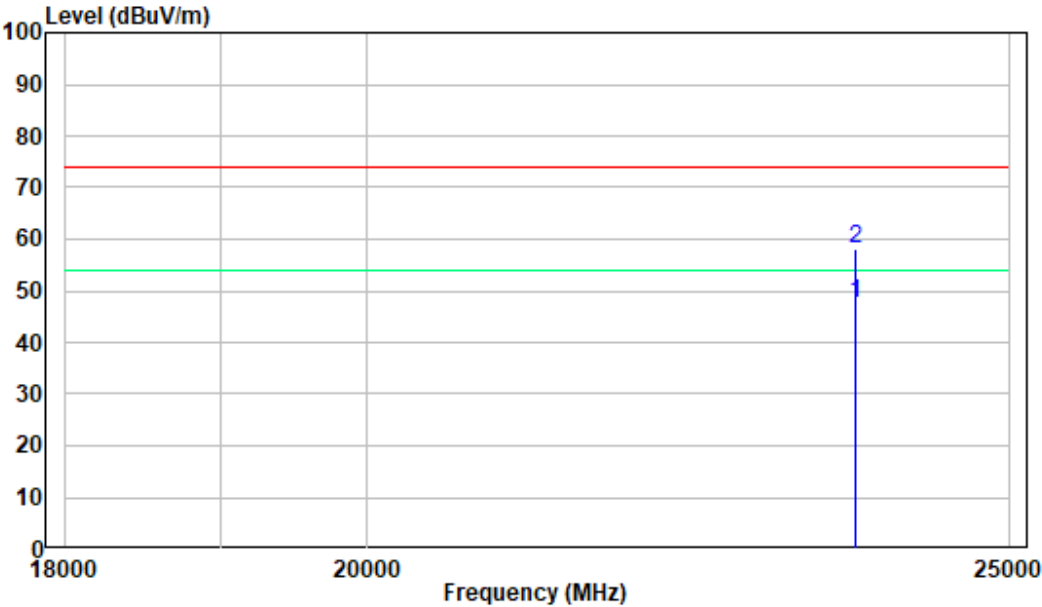

Vertical:

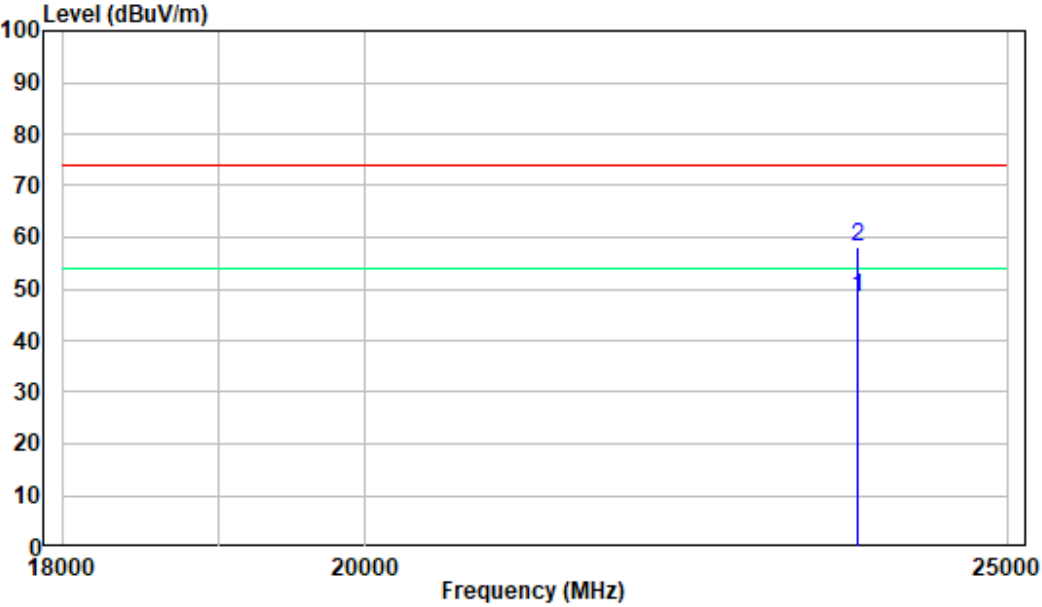


## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-09-16*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-09-16*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-09-16*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.




**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-09-16*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-09-16*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Roger Ling on 2022-09-16*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix.

## APPENDIX


### Appendix A: 20dB Emission Bandwidth Test Result

| Test Mode | Antenna | Frequency[MHz] | 20db EBW[MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|---------------|---------|---------|------------|---------|
| DH1       | Ant1    | 2402           | 1.04          | 2401.49 | 2402.53 | ---        | ---     |
|           |         | 2441           | 1.04          | 2440.48 | 2441.53 | ---        | ---     |
|           |         | 2480           | 1.04          | 2479.48 | 2480.52 | ---        | ---     |
| 2DH1      | Ant1    | 2402           | 1.35          | 2401.33 | 2402.68 | ---        | ---     |
|           |         | 2441           | 1.35          | 2440.32 | 2441.67 | ---        | ---     |
|           |         | 2480           | 1.35          | 2479.31 | 2480.66 | ---        | ---     |
| 3DH1      | Ant1    | 2402           | 1.29          | 2401.37 | 2402.66 | ---        | ---     |
|           |         | 2441           | 1.29          | 2440.36 | 2441.66 | ---        | ---     |
|           |         | 2480           | 1.30          | 2479.36 | 2480.65 | ---        | ---     |

## Test Graphs

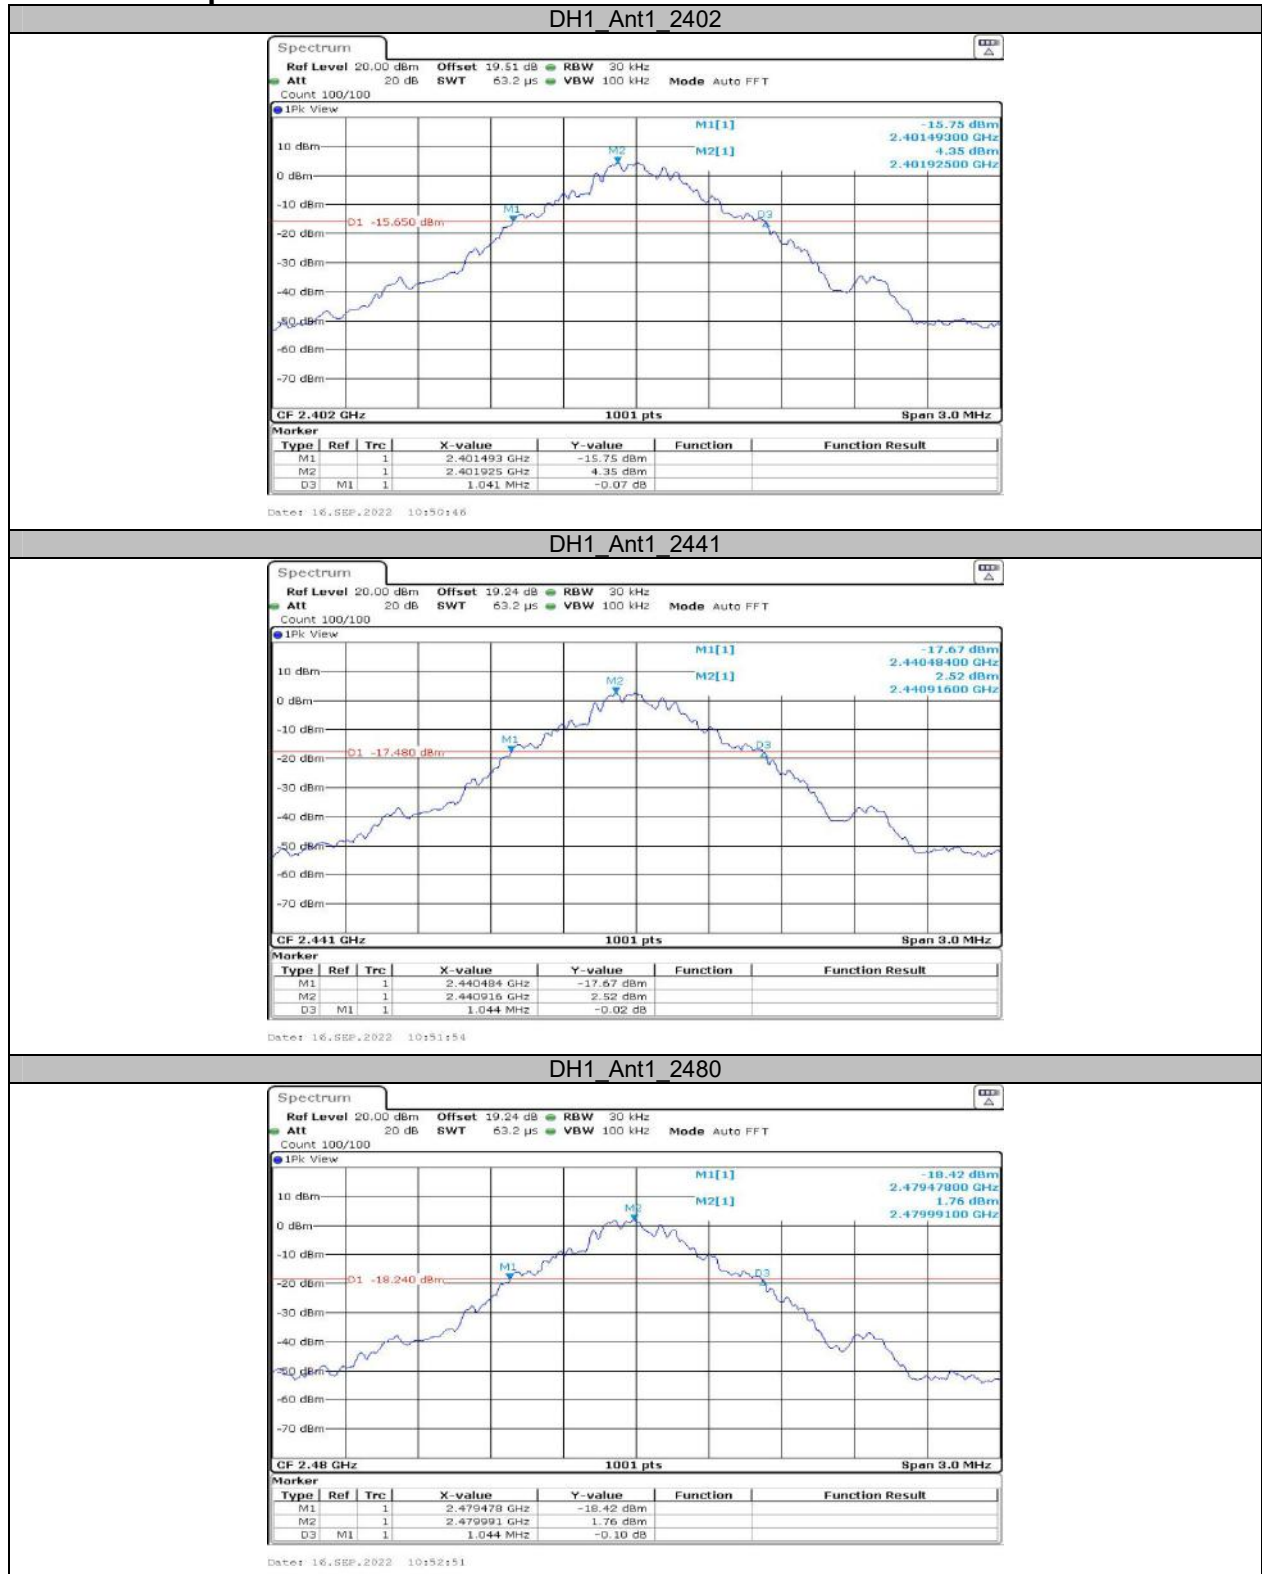


## 2DH1\_Ant1\_2402

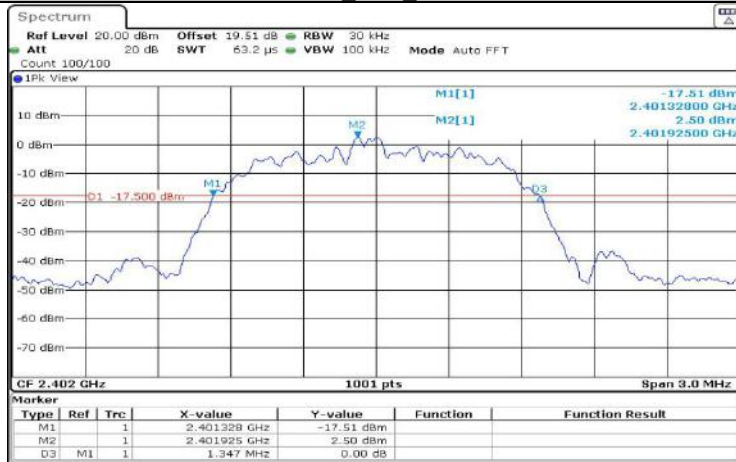


Date: 16\_SEp\_2022 10:54:02

## 2DH1\_Ant1\_2441

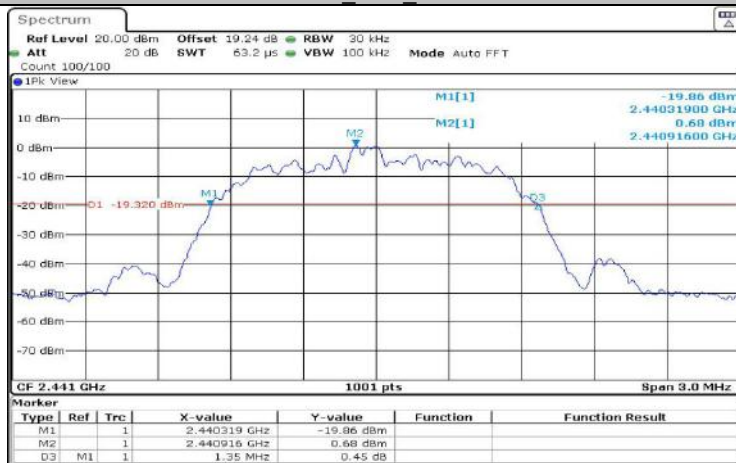


Date: 16\_SEp\_2022 10:55:04

## 2DH1\_Ant1\_2480

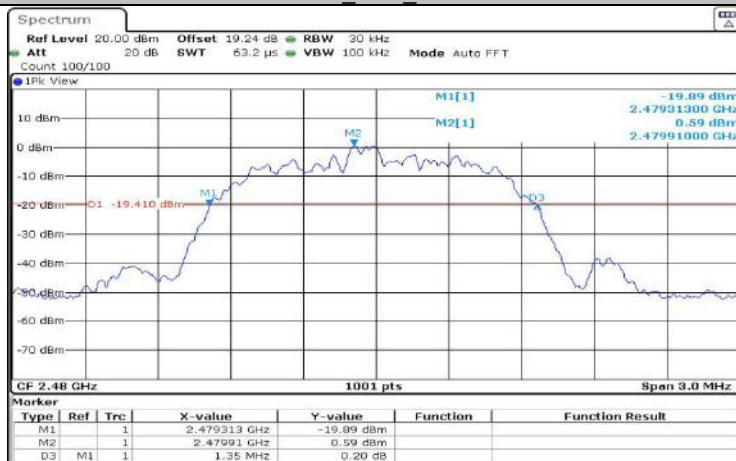

Date: 16\_SEp\_2022 10:56:00

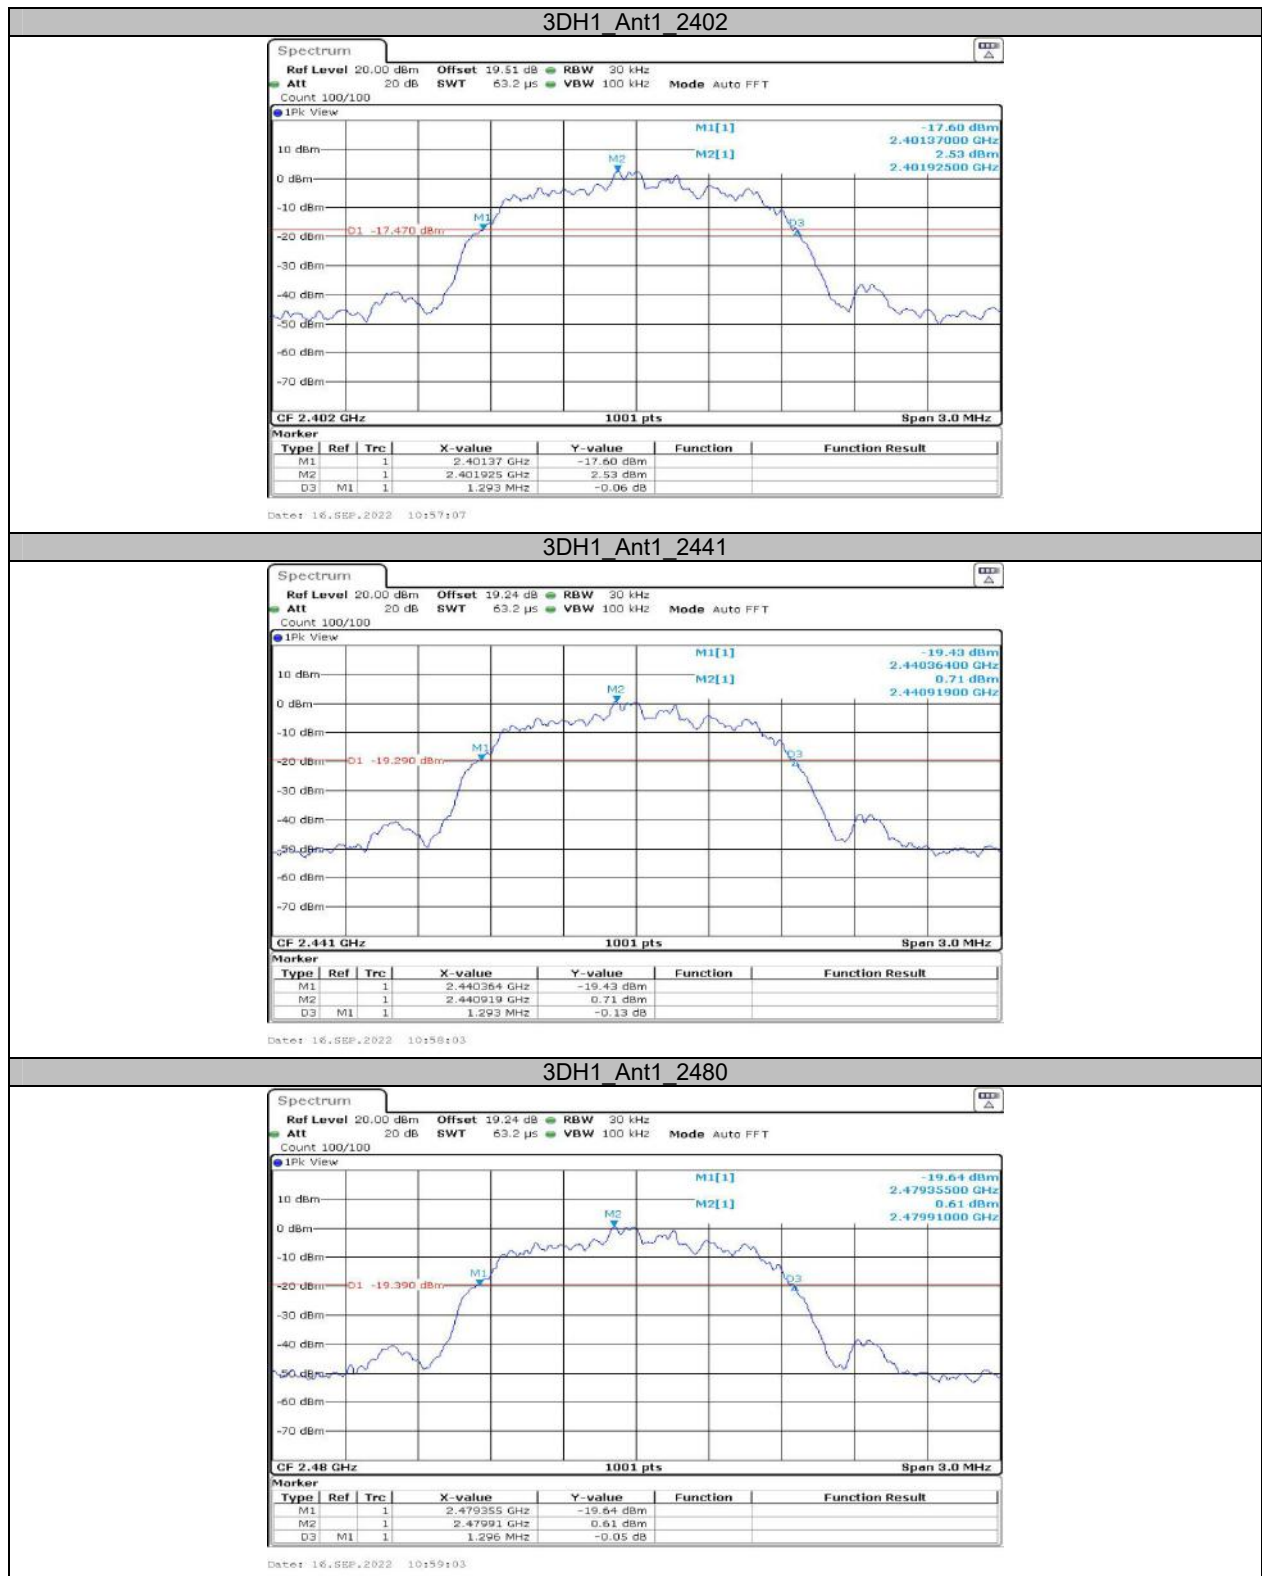

**Appendix B: Occupied Channel Bandwidth  
Test Result**


| Test Mode | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------|----------|----------|------------|---------|
| DH1       | Ant1    | 2402           | 0.929     | 2401.538 | 2402.468 | ---        | ---     |
|           |         | 2441           | 0.929     | 2440.532 | 2441.462 | ---        | ---     |
|           |         | 2480           | 0.929     | 2479.526 | 2480.456 | ---        | ---     |
| 2DH1      | Ant1    | 2402           | 1.184     | 2401.404 | 2402.587 | ---        | ---     |
|           |         | 2441           | 1.187     | 2440.395 | 2441.581 | ---        | ---     |
|           |         | 2480           | 1.187     | 2479.389 | 2480.575 | ---        | ---     |
| 3DH1      | Ant1    | 2402           | 1.172     | 2401.428 | 2402.599 | ---        | ---     |
|           |         | 2441           | 1.169     | 2440.422 | 2441.590 | ---        | ---     |
|           |         | 2480           | 1.172     | 2479.413 | 2480.584 | ---        | ---     |



## Test Graphs




## 2DH1\_Ant1\_2402

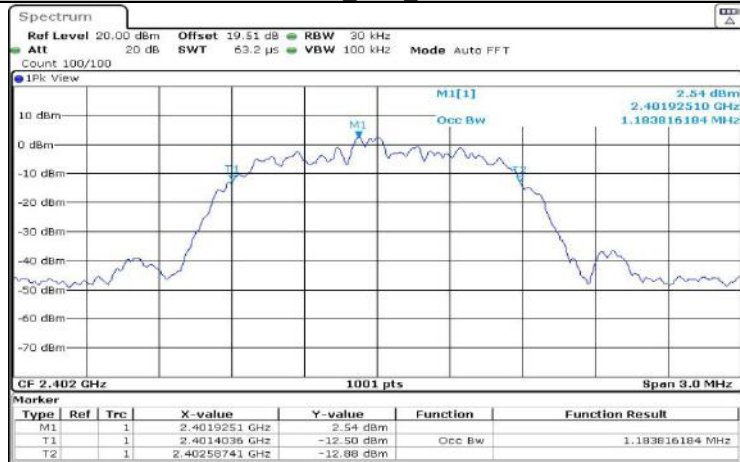


Date: 16,SEP,2022 10:54:14

## 2DH1\_Ant1\_2441

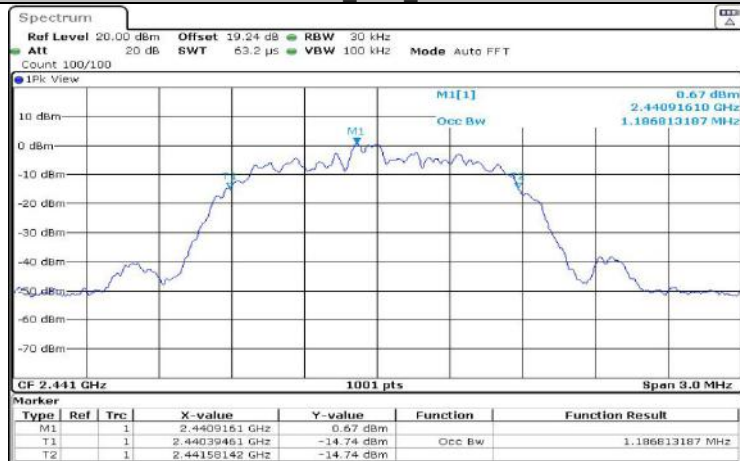

Date: 16,SEP,2022 10:55:16

## 2DH1\_Ant1\_2480

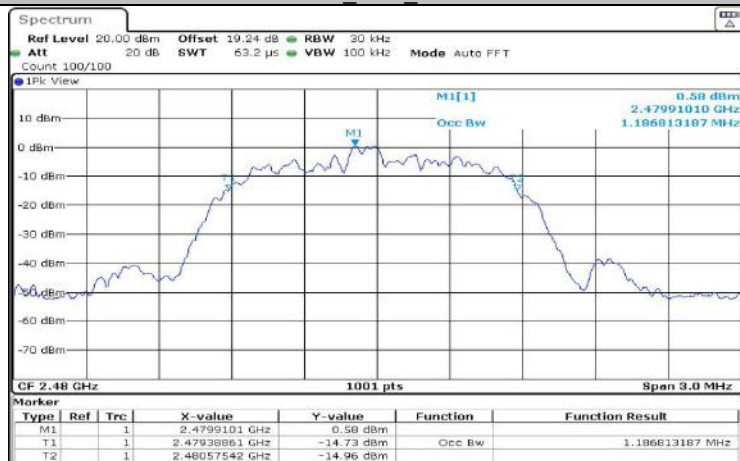

Date: 16,SEP,2022 10:56:12



### Appendix C: Maximum conducted output power

#### Test Result Peak


| Test Mode | Antenna | Frequency[MHz] | Conducted Peak Power[dBm] | Conducted Limit[dBm] | Verdict |
|-----------|---------|----------------|---------------------------|----------------------|---------|
| DH1       | Ant1    | 2402           | 7.93                      | ≤20.97               | PASS    |
|           |         | 2441           | 6.29                      | ≤20.97               | PASS    |
|           |         | 2480           | 5.71                      | ≤20.97               | PASS    |
| 2DH1      | Ant1    | 2402           | 8.30                      | ≤20.97               | PASS    |
|           |         | 2441           | 6.69                      | ≤20.97               | PASS    |
|           |         | 2480           | 6.82                      | ≤20.97               | PASS    |
| 3DH1      | Ant1    | 2402           | 8.71                      | ≤20.97               | PASS    |
|           |         | 2441           | 7.13                      | ≤20.97               | PASS    |
|           |         | 2480           | 7.24                      | ≤20.97               | PASS    |

### Test Graphs







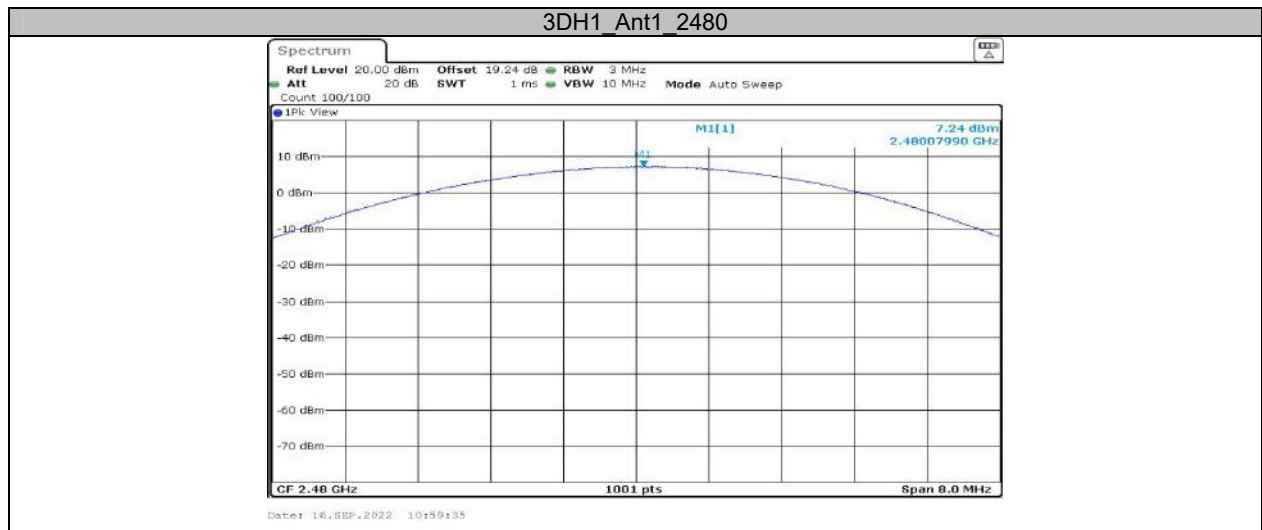

**Appendix D: Carrier frequency separation  
Test Result**

| Test Mode | Antenna | Frequency[MHz] | Result[MHz] | Limit[MHz]   | Verdict |
|-----------|---------|----------------|-------------|--------------|---------|
| DH1       | Ant1    | Hop            | 1.003       | $\geq 0.693$ | PASS    |
| 2DH1      | Ant1    | Hop            | 1.009       | $\geq 0.900$ | PASS    |
| 3DH1      | Ant1    | Hop            | 1.003       | $\geq 0.867$ | PASS    |



## Test Graphs



**Appendix E: Time of occupancy  
Test Result**


| Test Mode | Antenna | Frequency[MHz] | BurstWidth<br>[ms] | TotalHops<br>[Num] | Result[s] | Limit[s] | Verdict |
|-----------|---------|----------------|--------------------|--------------------|-----------|----------|---------|
| DH1       | Ant1    | Hop            | 0.38               | 320                | 0.121     | ≤0.4     | PASS    |
| DH3       | Ant1    | Hop            | 1.63               | 150                | 0.244     | ≤0.4     | PASS    |
| DH5       | Ant1    | Hop            | 2.87               | 110                | 0.315     | ≤0.4     | PASS    |
| 2DH1      | Ant1    | Hop            | 0.39               | 330                | 0.127     | ≤0.4     | PASS    |
| 2DH3      | Ant1    | Hop            | 1.63               | 140                | 0.228     | ≤0.4     | PASS    |
| 2DH5      | Ant1    | Hop            | 2.87               | 120                | 0.344     | ≤0.4     | PASS    |
| 3DH1      | Ant1    | Hop            | 0.38               | 320                | 0.123     | ≤0.4     | PASS    |
| 3DH3      | Ant1    | Hop            | 1.63               | 150                | 0.244     | ≤0.4     | PASS    |
| 3DH5      | Ant1    | Hop            | 2.87               | 120                | 0.345     | ≤0.4     | PASS    |


Note 1: A period time=0.4\*79=31.6(S), Result=BurstWidth\*Totalhops


Note 2: Totalhops=Hopping Number in 3.16s\*10


Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)


## Test Graphs

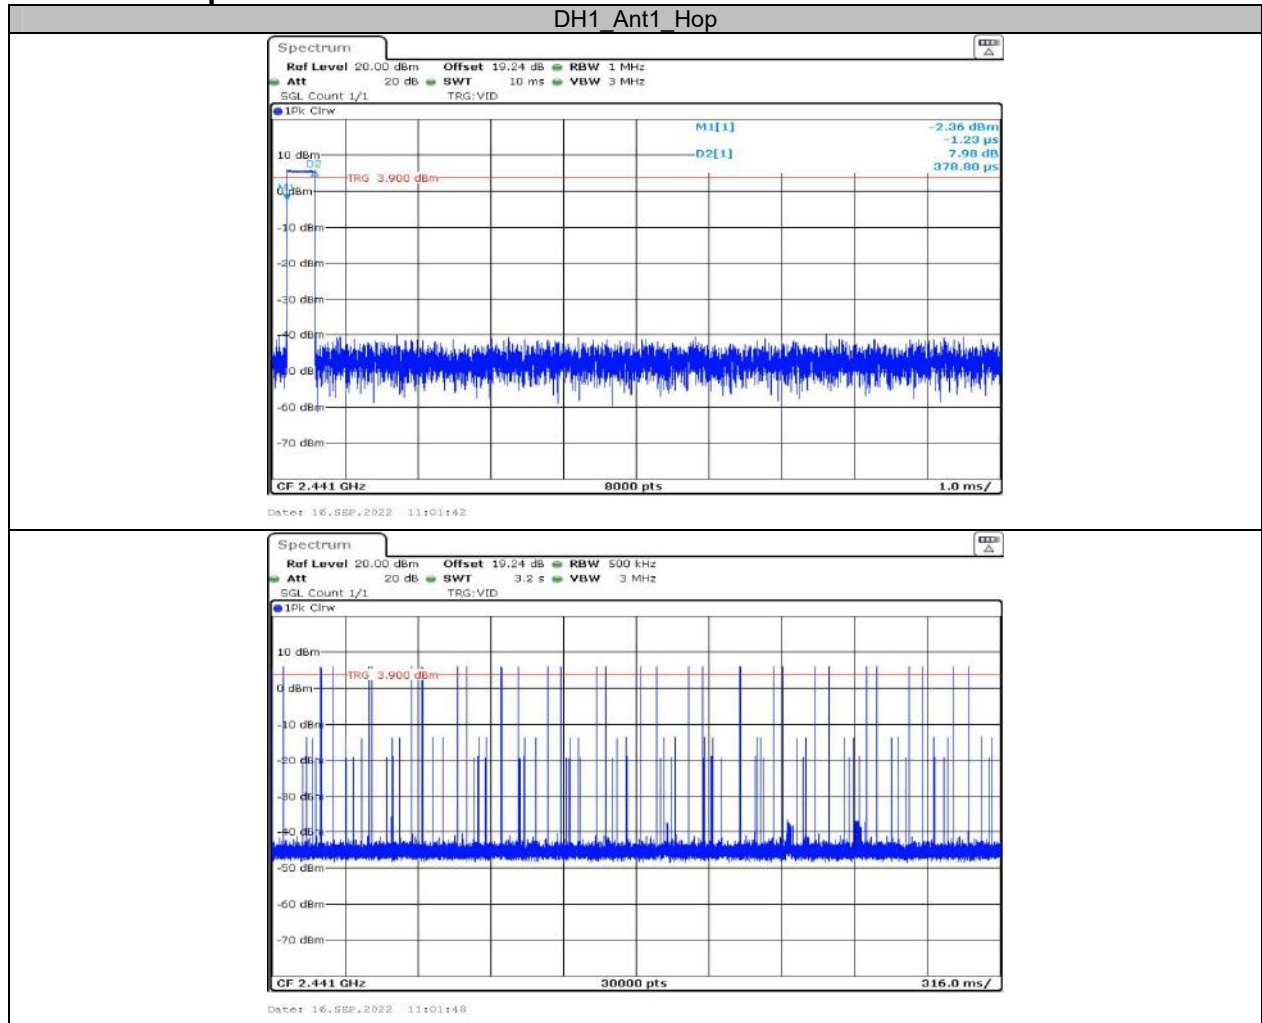


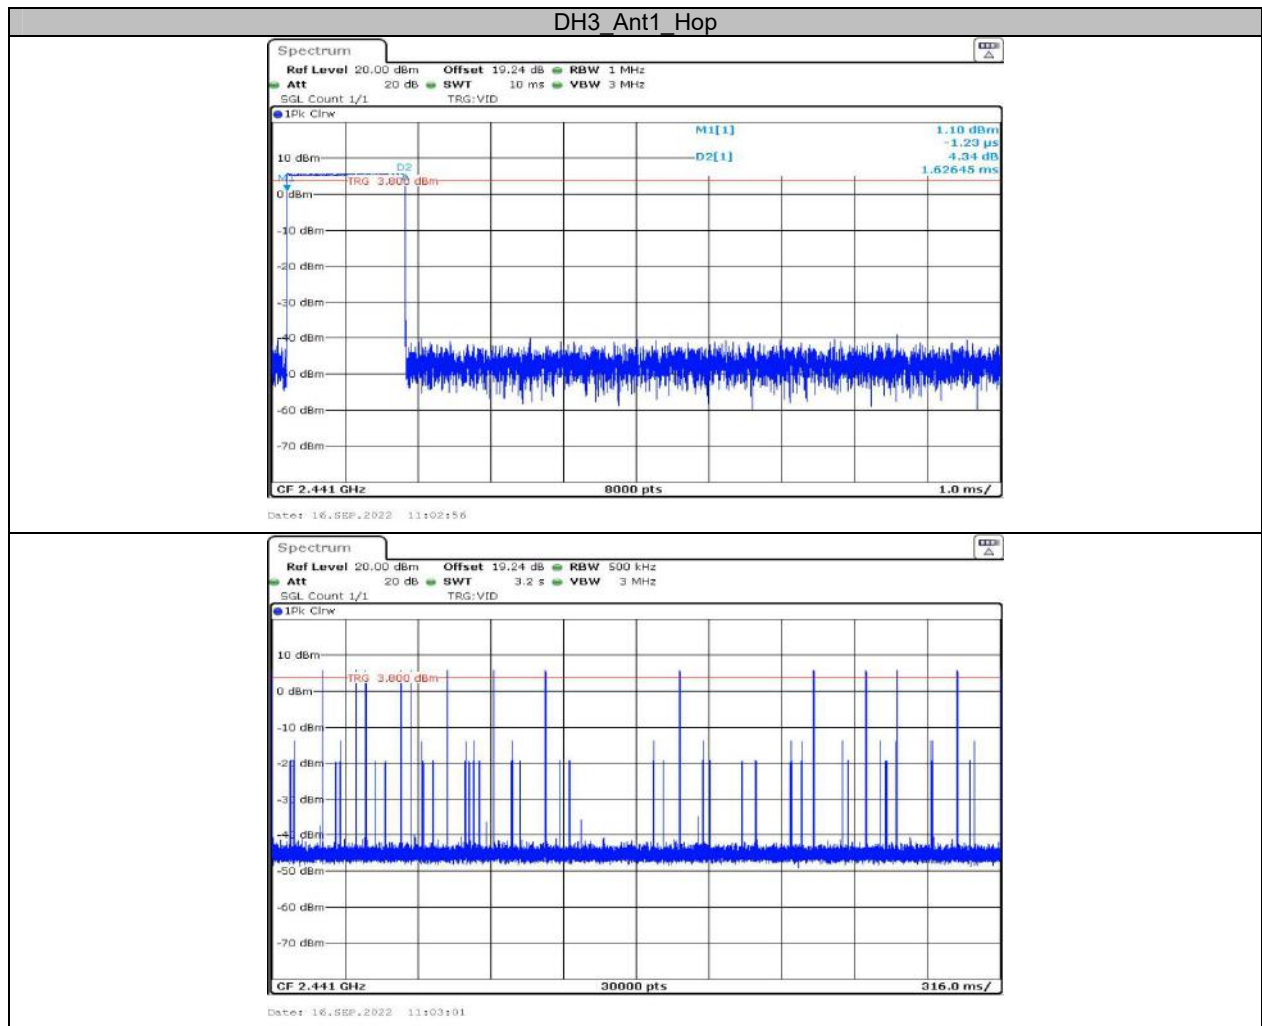

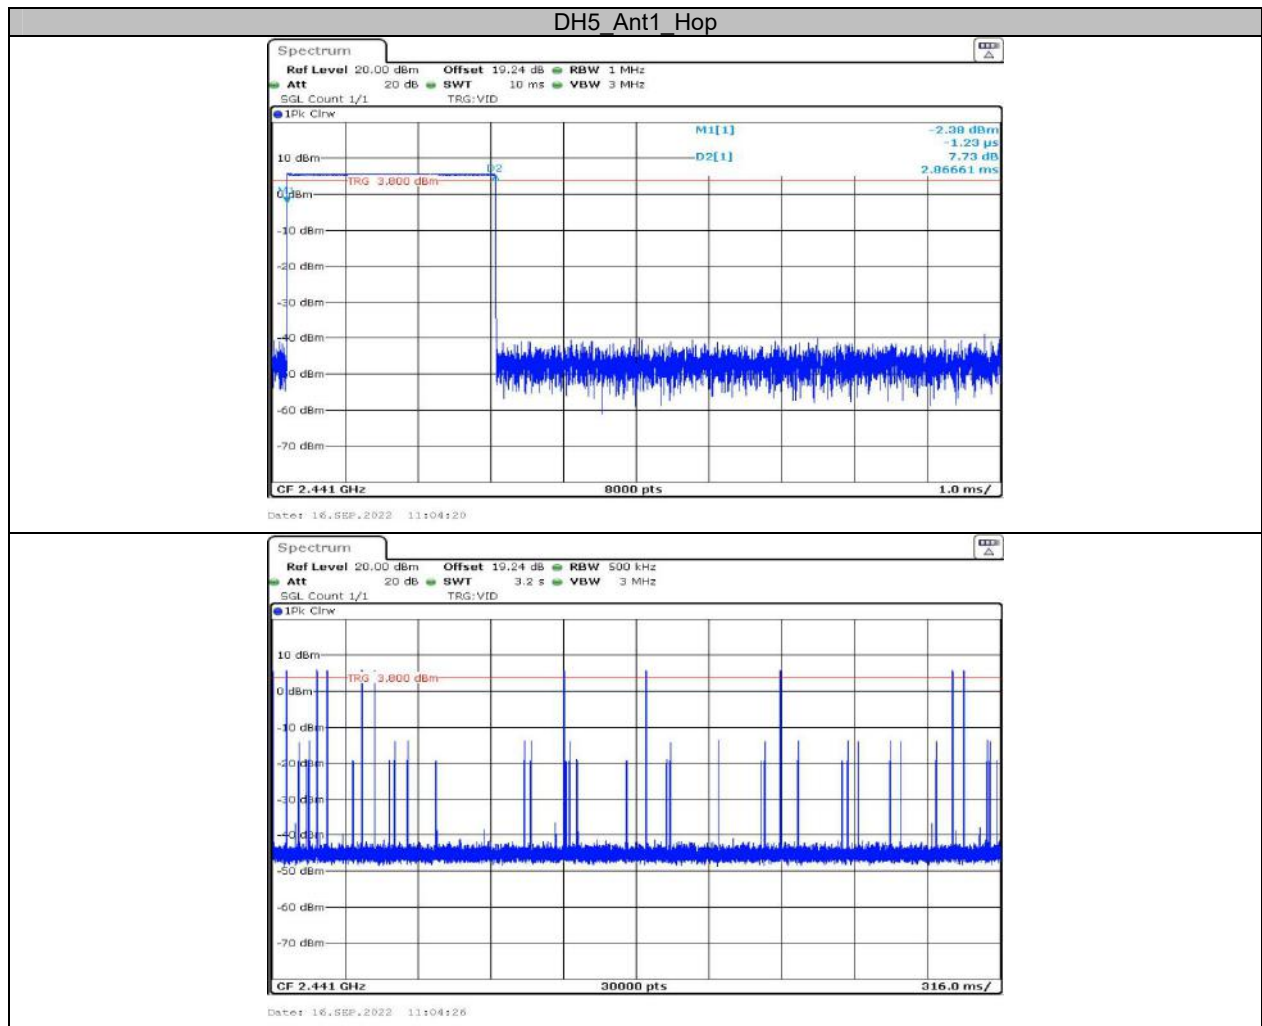


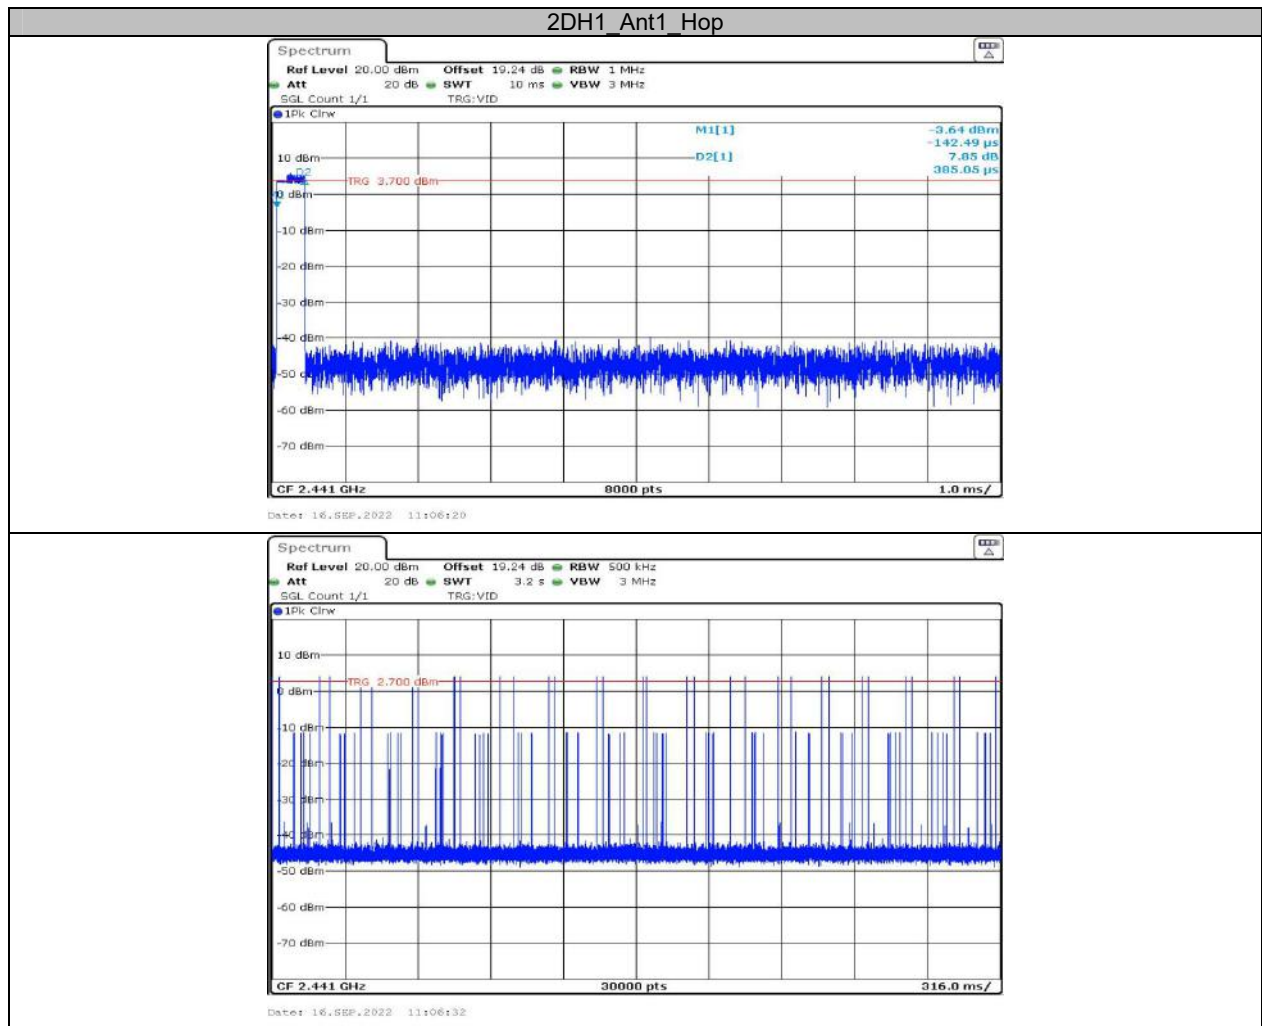


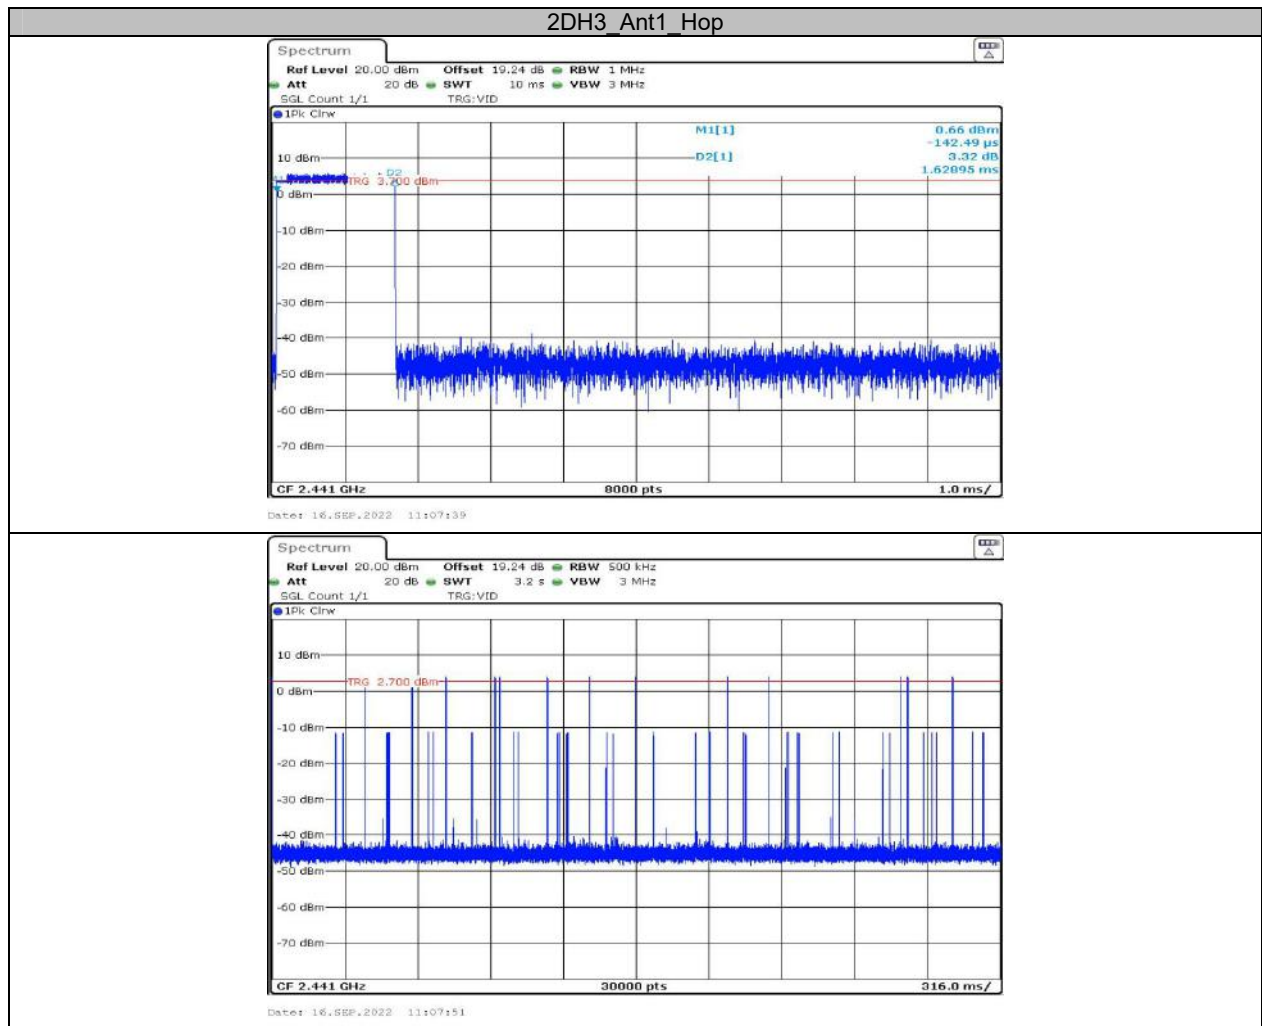


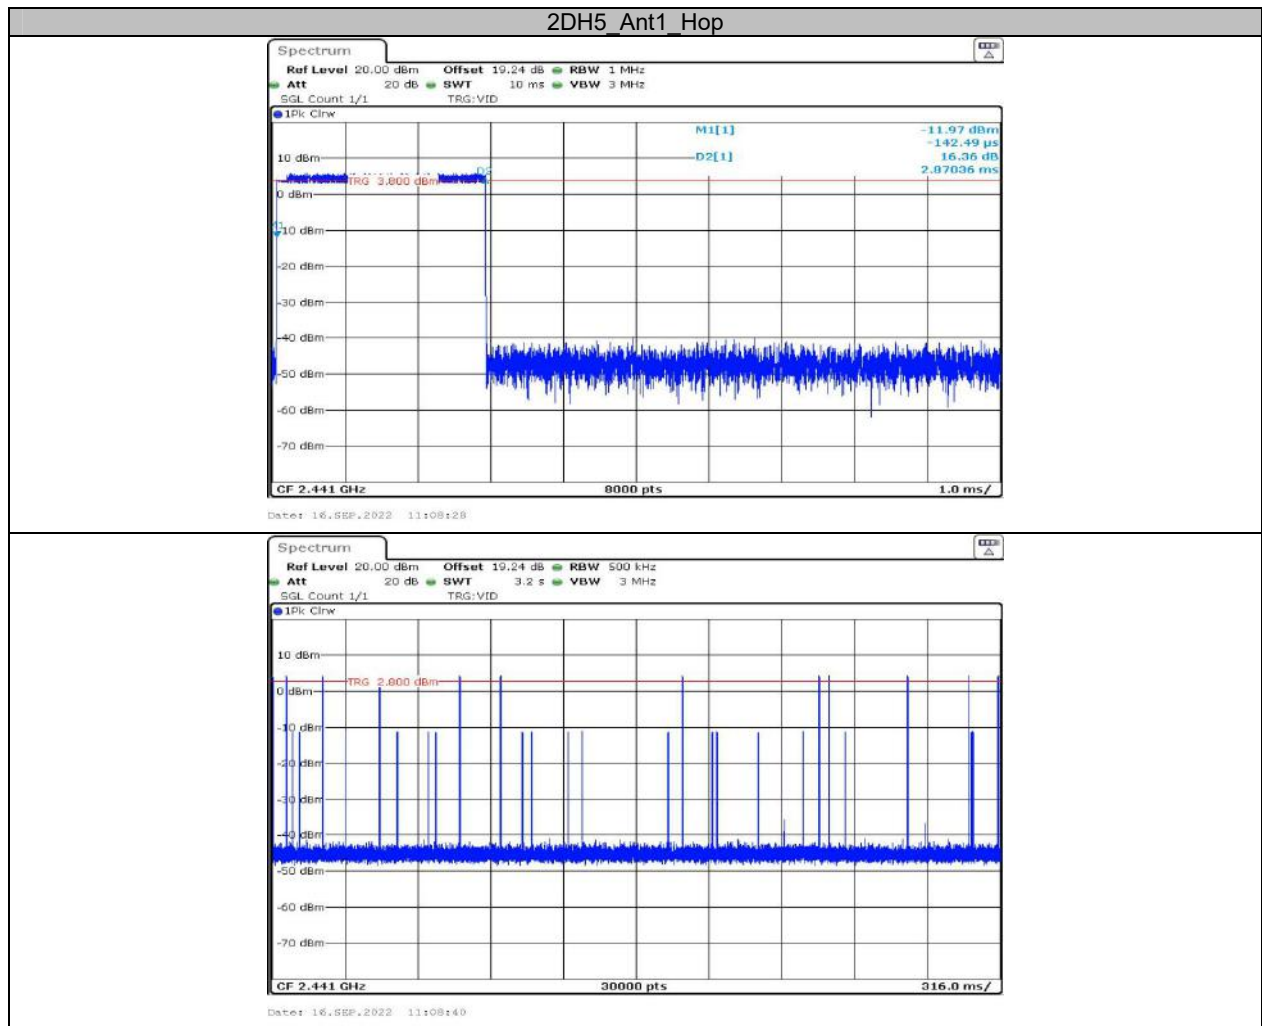



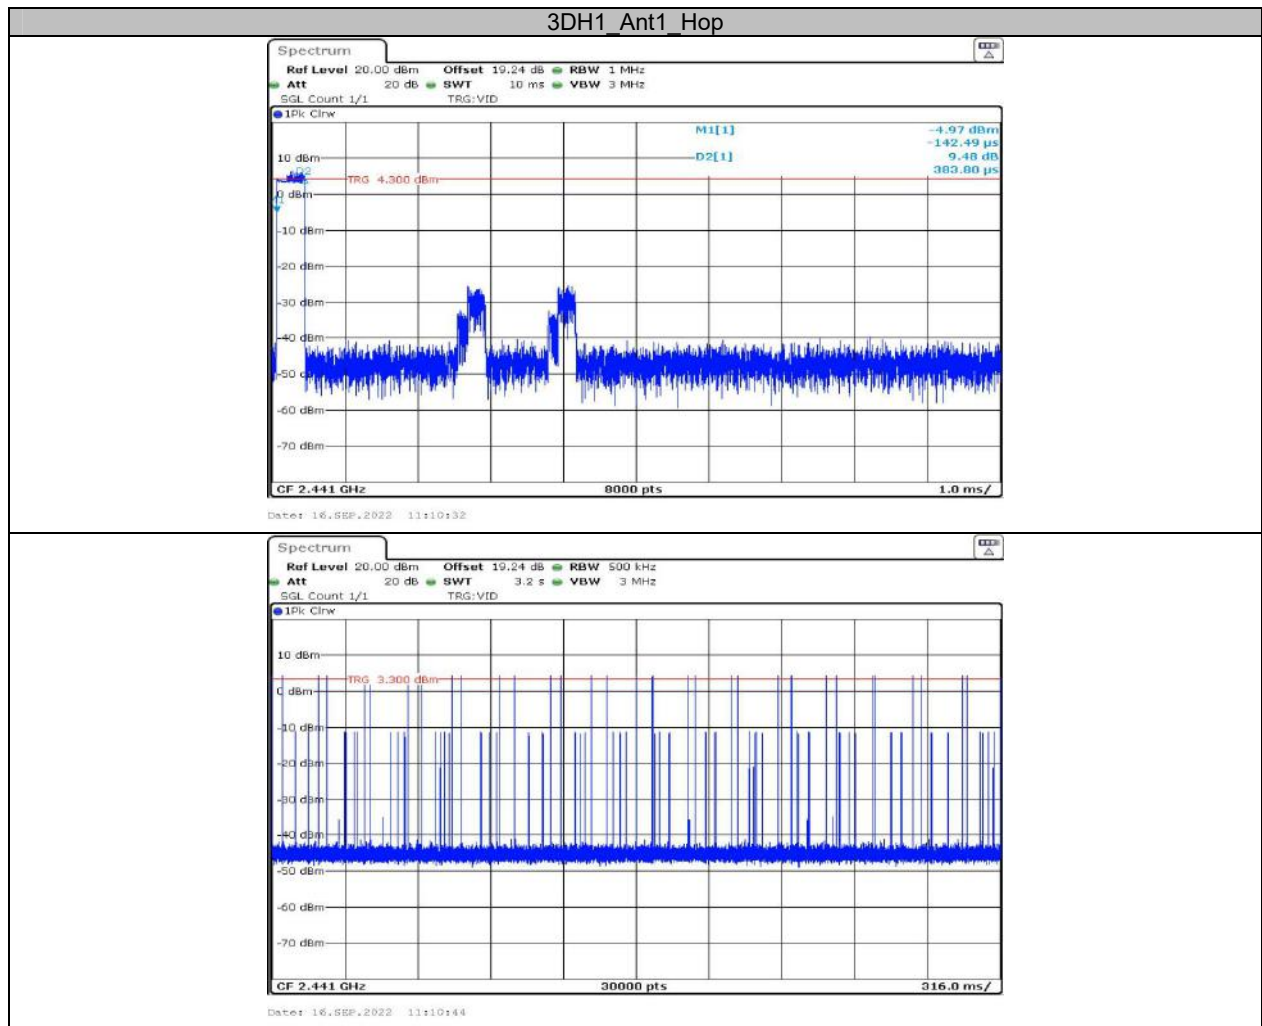


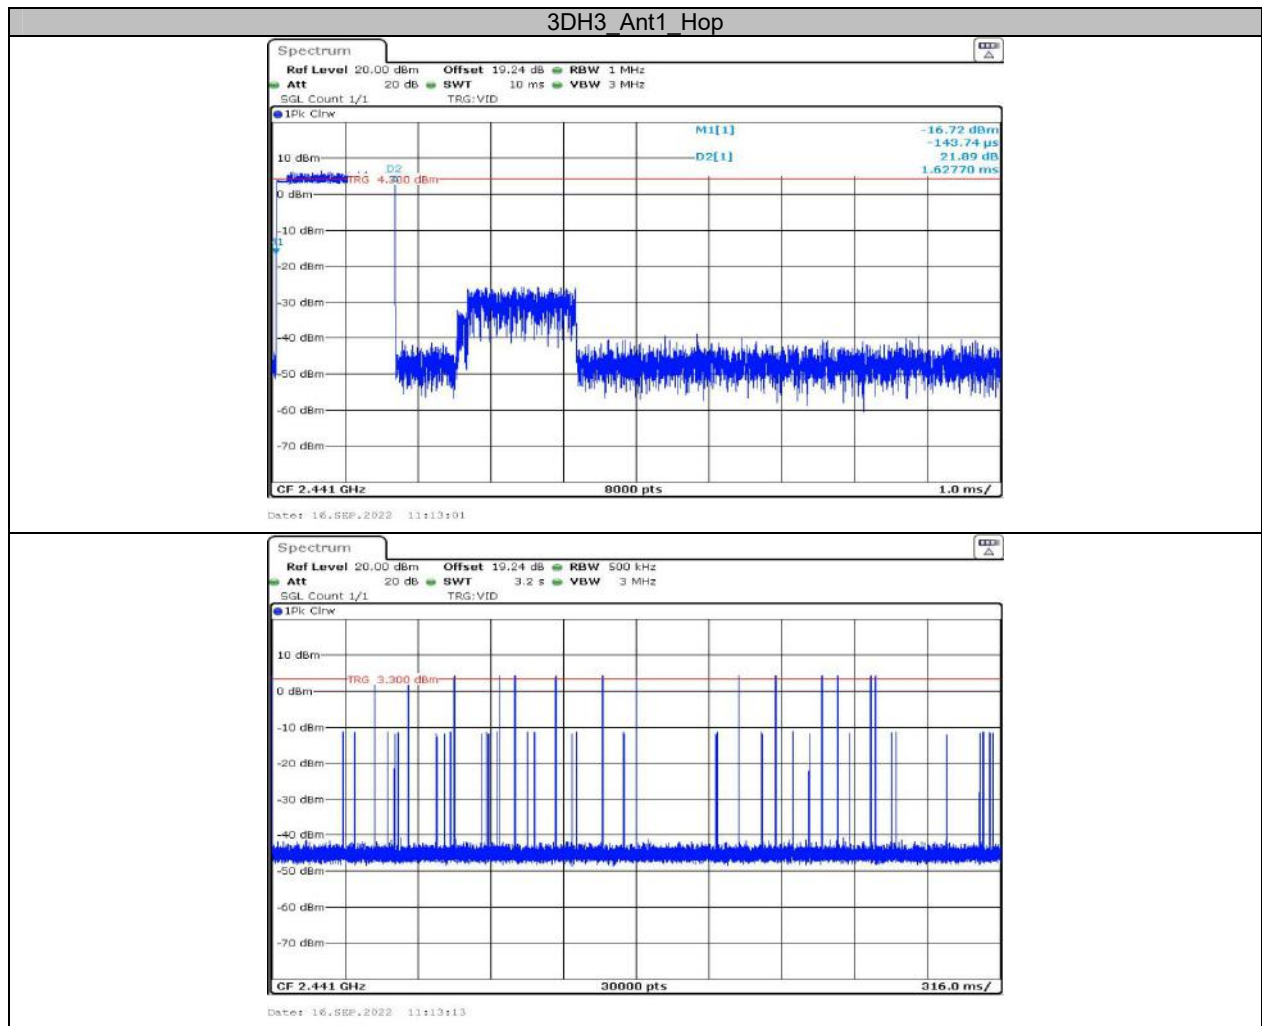

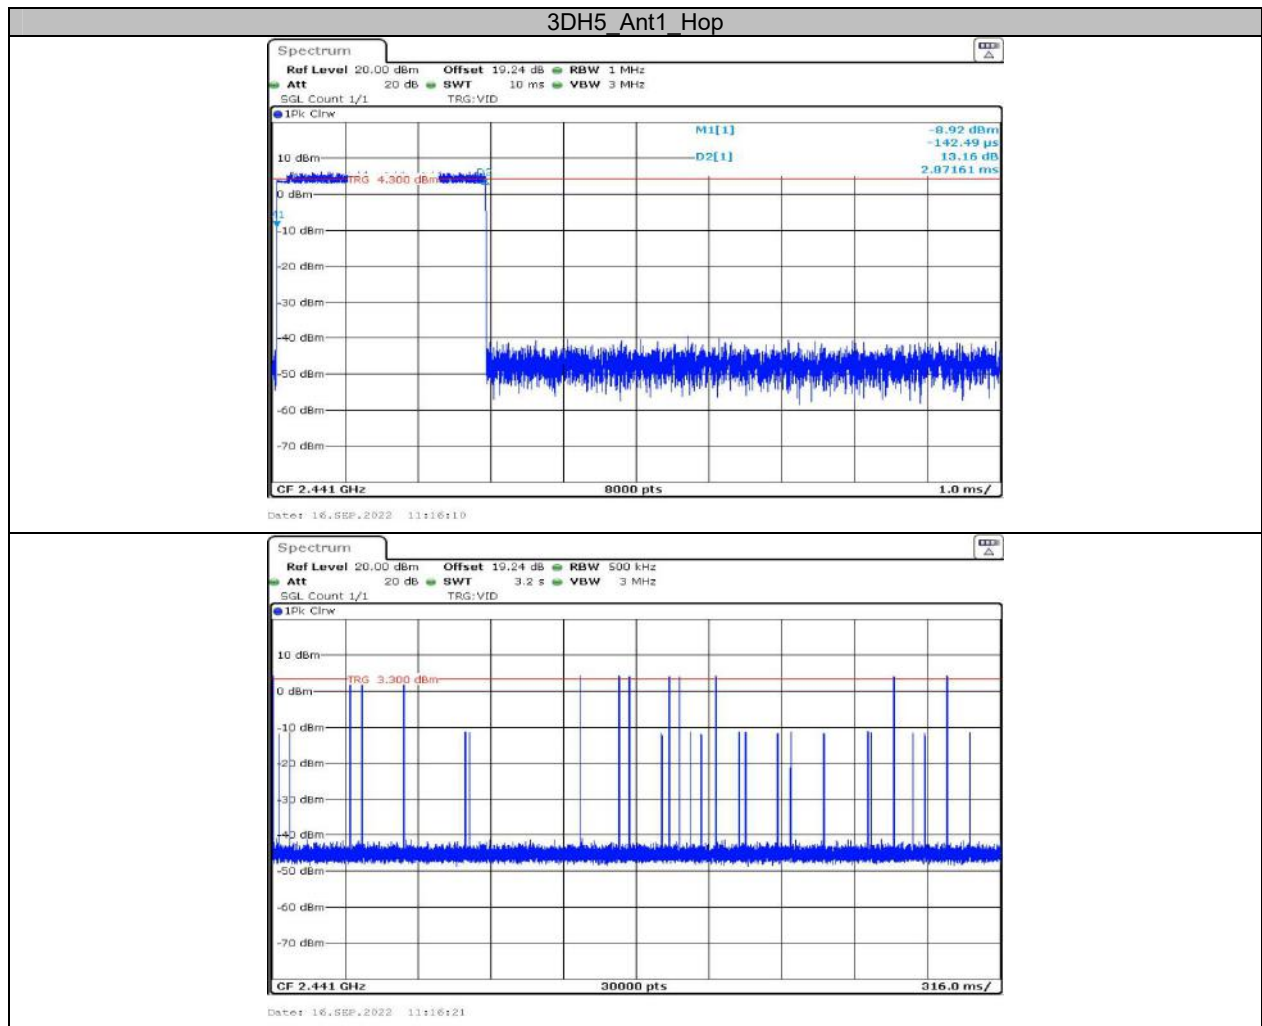


**Appendix F: Number of hopping channels  
Test Result**

| Test Mode | Antenna | Frequency[MHz] | Result[Num] | Limit[Num] | Verdict |
|-----------|---------|----------------|-------------|------------|---------|
| DH1       | Ant1    | Hop            | 79          | $\geq 15$  | PASS    |
| 2DH1      | Ant1    | Hop            | 79          | $\geq 15$  | PASS    |
| 3DH1      | Ant1    | Hop            | 79          | $\geq 15$  | PASS    |

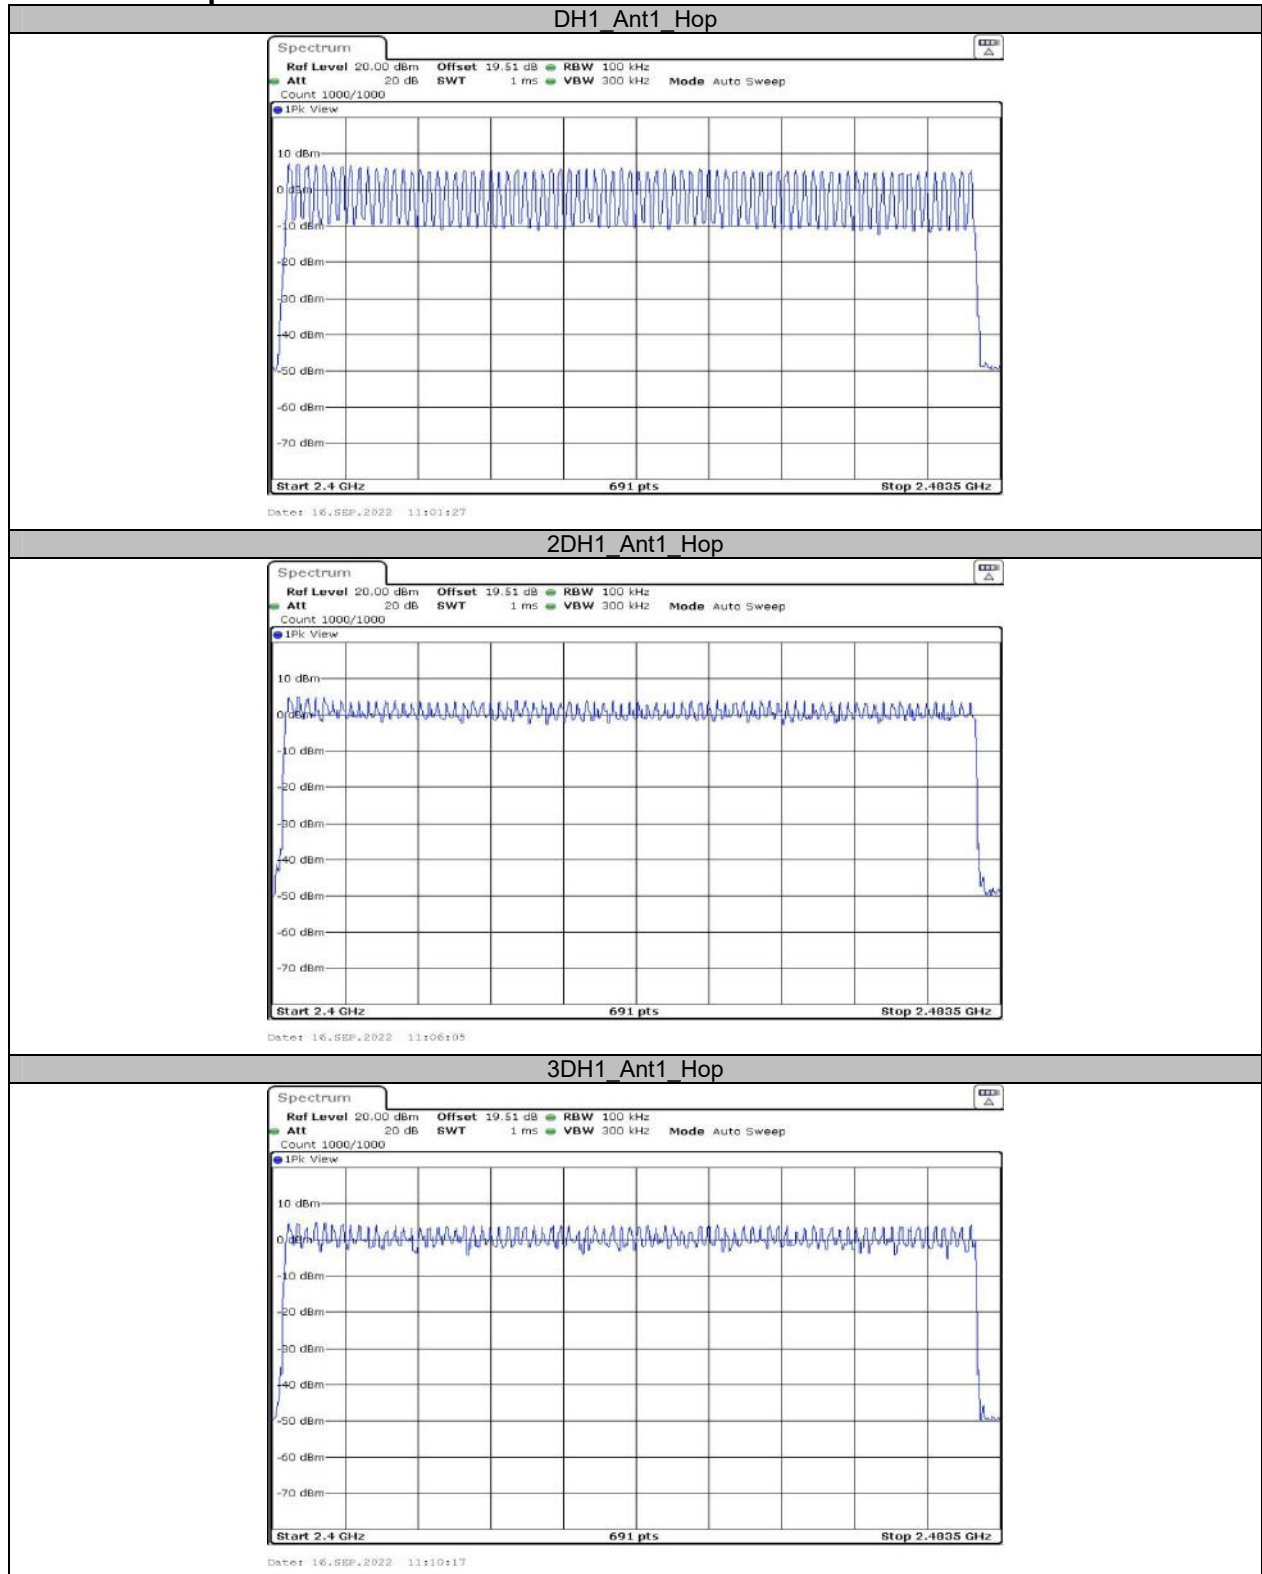
**Test Graphs**

## Appendix G: Band edge measurements Test Graphs

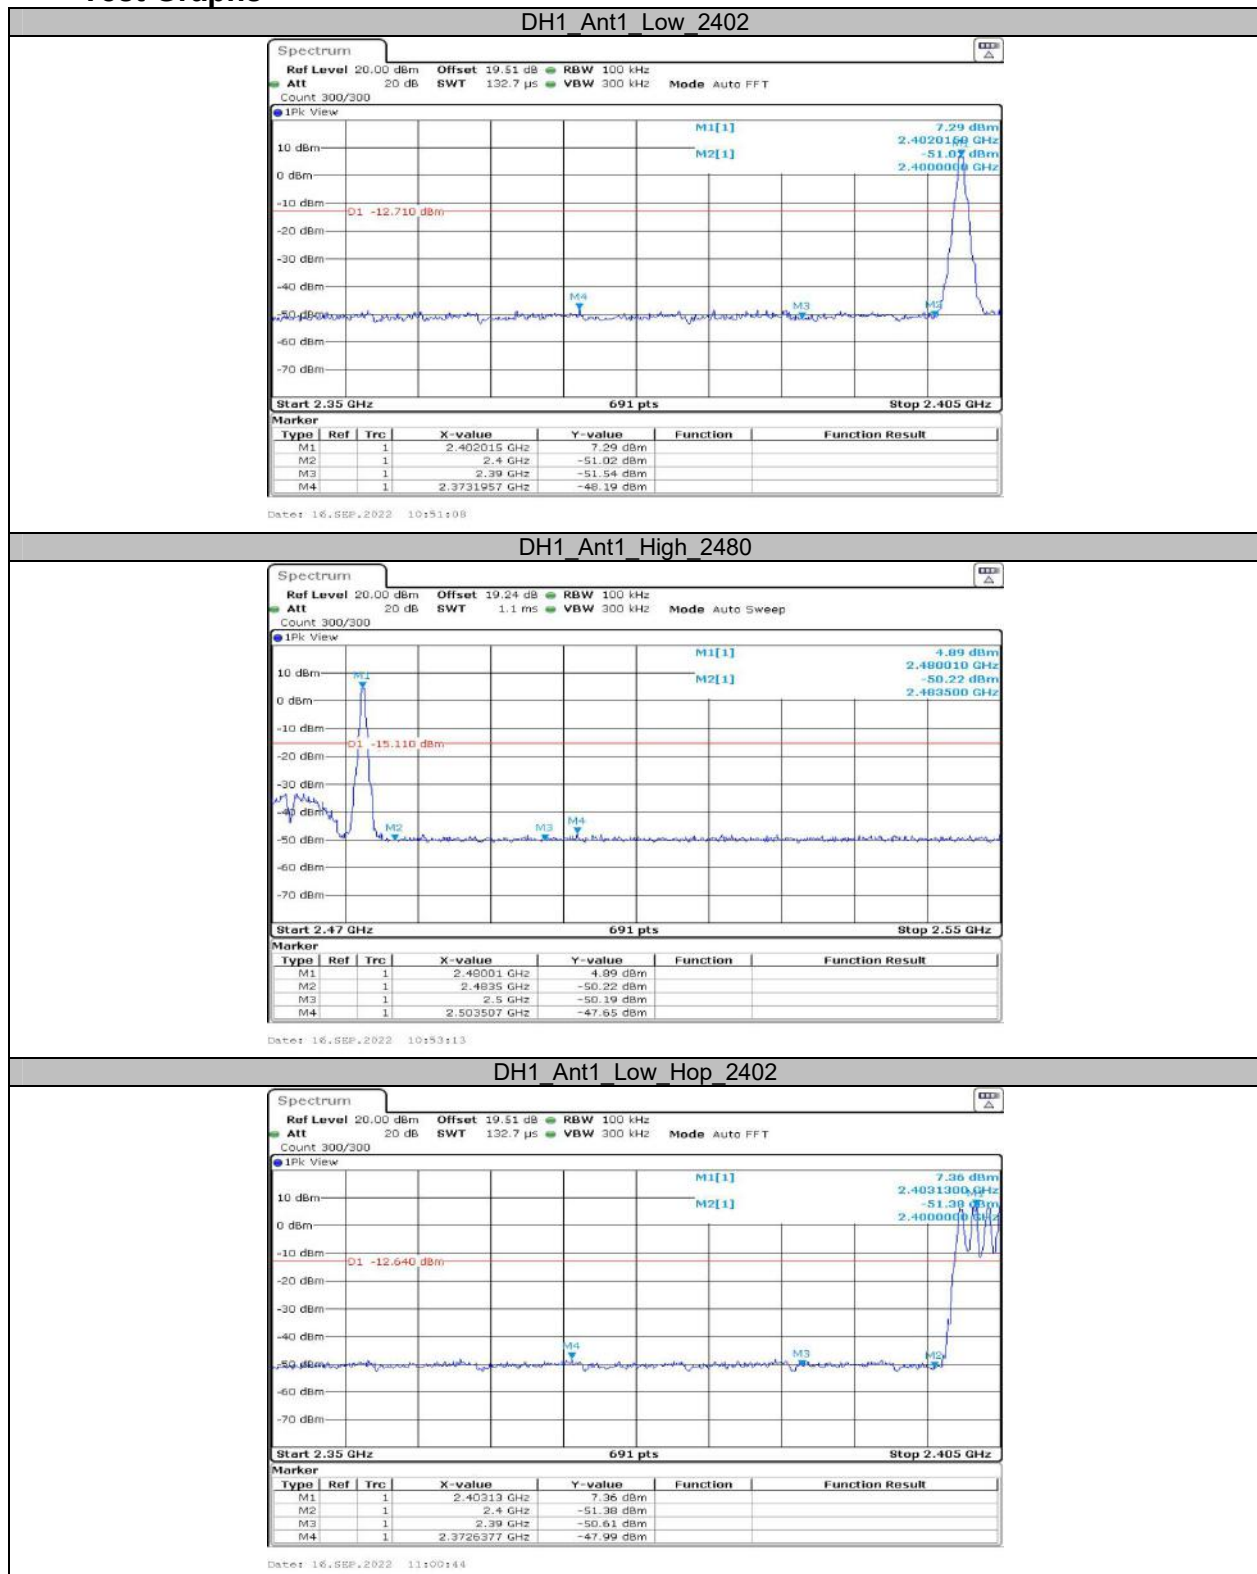




## 2DH1\_Ant1\_Low\_Hop\_2402

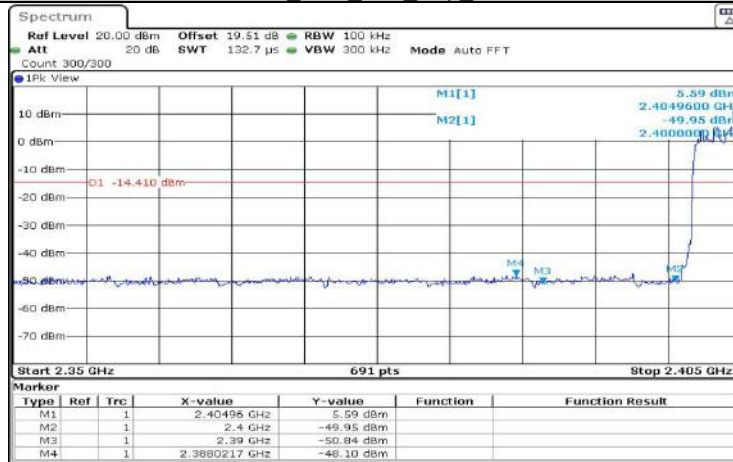


Date: 16\_SEP\_2022 11:05:22

## 2DH1\_Ant1\_High\_Hop\_2480

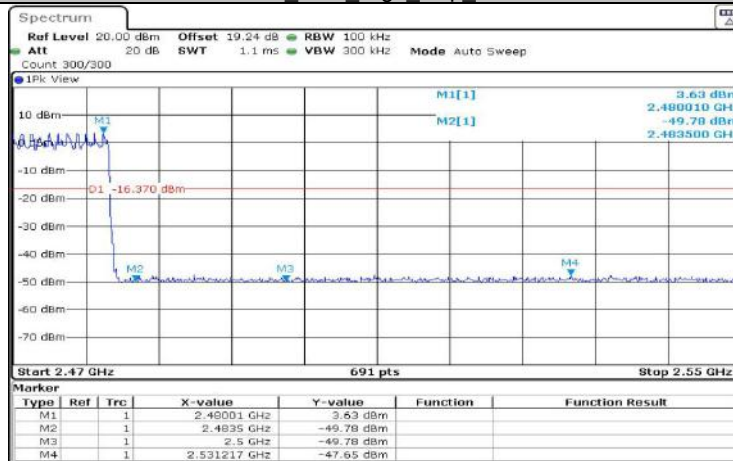

Date: 16\_SEP\_2022 11:06:53

## 3DH1\_Ant1\_Low\_2402

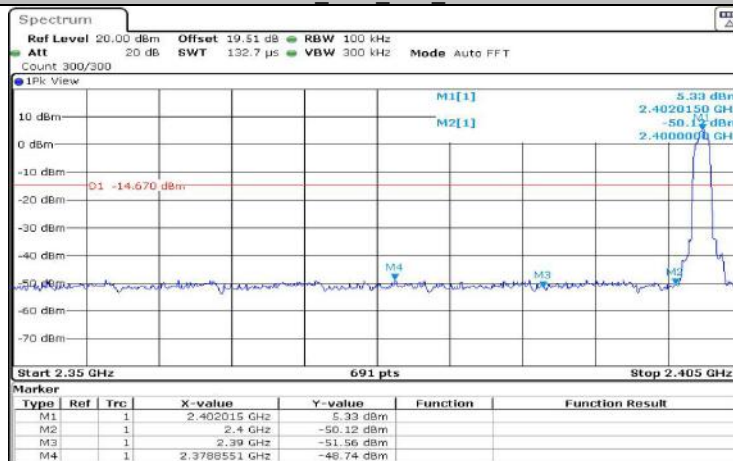

Date: 16\_SEP\_2022 10:57:30





\*\*\*\*\* END OF REPORT \*\*\*\*\*