

SMART KEY FOB MANUAL

1. Outline of Smart Key FOB

Smart Key FOB is mainly used for locking or unlocking the doors of the vehicles.

Smart Key FOB detects signals when it reaches the vicinity of vehicle, and sends signals using radio frequency. (operating temperature: -10 ~ 60°C)

2. Function

2-1. Lock Button

The lock button locks the vehicle door. Once the vehicle's doors has been closed, pressing this button will lock all of the vehicle's door locks.

2-2. Unlock Button

The unlock button opens the vehicle door. When approaching the vehicle, pressing this button will open the lock on the vehicle door.

2-3. Trunk Button



Accessing the vehicle and pressing and holding the trunk button will disengage the trunk door lock.

2-4. Panic Button

Pressing and holding the panic button, repeatedly the horn of the vehicle. The panic button is pressed again in the state will halt horn.

2-5. Remote Start Button

Pressing and holding the remote start button will cause the vehicle to start.

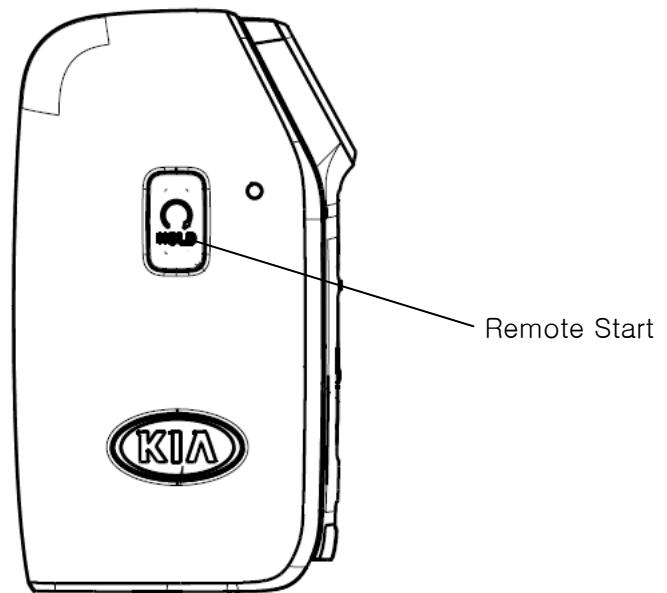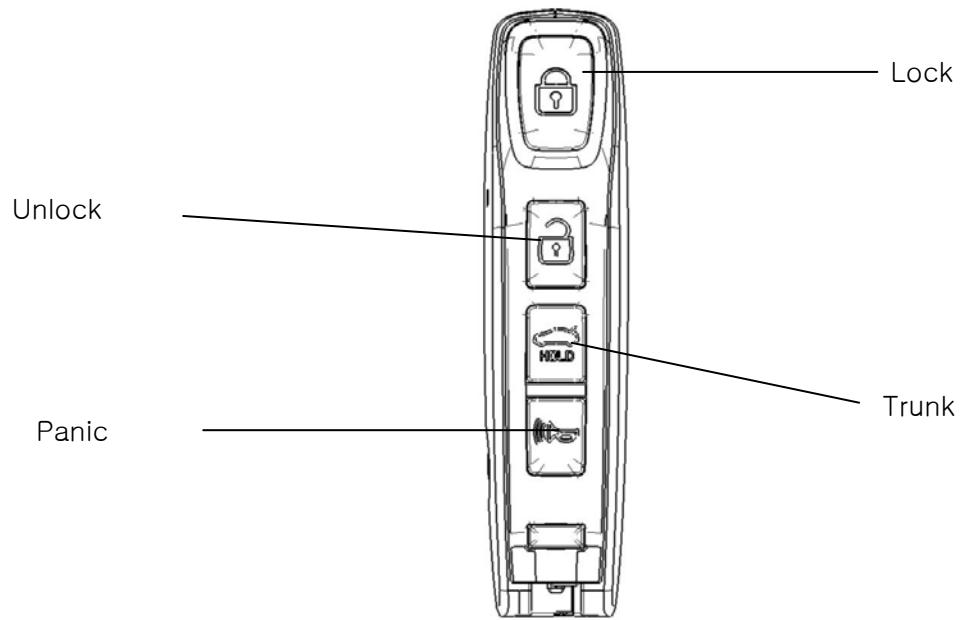

FCC Part 15.19

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Part 15.21

Any changes or modifications (including the antennas) to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

FCC and IC RF Radiation Exposure Statement: This equipment complies with FCC and IC RF Radiation exposure limits set forth for an uncontrolled environment.

This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF du FCC et IC d'exposition aux radiations: Cet équipement est conforme à l'exposition de FCC et IC rayonnements RF limites établies pour un environnement non contrôlé.

L'antenne pour ce transmetteur ne doit pas être même endroit avec d'autres émetteur sauf conformément à FCC et IC procédures de produits Multi-émetteur.