

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Wireless Charger

Model No.: PW0042

Trademark: N/A

FCC ID: 2BBEH-PW0042

Report No.: E01A23030999F00101

Issue Date: May 27, 2023

Prepared for

Jiangxi Kingtron Tech Co., Ltd.

**Luoxin Tech., Industrial Park, 2nd District, Quannan Industrial Park,
Ganzhou, Jiangxi, China, 341800**

Prepared by

Dong Guan Anci Electronic Technology Co., Ltd.

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake
Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr.,
China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Electronic Technology Co., Ltd.**

VERIFICATION OF COMPLIANCE

Applicant:	Jiangxi Kingtron Tech Co., Ltd. Luoxin Tech., Industrial Park, 2nd District, Quannan Industrial Park, Ganzhou, Jiangxi, China, 341800
Manufacturer:	Jiangxi Kingtron Tech Co., Ltd. Luoxin Tech., Industrial Park, 2nd District, Quannan Industrial Park, Ganzhou, Jiangxi, China, 341800
Product Description:	Wireless Charger
Trade Mark:	N/A
Model Number:	PW0042

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.209(2020).

Date of Test : April 18, 2023 to April 28, 2023

Prepared by : Duke Liu
Duke Liu/Supervisor

Reviewer &
Authorized Signer : Tiger Xu
Tomas Yang /Manager



Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E01A23030999F00101

Table of Contents

1 GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT(S)	5
1.3 TEST METHODOLOGY	5
1.4 SPECIAL ACCESSORIES	5
1.5 EQUIPMENT MODIFICATIONS	5
1.6 TEST FACILITY	5
2 SYSTEM TEST CONFIGURATION.....	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 TEST PROCEDURE	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	7
3 SUMMARY OF TEST RESULTS.....	7
4 TEST SYSTEM UNCERTAINTY.....	8
5 CONDUCTED EMISSIONS TEST	9
5.1 MEASUREMENT PROCEDURE	9
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
5.3 MEASUREMENT EQUIPMENT USED.....	9
5.4 CONDUCTED EMISSION LIMIT	9
5.5 MEASUREMENT RESULT	10
5.6 CONDUCTED MEASUREMENT PHOTO.....	13
6 RADIATED EMISSION TEST.....	14
6.1 MEASUREMENT PROCEDURE	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.3 MEASUREMENT EQUIPMENT USED.....	15
6.4 RADIATED EMISSION LIMIT	15
6.5 MEASUREMENT RESULT	17
6.6 RADIATED MEASUREMENT PHOTOS.....	23
7 20DB BANDWIDTH.....	24
7.1 20dB BANDWIDTH LIMIT	24
7.2 TEST INSTRUMENTS.....	24
7.3 TEST PROCEDURE	24
7.4 TEST SETUP.....	24
7.5 TEST RESULT	24
8 ANTENNA APPLICATION	26
8.1 ANTENNA REQUIREMENT	26
8.2 RESULT	26

1 General Information

1.1 Product Description

Characteristics	Description
Product Name	Wireless Charger
Model number	PW0042
Operation Mode	Wireless Charging
Input Rating	5.0V \Rightarrow 3.0A, 9.0V \Rightarrow 2.0A
Power Supply	AC120V/60Hz for adapter
Operating Frequency	110-205KHz for iphone 133.2KHz for Earbuds
Wireless Charging Power	10W for iphone charging 5W for Earbuds charging
Modulation Technique	ASK for Earbuds charging, FSK for iphone charging
Antenna Type	Induction coil

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: 2BBEH-PW0042 filing to comply with the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description EMC Lab.	:	Accredited by CNAS, 2017.06.26 The certificate is valid until 2022.10.28 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L6214. Accredited by A2LA, 2018.03.15 The Certificate Number is 4422.01.
Name of Firm	:	Dong Guan Anci Electronic Technology Co., Ltd.
Site Location	:	1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech Industrial Development Zone, Dongguan City, evelopment Zone, Dongguan City, Guangdong Pr., China.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 onfiguration of Tested System

Fig. 2-1 Configuration of Tested System

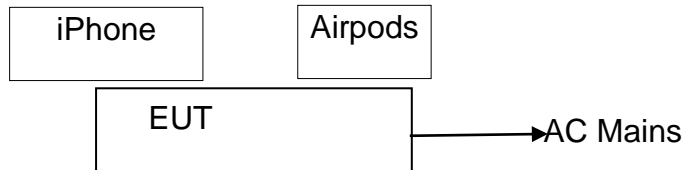


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Wireless Charger	N/A	PW0042	2BBEH-PW0042	EUT
2.	Adapter	N/A	Model: CD217 Input: AC 100-240V, 50/60Hz Output: DC 5V/3A, DC 9/3A, DC 12V/2.5A	N/A	Support Equipment
3.	iphone	Apple	A2404	N/A	Support Equipment
4.	Airpods	Apple	A2190	N/A	Support Equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§2.1049	20dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

4 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%

5 Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)

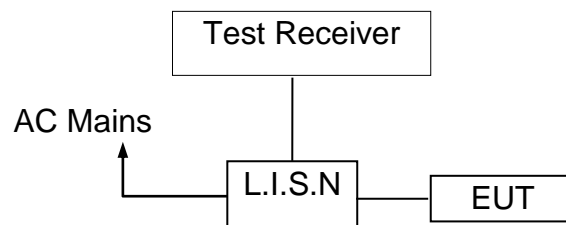

5.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2023-05-12
10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2023-05-12
RF Cable	N/A	N/A	2#	2023-05-12
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2023-05-12

5.4 Conducted Emission Limit

Conducted Emission

Frequency(MHz)

Quasi-peak

Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0

60

50

Note: 1. The lower limit shall apply at the transition frequencies


2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.5 Measurement Result

Operation Mode:	TX	Test Date :	2023-04-24
Frequency Range:	0.15MHz~30MHz	Temperature :	22℃
Test Result:	PASS	Humidity :	55 %
Test By:	Best		

Pass


We pretested modes (Wireless Charging for iphone, Wireless Charging for AirPods, Wireless Charging for iphone+ AirPods) for EUT. The worst mode (Wireless Charging for iphone+ AirPods)test data see follow the table.

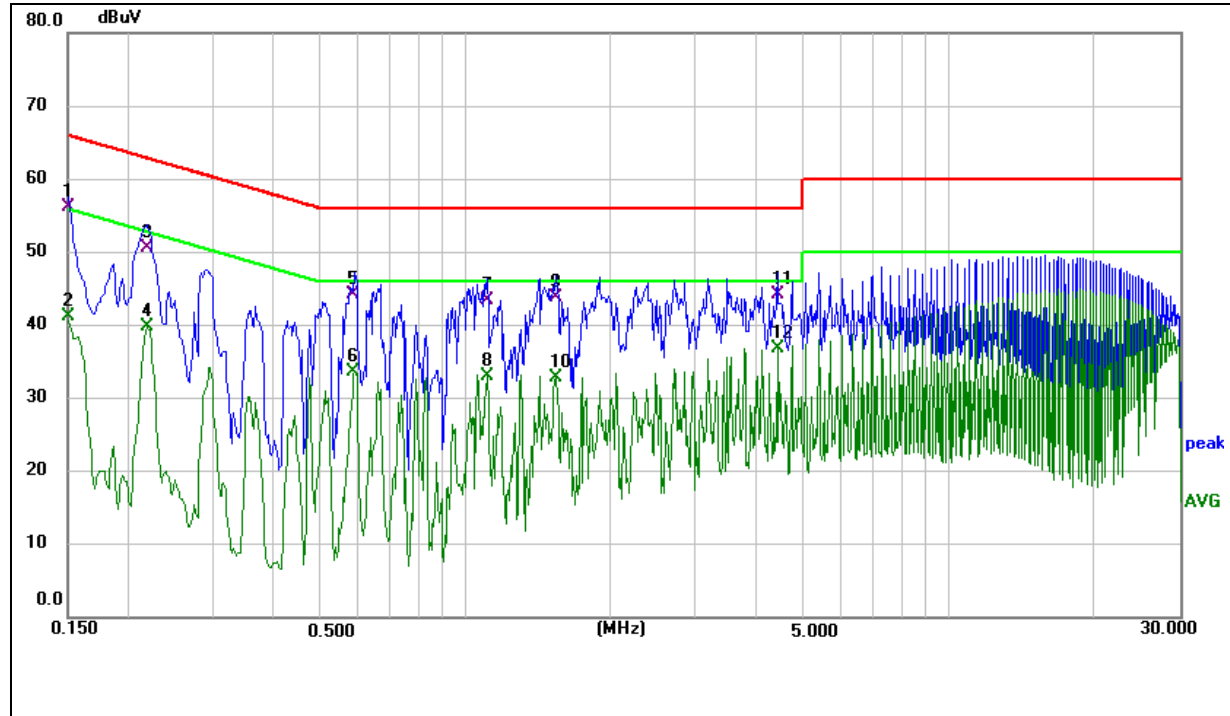Test mode: Wireless Charging for iPhone+ AirPods

Site:	843	Phase:	L1	Temperature(C):	22
Limit:	FCC Part 15 C Conduction(QP)			Humidity(%):	55
EUT:	Wireless Charger	Test Time:	2023-04-24		
M/N.:	PW0042	Power Rating:	AC 120V/60Hz		
Mode:	Wireless Charging for iPhone+ AirPods	Test Engineer:	Jack		

Note:

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1500	46.27	9.83	56.10	66.00	-9.90	QP	
2	0.1500	31.37	9.83	41.20	56.00	-14.80	AVG	
3	0.2180	40.61	9.99	50.60	62.89	-12.29	QP	
4	0.2180	29.84	9.99	39.83	52.89	-13.06	AVG	
5	0.5899	33.45	10.75	44.20	56.00	-11.80	QP	
6	0.5899	22.82	10.75	33.57	46.00	-12.43	AVG	
7	1.1060	33.79	9.61	43.40	56.00	-12.60	QP	
8	1.1060	23.35	9.61	32.96	46.00	-13.04	AVG	
9	1.5420	34.18	9.62	43.80	56.00	-12.20	QP	
10	1.5420	23.12	9.62	32.74	46.00	-13.26	AVG	
11	4.4260	34.51	9.69	44.20	56.00	-11.80	QP	
12	4.4260	27.12	9.69	36.81	46.00	-9.19	AVG	

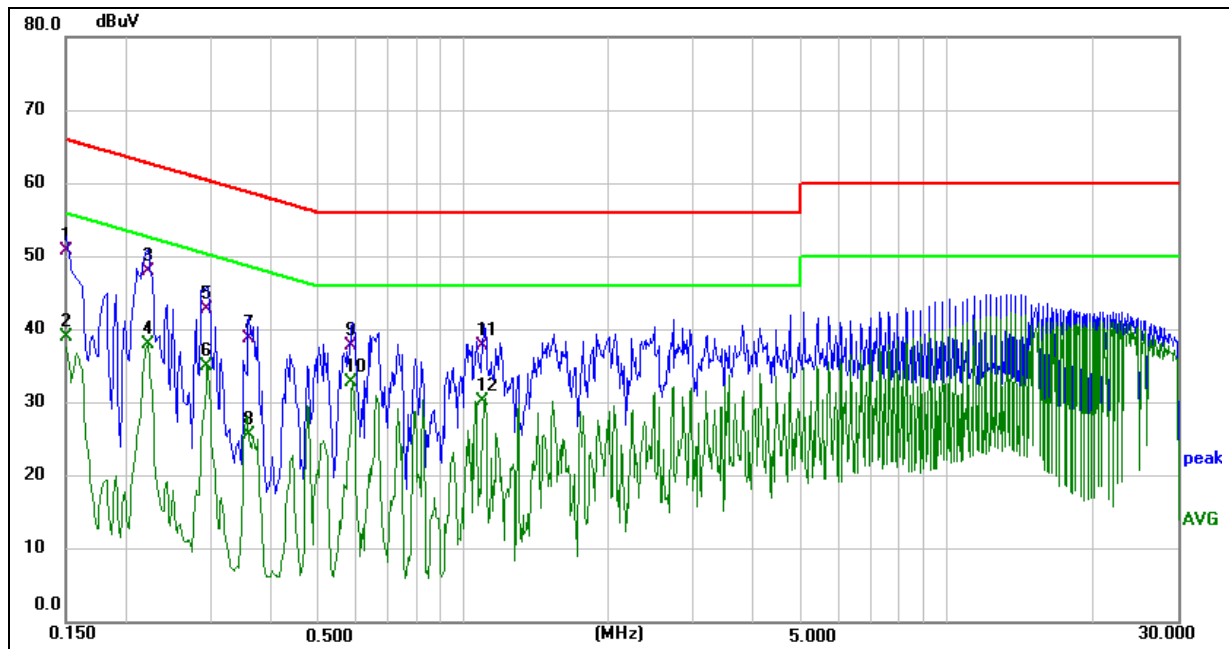

Site:	843	Phase:	N	Temperature(C):	22
Limit:	FCC Part 15 C Conduction(QP)			Humidity(%):	55
EUT:	Wireless Charger	Test Time:	2023-04-24		
M/N.:	PW0042	Power Rating:	AC 120V/60Hz		
Mode:	Wireless Charging for iPhone+ AirPods	Test Engineer:	Jack		

Note:

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1500	40.96	9.84	50.80	66.00	-15.20	QP	
2	0.1500	29.07	9.84	38.91	56.00	-17.09	AVG	
3	0.2220	37.90	10.00	47.90	62.74	-14.84	QP	
4	0.2220	27.96	10.00	37.96	52.74	-14.78	AVG	
5	0.2940	32.56	10.14	42.70	60.41	-17.71	QP	
6	0.2940	24.95	10.14	35.09	50.41	-15.32	AVG	
7	0.3580	28.52	10.28	38.80	58.77	-19.97	QP	
8	0.3580	15.38	10.28	25.66	48.77	-23.11	AVG	
9	0.5899	27.15	10.75	37.90	56.00	-18.10	QP	
10	0.5899	22.13	10.75	32.88	46.00	-13.12	AVG	
11	1.1019	28.19	9.61	37.80	56.00	-18.20	QP	
12	1.1019	20.70	9.61	30.31	46.00	-15.69	AVG	

5.6 Conducted Measurement Photo




6 Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

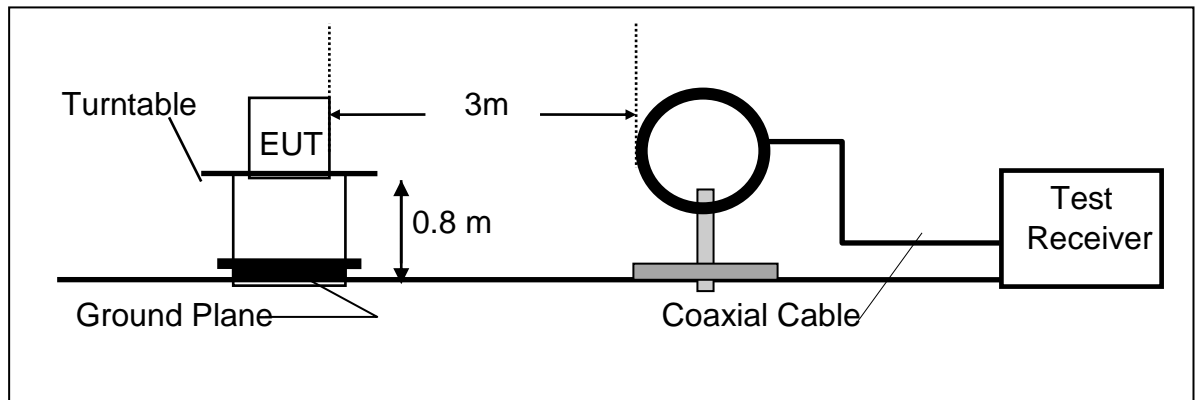

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

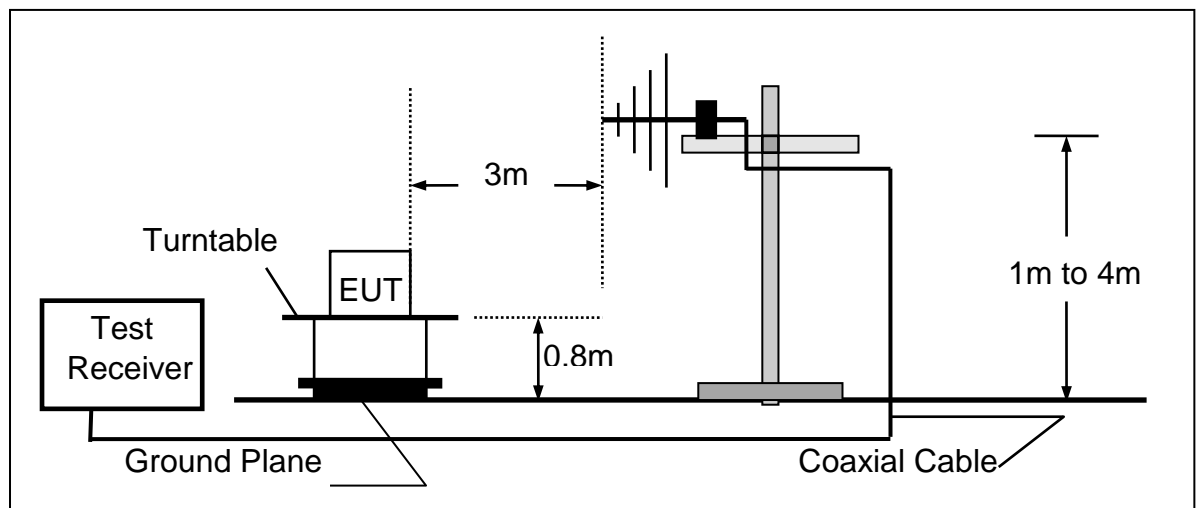

6.3 Measurement Equipment Used

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2023-10-07
2.	Pre-Amplifier	HP	8447D	2727A06172	2023-05-12
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2023-05-12
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2023-10-07
5.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-2m	N/A	2023-10-07
6.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-0.3m	N/A	2023-10-07
7.	RF Cable	N/A	N/A	6#	2023-05-12
8.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2024-11-11
9.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	$2400 / F(\text{KHz})$	300m	$10000 * 2400/F(\text{KHz})$	$20\log 2400/F(\text{KHz}) + 80$
0.490 – 1.705	$24000 / F(\text{KHz})$	30m	$100 * 24000/F(\text{KHz})$	$20\log 24000/F(\text{KHz}) + 40$
1.705 – 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 – 88.0	100	3m	100	$20\log 100$
88.0 – 216.0	150	3m	150	$20\log 150$
216.0 – 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

15.205 Restricted bands of operation


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result


We pretested modes (Wireless Charging for iphone, Wireless Charging for Airpods, Wireless Charging for iphone+ Airpods) for EUT. The worst mode(Wireless Charging for iphone+ Airpods) test data see follow the table.

Test mode: Wireless Charging for iPhone+Airpods

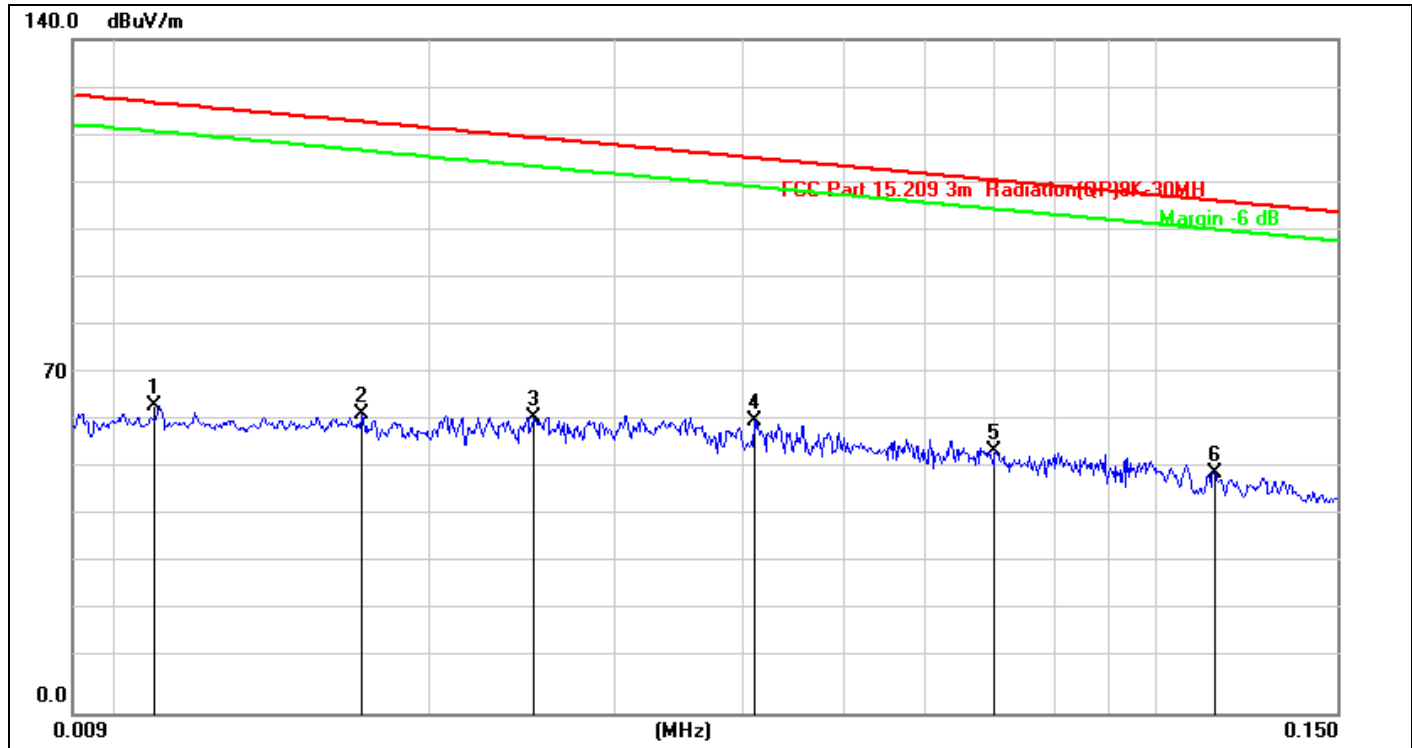

Site:	LAB	Antenna::Vertical	Temperature(C):23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)		Humidity(%):56.7%
EUT:	Wireless Charger	Test Time:	2023-04-24
M/N.:	PW0042	Power Rating:	AC 120V/60Hz
Mode:	Wireless Charging for iPhone+Airpods	Test Engineer:	sunshine
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	0.0108	43.59	20.42	64.01	126.92	-62.91	QP	
2	0.0171	41.72	20.33	62.05	122.93	-60.88	QP	
3	0.0251	41.22	20.22	61.44	119.60	-58.16	QP	
4	0.0410	40.56	20.03	60.59	115.34	-54.75	QP	
5	0.0700	34.85	19.64	54.49	110.69	-56.20	QP	
6	0.1140	30.47	19.56	50.03	106.46	-56.43	QP	

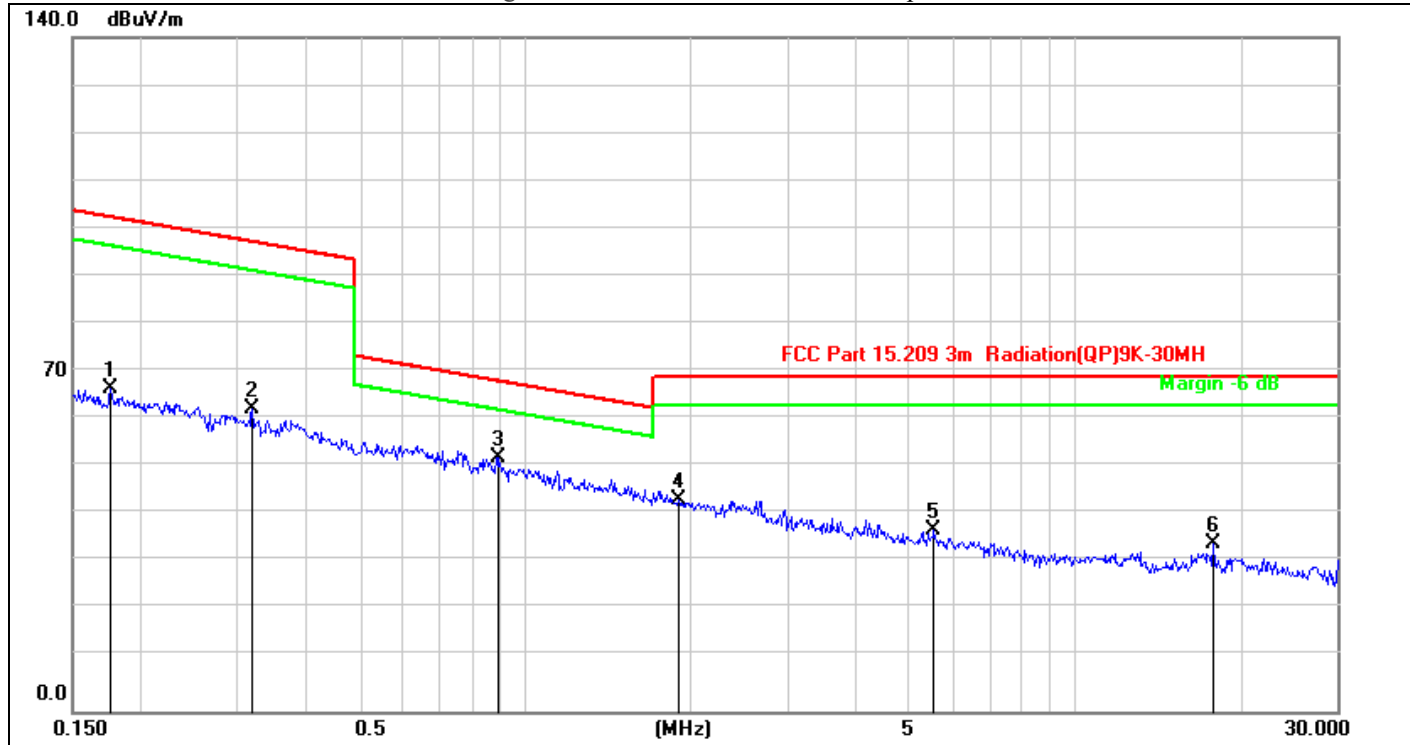


Site:	LAB	Antenna: Vertical	Temperature(C):23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)		Humidity(%):56.7%
EUT:	Wireless Charger	Test Time:	2023-04-24
M/N.:	PW0042	Power Rating:	AC 120V/60Hz
Mode:	Wireless Charging for iPhone+Airpods	Test Engineer:	sunshine
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	0.1758	47.43	19.64	67.07	102.70	-35.63	QP	
2	0.3183	43.15	19.62	62.77	97.55	-34.78	QP	
3	0.8897	33.29	19.47	52.76	68.63	-15.87	QP	
4	1.8976	24.34	19.52	43.86	69.50	-25.64	QP	
5	5.5346	17.99	19.76	37.75	69.50	-31.75	QP	
6	17.8490	14.20	20.76	34.96	69.50	-34.54	QP	


Note:

- (1) All Readings are Peak Value.
- (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) EUT lying on the table position is the worst case result in the report.

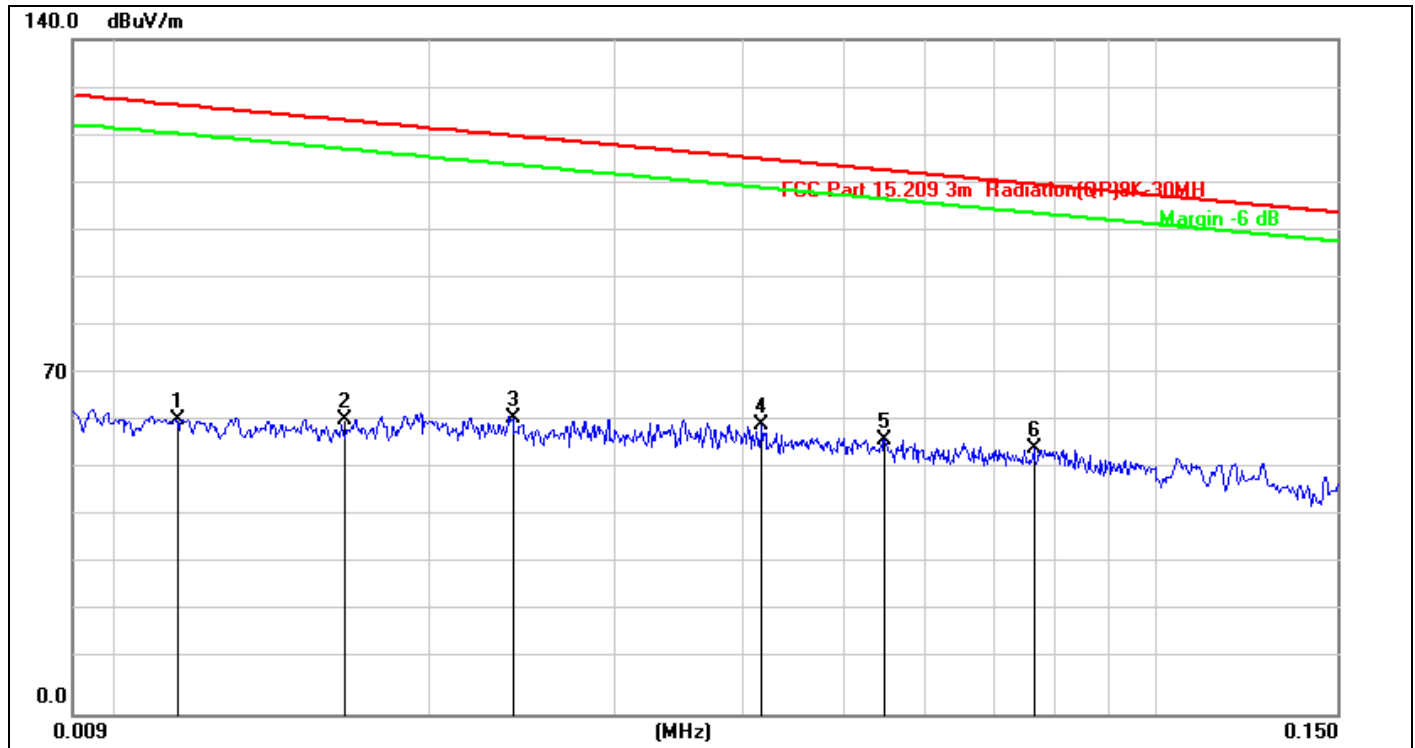Test mode: Wireless Charging for iPhone+Airpods

Site:	LAB	Antenna: Horizontal	Temperature(C):23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)		Humidity(%):56.7%
EUT:	Wireless Charger	Test Time:	2023-04-24
M/N.:	PW0042	Power Rating:	AC 120V/60Hz
Mode:	Wireless Charging for iPhone+Airpods	Test Engineer:	sunshine
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	0.0114	40.83	20.41	61.24	126.45	-65.21	QP	
2	0.0165	40.85	20.34	61.19	123.24	-62.05	QP	
3	0.0240	41.23	20.23	61.46	119.99	-58.53	QP	
4	0.0417	39.85	20.02	59.87	115.19	-55.32	QP	
5	0.0548	37.06	19.87	56.93	112.82	-55.89	QP	
6	0.0763	35.36	19.67	55.03	109.94	-54.91	QP	

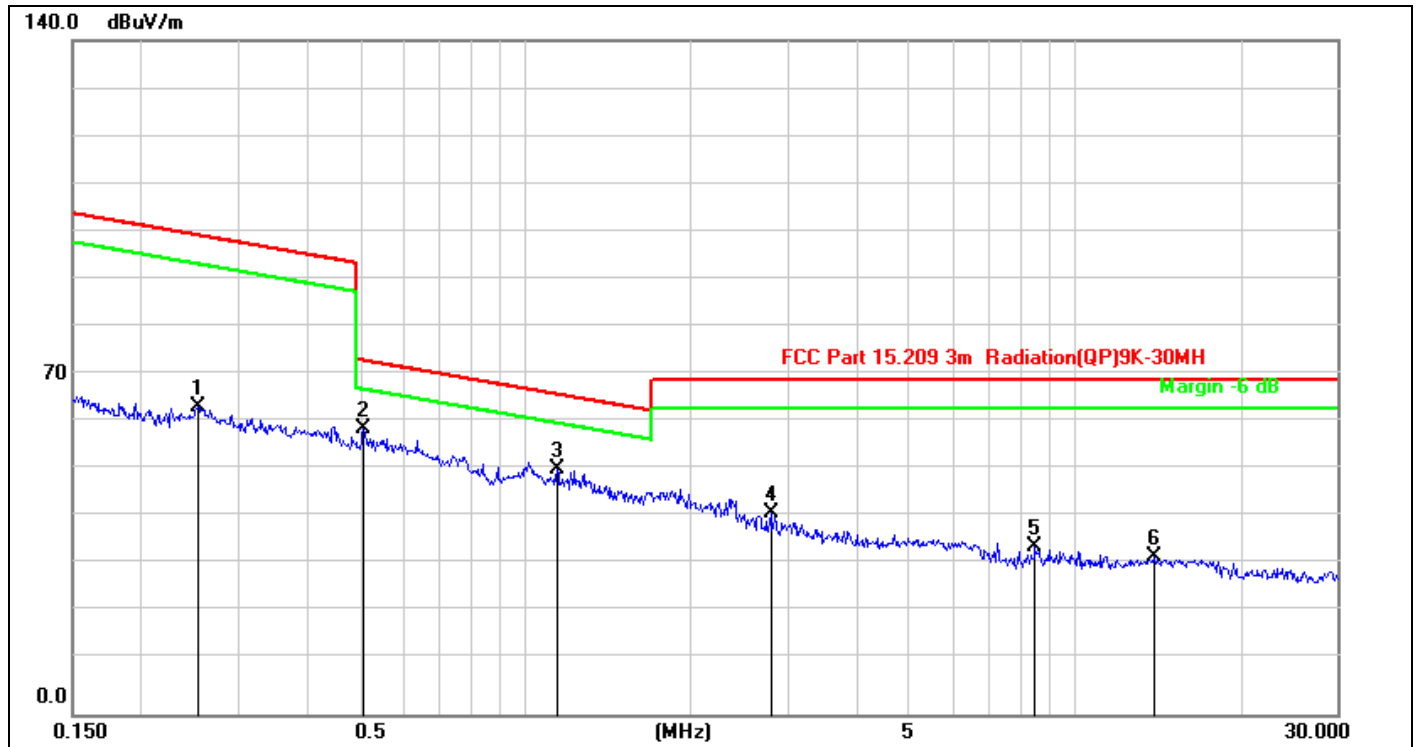

Site:	LAB	Antenna::Horizontal	Temperature(C):23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)		Humidity(%):56.7%
EUT:	Wireless Charger	Test Time:	2023-04-24
M/N.:	PW0042	Power Rating:	AC 120V/60Hz
Mode:	Wireless Charging for iPhone+Airpods	Test Engineer:	sunshine
Note:			


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	0.2535	44.10	19.63	63.73	99.52	-35.79	QP	
2	0.5070	39.85	19.59	59.44	73.50	-14.06	QP	
3	1.1411	31.30	19.46	50.76	66.48	-15.72	QP	
4	2.7942	22.20	19.61	41.81	69.50	-27.69	QP	
5	8.4561	15.00	19.74	34.74	69.50	-34.76	QP	
6	13.9146	12.25	20.33	32.58	69.50	-36.92	QP	

Note:

- (1) All Readings are Peak Value.
- (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) EUT lying on the table position is the worst case result in the report.


We pretested modes (Wireless Charging for iphone, Wireless Charging for Airpods, Wireless Charging for iphone+ Airpods) for EUT. The worst mode(Wireless Charging for iphone+ Airpods) test data see follow the table.

Test mode: Wireless Charging for iPhone+Airpods

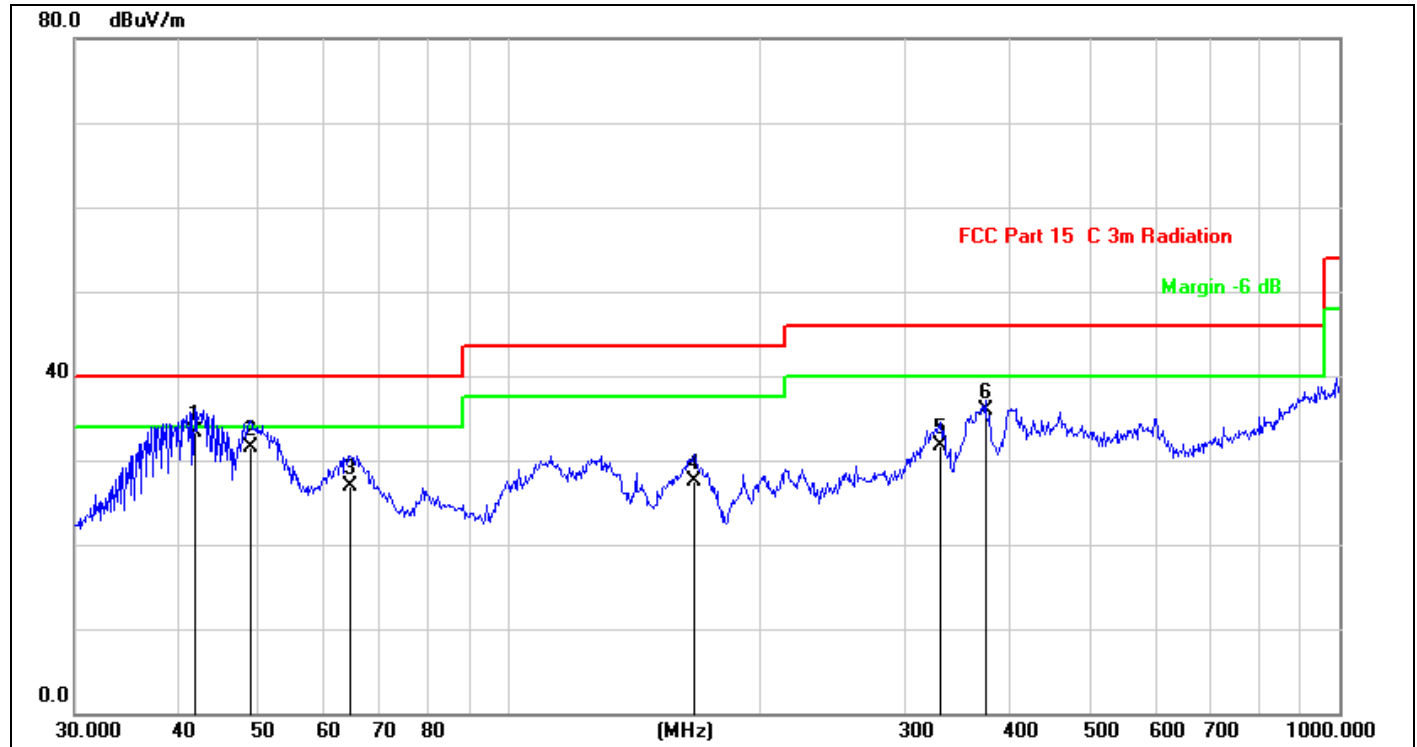

Site:	LAB	Antenna::Vertical	Temperature(C):23.4(C)
Limit:	FCC Part 15 Class B 3m Radiation(QP)	Test Time:	Humidity(%):56.7%
EUT:	Wireless Charger	Power Rating:	2023-04-24
M/N.:	PW0042	Test Engineer:	AC 120V/60Hz
Mode:	Wireless Charging for iPhone+Airpods		sunshine
Note:			


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	41.8596	42.74	-9.44	33.30	40.00	-6.70	QP	
2	48.8429	40.78	-9.20	31.58	40.00	-8.42	QP	
3	64.4331	33.43	-6.54	26.89	40.00	-13.11	QP	
4	167.2368	36.41	-8.96	27.45	43.50	-16.05	QP	
5	331.3546	32.98	-1.29	31.69	46.00	-14.31	QP	
6	374.6225	35.86	0.03	35.89	46.00	-10.11	QP	

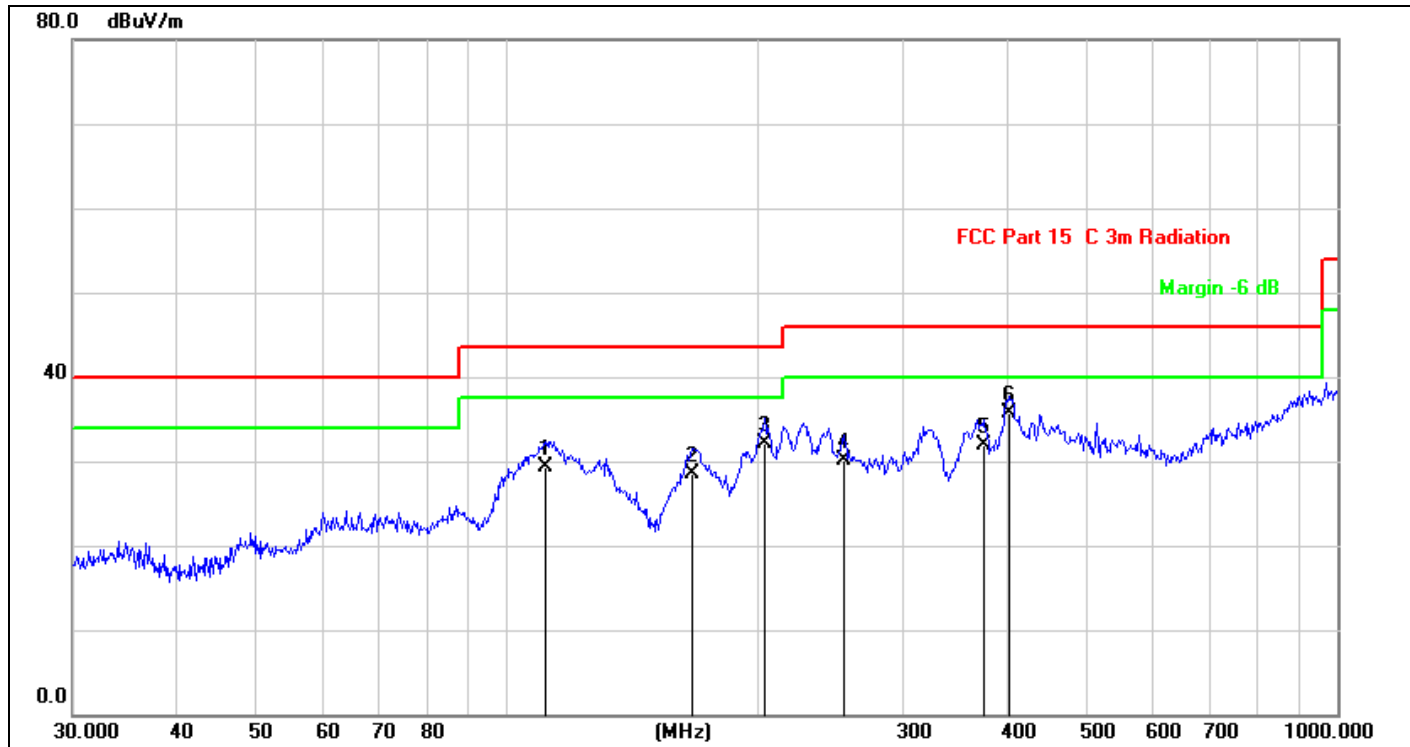

Site:	LAB	Antenna::Horizontal	Temperature(C):23.4(C)
Limit:	FCC Part 15 Class B 3m Radiation(QP)		Humidity(%):56.7%
EUT:	Wireless Charger	Test Time:	2023-04-24
M/N.:	PW0042	Power Rating:	AC 120V/60Hz
Mode:	Wireless Charging for iPhone+Airpods	Test Engineer:	sunshine
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	111.3468	33.97	-4.63	29.34	43.50	-14.16	QP	
2	167.2368	37.44	-8.96	28.48	43.50	-15.02	QP	
3	204.2377	37.16	-4.98	32.18	43.50	-11.32	QP	
4	254.7284	33.73	-3.65	30.08	46.00	-15.92	QP	
5	374.6225	31.92	0.03	31.95	46.00	-14.05	QP	
6	401.8385	34.91	0.77	35.68	46.00	-10.32	QP	

6.6 Radiated Measurement Photos

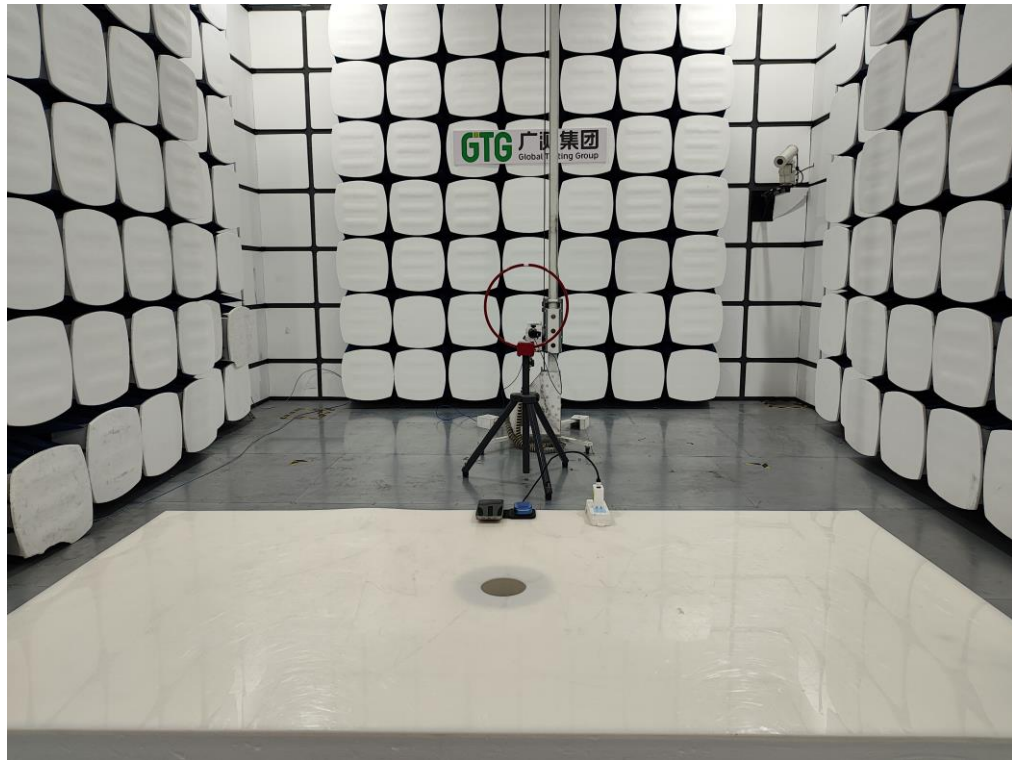

7 20db Bandwidth

7.1 20dB Bandwidth Limit

None: for reporting purposed only.


7.2 Test Instruments

Refer a test equipment and calibration data table in this test report.

7.3 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


7.4 Test Setup




7.5 Test Result

Charging Mode	Frequency (KHz)	20dB Bandwidth (KHz)	Results
iPhone	112.1	2.431	PASS
Airpods	133.2	2.504	PASS

20 dB Bandwidth Test plot

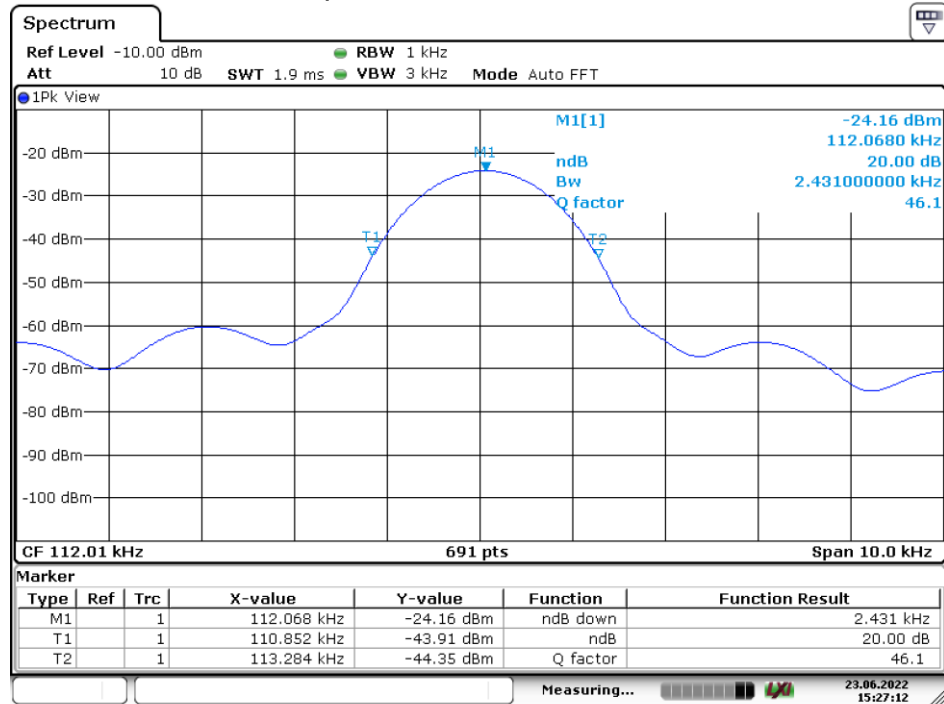

Wireless Charging for iPhone

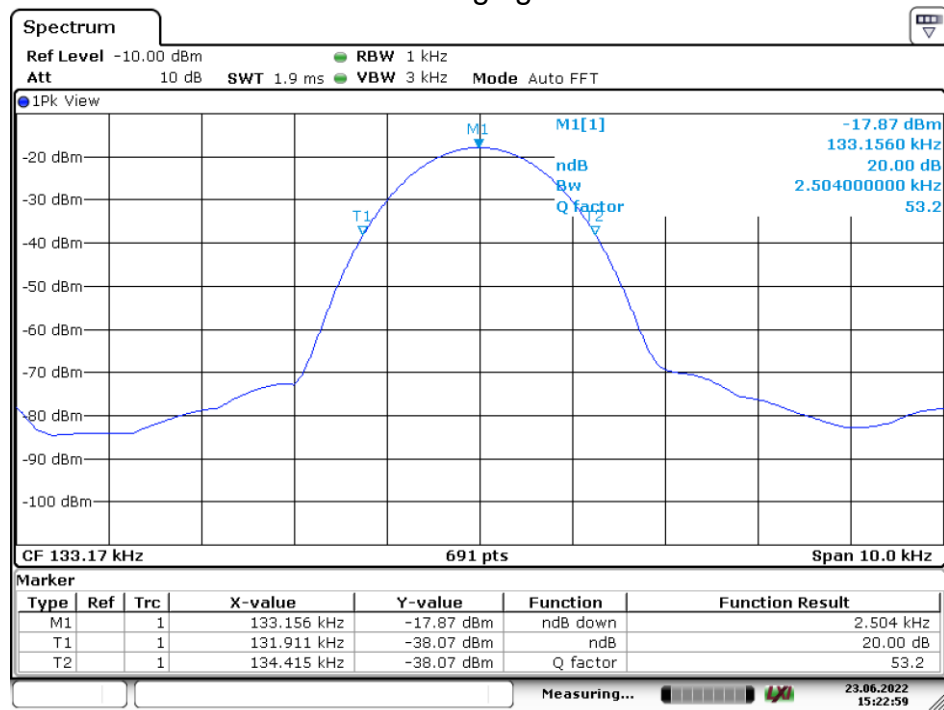

Wireless Charging for AirPods

8 Antenna Application

8.1 Antenna requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


8.2 Result


The EUT's antenna, permanent attached antenna, used an Induction coil and integrated on PCB, The antenna's gain meets the requirement.

APPENDIX (Photos of EUT)





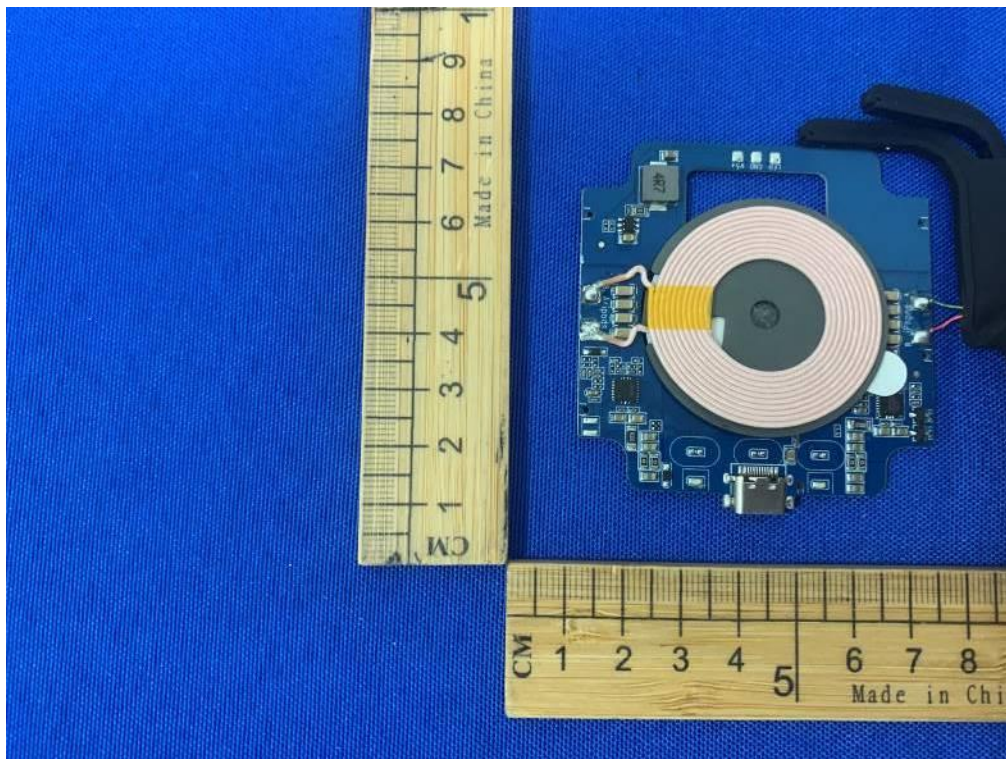

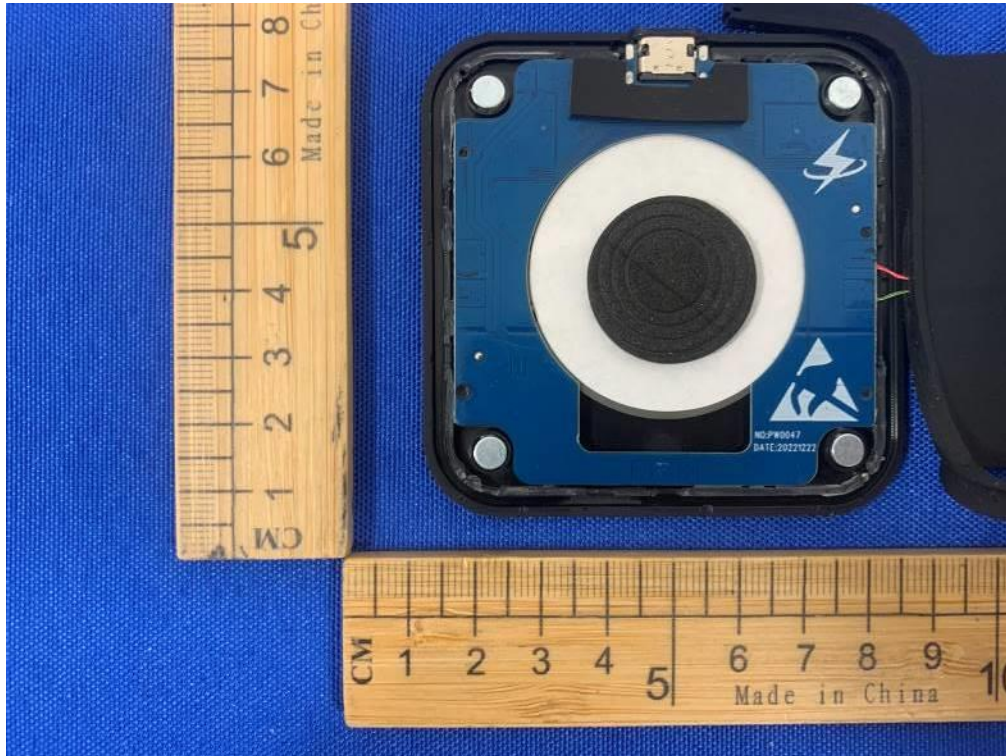

-----The end-----