

Test Report

Report No.: MTi230313012-01E2
Date of issue: 2023-07-06
Applicant: ShenZhen Cannice Technology Co., Ltd.
Product: WIRELESS OPEN-EAR EARPHONES
Model(s): AABLU100130685
FCC ID: 2ADTV-30685

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Environmental Conditions	7
1.4	Description of support units	7
1.5	Measurement uncertainty	7
2	Summary of Test Result	8
3	Test Facilities and accreditations	9
3.1	Test laboratory	9
4	List of test equipment.....	10
5	Evaluation Results (Evaluation).....	12
5.1	Antenna requirement	12
6	Radio Spectrum Matter Test Results (RF)	12
6.1	Occupied Bandwidth	12
6.2	Maximum Conducted Output Power.....	14
6.3	Power Spectral Density	16
6.4	Emissions in non-restricted frequency bands.....	17
6.5	Band edge emissions (Radiated)	19
6.6	Emissions in restricted frequency bands (below 1GHz).....	24
6.7	Emissions in restricted frequency bands (above 1GHz)	30
	Photographs of the test setup	37
	Photographs of the EUT.....	38
	Appendix A: DTS Bandwidth	40
	Appendix B: Maximum conducted output power.....	43
	Appendix C: Maximum power spectral density.....	46
	Appendix D: Band edge measurements	49
	Appendix E: Conducted Spurious Emission	51
	Appendix F: Duty Cycle	57

Test Result Certification	
Applicant:	ShenZhen Cannice Technology Co., Ltd.
Address:	20/F, Tower A, Building 7, Baoneng Science and Technology Park, Qingxiang Road #1, Longhua New District, Shenzhen, China
Manufacturer:	Guangxi Cannice Precision Technology Co.Ltd.
Address:	Block C, South of Longtuan West Road Zhongshan Town, Zhongshan County Hezhou Guangxi 542600 China
Product description	
Product name:	WIRELESS OPEN-EAR EARPHONES
Trademark:	onn.
Model name:	AABLU100130685
Series Model:	N/A
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2023-07-05 to 2023-07-06
Test result:	Pass

Test Engineer	:	<i>David. Lee</i>
		(David Lee)
Reviewed By	:	<i>Leon Chen</i>
		(Leon Chen)
Approved By	:	<i>Tom Xue</i>
		(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	WIRELESS OPEN-EAR EARPHONES
Model name:	AABLU100130685
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: DC 5V1A Battery: Charging box: DC 3.7V 650mAh Earphone: DC 3.85V 0.269Wh
Accessories:	N/A
Hardware version:	V0B
Software version:	V0E
Test sample(s) number:	MTi230313012-01S1001
RF specification	
Bluetooth version:	V5.3
Operating frequency range:	2402MHz to 2480MHz
Channel number:	40
Modulation type:	GFSK
Antenna(s) type:	FPC
Antenna(s) gain:	Left: -1.76dBi, Right: -1.93dBi

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	TX-GFSK-1Mbps(CH00, CH19,CH39)
Mode2	TX-GFSK-2Mbps(CH00, CH19,CH39)

1.2.1 Operation channel list

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Mode	Test Software	Bluetooth RF Test Tool		
	Channel	2402MHz	2440MHz	2480MHz
BLE_1M	Power setting	39	39	39
BLE_2M		39	39	39

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT was tested as an independent device.

1.5 Measurement uncertainty

Measurement	Uncertainty
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (1GHz~26GHz)	5.3dB
Radiated spurious emissions (9kHz~30MHz)	4.3dB
Radiated spurious emissions (30MHz~1GHz)	4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	N/A
3	§ 15.247(d), 15.209, 15.205	Radiated spurious emissions	Pass
4	§ 15.247(a)(2)	DTS bandwidth	Pass
5	§ 15.247(b)(3)	Maximum conducted output power	Pass
6	§ 15.247(e)	Power Spectral Density	Pass
7	§ 15.247(d)	Conducted emission at the band edge	Pass
8	§ 15.247(d)	Conducted spurious emissions	Pass
9	/	Duty Cycle	Pass

Notes:

N/A means not applicable.

Since the EUT cannot be operating while charging, therefore AC power line conducted emissions test is not required.

Both left and right earphones were tested, test data appendix only recorded all data of right earphones.

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Occupied Bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Maximum Conducted Output Power						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Power Spectral Density						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Emissions in non-restricted frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04
Emissions in restricted frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-04-26	2024-04-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
Emissions in restricted frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Description of the antenna of EUT:	The antenna of the EUT is permanently attached.
Conclusion:	The EUT complies with the requirement of FCC PART 15.203.

6 Radio Spectrum Matter Test Results (RF)


6.1 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	26 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				

6.1.2 Test Setup Diagram:

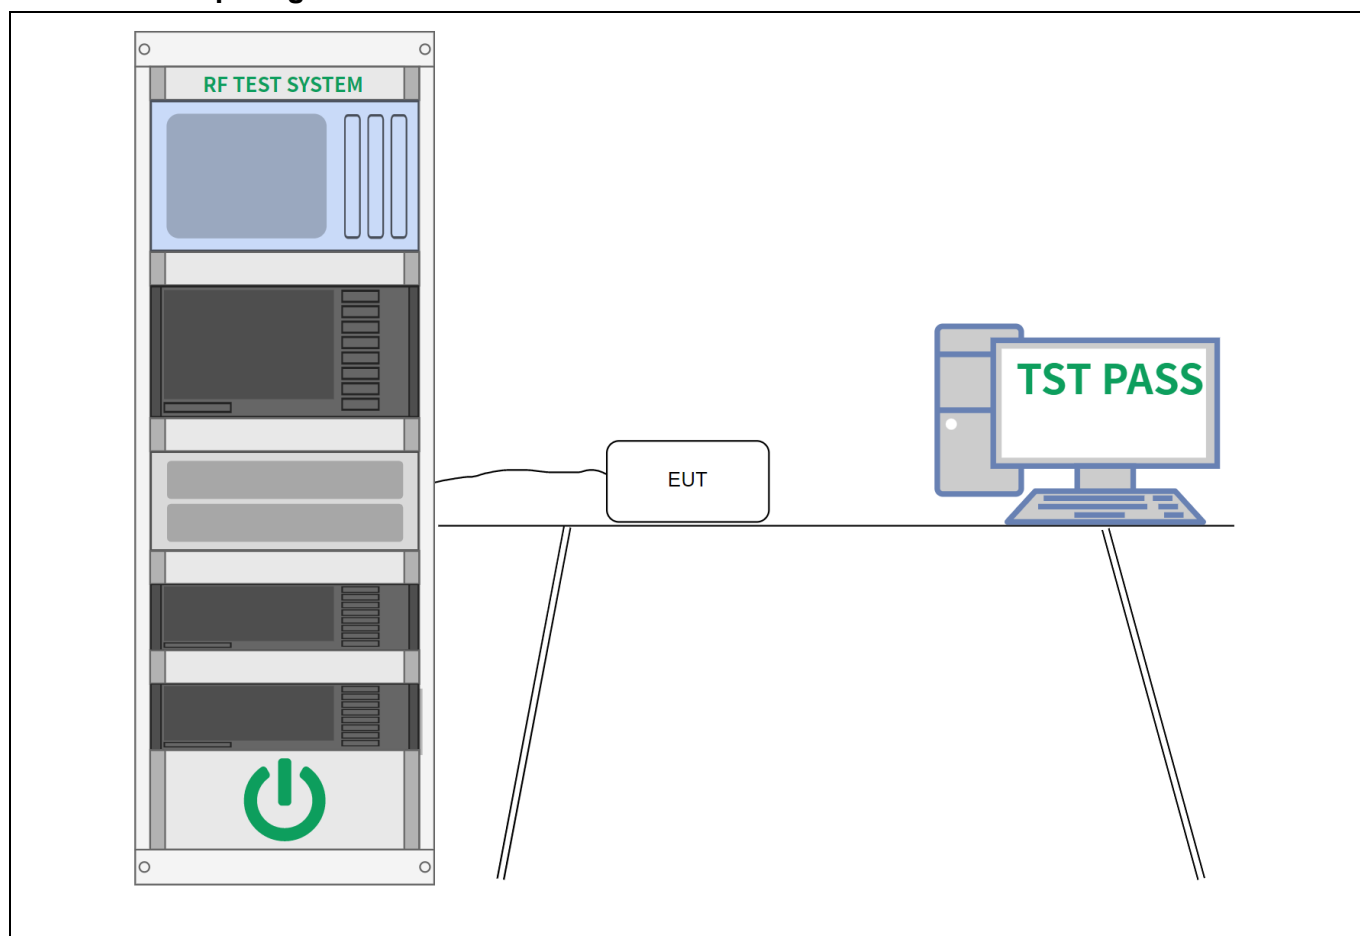

6.1.3 Test Data:

Please Refer to Appendix for Details.


6.2 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	26 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				

6.2.2 Test Setup Diagram:

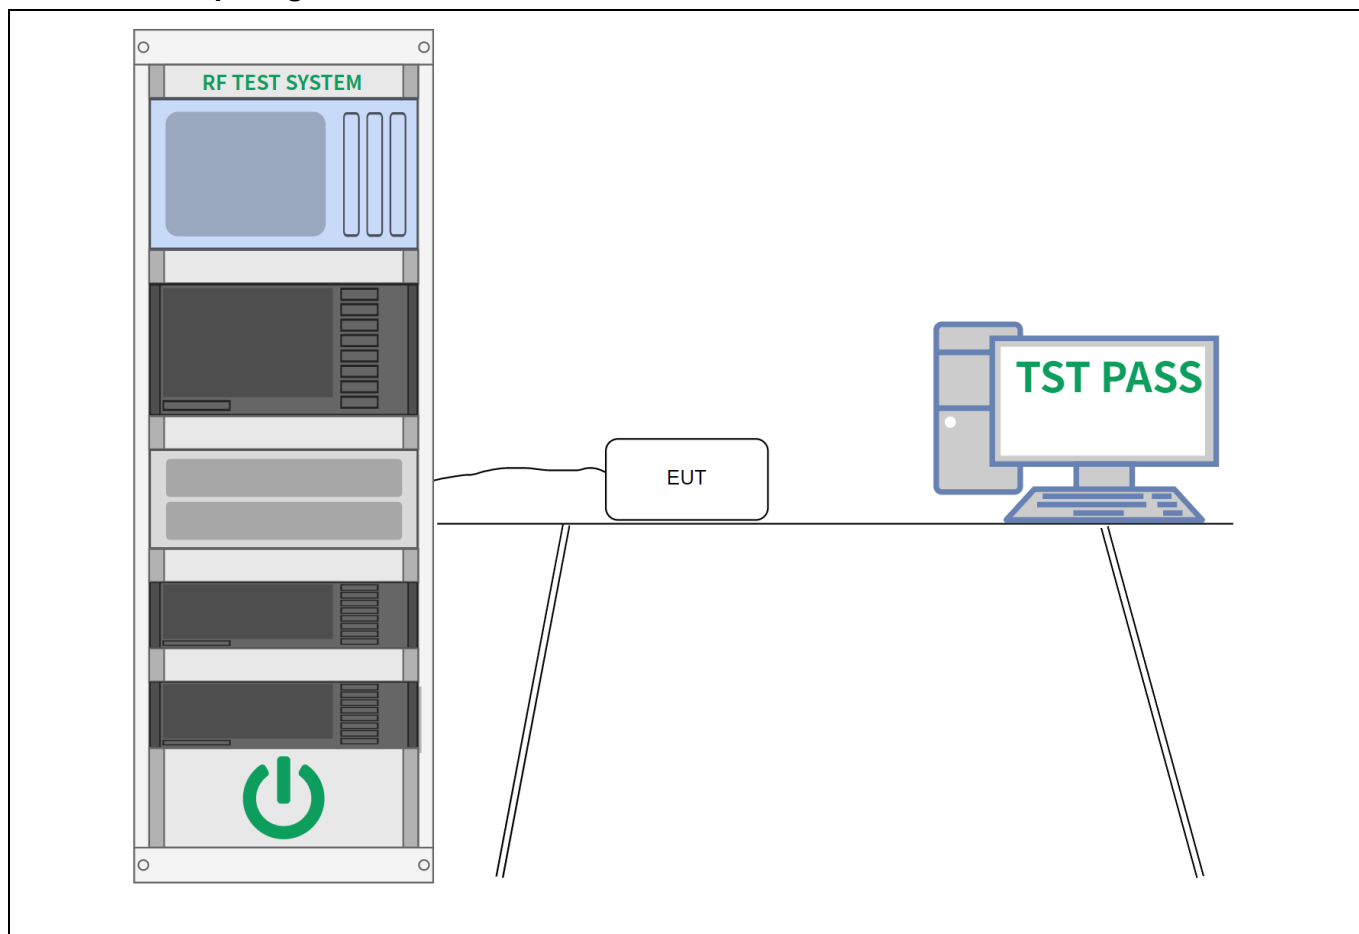

6.2.3 Test Data:

Please Refer to Appendix for Details.


6.3 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	26 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				

6.3.2 Test Setup Diagram:

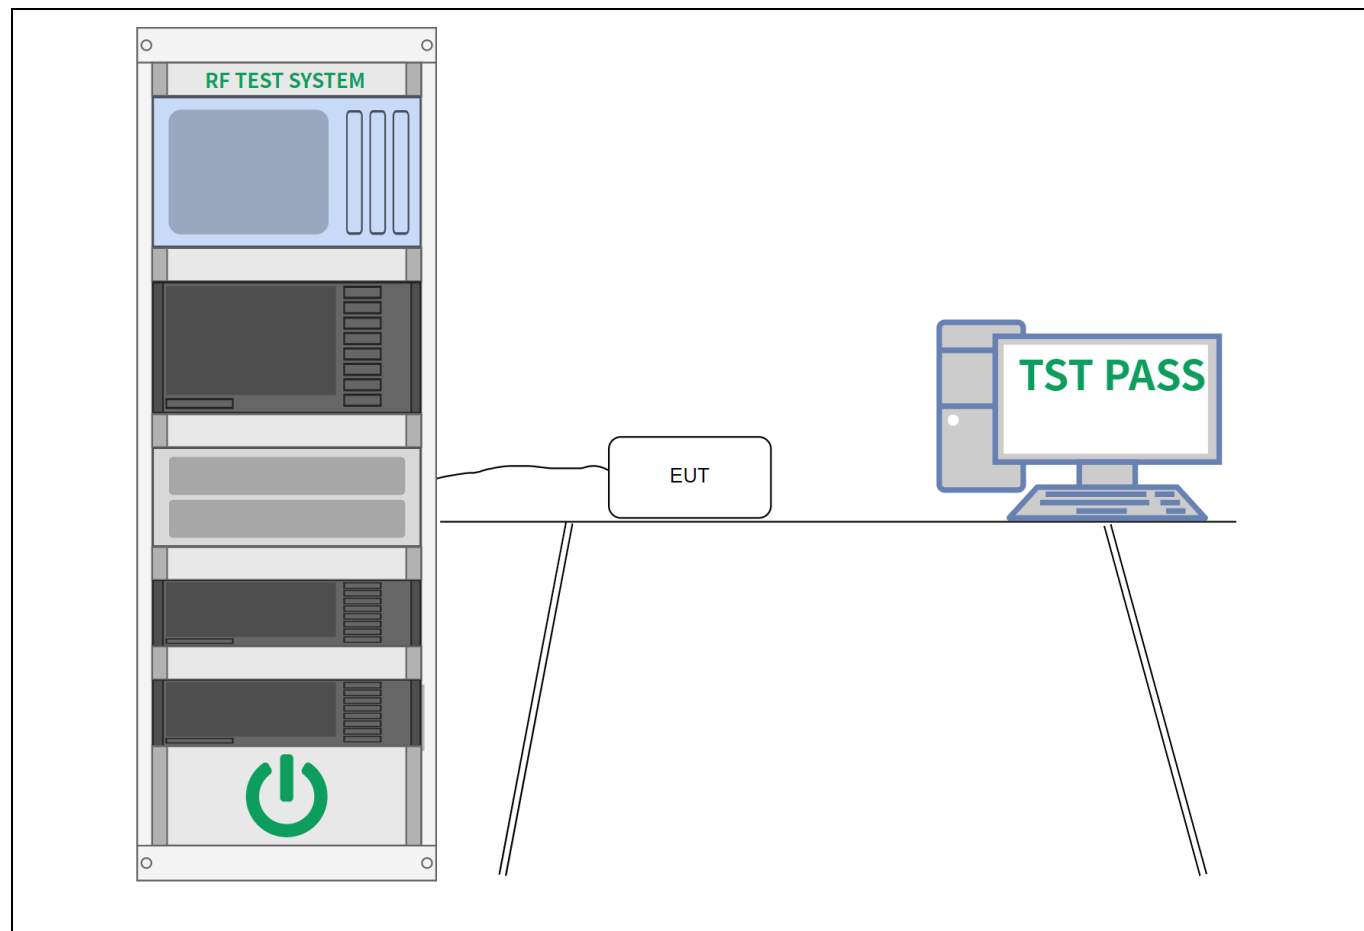

6.3.3 Test Data:

Please Refer to Appendix for Details.


6.4 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.4.1 E.U.T. Operation:

Operating Environment:			
Temperature:	26 °C	Humidity:	57 %
Atmospheric Pressure:	101 kPa		
Pre test mode:	Mode1, Mode2		
Final test mode:	Mode1, Mode2		

6.4.2 Test Setup Diagram:

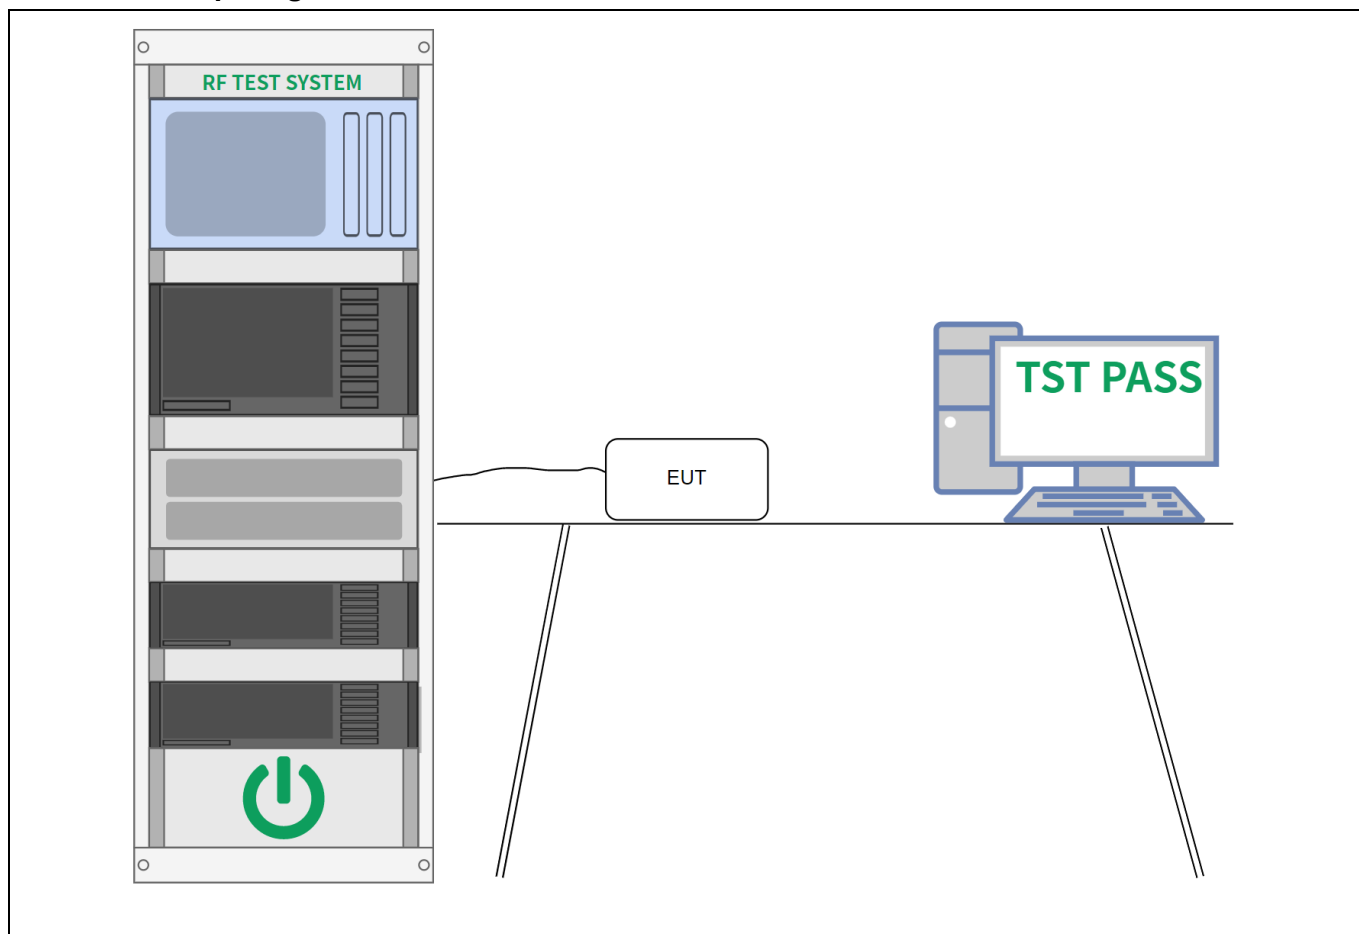

6.4.3 Test Data:

Please Refer to Appendix for Details.

6.5 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.10		

6.5.1 E.U.T. Operation:

Operating Environment:				
Temperature:	25 °C	Humidity:	50 %	Atmospheric Pressure: 101 kPa
Pre test mode:	Mode1, Mode2			
Final test mode:	Mode1			

6.5.2 Test Data:

Left earphone:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	46.67	-8.08	38.59	74.00	-35.41 peak
2		2310.000	37.26	-8.08	29.18	54.00	-24.82 AVG
3		2390.000	47.16	-7.71	39.45	74.00	-34.55 peak
4	*	2390.000	38.53	-7.71	30.82	54.00	-23.18 AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	46.82	-8.08	38.74	74.00	-35.26 peak
2		2310.000	37.24	-8.08	29.16	54.00	-24.84 AVG
3		2390.000	46.94	-7.71	39.23	74.00	-34.77 peak
4	*	2390.000	37.98	-7.71	30.27	54.00	-23.73 AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 39

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	49.04	-7.24	41.80	74.00	-32.20	peak
2	*	2483.500	39.25	-7.24	32.01	54.00	-21.99	AVG
3		2500.000	47.99	-7.17	40.82	74.00	-33.18	peak
4		2500.000	37.82	-7.17	30.65	54.00	-23.35	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 39

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.98	-7.24	40.74	74.00	-33.26	peak
2	*	2483.500	38.71	-7.24	31.47	54.00	-22.53	AVG
3		2500.000	49.53	-7.17	42.36	74.00	-31.64	peak
4		2500.000	37.91	-7.17	30.74	54.00	-23.26	AVG

Right earphone:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	46.95	-8.08	38.87	74.00	-35.13 peak
2		2310.000	37.45	-8.08	29.37	54.00	-24.63 AVG
3		2390.000	49.65	-7.71	41.94	74.00	-32.06 peak
4	*	2390.000	38.64	-7.71	30.93	54.00	-23.07 AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	46.85	-8.08	38.77	74.00	-35.23 peak
2		2310.000	37.37	-8.08	29.29	54.00	-24.71 AVG
3		2390.000	48.94	-7.71	41.23	74.00	-32.77 peak
4	*	2390.000	39.01	-7.71	31.30	54.00	-22.70 AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 39


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	49.40	-7.24	42.16	74.00	-31.84	peak
2	*	2483.500	40.06	-7.24	32.82	54.00	-21.18	AVG
3		2500.000	47.51	-7.17	40.34	74.00	-33.66	peak
4		2500.000	38.25	-7.17	31.08	54.00	-22.92	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 39

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.58	-7.24	40.34	74.00	-33.66	peak
2		2483.500	38.24	-7.24	31.00	54.00	-23.00	AVG
3		2500.000	48.34	-7.17	41.17	74.00	-32.83	peak
4	*	2500.000	38.20	-7.17	31.03	54.00	-22.97	AVG

6.6 Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		

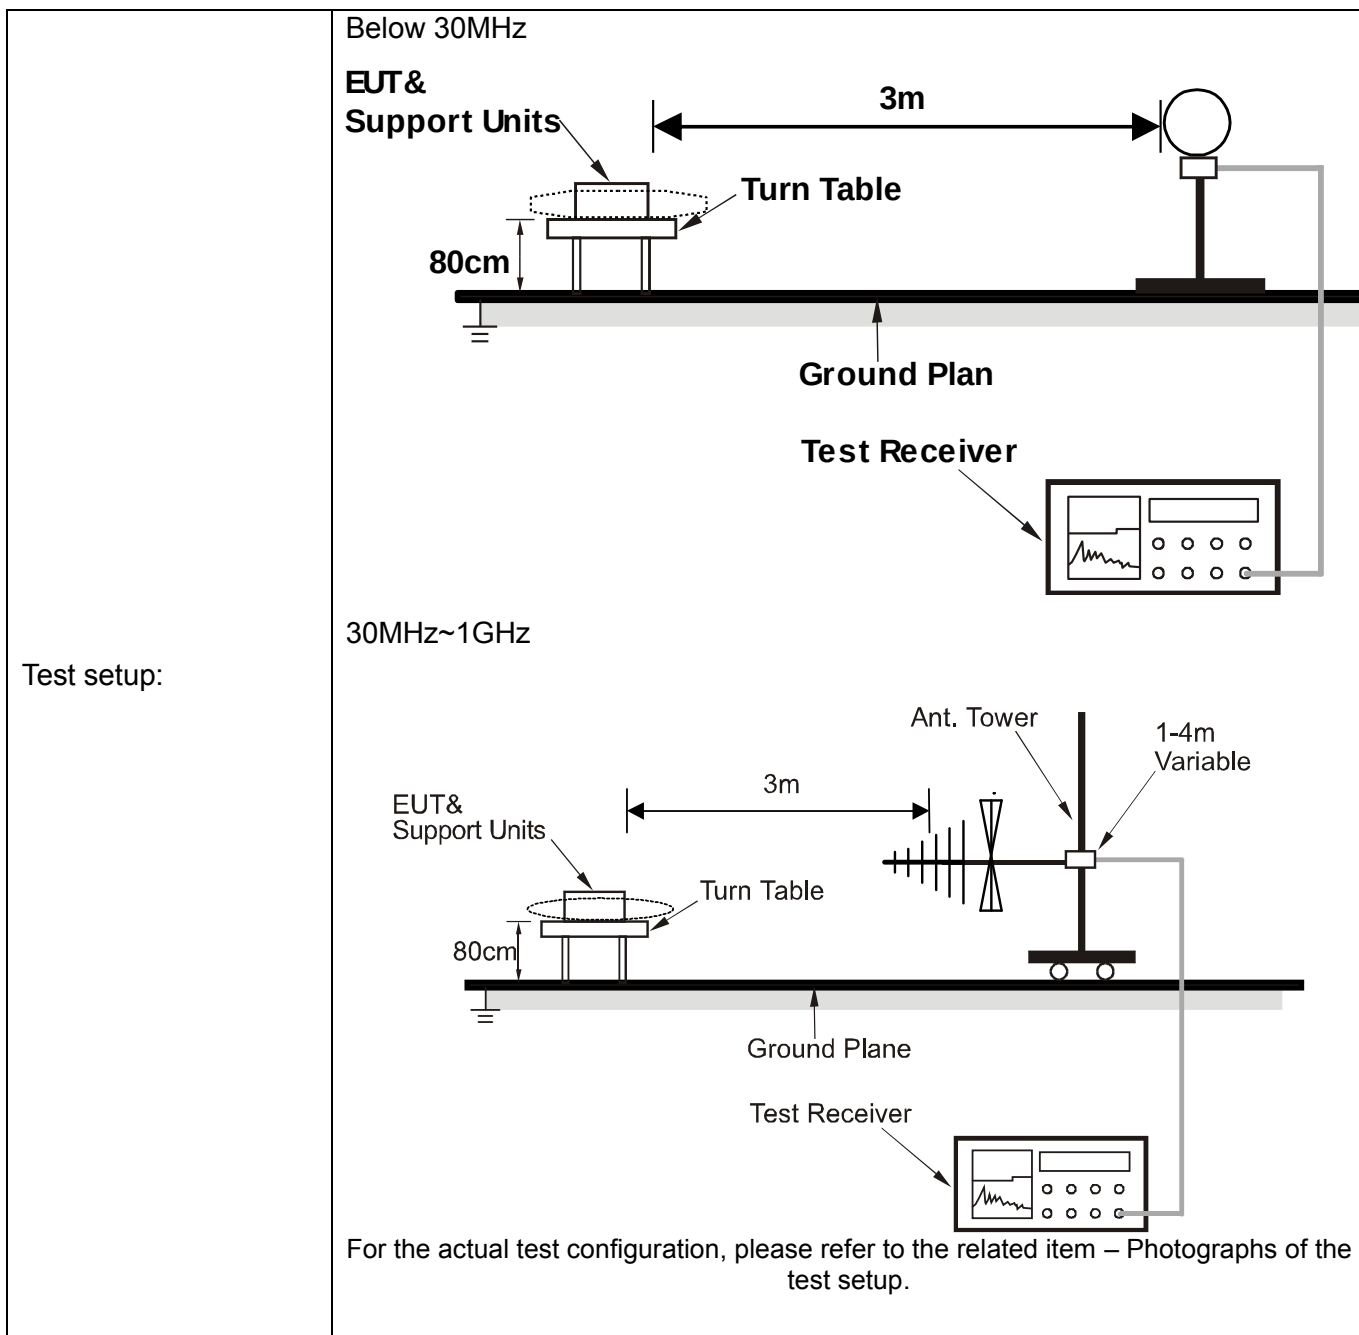


6.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	57 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1				
Note:					
The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					
All modes of operation of the EUT were investigated, and only the worst-case results are reported.					
There were no emissions found below 30MHz within 20dB of the limit.					

6.6.2 Test Data:


Left earphone:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 39

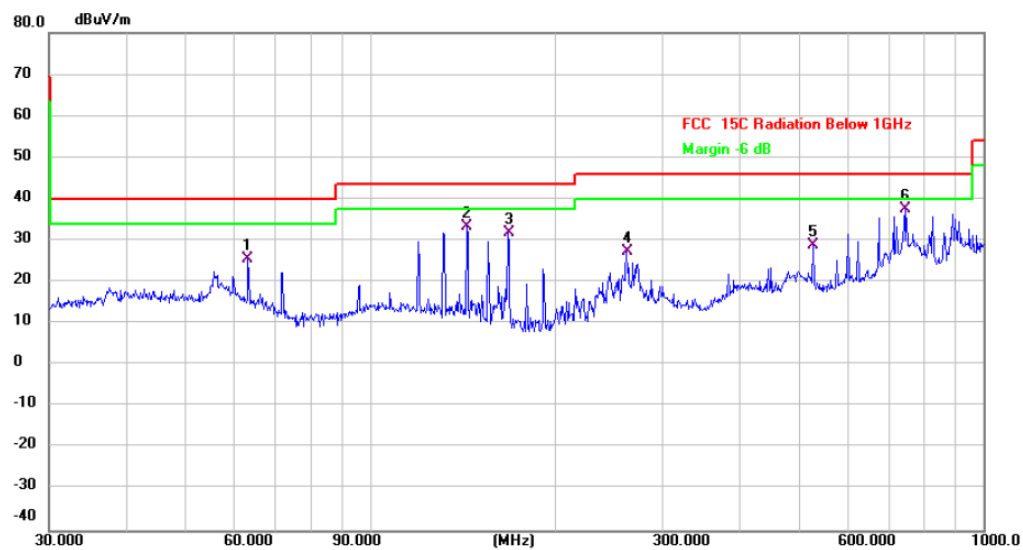

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		63.3132	33.19	-7.72	25.47	40.00	-14.53	QP	
2		143.8295	44.66	-11.28	33.38	43.50	-10.12	QP	
3		167.8243	43.41	-11.57	31.84	43.50	-11.66	QP	
4		261.9753	35.09	-7.80	27.29	46.00	-18.71	QP	
5		528.2458	35.48	-6.66	28.82	46.00	-17.18	QP	
6	*	744.8661	35.17	2.33	37.50	46.00	-8.50	QP	


Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 39

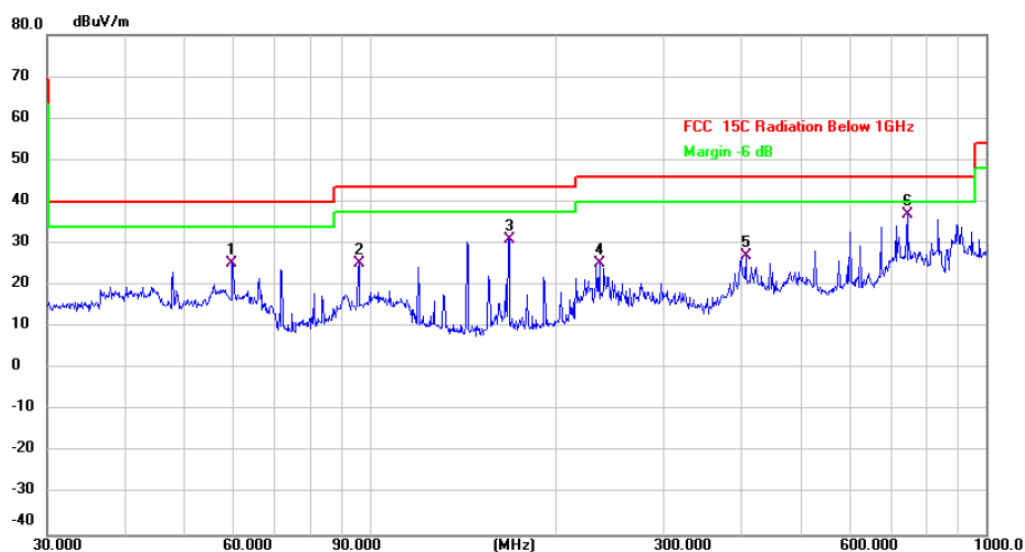

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		59.8588	32.05	-6.73	25.32	40.00	-14.68	QP	
2		96.0986	33.53	-8.13	25.40	43.50	-18.10	QP	
3		167.8243	42.54	-11.57	30.97	43.50	-12.53	QP	
4		235.8164	31.11	-5.80	25.31	46.00	-20.69	QP	
5		407.5145	30.24	-3.32	26.92	46.00	-19.08	QP	
6	*	744.8661	34.74	2.33	37.07	46.00	-8.93	QP	


Right earphone:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 39

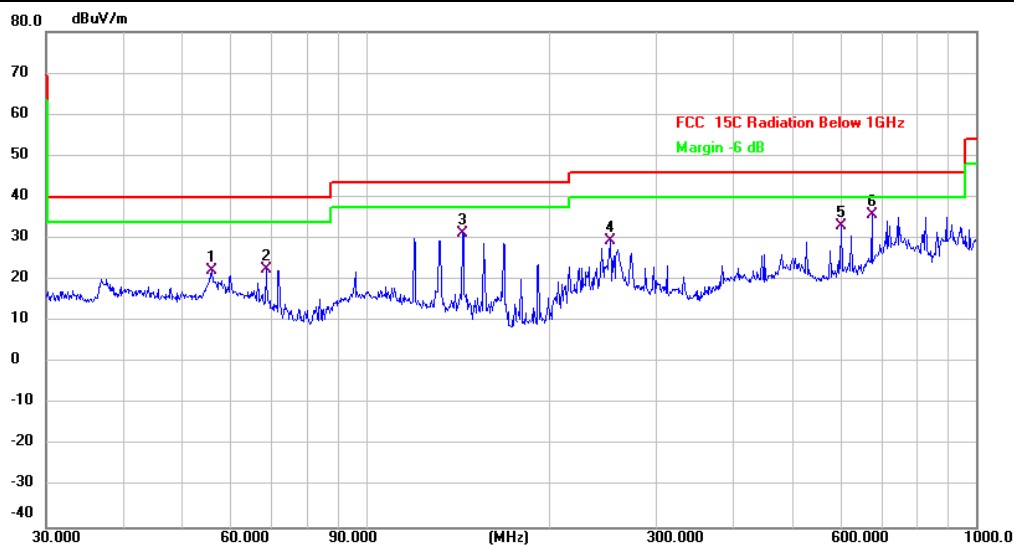


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		56.0007	29.23	-7.09	22.14	40.00	-17.86	QP	
2		68.6310	31.90	-9.32	22.58	40.00	-17.42	QP	
3		143.8295	42.48	-11.28	31.20	43.50	-12.30	QP	
4		252.0627	37.37	-7.88	29.49	46.00	-16.51	QP	
5		601.4265	35.47	-2.42	33.05	46.00	-12.95	QP	
6	*	675.2080	38.22	-2.60	35.62	46.00	-10.38	QP	

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 39

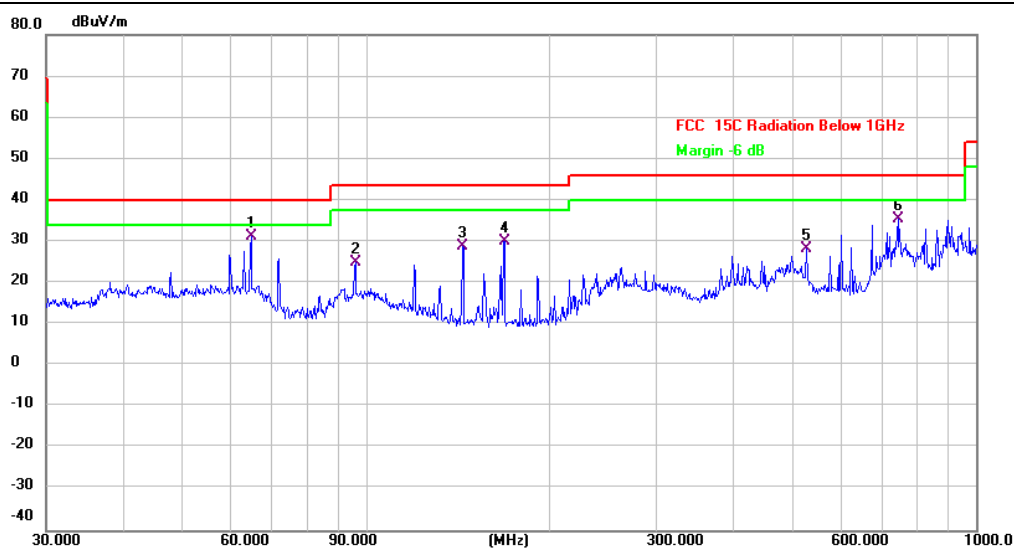

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	64.8865	39.35	-8.18	31.17	40.00	-8.83	QP	
2		96.0986	33.01	-8.13	24.88	43.50	-18.62	QP	
3		143.8295	40.26	-11.28	28.98	43.50	-14.52	QP	
4		167.8243	41.76	-11.57	30.19	43.50	-13.31	QP	
5		528.2458	34.79	-6.66	28.13	46.00	-17.87	QP	
6		744.8661	33.16	2.33	35.49	46.00	-10.51	QP	

6.7 Emissions in restricted frequency bands (above 1GHz)

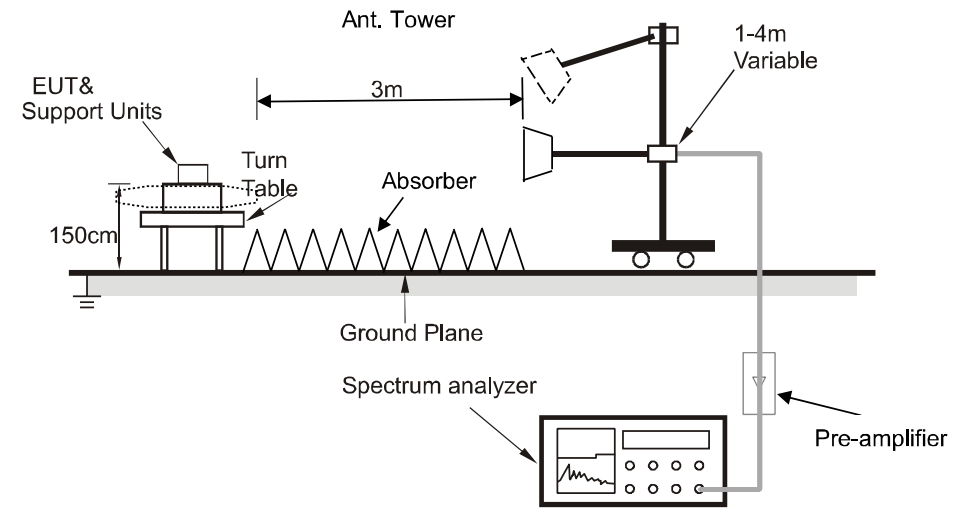Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		
Test setup:	Above 1GHz  For the actual test configuration, please refer to the related item – Photographs of the test setup.		

6.7.1 E.U.T. Operation:

Operating Environment:						
Temperature:	25 °C		Humidity:	50 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2				
Final test mode:		Mode1				
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.						

6.7.2 Test Data:

Left earphone:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4804.000	42.67	0.74	43.41	74.00	-30.59 peak
2		4804.000	36.80	0.74	37.54	54.00	-16.46 AVG
3		7206.000	40.20	6.02	46.22	74.00	-27.78 peak
4		7206.000	34.27	6.02	40.29	54.00	-13.71 AVG
5	*	9607.000	34.67	5.88	40.55	54.00	-13.45 AVG
6		9608.000	40.94	5.88	46.82	74.00	-27.18 peak

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4804.000	42.69	0.74	43.43	74.00	-30.57 peak
2		4804.000	36.37	0.74	37.11	54.00	-16.89 AVG
3		7206.000	39.91	6.02	45.93	74.00	-28.07 peak
4		7206.000	33.01	6.02	39.03	54.00	-14.97 AVG
5		9608.000	40.97	5.88	46.85	74.00	-27.15 peak
6	*	9608.000	34.31	5.88	40.19	54.00	-13.81 AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 19

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.000	43.84	1.04	44.88	74.00	-29.12	peak
2		4880.000	38.29	1.04	39.33	54.00	-14.67	AVG
3		7320.000	40.47	5.93	46.40	74.00	-27.60	peak
4		7320.000	34.36	5.93	40.29	54.00	-13.71	AVG
5		9760.000	40.30	6.55	46.85	74.00	-27.15	peak
6	*	9760.000	33.82	6.55	40.37	54.00	-13.63	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 19

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.000	44.08	1.04	45.12	74.00	-28.88	peak
2		4880.000	38.02	1.04	39.06	54.00	-14.94	AVG
3		7320.000	40.41	5.93	46.34	74.00	-27.66	peak
4		7320.000	34.33	5.93	40.26	54.00	-13.74	AVG
5		9760.000	40.74	6.55	47.29	74.00	-26.71	peak
6	*	9760.000	34.27	6.55	40.82	54.00	-13.18	AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 39

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4960.000	44.50	1.50	46.00	74.00	-28.00 peak
2		4960.000	37.99	1.50	39.49	54.00	-14.51 AVG
3		7440.000	40.47	5.61	46.08	74.00	-27.92 peak
4		7440.000	34.24	5.61	39.85	54.00	-14.15 AVG
5		9920.000	40.89	6.10	46.99	74.00	-27.01 peak
6	*	9920.000	34.01	6.10	40.11	54.00	-13.89 AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 39

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4960.000	44.63	1.50	46.13	74.00	-27.87 peak
2		4960.000	38.30	1.50	39.80	54.00	-14.20 AVG
3		7440.000	40.63	5.61	46.24	74.00	-27.76 peak
4		7440.000	34.59	5.61	40.20	54.00	-13.80 AVG
5		9920.000	41.43	6.10	47.53	74.00	-26.47 peak
6	*	9920.000	35.45	6.10	41.55	54.00	-12.45 AVG

Right earphone:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4804.000	49.90	0.74	50.64	74.00	-23.36 peak
2	*	4804.000	44.08	0.74	44.82	54.00	-9.18 AVG
3		7206.000	41.54	6.02	47.56	74.00	-26.44 peak
4		7206.000	35.42	6.02	41.44	54.00	-12.56 AVG
5		9608.000	41.46	5.88	47.34	74.00	-26.66 peak
6		9608.000	35.17	5.88	41.05	54.00	-12.95 AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 00							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4804.000	47.33	0.74	48.07	74.00	-25.93 peak
2	*	4804.000	41.11	0.74	41.85	54.00	-12.15 AVG
3		7206.000	40.73	6.02	46.75	74.00	-27.25 peak
4		7206.000	34.34	6.02	40.36	54.00	-13.64 AVG
5		9608.000	41.47	5.88	47.35	74.00	-26.65 peak
6		9608.000	35.41	5.88	41.29	54.00	-12.71 AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 19

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.000	46.68	1.04	47.72	74.00	-26.28	peak
2	*	4880.000	41.37	1.04	42.41	54.00	-11.59	AVG
3		7320.000	41.41	5.93	47.34	74.00	-26.66	peak
4		7320.000	35.33	5.93	41.26	54.00	-12.74	AVG
5		9760.000	40.98	6.55	47.53	74.00	-26.47	peak
6		9760.000	34.55	6.55	41.10	54.00	-12.90	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 19

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.000	45.43	1.04	46.47	74.00	-27.53	peak
2		4880.000	39.32	1.04	40.36	54.00	-13.64	AVG
3		7320.000	40.34	5.93	46.27	74.00	-27.73	peak
4		7320.000	34.29	5.93	40.22	54.00	-13.78	AVG
5		9764.000	40.83	6.55	47.38	74.00	-26.62	peak
6	*	9764.000	34.50	6.55	41.05	54.00	-12.95	AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 39

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4960.000	44.69	1.50	46.19	74.00	-27.81 peak
2		4960.000	38.57	1.50	40.07	54.00	-13.93 AVG
3		7440.000	40.24	5.61	45.85	74.00	-28.15 peak
4		7440.000	34.13	5.61	39.74	54.00	-14.26 AVG
5		9920.000	40.93	6.10	47.03	74.00	-26.97 peak
6	*	9920.000	34.78	6.10	40.88	54.00	-13.12 AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 39

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4960.000	42.82	1.50	44.32	74.00	-29.68 peak
2		4960.000	37.06	1.50	38.56	54.00	-15.44 AVG
3		7440.000	40.56	5.61	46.17	74.00	-27.83 peak
4	*	7440.000	34.55	5.61	40.16	54.00	-13.84 AVG
5		9920.000	41.16	6.10	47.26	74.00	-26.74 peak
6		9920.000	33.63	6.10	39.73	54.00	-14.27 AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos.

Photographs of the EUT

Refer to Appendix - EUT Photos

Appendix

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.664	0.5	PASS
		2440	0.684	0.5	PASS
		2480	0.648	0.5	PASS
BLE_2M	Ant1	2402	1.116	0.5	PASS
		2440	0.952	0.5	PASS
		2480	1.100	0.5	PASS

Test Graphs



BLE 2M Ant1 2402



BLE 2M Ant1 2440



BLE 2M Ant1 2480




Appendix B: Maximum conducted output power


Test Result-Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	-1.43	≤30	PASS
		2440	-1.98	≤30	PASS
		2480	-3.32	≤30	PASS
BLE_2M	Ant1	2402	-1.24	≤30	PASS
		2440	-1.83	≤30	PASS
		2480	-3.18	≤30	PASS


Test Graphs

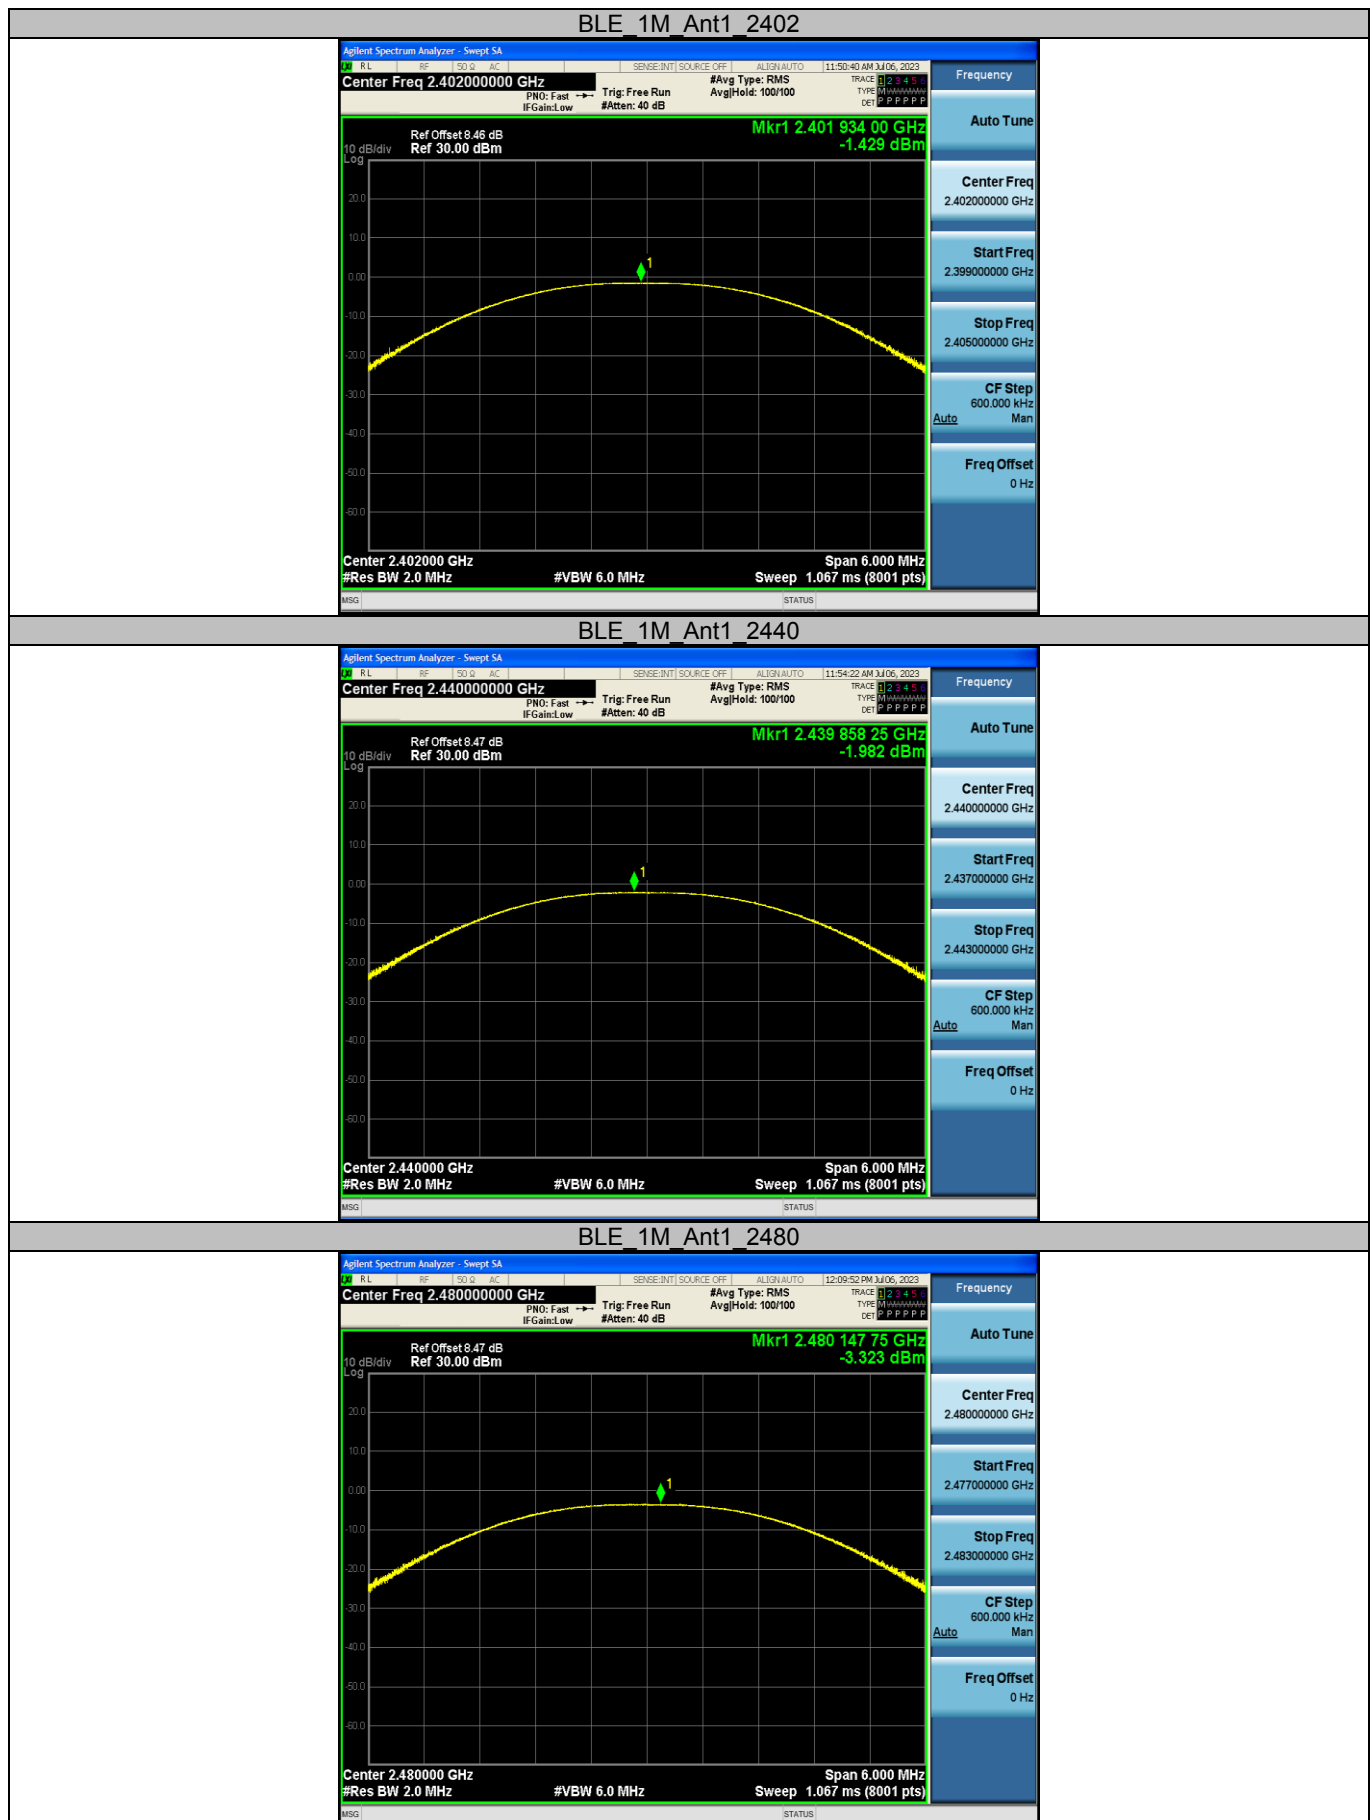


BLE 2M Ant1 2402

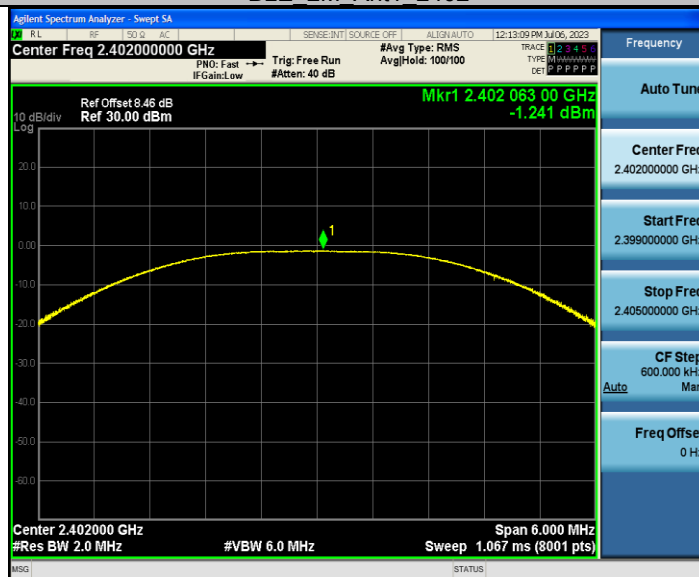

BLE 2M Ant1 2440

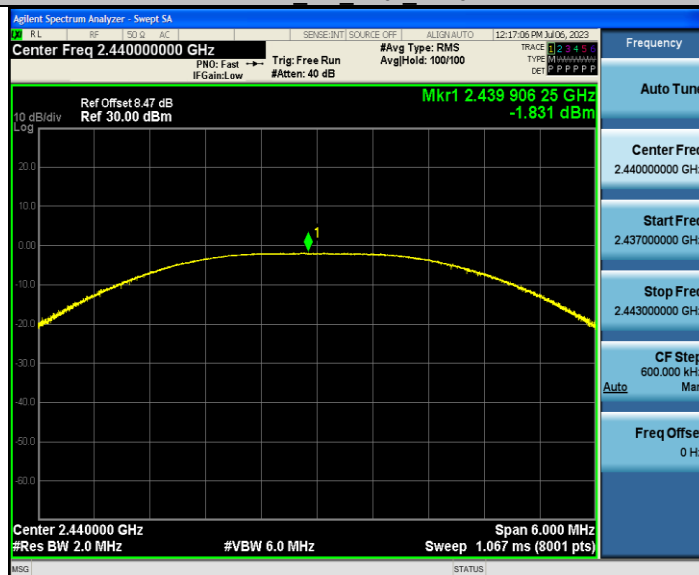

BLE 2M Ant1 2480

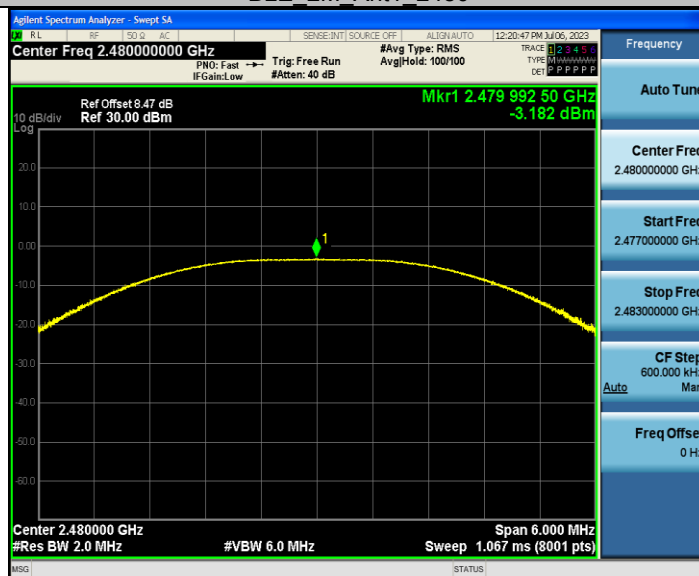


Appendix C: Maximum power spectral density


Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-16.54	≤8.00	PASS
		2440	-16.18	≤8.00	PASS
		2480	-18.62	≤8.00	PASS
BLE_2M	Ant1	2402	-18.67	≤8.00	PASS
		2440	-18.82	≤8.00	PASS
		2480	-20.94	≤8.00	PASS


Test Graphs

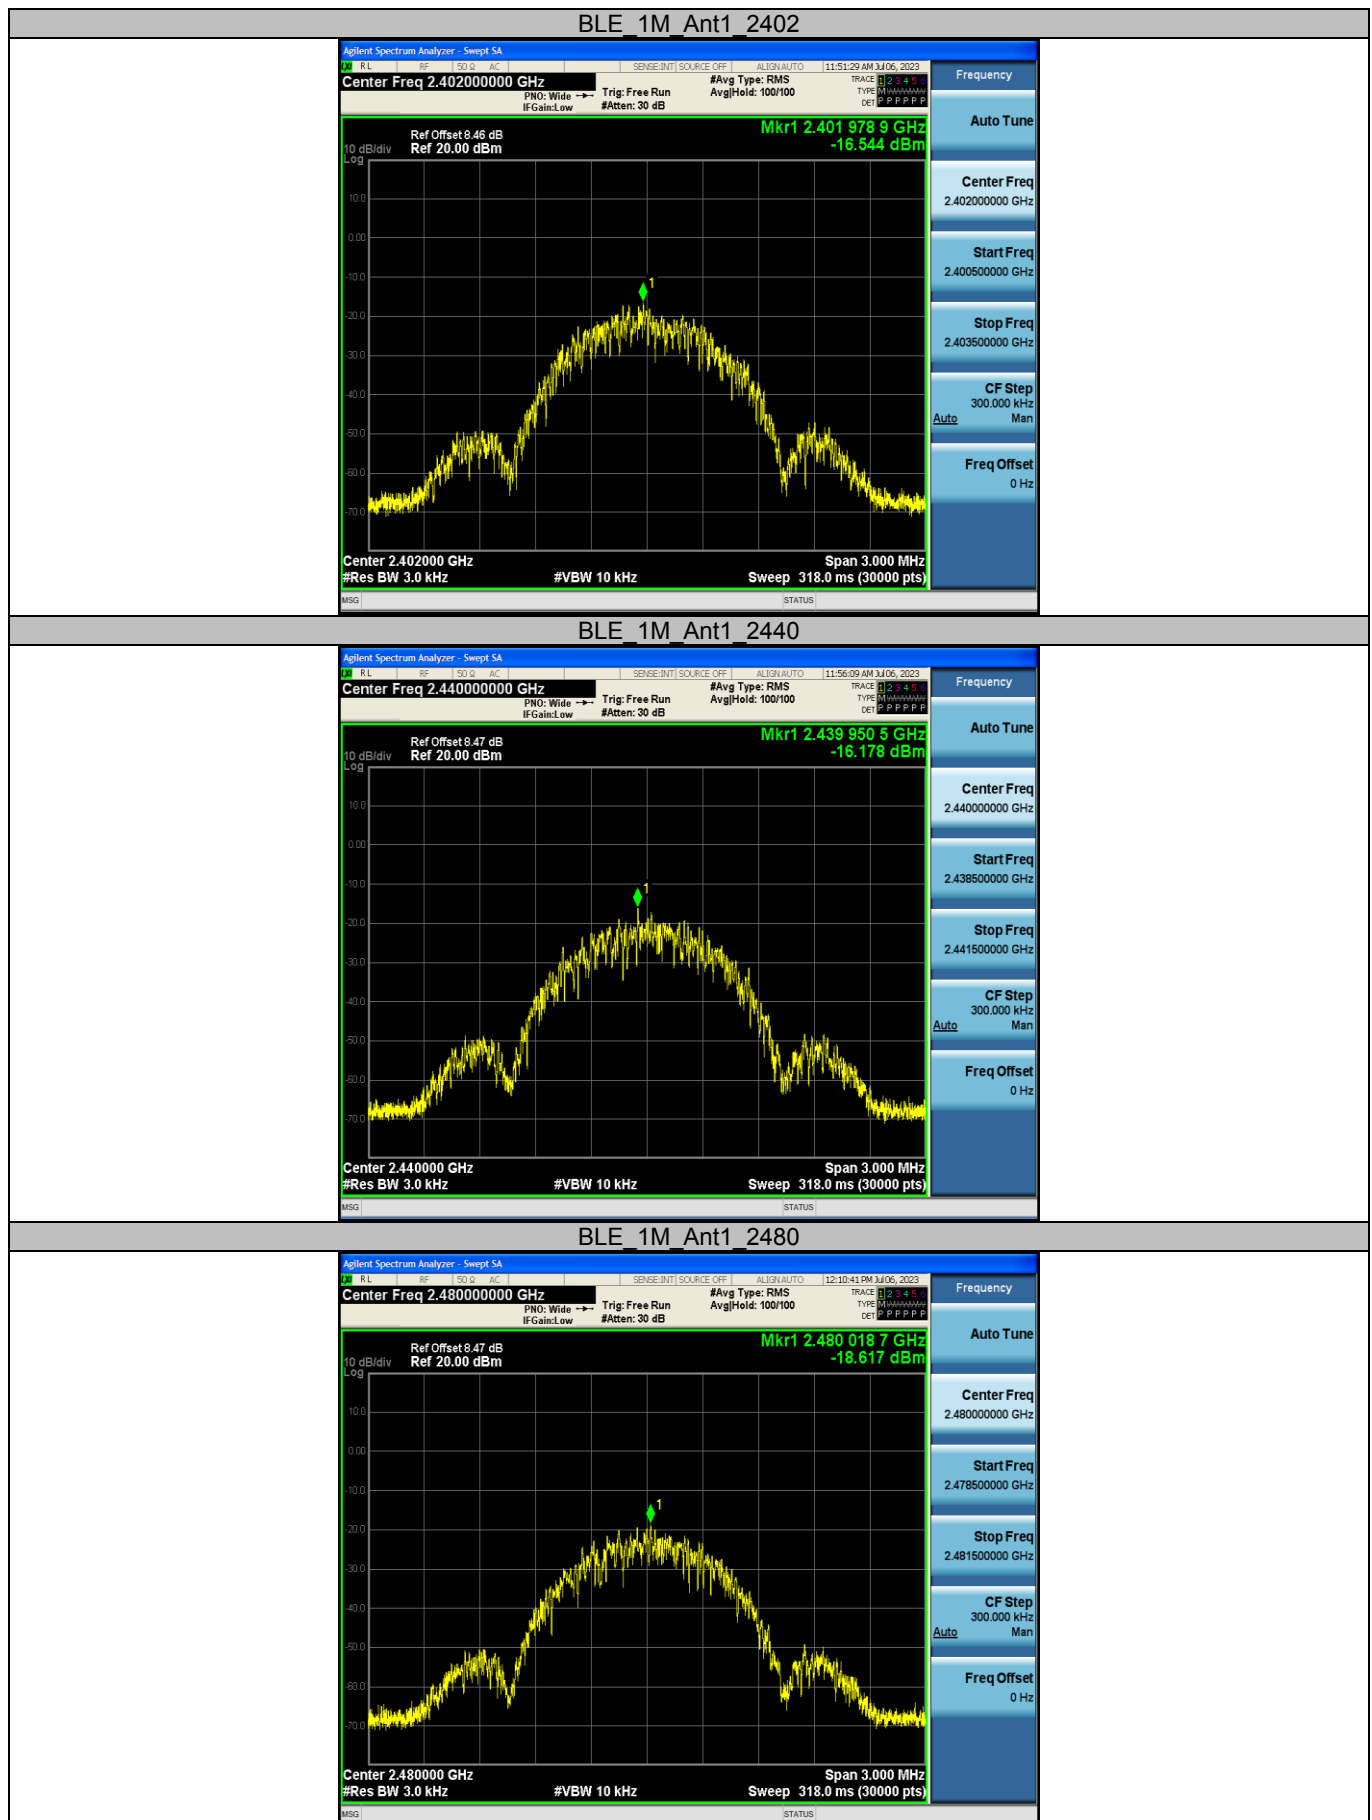


BLE 2M Ant1 2402

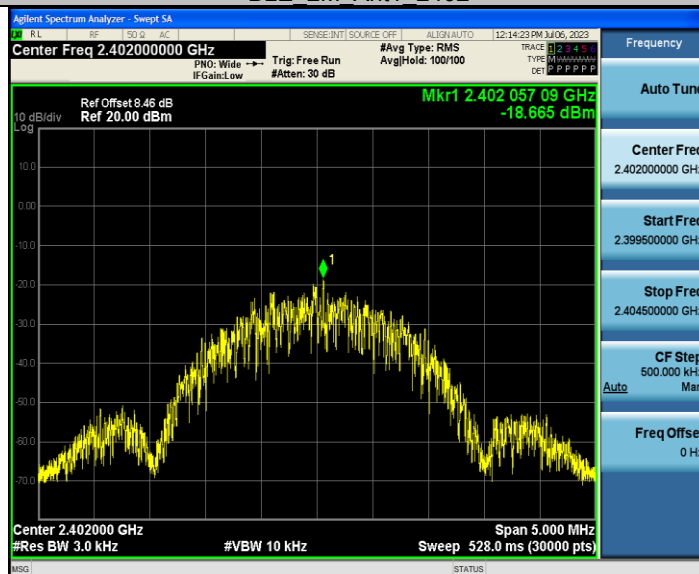

BLE 2M Ant1 2440

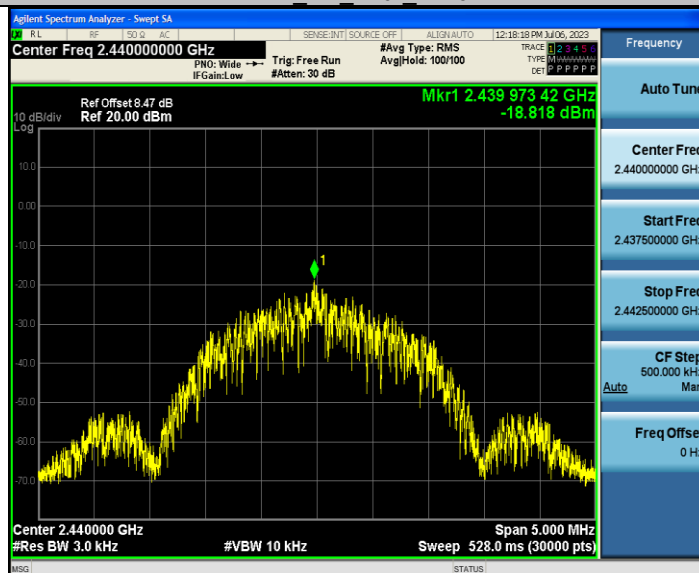



BLE 2M Ant1 2480

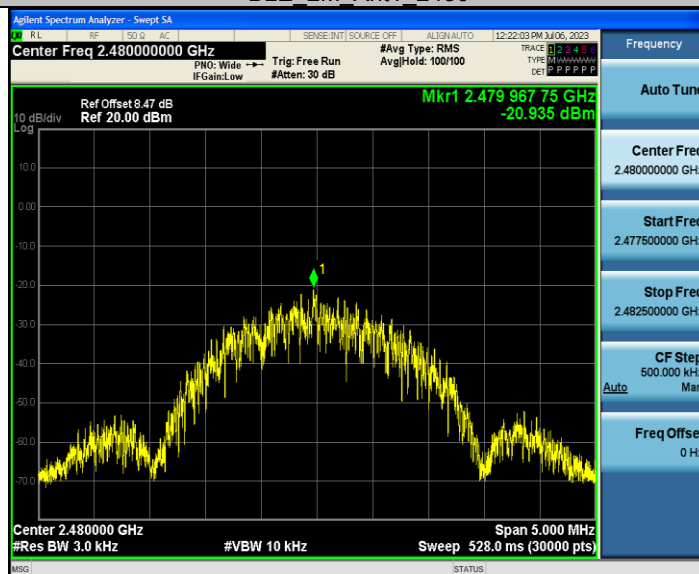

Appendix D: Band edge measurements

Test Graphs

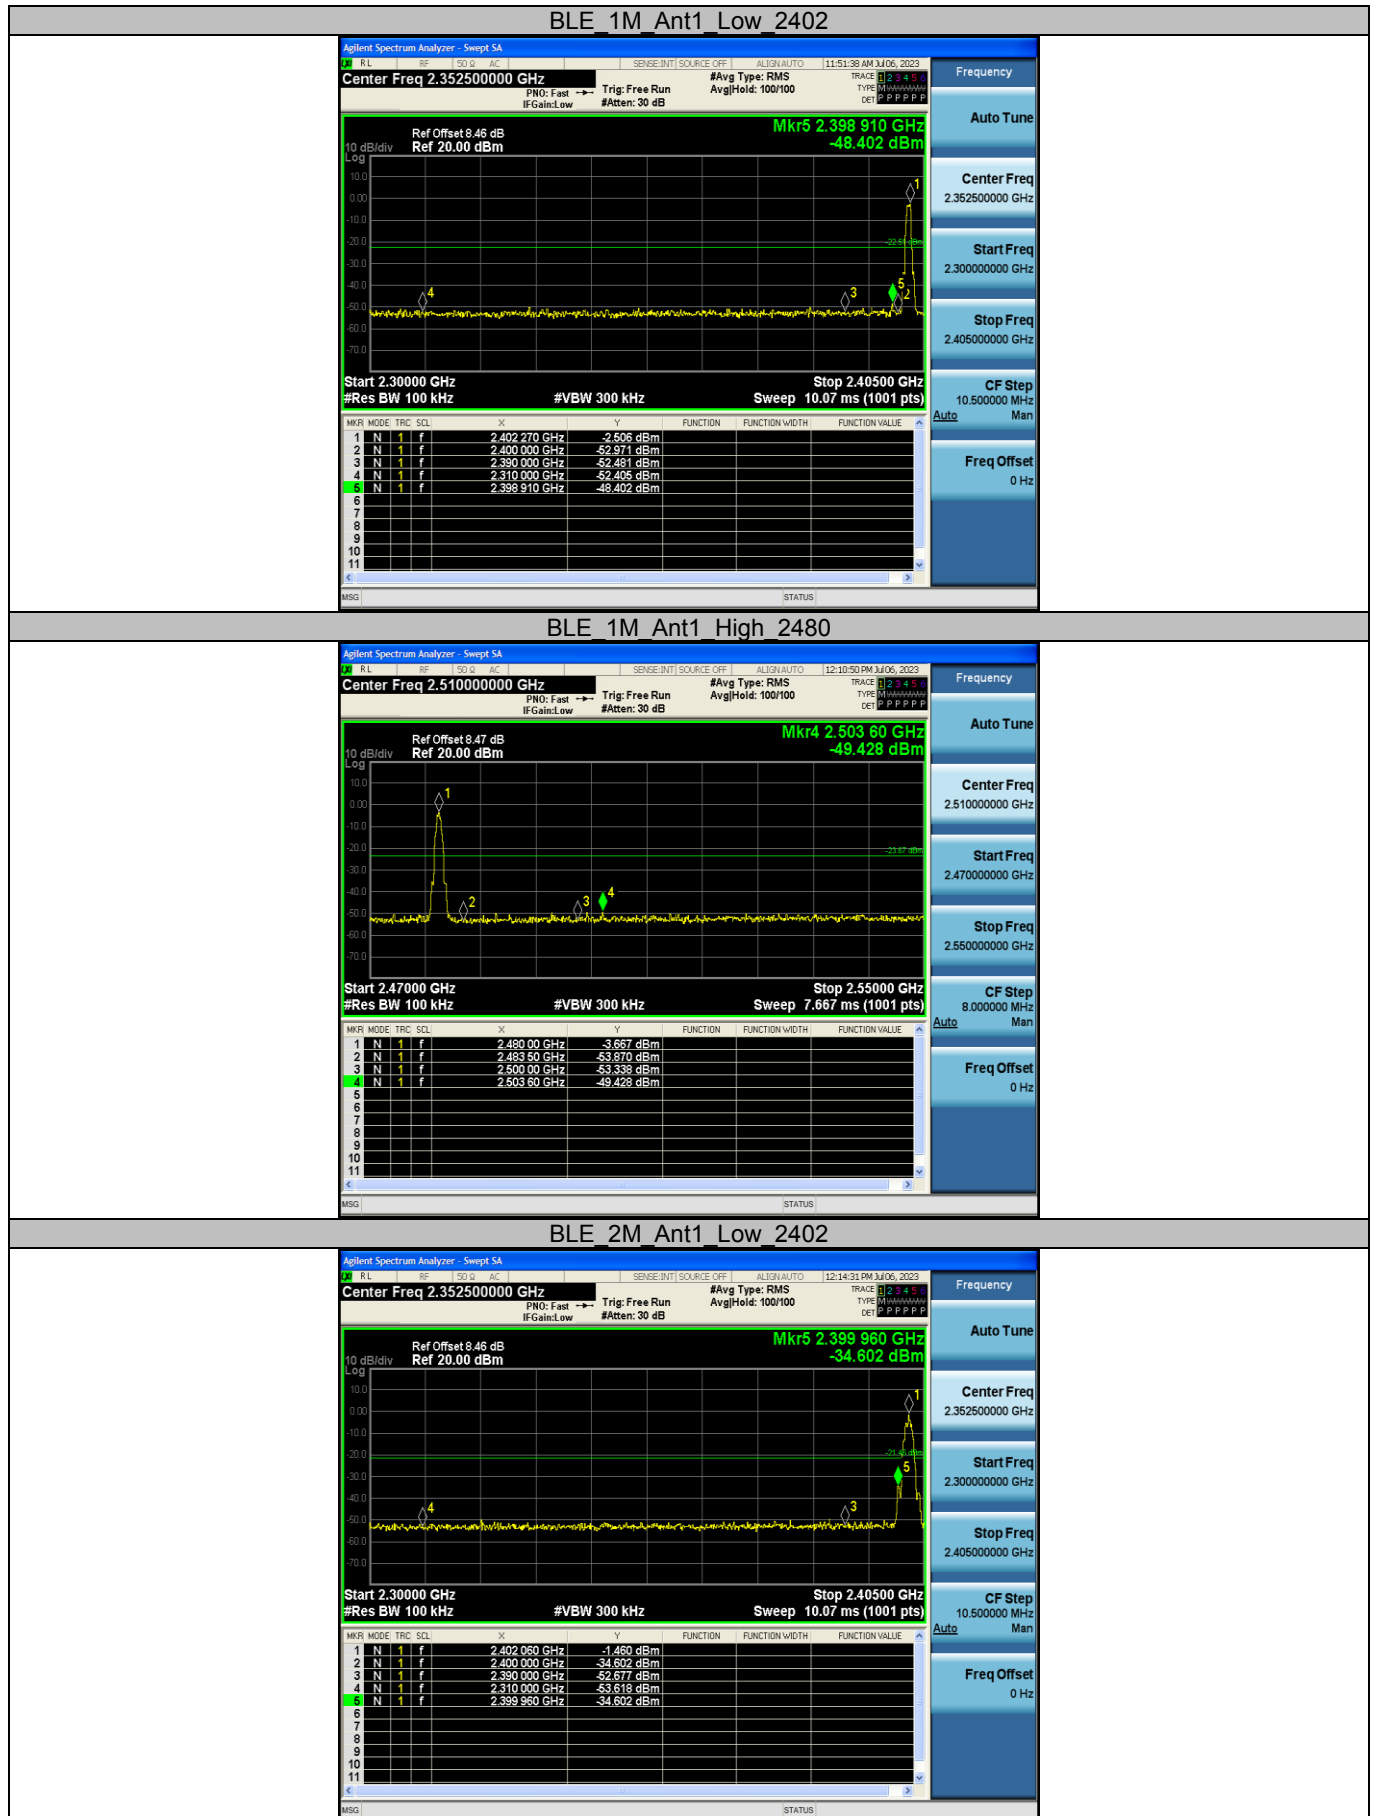

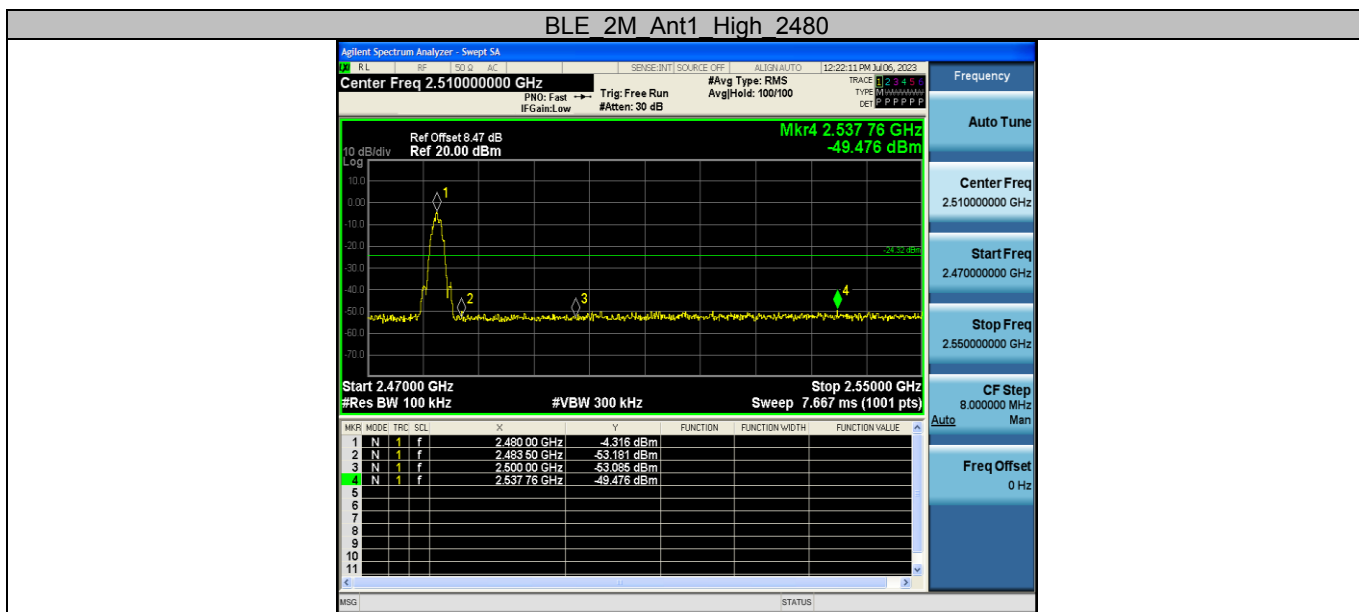

Appendix E: Conducted Spurious Emission


Test Graphs




BLE 1M Ant1 2440 0~Reference




BLE 1M Ant1 2440 30~1000

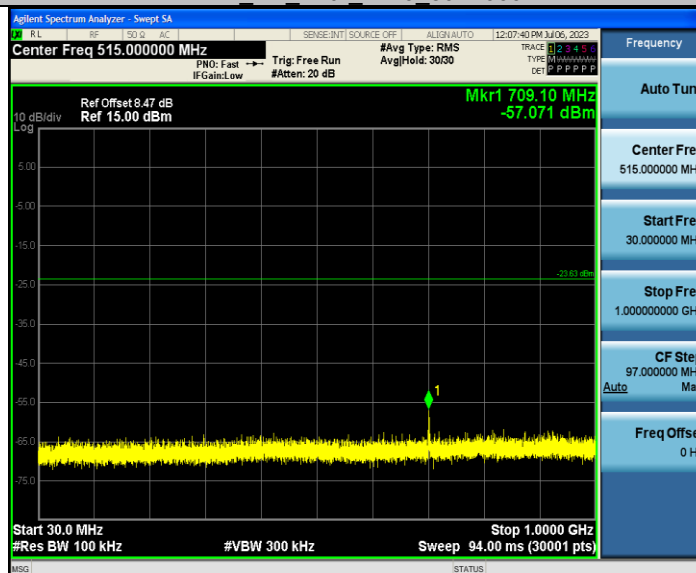


BLE 1M Ant1 2440 1000~26500

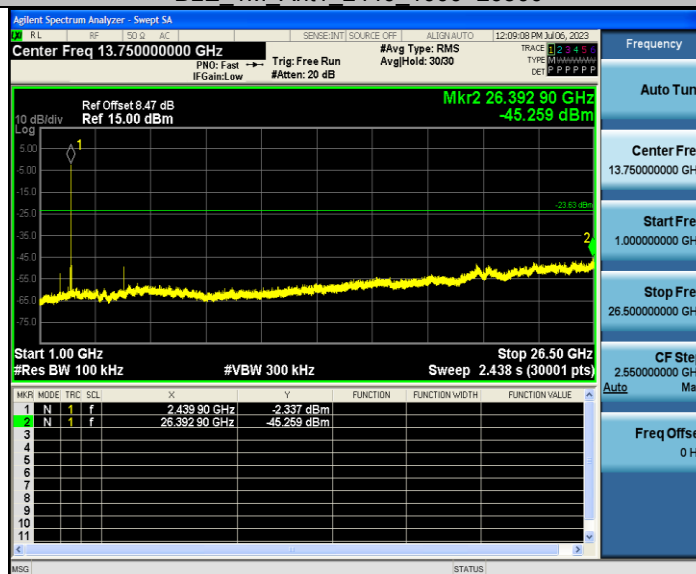

BLE 1M Ant1 2480 0~Reference

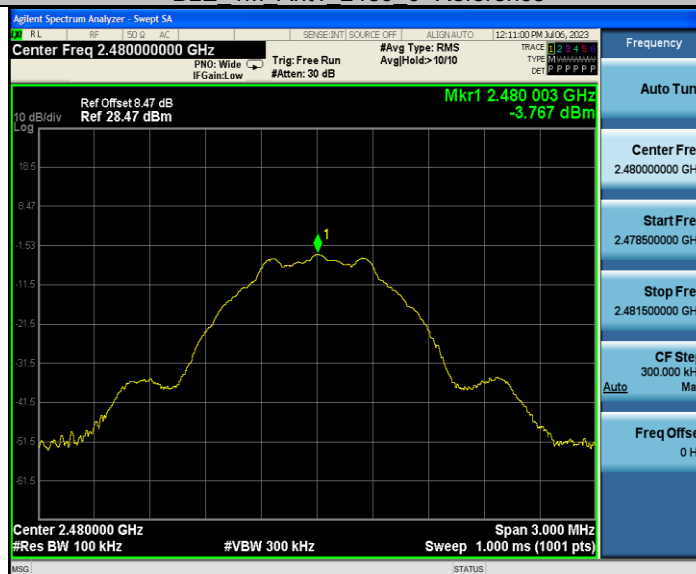

BLE 1M Ant1 2480 30~1000

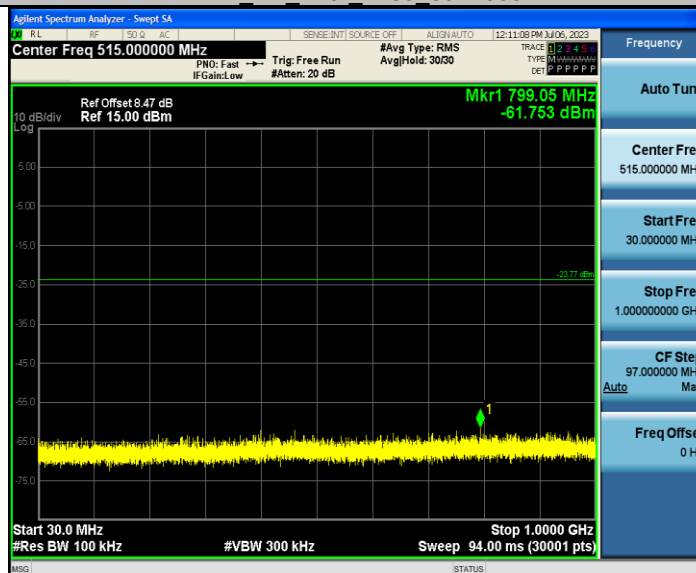


BLE 1M Ant1 2480 1000~26500



BLE 2M Ant1 2402 0~Reference



BLE 2M Ant1 2402 30~1000

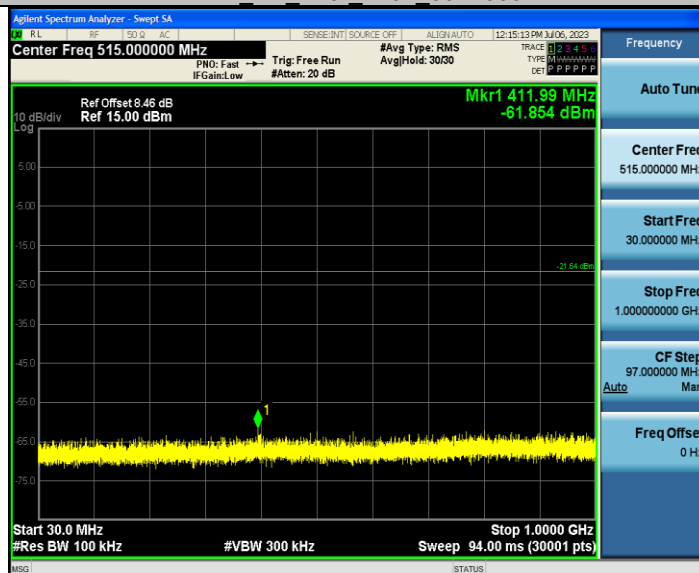


BLE 2M Ant1 2402 1000~26500




BLE 2M Ant1 2440 0~Reference



BLE 2M Ant1 2440 30~1000

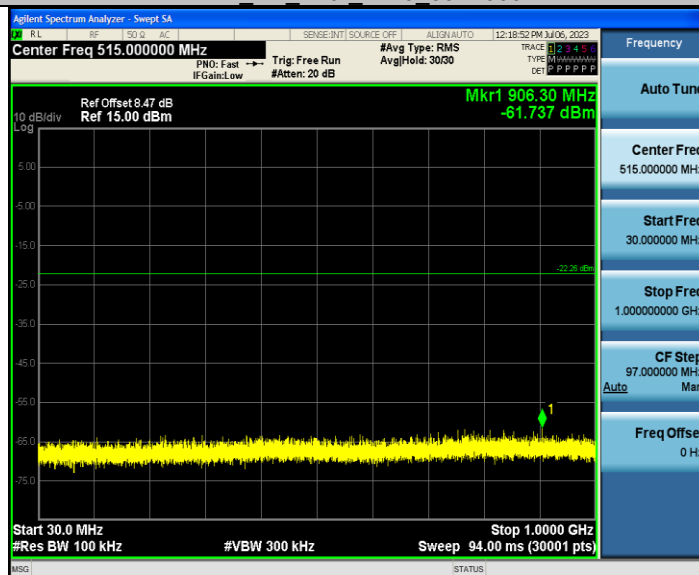


BLE 2M Ant1 2440 1000~26500

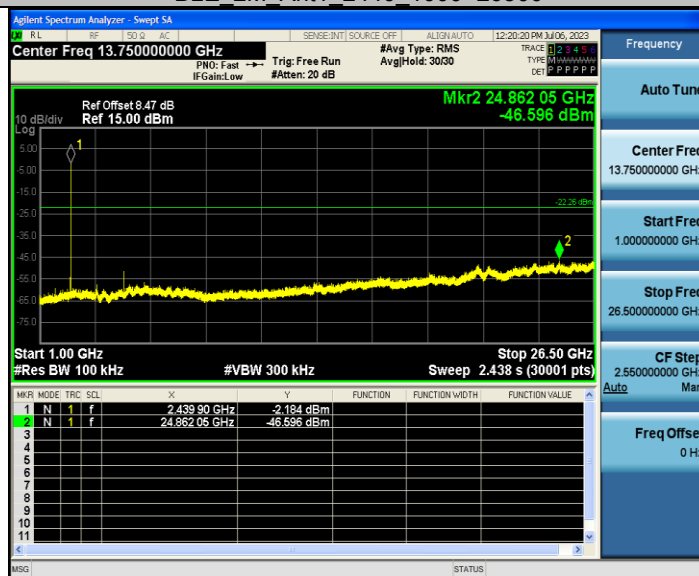


BLE 2M Ant1 2480 0~Reference



BLE 2M Ant1 2480 30~1000

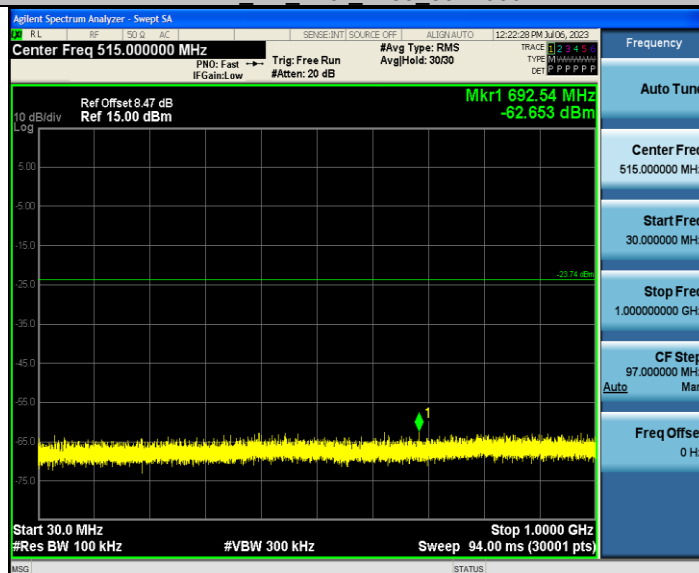

BLE 2M Ant1 2480 1000~26500

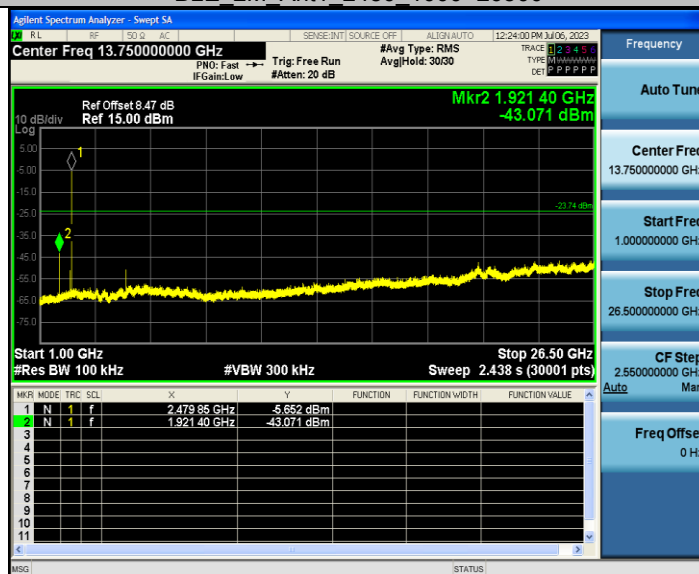




Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.40	0.63	63.49	1.97
		2440	0.40	0.63	63.49	1.97
		2480	0.40	0.63	63.49	1.97
BLE_2M	Ant1	2402	0.21	0.63	33.33	4.77
		2440	0.21	0.63	33.33	4.77
		2480	0.21	0.63	33.33	4.77

Test Graphs

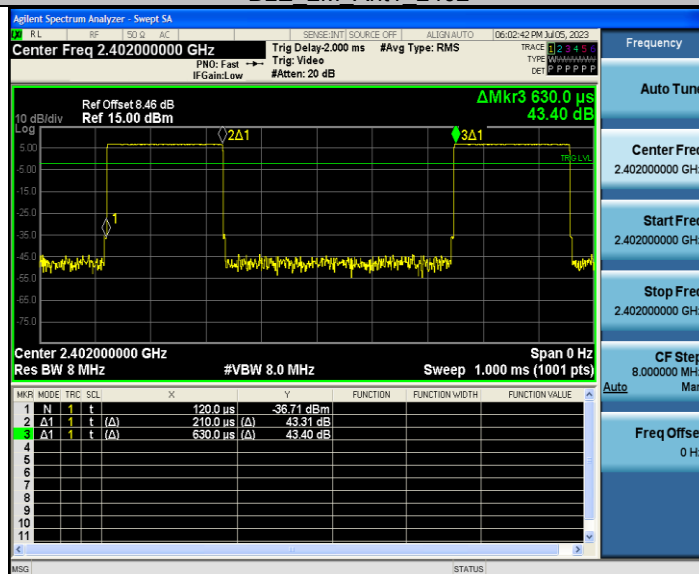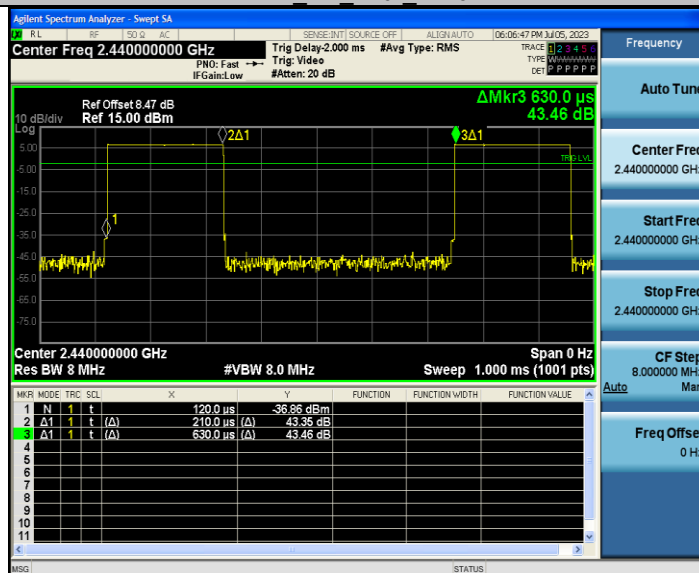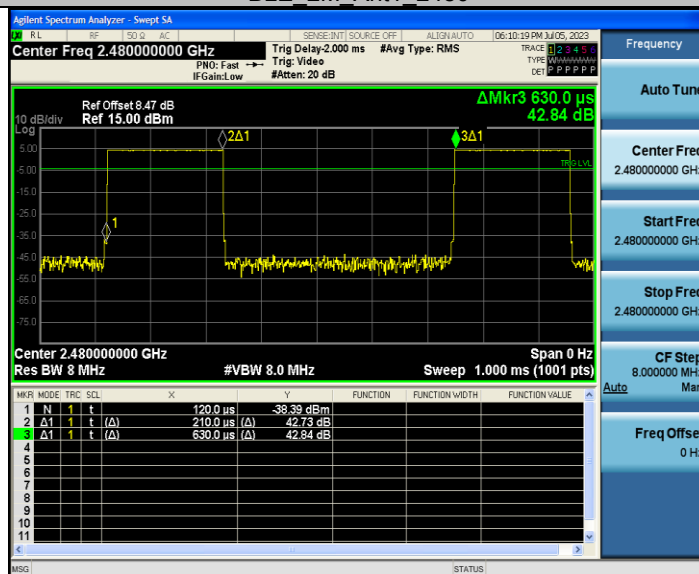

BLE 2M Ant1 2402

BLE 2M Ant1 2440

BLE 2M Ant1 2480


----End of Report----