

Prüfbericht-Nr.: <i>Test report no.:</i>	CN220J2E 001	Auftrags-Nr.: <i>Order no.:</i>	168385386	Seite 1 von 25 <i>Page 1 of 25</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2022-08-05	
Auftraggeber: <i>Client:</i>	Harman International Industries, Inc 8500 Balboa Blvd, Northridge, California, 91329, United States			
Prüfgegenstand: <i>Test item:</i>	Portable Bluetooth Speaker			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	CLIP4D (Trademark: JBL)			
Auftrags-Inhalt: <i>Order content:</i>	Type test			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2.1093 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019 RSS-102 Issue 5 March 2015			
Wareneingangsdatum: <i>Date of receipt:</i>	2022-08-05	Refer to photos document		
Prüfmuster-Nr.: <i>Test sample No.:</i>	A003313451-002, 003, A003312855-015			
Prüfzeitraum: <i>Testing period:</i>	2022-08-11 – 2022-08-16			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i>	2022-09-09		Ausstellungsdatum: <i>Issue date:</i>	2022-09-13
	Signed by: Alex Lan		Signed by: Winnie Hou	
Stellung / Position	Assistant Project Manager		Stellung / Position	Department Manager
Sonstiges / Other:	FCC ID: APIJBLCLIP4D IC: 6132A-JBLCLIP4D HVIN: CLIP4D			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>			
* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend
	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient
	P(ass) = passed a.m. test specifications(s)	F(ail) = failed a.m. test specifications(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 2 von 25

Page 2 of 25

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 99% BANDWIDTH

RESULT: Pass

5.1.4 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH

RESULT: Pass

5.1.5 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.6 20dB BANDWIDTH

RESULT: Pass

5.1.7 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.8 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.9 TIME OF OCCUPANCY

RESULT: Pass

5.1.10 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 3 von 25

Page 3 of 25

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES.....	5
2.1	TEST FACILITIES.....	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY.....	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	10
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS.....	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1	<i>Antenna Requirement.....</i>	<i>14</i>
5.1.2	<i>Maximum Conducted Output Power</i>	<i>15</i>
5.1.3	<i>99% Bandwidth</i>	<i>16</i>
5.1.4	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>17</i>
5.1.5	<i>Radiated Spurious Emission.....</i>	<i>18</i>
5.1.6	<i>20dB Bandwidth.....</i>	<i>19</i>
5.1.7	<i>Carrier Frequency Separation.....</i>	<i>20</i>
5.1.8	<i>Number of Hopping Frequency.....</i>	<i>21</i>
5.1.9	<i>Time of Occupancy</i>	<i>22</i>
5.1.10	<i>Conducted Emission on AC Mains.....</i>	<i>23</i>
6	SAFETY HUMAN EXPOSURE	24
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	24
6.1.1	<i>Electromagnetic Fields</i>	<i>24</i>
7	PHOTOGRAPHS OF THE TEST SET-UP	25

8	LIST OF TABLES	25
---	----------------------	----

Prüfbericht - Nr.: CN220J2E 001
Test report no.:

Seite 5 von 25
Page 5 of 25

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China

FCC Registration No.: 694916

IC Registration No.: 25069 and the CAB identifier is CN0078.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 6 von 25

Page 6 of 25

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum				
Description	Manufacturer	Model	Serial No.	Calibrated until
Wireless Connectivity Tester	R&S	CMW270	101375	2023-08-02
Signal Analyzer	R&S	FSV 40	101441	2023-08-01
Vector Signal Generator	R&S	SMBV100A	263301	2023-08-01
Signal Generator	R&S	SMB100A	115186	2023-08-01
OSP	R&S	OSP 150	101017	2022-12-02
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2022-12-02
Power Sensor	R&S	NRP-Z81	105677	2023-08-01
Humid & Temp Programmable Tester	BOST	NTH090-60	19040801	2023-04-02
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Radiated Spurious Emissions				
Description	Manufacturer	Model	Serial No.	Calibrated until
EMI Test Receiver	R&S	ESR 7	102021	2023-08-02
Signal Analyzer	R&S	FSV 40	101439	2023-08-01
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2023-08-01
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-08-02
Amplifier	R&S	SCU-18F	180070	2023-08-02
Amplifier	R&S	SCU40A	100475	2023-08-02
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-09-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22
Conducted Emissions				
Equipment	Manufacturer	M/N	S/N	Calibrated until
EMI Test Receiver	R&S	ESR3	102680	2023-02-27

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 7 von 25

Page 7 of 25

Artificial Mains Network	R&S	ENV216	101445	2023-02-27
Artificial Mains Network	R&S	ENV432	101546	2023-02-27
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	$\pm 2.08 \%$
RF output power, conducted	$\pm 0.99 \text{ dB}$
RF power density, conducted	$\pm 0.99 \text{ dB}$
Unwanted Emissions, conducted	$\pm 0.89 \text{ dB}$
All emissions, radiated	$\pm 4.17 \text{ dB}$
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.70 \text{ dB} / \pm 3.30 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a portable Bluetooth speaker which supports Classical Bluetooth technology.

This product has four different color of enclosure: blue, green, black and gray.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Portable Bluetooth Speaker
Type Designation	CLIP4D
Trademark	JBL
FCC ID	APIJBLCLIP4D
IC	6132A-JBLCLIP4D
HVIN	CLIP4D
Extreme Temperature Range	0°C - +45°C
Operating Voltage	DC 3.7V, 1050mAh, 3.885Wh via built-in battery DC 5V, 1A via Type-C interface
Technical Specification of Classical Bluetooth	
Bluetooth Core Version	Bluetooth 5.1
Operating Frequency band	2402 ~ 2480 MHz
Channel Number	79 channels
Channel separation	1MHz
Modulation	GFSK, 8DPSK, $\pi/4$ DQPSK
Antenna Type	PIFA antenna (PCB Layout Antenna)
Antenna Gain	0 dBi

Table 3: RF Channel and Frequency of Classic Bluetooth

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
00	2402.00	20	2422.00	40	2442.00	60	2462.00
01	2403.00	21	2423.00	41	2443.00	61	2463.00
02	2404.00	22	2424.00	42	2444.00	62	2464.00
03	2405.00	23	2425.00	43	2445.00	63	2465.00
04	2406.00	24	2426.00	44	2446.00	64	2466.00
05	2407.00	25	2427.00	45	2447.00	65	2467.00
06	2408.00	26	2428.00	46	2448.00	66	2468.00
07	2409.00	27	2429.00	47	2449.00	67	2469.00
08	2410.00	28	2430.00	48	2450.00	68	2470.00
09	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00	--	--

3.3 Independent Operation Modes

The basic operation modes are:

A. On

1. Bluetooth transmitting mode (BDR & EDR mode)

a) Low Channel

b) Middle Channel

c) High Channel

B. On, Transmitting on Hopping channel

C. On, Charging with normal operating

D. Off

Prüfbericht - Nr.: CN220J2E 001
Test report no.:

Seite 10 von 25
Page 10 of 25

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Block Diagram
- Schematics
- Technical Description
- FCC/IC Label and Location Info
- Photo Document
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N or Rating
iPad	Apple	A1893	DMPYN2HZJF8K
Laptop	Lenovo	ThinkPad X240	10Q67059
AC/DC Adapter	HUAWEI	HW-100225C00	Rating Input: AC 100-240V, 50/60Hz, 0.75A Rating Output: DC 5V, 2A or DC 9V, 2A or DC 10V, 2.25A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

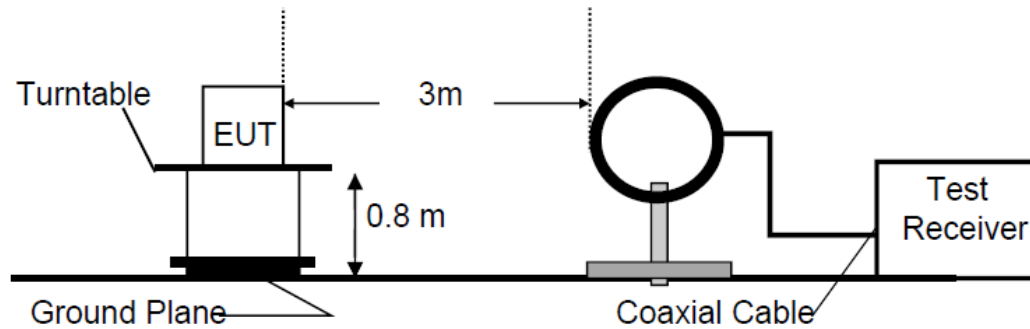


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

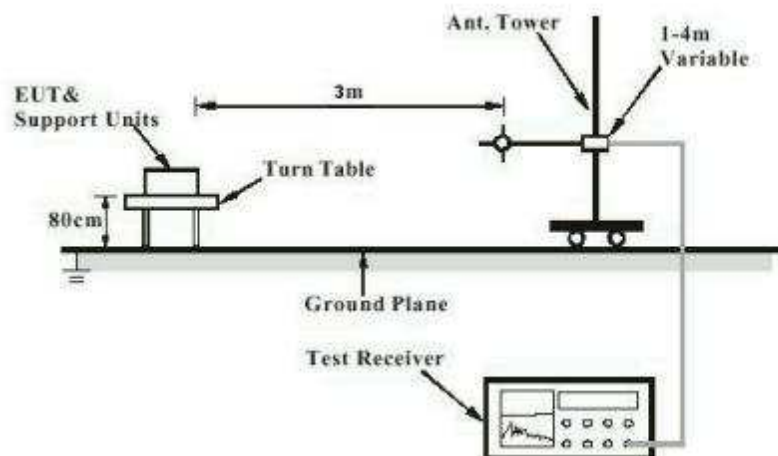


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

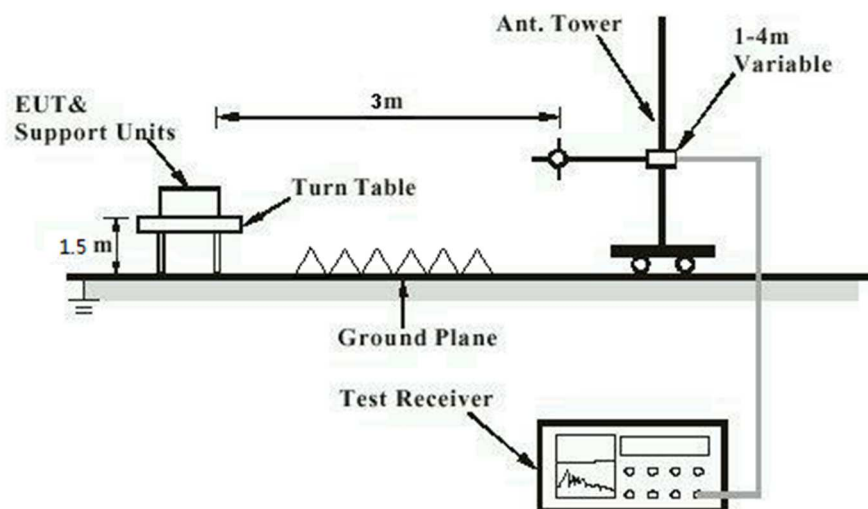


Diagram of Measurement Configuration for Mains Conduction Measurement


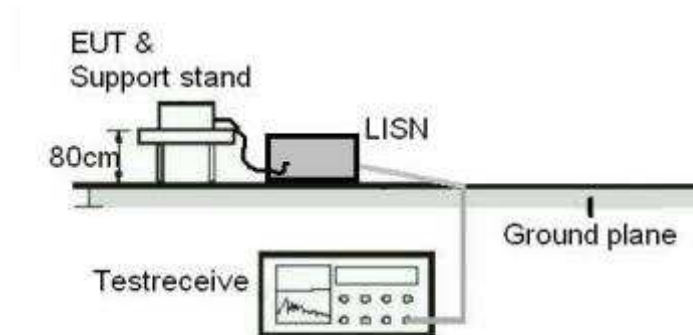


Diagram of Measurement Configuration for Conducted Transmitter Measurement

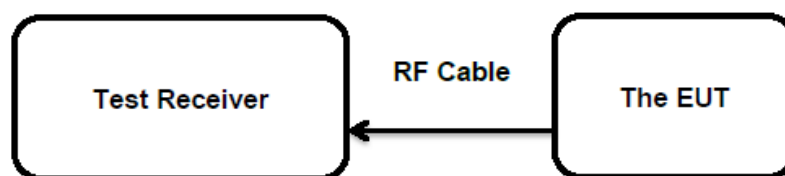

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 8.3

According to the manufacturer declared, the EUT has one PCB layout antenna, the directional gain of antennas are 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 15 von 25

Page 15 of 25

5.1.2 Maximum Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	FCC Part 15.247(b)(1) RSS-247 Clause 5.4(b)
Basic standard	ANSI C63.10: 2013
Limits	FHSS<0.125W(Maximum peak conducted output power) < 4 W (e.i.r.p.)
Kind of test site	Shielded Room

Test Setup

Date of testing	2022-08-11
Input voltage	DC 3.7V
Operation mode	A.1
Test channel	Low / Middle / High
Ambient temperature	25.6 °C
Relative humidity	52 %
Atmospheric pressure	101 kPa

Table 5: Test Result of Maximum Conducted Output Power

Test Mode	Channel Frequency (MHz)	Measured Peak Output Power		Limit (W)
		(dBm)	(W)	
BDR	2402	2.3	0.00170	< 0.125
	2441	2.3	0.00170	
	2480	2.7	0.00186	
EDR	2402	3.2	0.00209	< 0.125
	2441	3.2	0.00209	
	2480	3.6	0.00229	

Note: The cable loss is taken into account in results and the maximum e.i.r.p. is 3.6 dBm less than 4W(36dBm).

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 16 von 25

Page 16 of 25

5.1.3 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard : RSS-Gen Clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-08-11
Input voltage : DC 3.7V
Operation mode : A.1
Test channel : Low / Middle / High
Ambient temperature : 25.6 °C
Relative humidity : 52 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B

Table 6: Test Result of 99% Bandwidth

Test Mode	Channel Frequency (MHz)	Measured 99% Bandwidth	Limit
		(KHz)	
BDR	2402	885	/
	2441	885	
	2480	885	
EDR	2402	1170	/
	2441	1170	
	2480	1170	

Note: The fundamental emissions stay within the allocated band 2400-2483.5MHz.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 17 von 25

Page 17 of 25

5.1.4 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power);
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-08-12
Input voltage	: DC 3.7V
Operation mode	: A.1
Test channel	: Low / Middle / High
Ambient temperature	: 25.6 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to following test plot, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 18 von 25

Page 18 of 25

5.1.5 Radiated Spurious Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 6 & Table 7
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2022-08-16
Input voltage	: DC 3.7V
Operation mode	: A.1
Test channel	: Low / Middle / High
Ambient temperature	: 23 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

Remark:

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test set-up photos.

Testing was carried out within frequency range 9kHz to the tenth harmonics.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 19 von 25

Page 19 of 25

5.1.6 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
RSS-247 Clause 5.1(a)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-08-11
Input voltage : DC 3.7V
Operation mode : A.1
Test channel : Low / Middle / High
Ambient temperature : 25.6 °C
Relative humidity : 52 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 7: Test Result of -20dB Bandwidth

Test Mode	Channel Frequency (MHz)	20dB Bandwidth (kHz)	2/3 of 20dB Bandwidth (kHz)	Limit (MHz)
BDR	2402	930	620.000	/
	2441	930	620.000	
	2480	935	623.333	
EDR	2402	1260	840.000	/
	2441	1260	840.000	
	2480	1260	840.000	

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 20 von 25

Page 20 of 25

5.1.7 Carrier Frequency Separation

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
RSS-247 Clause 5.1(b)
Basic standard : ANSI C63.10: 2013
Limits : $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-08-11
Input voltage : DC 3.7V
Operation mode : B
Test channel : Low / Middle / High
Ambient temperature : 25.6 °C
Relative humidity : 52 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 8: Test Result of Carrier Frequency Separation

Test Mode	Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
BDR	Low Channel	2401.995050	0.980198	≥ 25kHz or 2/3 of 20dB bandwidth	Pass
	Adjacency Channel	2402.975248			
	Middle Channel	2440.995050	0.980198		Pass
	Adjacency Channel	2441.975248			
	High Channel	2478.995050	0.980198		Pass
	Adjacency Channel	2479.975248			
EDR	Low Channel	2401.995050	1.009900	≥ 25kHz or 2/3 of 20dB bandwidth	Pass
	Adjacency Channel	2403.004950			
	Middle Channel	2440.995050	1.009900		Pass
	Adjacency Channel	2442.004950			
	High Channel	2478.995050	1.009900		Pass
	Adjacency Channel	2480.004950			

Note:

The limit is maximum $2/3$ of the 20 dB bandwidth: 840KHz.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 21 von 25

Page 21 of 25

5.1.8 Number of Hopping Frequency

RESULT:

Pass

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 Clause 5.1(d)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-08-11
Input voltage : DC 3.7V
Operation mode : B
Ambient temperature : 25.6 °C
Relative humidity : 52 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 9: Test Result of Number of Hopping Frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
2402 to 2480 MHz	79	≥ 15	Pass

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 22 von 25

Page 22 of 25

5.1.9 Time of Occupancy

RESULT:

Pass

Test Specification

Test standard	: FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)
Basic standard	: ANSI C63.10: 2013
Limits	: < 0.4s
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-08-11
Input voltage	: DC 3.7V
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25.6 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 23 von 25

Page 23 of 25

5.1.10 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-08-11
Input voltage	: DC 5V via Type-C interface
Operation mode	: C
Earthing	: Not connected
Ambient temperature	: 24.9°C
Relative humidity	: 55.7%
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN220J2E 001

Test report no.:

Seite 24 von 25

Page 24 of 25

6 Safety Human Exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:

Pass

Test Specification

Test standard	:	CFR47 FCC Part 2.1093 RSS-102 Issue 5 March 2019 FCC KDB Publication 447498 v06
Limit	:	CFR47 FCC Part 1.1310

The measured maximum conducted output power of the EUT is 3.6dBm $\approx$ 2.29 mW, which is below the SAR exclusion threshold level 9.6mW (SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and $\leq$ 50 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile and Portable RF Exposure. Guidance v06.

The measured maximum conducted output power of the EUT is 3.6dBm $\approx$ 2.29 mW and the measured maximum specified e.i.r.p of the EUT is 3.6dBm $\approx$ 2.29 mW, which is below the SAR exclusion threshold level 4mW, hence the EUT is excluded from SAR evaluation according to RSS-102 Issue 5 section 2.5.1.

7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

8 List of Tables

Table 1: List of Test and Measurement Equipment..... 6
 Table 2: Technical Specification of EUT 8
 Table 3: RF Channel and Frequency of Classic Bluetooth..... 9
 Table 4: List of Accessories and Auxiliary Equipment..... 11
 Table 5: Test Result of Maximum Conducted Output Power..... 15
 Table 6: Test Result of 99% Bandwidth 16
 Table 7: Test Result of -20dB Bandwidth..... 19
 Table 8: Test Result of Carrier Frequency Separation 20
 Table 9: Test Result of Number of Hopping Frequency 21

Appendix B: Test Results

APPENDIX B: TEST RESULTS	1
APPENDIX B.1: TEST RESULTS OF 99% BANDWIDTH	2
<i>BDR-GFSK</i>	2
<i>EDR-8DPSK</i>	4
APPENDIX B.2: TEST RESULTS OF 20dB BANDWIDTH	6
<i>BDR-GFSK</i>	6
<i>EDR-8DPSK</i>	8
APPENDIX B.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	10
<i>BDR-GFSK</i>	10
<i>EDR-8DPSK</i>	12
APPENDIX B.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCIES	14
<i>BDR-GFSK</i>	14
<i>EDR-8DPSK</i>	14
APPENDIX B.5: TEST RESULTS OF TIME OF OCCUPANCY	15
<i>BDR-GFSK</i>	15
<i>EDR-8DPSK</i>	18
APPENDIX B.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	21
<i>Conducted Spurious Emission</i>	21
<i>BDR-GFSK</i>	21
<i>EDR-8DPSK</i>	25
<i>Band Edge</i>	29
<i>BDR-GFSK</i>	29
<i>EDR-8DPSK</i>	31
APPENDIX B.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	33
30MHz - 1GHz	33
1GHz - 6.2GHz	35
6.2GHz - 18GHz	41
APPENDIX B.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	47
APPENDIX B.9: TEST RESULTS OF CONDUCTED EMISSION	51

Appendix B.1: Test Results of 99% Bandwidth

BDR-GFSK


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.885000	---	---	2401.557500	2402.442500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

99 % Bandwidth

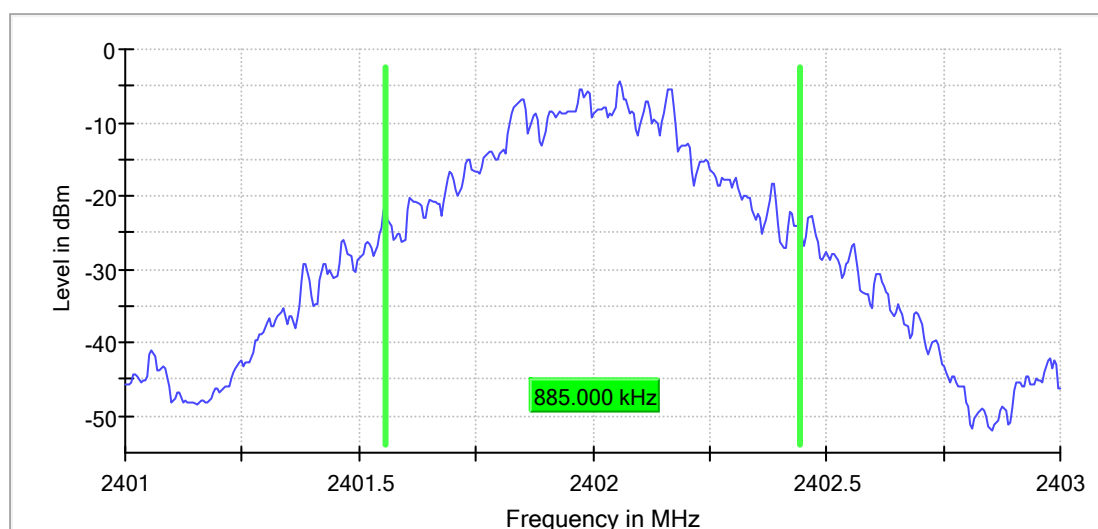


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.885000	---	---	2440.557500	2441.442500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

99 % Bandwidth

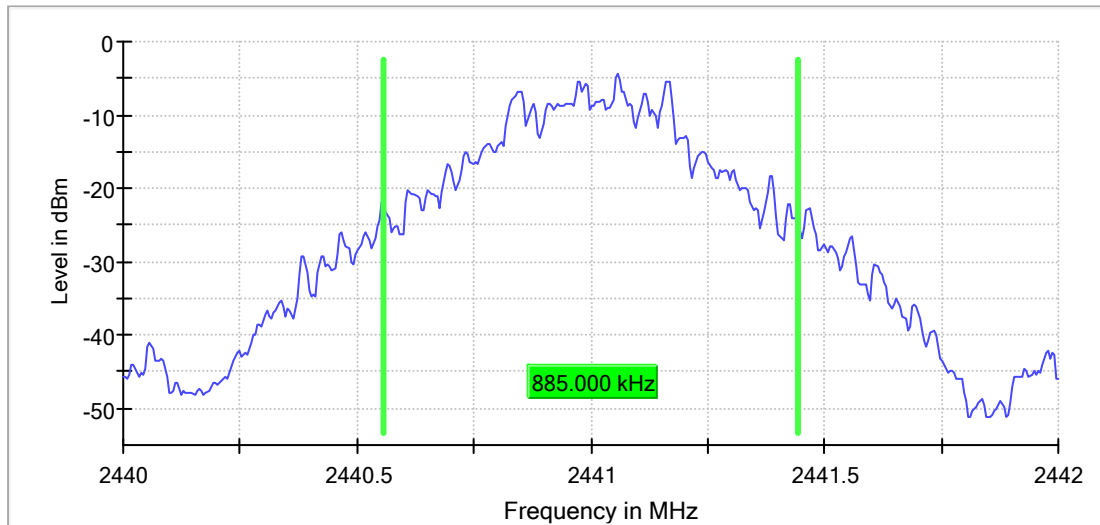


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.885000	---	---	2479.557500	2480.442500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

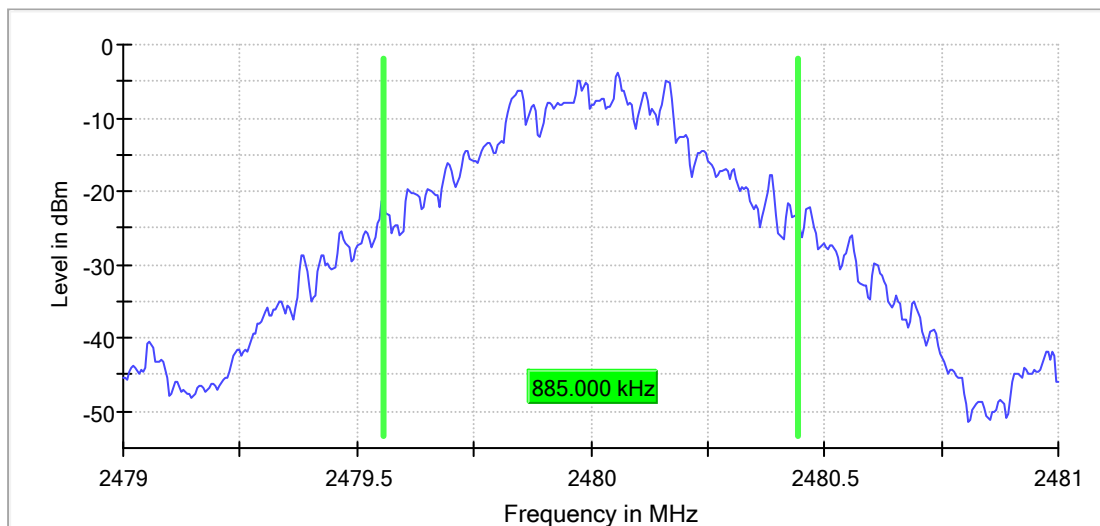

EDR-8DPSK


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.170000	---	---	2401.412500	2402.582500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

99 % Bandwidth

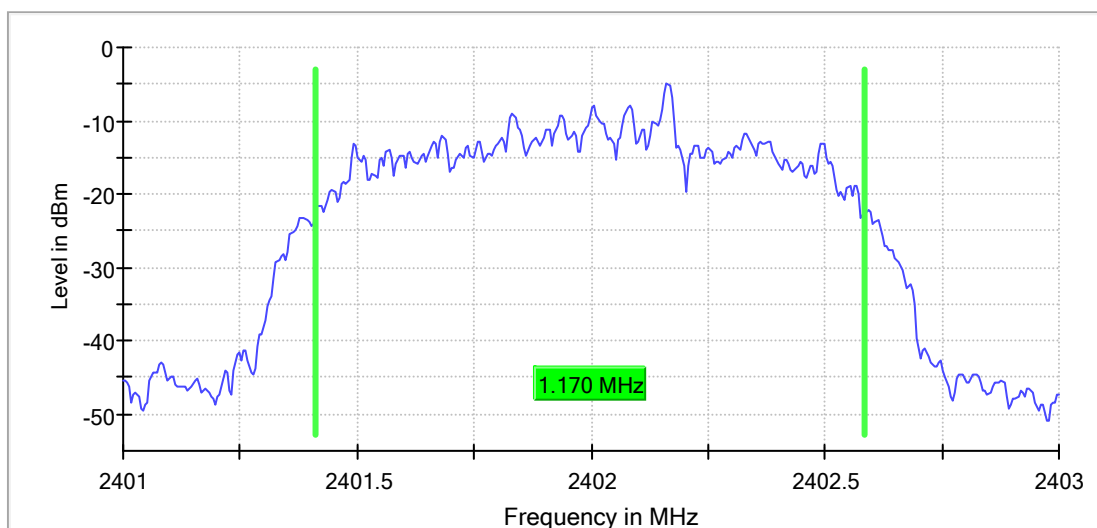


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.170000	---	---	2440.412500	2441.582500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

99 % Bandwidth

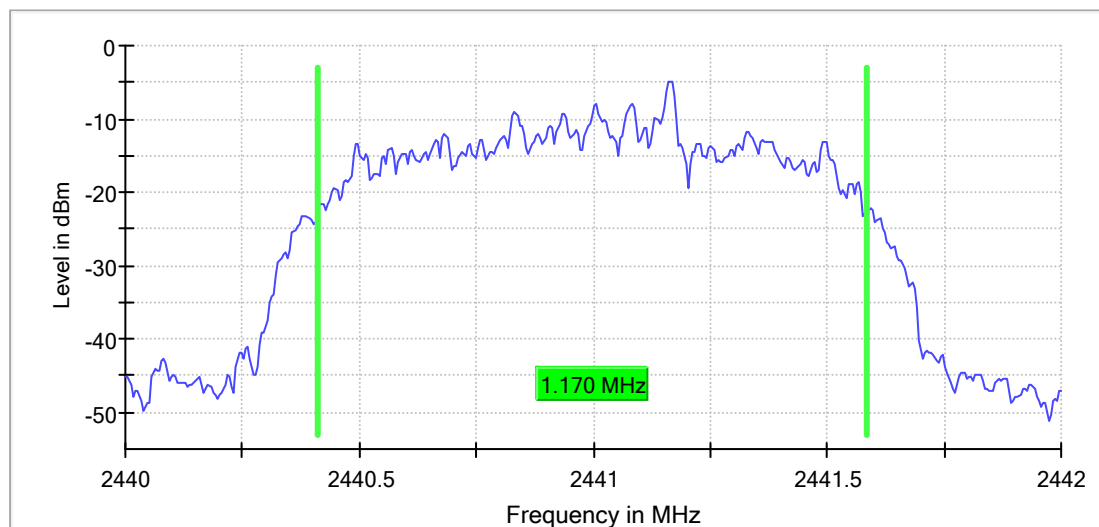


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.170000	---	---	2479.412500	2480.582500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

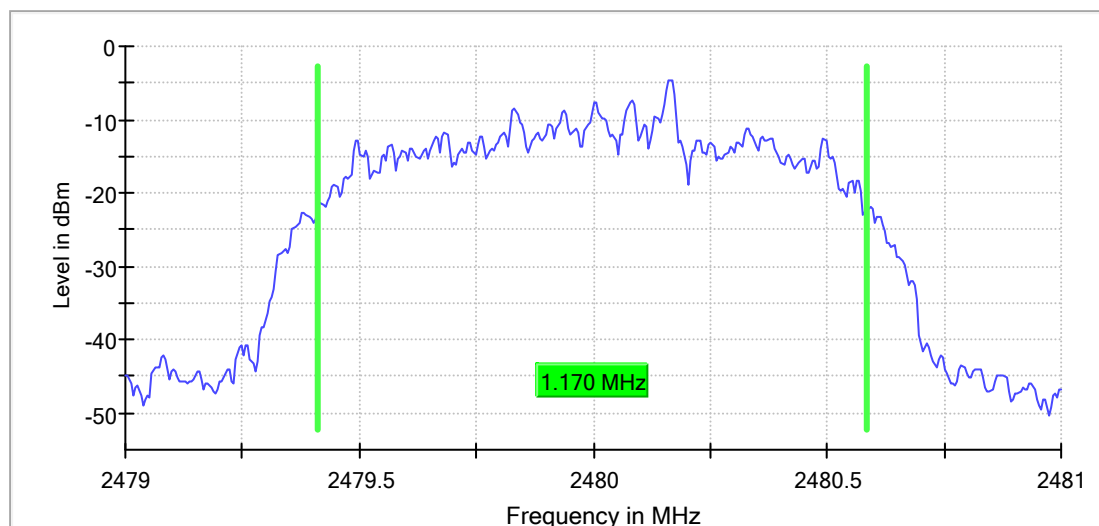

Appendix B.2: Test Results of 20dB Bandwidth

BDR-GFSK


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.930000	---	---	2401.547500	2402.477500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-4.4	PASS

20 dB Bandwidth

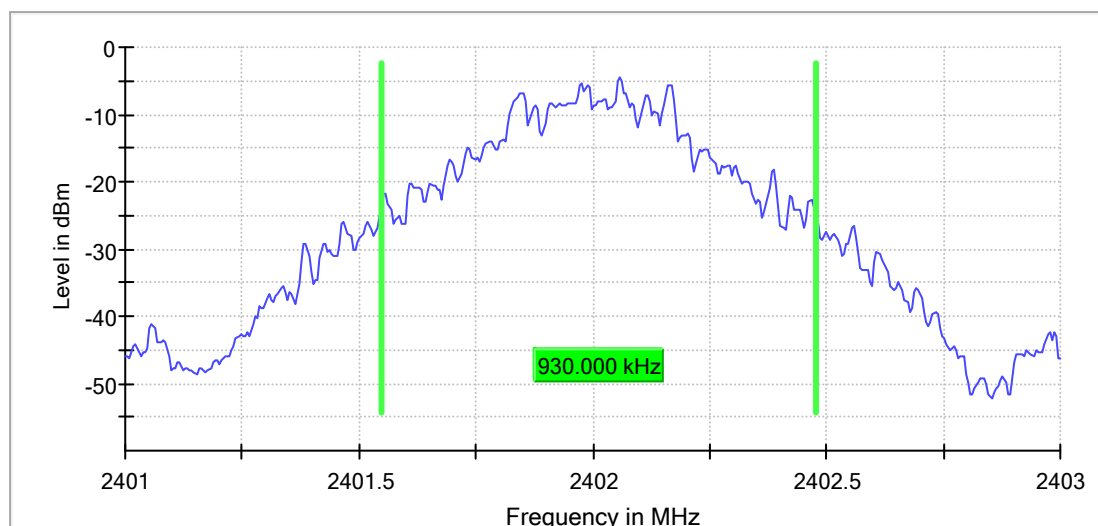


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.930000	---	---	2440.547500	2441.477500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	-4.4	PASS

20 dB Bandwidth

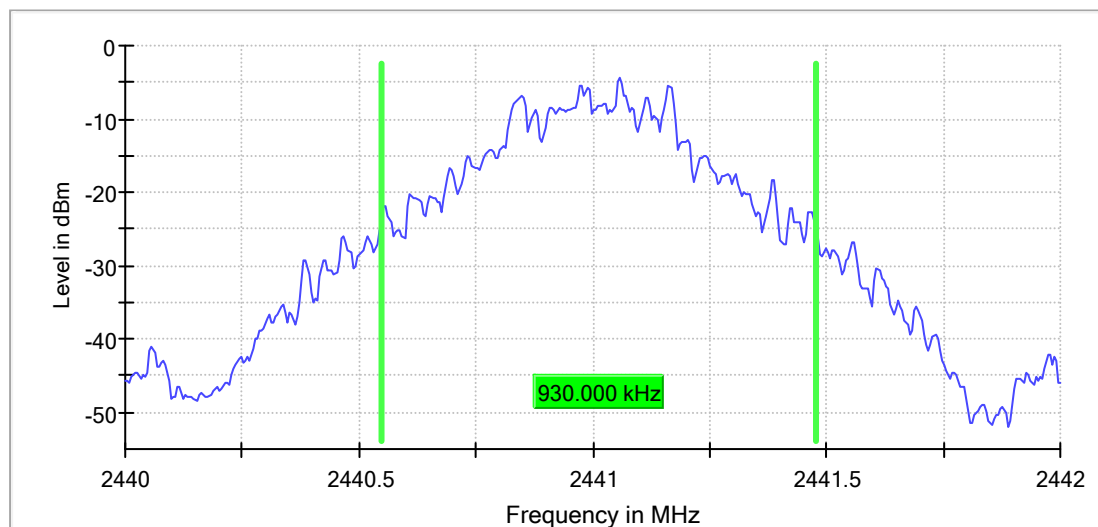


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.935000	---	---	2479.542500	2480.477500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-3.9	PASS

20 dB Bandwidth

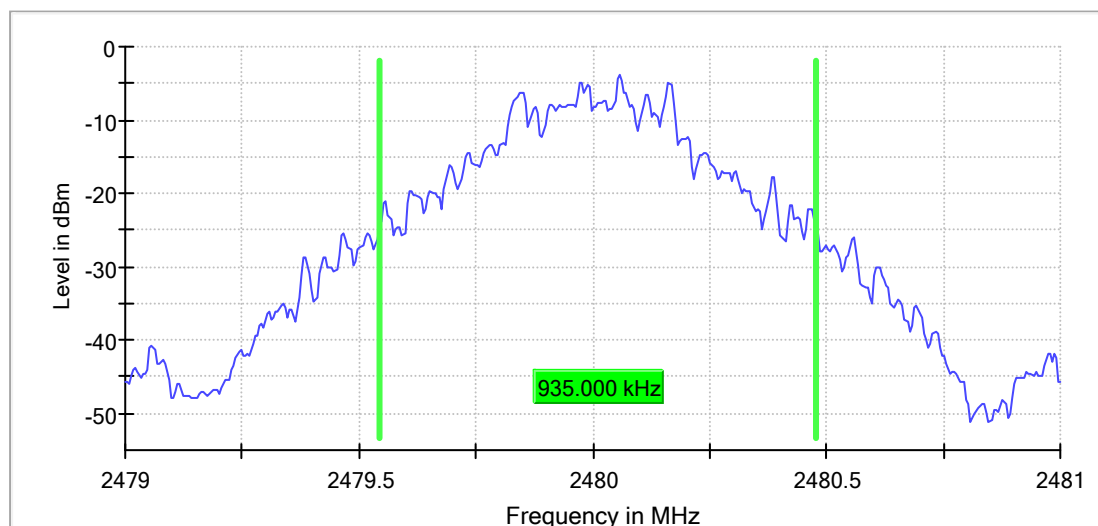

EDR-8DPSK


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.260000	---	---	2401.362500	2402.622500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-5.0	PASS

20 dB Bandwidth

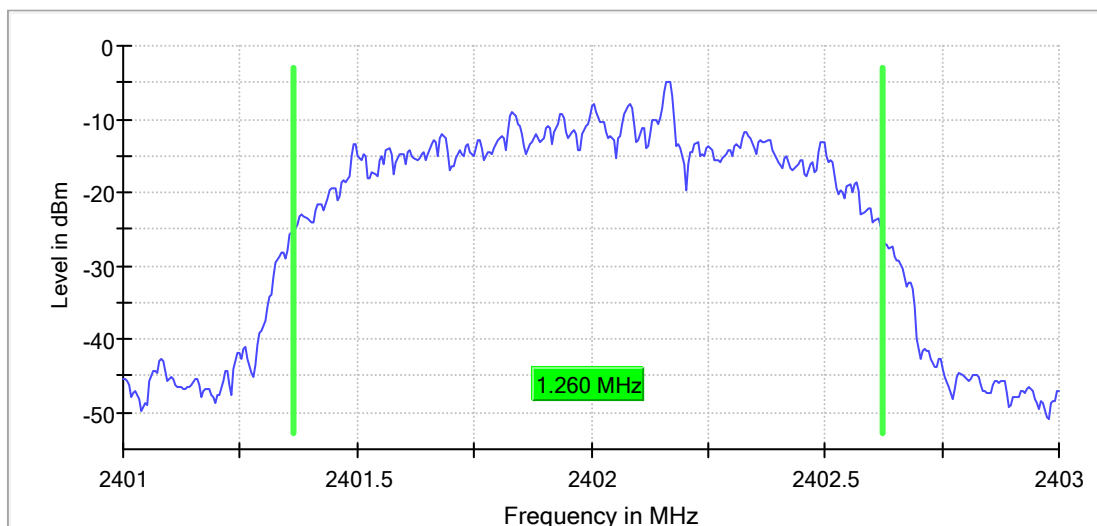


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.260000	---	---	2440.362500	2441.622500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	-5.0	PASS

20 dB Bandwidth

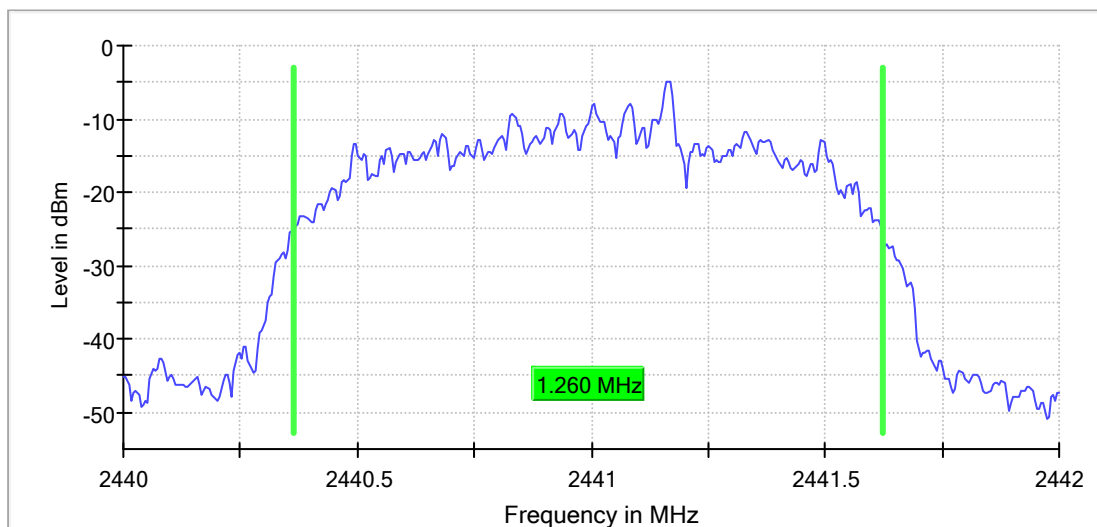


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.260000	---	---	2479.362500	2480.622500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-4.6	PASS

20 dB Bandwidth

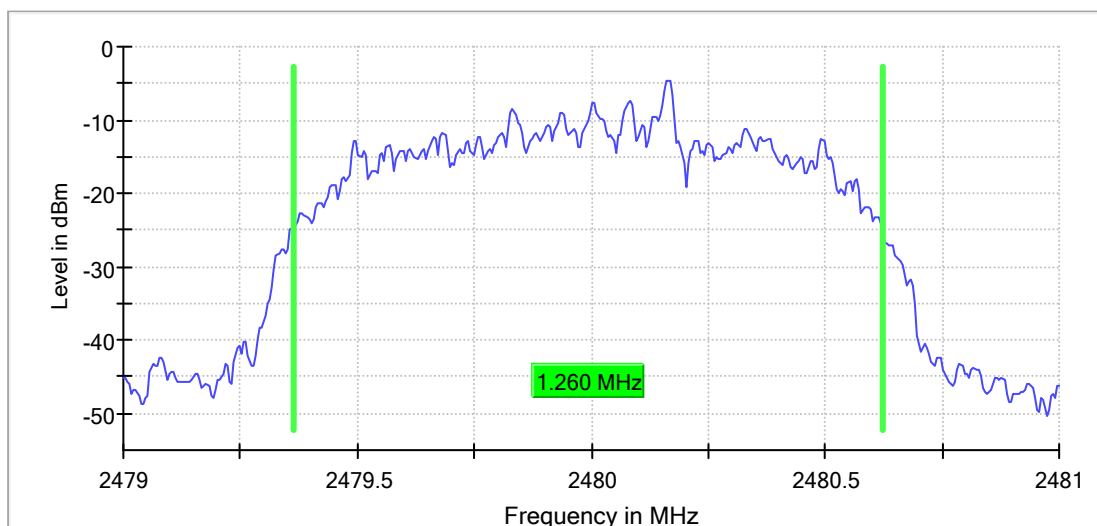

Appendix B.3: Test Results of Carrier Frequency Separation

BDR-GFSK


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2402.000000	0.980198	0.620000	---	2401.995050	2402.975248

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

CFS

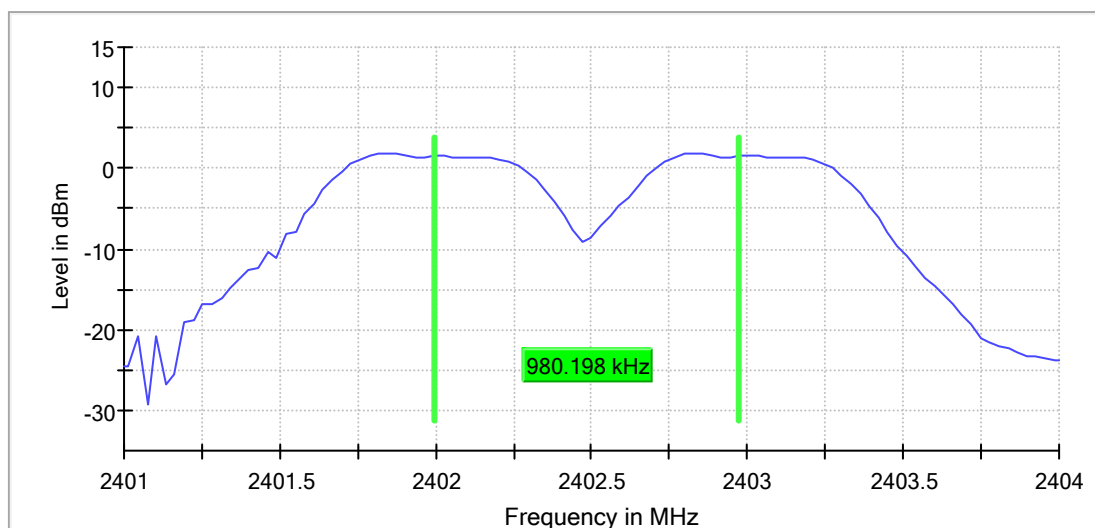


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.000000	0.980198	0.620000	---	2440.995050	2441.975248

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

CFS

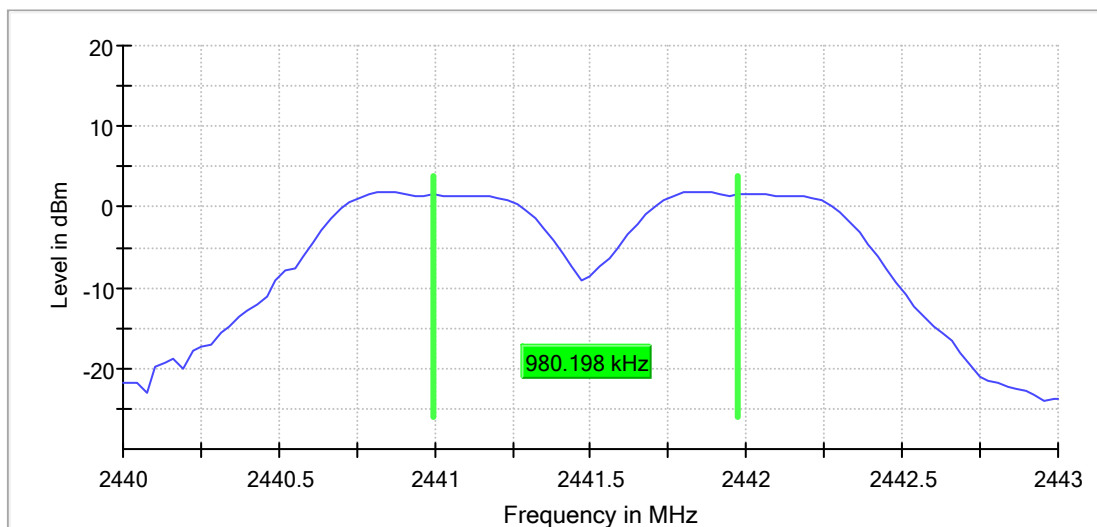


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2480.000000	0.980198	0.623333	---	2478.995050	2479.975248

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

CFS

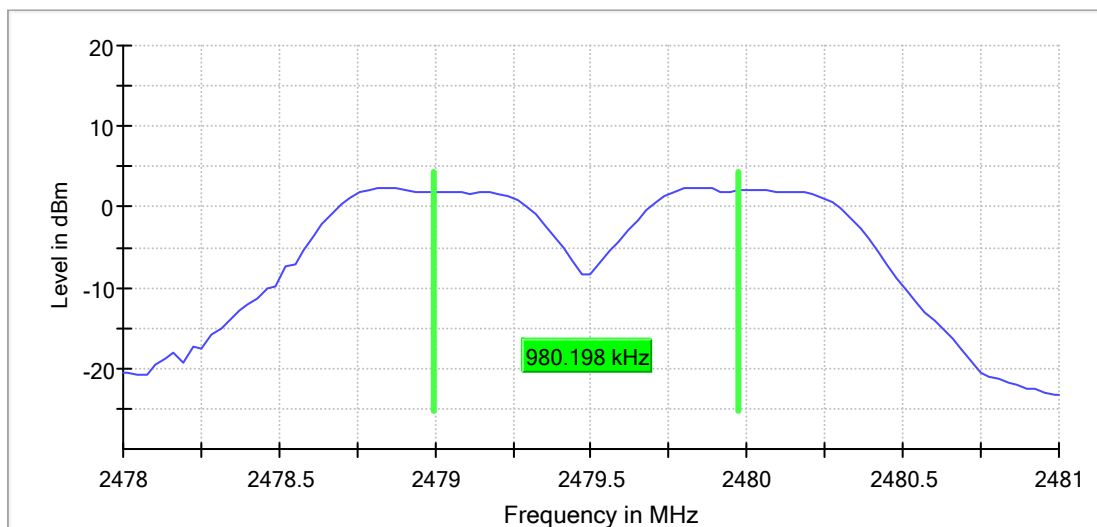

EDR-8DPSK


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2402.000000	1.009900	0.840000	---	2401.995050	2403.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

CFS

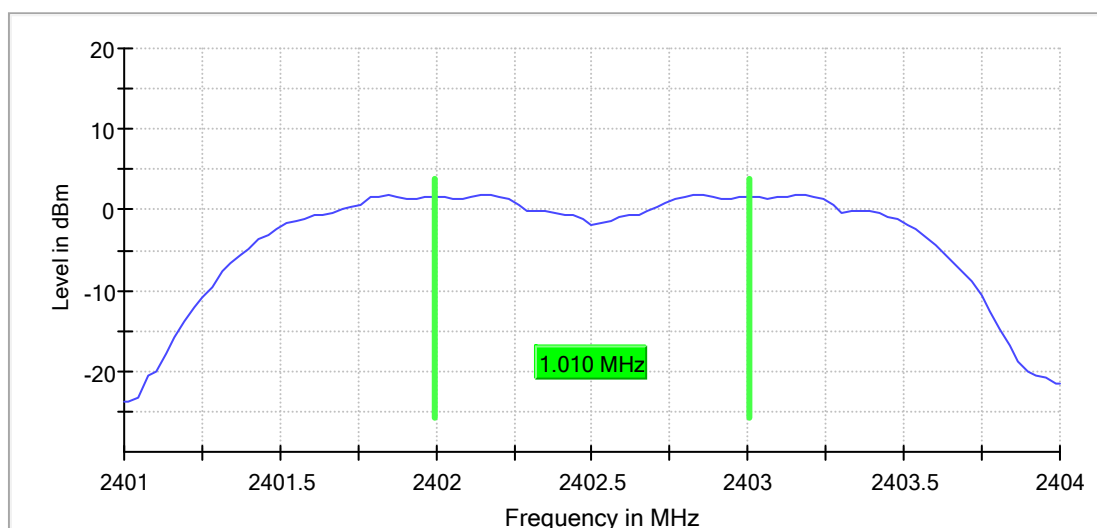


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.000000	1.009900	0.840000	---	2440.995050	2442.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

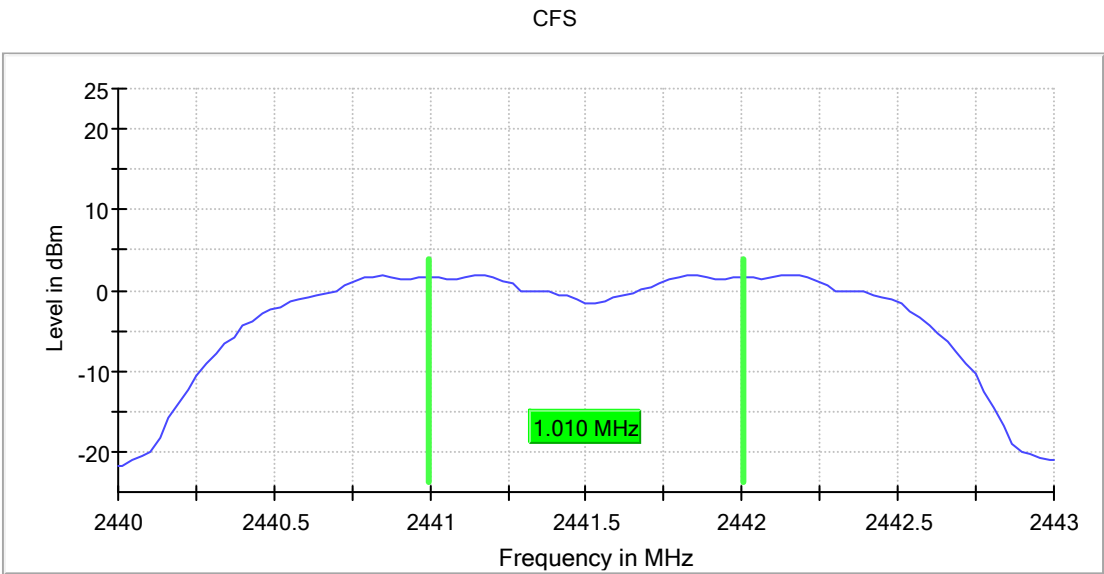


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2480.000000	1.009900	0.840000	---	2478.995050	2480.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

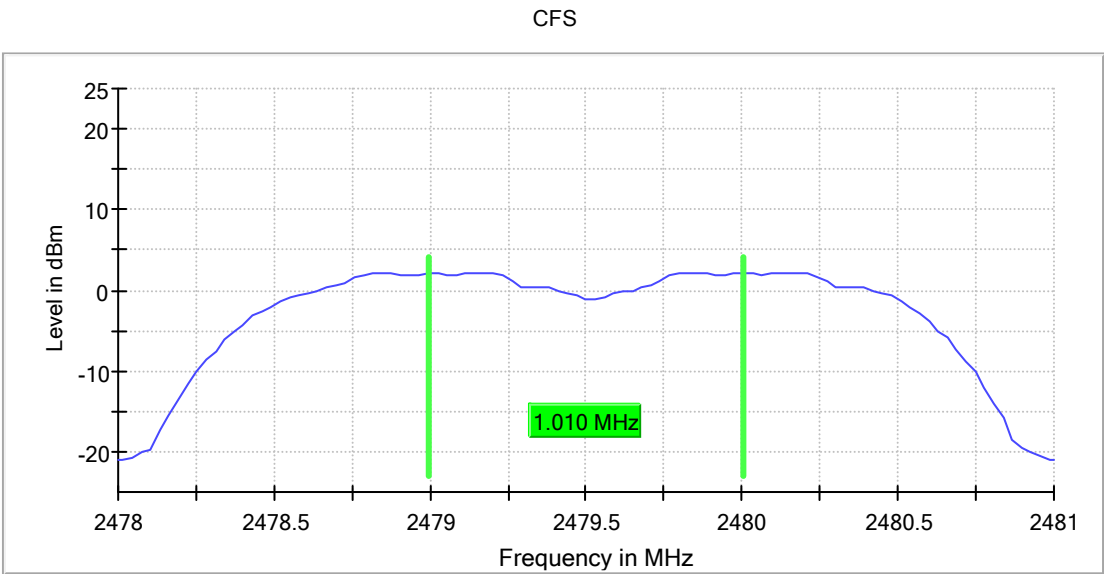


Appendix B.4: Test Results of Number of Hopping Frequencies

BDR-GFSK Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence

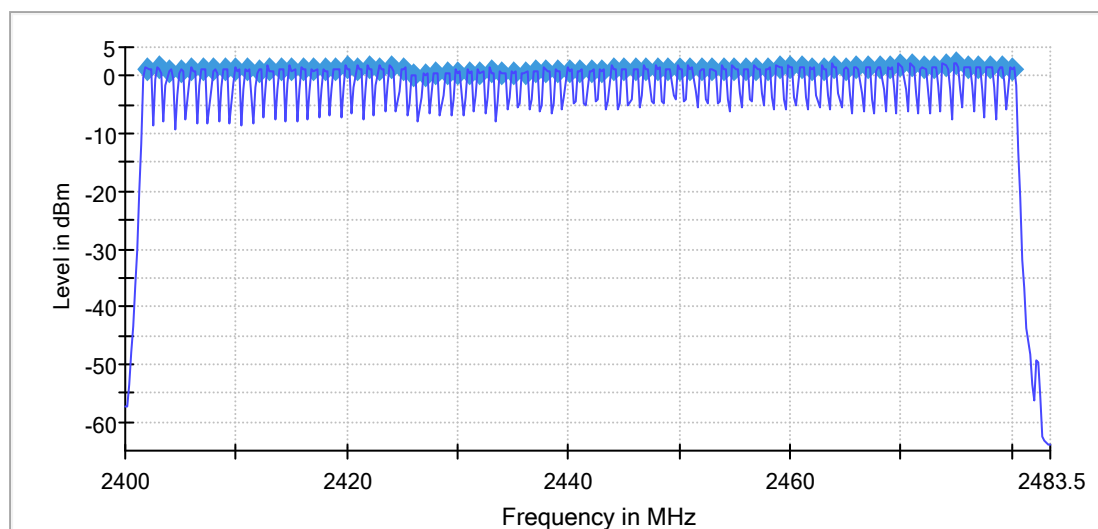


EDR-8DPSK

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence

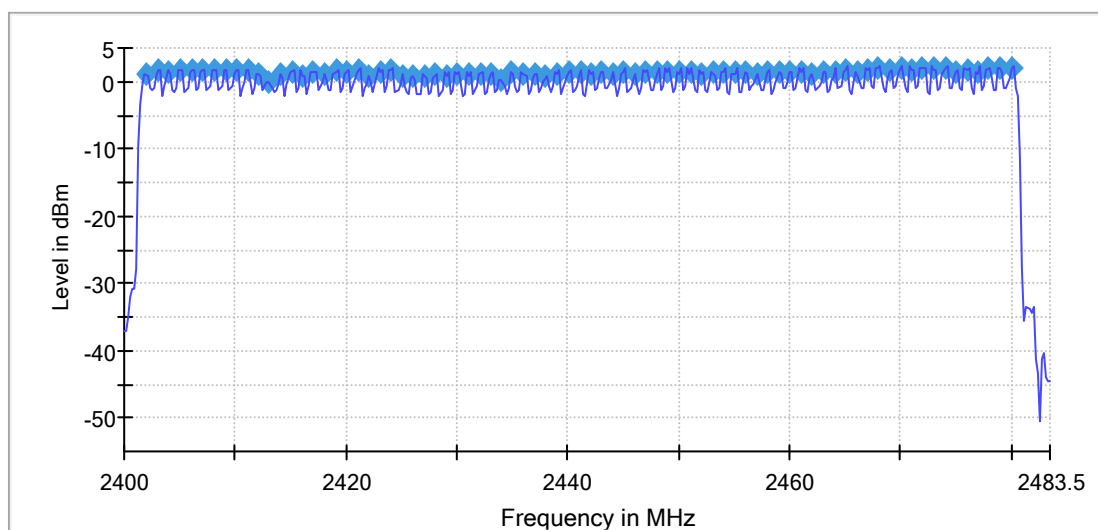

Appendix B.5: Test Results of Time of Occupancy

BDR-GFSK

DH1

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	319	130.000	-20.0

Periode

Min (ms)	Max (ms)	Mean (ms)
3.750	195.000	98.740


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.40	0.41	400.000	0.000	0.406

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.40	0.41	0.406

Time of Channel Occupancy

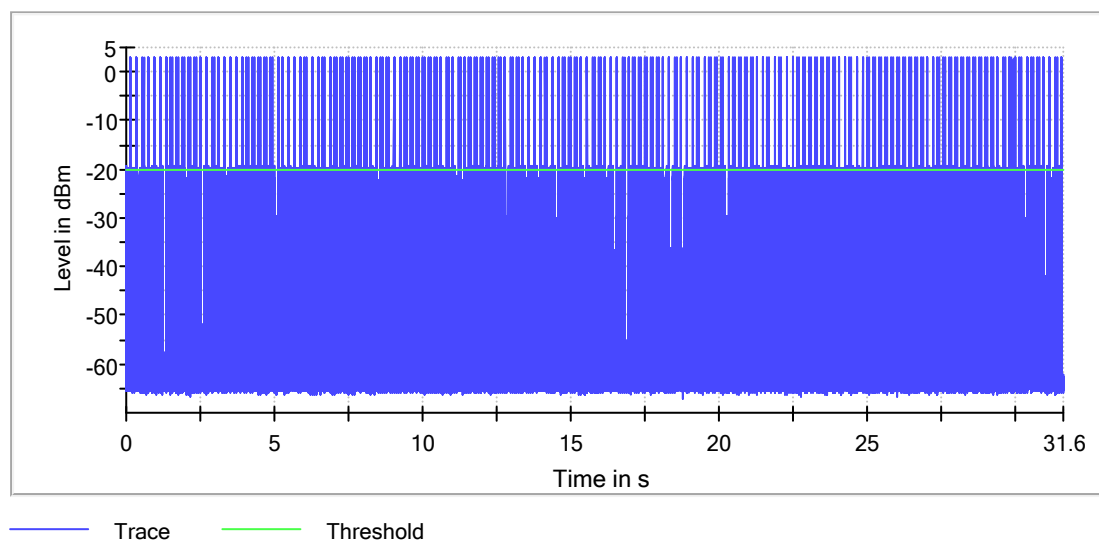

DH3

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	164	274.330	-20.0

Periode

Min (ms)	Max (ms)	Mean (ms)
5.000	787.480	190.379


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.660	1.670	400.000	0.000	1.663

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.660	1.670	1.663

Time of Channel Occupancy(2)

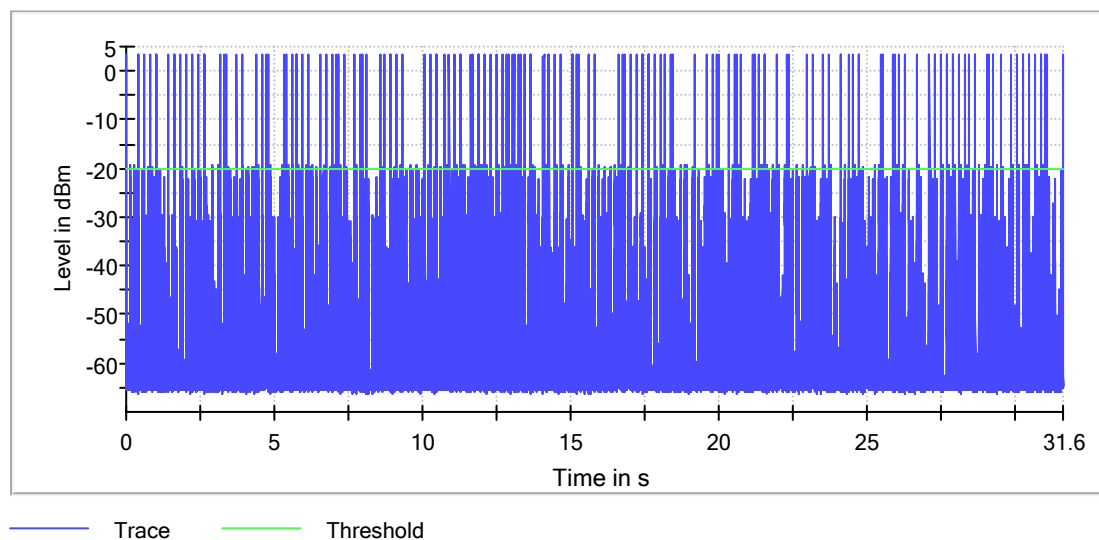

DH5

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	109	323.030	-20.0

Periode

Min (ms)	Max (ms)	Mean (ms)
11.250	1353.710	290.513


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.910	5.820	400.000	0.000	2.937

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.910	6.660	2.945

Time of Channel Occupancy(3)

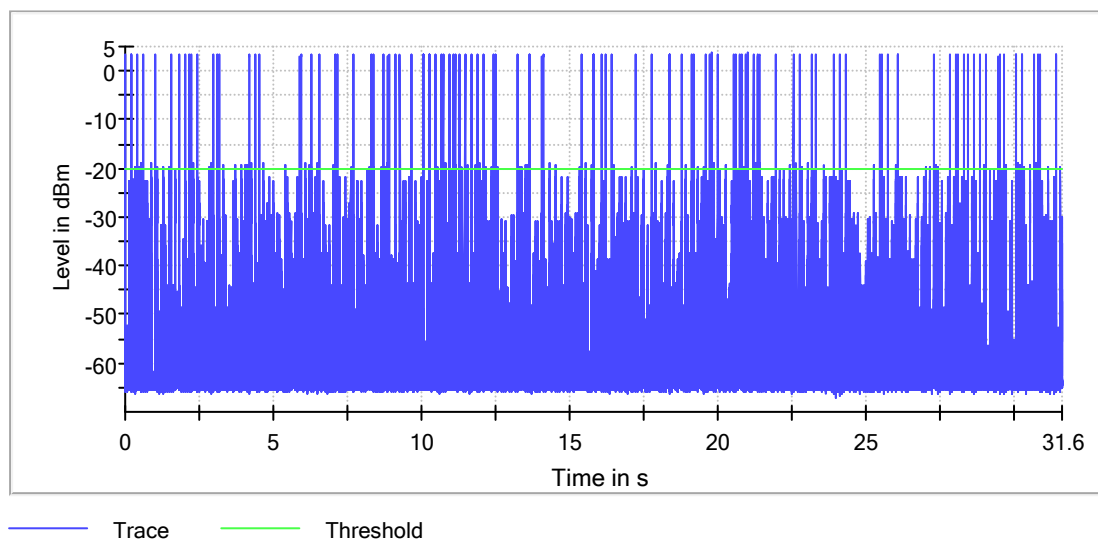

EDR-8DPSK

3DH1

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	319	127.170	-20.0

Periode

Min (ms)	Max (ms)	Mean (ms)
3.750	195.000	98.806


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.39	0.40	400.000	0.000	0.397

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.39	0.40	0.397

Time of Channel Occupancy

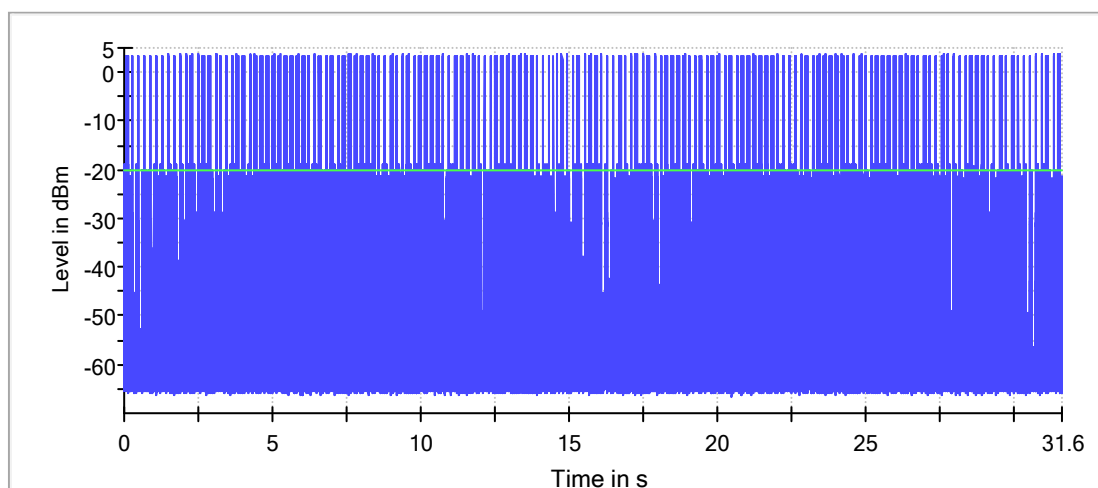

— Trace — Threshold

3DH3

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	154	255.710	-20.0

Periode

Min (ms)	Max (ms)	Mean (ms)
5.000	1137.470	204.292


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.640	1.660	400.000	0.000	1.650

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.640	1.660	1.650

Time of Channel Occupancy(2)

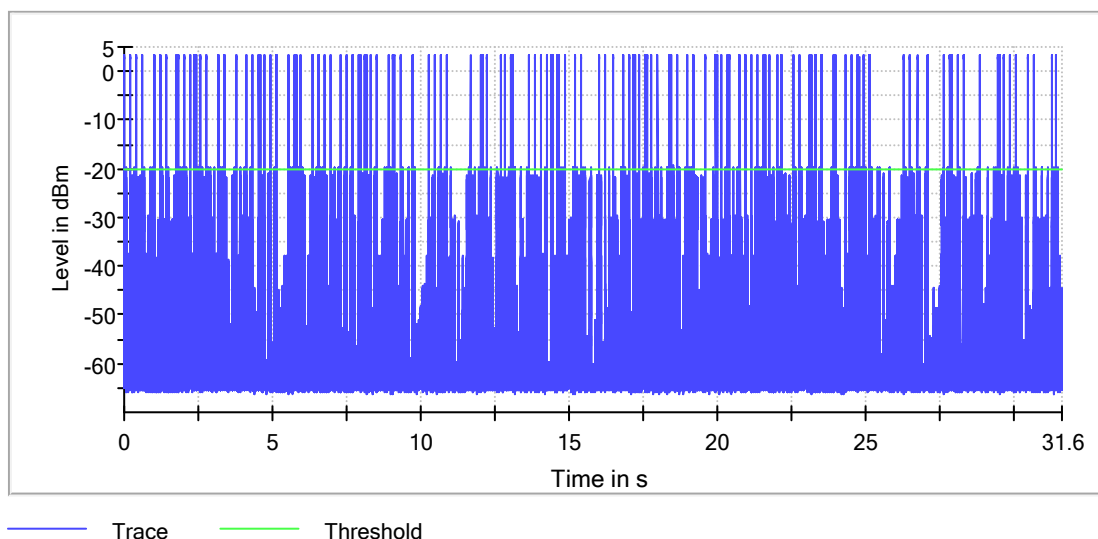

3DH5

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	108	318.780	-20.0

Periode

Min (ms)	Max (ms)	Mean (ms)
11.250	1353.710	291.581


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.890	5.800	400.000	0.000	2.925

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.890	6.650	2.933

Time of Channel Occupancy(3)

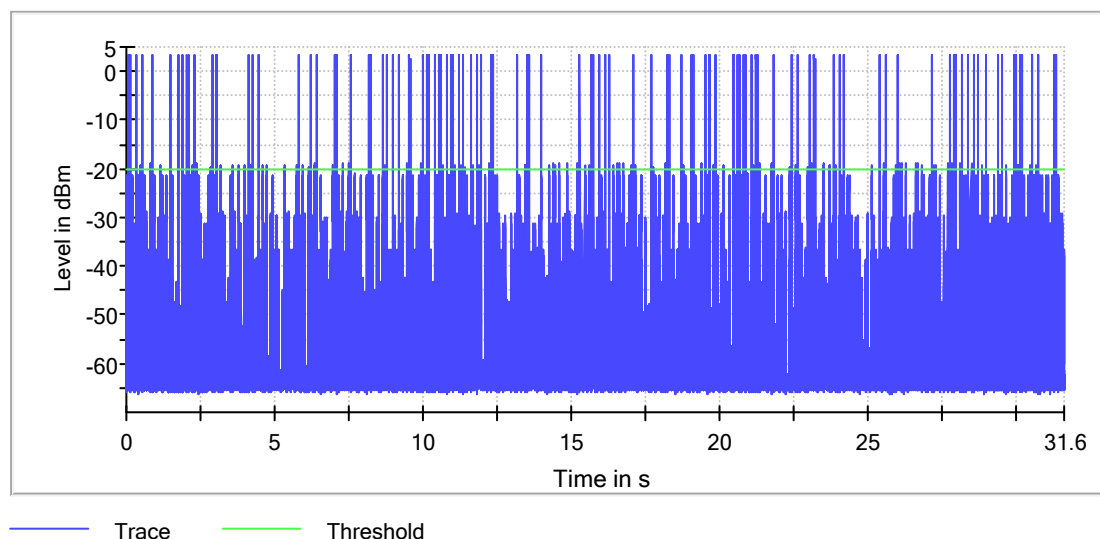


Appendix B.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


Conducted Spurious Emission

BDR-GFSK

Low Channel

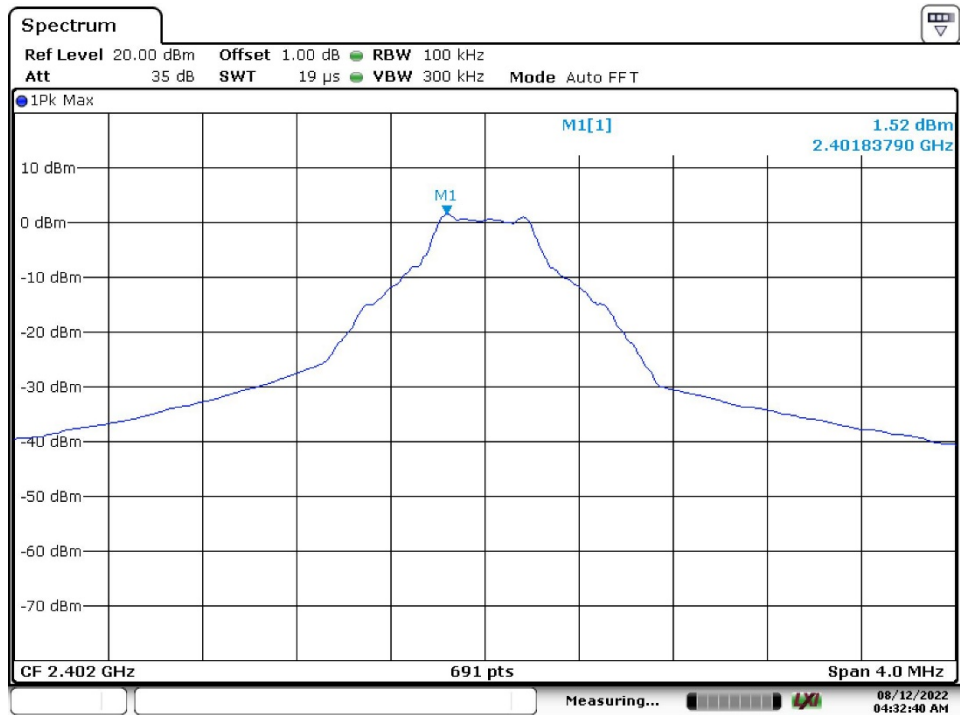

Date: 12.AUG.2022 04:32:40

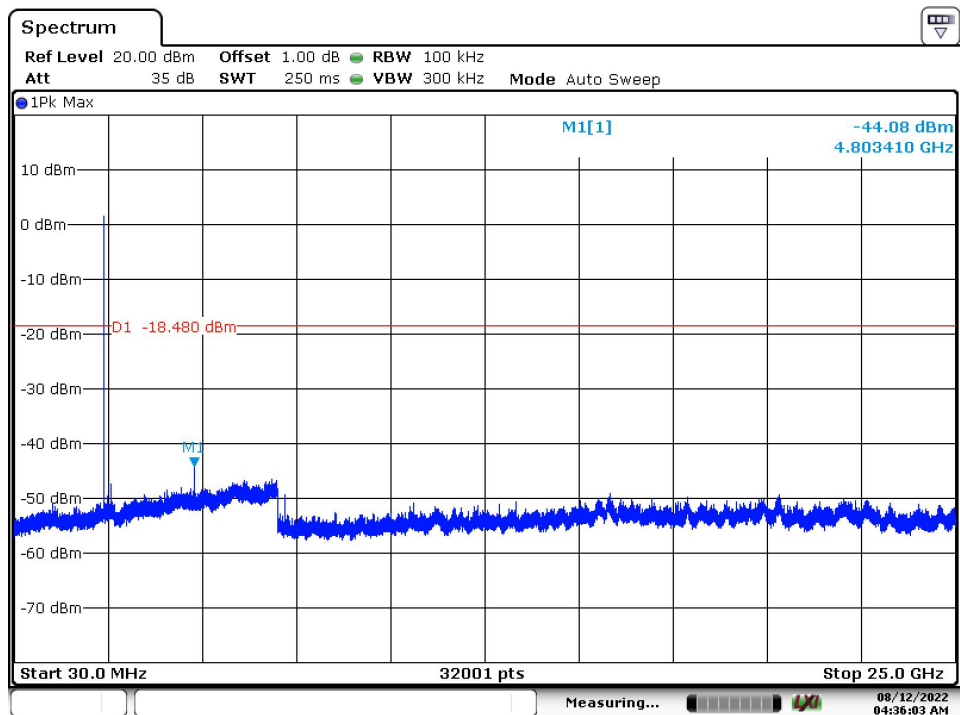


Date: 12.AUG.2022 04:36:04

Middle Channel




Date: 12.AUG.2022 04:38:23

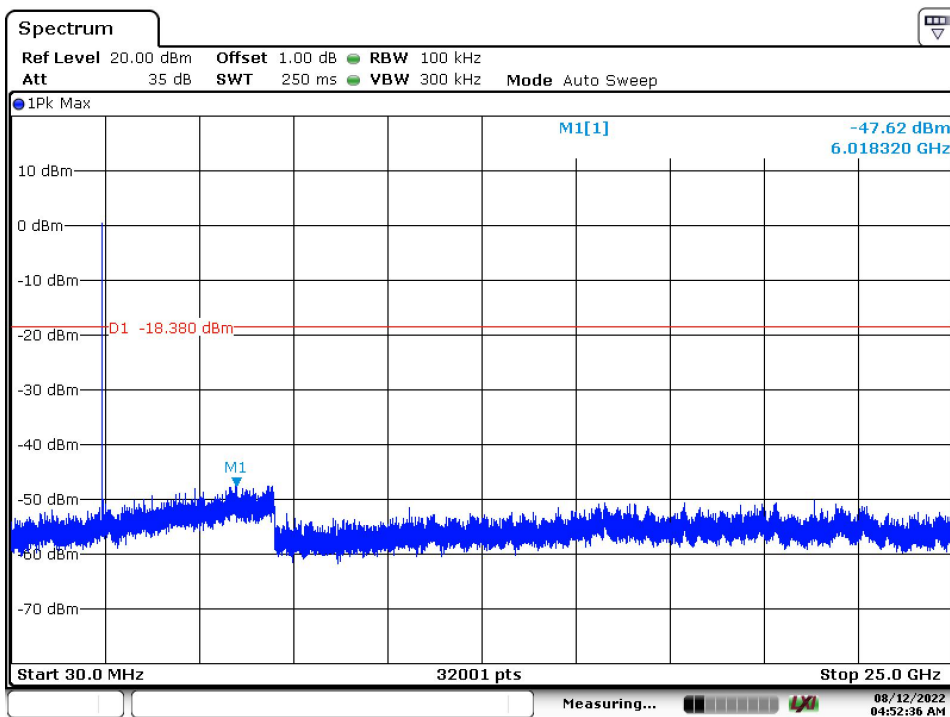


Date: 12.AUG.2022 04:52:37

High Channel

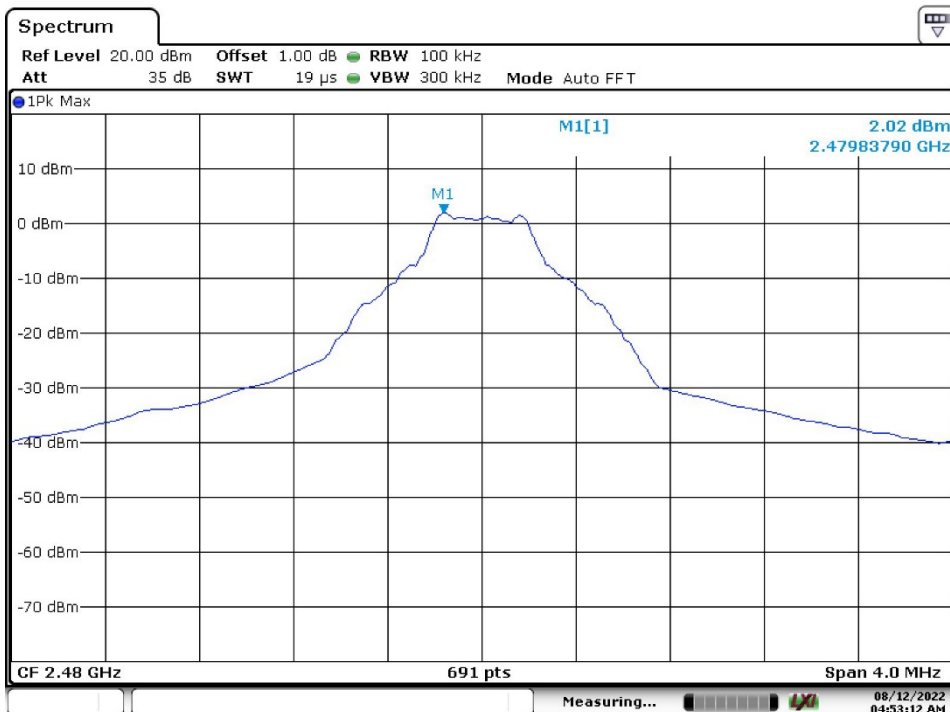


Date: 12.AUG.2022 04:53:13

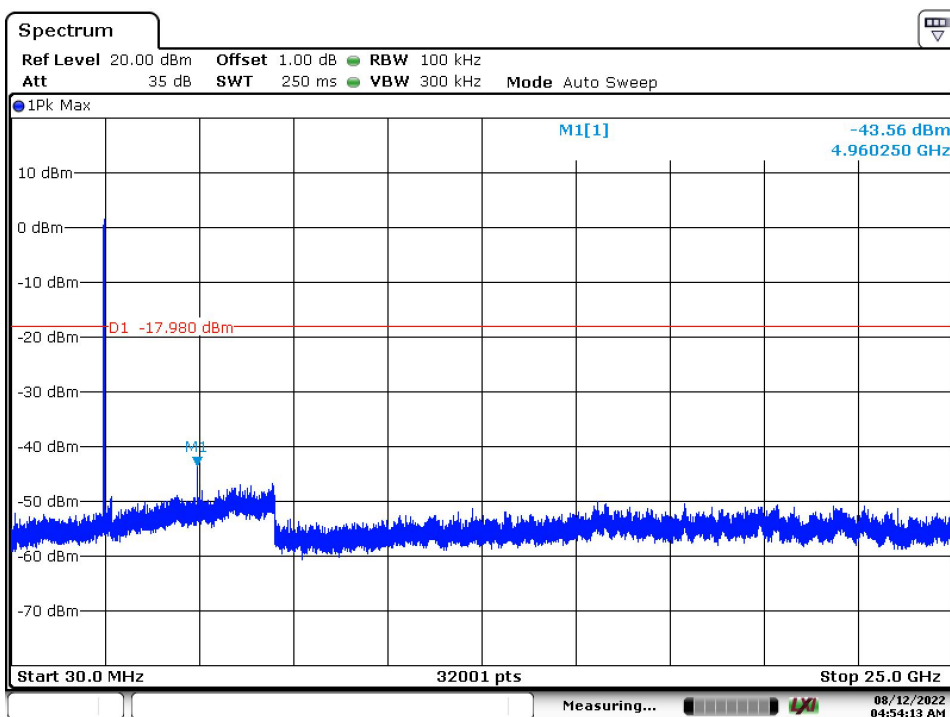


Date: 12.AUG.2022 04:54:14

Hopping

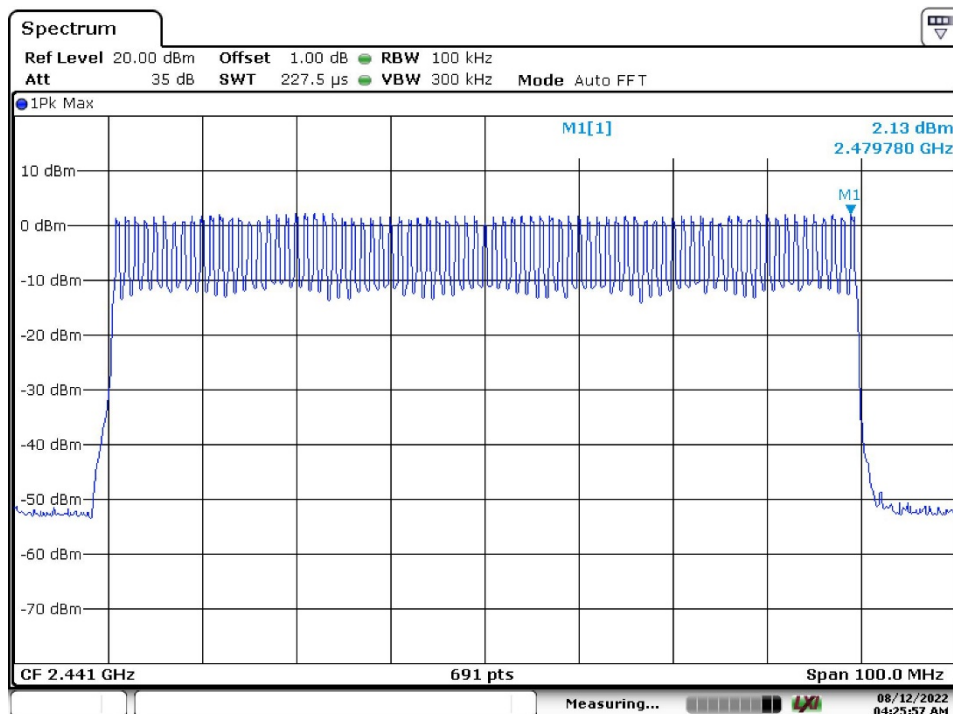


Date: 12.AUG.2022 04:25:57

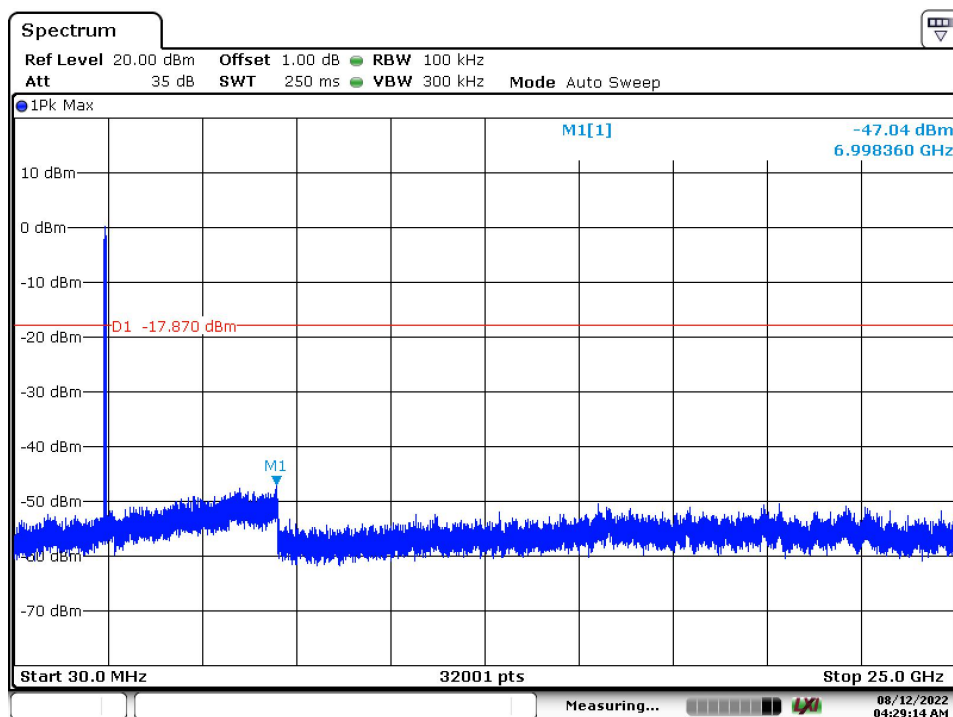


Date: 12.AUG.2022 04:29:15

EDR-8DPSK

Low Channel


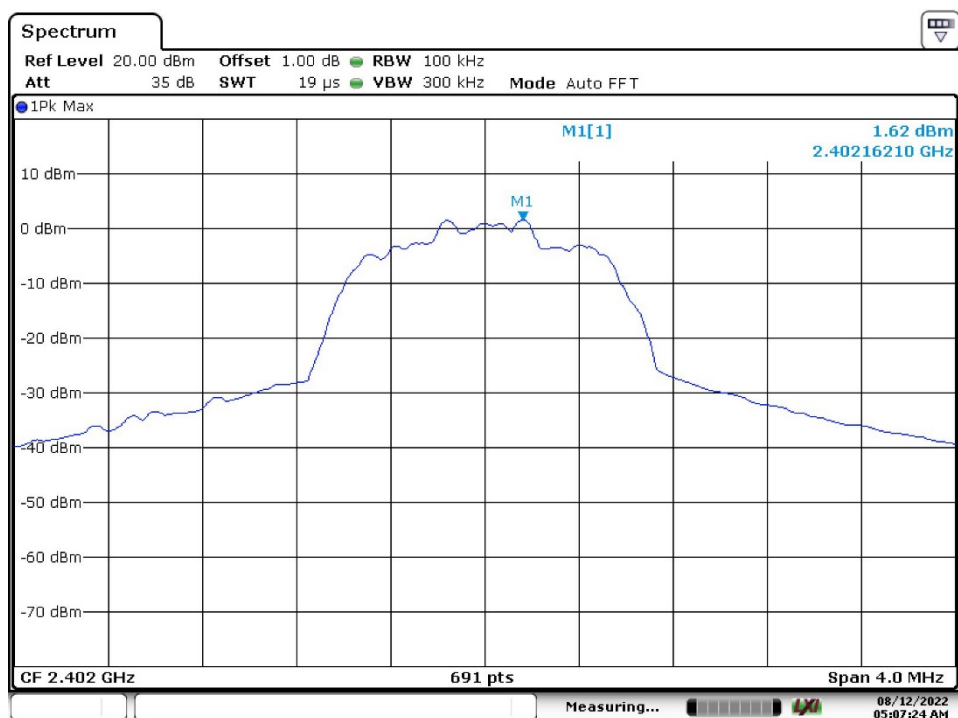


Date: 12.AUG.2022 05:07:25


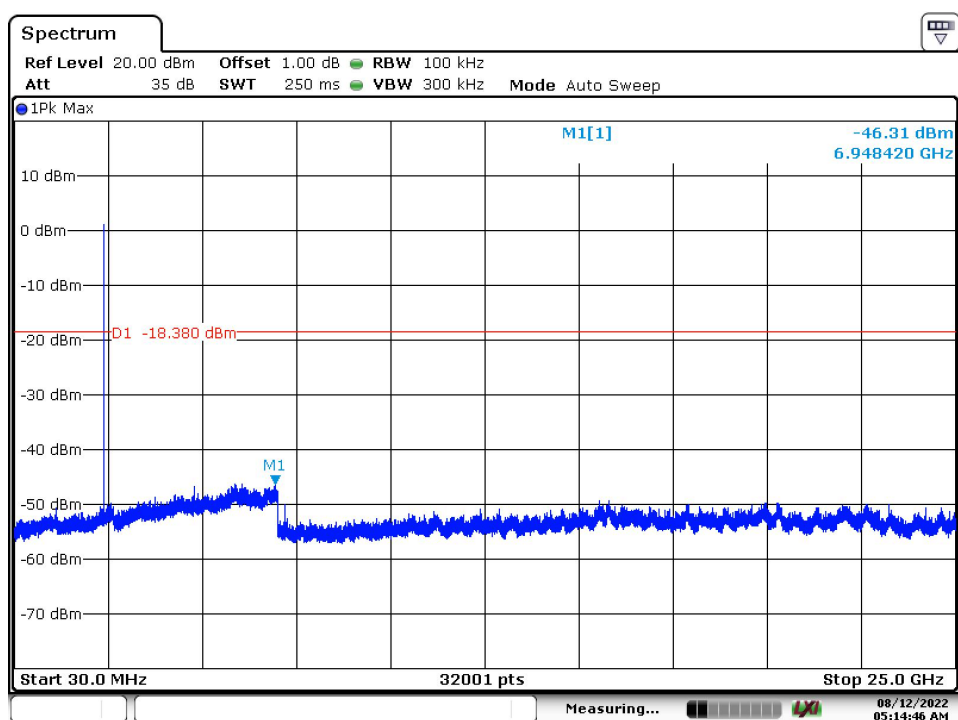


Date: 12.AUG.2022 05:14:46



Middle Channel

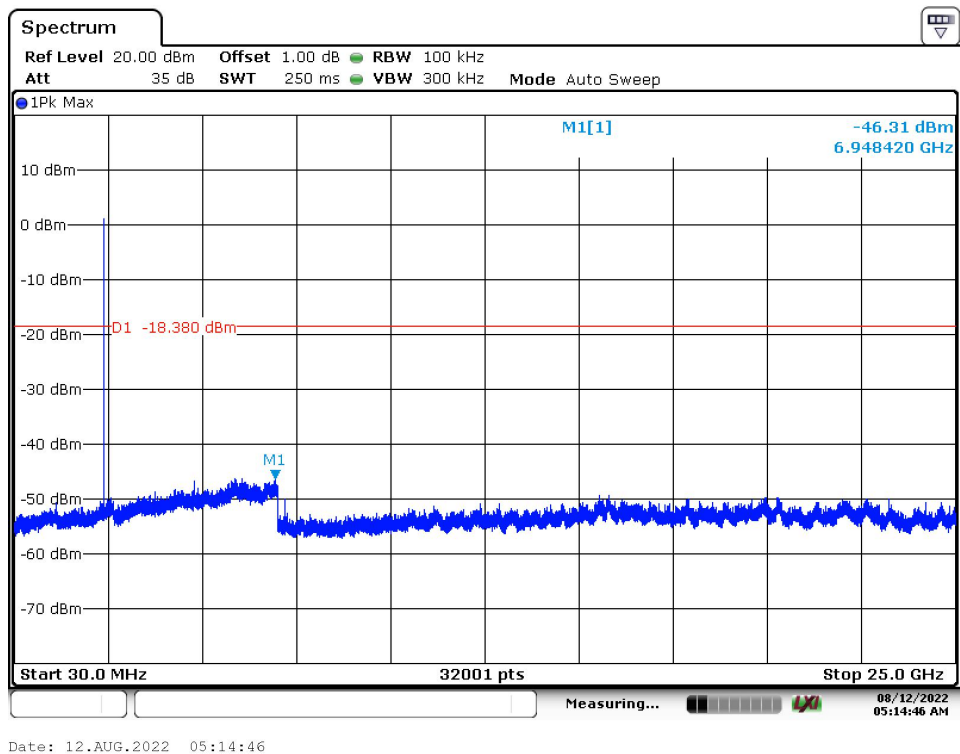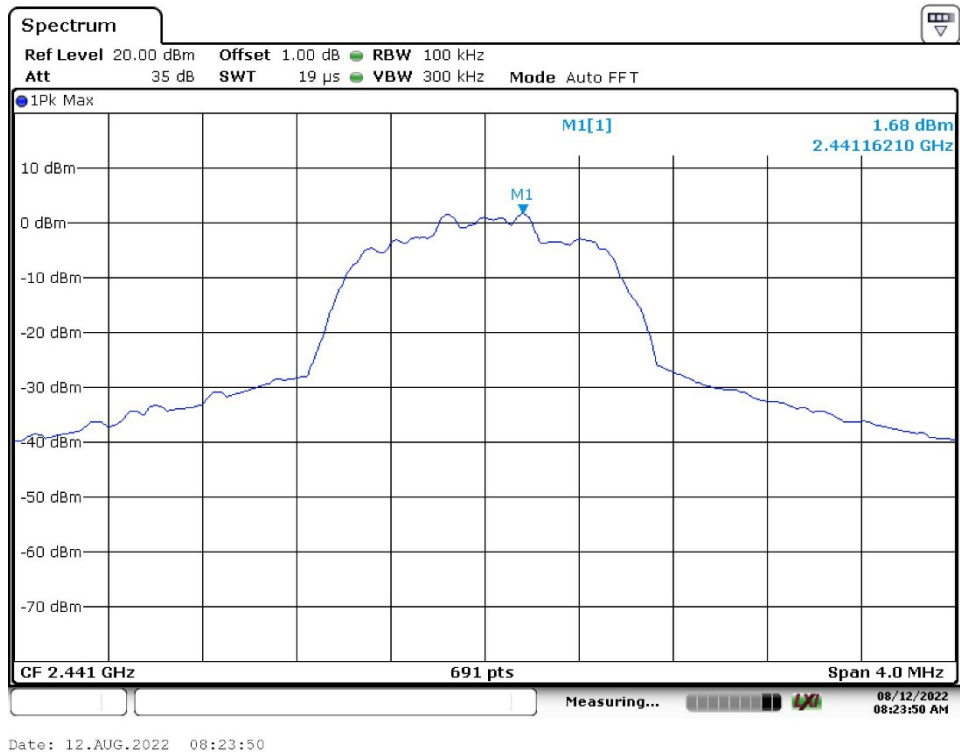

High Channel

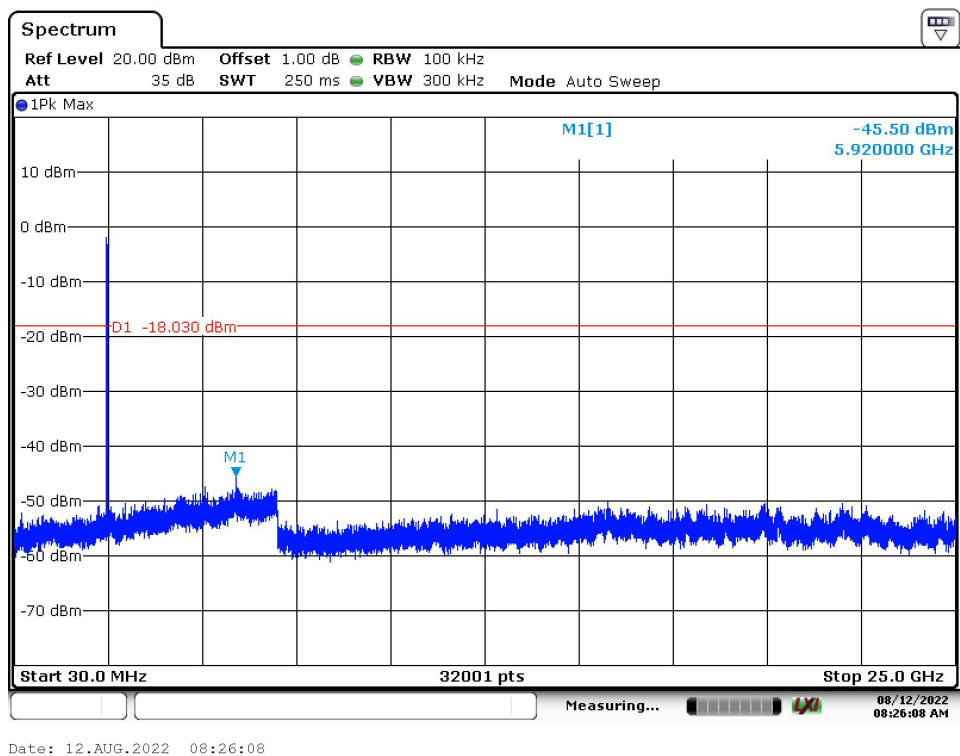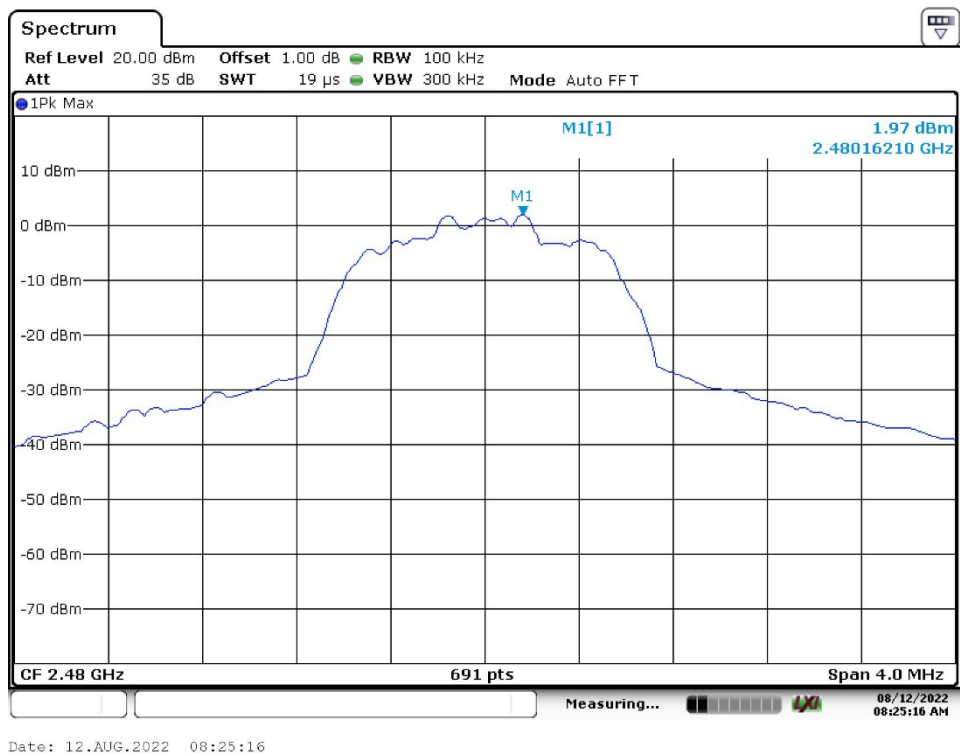


Hopping

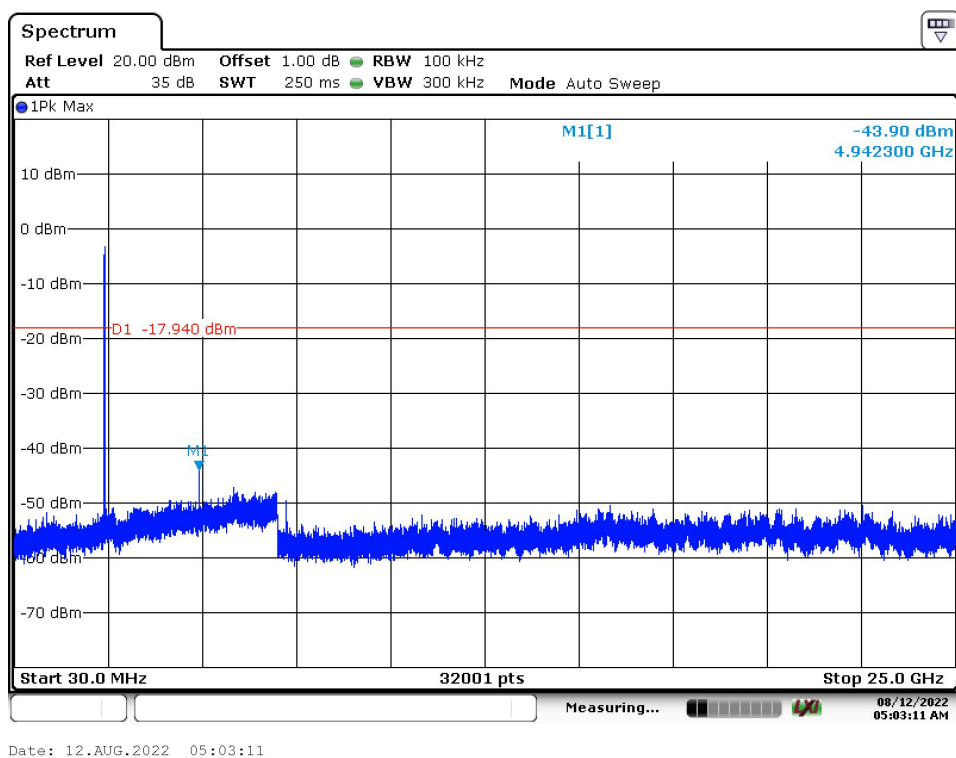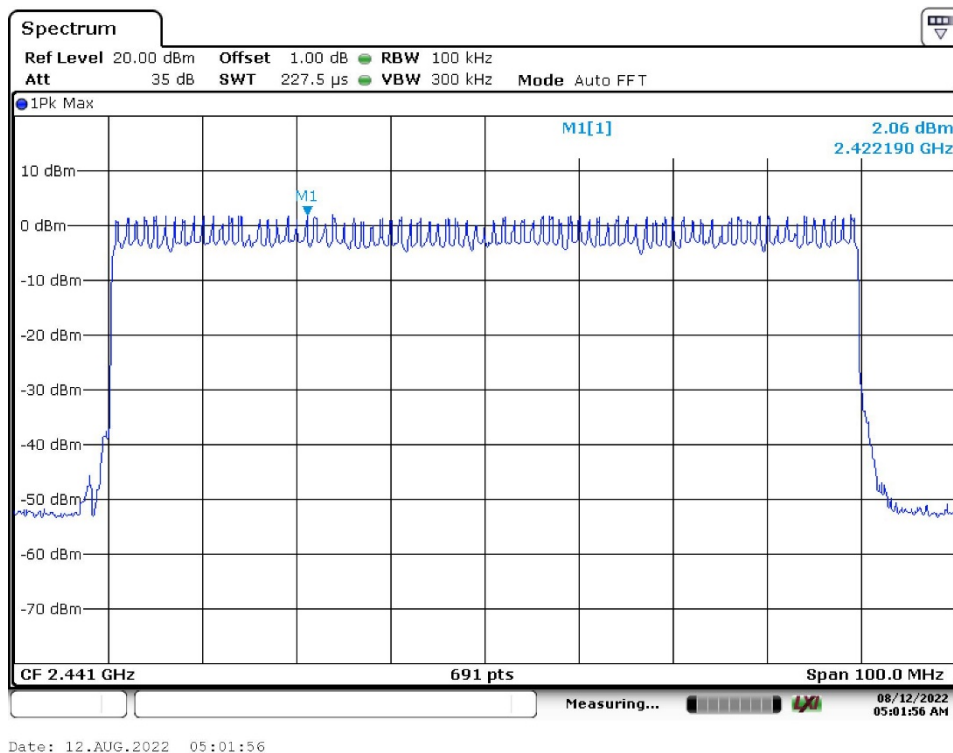


Band Edge

BDR-GFSK Low Channel

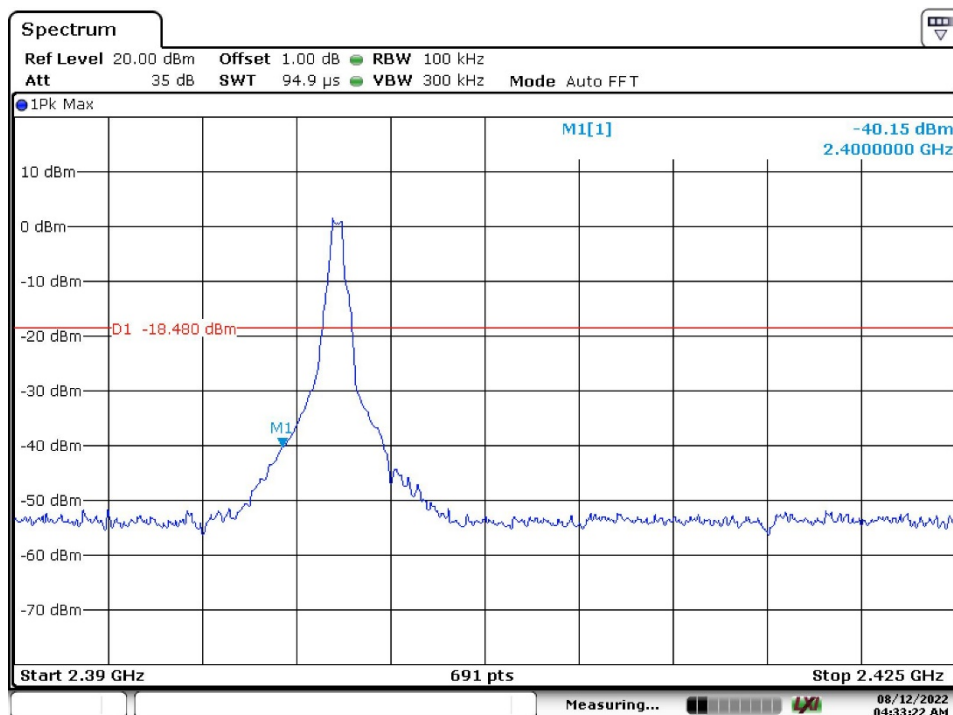


Date: 12.AUG.2022 04:33:23

High Channel

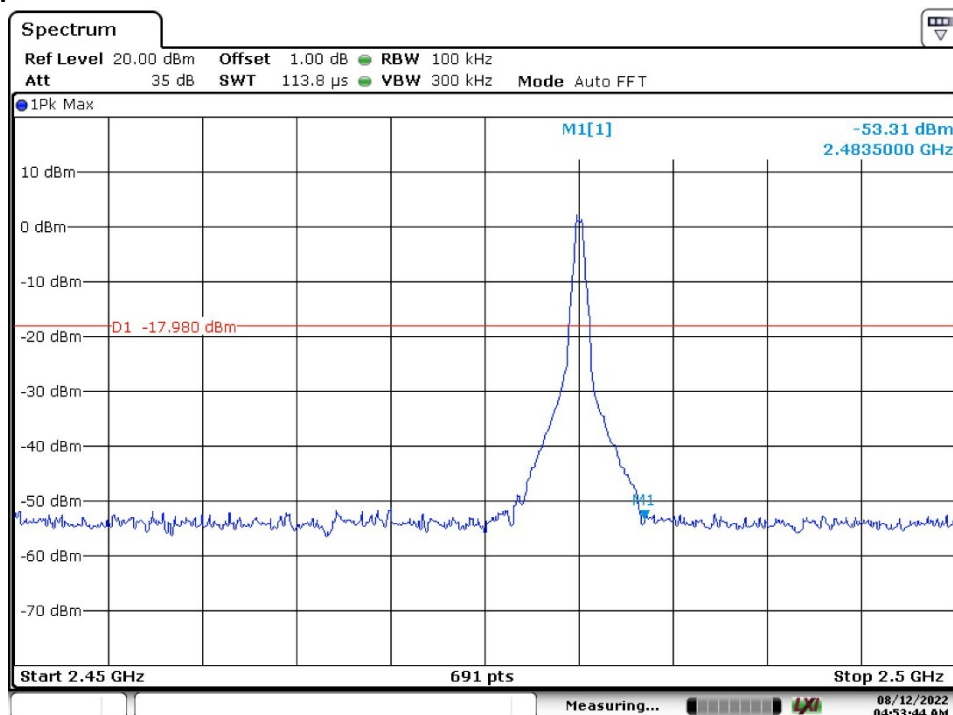


Date: 12.AUG.2022 04:53:45

Hopping

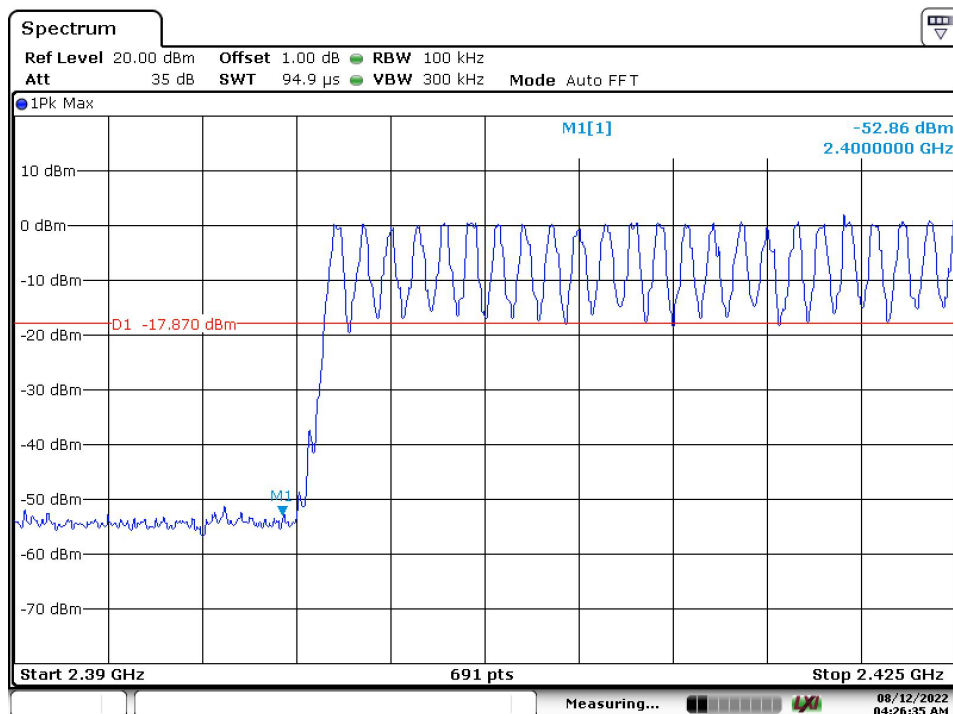


Date: 12.AUG.2022 04:26:36

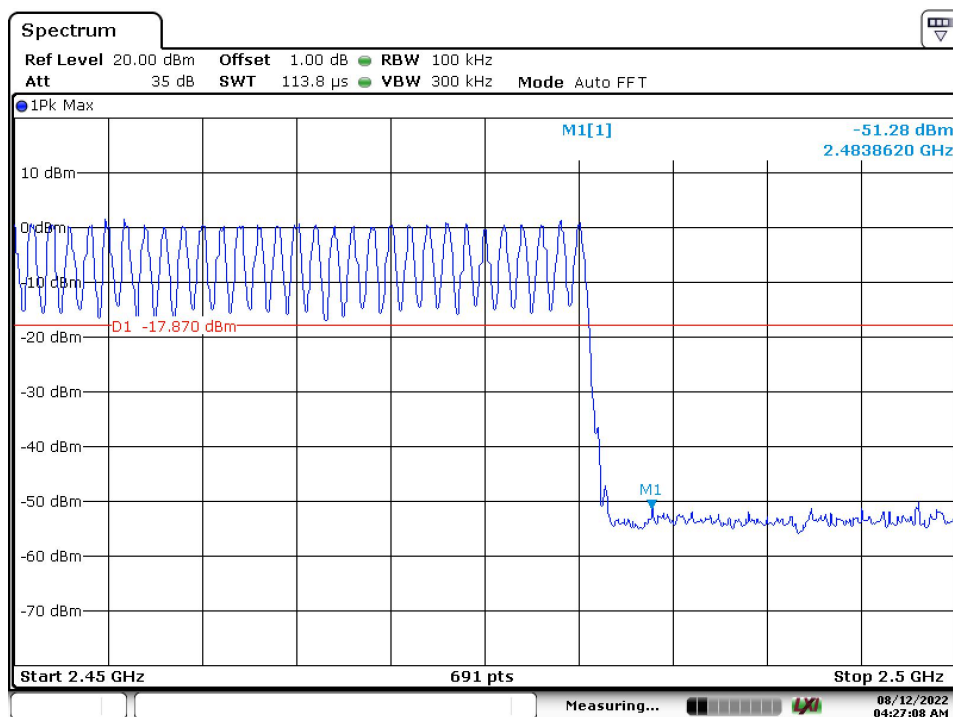

Date: 12.AUG.2022 04:27:09


EDR-8DPSK

Low Channel

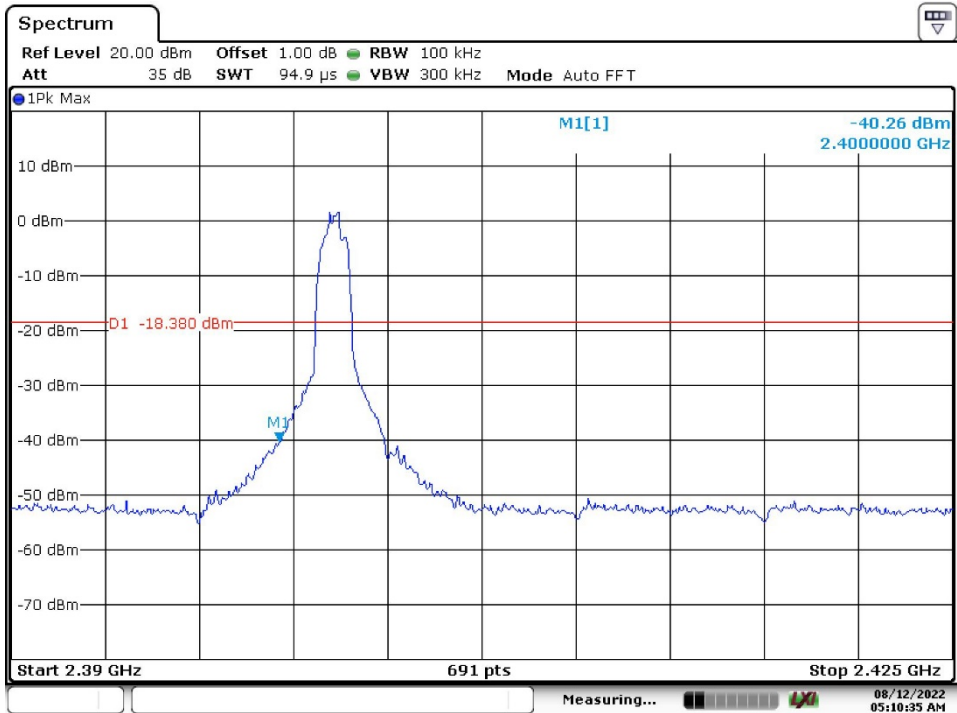



Date: 12.AUG.2022 05:10:35

High Channel

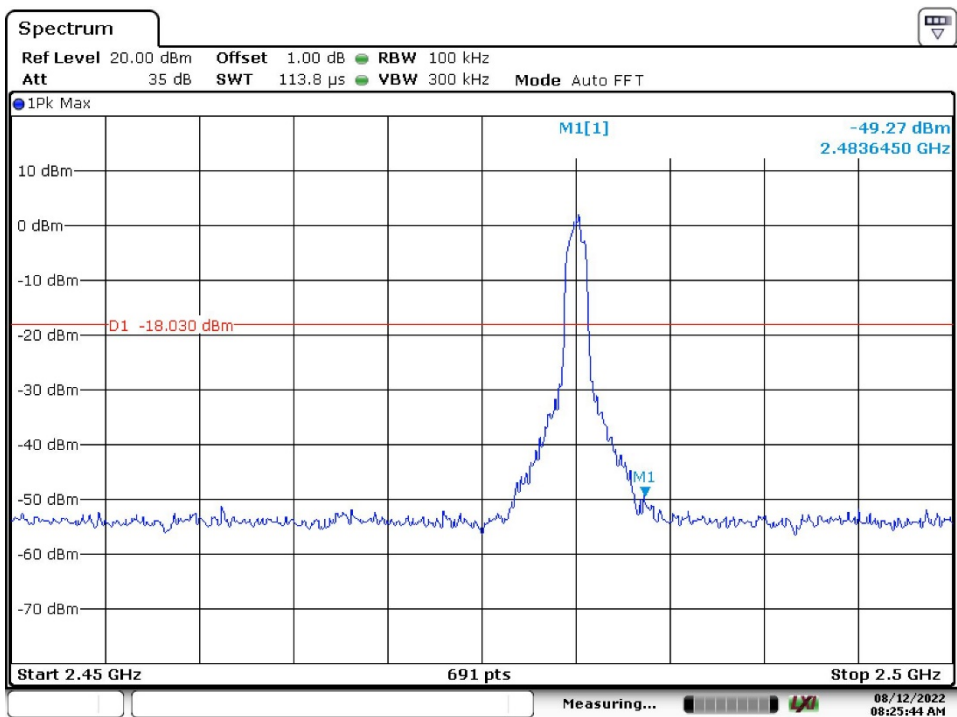

Date: 12.AUG.2022 08:25:44

Hopping

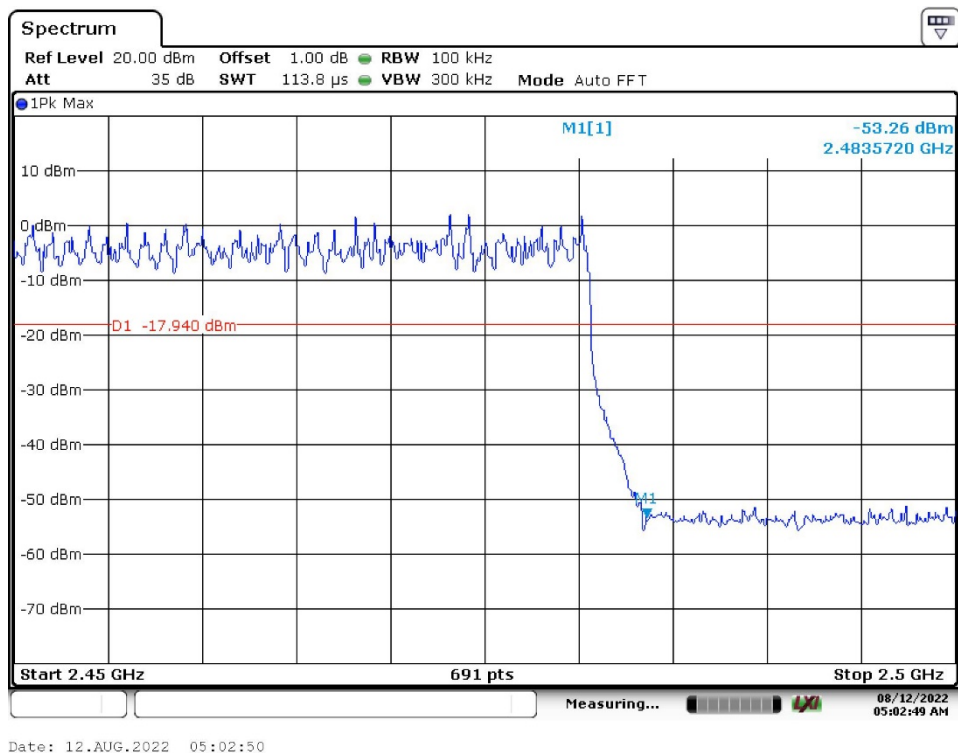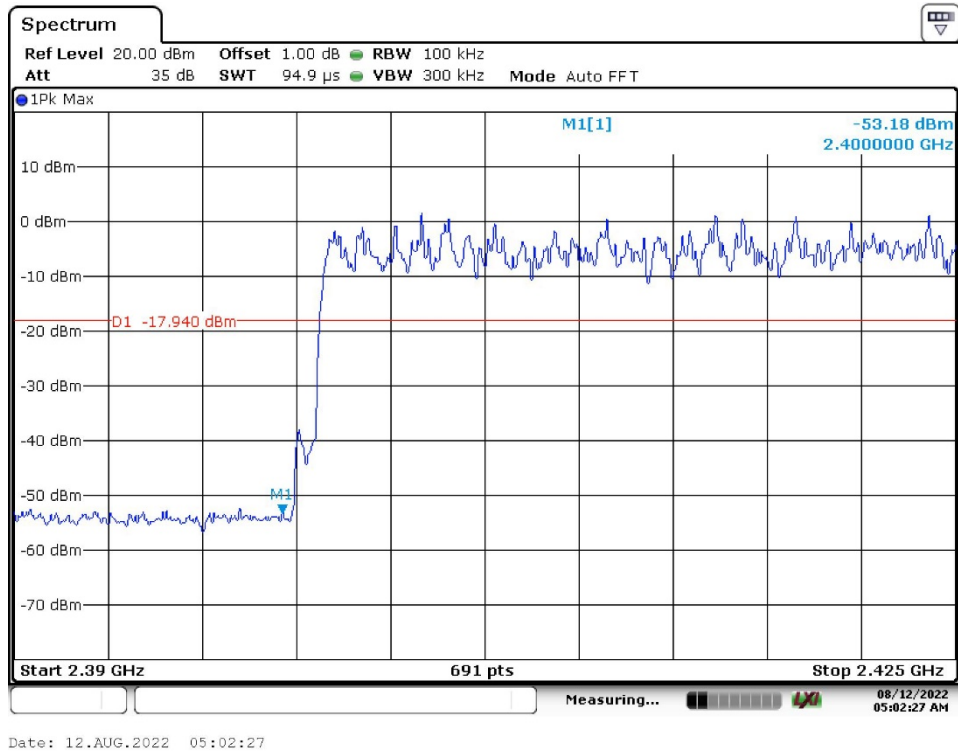


Appendix B.7: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case was presented in this report.

30MHz - 1GHz

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

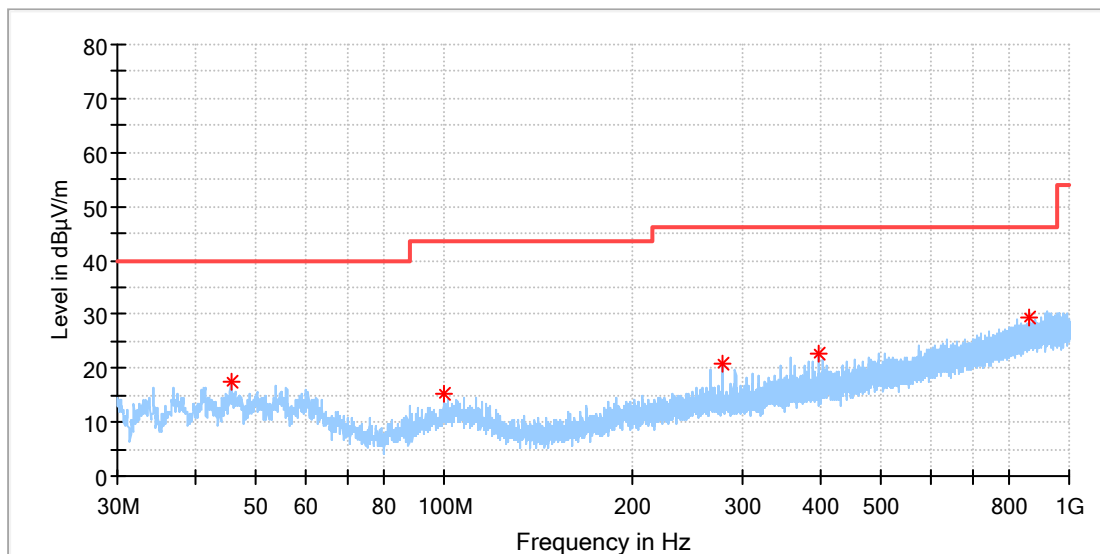


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.568500	17.47	40.00	22.53	100.0	H	87.0	-18.7
99.646000	15.44	43.50	28.06	100.0	H	94.0	-19.1
279.484000	20.94	46.00	25.06	100.0	H	143.0	-16.7
396.514500	22.74	46.00	23.26	100.0	H	313.0	-13.7
862.599500	29.57	46.00	16.43	100.0	H	116.0	-5.3

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

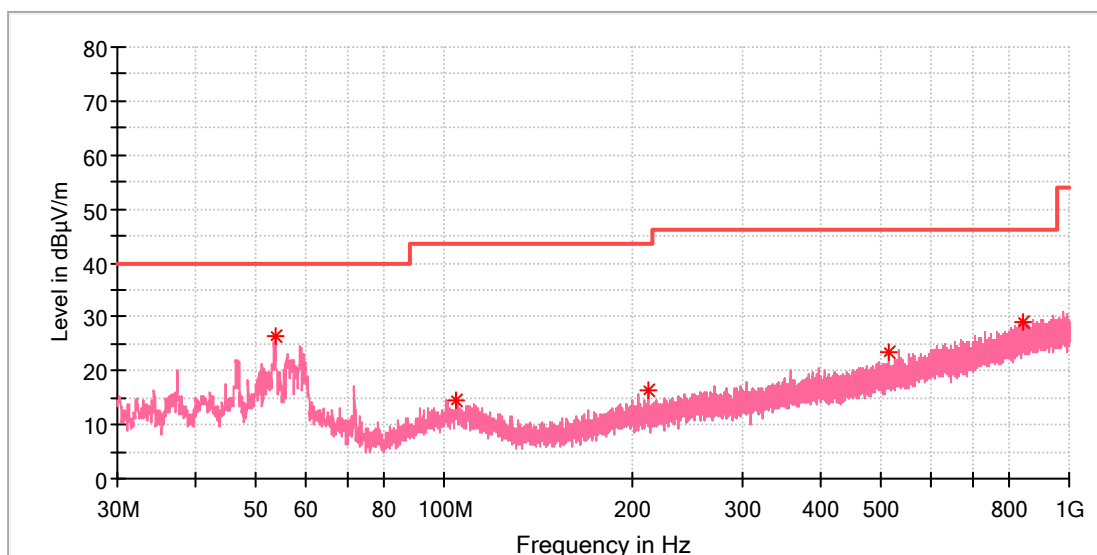

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.716500	26.27	40.00	13.73	100.0	V	103.0	-18.4
104.835500	14.53	43.50	28.97	100.0	V	310.0	-18.8
212.263000	16.34	43.50	27.16	100.0	V	97.0	-18.8
516.309500	23.32	46.00	22.68	100.0	V	89.0	-11.6
844.509000	29.18	46.00	16.82	100.0	V	6.0	-5.6

1GHz - 6.2GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

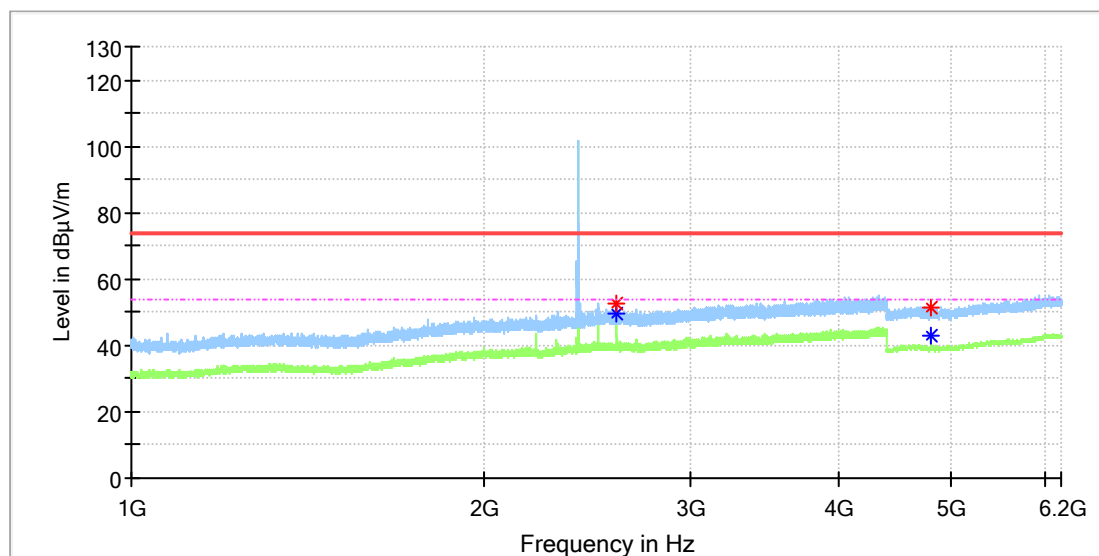


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2593.920000	---	49.56	54.00	4.44	100.0	H	176.0	7.4
2594.090000	52.65	---	74.00	21.35	100.0	H	176.0	7.4
4803.500000	51.46	---	74.00	22.54	100.0	H	245.0	11.8
4803.500000	---	43.13	54.00	10.87	100.0	H	245.0	11.8

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

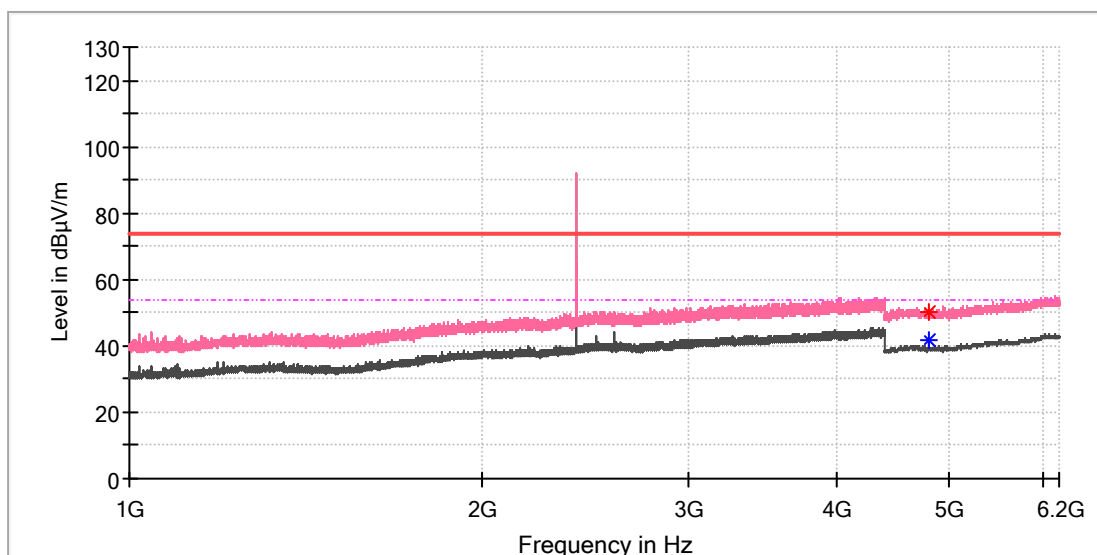


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	---	41.48	54.00	12.52	100.0	V	230.0	11.8
4806.000000	50.32	---	74.00	23.68	100.0	V	334.0	11.8

EUT Information

EUT Name: Portable Bluetooth Speaker
Model: CLIP4D
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168385386/A003313451-002
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

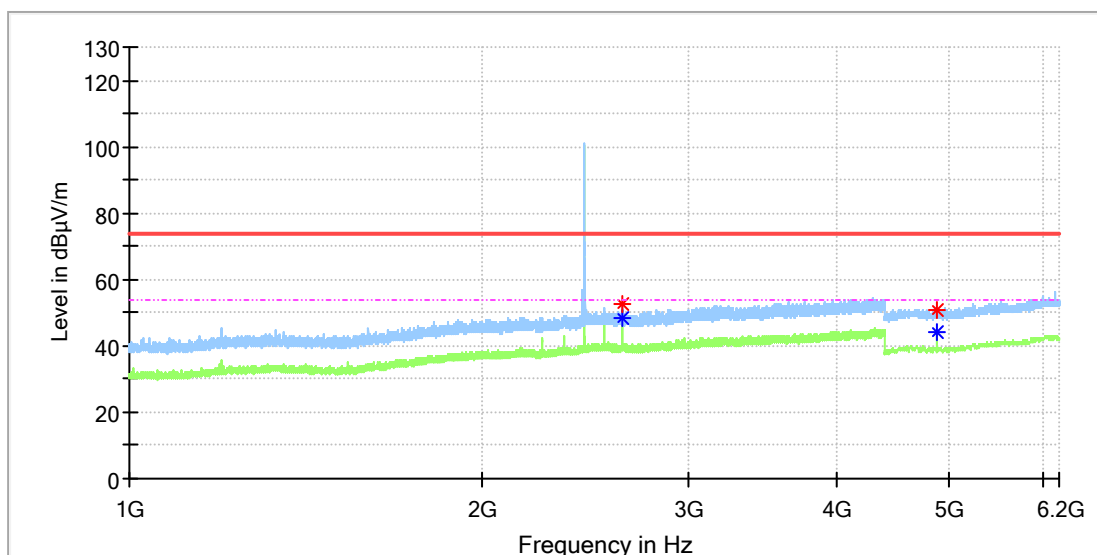


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2633.020000	---	48.08	54.00	5.92	100.0	H	170.0	7.5
2633.190000	52.78	---	74.00	21.22	100.0	H	180.0	7.5
4881.500000	50.88	---	74.00	23.12	100.0	H	164.0	11.8
4882.000000	---	43.89	54.00	10.11	100.0	H	171.0	11.8

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

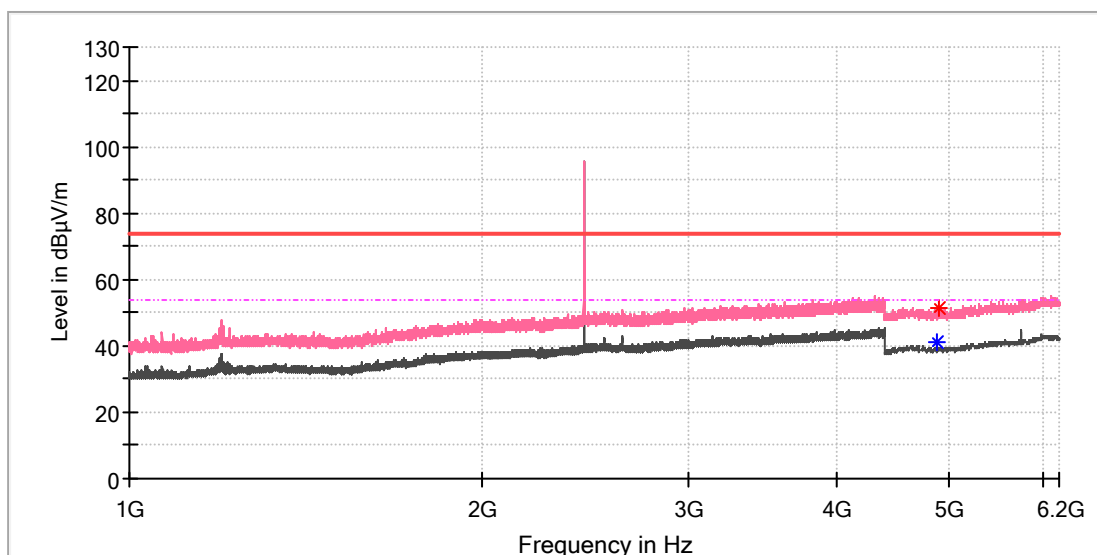


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	---	41.14	54.00	12.86	100.0	V	234.0	11.8
4893.000000	51.24	---	74.00	22.76	100.0	V	277.0	11.8

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_High channel
Order No./Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

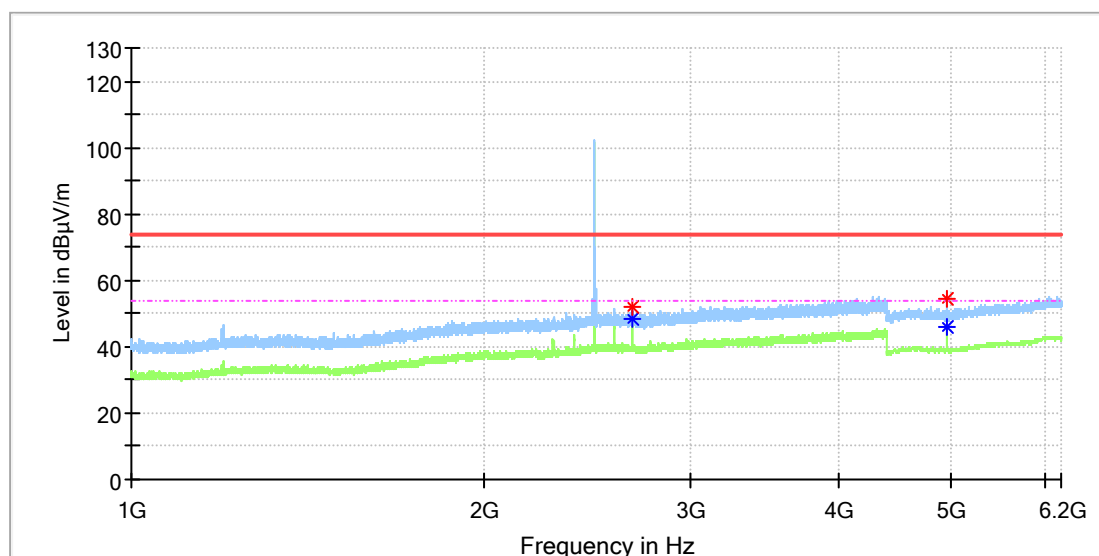


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2671.950000	51.93	---	74.00	22.07	100.0	H	182.0	7.5
2672.120000	---	48.08	54.00	5.92	100.0	H	171.0	7.5
4959.500000	54.14	---	74.00	19.86	100.0	H	161.0	11.8
4959.500000	---	46.19	54.00	7.81	100.0	H	161.0	11.8

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

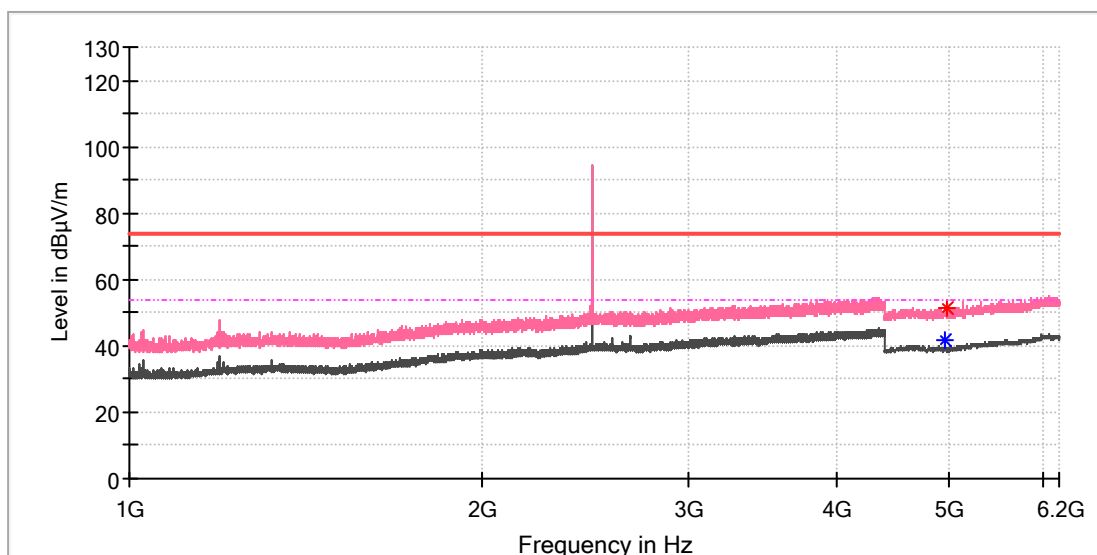

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	---	41.63	54.00	12.37	100.0	V	314.0	11.8
4979.500000	51.20	---	74.00	22.80	100.0	V	227.0	11.8

6.2GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

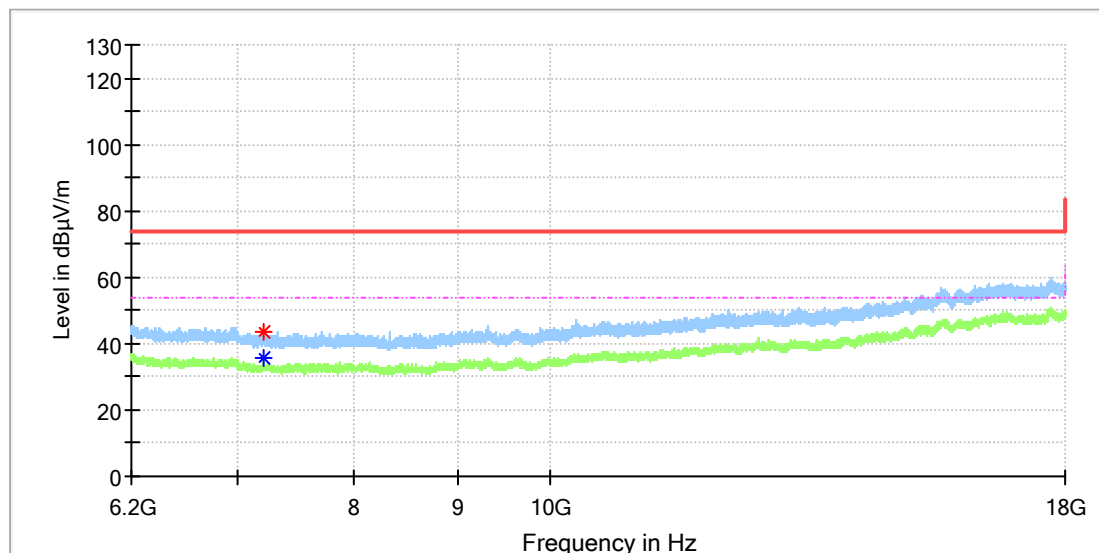


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	35.77	54.00	18.23	100.0	H	329.0	8.8
7205.950000	43.67	---	74.00	30.33	100.0	H	241.0	8.8

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

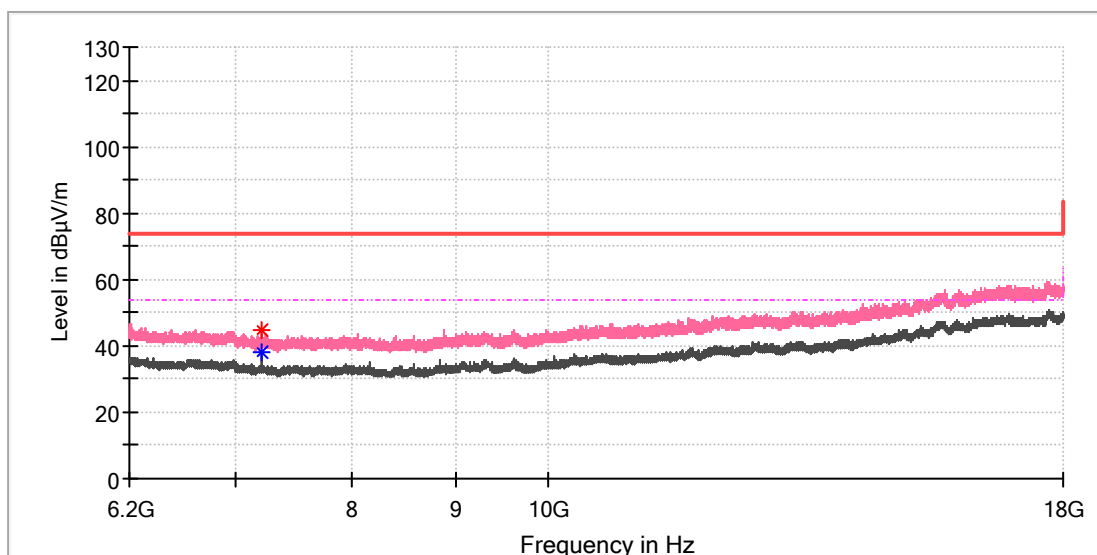


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	44.67	---	74.00	29.33	100.0	V	359.0	8.8
7205.950000	---	38.03	54.00	15.97	100.0	V	359.0	8.8

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

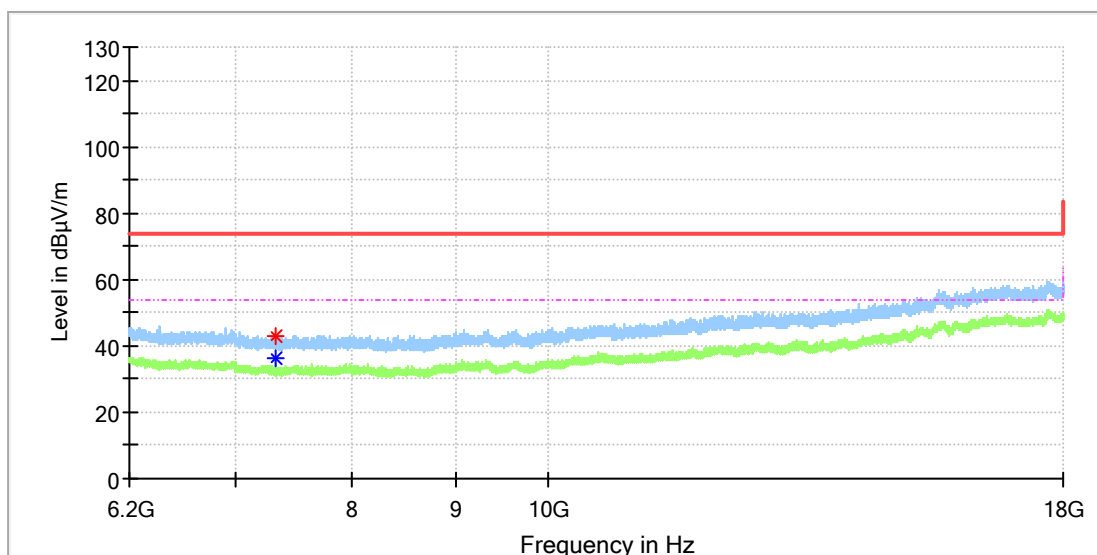


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.475000	---	36.30	54.00	17.70	100.0	H	301.0	8.2
7322.966667	42.74	---	74.00	31.26	100.0	H	301.0	8.2

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

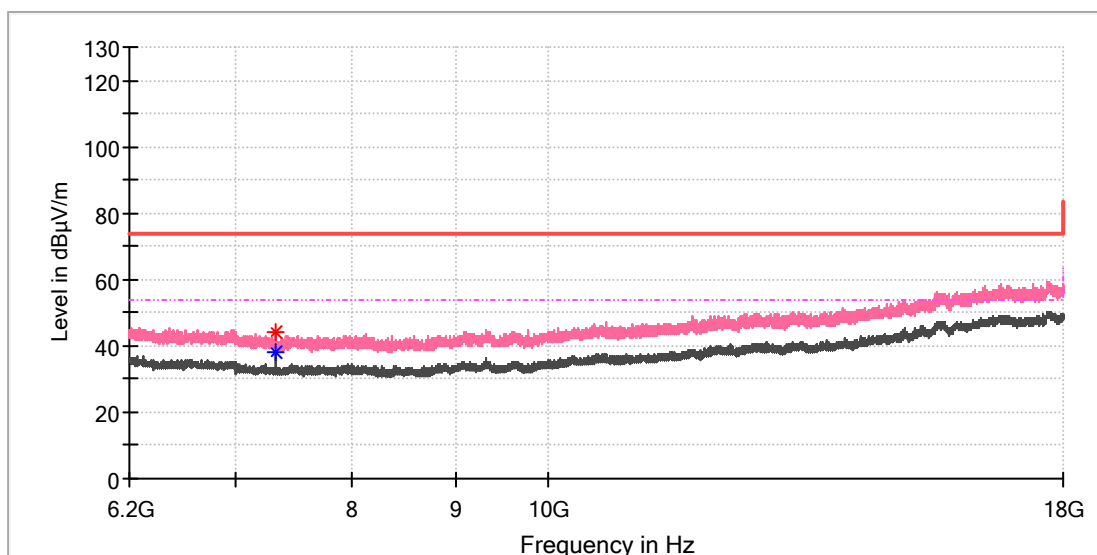


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.475000	44.16	---	74.00	29.84	100.0	V	33.0	8.2
7323.458333	---	38.34	54.00	15.66	100.0	V	201.0	8.2

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

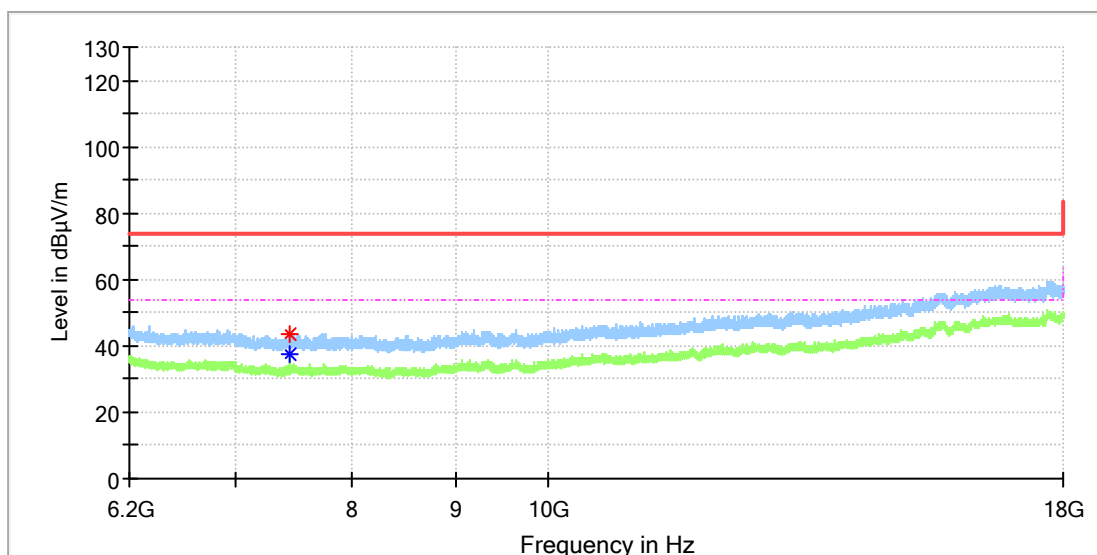


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	43.32	---	74.00	30.68	100.0	H	303.0	8.4
7439.983333	---	37.51	54.00	16.49	100.0	H	303.0	8.4

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

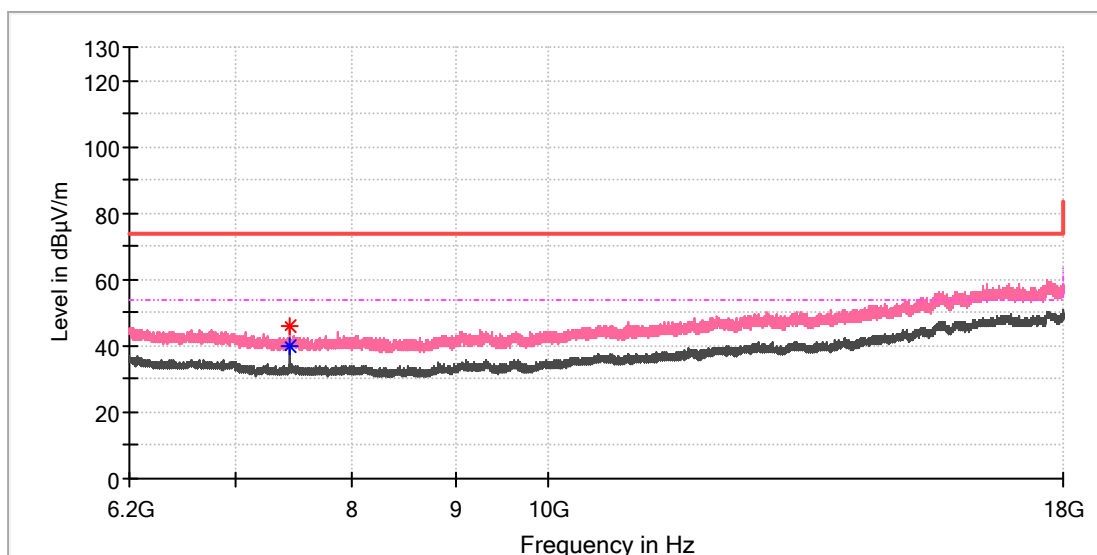


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	---	39.75	54.00	14.25	100.0	V	253.0	8.4
7440.475000	45.73	---	74.00	28.27	100.0	V	218.0	8.4

Appendix B.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

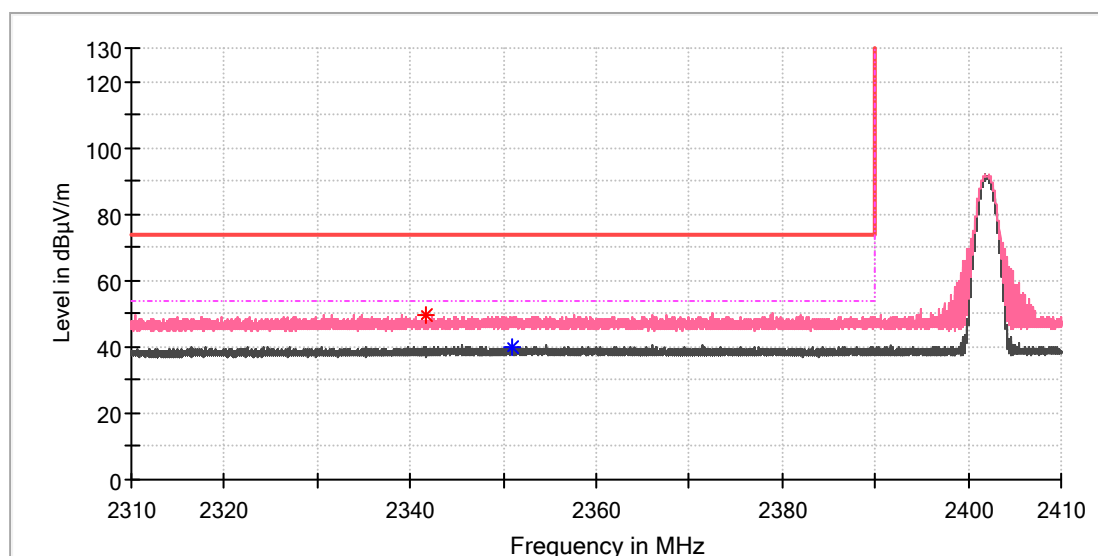


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2341.600000	49.45	---	74.00	24.55	100.0	V	107.0	6.8
2350.915000	---	39.96	54.00	14.04	100.0	V	308.0	6.9

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

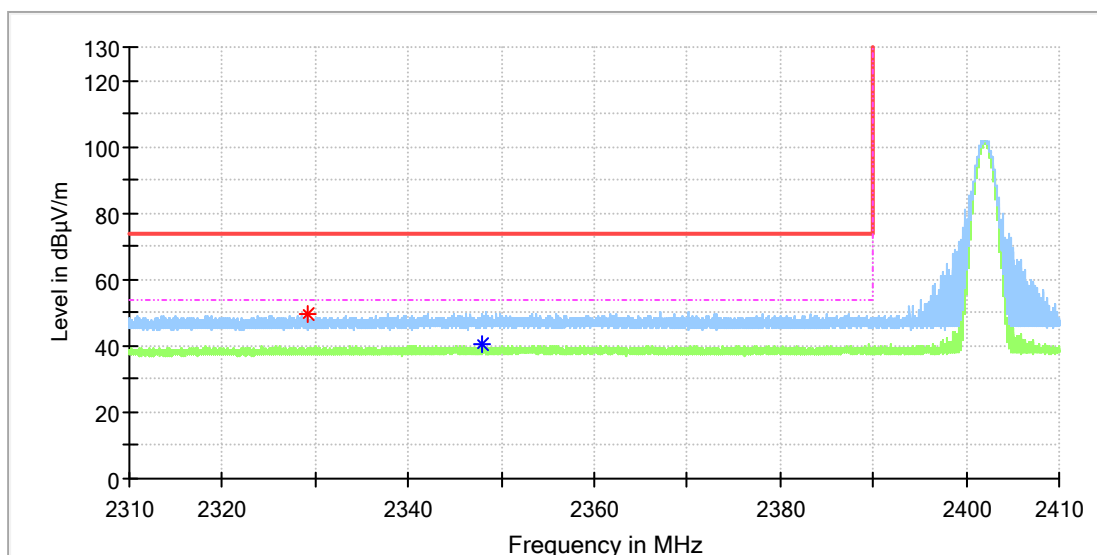


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2329.120000	49.41	---	74.00	24.59	100.0	H	0.0	6.7
2347.830000	---	40.33	54.00	13.67	100.0	H	0.0	6.9

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

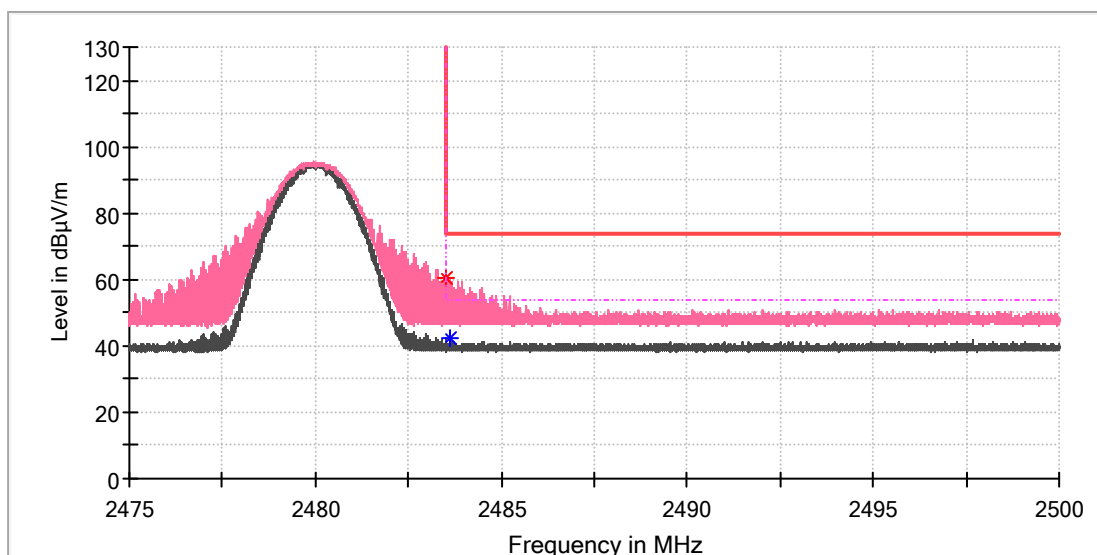


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.533750	60.63	---	74.00	13.37	100.0	V	4.0	7.4
2483.608750	---	42.19	54.00	11.81	100.0	V	190.0	7.4

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168385386/A003313451-002
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

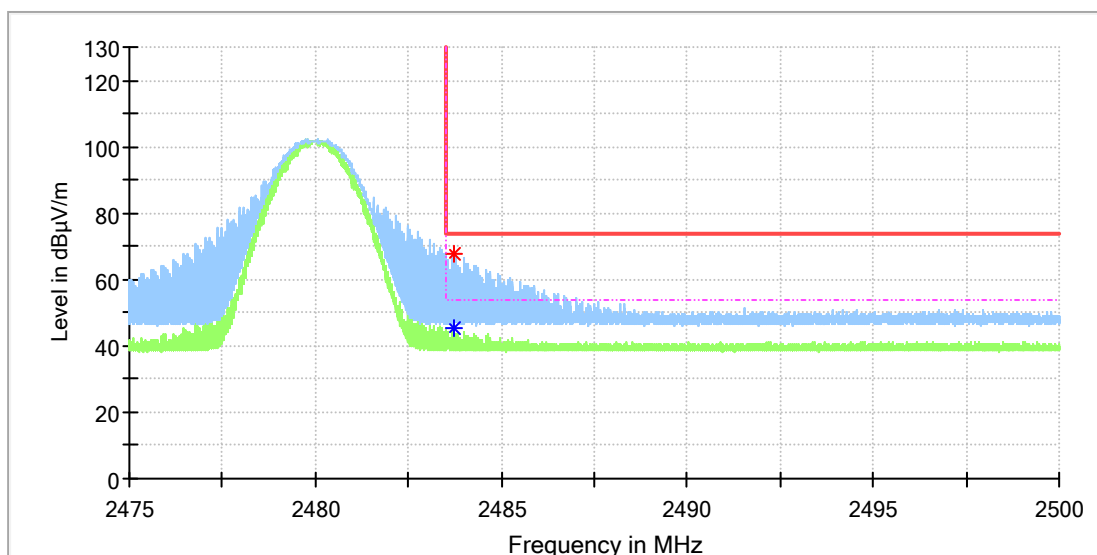


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.706250	---	45.25	54.00	8.75	100.0	H	179.0	7.4
2483.706250	68.02	---	74.00	5.98	100.0	H	179.0	7.4

Appendix B.9: Test Results of Conducted Emission

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	Charging +BT playing
Test Voltage:	AC 120V/60Hz
Test By/Review By:	Guangshen cen/Gary Chen
Test Standard:	FCC Part15
Tem./Hum./Pressure:	24.9°C/55.7%/101kPa
Remark:	SR1

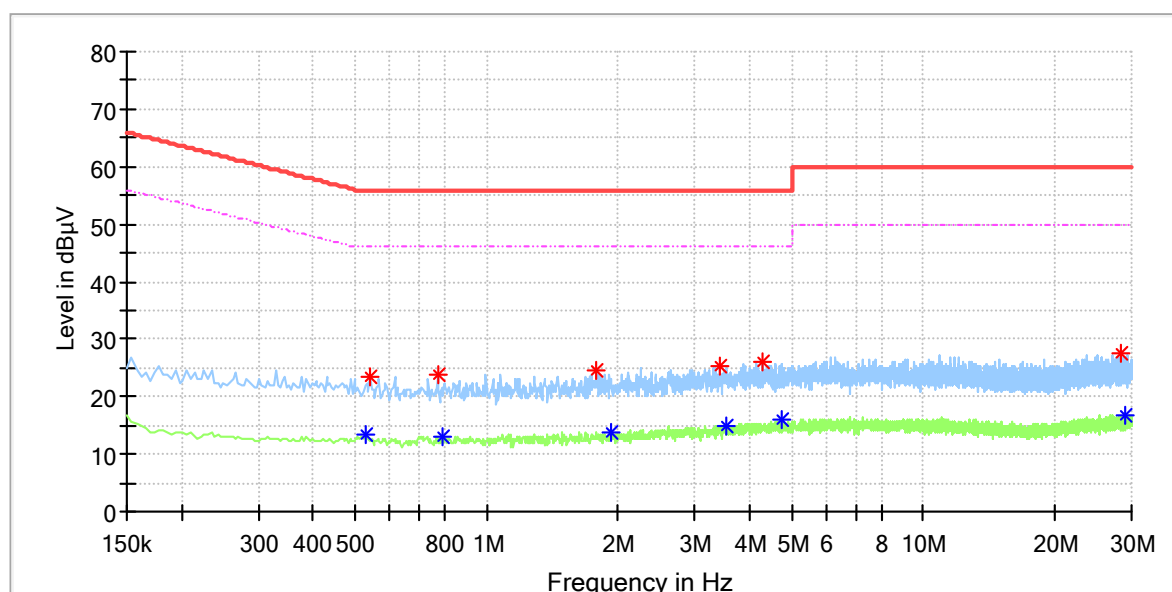


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.528000	---	13.28	46.00	32.72	L1	9.7
0.540000	23.49	---	56.00	32.51	L1	9.7
0.772000	23.97	---	56.00	32.03	L1	9.7
0.792000	---	12.89	46.00	33.11	L1	9.7
1.776000	24.56	---	56.00	31.44	L1	9.8
1.936000	---	13.87	46.00	32.13	L1	9.8
3.420000	25.17	---	56.00	30.83	L1	9.9
3.548000	---	15.05	46.00	30.95	L1	9.9
4.288000	26.09	---	56.00	29.91	L1	9.9
4.760000	---	15.84	46.00	30.16	L1	10.0
28.512000	27.36	---	60.00	32.64	L1	10.4
29.096000	---	16.88	50.00	33.12	L1	10.4

EUT Information

EUT Name:	Portable Bluetooth Speaker
Model:	CLIP4D
Test Mode:	Charging +BT playing
Test Voltage:	AC 120V/60Hz
Test By/Review By:	Guangshen cen/Gary Chen
Test Standard:	FCC Part15
Tem./Hum./Pressure:	24.9°C/55.7%/101kPa
Remark:	SR1

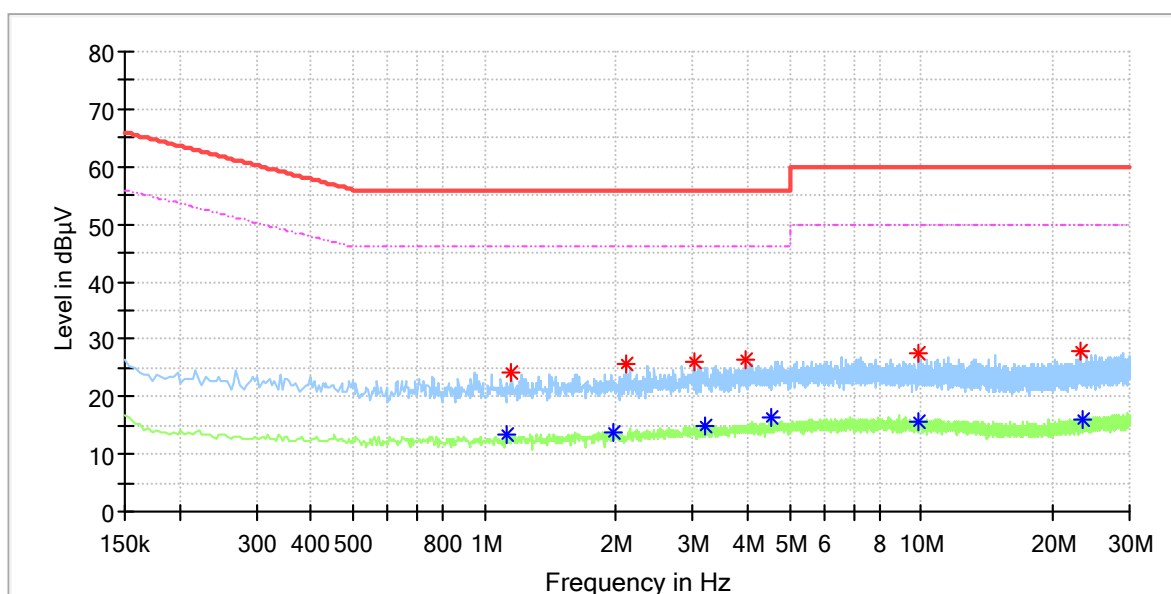

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
1.124000	---	13.26	46.00	32.74	N	9.7
1.152000	24.35	---	56.00	31.65	N	9.7
1.980000	---	13.84	46.00	32.16	N	9.7
2.104000	25.59	---	56.00	30.41	N	9.8
3.008000	25.99	---	56.00	30.01	N	9.9
3.212000	---	15.06	46.00	30.94	N	9.9
3.956000	26.25	---	56.00	29.75	N	9.9
4.556000	---	16.22	46.00	29.78	N	10.0
9.800000	---	15.58	50.00	34.42	N	10.0
9.832000	27.68	---	60.00	32.32	N	10.0
23.088000	27.91	---	60.00	32.09	N	10.5
23.404000	---	16.11	50.00	33.89	N	10.5