

**47 CFR PART 15 SUBPART C TEST REPORT**

**for**

**TPMS TOOL**

**Model No.: TPMS5**

**FCC ID: 2ANR7-TPMS5V1**

**of**

**Applicant: ATEQ INSTRUMENTS (ASIA)PTE LTD.**

**TAIWAN BRANCH (SINGAPORE)**

**Address: NO.3, LANE 223, SAN JIA DONG STREET, 40642,  
TAICHUNG, TAIWAN**

**Tested and Prepared**

**by**

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: TW1072, TW1140, TW1146, TW1477, TW0037**

**Industry Canada filed test laboratory Reg. No.: 20037, 31634**



**Report No.: W6M22408-23659-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



## **TABLE OF CONTENTS**

1	General Information.....	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY .....	3
1.2.1	Location .....	3
1.2.2	Details of accreditation status .....	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS .....	3
1.5	GENERAL INFORMATION OF TEST ITEM .....	4
1.6	TEST STANDARDS.....	4
2	Technical test .....	5
2.1	SUMMARY OF TEST RESULTS .....	5
2.2	TEST ENVIRONMENT .....	5
2.3	TEST EQUIPMENT LIST .....	6
2.4	GENERAL TEST PROCEDURE .....	7
3	Test results (enclosure) .....	8
3.1	PEAK OUTPUT POWER .....	8
3.2	SPURIOUS EMISSIONS RADIATED – TRANSMITTER OPERATING .....	11
3.3	OCCUPIED BANDWIDTH .....	13
3.4	ANTENNA REQUIREMENT .....	14
3.5	RADIATED EMISSIONS FROM RECEIVER SECTION OF RECEIVER PART .....	15
3.6	POWER LINE CONDUCTED EMISSION .....	17

## **Appendix: Diagrams**



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## **1 General Information**

### **1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### **Tester:**

November 21, 2024

Ken Kang

Date

WTS-Lab.

Name

Signature

### **Technical responsibility for area of testing:**

November 21, 2024

Kevin Wang

Date

WTS

Name

Signature



# ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## **1.2 Testing laboratory**

### **1.2.1 Location**

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,  
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No. 99, Sec. 1, Balian Rd., Xizhi Dist.,  
New Taipei City 221032, Taiwan (R.O.C.)

Worldwide Testing Services (Taiwan) Co., Ltd.  
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,  
Taipei City 114 , Taiwan (R.O.C.)  
Tel: 886-2-6606-8877

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1072, TW1140, TW1146, TW1477, TW0037

Industry Canada filed test laboratory Reg. No.: 20037, 31634

**Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.

## **1.3 Details of approval holder**

Name:	ATEQ INSTRUMENTS (ASIA)PTE LTD. TAIWAN BRANCH (SINGAPORE)
Street:	NO.3, LANE 223, SAN JIA DONG STREET, 40642,
Town:	TAICHUNG,
Country:	TAIWAN

## **1.4 Application details**

Date of receipt of test item: August 29, 2024

Date of test: from August 30, 2024 to October 01, 2024






Registration number: W6M22408-23659-C-1


FCC ID: 2ANR7-TPMS5V1

## **1.5 General information of Test item**

Type of test item: TPMS TOOL

Model number: TPMS5

Multi-listing model number: MDMAX3.0 (for )  
TIRE 200 (for )  
TPMX (for )

Brand name: 

Transmitting frequency: 125 kHz

Operation modes: ASK

Antenna type: Wire Antenna

Power supply: Adapter (I/P: 100-240V~50/60Hz 0.3A  
O/P: +5.0V=2.0A, 10.0W)  
Battery 3.8Vd.c. 4800mAh 18.24Wh  
Battery 3.8Vd.c. 5500mAh 20.9Wh

Sample no.: #01

## **Manufacturer: (if different from Approval Holder)**

Name: ./.

Street: ./.

Town: ./.

Country: ./.

## **1.6 Test standards**

47 CFR PART 15 SUBPART C § 15.209 (2023-10)

## **Special statement:**

The 125kHz is not action at the same time, and <1mW.



FCC ID: 2ANR7-TPMS5V1

## 2 Technical test

## 2.1 Summary of test results

☒

**or**

□

## 2.2 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details of power supply	Adapter (I/P: 100-240V~50/60Hz 0.3A O/P: +5.0V=2.0A, 10.0W)
	Battery 3.8Vd.c. 4800mAh 18.24Wh
	Battery 3.8Vd.c. 5500mAh 20.9Wh

Extreme conditions parameters:

	test voltage : -- extreme
	min : -- V
	max : -- V

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 0.94 dB Voltage probe : 0.96 dB Include Pulse Limiter : 1.5 dB
Estimation Result of Uncertainty of Radiated Emission (3M - 966A)(Peak Output Power, Spurious Emissions radiated – Transmitter operating, Radiated Emissions from Receiver Section of Receiver Part)	Expanded Uncertainty : 0.009-30 MHz : 1.88 dB 30-1000 MHz : 3.20 dB 1-18 GHz : 3.56 dB 18-40 GHz : 2.94 dB
Estimation Result of Uncertainty of Bandwidth Measurement (Occupied Bandwidth)	Expanded Uncertainty : 0.45 kHz

The decision rule is: Measurement uncertainty is not included in the calculation of test results.



# ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## **2.3 Test Equipment List**

### **Max Output Power**

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2024/9/11	2025/9/10
ETSTW-RE 154	EMI Test Receiver	ESR3	102829	R&S	2024/4/10	2025/4/9
ETSTW-RE 176	Loop Antenna	FMZB 1513-60	39	SCHWARZBECK	2024/8/21	2025/8/20
ETSTW-Cable 090	N type Cable (15m)	EMCCFD400-NM-NM-15000	230732	EMCI	2024/8/3	2025/8/2

### **Spurious Emission**

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2024/9/11	2025/9/10
ETSTW-RE 154	EMI Test Receiver	ESR3	102829	R&S	2024/4/10	2025/4/9
ETSTW-RE 160	Amplifier Module	CHC 3	None	WTS	2024/7/12	2025/7/11
ETSTW-RE 176	Loop Antenna	FMZB 1513-60	39	SCHWARZBECK	2024/8/21	2025/8/20
ETSTW-RE 177	TRILOG Broadband Antenna	VULB 9168&EMCI-N-6-06	01380&AT-06007	SCHWARZBECK&EMC	2024/3/4	2025/3/3
ETSTW-Cable 077	SMA type cable (10m)	EMC104-SM-SM-10000	230511	EMCI	2024/7/12	2025/7/11
ETSTW-Cable 084	SMA type cable (1m)	SF104-11SMA-1000	816477/4	HONOVA	2024/7/12	2025/7/11
ETSTW-Cable 089	SMA type cable (2m)	SF104-11SMA-2000	SN 811889/4	HUBER+SUHNER	2024/7/12	2025/7/11
ETSTW-Cable 090	N type Cable (15m)	EMCCFD400-NM-NM-15000	230732	EMCI	2024/8/3	2025/8/2

### **AC Conducted Emission**

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2024/6/13	2025/6/12
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2023/10/26	2024/10/25
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-Cable 093	BNC Cable (3m)	EMCCFD-300 -BM-BM-3000	240109	EMCI	2024/1/10	2025/1/9



Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

**ANSI STANDARD C63.10-2013 6.2.2 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm height and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the centre of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10<sup>th</sup> harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

**ANSI STANDARD C63.10-2013 B.2.7:** Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.





# ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## **3 Test results (enclosure)**

Test case	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.209	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.209	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Receiver operating	15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Occupied bandwidth	2.1049	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	FCC 15.203	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	FCC 15.207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The following is intentionally left blank.




Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## 3.1 Peak Output Power

FCC Rules: 15.209

The power was measured with modulation (declared by the applicant).

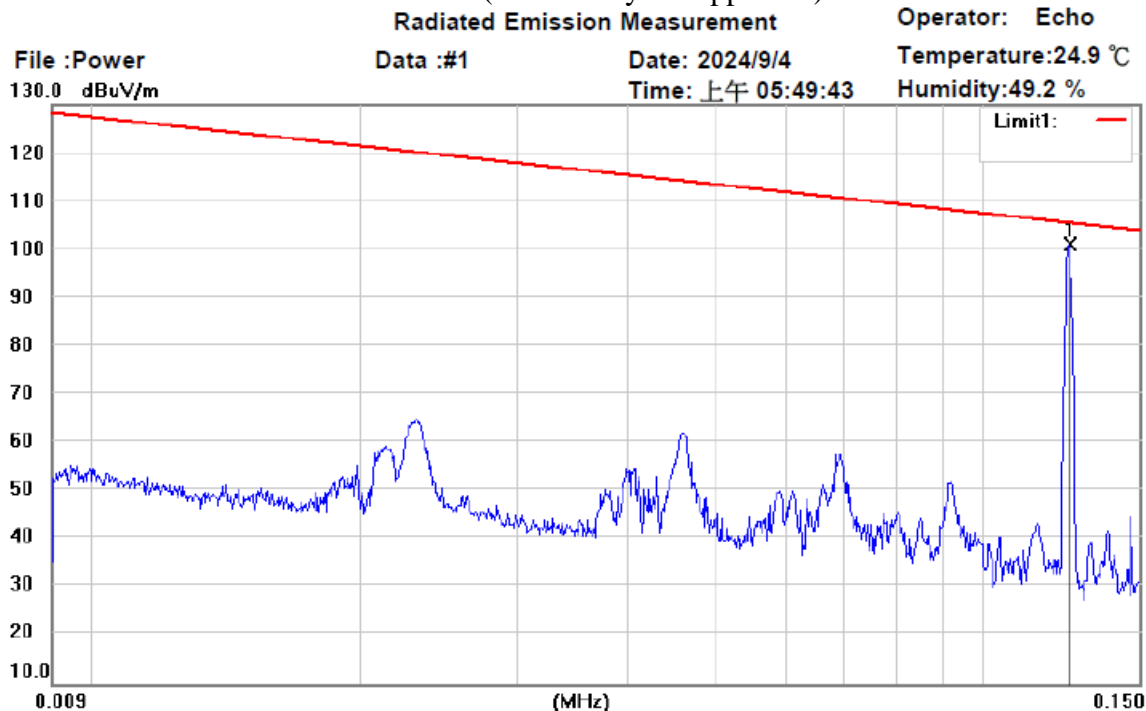

Site : 966A Chamber

Condition : FCC\_15.209 RE (9k-30M) (3M)

EUT : W6M22408-23659

M/N:

Test Mode : TX 125kHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.1250	82.48	peak	18.64	101.12	105.60	100	360	-4.48	



## **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

Limits: 15.209

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

The test was performed in the anechoic chamber at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:

DF (distance factor) =  $40 \log (D_1/D_2) = 80 \text{ dB}$ , where

D<sub>1</sub> is the 300 meter specified measurement distance,

D<sub>2</sub> is the 3 meter test measurement distance.

For 125 kHz frequency the calculated limit is:

Limit<sub>3m</sub> = Limit<sub>300m</sub> + DF = 25.60 dBuV/m + 80 dB = 105.60 dBuV/m



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## 3.2 Spurious Emissions radiated – Transmitter operating

FCC Rules: 15.209

The field strength of any emission appearing outside of the specific band shall not exceed the general radiated emission limits in 15.209.

Model: TPMS5 Date: --  
 Mode: -- Temperature: -- °C Engineer: --  
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

### Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See attached diagrams in the Appendix.

All other not noted test plots do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Limits: 15.209

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

\* In the emission table above, the tighter limit applies at the band edges.

The test was performed in the anechoic chamber at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:



Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

$DF = 40 \log (D_1/D_2) = 80 \text{ dB}$ , where

For  $D_1$  is the 300 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 80 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.

For  $D_1$  is the 30 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 40 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.

If the frequency between 9 – 490 kHz,

$\text{Limit} = 20\log(2400/f(\text{kHz})) + 80$

If the frequency between 490 – 1705 kHz,

$\text{Limit} = 20\log(2400/f(\text{kHz})) + 40$

If the frequency between 1705 – 30000 kHz,

$\text{Limit} = 20\log 30 + 40$

For 11.75 kHz frequency the calculated limit is:

$\text{Limit}_{3m} = \text{Limit}_{300m} + DF = 46.31 \text{ dBuV/m} + 80 \text{ dB} = 126.31 \text{ dBuV/m}$

For 12 kHz frequency the calculated limit is:

$\text{Limit}_{3m} = \text{Limit}_{300m} + DF = 45.87 \text{ dBuV/m} + 80 \text{ dB} = 125.87 \text{ dBuV/m}$



Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## 3.3 Occupied Bandwidth

FCC Rules: 2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated are each equal to 0.5% of the total mean power radiated by a given emission.

The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth specifications are given, the following guidelines are used:

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1 kHz
30 MHz to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz


Test date: September 27, 2024

Temperature: 25.0°C

Humidity: 54.5 %

Tester: Ken

**Test result:**

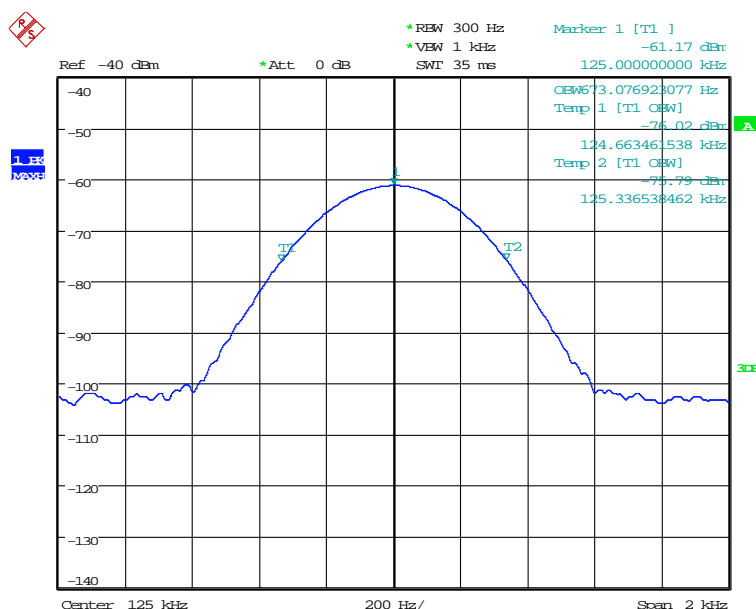



Registration number: W6M22408-23659-C-1


FCC ID: 2ANR7-TPMS5V1

## **3.4 Antenna requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Explanation: This antenna is Loop antenna which passes antenna requirement.

The equipment meets the requirements	yes <input checked="" type="checkbox"/>	no <input type="checkbox"/>
--------------------------------------	--	--------------------------------



Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## **3.5 Radiated Emissions from Receiver Section of Receiver Part**

**For the frequency from 9 kHz to 30 MHz:**

FCC Rule: 15.209

The field strength of any emission appearing outside of the specific band shall not exceed the general radiated emission limits in 15.209.

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

\* In the emission table above, the tighter limit applies at the band edges.

Note: The above field strength limits are specified at a distance of 3 meters.

The test was performed in the anechoic chamber at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:

$DF = 40 \log (D_1/D_2) = 80 \text{ dB}$ , where

For  $D_1$  is the 300 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 80 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.

For  $D_1$  is the 30 meter specified measurement distance.

$D_2$  is the 3 meter test measurement distance.

The  $DF = 40 \text{ dB}$  was applied for limit calculation at 3 meter test distance measurements.

If the frequency between 9 – 490 kHz, limit =  $20\log(2400/f(\text{kHz})) + 80$

If the frequency between 490 – 1705 kHz, limit =  $20\log(2400/f(\text{kHz})) + 40$

If the frequency between 1705 – 30000 kHz, limit =  $20\log 30 + 40$

For 125 kHz frequency the calculated limit is:

Limit<sub>3m</sub> = Limit<sub>300m</sub> + DF = 25.59 dBuV/m + 80 dB = 105.59 dBuV/m

Explanation: This test is not required because the EUT is a transmitter only.





# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

**For the frequency from 30 MHz to 1000 MHz.:**

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Model: TPMS5 Date: --  
 Mode: -- Temperature: -- °C Engineer: --  
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

## **Note**

- Correction Factor = Antenna factor + Cable loss - Preamplifier**
- The formula of measured value as: Test Result = Reading + Correction Factor**
- Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- All not in the table noted test results are more than 20 dB below the relevant limits.**
- This test is not required because the EUT is a transmitter only.**




Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

## 3.6 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

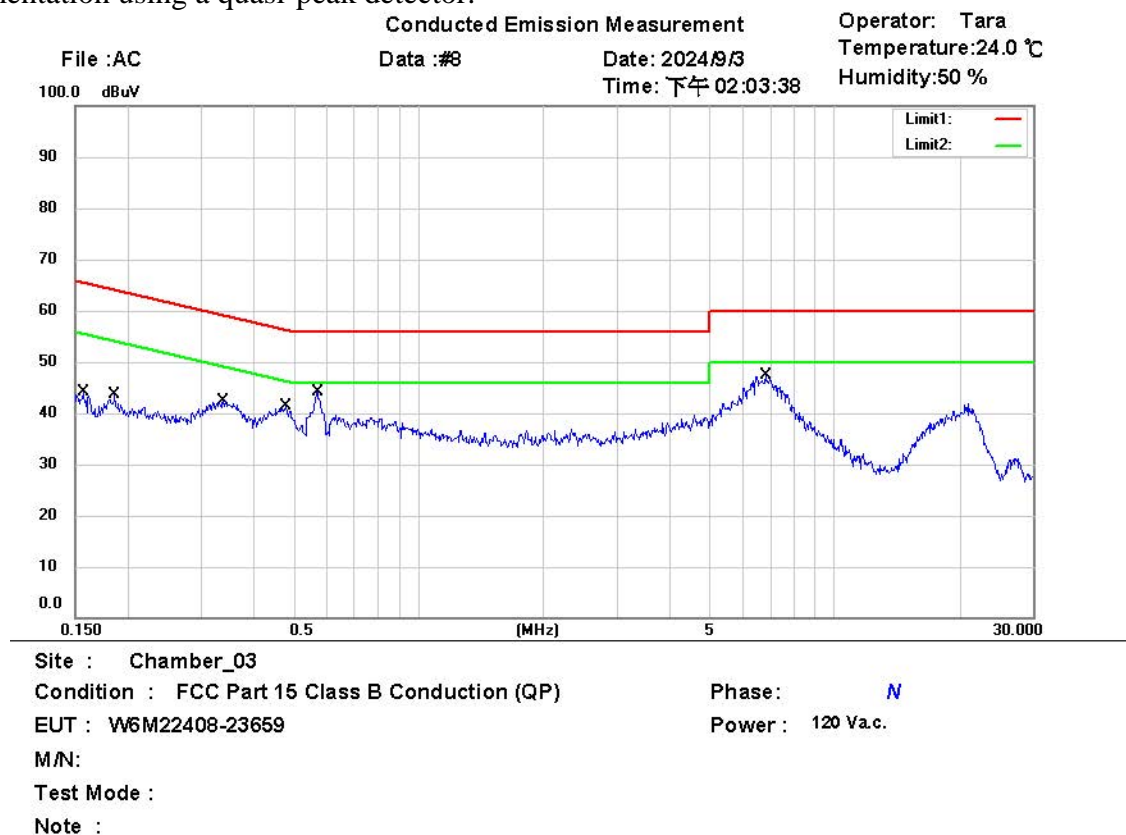

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1563	27.05	QP	9.64	36.69	65.66	-28.97	
	0.1563	20.95	AVG	9.64	30.59	55.66	-25.07	
	0.1861	26.51	QP	9.64	36.15	64.21	-28.06	
	0.1861	20.27	AVG	9.64	29.91	54.21	-24.30	
	0.3376	27.15	QP	9.65	36.80	59.26	-22.46	
	0.3376	9.04	AVG	9.65	18.69	49.26	-30.57	
	0.4765	25.60	QP	9.66	35.26	56.40	-21.14	
	0.4765	7.62	AVG	9.66	17.28	46.40	-29.12	
*	0.5675	28.61	QP	9.67	38.28	56.00	-17.72	
	0.5675	11.75	AVG	9.67	21.42	46.00	-24.58	
	6.7875	31.05	QP	9.79	40.84	60.00	-19.16	
	6.7875	15.90	AVG	9.79	25.69	50.00	-24.31	




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22408-23659-C-1  
FCC ID: 2ANR7-TPMS5V1

Conducted Emission Measurement

Operator: Tara  
Temperature: 24.0 °C  
Humidity: 50 %

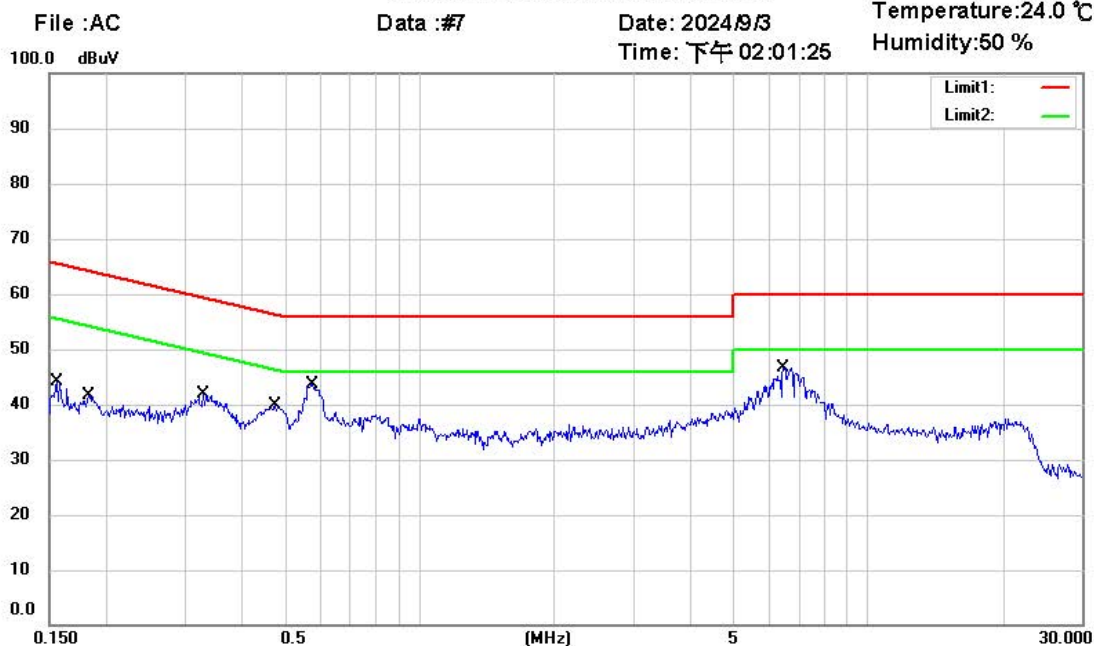

Site : Chamber\_03

Condition : FCC Part 15 Class B Conduction (QP)

EUT : W6M22408-23659

M/N:

Test Mode :

Note :

Phase: L1

Power : 120 V.a.c.

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1554	26.69	QP	9.66	36.35	65.71	-29.36	
	0.1554	20.05	AVG	9.66	29.71	55.71	-26.00	
	0.1833	26.31	QP	9.65	35.96	64.33	-28.37	
	0.1833	18.91	AVG	9.65	28.56	54.33	-25.77	
	0.3280	25.76	QP	9.66	35.42	59.50	-24.08	
	0.3280	14.02	AVG	9.66	23.68	49.50	-25.82	
	0.4751	24.88	QP	9.66	34.54	56.42	-21.88	
	0.4751	8.93	AVG	9.66	18.59	46.42	-27.83	
	0.5742	30.40	QP	9.67	40.07	56.00	-15.93	
*	0.5742	25.19	AVG	9.67	34.86	46.00	-11.14	
	6.4500	29.87	QP	9.76	39.63	60.00	-20.37	
	6.4500	17.40	AVG	9.76	27.16	50.00	-22.84	

## Note

1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.



## ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M22408-23659-C-1

FCC ID: 2ANR7-TPMS5V1

### **Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5 0.5-5 5-30	66 to 56	56 to 46
	56	46
	60	50



Registration number: W6M22408-23659-C-1  
FCC ID: 2ANR7-TPMS5V1

## **Appendix**

### **Measurement diagrams**

Spurious Emissions Radiated



Address: No. 99, Sec. 1, Balian Rd., Xizhi Dist., New Taipei City  
Tel: +886-2-2646-1508  
Fax: +886-2-2646-1533

# Radiated Emission Measurement

Operator: Echo

File : 1

Data : #1


Date: 2024/9/4

Temperature: 24.9 °C

Time: 上午 05:49:43

Humidity: 49.2 %

130.0 dBuV/m

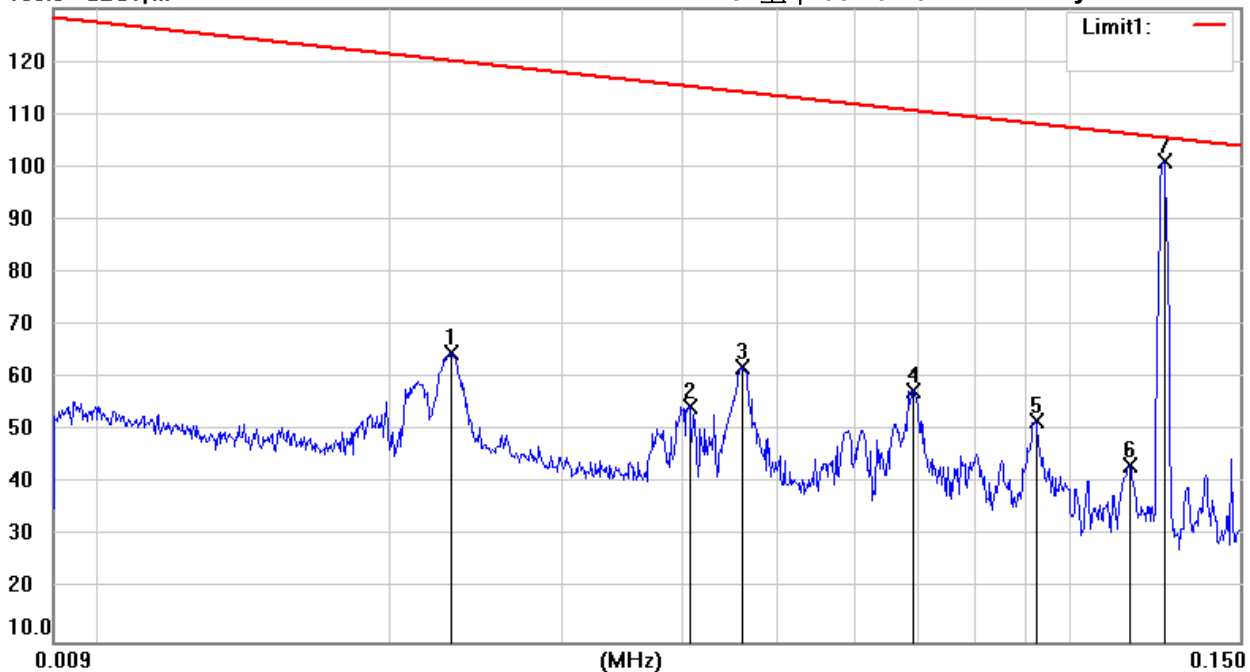

Site : 966A Chamber

Condition : FCC\_15.209 RE (9k-30M) (3M)

EUT : W6M22408-23659

M/N:

Test Mode : TX 125kHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0231	45.67	peak	18.99	64.66	120.18	100	115	-55.52	
	0.0406	35.49	peak	19.19	54.68	115.31	100	180	-60.63	
	0.0460	43.15	peak	19.03	62.18	114.23	100	314	-52.05	
	0.0690	38.91	peak	18.78	57.69	110.73	100	128	-53.04	
	0.0923	33.13	peak	18.60	51.73	108.21	100	97	-56.48	
	0.1154	24.71	peak	18.60	43.31	106.29	100	36	-62.98	
*	0.1251	82.48	peak	18.64	101.12	105.59			-4.47	RF Power

\*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Echo

File : 2

Data : #1


Date: 2024/9/4

Temperature: 24.9 °C

120.0 dBuV/m

Time: 上午 05:54:37

Humidity: 49.2 %

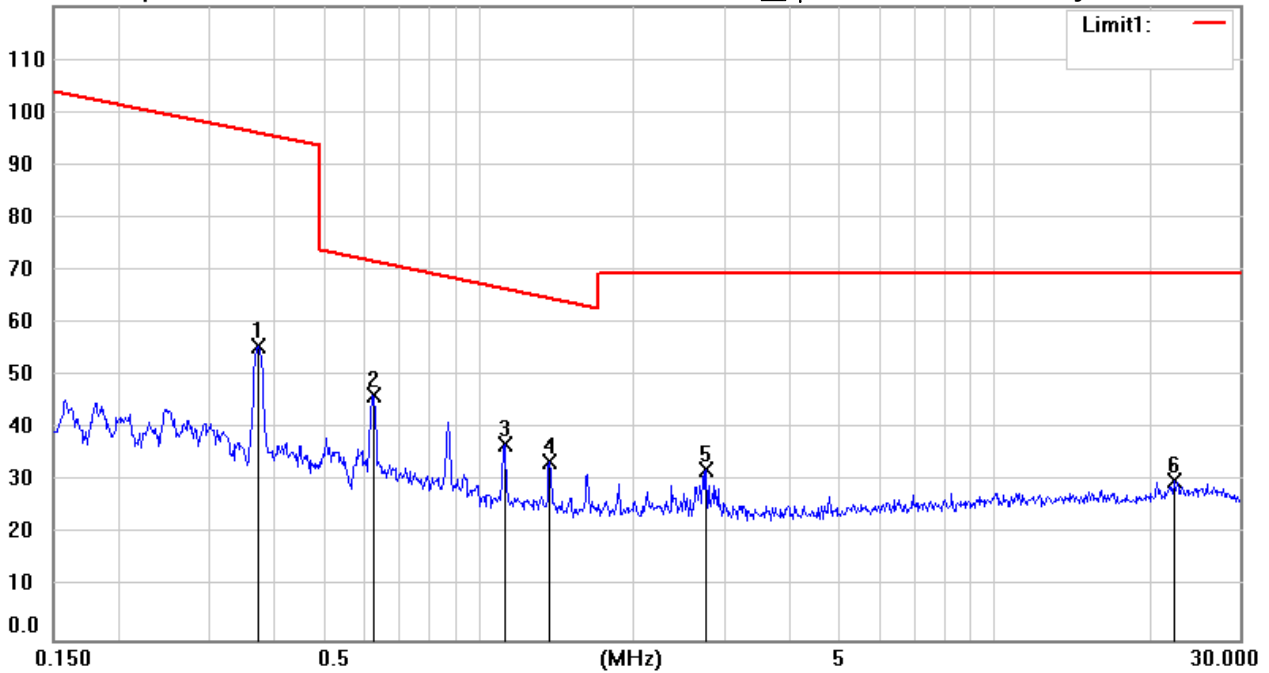

Site : 966A Chamber

Condition : FCC\_15.209 RE (9k-30M) (3M)

EUT : W6M22408-23659

M/N:

Test Mode : TX 125kHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.3751	36.43	peak	19.32	55.75	96.12	100	360	-40.37	
*	0.6255	27.11	peak	19.36	46.47	71.68	100	360	-25.21	
	1.1233	17.69	peak	19.47	37.16	66.59	100	360	-29.43	
	1.3738	14.21	peak	19.51	33.72	64.84	100	360	-31.12	
	2.7648	12.61	peak	19.73	32.34	69.54	100	360	-37.20	
	22.4163	6.93	peak	23.34	30.27	69.54	100	360	-39.27	



Radiated Emission Measurement

Operator: Echo

File :3

Data :#1


Date: 2024/9/4

Temperature: 24.9 °C

80.0 dBuV/m

Time: 上午 04:49:46

Humidity: 49.2 %

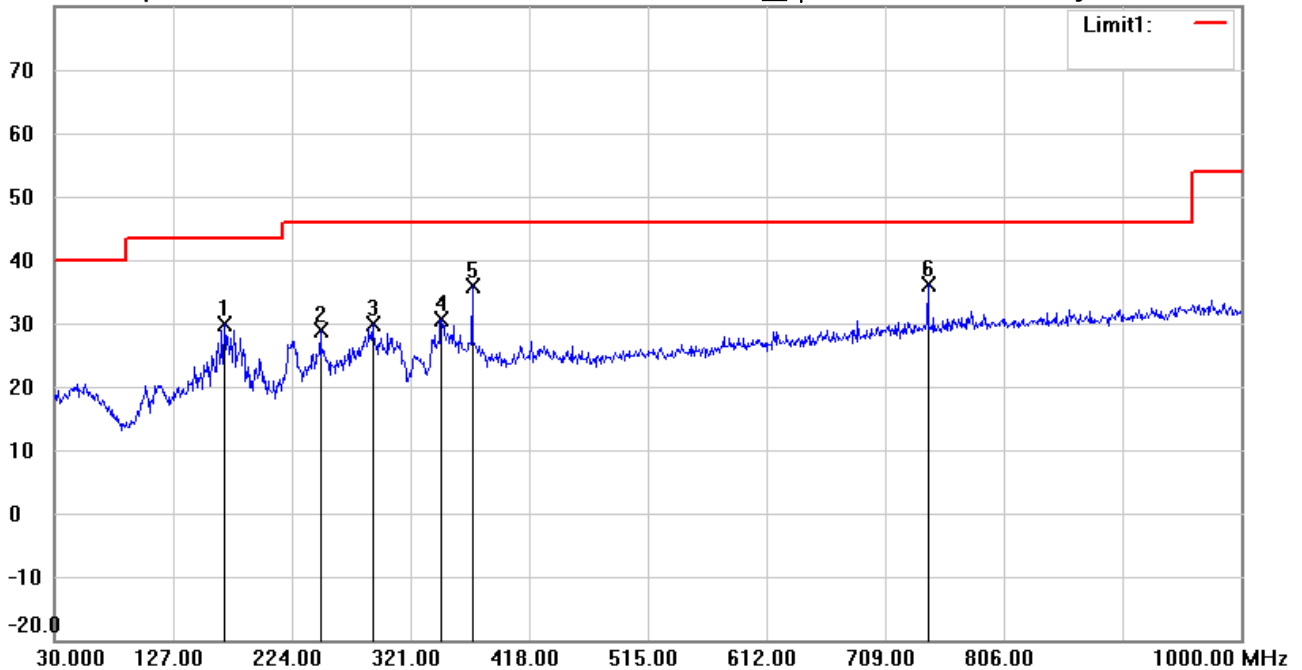

Site : 966A Chamber

Condition : FCC\_part 15.209 RE\_30-1000MHz

EUT : W6M22408-23659

M/N:

Test Mode : TX 125kHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	168.7100	42.76	peak	-12.88	29.88	43.50	100	186	-13.62	
	247.7650	42.75	peak	-13.76	28.99	46.00	100	236	-17.01	
	290.4450	42.16	peak	-12.33	29.83	46.00	100	165	-16.17	
	346.2200	41.84	peak	-11.20	30.64	46.00	100	178	-15.36	
	371.9250	46.22	peak	-10.43	35.79	46.00	100	29	-10.21	
*	743.9200	38.48	peak	-2.38	36.10	46.00	100	1	-9.90	





Address: No.99, Sec.1, Balian Rd., Xizhi Dist., New Taipei City  
Tel: +886-2-2646-1508  
Fax: +886-2-2646-1533

# Radiated Emission Measurement

Operator: Echo

File :3

Data :#2


Date: 2024/9/4

Temperature: 24.9 °C

80.0 dBuV/m

Time: 上午 04:50:30

Humidity: 49.2 %

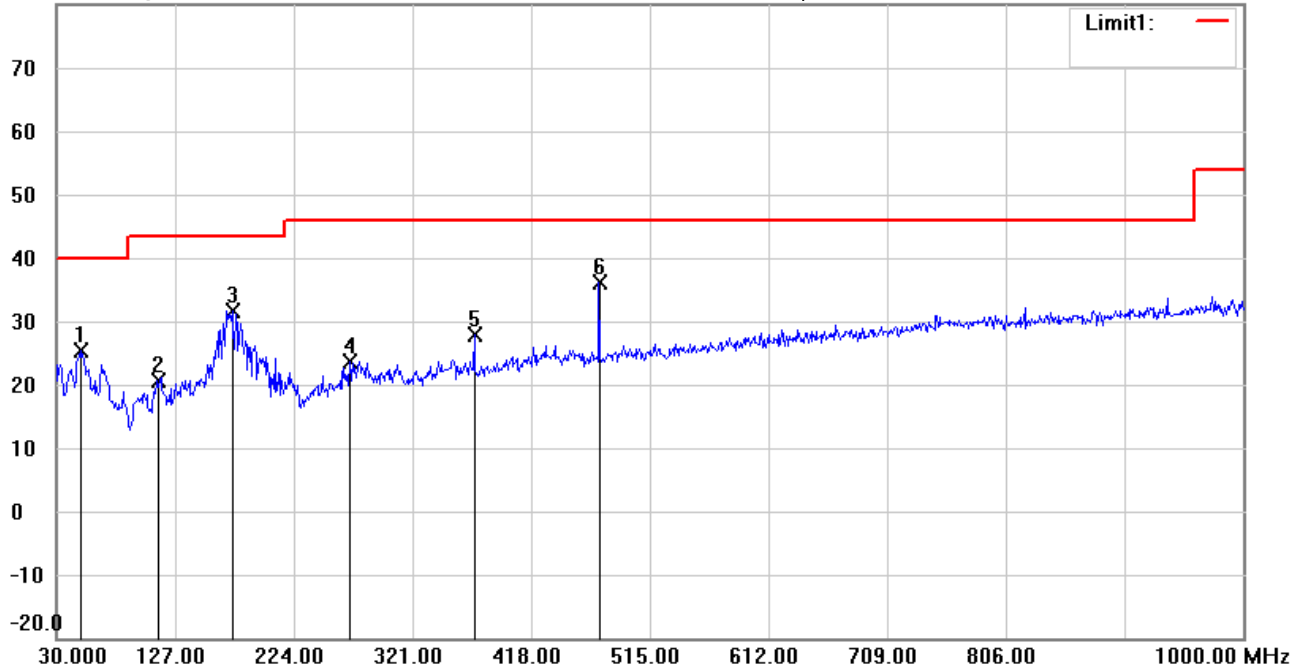

Site : 966A Chamber

Condition : FCC\_part 15.209 RE\_30-1000MHz

EUT : W6M22408-23659

M/N:

Test Mode : TX 125kHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	49.8850	37.97	peak	-12.60	25.37	40.00	100	97	-14.63	
	112.9350	36.00	peak	-15.37	20.63	43.50	100	177	-22.87	
	173.5600	45.07	peak	-13.39	31.68	43.50	100	199	-11.82	
	269.5900	36.65	peak	-13.04	23.61	46.00	100	296	-22.39	
	371.9250	38.30	peak	-10.43	27.87	46.00	100	49	-18.13	
*	473.7750	44.20	peak	-7.99	36.21	46.00	100	336	-9.79	

\*:Maximum data    x:Over limit    !:over margin