

## FCC RADIO TEST REPORT

Applicant..... : Dongguan Fulun Electronics Co.,Limited  
Address..... : 4-8/F, Building B, Xinbosheng Industrial Park, No.5 Xinyuan S Rd,Tangxia,  
Dongguan, China  
Manufacturer..... : Dongguan Fulun Electronics Co.,Limited  
Address..... : 4-8/F, Building B, Xinbosheng Industrial Park, No.5 Xinyuan S Rd,Tangxia,  
Dongguan, China  
Factory..... : Dongguan Fulun Electronics Co.,Limited  
Address..... : 4-8/F, Building B, Xinbosheng Industrial Park, No.5 Xinyuan S Rd,Tangxia,  
Dongguan, China  
Product Name..... : True Wireless Earbuds  
Brand Name..... : BarbetSound  
Model No. .... : RT26, RT26B(For model difference refer to section 2)  
FCC ID..... : 2ATOY-RT26  
Measurement Standard..... : 47 CFR FCC Part 15, Subpart C (Section 15.247)  
Receipt Date of Samples..... : November 25, 2022  
Date of Tested..... : November 25, 2022 to December 12, 2022  
Date of Report..... : December 13, 2022

This report shows that above equipment is technically compliant with the requirements of the standards above.  
All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan  
Nore Testing Center Co., Ltd, this report shall not be reproduced except in full



Prepared by

Rose Hu / Project Engineer



Approved by

Iori Fan / Authorized Signatory

## Table of Contents

1. Summary of Test Result .....	4
2. General Description of EUT .....	5
3. Test Channels and Modes Detail.....	8
4. Configuration of EUT .....	8
5. Modification of EUT .....	8
6. Description of Support Device .....	9
7. Test Facility and Location .....	10
8. Applicable Standards and References .....	11
9. Deviations and Abnormalities from Standard Conditions .....	11
10. Test Conditions .....	12
11. Measurement Uncertainty .....	13
12. Sample Calculations .....	14
13. Test Items and Results .....	15
13.1 Conducted Emissions Measurement.....	15
13.2 Radiated Spurious Emissions and Restricted Bands Measurement .....	17
13.3 Channel Separation test.....	27
13.4 20dB Bandwidth .....	34
13.5 Hopping Channel Number.....	41
13.6 Time of Occupancy (Dwell Time) .....	44
13.7 Maximum Peak Output Power .....	51
13.8 Band Edge Conducted Spurious Emission Measurement.....	58
13.9 Antenna Requirement .....	63
14. Test Equipment List.....	68



## 1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.247(a)(1)	Channel Separation test	PASS	---
§15.247(a)(1)	20dB Bandwidth	PASS	---
§15.247(a)(1)(iii)	Hopping Channel Number	PASS	---
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	---
§15.247(b)	Max Peak output Power test	PASS	---
§15.247(d)	Band edge test	PASS	---
§15.207 (a)	AC Power Conducted Emission	N/A	---
§15.247(d), §15.209, §15.205	Radiated Emission	PASS	---
§15.203	Antenna Requirement	PASS	---
§15.247(d)	Conducted Spurious Emission	PASS	---

## 2. General Description of EUT

Product Information	
Product Name:	True Wireless Earbuds
Main Model Name:	RT26
Additional Model Name:	RT26B
Model Difference:	Both of models have the same circuit schematic, construction, PCB Layout and critical components. Their difference is model number due to trading purpose.
S/N:	2211-6824
Brand Name	BarbetSound
Hardware Version:	V01
Software Version:	V01
Rating:	DC 3.7V Lithium-ion battery for each earphone
Classification:	Class B
Typical Arrangement:	Table-top
I/O Port:	Refer to the user manual
Accessories Information	
Adapter:	N/A
Cable:	N/A
Other:	N/A

#### Additional Information

Note:	<p>1. According to the model difference, all tests were performed on model RT26</p> <p>2. The EUT is a pair of TWS earphone, and it included two parts (left and right), and both of two parts have the same electrical mechanical and physical construction, their different is PCB layout.</p> <p>3. According to the above information, we prepare left earphone and right earphone to perform all test items.</p>
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

#### Technical Specification

Bluetooth Version:	V5.3
Frequency Range:	2402-2480MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channel:	79 (refer to following channel list for details)
Channel Space:	1MHz
Antenna Type:	FPC Antenna for each earphone
Antenna Gain:	3.19 dBi for each earphone (Declared by the manufacturer)

The EUT does not support Bluetooth Low Energy feature in accordance with the manufacturer declaration.


Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

### 3. Test Channels and Modes Detail

No.	Mode	Channel	Frequency (MHz)	Modulation
1	TX	Hopping	2402-2480	GFSK / $\pi/4$ -DQPSK / 8DPSK
2	TX	Low	2402	GFSK / $\pi/4$ -DQPSK / 8DPSK
3	TX	Mid	2441	GFSK / $\pi/4$ -DQPSK / 8DPSK
4	TX	High	2480	GFSK / $\pi/4$ -DQPSK / 8DPSK
5.	BT Link	---	---	---

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

### 4. Configuration of EUT

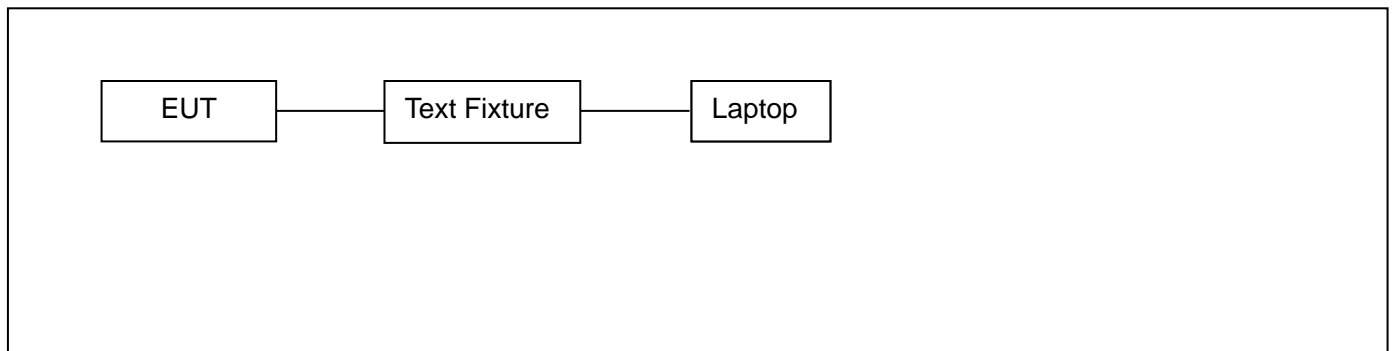

### 5. Modification of EUT

No modifications are made to the EUT during all test items.



## 6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Laptop	DELL	VOSTR03400	H3K2XA 01	Power cord: 1.15m, unshielded	Provide by the Lab
2.	Power supply of the Laptop	DELL	HA45NM140	N/A	---	Provide by the Lab
3.	Test fixture	---	---	---	----	Provide by the Lab

No.	Test Software	Modulation	Power Setting
1.	bt_tool_v1.1.2	GFSK	3
2.		$\pi/4$ -DQPSK	3
3.		8DPSK	3

## 7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	<p>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01</p> <p>Listed by CNAS, August 13, 2018</p> <p>The Certificate Registration Number is L5795.</p> <p>The Certificate is valid until August 13, 2024</p> <p>The Laboratory has been assessed and proved to be in compliance with ISO17025</p> <p>Listed by A2LA, November 01, 2017</p> <p>The Certificate Registration Number is 4429.01</p> <p>The Certificate is valid until December 31, 2023</p> <p>Listed by FCC, November 06, 2017</p> <p>Test Firm Registration Number: 907417</p> <p>Listed by Industry Canada, June 08, 2017</p> <p>The Certificate Registration Number. Is 46405-9743A</p>
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

## 8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

### Test Standards:

47 CFR Part 15, Subpart C, 15.247

ANSI C63.10-2013

### References Test Guidance:

DTS KDB 558074 D01 15.247 Meas Guidance v05r02

### Remark:

The EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

## 10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	Channel Separation test	1	DC 3.7V	Sean Yuan	See note <sup>1</sup>
2.	20dB Bandwidth	2-4	DC 3.7V	Sean Yuan	See note <sup>1</sup>
3.	Hopping Channel Number	1	DC 3.7V	Sean Yuan	See note <sup>1</sup>
4.	Time of Occupancy (Dwell Time)	1	DC 3.7V	Sean Yuan	See note <sup>1</sup>
5.	Max Peak output Power test	2-4	DC 3.7V	Sean Yuan	See note <sup>1</sup>
6.	Band edge test	1-4	DC 3.7V	Sean Yuan	See note <sup>1</sup>
7.	AC Power Conducted Emission	--	--	--	See note <sup>3</sup>
8.	Radiated Emission	1-5	DC 3.7V	Sean Yuan	See note <sup>1</sup>
9.	Antenna Requirement	---	---	---	---
10.	Conducted Spurious Emission	1-4	DC 3.7V	Sean Yuan	See note <sup>1</sup>

**Note:**

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35℃, 30~70%, 86~106kPa
2. As the EUT can be operated multiple positions, all X,Y,Z axis were considered during the test and only the worst case X was recorded.
3. This product will not be connected to the AC mains during normal use, therefore the AC Power Conducted Emission test is not applicable.

## 11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±3.04 dB	---
2.	Radiated Emission	9kHz ~ 30MHz	±5.04 dB	
		30MHz ~ 1GHz	±5.04 dB	---
		1GHz ~ 18GHz	±5.23 dB	---
		18GHz ~ 40GHz	±5.23 dB	
3.	Conducted Spurious Emissions	10Hz ~ 40GHz	±0.78 dB	---
4.	RF Output Power	10Hz ~ 40GHz	±0.86 dB	
5.	Power Spectral Density	10Hz ~ 40GHz	±1.06 dB	
6.	Occupied Channel Bandwidth	---	±1.42 x10-4% MHz	---

**Note:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

## 12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1500	27.50	10.60	38.10	66.00	-27.90	QP
<p>Where,</p> <p>Freq. = Emission frequency in MHz</p> <p>Reading Level = Spectrum Analyzer/Receiver Reading</p> <p>Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation</p> <p>Measurement = Reading + Corrector Factor</p> <p>Limit = Limit stated in standard</p> <p>Margin = Measurement - Limit</p> <p>Detector = Reading for Quasi-Peak / Average / Peak</p>						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
30.0000	32.18	-10.69	21.49	40.00	-18.51	QP
<p>Where,</p> <p>Freq. = Emission frequency in MHz</p> <p>Reading Level = Spectrum Analyzer/Receiver Reading</p> <p>Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier</p> <p>Measurement = Reading + Corrector Factor</p> <p>Limit = Limit stated in standard</p> <p>Over = Margin, which calculated by Measurement - Limit</p> <p>Detector = Reading for Quasi-Peak / Average / Peak</p>						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

## 13. Test Items and Results

### 13.1 Conducted Emissions Measurement


#### LIMITS

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

- Note:
1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
  2. The lower limit shall apply at the transition frequencies.
  3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

#### BLOCK DIAGRAM OF TEST SETUP

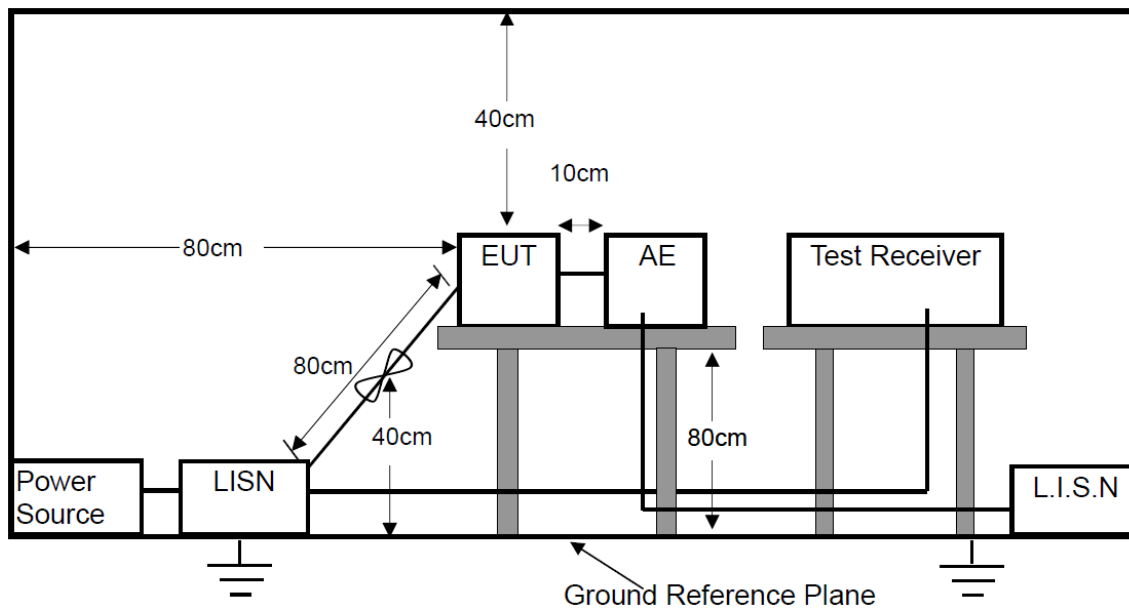

---

## TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

## TEST RESULTS

Not applicable.

This product will not be connected to the AC mains during normal use, therefore the AC Power Conducted Emission test is not applicable.



## 13.2 Radiated Spurious Emissions and Restricted Bands Measurement


### LIMITS

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500


- Remark:
- (1) Emission level  $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
  - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
  - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

## BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

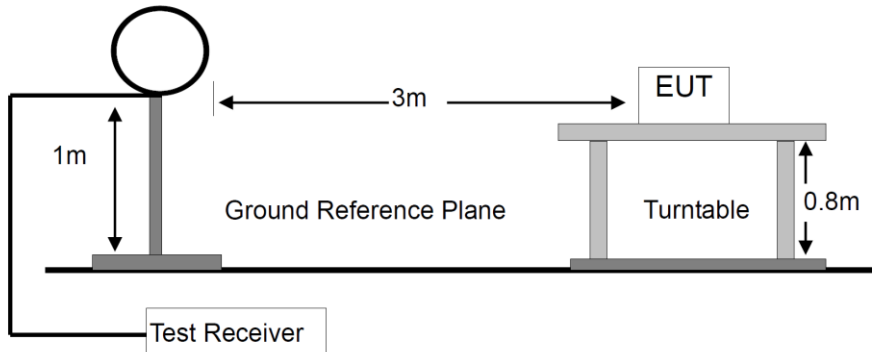

For Radiated Emission 30-1000MHz

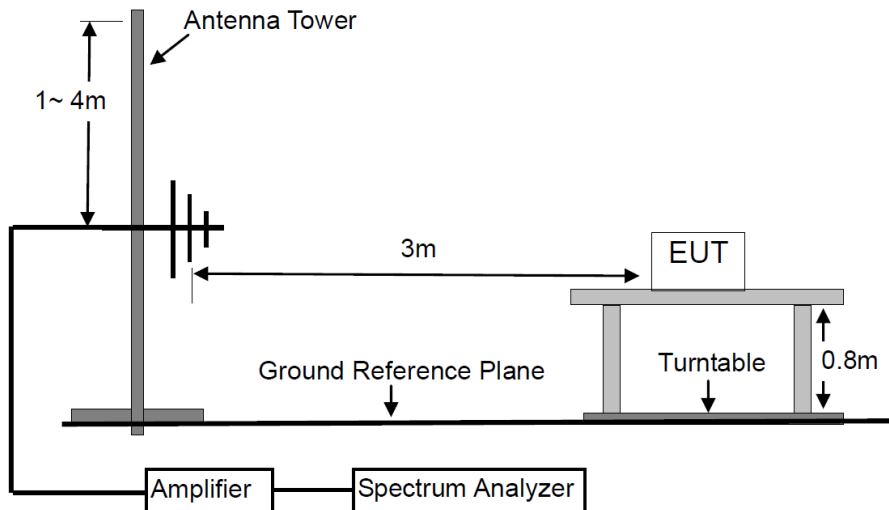

For Radiated Emission Above 1000MHz.

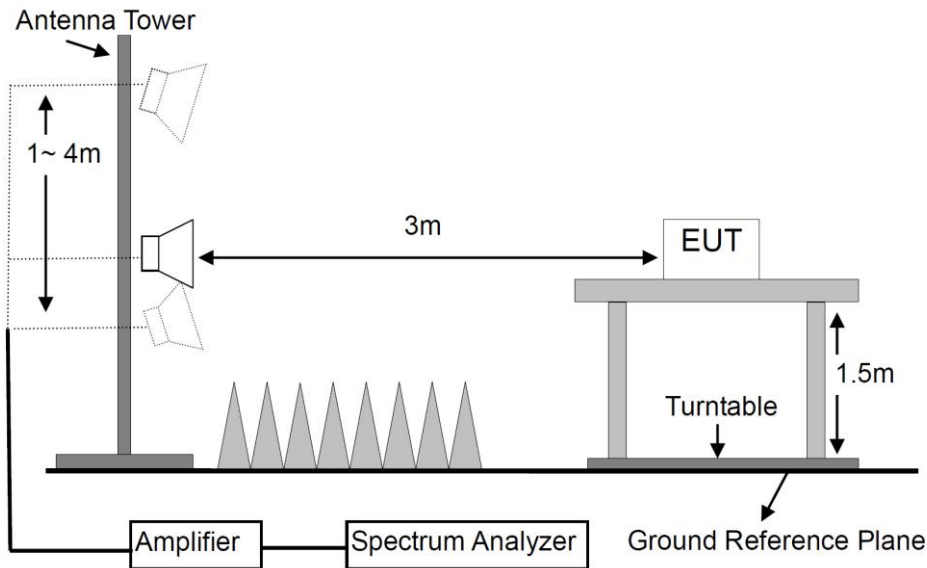

## TEST PROCEDURES

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:  

The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.
- g. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type.

The worst case was found when the EUT was positioned on X axis for radiated emission.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

## TEST RESULTS

PASS


Please refer to the following pages of the worst case.

M/N: RT26 (left earphone)	Testing Voltage: DC 3.7V
Polarization: Horizontal	Detector: Peak
Test Mode: 5	Distance: 3m

## Radiated Emission Measurement

Date: 2022/12/8

Time: 15:23:27

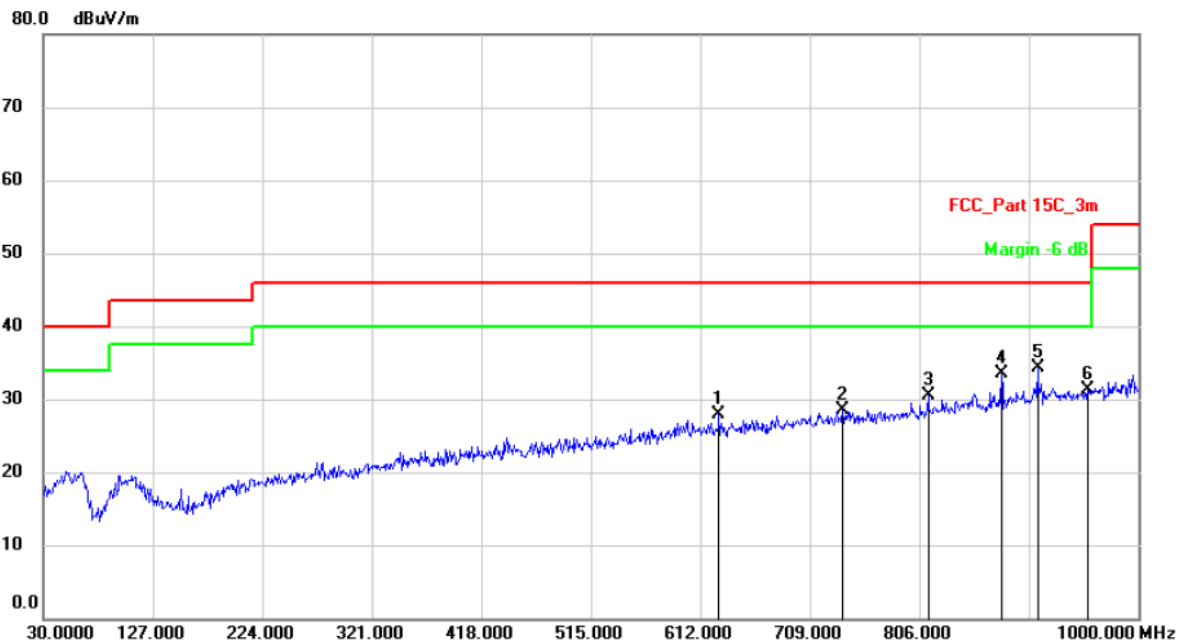

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		628.4900	26.89	1.01	27.90	46.00	-18.10	QP	
2		738.1000	25.67	2.83	28.50	46.00	-17.50	QP	
3		813.7600	26.28	4.21	30.49	46.00	-15.51	QP	
4		878.7500	28.48	4.93	33.41	46.00	-12.59	QP	
5	*	910.7600	28.15	6.21	34.36	46.00	-11.64	QP	
6		955.3800	24.98	6.29	31.27	46.00	-14.73	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: RT26 (left earphone)	Testing Voltage: DC 3.7V
Polarization: Vertical	Detector: Peak
Test Mode: 5	Distance: 3m

## Radiated Emission Measurement

Date: 2022/12/8

Time: 15:30:36

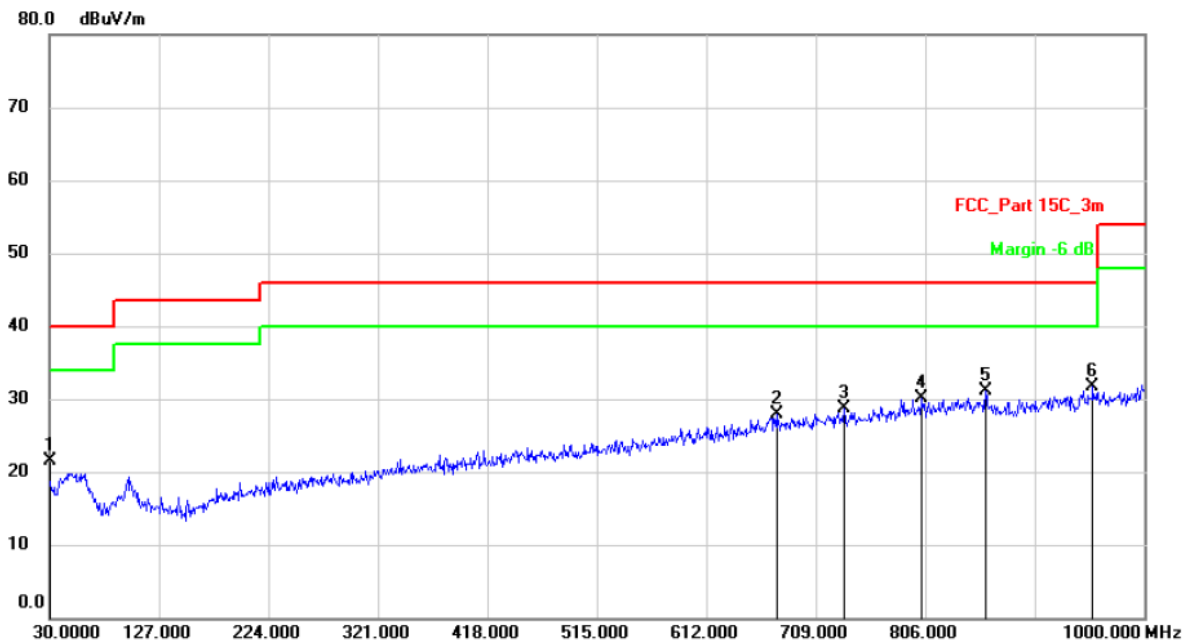

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		30.0000	32.18	-10.69	21.49	40.00	-18.51	QP	
2		674.0800	26.26	1.72	27.98	46.00	-18.02	QP	
3		734.2199	25.95	2.77	28.72	46.00	-17.28	QP	
4		803.0900	26.04	4.02	30.06	46.00	-15.94	QP	
5		859.3500	26.14	4.87	31.01	46.00	-14.99	QP	
6	*	954.4100	26.55	5.09	31.64	46.00	-14.36	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.


M/N: RT26 (right earphone)	Testing Voltage: DC 3.7V
Polarization: Horizontal	Detector: Peak
Test Mode: 5	Distance: 3m

## Radiated Emission Measurement

Date: 2022/12/8

Time: 11:33:00

80.0 dBuV/m

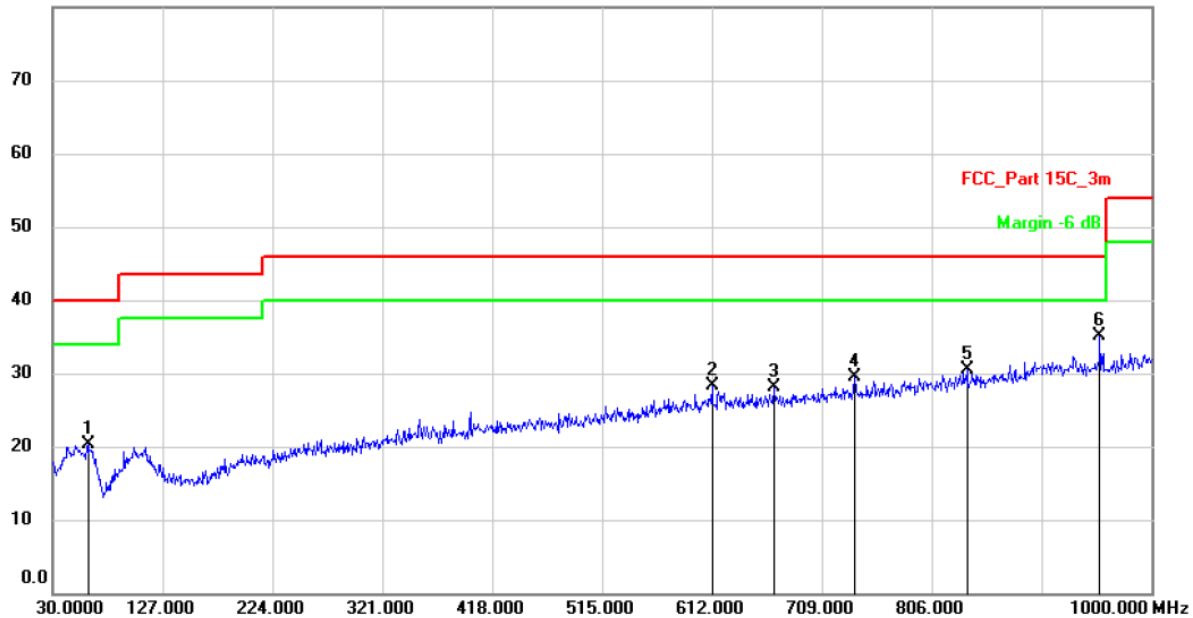

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		61.0400	27.58	-7.28	20.30	40.00	-19.70	QP	
2		612.0000	27.48	0.82	28.30	46.00	-17.70	QP	
3		666.3200	26.46	1.58	28.04	46.00	-17.96	QP	
4		738.1000	26.60	2.83	29.43	46.00	-16.57	QP	
5		837.0400	25.90	4.58	30.48	46.00	-15.52	QP	
6	*	954.4100	28.83	6.28	35.11	46.00	-10.89	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: RT26 (right earphone)	Testing Voltage: DC 3.7V
Polarization: Vertical	Detector: Peak
Test Mode: 5	Distance: 3m

## Radiated Emission Measurement

Date: 2022/12/8

Time: 11:39:26

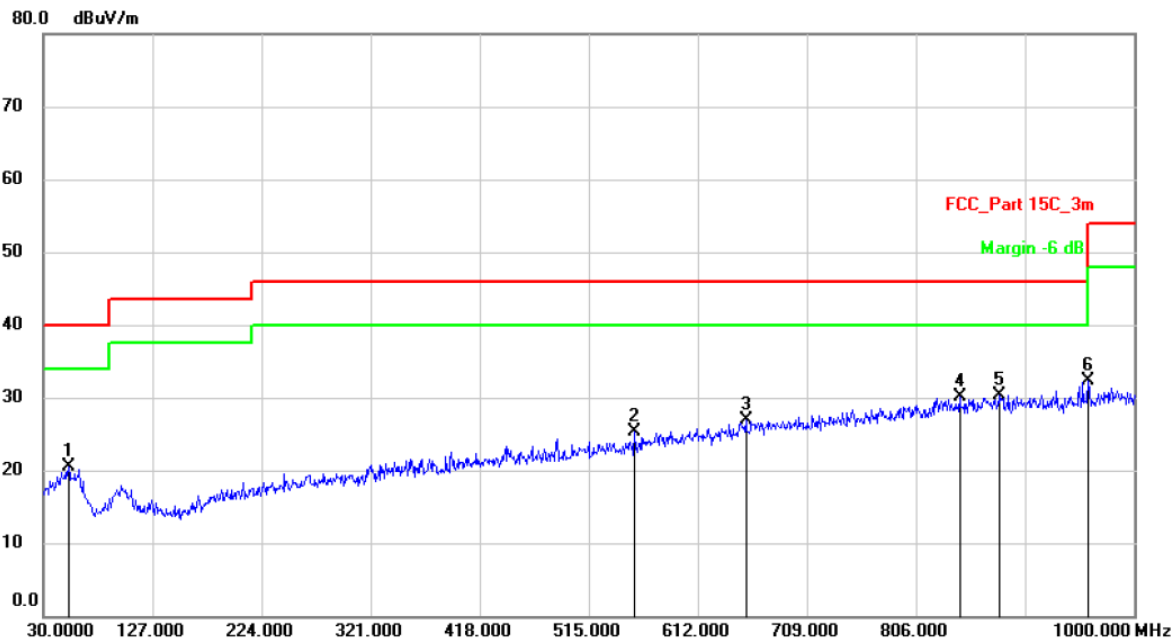

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		52.3100	27.77	-7.30	20.47	40.00	-19.53	QP	
2		555.7400	26.95	-1.63	25.32	46.00	-20.68	QP	
3		654.6800	25.57	1.24	26.81	46.00	-19.19	QP	
4		844.8000	25.37	4.71	30.08	46.00	-15.92	QP	
5		879.7200	25.35	4.94	30.29	46.00	-15.71	QP	
6	*	959.2600	27.15	5.12	32.27	46.00	-13.73	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



**For left earphone**

Modulation: 8DPSK (the worst case)					Test Result: PASS		Test frequency range: 1-25GHz			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV/m)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	H	49.62	39.51	3.54	53.16	43.05	74.00	54.00	-20.84	-10.95
7206	H	48.31	38.35	8.50	56.81	46.85	74.00	54.00	-17.19	-7.15
---										
4804	V	49.23	41.08	3.54	52.77	44.62	74.00	54.00	-21.23	-9.38
7206	V	45.82	37.75	8.50	54.32	46.25	74.00	54.00	-19.68	-7.75
---										
Operation Mode: TX Mode (Mid)										
4882	H	52.67	42.23	4.24	56.91	46.47	74.00	54.00	-17.09	-7.53
7323	H	46.61	37.16	9.62	56.23	46.78	74.00	54.00	-17.77	-7.22
---										
4882	V	50.38	42.05	4.24	54.62	46.29	74.00	54.00	-19.38	-7.71
7323	V	45.19	36.53	9.62	54.81	46.15	74.00	54.00	-19.19	-7.85
---										
Operation Mode: TX Mode (High)										
4960	H	55.85	44.83	4.27	60.12	49.10	74.00	54.00	-13.88	-4.90
7440	H	46.30	36.08	10.02	56.32	46.10	74.00	54.00	-17.68	-7.90
---										
4960	V	54.76	44.93	4.27	59.03	49.20	74.00	54.00	-14.97	-4.80
7440	V	46.39	36.33	10.02	56.41	46.35	74.00	54.00	-17.59	-7.65
---										
Spurious Emission in restricted band:										
2390.000	H	56.06	36.15	-3.27	52.79	32.88	74.00	54.00	-21.21	-21.12
2390.000	V	56.53	34.92	-3.27	53.26	31.65	74.00	54.00	-20.74	-22.35
2483.500	H	63.34	38.07	-3.04	60.30	35.03	74.00	54.00	-13.70	-18.97
2483.500	V	61.70	37.10	-3.04	58.66	34.06	74.00	54.00	-15.34	-19.94
Remark: Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits.										

**For right earphone**


Modulation: 8DPSK (the worst case)					Test Result: PASS		Test frequency range: 1-25GHz			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV/m)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	H	49.08	39.41	3.54	52.62	42.95	74.00	54.00	-21.38	-11.05
7206	H	48.37	38.07	8.50	56.87	46.57	74.00	54.00	-17.13	-7.43
---										
4804	V	48.03	40.50	3.54	51.57	44.04	74.00	54.00	-22.43	-9.96
7206	V	45.45	37.53	8.50	53.95	46.03	74.00	54.00	-20.05	-7.97
---										
Operation Mode: TX Mode (Mid)										
4882	H	51.90	42.27	4.24	56.14	46.51	74.00	54.00	-17.86	-7.49
7323	H	47.29	37.26	9.62	56.91	46.88	74.00	54.00	-17.09	-7.12
---										
4882	V	51.45	41.79	4.24	55.69	46.03	74.00	54.00	-18.31	-7.97
7323	V	45.34	36.56	9.62	54.96	46.18	74.00	54.00	-19.04	-7.82
---										
Operation Mode: TX Mode (High)										
4960	H	55.62	44.37	4.27	59.89	48.64	74.00	54.00	-14.11	-5.36
7440	H	46.30	36.15	10.02	56.32	46.17	74.00	54.00	-17.68	-7.83
---										
4960	V	54.52	43.79	4.27	58.79	48.06	74.00	54.00	-15.21	-5.94
7440	V	46.31	36.79	10.02	56.33	46.81	74.00	54.00	-17.67	-7.19
---										
Spurious Emission in restricted band:										
2390.000	H	54.70	35.29	-3.27	51.43	32.02	74.00	54.00	-22.57	-21.98
2390.000	V	56.11	34.25	-3.27	52.84	30.98	74.00	54.00	-21.16	-23.02
2483.500	H	62.99	37.46	-3.04	59.95	34.42	74.00	54.00	-14.05	-19.58
2483.500	V	61.82	37.02	-3.04	58.78	33.98	74.00	54.00	-15.22	-20.02
Remark: Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits.										

### 13.3 Channel Separation test

#### LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.2.

#### TEST RESULTS

PASS

Please refer to the following tables.


For left earphone

Modulation	Channel	Frequency (MHz)	Hopping Separation Measurement (MHz)	Hopping Separation Limit (KHz)	Test Result
GFSK	Low	2402	0.999	>632.8	Pass
	Mid	2441	1.002	>633.3	Pass
	High	2480	1.002	>633.6	Pass
$\pi/4$ -DQPSK	Low	2402	0.999	>857.3	Pass
	Mid	2441	0.999	>856.7	Pass
	High	2480	0.999	>869.3	Pass
8DPSK	Low	2402	0.999	>869.3	Pass
	Mid	2441	1.002	>868.7	Pass
	High	2480	1.005	>868.0	Pass

### GFSK / Low Channel



### GFSK / Mid Channel

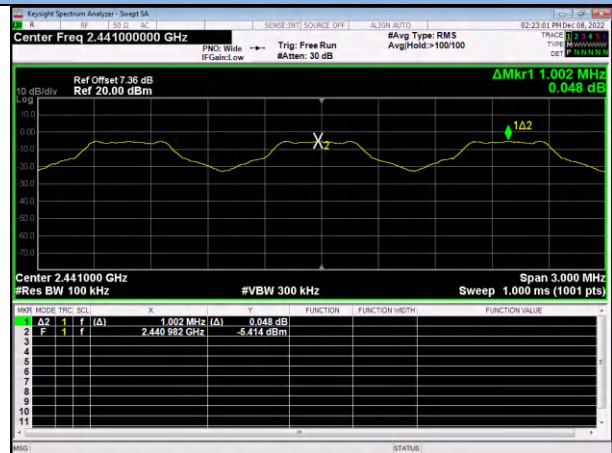

### GFSK / High Channel



### $\pi/4$ -DQPSK / Low Channel



### $\pi/4$ -DQPSK / Mid Channel




### $\pi/4$ -DQPSK / High Channel



### 8DPSK / Low Channel



### 8DPSK / Mid Channel

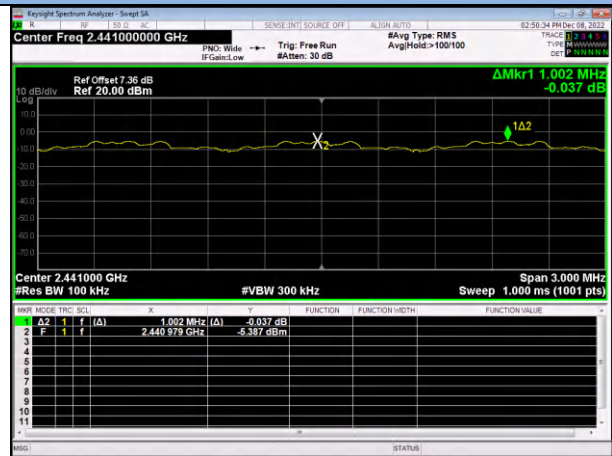

### 8DPSK / High Channel



---


---

For right earphone

Modulation	Channel	Frequency (MHz)	Hopping Separation Measurement (MHz)	Hopping Separation Limit (KHz)	Test Result
GFSK	Low	2402	0.999	>633.0	Pass
	Mid	2441	0.999	>632.9	Pass
	High	2480	1.002	>632.7	Pass
$\pi/4$ -DQPSK	Low	2402	0.996	>857.3	Pass
	Mid	2441	1.002	>857.3	Pass
	High	2480	0.999	>873.3	Pass
8DPSK	Low	2402	0.996	>868.7	Pass
	Mid	2441	0.996	>869.3	Pass
	High	2480	0.999	>867.3	Pass



### GFSK / Low Channel

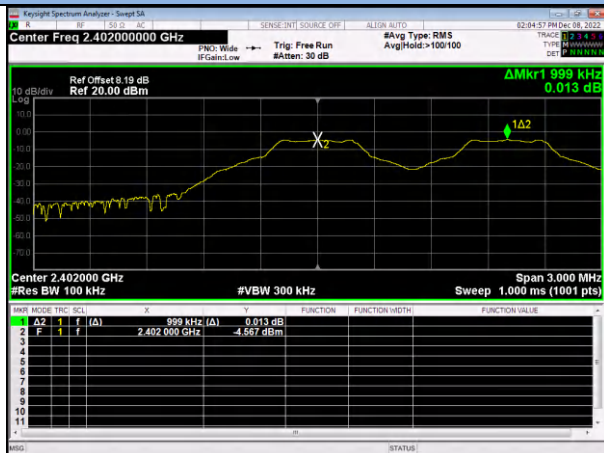

### GFSK / Mid Channel



### GFSK / High Channel



### $\pi/4$ -DQPSK / Low Channel



### $\pi/4$ -DQPSK / Mid Channel



### $\pi/4$ -DQPSK / High Channel






### 8DPSK / Low Channel



### 8DPSK / Mid Channel

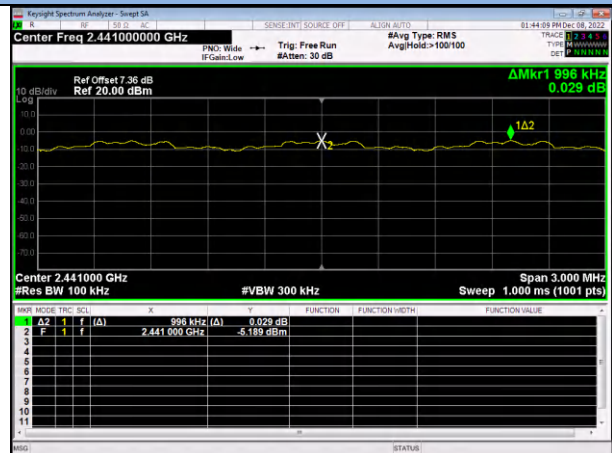

### 8DPSK / High Channel



---


---

### 13.4 20dB Bandwidth

#### LIMIT

N/A

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 6.9.2.

#### TEST RESULTS


PASS

Please refer to the following tables.


For left earphone

Modulation	Channel	Frequency (MHz)	20dB Measurement (KHz)	Limit (MHz)	Remark
GFSK	Low	2402	949.2	N/A	Reporting only
	Mid	2441	949.9	N/A	
	High	2480	950.4	N/A	
$\pi/4$ -DQPSK	Low	2402	1286	N/A	
	Mid	2441	1285	N/A	
	High	2480	1304	N/A	
8DPSK	Low	2402	1304	N/A	
	Mid	2441	1303	N/A	
	High	2480	1302	N/A	


### GFSK / Low Channel

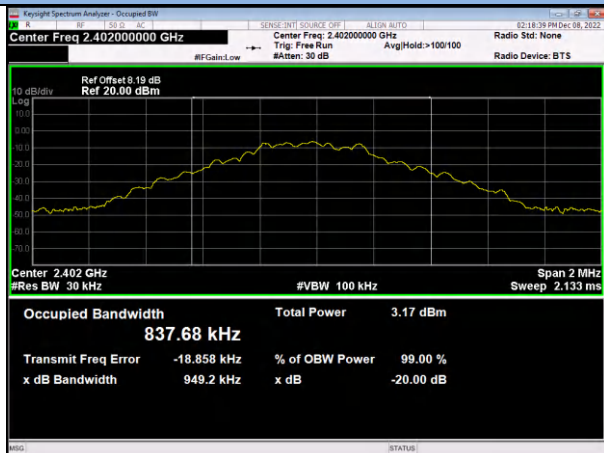


### GFSK / Mid Channel

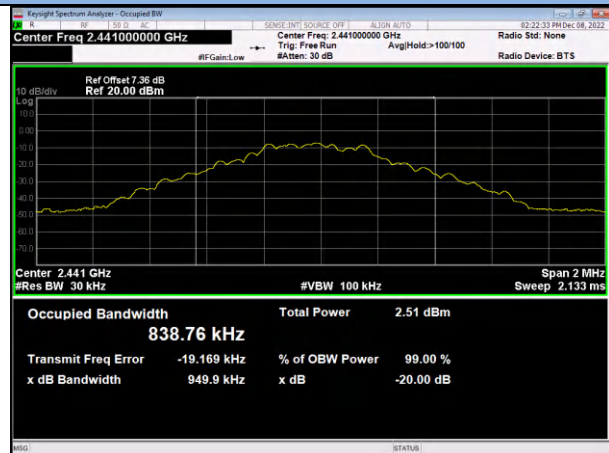


### GFSK / High Channel

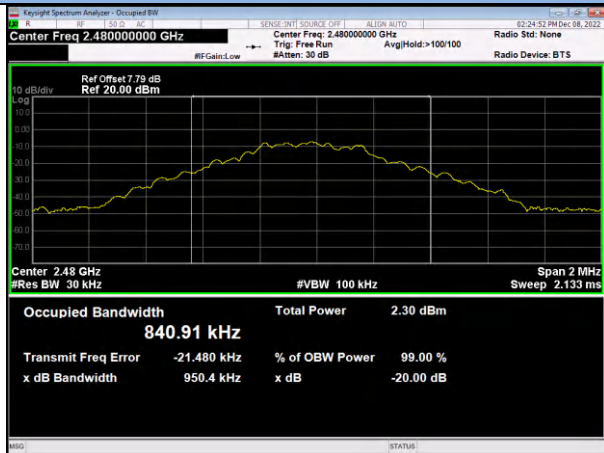


### $\pi/4$ -DQPSK / Low Channel

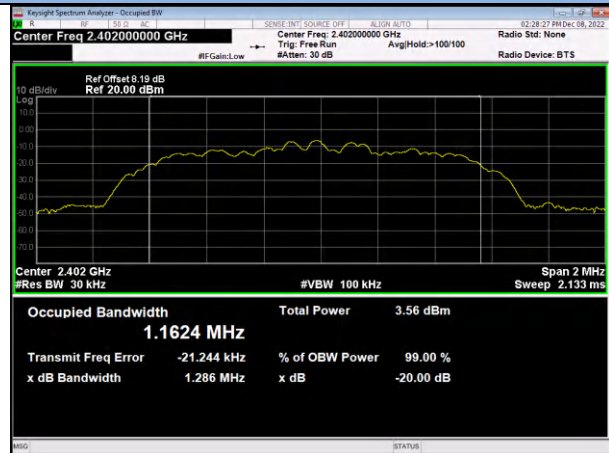


### $\pi/4$ -DQPSK / Mid Channel

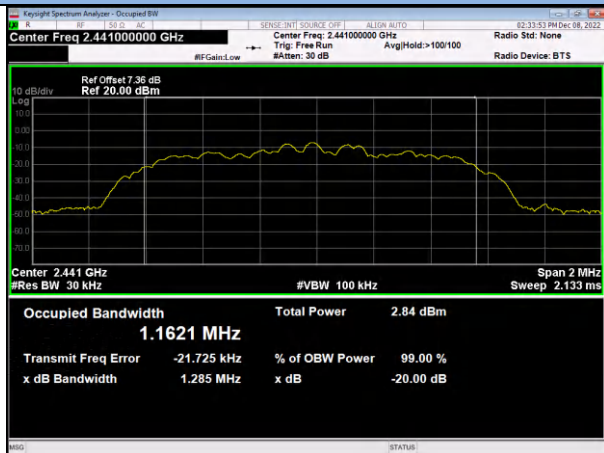


### $\pi/4$ -DQPSK / High Channel

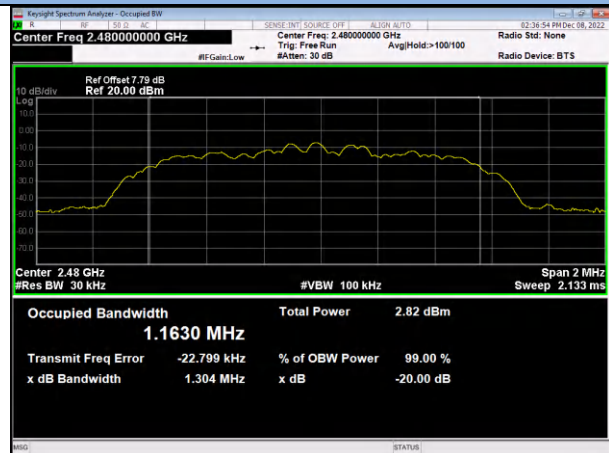


### 8DPSK / Low Channel

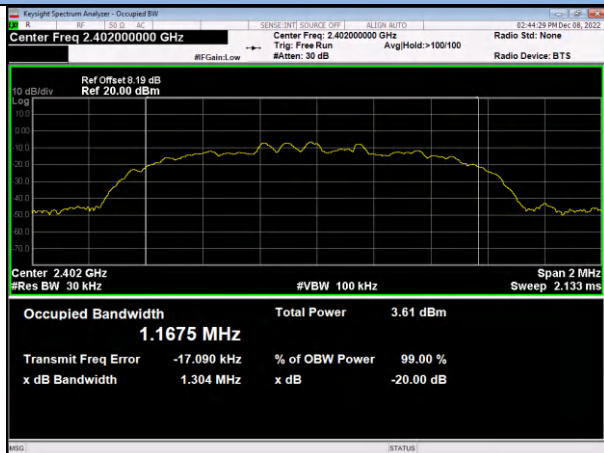

### 8DPSK / Mid Channel

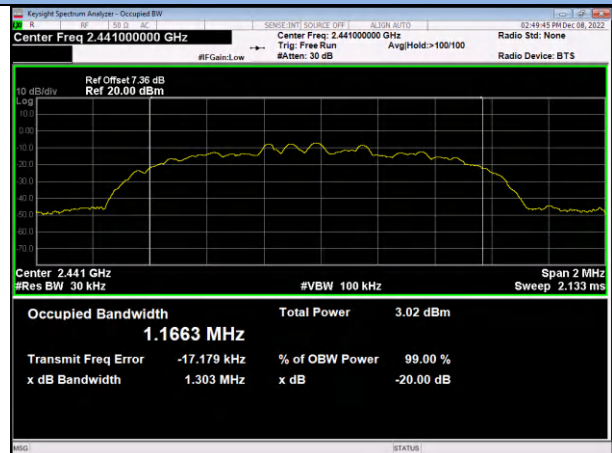

### 8DPSK / High Channel

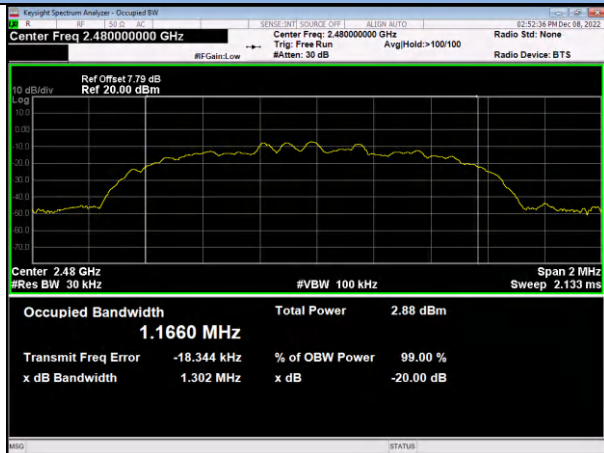


---

---


For right earphone

Modulation	Channel	Frequency (MHz)	20dB Measurement (KHz)	Limit (MHz)	Remark
GFSK	Low	2402	949.5	N/A	Reporting only
	Mid	2441	949.4	N/A	
	High	2480	949.0	N/A	
$\pi/4$ -DQPSK	Low	2402	1286	N/A	
	Mid	2441	1286	N/A	
	High	2480	1310	N/A	
8DPSK	Low	2402	1303	N/A	
	Mid	2441	1304	N/A	
	High	2480	1301	N/A	

### GFSK / Low Channel

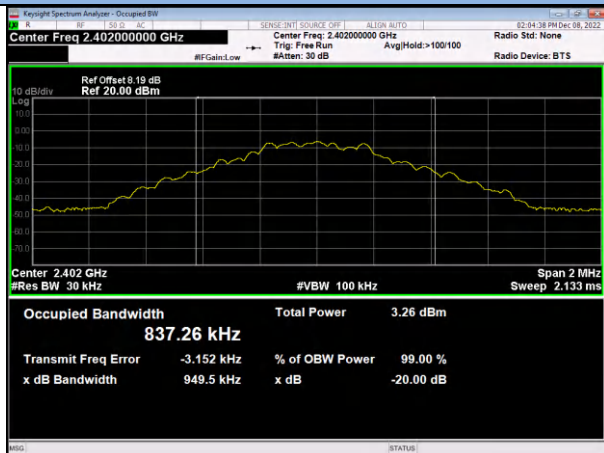


### GFSK / Mid Channel

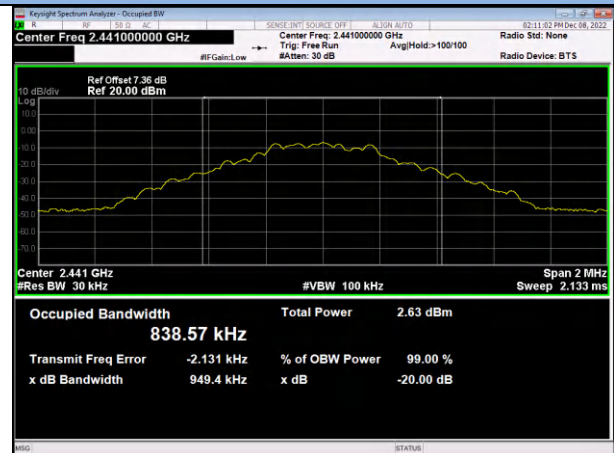


### GFSK / High Channel




### $\pi/4$ -DQPSK / Low Channel

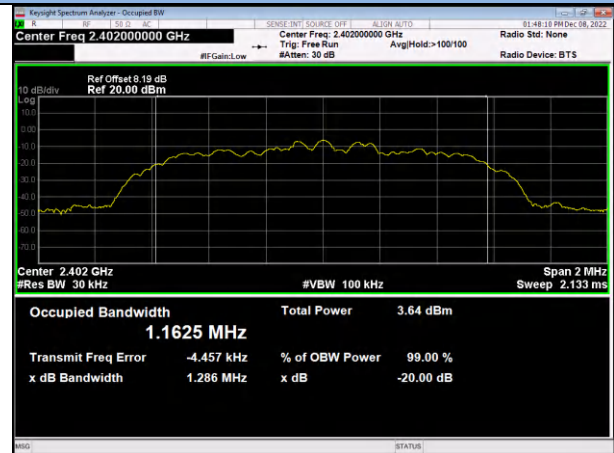

### $\pi/4$ -DQPSK / Mid Channel

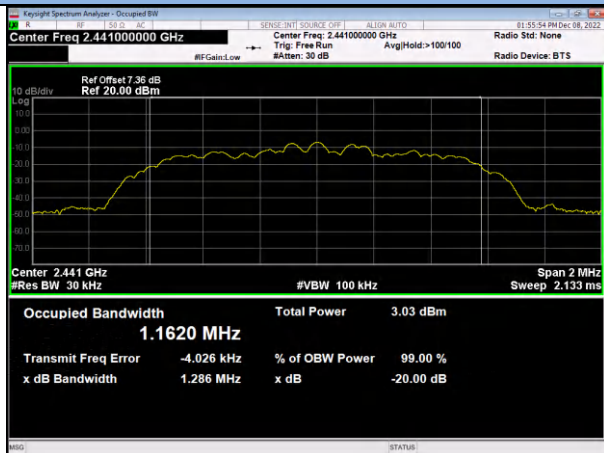


### $\pi/4$ -DQPSK / High Channel

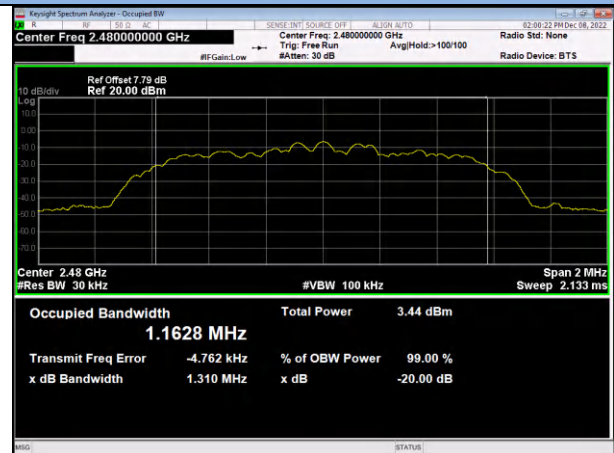





### 8DPSK / Low Channel

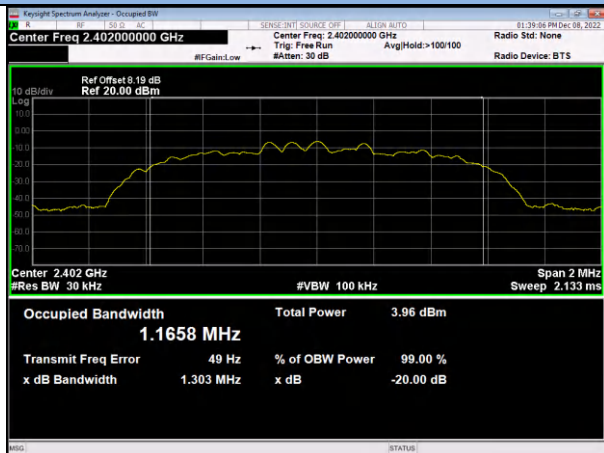

### 8DPSK / Mid Channel

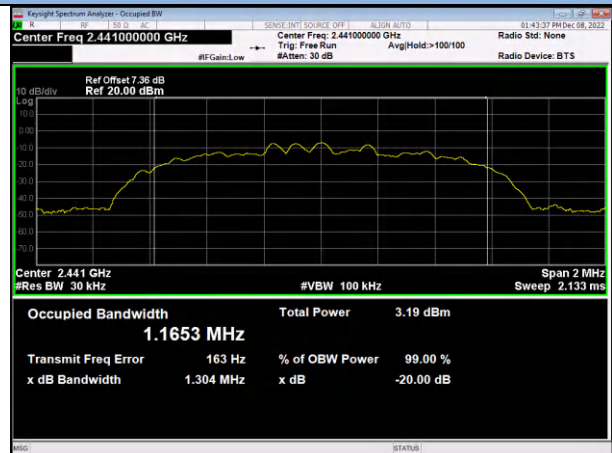

### 8DPSK / High Channel

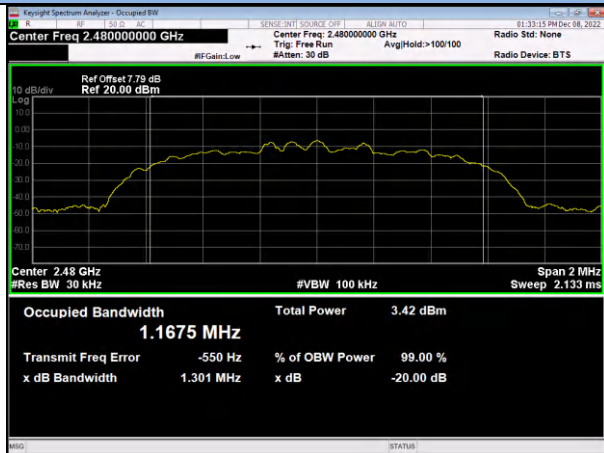

---

---




### 13.5 Hopping Channel Number

#### LIMIT

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.3.

#### TEST RESULTS


PASS

Please refer to the following table.

For left earphone

Modulation	Number of Hopping Channels Measurement	Limit	Test Result
GFSK	79	$\geq 15$	PASS
$\pi/4$ -DQPSK	79	$\geq 15$	PASS
8DPSK	79	$\geq 15$	PASS


The worst case: 8DPSK

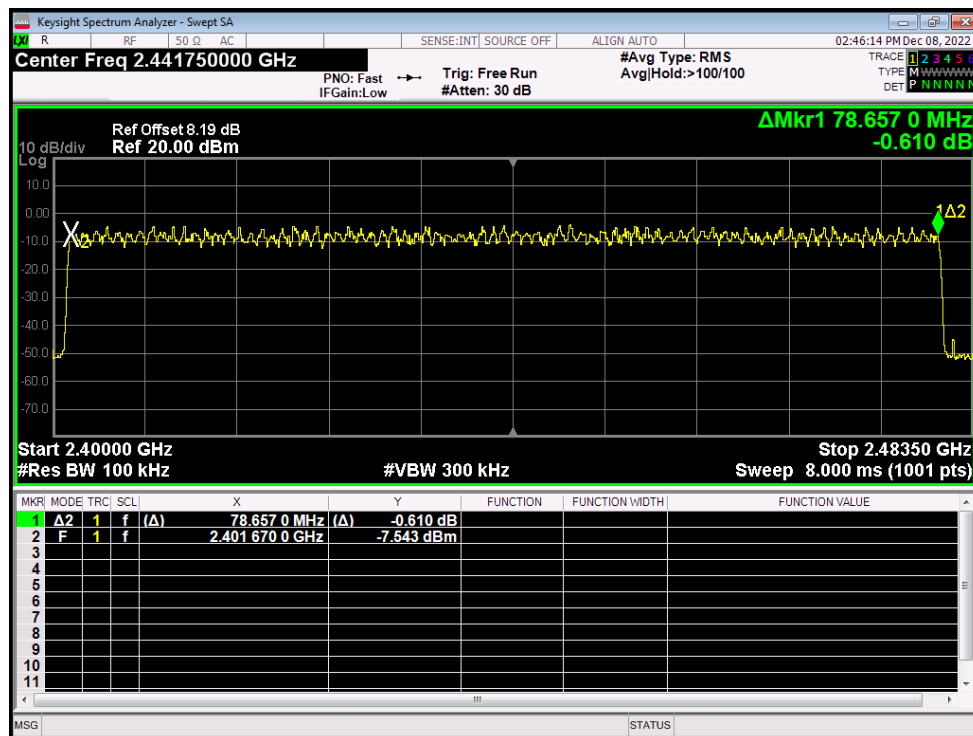

For right earphone

Modulation	Number of Hopping Channels Measurement	Limit	Test Result
GFSK	79	$\geq 15$	PASS
$\pi/4$ -DQPSK	79	$\geq 15$	PASS
8DPSK	79	$\geq 15$	PASS

The worst case: 8DPSK

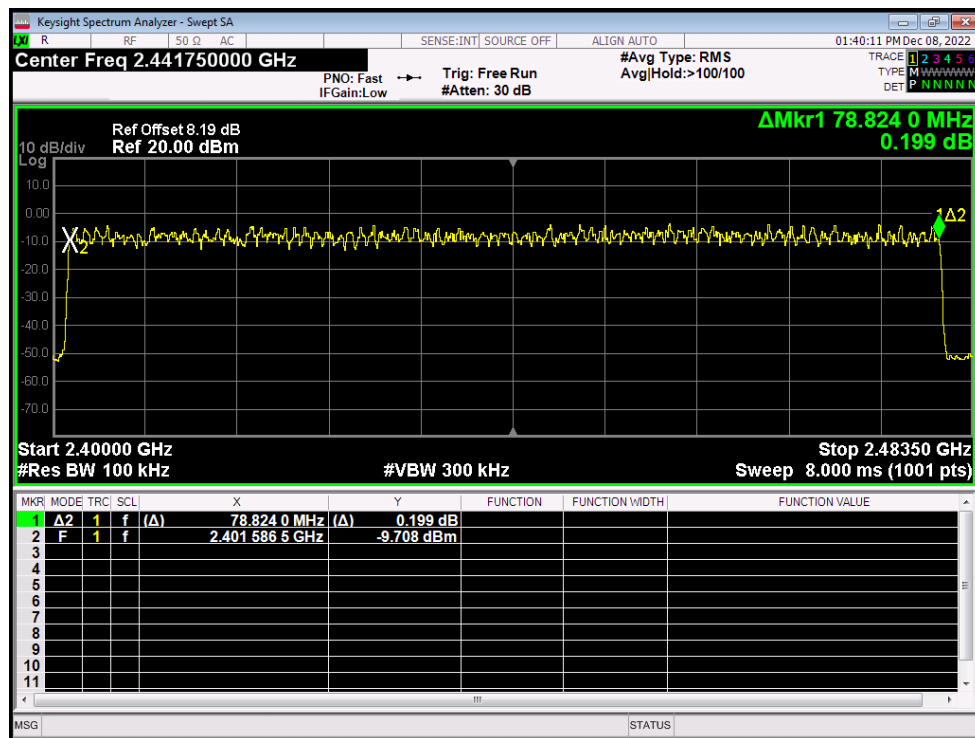


### 13.6 Time of Occupancy (Dwell Time)

#### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Enable the EUT hopping function.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.4.

#### TEST RESULTS


PASS

Please refer to the following table.


For left earphone

Modulation	Packet	Frequency (MHz)	Dwell Time Measurement (msec)	Limit (msec)	Test Result
GFSK	DH1	2441	0.400 (ms)*(1600/(2*79))*31.6= 128.00	400	Pass
	DH3	2441	1.655 (ms)*(1600/(4*79))*31.6= 264.80	400	Pass
	DH5	2441	2.908 (ms)*(1600/(6*79))*31.6= 310.19	400	Pass
π/4-DQPSK	2-DH1	2441	0.410 (ms)*(1600/(2*79))*31.6= 131.20	400	Pass
	2-DH3	2441	1.665 (ms)*(1600/(4*79))*31.6= 266.40	400	Pass
	2-DH5	2441	2.908 (ms)*(1600/(6*79))*31.6= 310.19	400	Pass
8DPSK	3-DH1	2441	0.410 (ms)*(1600/(2*79))*31.6= 131.20	400	Pass
	3-DH3	2441	1.660 (ms)*(1600/(4*79))*31.6= 265.60	400	Pass
	3-DH5	2441	2.908 (ms)*(1600/(6*79))*31.6= 310.19	400	Pass


### GFSK / DH1

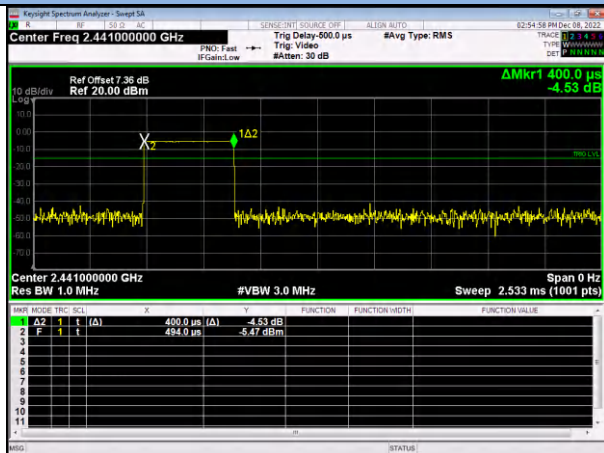


### GFSK / DH3

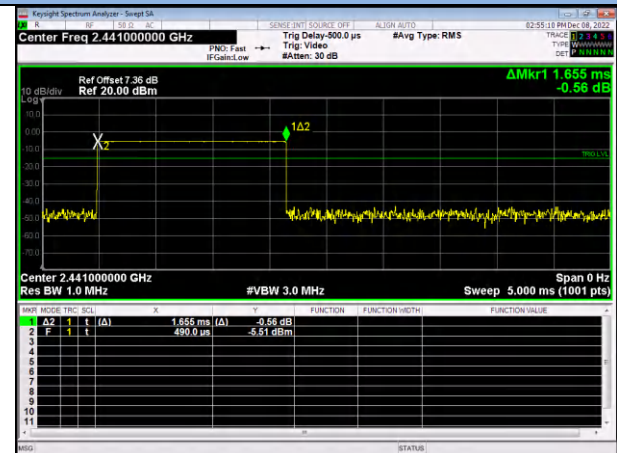


### GFSK / DH5

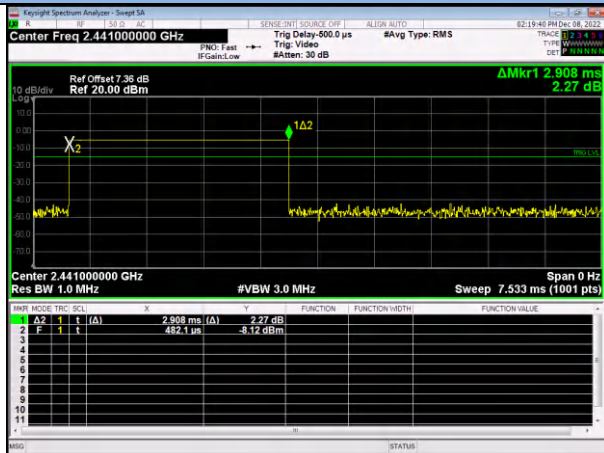


### π/4-DQPSK / 2-DH1

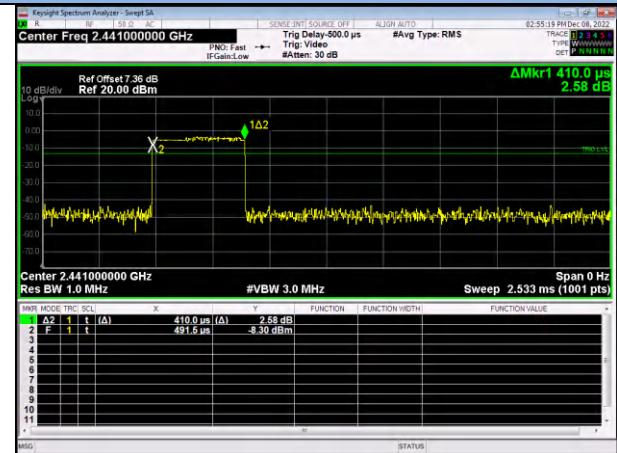


### π/4-DQPSK / 2-DH3

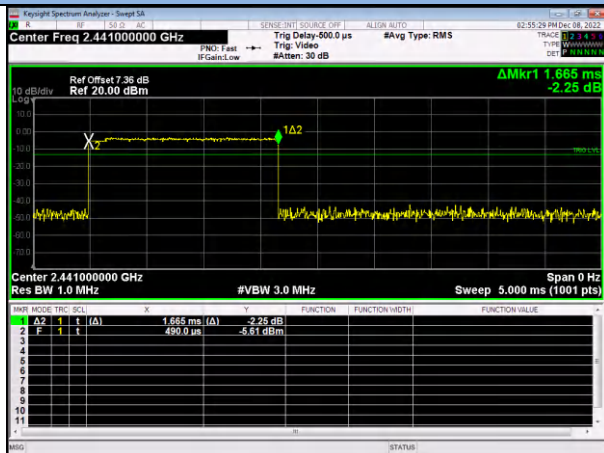

### π/4-DQPSK / 2-DH5

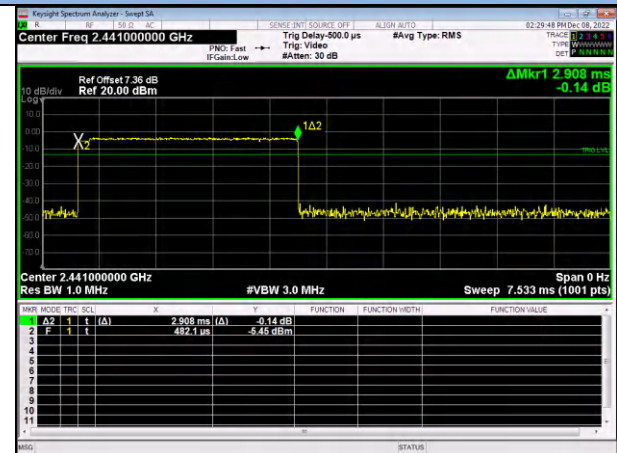

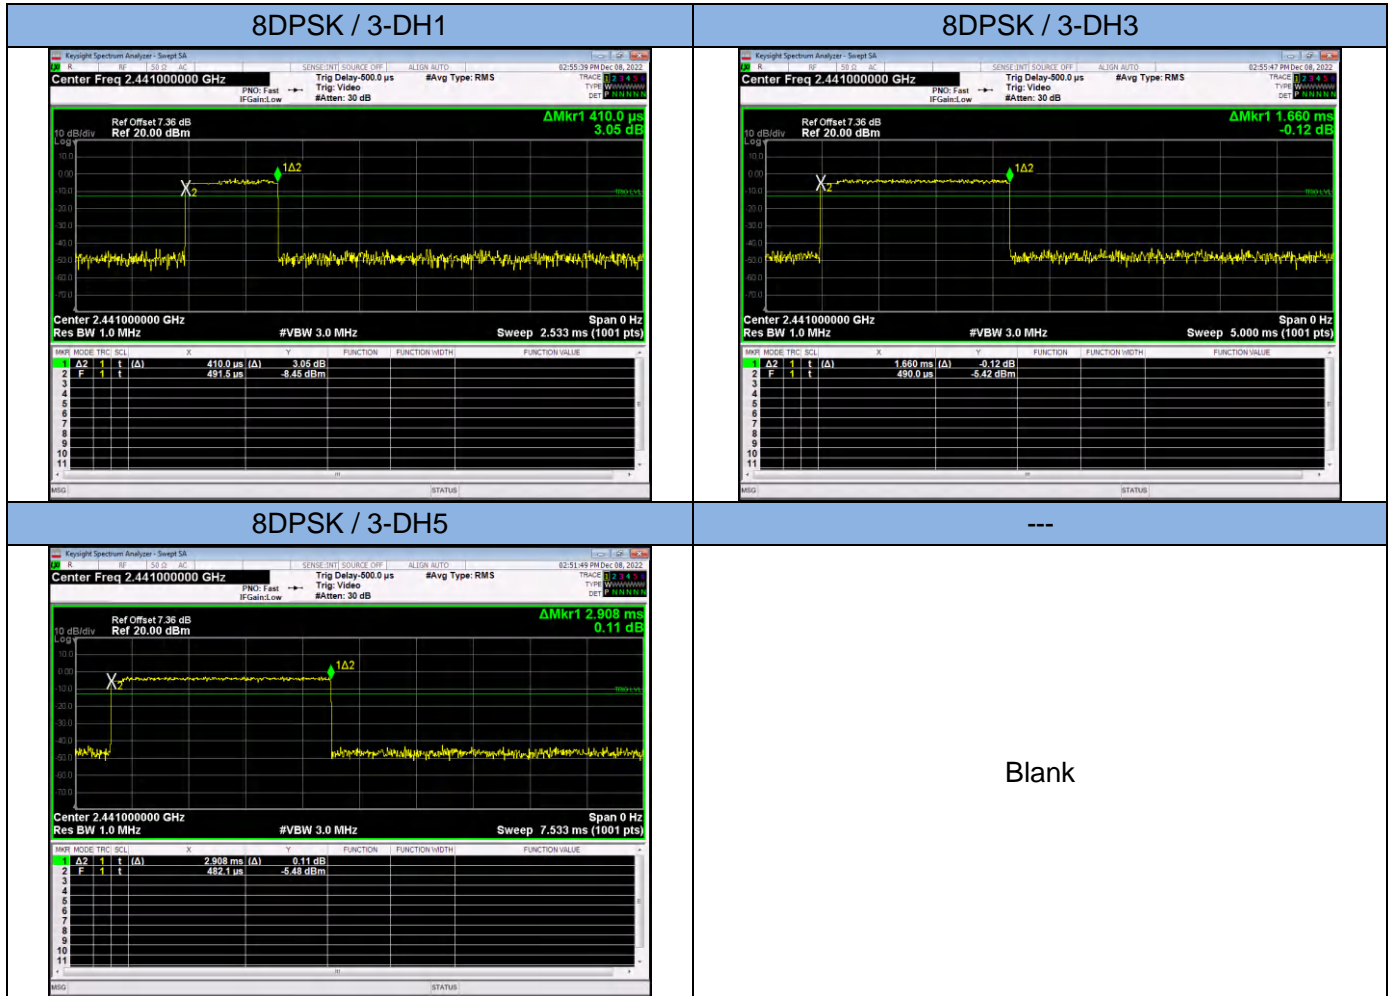


For right earphone


Modulation	Packet	Frequency (MHz)	Dwell Time Measurement (msec)	Limit (msec)	Test Result
GFSK	DH1	2441	0.400 (ms)*(1600/(2*79))*31.6= 128.00	400	Pass
	DH3	2441	1.660 (ms)*(1600/(4*79))*31.6= 265.60	400	Pass
	DH5	2441	2.900 (ms)*(1600/(6*79))*31.6= 309.33	400	Pass
π/4-DQPSK	2-DH1	2441	0.410 (ms)*(1600/(2*79))*31.6= 131.20	400	Pass
	2-DH3	2441	1.665 (ms)*(1600/(4*79))*31.6= 266.40	400	Pass
	2-DH5	2441	2.915 (ms)*(1600/(6*79))*31.6= 310.93	400	Pass
8DPSK	3-DH1	2441	0.410 (ms)*(1600/(2*79))*31.6= 131.20	400	Pass
	3-DH3	2441	1.660 (ms)*(1600/(4*79))*31.6= 265.60	400	Pass
	3-DH5	2441	2.908 (ms)*(1600/(6*79))*31.6= 310.19	400	Pass



GFSK / DH1

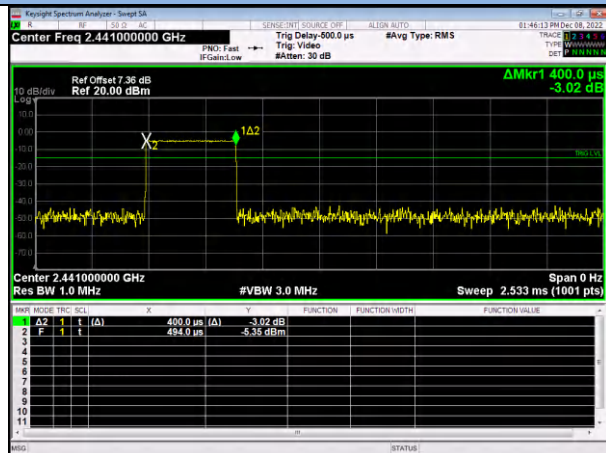


GFSK / DH3

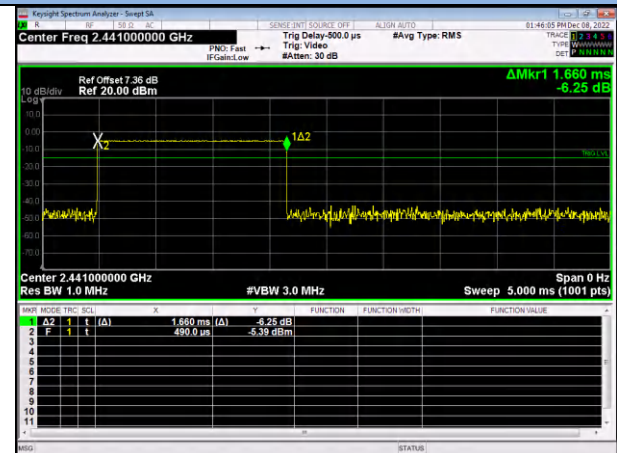


GFSK / DH5




π/4-DQPSK / 2-DH1

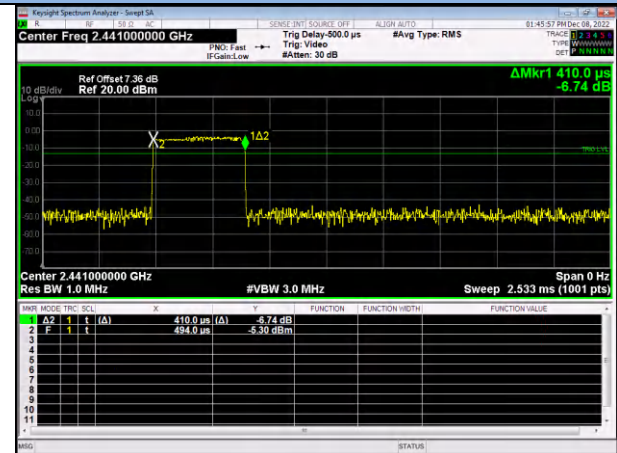


π/4-DQPSK / 2-DH3

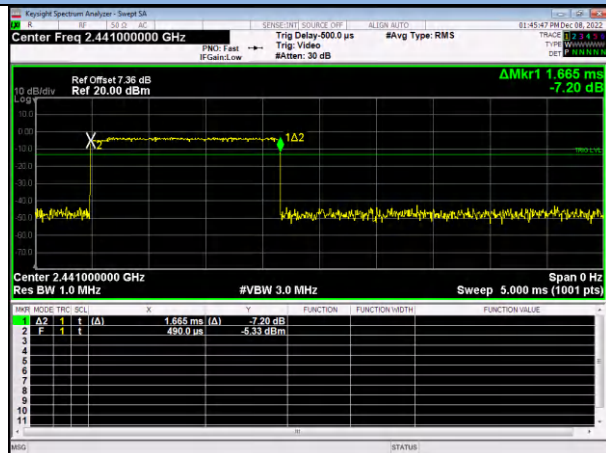


π/4-DQPSK / 2-DH5

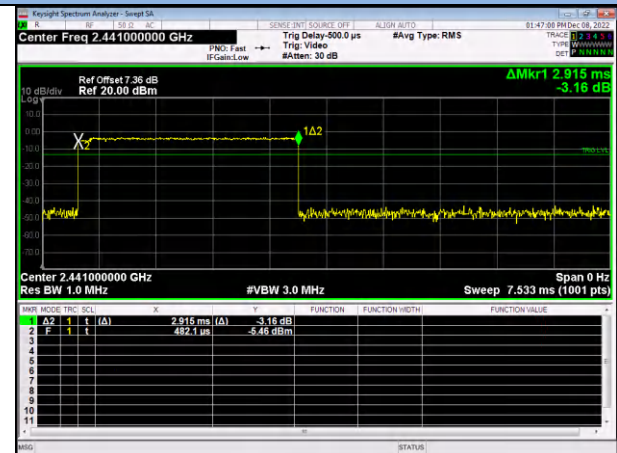

### 8DPSK / 3-DH1

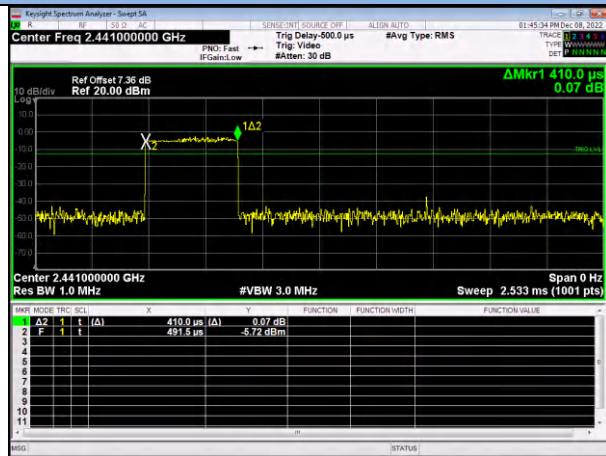

### 8DPSK / 3-DH3

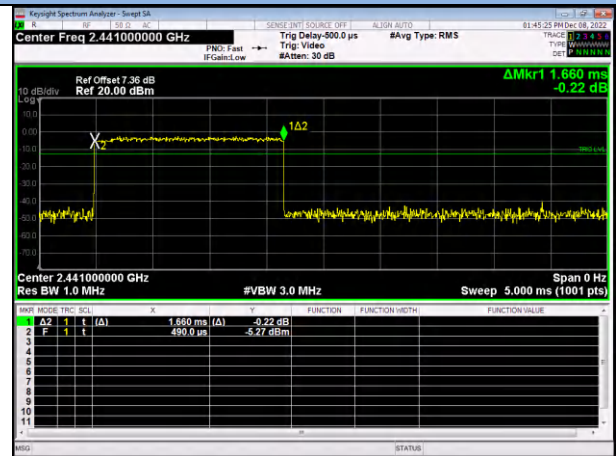

### 8DPSK / 3-DH5




Blank

### 13.7 Maximum Peak Output Power

#### LIMIT

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.5.


#### TEST RESULTS


PASS

Please refer to the following tables.

For left earphone

Modulation	Frequency (MHz)	Peak Power output Measurement (dBm)	Peak Power output Measurement (mW)	Peak Power Limit (dBm)	Test Result
GFSK	2402.00	-4.395	0.36	30	Pass
	2441.00	-5.217	0.30	30	Pass
	2480.00	-5.215	0.30	30	Pass
$\pi/4$ -DQPSK	2402.00	-2.283	0.59	21	Pass
	2441.00	-3.053	0.50	21	Pass
	2480.00	-3.087	0.49	21	Pass
8DPSK	2402.00	-1.736	0.67	21	Pass
	2441.00	-2.476	0.57	21	Pass
	2480.00	-2.542	0.56	21	Pass

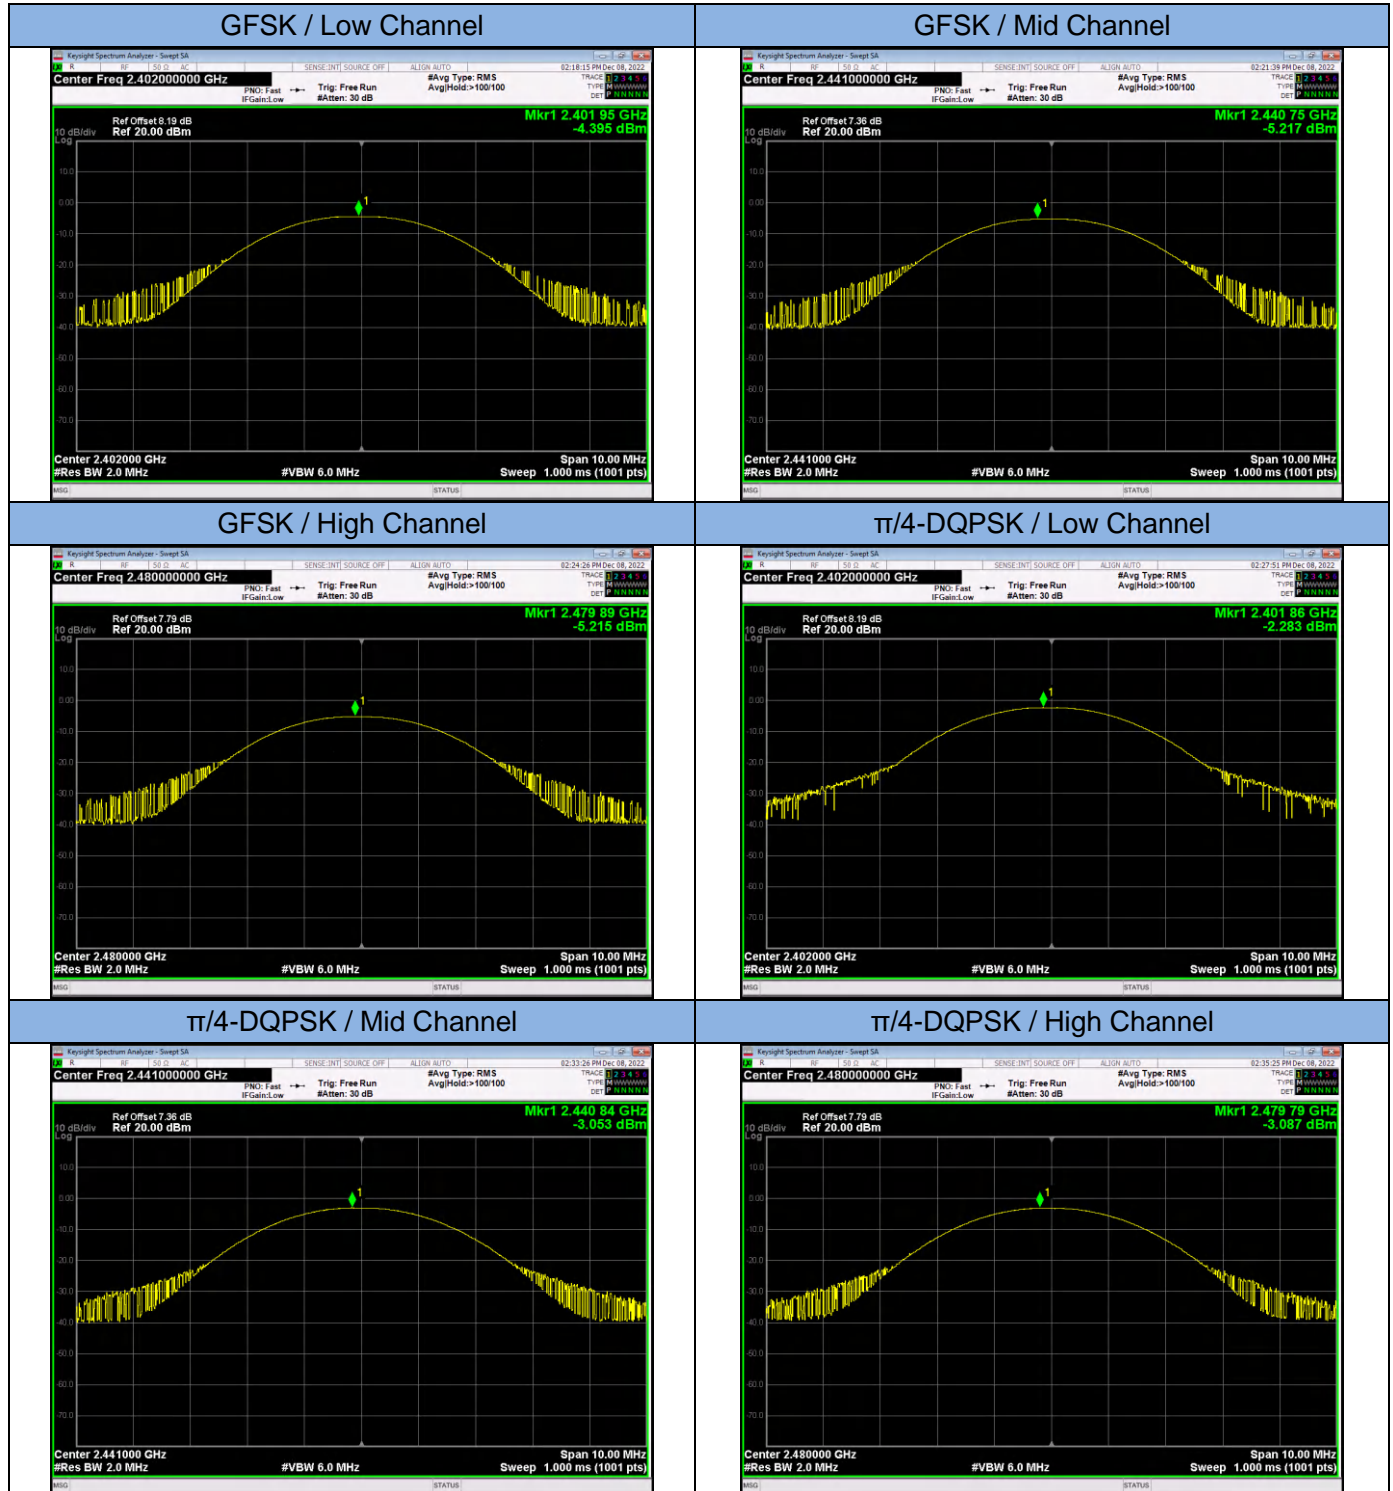

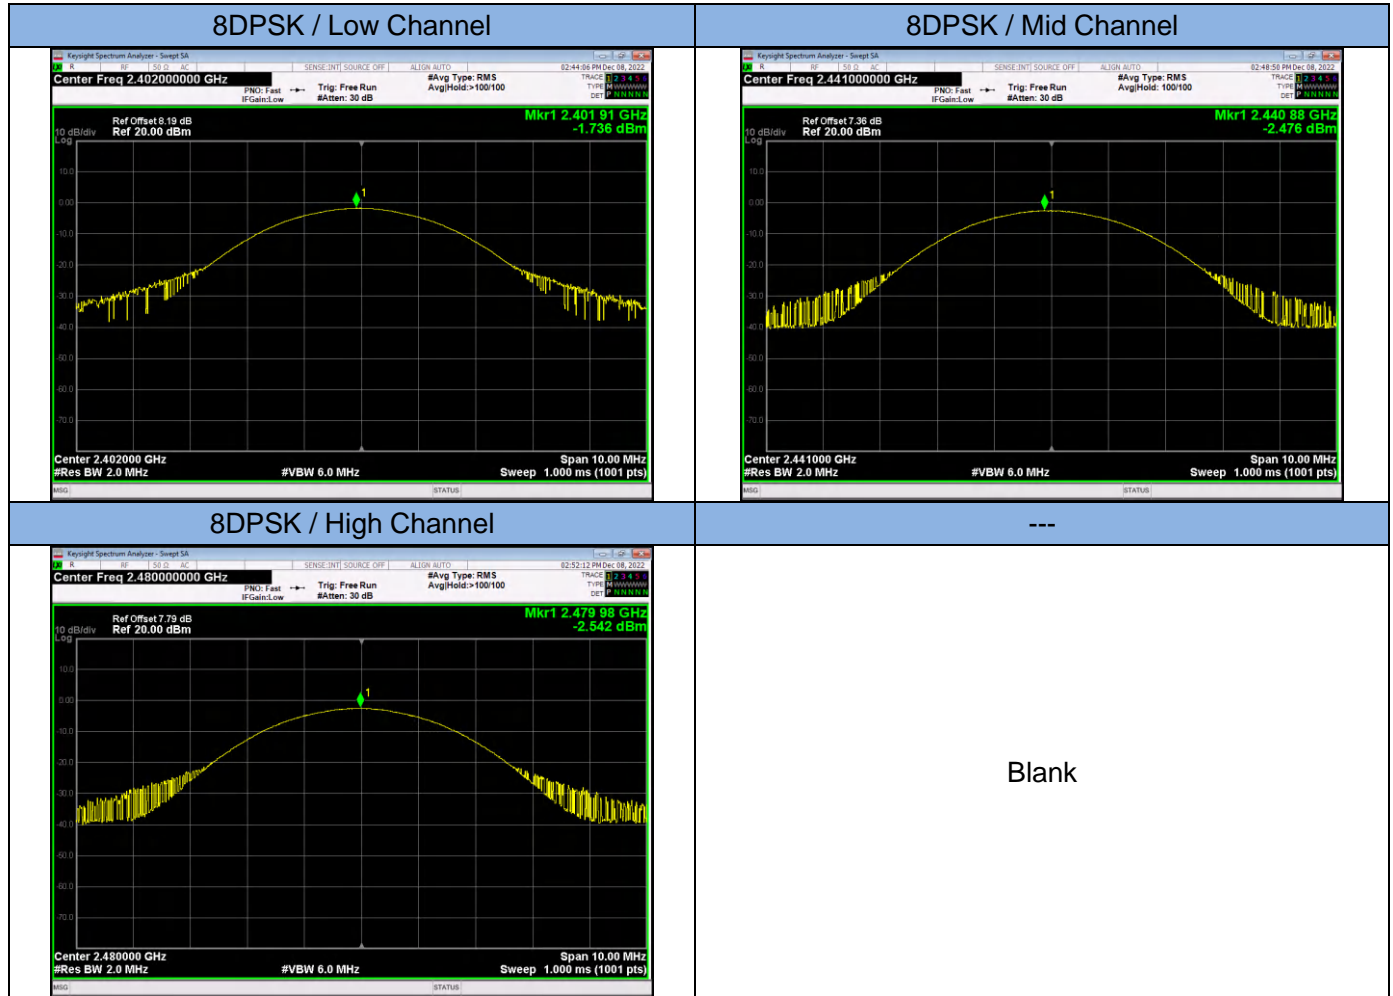


For right earphone


Modulation	Frequency (MHz)	Peak Power output Measurement (dBm)	Peak Power output Measurement (mW)	Peak Power Limit (dBm)	Test Result
GFSK	2402.00	-4.248	0.38	30	Pass
	2441.00	-4.862	0.33	30	Pass
	2480.00	-4.531	0.35	30	Pass
$\pi/4$ -DQPSK	2402.00	-2.079	0.62	21	Pass
	2441.00	-2.768	0.53	21	Pass
	2480.00	-2.466	0.57	21	Pass
8DPSK	2402.00	-1.549	0.70	21	Pass
	2441.00	-2.236	0.60	21	Pass
	2480.00	-1.884	0.65	21	Pass



### GFSK / Low Channel

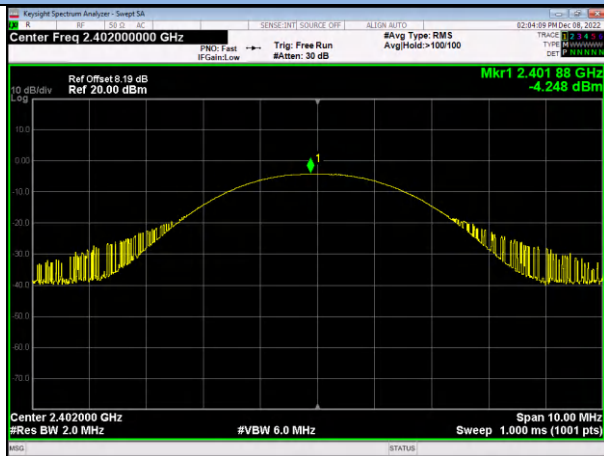


### GFSK / Mid Channel

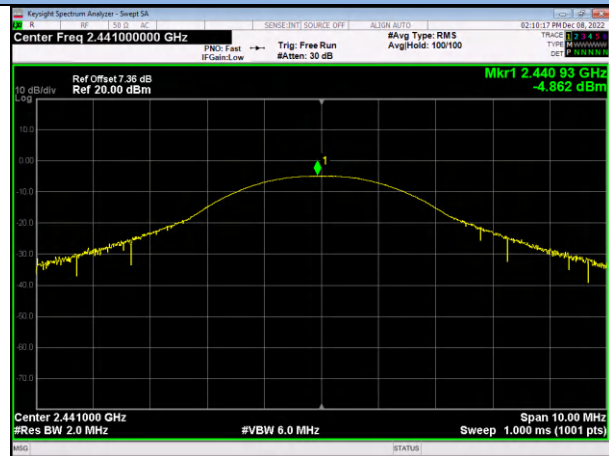

### GFSK / High Channel




### $\pi/4$ -DQPSK / Low Channel

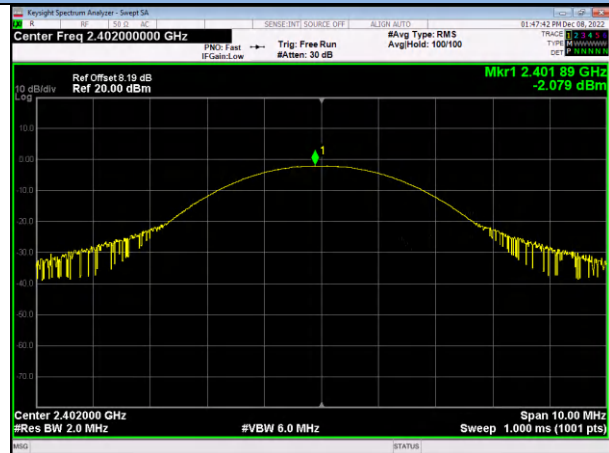


### $\pi/4$ -DQPSK / Mid Channel



### $\pi/4$ -DQPSK / High Channel

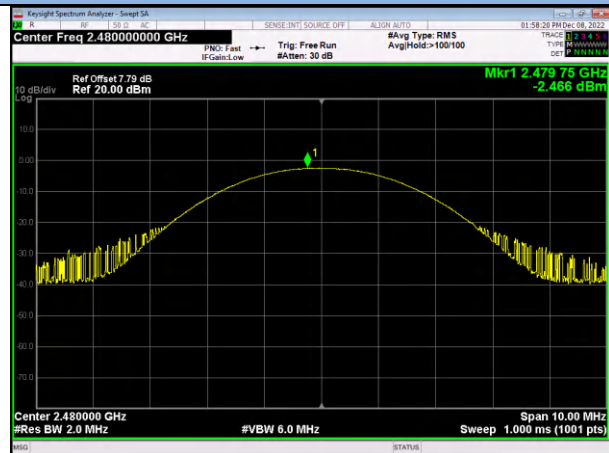



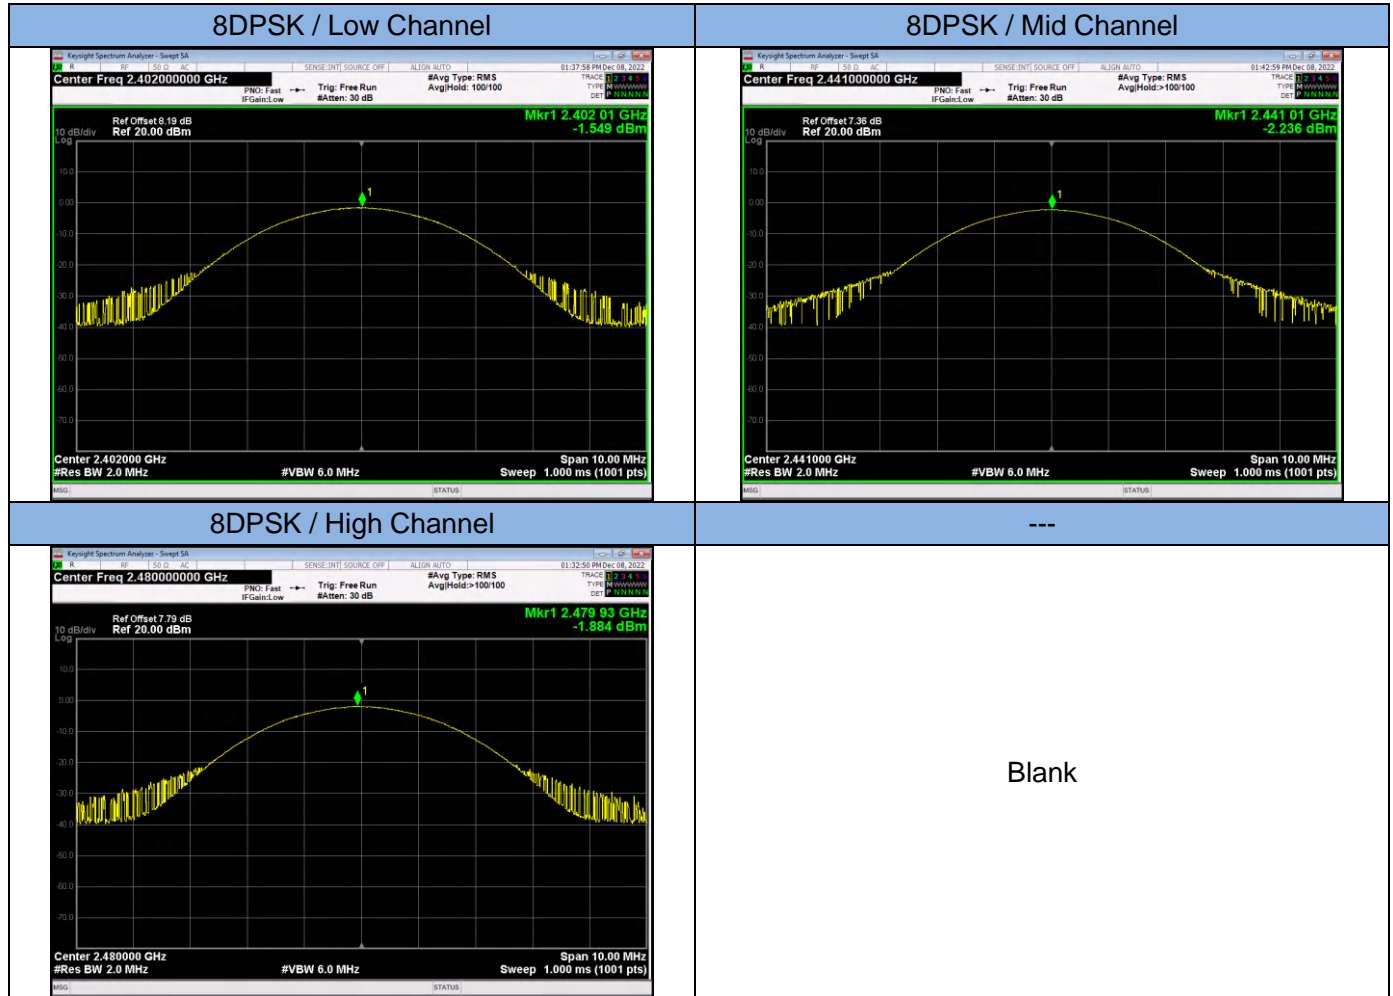


## 13.8 Band Edge Conducted Spurious Emission Measurement

### LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### BLOCK DIAGRAM OF TEST SETUP



### TEST PROCEDURES

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Set spectrum analyzer and perform testing according to ANSI C63.10 clause 7.8.6 and 6.10.
- Enable hopping function of the EUT and then repeat steps above.


### TEST RESULTS

PASS


Please refer to the following test plots.

**For left earphone  
Band Edge**

**GFSK / Low / 2402**

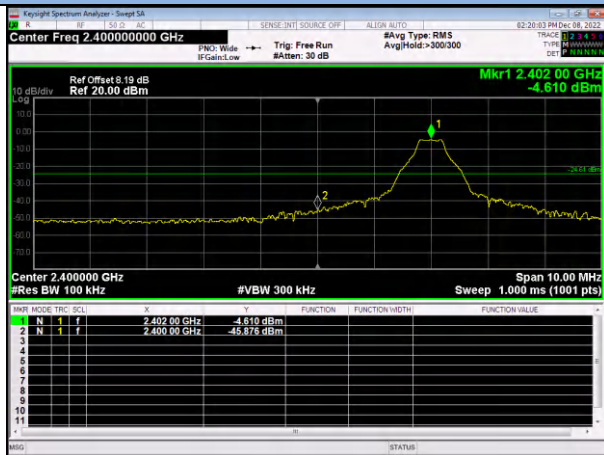

**GFSK / Hopping**

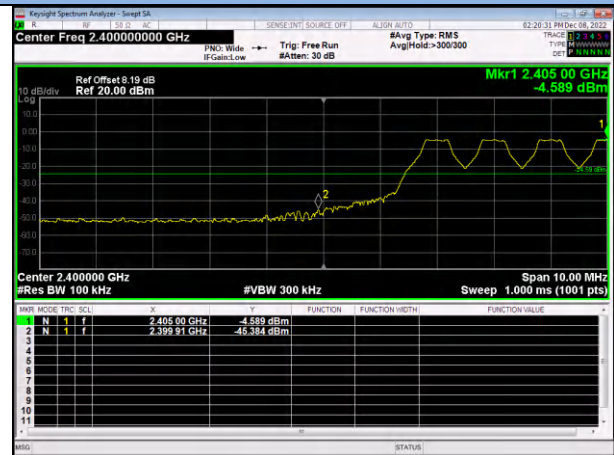

**GFSK / High Channel / 2480**




**GFSK / Hopping**




## Band Edge


### $\pi/4$ -DQPSK / Low / 2402

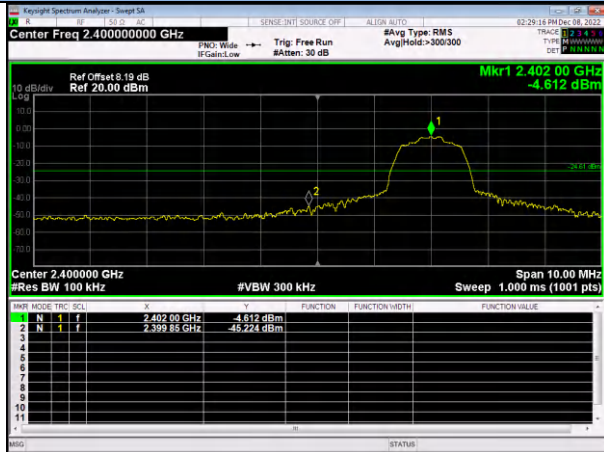

### $\pi/4$ -DQPSK / Hopping

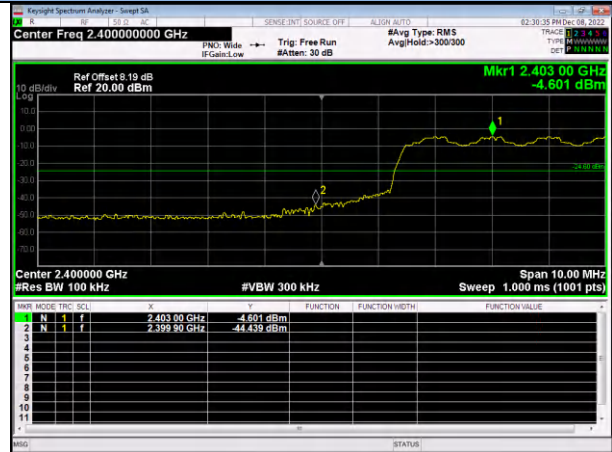

### $\pi/4$ -DQPSK / High / 2480

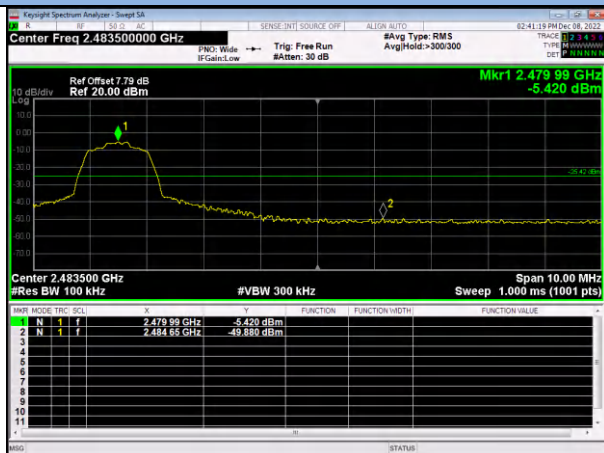


### $\pi/4$ -DQPSK / Hopping




## Band Edge


### 8DPSK / Low / 2402

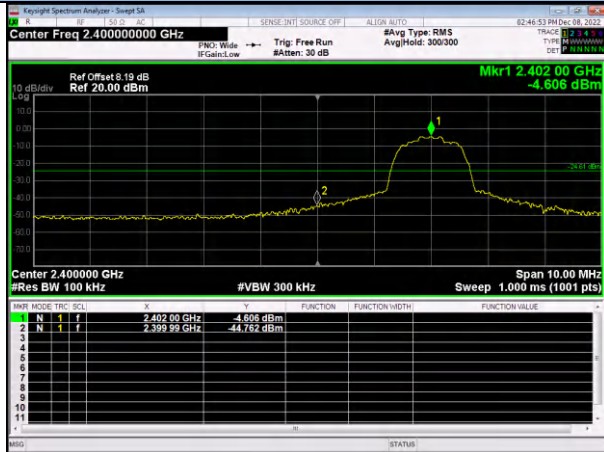


### 8DPSK / Hopping

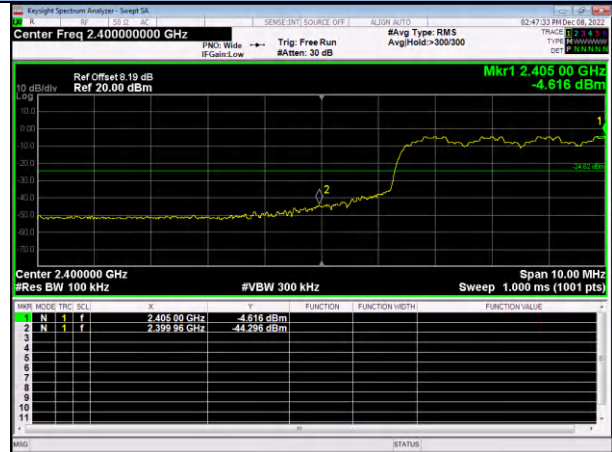

### 8DPSK / High / 2480

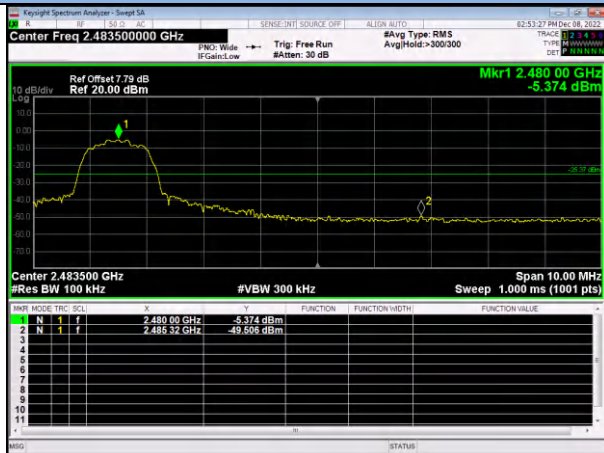


### 8DPSK / Hopping

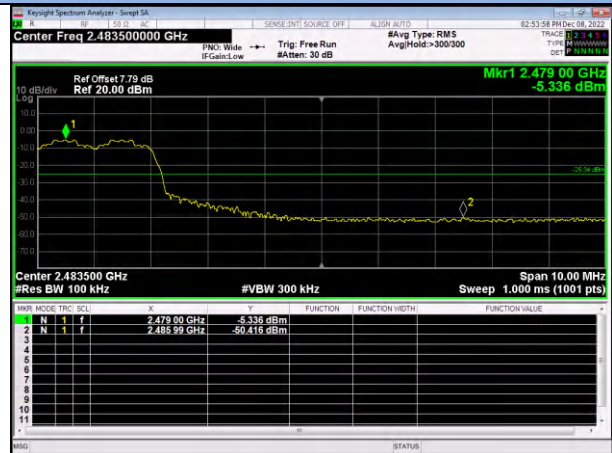




For left earphone  
Conducted Spurious Emission (the worst case)


8DPSK / Low Channel / 30MHz~26.5GHz

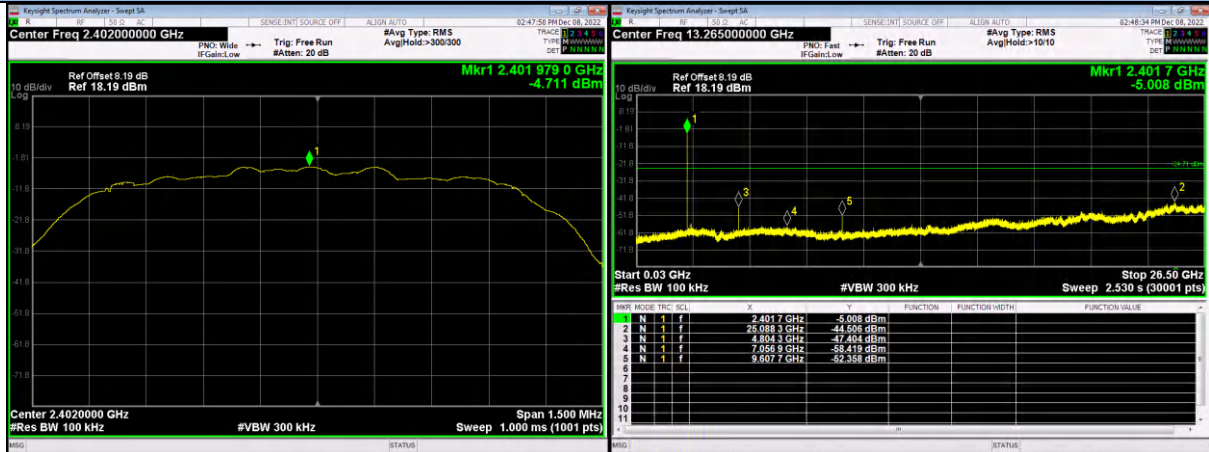

8DPSK / Mid Channel / 30MHz~26.5GHz

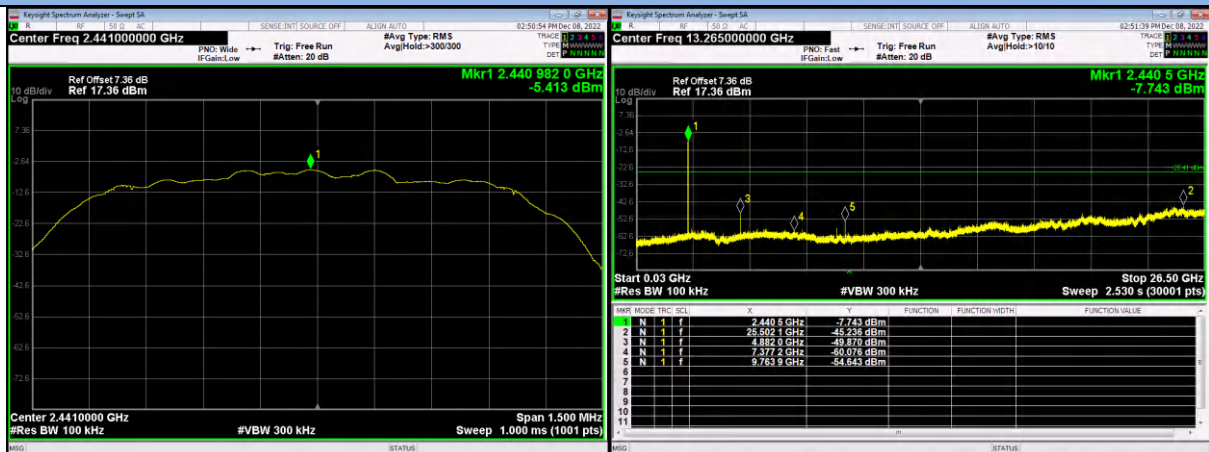


8DPSK / High Channel / 30MHz~26.5GHz

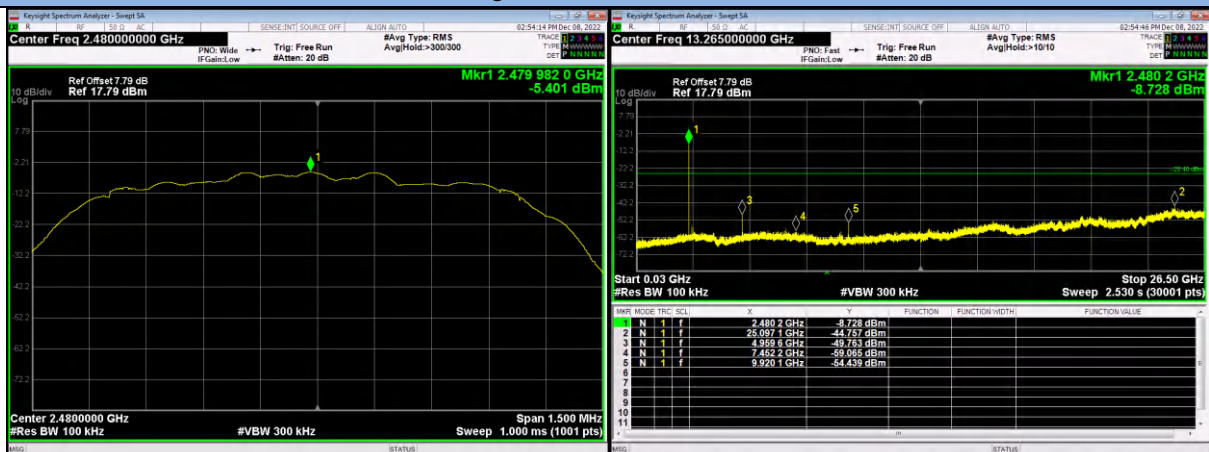


**For right earphone  
Band Edge**


**GFSK / Low / 2402**

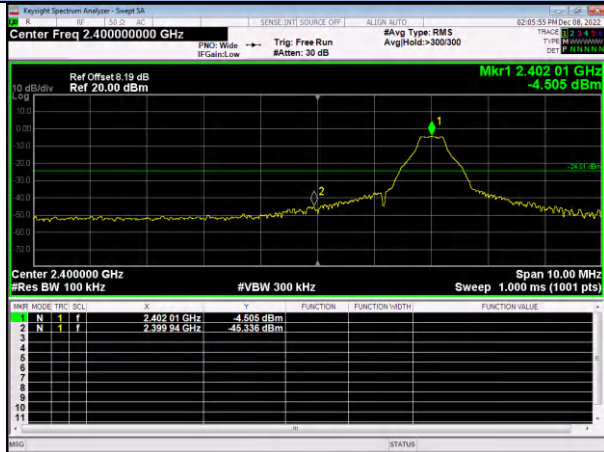


**GFSK / Hopping**

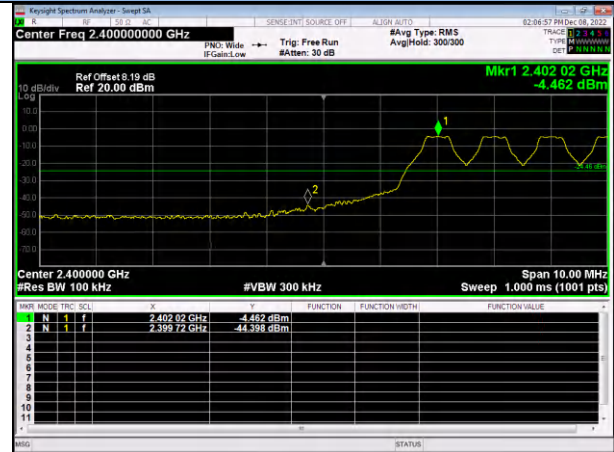

**GFSK / High Channel / 2480**

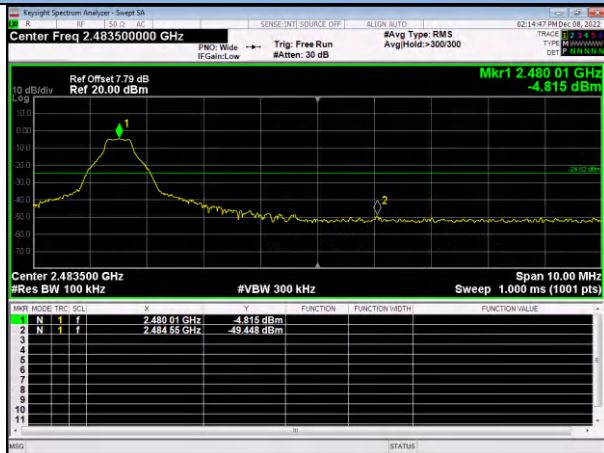


**GFSK / Hopping**

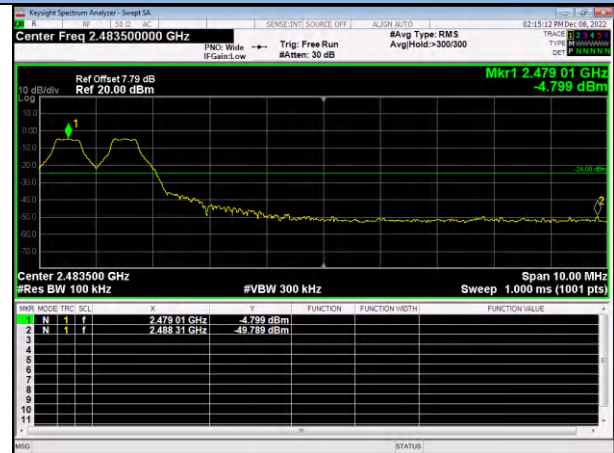


## Band Edge


### $\pi/4$ -DQPSK / Low / 2402

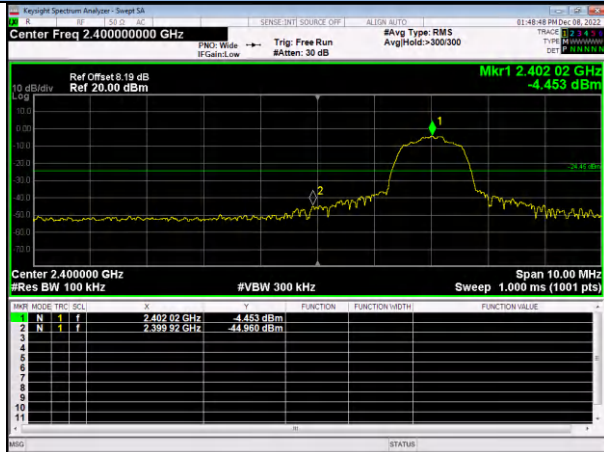

### $\pi/4$ -DQPSK / Hopping

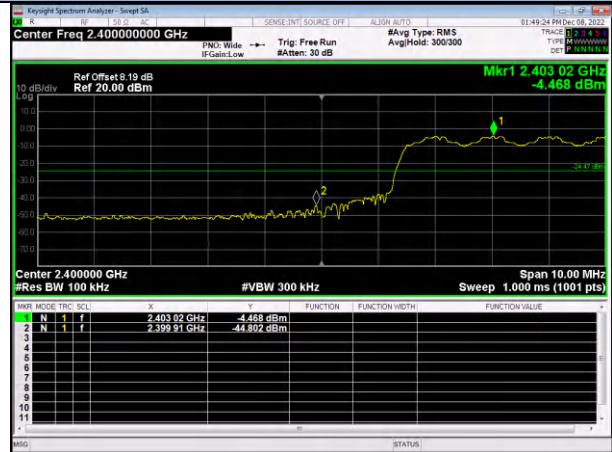

### $\pi/4$ -DQPSK / High / 2480

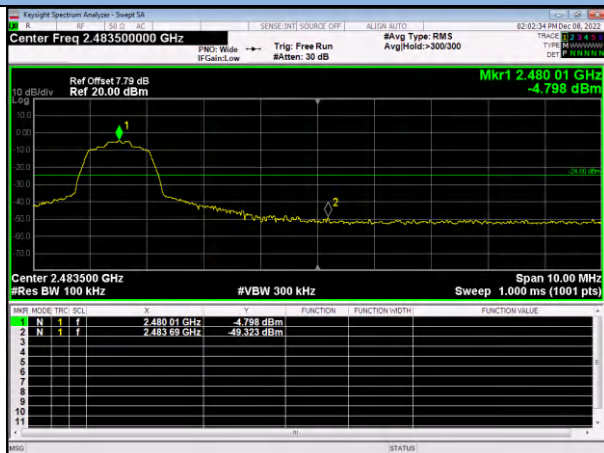


### $\pi/4$ -DQPSK / Hopping






## Band Edge


### 8DPSK / Low / 2402

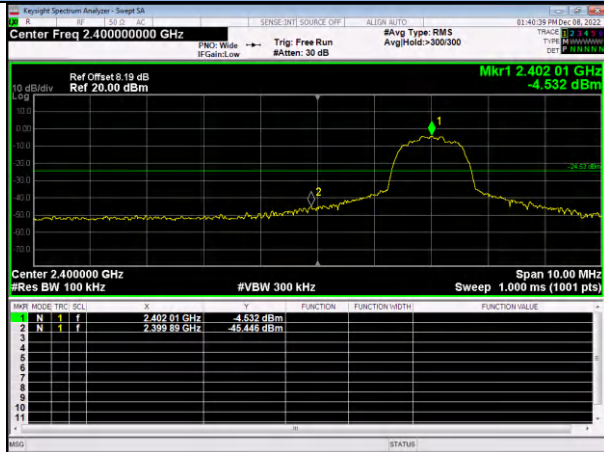


### 8DPSK / Hopping

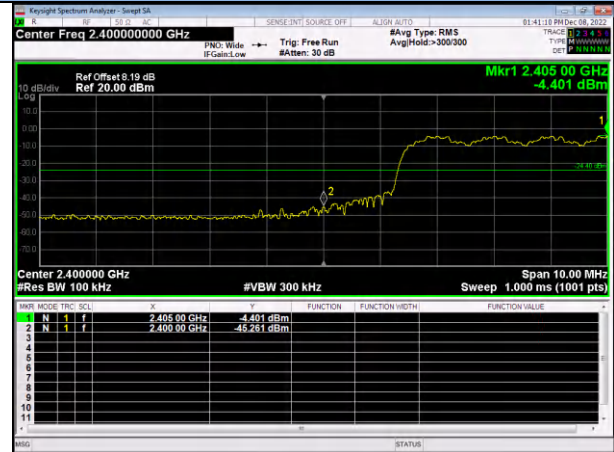

### 8DPSK / High / 2480

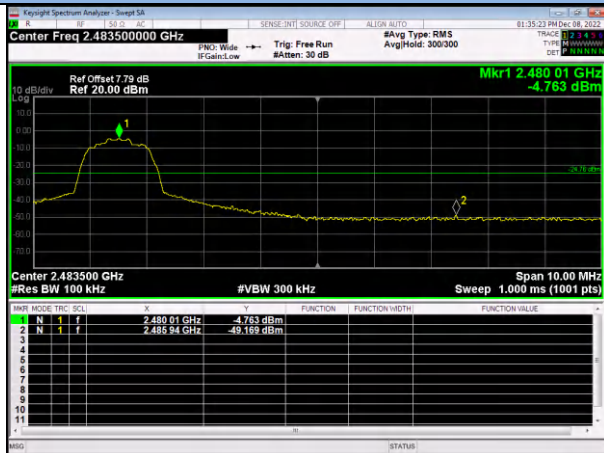


### 8DPSK / Hopping

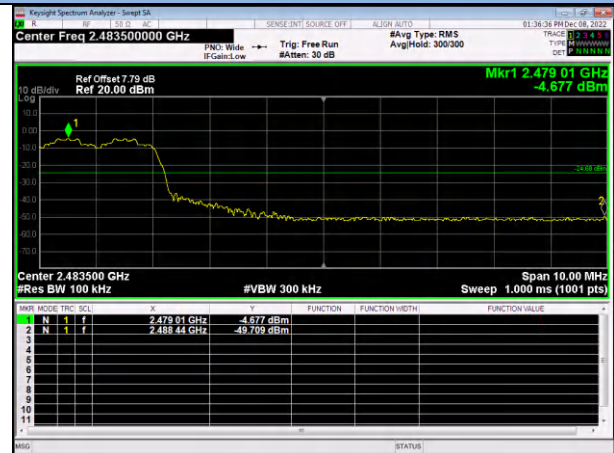


For right earphone  
Conducted Spurious Emission (the worst case)


8DPSK / Low Channel / 30MHz~26.5GHz

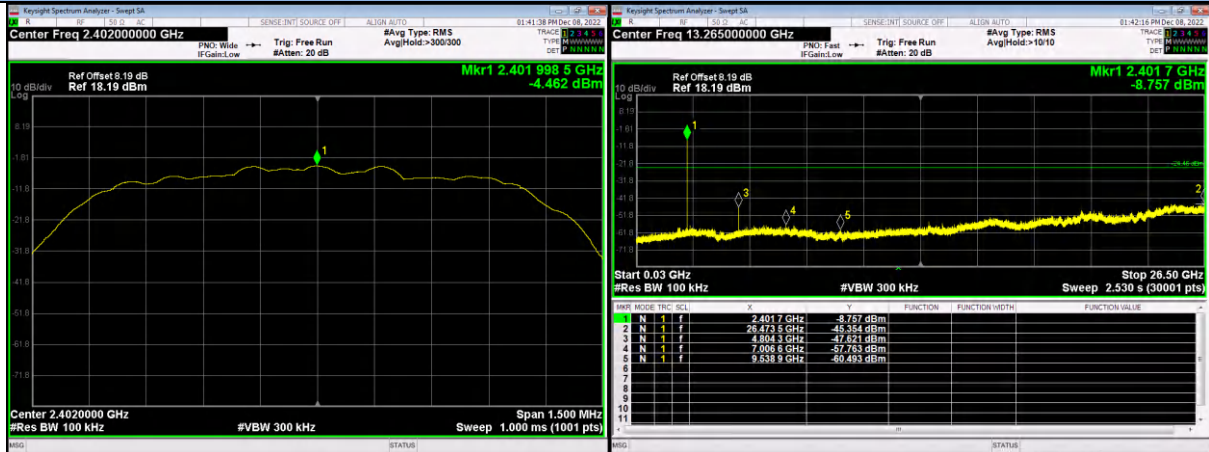

8DPSK / Mid Channel / 30MHz~26.5GHz

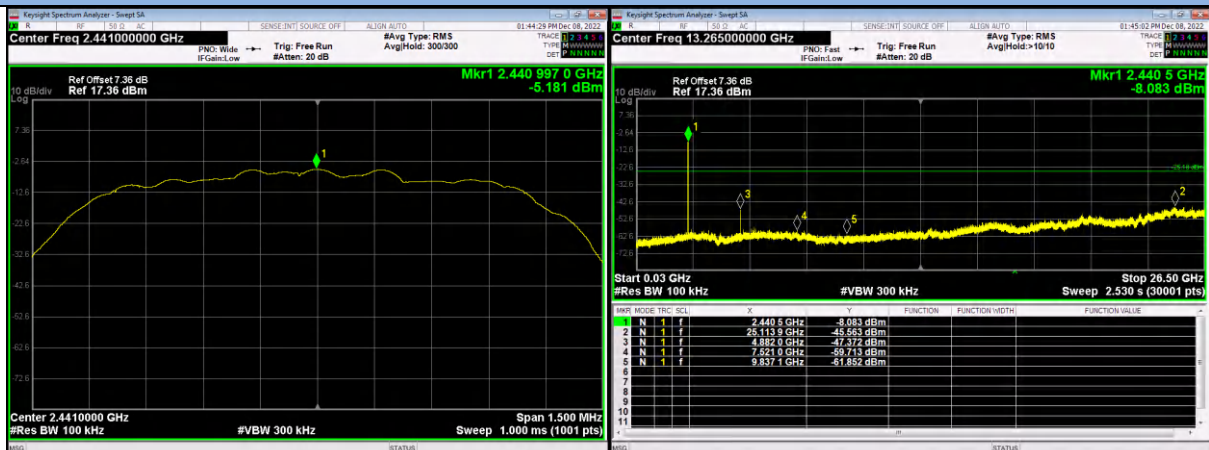

8DPSK / High Channel / 30MHz~26.5GHz

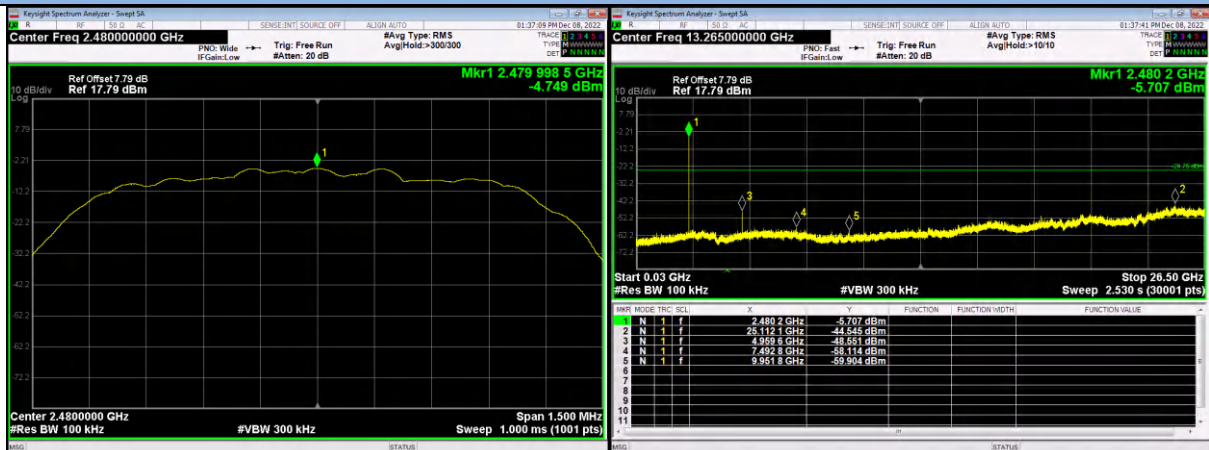

## 13.9 Antenna Requirement

### STANDARD APPLICABLE

According to of FCC part 15C section 15.203 and 15.247:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### ANTENNA CONNECTED CONSTRUCTION

For left earphone, the antenna is FPC antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 3.19dBi, Therefore, the antenna is considered to meet the requirement.

For right earphone, the antenna is FPC antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 3.19dBi, Therefore, the antenna is considered to meet the requirement.

## 14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2022	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2022	2 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2022	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2022	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2022	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 23, 2022	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 13, 2022	1 Year
8.	Communication Tester	Rohde & Schwarz	CMW500	149004	Mar. 13, 2022	1 Year
9.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2022	2 Year
10.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2022	1 Year
11.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2022	1 Year
12.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2022	2 Year
13.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 13, 2022	1 Year
14.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2022	1 Year
15.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	893606/014	Mar. 13, 2022	1 Year
16.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar. 13, 2022	1 Year
17.	Temperature & Humidity Chamber	REMAFEE	SYHR225L	N/A	Mar. 13, 2022	1 Year
18.	DC Source	Maynuo	MY8811	N/A	Mar. 13, 2022	1 Year
19.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
20.	Chamber	SAEMC	9*7*7m	N/A	Apr. 21, 2021	2 Year
21.	Test Software	EZ	EZ EMC	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---