

Appendix C – Highest Test Plots

Date: 2025/3/4

7_WLAN2.4G_802.11b_Bottom of laptop_0mm_Ch6_ANT 1_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.002
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 38.95$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.73, 7.11, 7.58) @ 2437 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.611 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.93 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.191 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.632 W/kg

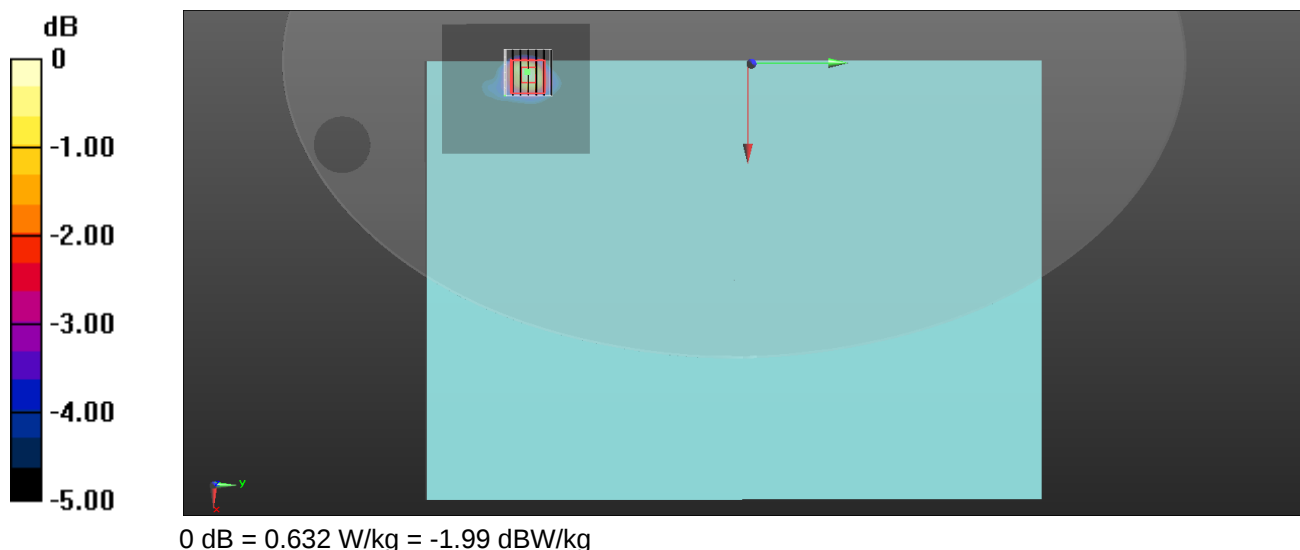

Date: 2025/3/5

14_WLAN5.3G_802.11n HT40_Front Edge of Laptop_0mm_Ch54_ANT 0_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11n(5GHz)HT40 (0); Frequency: 5270 MHz;Duty Cycle: 1:1.069
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.344$ S/m; $\epsilon_r = 33.332$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(5.68, 5.15, 5.5) @ 5270 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.91 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.93 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.210 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 1.97 W/kg

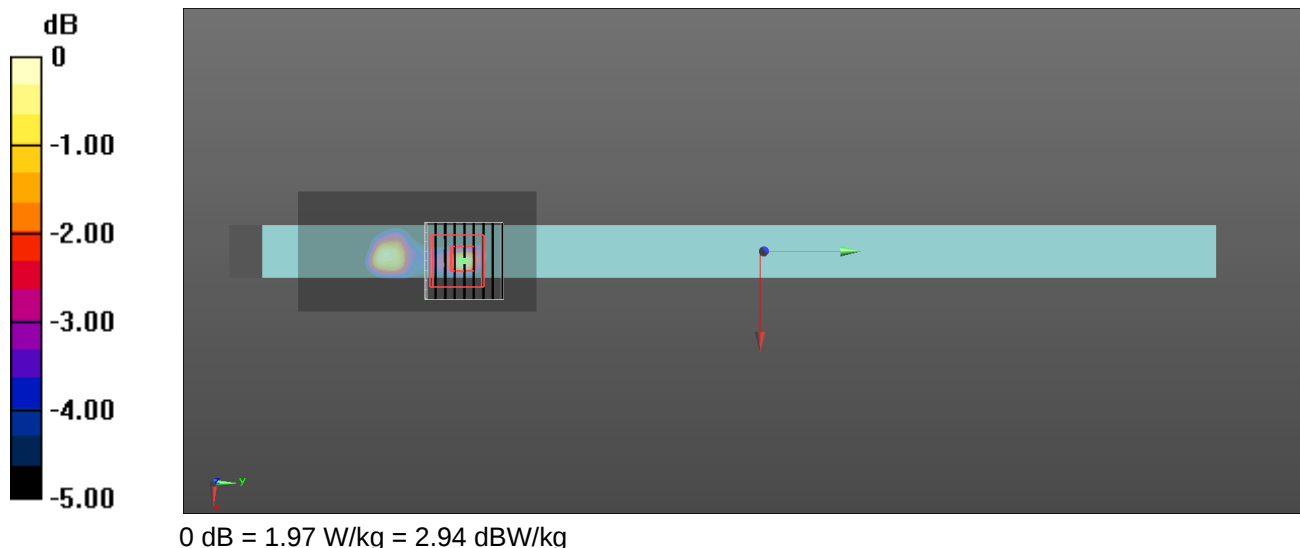

Date: 2025/3/6

38_WLAN5.6G_802.11ac VHT80_Front Edge of Laptop_0mm_Ch138_ANT 1_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5690 MHz;Duty Cycle: 1:1.085
Medium parameters used: $f = 5690$ MHz; $\sigma = 4.848$ S/m; $\epsilon_r = 32.672$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.9, 4.47, 4.74) @ 5690 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.773 W/kg

Zoom Scan (9x12x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.14 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.115 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.6%

Maximum value of SAR (measured) = 0.984 W/kg

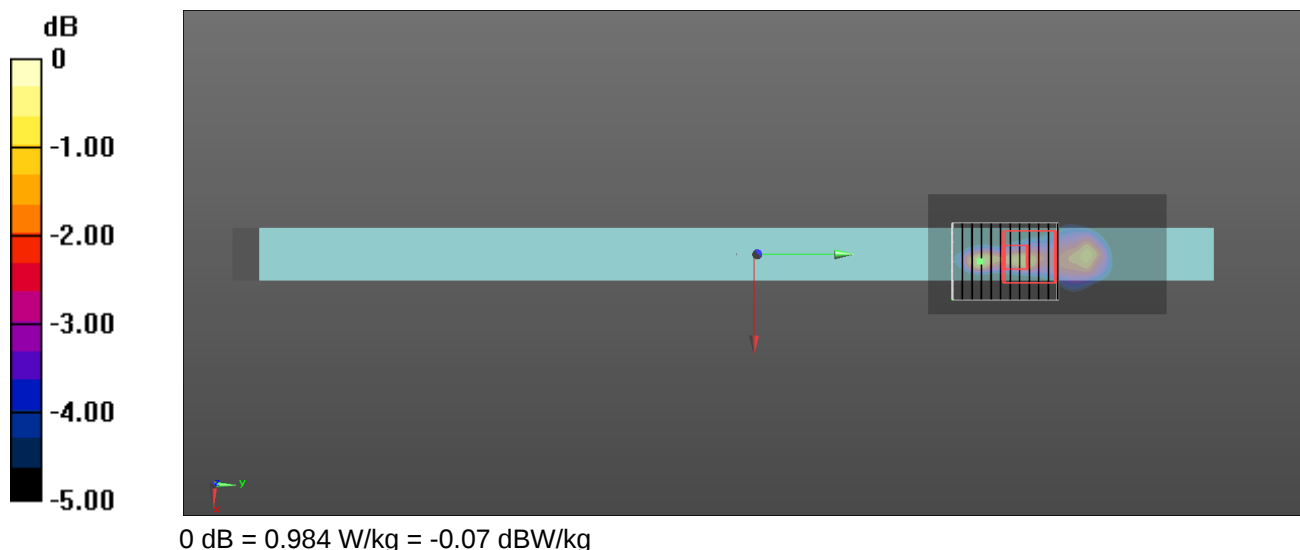

Date: 2025/3/7

47_WLAN5.8G_802.11ac VHT80_Front Edge of Laptop_0mm_Ch171_ANT 1_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5855 MHz;Duty Cycle: 1:1.085
Medium parameters used: $f = 5855$ MHz; $\sigma = 4.835$ S/m; $\epsilon_r = 32.466$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(5.03, 4.62, 4.96) @ 5855 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.882 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.11 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.144 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 0.877 W/kg

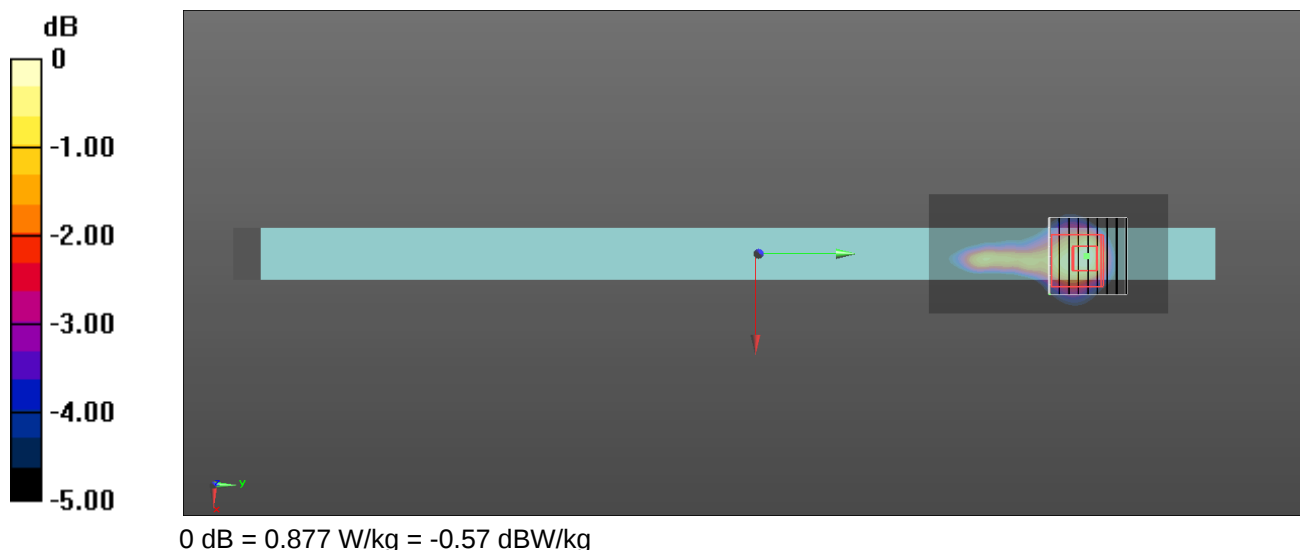

Date: 2025/3/4

50_Bluetooth_GFSK_Bottom of laptop_0mm_Ch39_ANT 1_Sample 1

DUT: FA808U

Communication System: UID 0, Bluetooth 3.0 (0); Frequency: 2441 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2441$ MHz; $\sigma = 1.726$ S/m; $\epsilon_r = 38.946$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.73, 7.11, 7.58) @ 2441 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0750 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.220 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.024 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.0747 W/kg

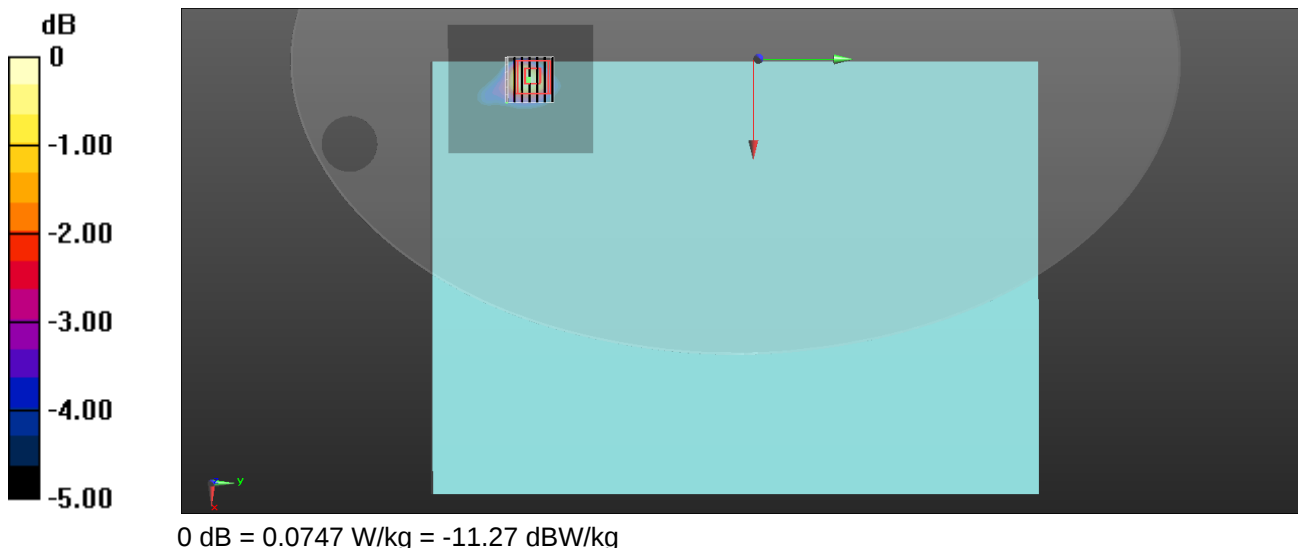

Test Date : 2025-03-07 | Ambient Temp : 21.8 °C | Tissue Temp : 21.5 °C

Test Mode**67_U-NII 8_802.11ax HE160_Bottom of laptop_0mm_Ch207_ANT 0_Sample 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA808U	T2NTCX00165707B	Laptop

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-8	WLAN, 10755 - AAC	6985.000, 207	5.2	6.60	31.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HBBL-600-10000V6	EX3DV4 - SN7647 / 2024-04-24	DAE4 Sn1253 / 2024-04-22
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.379	0.488
psSAR-10g [W/kg]	0.105	0.117
psAPD (1.0 cm ² , sq) [W/m ²]		4.88
psAPD (4.0 cm ² , sq) [W/m ²]		2.73
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		49.4
Dist 3dB Peak [mm]		5.5

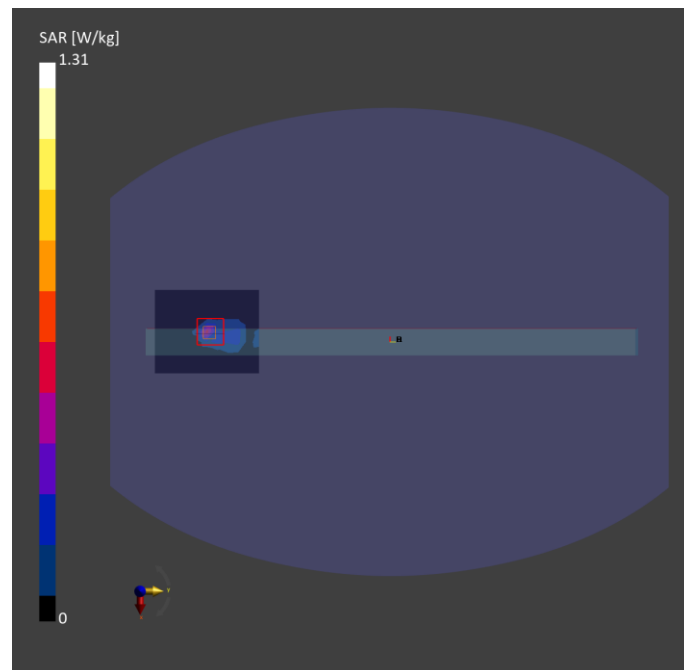

Date: 2025/3/4

75_WLAN2.4G_802.11b_Top Side of the keyboard_0mm_Ch11_ANT 0_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.002
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.745$ S/m; $\epsilon_r = 38.926$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.73, 7.11, 7.58) @ 2462 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 2.16 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.73 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.514 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 2.03 W/kg

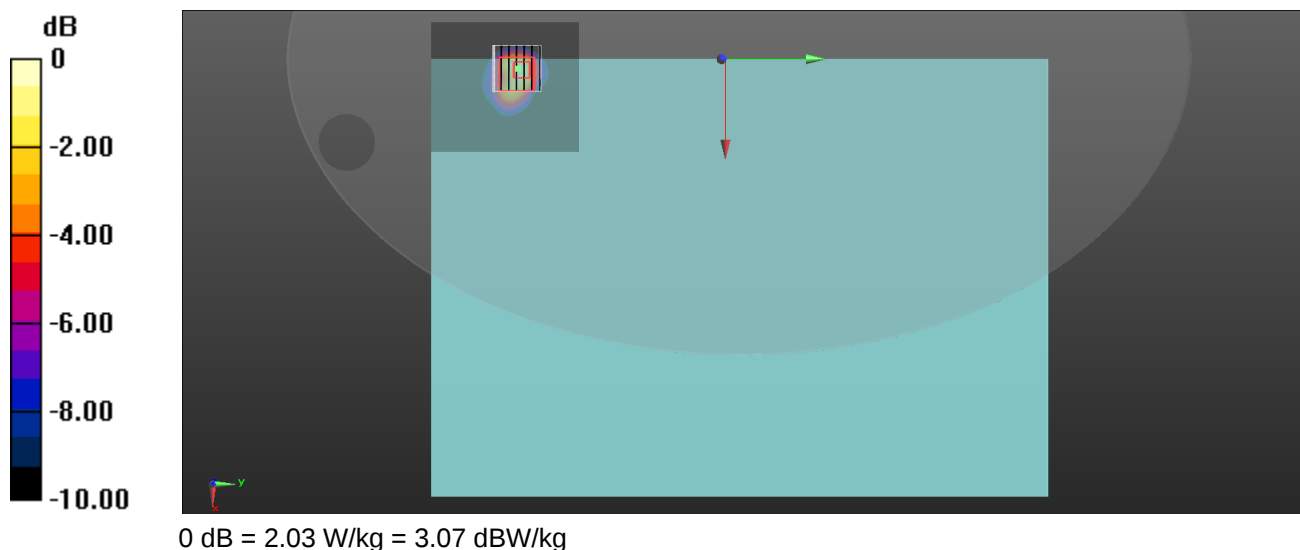

Date: 2025/3/5

80_WLAN5.3G_802.11n HT40_Top Side of the keyboard_0mm_Ch54_ANT 0_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11n(5GHz)HT40 (0); Frequency: 5270 MHz;Duty Cycle: 1:1.069
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.344$ S/m; $\epsilon_r = 33.332$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(5.68, 5.15, 5.5) @ 5270 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 5.66 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 27.87 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 0.775 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 6.24 W/kg

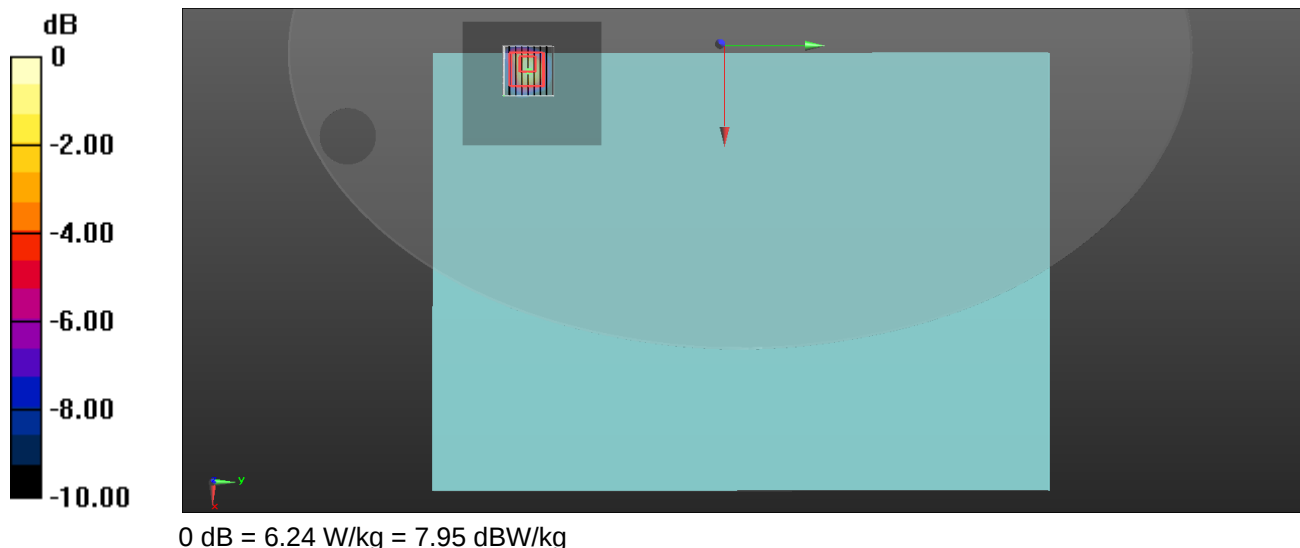

Date: 2025/3/6

102_WLAN5.6G_802.11ac VHT80_Top Side of the keyboard_0mm_Ch138_ANT 0_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5690 MHz;Duty Cycle: 1:1.085
Medium parameters used: $f = 5690$ MHz; $\sigma = 4.848$ S/m; $\epsilon_r = 32.672$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.9, 4.47, 4.74) @ 5690 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 5.83 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 25.62 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 2.31 W/kg; SAR(10 g) = 0.674 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 6.20 W/kg

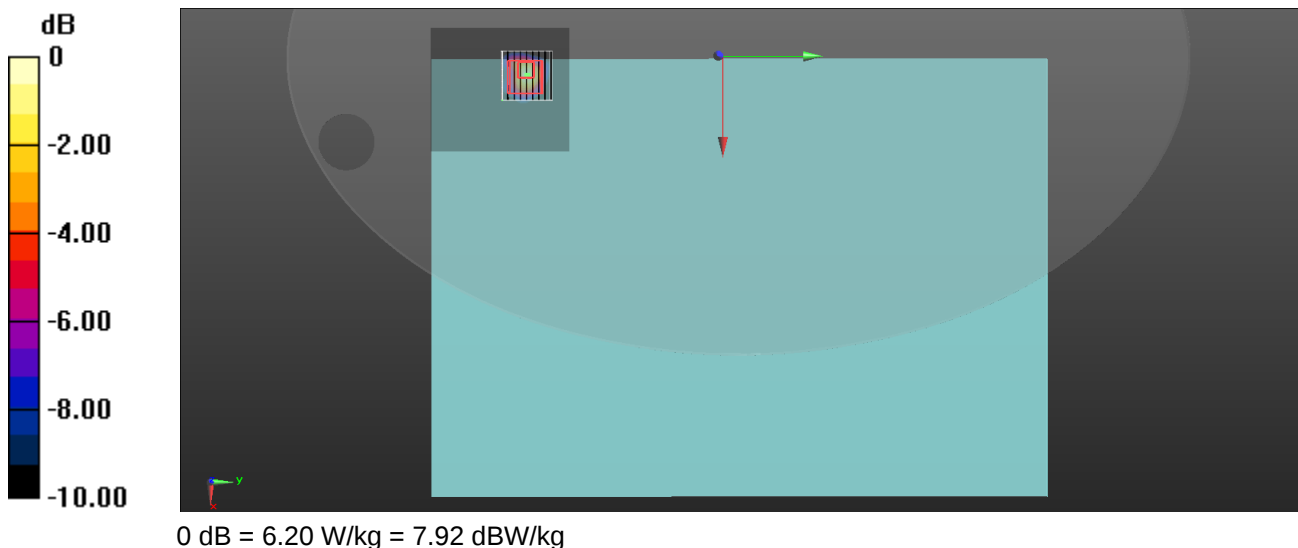

Date: 2025/3/7

111_WLAN5.8G_802.11ac VHT80_Top Side of the keyboard_0mm_Ch171_ANT 0_Sample 1

DUT: FA808U

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5855 MHz;Duty Cycle: 1:1.085
Medium parameters used: $f = 5855 \text{ MHz}$; $\sigma = 4.835 \text{ S/m}$; $\epsilon_r = 32.466$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(5.03, 4.62, 4.96) @ 5855 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 6.32 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 22.15 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 13.6 W/kg

SAR(1 g) = 2.27 W/kg; SAR(10 g) = 0.625 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 6.28 W/kg

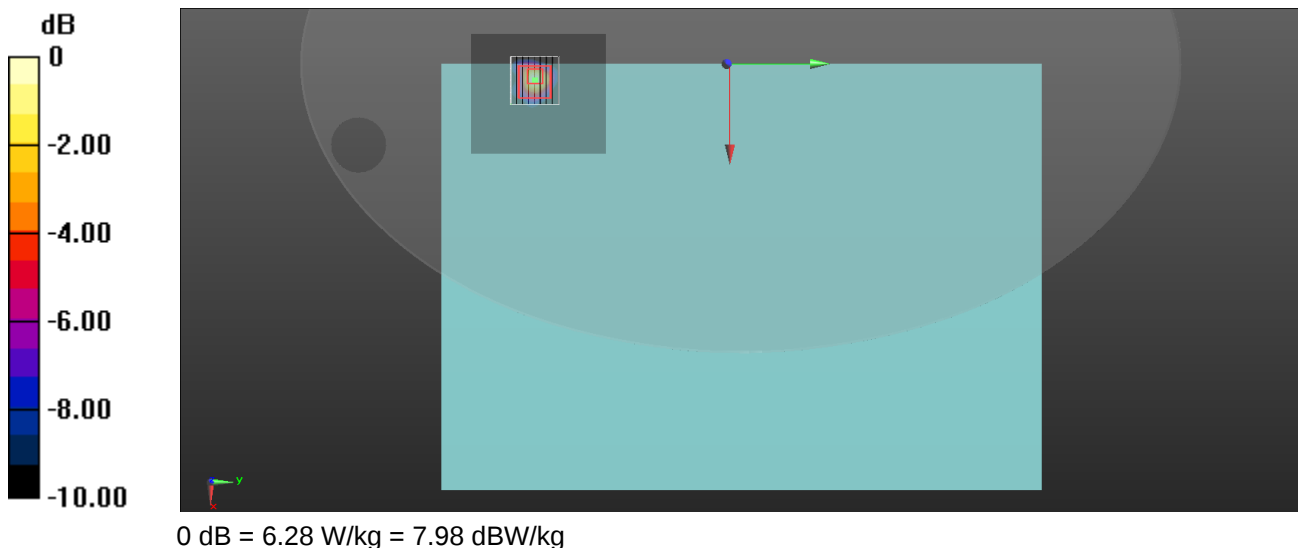

Date: 2025/3/5

113_Bluetooth_GFSK_Top Side of the keyboard_0mm_Ch39_ANT 1_Sample 1

DUT: FA808U

Communication System: UID 0, Bluetooth 3.0 (0); Frequency: 2441 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2441$ MHz; $\sigma = 1.726$ S/m; $\epsilon_r = 38.946$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.73, 7.11, 7.58) @ 2441 MHz; Calibrated: 2024/3/21
- Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2024/6/5
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.223 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.721 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.064 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.236 W/kg

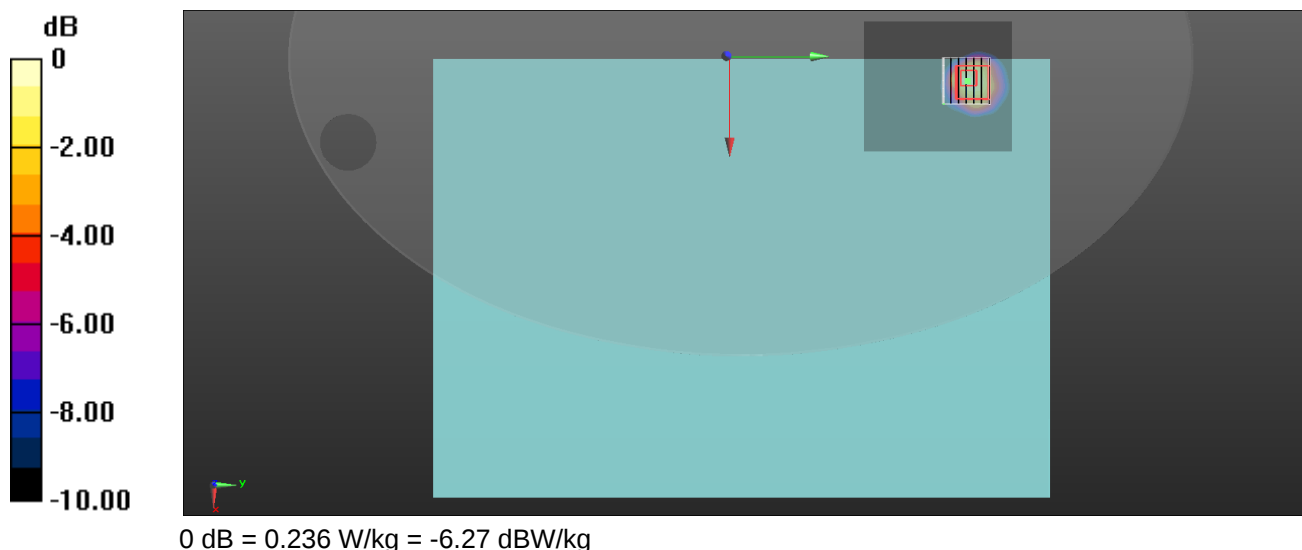

Test Date : 2025-03-07 | Ambient Temp : 21.8 °C | Tissue Temp : 21.5 °C

Test Mode**120_U-NII 5_802.11ax HE160_Top Side of the keyboard_0mm_Ch79_ANT 0_Sample 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA808U	T2NTCX00165707B	Laptop

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-5	WLAN, 10755 - AAC	6345.000, 79	5.2	5.87	32.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V5.0 (20deg probe tilt) - 1175	HBBL-600-10000V6	EX3DV4 - SN7647 / 2024-04-24	DAE4 Sn1253 / 2024-04-22
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.509	0.513
psSAR-10g [W/kg]	0.154	0.161
psAPD (1.0 cm ² , sq) [W/m ²]		5.13
psAPD (4.0 cm ² , sq) [W/m ²]		3.69
Power Drift [dB]		-0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		52.5
Dist 3dB Peak [mm]		6.3

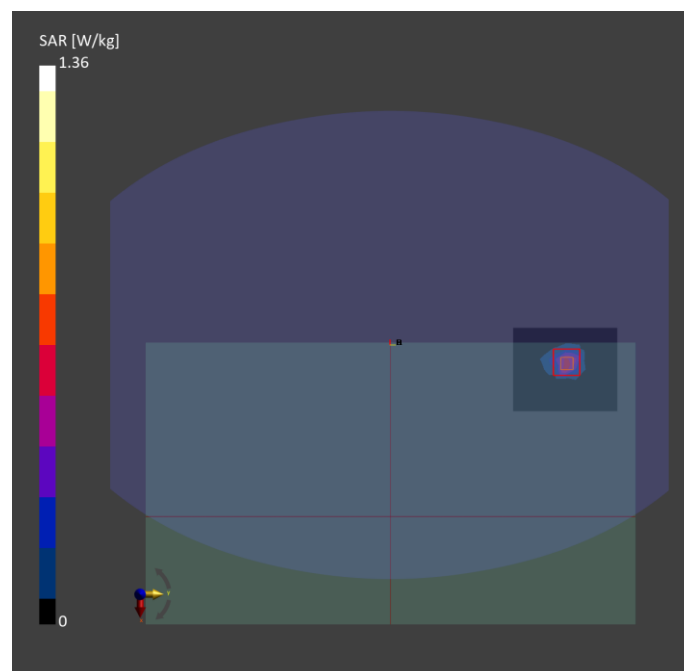

Test Date : 2025-03-10 | Ambient Temp : 22.3 °C

Test Mode**125_U-NII 8_802.11ax HE160_Front Edge of Laptop_2mm_Ch207_ANT 0_Sample 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA808U	T2NTCX00165707B	Laptop

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-8	WLAN, 10755 - AAC	6985.0, 207	1.0

Hardware Setup


Phantom	Medium	Probe Calibration Date	DAE Calibration Date
mmWave - 5G Phantom	Air	EUmmWV3 - SN9403_F1-55GHz / 2024-11-15	DAE4 Sn1253 / 2024-04-22
Measurement Software Version		3.2.2.2358	

Scan Setup

	5G Scan
Grid Extents [mm]	86.0 x 86.0
Grid Steps [mm]	0.0582 x 0.0582
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm ²]	4.00
psPD n+ [W/m ²]	1.04
psPD tot+ [W/m ²]	1.81
psPD mod+ [W/m ²]	2.54
Peak PD tot [W/m ²]	3.02
Power Drift [dB]	-0.14

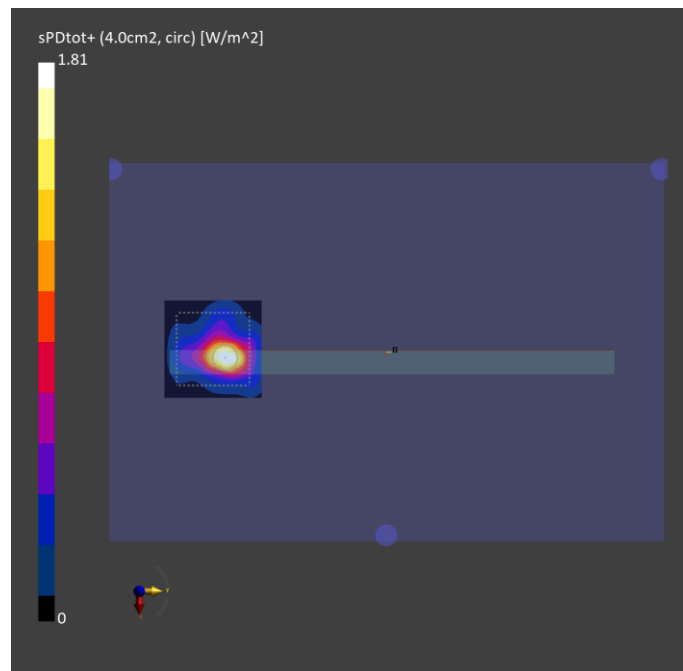

Test Date : 2025-03-11 | Ambient Temp : 22.3 °C

Test Mode**130_U-NII 5_802.11ax HE160_Top Side of the keyboard_2mm_Ch79_ANT 0_Sample 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA808U	T2NTCX00165707B	Laptop

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-5	WLAN, 10755 - AAC	6345.0, 79	1.0

Hardware Setup

Phantom	Medium	Probe Calibration Date	DAE Calibration Date
mmWave - 5G Phantom	Air	EUmmWV3 - SN9403_F1-55GHz / 2024-11-15	DAE4 Sn1253 / 2024-04-22
Measurement Software Version		3.2.2.2358	

Scan Setup

	5G Scan
Grid Extents [mm]	95.0 x 95.0
Grid Steps [mm]	0.0529 x 0.0529
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm ²]	4.00
psPD n+ [W/m ²]	1.79
psPD tot+ [W/m ²]	3.37
psPD mod+ [W/m ²]	6.40
Peak PD tot [W/m ²]	12.0
Power Drift [dB]	0.15

