

FCC Test Report

Report No.: AGC00592171101FE03

FCC ID : 2AMSU-GSP069

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Bluetooth Speaker

BRAND NAME : SANWA

MODEL NAME : GSP069, GSP069BK, GSP069R

CLIENT : SANWA LIMITED

DATE OF ISSUE : Jan. 15, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spower this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true and the authenticity of the authenticity of

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 58

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	plience / © Marie	Jan. 15, 2018	Valid	Initial release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5 5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8 9
6. TEST FACILITY	10
7.TEST METHOD	
8. TEST EQUIPMENT LIST	
9. RADIATED EMISSION	12
9.1TEST LIMIT	12 13
10. BAND EDGE EMISSION	32
10.1. MEASUREMENT PROCEDURE	32
11. 20DB BANDWIDTH	37
11.1. MEASUREMENT PROCEDURE	37 37
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	45 45 46
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	48
APPENDIX B. PHOTOGRAPHS OF FUT	51



age 4 of 58

1. VERIFICATION OF CONFORMITY

Applicant	SANWA LIMITED			
Address	Room 1005, 10/F., Tower 2, Silvercord 30 Canton Road, Tsim Sha Tsui, Kowloon Hong Kong, China			
Manufacturer	SHENZHEN SEE ME HERE ELECTRONIC CO., LTD.			
Address	3-4th Floor, Building D, Xixiang TongFuyu Industrial Park, Bao'an District, Shenzhen, China.			
Product Designation	Bluetooth Speaker			
Brand Name	SANWA			
Test Model	GSP069			
Series Model	GSP069BK, GSP069R			
Difference description	All the same except for the model name.			
Date of test	Jan. 04, 2018 to Jan. 11, 2018			
Deviation	None None			
Condition of Test Sample	Normal Normal			
Report Template	AGCRT-US-BR/RF			

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

	Honry Zhang	
Tested By _		授
	Henry Zhang(Zhang Zhuorui)	Jan. 11, 2018
Daviouad Py	Forreigh cei	
Reviewed By _	Forrest Lei(Lei Yonggang)	Jan. 15, 2018

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 5 of 58

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

A major technical descrip	ion of Eon is described as following
Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	2.18dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK
Number of channels	79 for BR/EDR
Hardware Version	V1.0
Software Version	V1.40
Antenna Designation	PCB Antenna
Antenna Gain	-2.41dBi
Power Supply	DC 3.7V by battery

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
Medalion of Cloud	0.0	2402MHz
	1 Expression	2403MHz
The Management of the Control of the	K. Barriero C. M. Allino de Goode	CO SO
S SEE STATE OF COORSE CO.	38	2440 MHz
2400~2483.5MHz	39	2441 MHz
	40	2442 MHz
K Companie @ Manager Andrews	2 %	
de la company de	77	2479 MHz
	78	2480 MHz



Page 6 of 58

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
® Martin Tool cools	Low channel GFSK
2 2	Middle channel GFSK
3	High channel GFSK
· 4 不是那	Low channel π /4-DQPSK
S 5 to d Clobs	Middle channel π /4-DQPSK
G 6	High channel π /4-DQPSK
7	Low channel 8DPSK
Fall Comments & Same	Middle channel 8DPSK
9 Paris	High channel 8DPSK
10	BT Link with charging
11th Complete	BT Link

Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.





The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




Page 8 of 58

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark	
1 ,	Bluetooth Speaker	SANWA	GSP069	EUT	
2	Battery	SHENZHEN SEE ME HERE ELECTRONIC CO., LTD.	GX 503290	Accessory	
3	PC 1	APPLE	A1465	A.E	
4	Control box	ATS	N/A	A.E	
5	Adapter	IPRO	NTR-S01	A.E	
6	USB Cable	N/A	1m unshielded	A.E	
7	IPOD	APPLE C	A1367	A.E	
8	TF Card	Kingston	SDA10/16GB	A.E	



Page 9 of 58

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT		
§15.249(a) §15.209	Radiated Emission	Compliant		
§15.249(d)	Band Edges	Compliant		
§15.207	Conduction Emission	Compliant		
§15.215	Bandwidth	Compliant		



Page 10 of 58

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012			
NVLAP Lab Code	600153-0			
Designation Number	CN5028			
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by Nationa Voluntary Laboratory Accreditation program, NVLAP Code 600153-0			



age 11 of 58

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B	C	Mar. 01, 2016	Feb. 28, 2018



Page 12 of 58

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field St	rengths Limit
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	2
0.490 ~ 1.705	30	24000/F(kHz)	电测 乐意
1.705 ~ 30	30	30	See The second of the second o
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3 Maria Commission	Other:74.0 dB(µV)/m (Average)	(Peak) 54.0 dB(μV)/m

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 58

9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 14 of 58


The following table is the setting of spectrum analyzer and receiver.

	Spectrum Parameter	Setting
pal Come	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
C THEST	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
, F	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
The salion of Colon Cor	Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 1.5MHz/ VBW 10Hz for Average
	Receiver Parameter	Setting
® ##	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
60 m	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




9.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

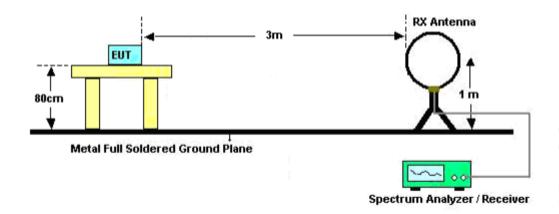

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

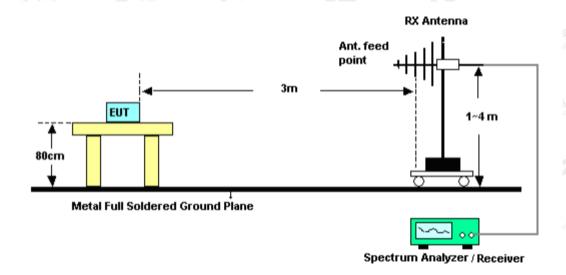


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





RADIATED EMISSION TEST SETUP ABOVE 1000MHz

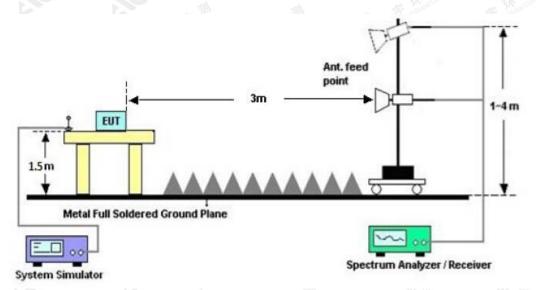

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at although the confirmed at all the confirme



Page 17 of 58

9.4. TEST RESULT

(Worst modulation: GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

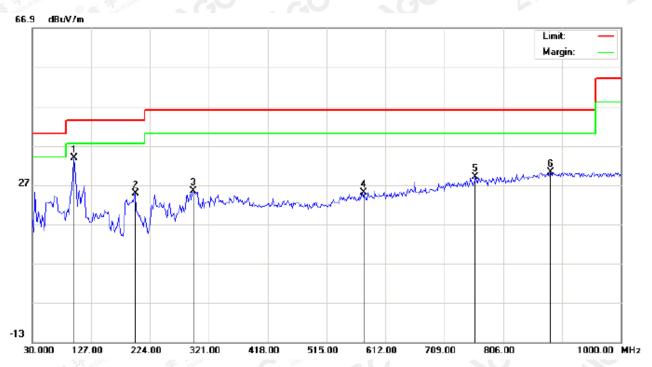

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1	*	99.5167	23.82	10.00	33.82	43.50	-9.68	peak			
2		199.7500	12.88	11.99	24.87	43.50	-18.63	peak			
3		295.1333	10.89	14.58	25.47	46.00	-20.53	peak			
4		576.4333	1.84	23.14	24.98	46.00	-21.02	peak			
5		760.7332	2.27	26.78	29.05	46.00	-16.95	peak			
6		883.6000	1.95	28.18	30.13	46.00	-15.87	peak			

RESULT: PASS



Page 18 of 58

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		46.1666	18.96	8.49	27.45	40.00	-12.55	peak			
2	*	178.7333	17.05	14.15	31.20	43.50	-12.30	peak			
3		283.8167	18.08	14.92	33.00	46.00	-13.00	peak			
4		335.5500	14.22	17.78	32.00	46.00	-14.00	peak			
5		553.7998	8.74	22.50	31.24	46.00	-14.76	peak			
6		802.7667	2.12	27.32	29.44	46.00	-16.56	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 19 of 58

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

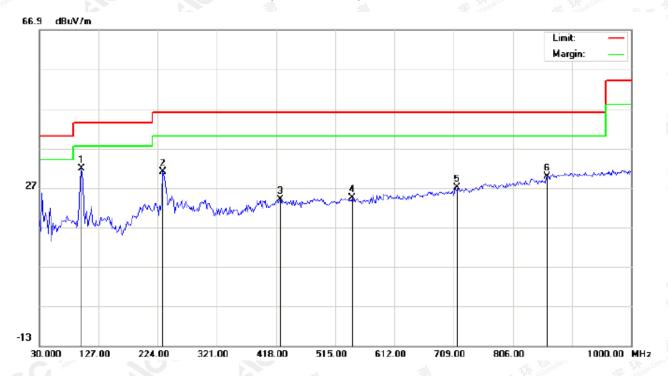


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu√/m	dB		cm	degree	
1	*	99.5167	21.82	10.00	31.82	43.50	-11.68	peak			
2		232.0833	22.26	8.73	30.99	46.00	-15.01	peak			
3		424.4667	4.24	19.81	24.05	46.00	-21.95	peak			
4		542.4832	2.09	22.28	24.37	46.00	-21.63	peak			
5		715.4665	1.44	25.64	27.08	46.00	-18.92	peak			
6		862.5833	2.18	27.64	29.82	46.00	-16.18	peak			

DECIII T. DACC



Page 20 of 58

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

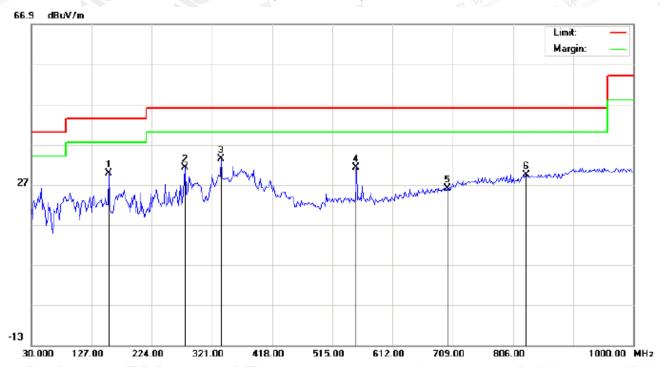

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		154.4833	14.52	15.29	29.81	43.50	-13.69	peak			
2		277.3500	16.54	14.73	31.27	46.00	-14.73	peak			
3	*	335.5500	15.72	17.78	33.50	46.00	-12.50	peak			
4		553.7998	8.74	22.50	31.24	46.00	-14.76	peak			
5		700.9166	0.86	25.22	26.08	46.00	-19.92	peak			
6		827.0167	2.18	27.31	29.49	46.00	-16.51	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 21 of 58

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

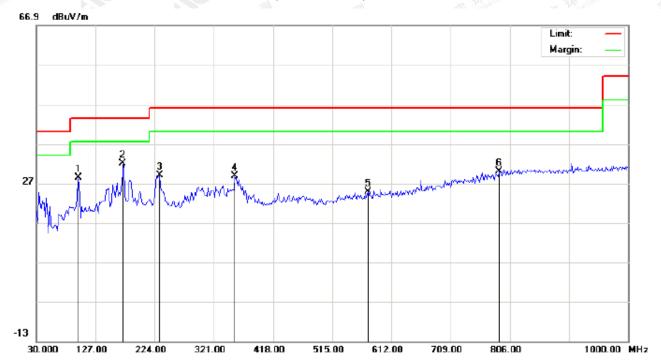


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		99.5167	18.32	10.00	28.32	43.50	-15.18	peak			
2	*	172.2666	21.22	10.78	32.00	43.50	-11.50	peak			
3		232.0833	20.26	8.73	28.99	46.00	-17.01	peak			
4		354.9499	10.07	18.77	28.84	46.00	-17.16	peak			
5		573.2000	1.83	23.06	24.89	46.00	-21.11	peak			
6		788.2165	2.90	27.16	30.06	46.00	-15.94	peak			

DECIII T. DACC



Page 22 of 58

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

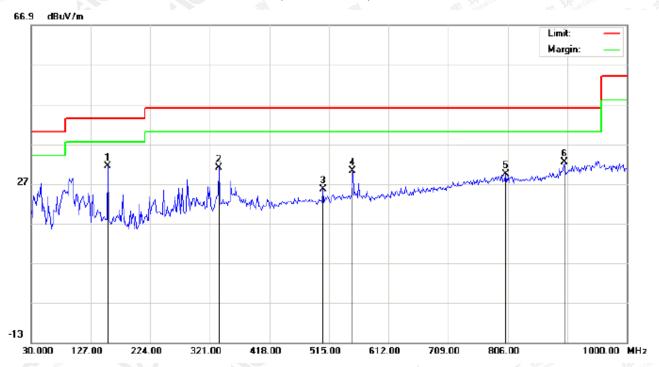

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	154.4833	16.02	15.29	31.31	43.50	-12.19	peak			
2		335.5500	13.22	17.78	31.00	46.00	-15.00	peak			
3		505.3000	4.39	21.27	25.66	46.00	-20.34	peak			
4		553.7998	7.74	22.50	30.24	46.00	-15.76	peak			
5		802.7667	2.12	27.32	29.44	46.00	-16.56	peak			
6		898.1499	3.76	28.56	32.32	46.00	-13.68	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




Page 23 of 58

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

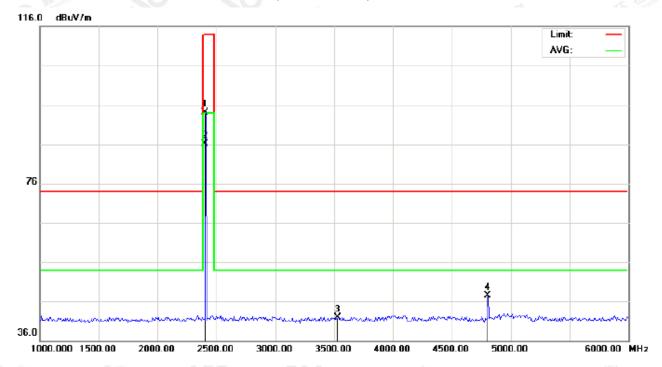


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	83.71	10.32	94.03	114.00	-19.97	peak			
2	*	2402.000	75.69	10.32	86.01	94.00	-7.99	AVG	100	78	
3		3533.333	29.57	12.32	41.89	74.00	-32.11	peak			
4		4804.000	39.74	7.69	47.43	74.00	-26.57	peak			

RESULT: PASS



Page 24 of 58

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

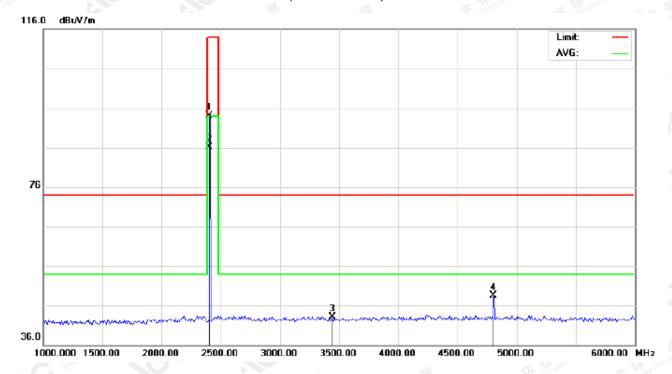


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	83.82	10.32	94.14	114.00	-19.86	peak			
2	*	2402.000	75.80	10.32	86.12	94.00	-7.88	AVG	100	153	
3		3441.667	31.00	12.05	43.05	74.00	-30.95	peak			
4		4804.000	40.88	7.69	48.57	74.00	-25.43	peak			

RESULT: PASS



Page 25 of 58

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

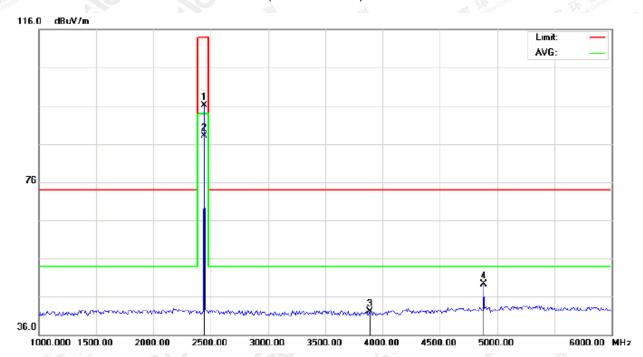


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	85.74	10.36	96.10	114.00	-17.90	peak			
2	*	2441.000	77.70	10.36	88.06	94.00	-5.94	AVG	100	72	
3		3891.667	27.55	14.52	42.07	74.00	-31.93	peak			
4		4882.000	41.38	7.89	49.27	74.00	-24.73	peak			

RESULT: PASS



Page 26 of 58

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

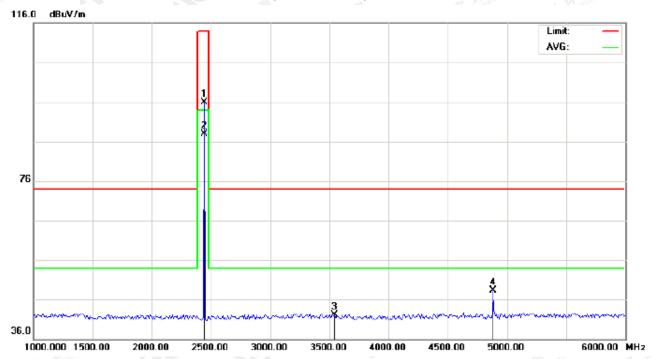


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	85.49	10.36	95.85	114.00	-18.15	peak			
2	*	2441.000	77.45	10.36	87.81	94.00	-6.19	AVG	100	164	
3		3541.667	29.76	12.37	42.13	74.00	-31.87	peak			
4		4882.000	40.31	7.89	48.20	74.00	-25.80	peak			

RESULT: PASS



Page 27 of 58

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

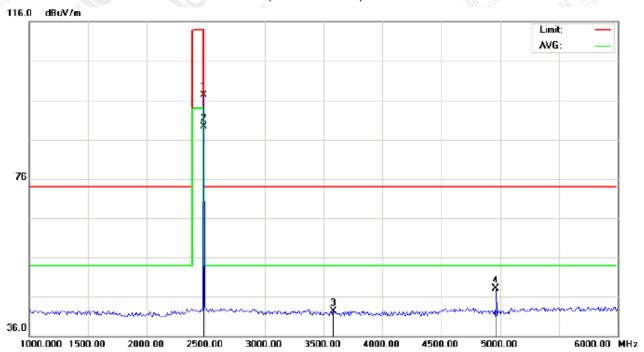


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2480.000	86.97	10.41	97.38	114.00	-16.62	peak			
2	*	2480.000	78.90	10.41	89.31	94.00	-4.69	AVG	100	75	
3		3583.333	29.64	12.62	42.26	74.00	-31.74	peak			
4		4960.000	40.01	8.09	48.10	74.00	-25.90	peak			

DECILIT: DACC



Page 28 of 58

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

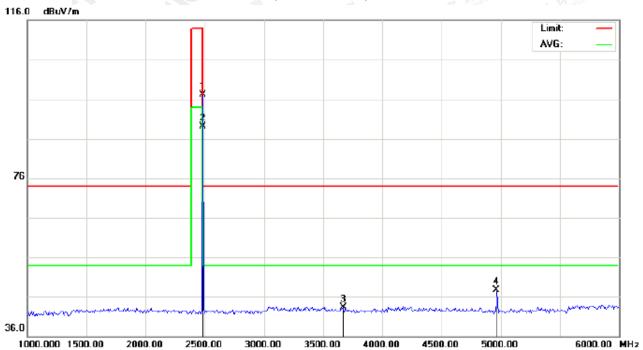

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
_	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		2480.000	86.68	10.41	97.09	114.00	-16.91	peak			
2	*	2480.000	78.65	10.41	89.06	94.00	-4.94	AVG	100	171	
3		3666.667	30.15	13.14	43.29	74.00	-30.71	peak			
4		4960.000	39.66	8.09	47.75	74.00	-26.25	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



age 29 of 58

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Factor Measurement		Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	83.71	10.32	94.03	114	-19.97	Horizontal	
2402	83.82	10.32	94.14	114	-19.86	Vertical	
2441	85.74	10.36	96.10	114	-17.90	Horizontal	
2441	85.49	10.36	95.85	114	-18.15	Vertical	
2480	86.97	10.41	97.38	114	-16.62	Horizontal	
2480	86.68	10.41	97.09	114	-16.91	Vertical	

Average value

Frequency	Reading Level	Factor	Factor Measurement		Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	75.69	10.32	86.01	94	-7.99	Horizontal	
2402	75.80	10.32	86.12	94	-7.88	Vertical	
2441	77.70	10.36	88.06	94	-5.94	Horizontal	
2441	77.45	10.36	87.81	94	-6.19	Vertical	
2480	78.90	10.41	89.31	94	-4.69	Horizontal	
2480	78.65	10.41	89.06	94	-4.94	Vertical	



Page 30 of 58

2Mbps Result:

Peak value

Frequency	Reading Factor		Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	83.24	10.32	93.56	114	-20.44	Horizontal
2402	83.33	10.32	93.65	114	-20.35	Vertical
2441	85.50	10.36	95.86	114	-18.14	Horizontal
2441	84.96	10.36	95.32	114	-18.68	Vertical
2480	86.42	10.41	96.83	114	-17.17	Horizontal
2480	86.24	10.41	96.65	114	-17.35	Vertical

Average value

Frequency	Reading Level	Factor Measurement		Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	75.25	10.32	85.57	94	-8.43	Horizontal	
2402	75.30	10.32	85.62	94	-8.38	Vertical	
2441	77.20	10.36	87.56	94	-6.44	Horizontal	
2441	76.90	10.36	87.26	94	-6.74	Vertical	
2480	78.46	10.41	88.87	94	-5.13	Horizontal	
2480	78.22	10.41	88.63	94	-5.37	Vertical	



Page 31 of 58

3Mbps Result:

Peak value

Frequency	Reading Factor		Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	83.19	10.32	93.51	114	-20.49	Horizontal	
2402	83.21	10.32	93.53	114	-20.47	Vertical	
2441	85.46	10.36	95.82	114	-18.18	Horizontal	
2441	84.88	10.36	95.24	114	-18.76	Vertical	
2480	86.35	10.41	96.76	114	-17.24	Horizontal	
2480	86.20	10.41	96.61	114	-17.39	Vertical	

Average value

Frequency	Reading Level	Factor	Factor Measurement		Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	75.19	10.32	85.51	94	-8.49	Horizontal
2402	75.21	10.32	85.53	94	-8.47	Vertical
2441	77.10	10.36	87.46	94	-6.54	Horizontal
2441	76.85	10.36	87.21	94	-6.79	Vertical
2480	78.41	10.41	88.82	94	-5.18	Horizontal
2480	78.12	10.41	88.53	94	-5.47	Vertical



Page 32 of 58

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

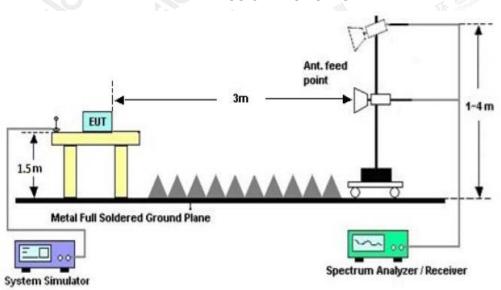




age 33 of 58

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

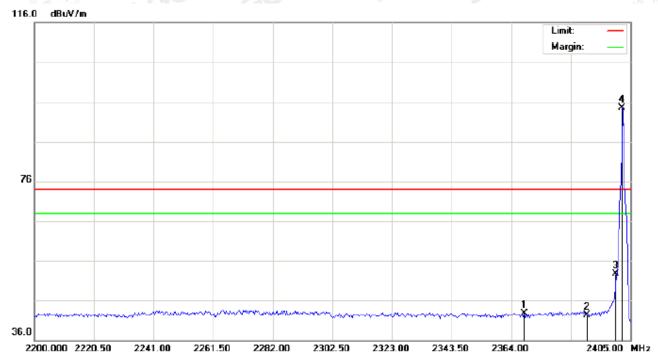

No	۱.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1			2368.442	32.40	10.29	42.69	74.00	-31.31	peak			
2			2390.000	32.00	10.31	42.31	74.00	-31.69	peak			
3			2400.000	42.47	10.32	52.79	74.00	-21.21	peak			
4		*	2402.000	84.22	10.32	94.54	74.00	20.54	peak			



Page 34 of 58

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2371.175	32.08	10.29	42.37	74.00	-31.63	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3		2400.000	36.06	10.32	46.38	74.00	-27.62	peak			
4	*	2402.000	84.09	10.32	94.41	74.00	20.41	peak			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 35 of 58

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

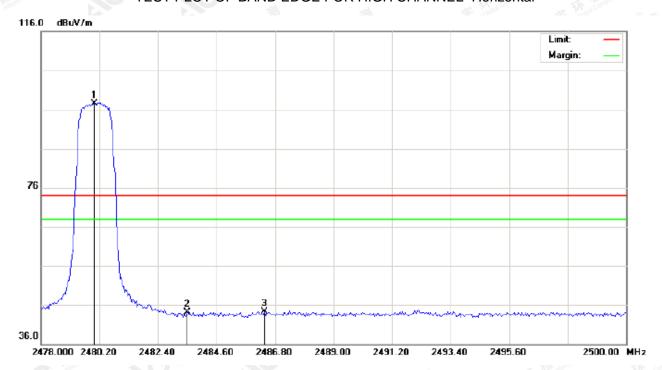


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.05	10.41	97.46	74.00	23.46	peak			
2		2483.500	33.69	10.41	44.10	74.00	-29.90	peak			
3		2486.396	33.86	10.41	44.27	74.00	-29.73	peak			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.cett.com.



Page 36 of 58

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

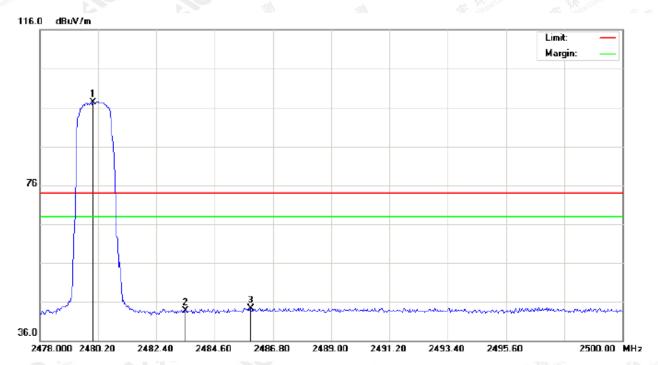

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	86.82	10.41	97.23	74.00	23.23	peak			
2		2483.500	33.26	10.41	43.67	74.00	-30.33	peak			
3		2485.957	33.98	10.41	44.39	74.00	-29.61	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

\GC 8




Page 37 of 58

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

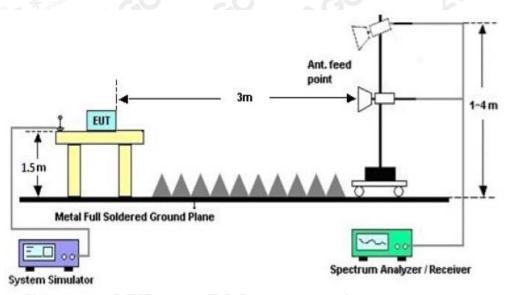

11.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Donali								
		Result								
Solva Company	Low Channel	0.987	1.111	PASS						
N/A	Middle Channel	0.978	1.098	PASS						
	High Channel	0.967	1.102	PASS						


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

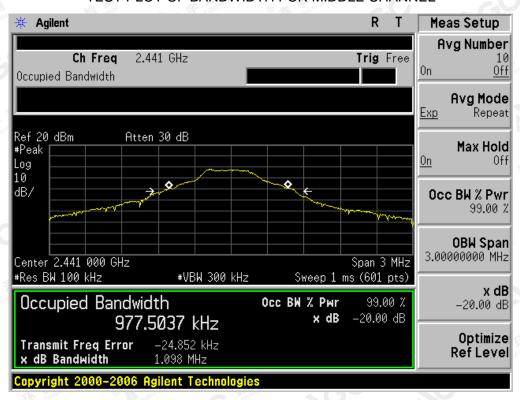


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.






TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

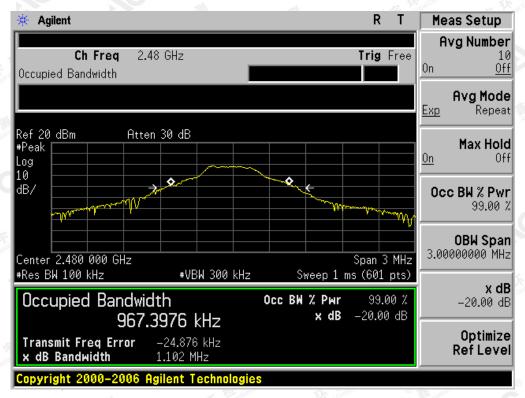


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT											
Measurement Result											
Applicable Limits		Doorle									
		Result									
The fill the state of the state	Low Channel	1.221	1.388	PASS							
N/A	Middle Channel	1.217	1.390	PASS							
	High Channel	1.218	1.373	PASS							


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

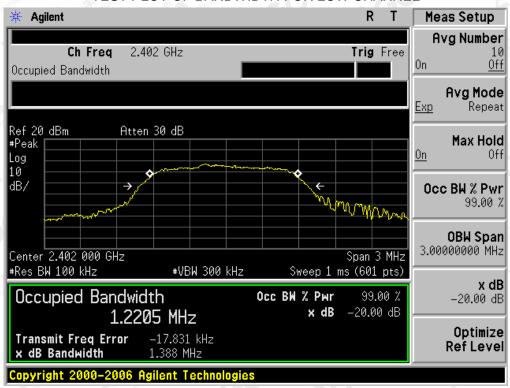


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

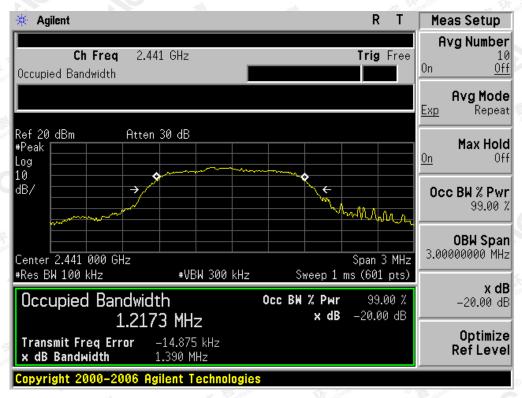

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

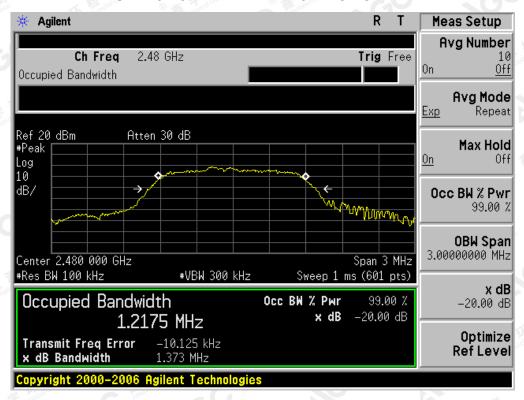


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 42 of 58

BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Donalf.								
		Result								
TO BELLEVIER TO BELLEVIER	Low Channel	1.225	1.371	PASS						
N/A	Middle Channel	1.230	1.395	PASS						
CO I	High Channel	1.226	1.391	PASS						


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

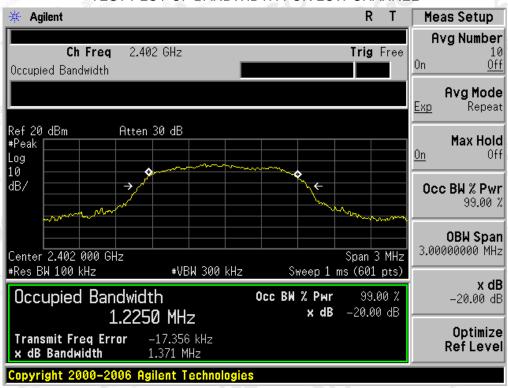


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

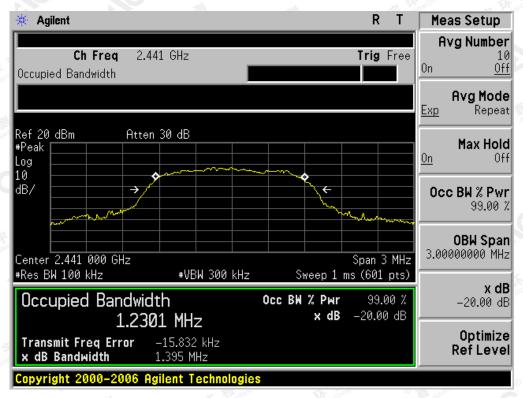

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

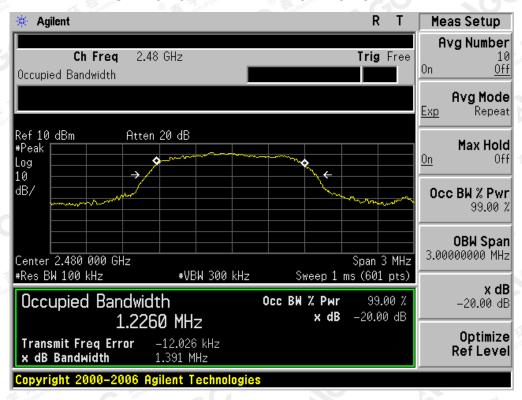

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 44 of 58

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage								
Frequency	Q.P.(dBuV)	Average(dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	8 gg 200 56 gg 100 00 00 00 00 00 00 00 00 00 00 00 00	46 / W							
5MHz~30MHz	60	50							

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

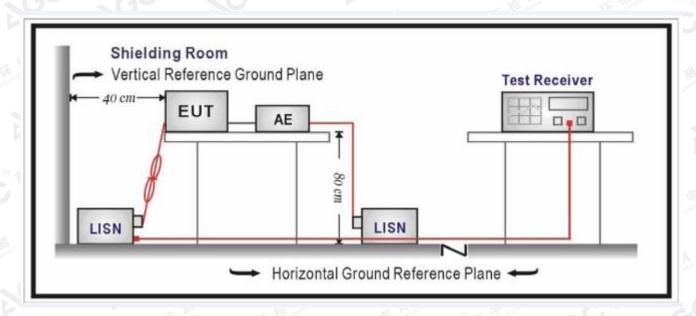

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 45 of 58

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 46 of 58

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)


FOR BR/EDR

Line Conducted Emission Test Line 1-L

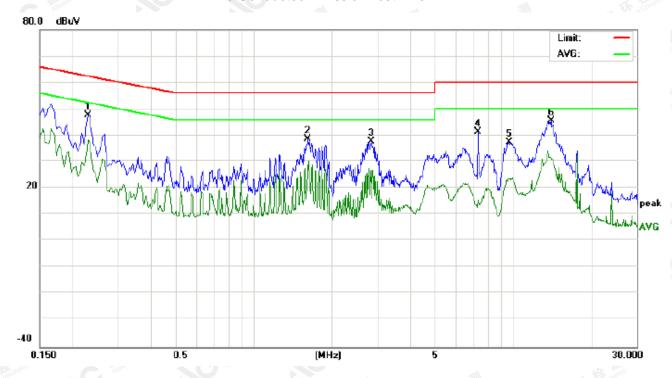


No. Freq.		Reading_Level (dBuV)		Correct Measurement Factor (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment		
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2300	37.40		28.28	10.25	47.65		38.53	62.45	52.45	-14.80	-13.92	Р	
2	1.6260	28.33		17.54	10.34	38.67		27.88	56.00	46.00	-17.33	-18.12	Р	
3	2.8420	27.45		16.23	10.51	37.96		26.74	56.00	46.00	-18.04	-19.26	Р	
4	7.3580	31.14		5.07	10.34	41.48		15.41	60.00	50.00	-18.52	-34.59	Р	
5	9.6620	27.38		13.13	10.29	37.67		23.42	60.00	50.00	-22.33	-26.58	Р	
6	14.0260	35.47		21.07	10.12	45.59		31.19	60.00	50.00	-14.41	-18.81	Р	

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.





Line Conducted Emission Test Line 2-N

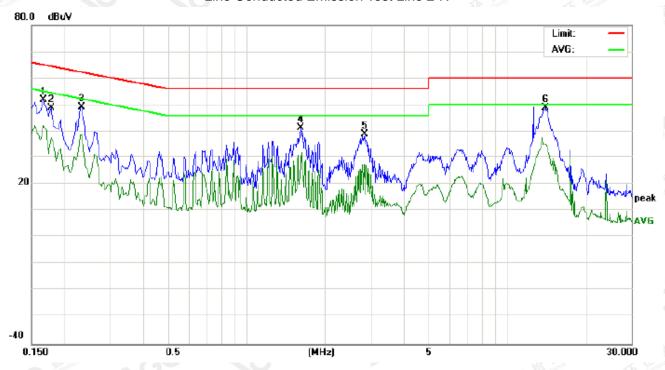

No.	Freq.	Reading_Lev (dBuV)				Measurement (dBuV)		Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	41.91		32.05	10.18	52.09		42.23	65.15	55.15	-13.06	-12.92	Р	
2	0.1780	38.88		27.63	10.19	49.07		37.82	64.57	54.57	-15.50	-16.75	Р	
3	0.2340	39.03		28.70	10.25	49.28		38.95	62.30	52.30	-13.02	-13.35	Р	
4	1.6260	31.16		19.45	10.34	41.50		29.79	56.00	46.00	-14.50	-16.21	Р	
5	2.8420	28.58		16.74	10.51	39.09		27.25	56.00	46.00	-16.91	-18.75	Р	
6	14.0060	38.83		24.89	10.12	48.95		35.01	60.00	50.00	-11.05	-14.99	Р	

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP

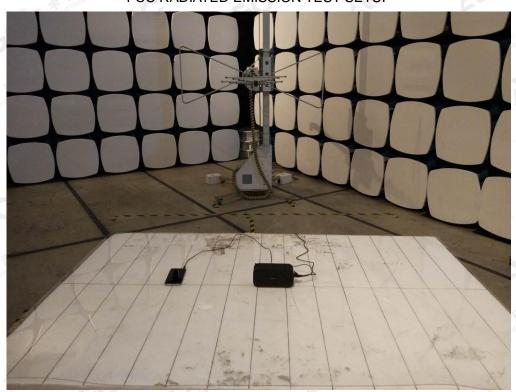



The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance





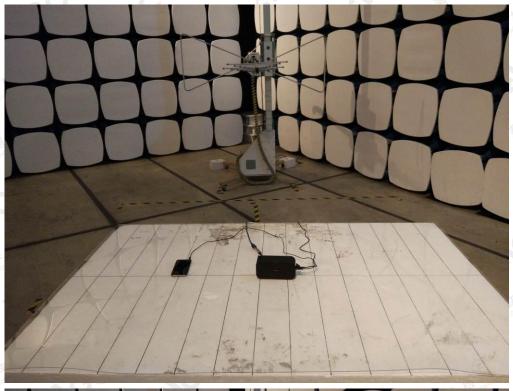


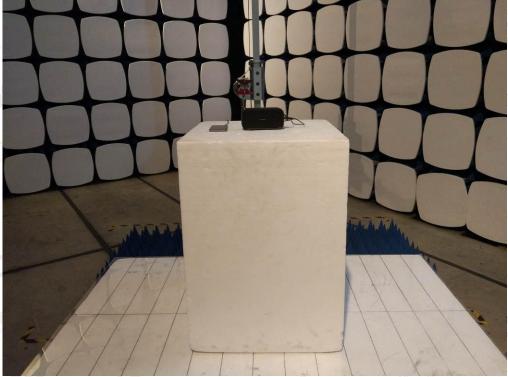

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.cett.com.



Report No.: AGC00592171101FE03 Page 50 of 58

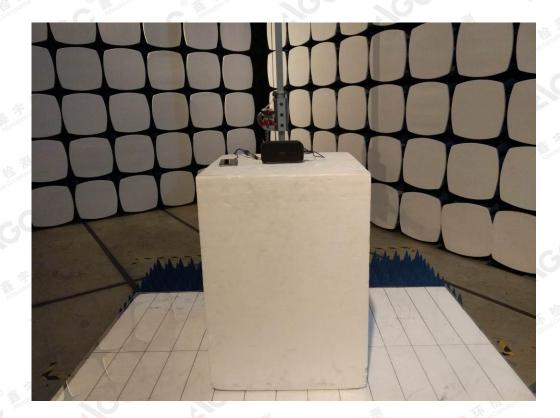

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.

Attestation of Global Compliance



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.

Attestation of Global Compliance



BACK VIEW OF EUT



LEFT VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

Attestation of Global Compliance



RIGHT VIEW OF EUT



VIEW OF EUT (PORT)



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



OPEN VIEW OF EUT-1



OPEN VIEW OF EUT-2




The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true of the confirmed at a true of true of the confirmed at a true of the confirmed at a


Attestation of Global Compliance



INTERNAL VIEW OF EUT-1

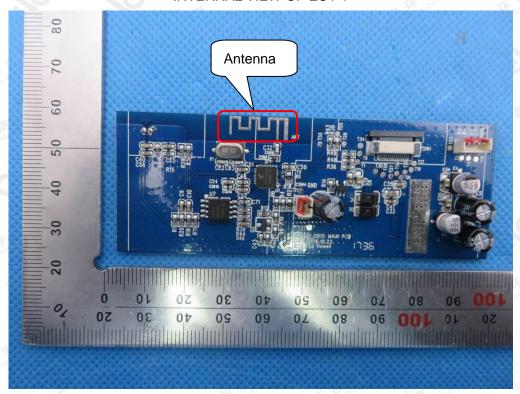

INTERNAL VIEW OF EUT-2

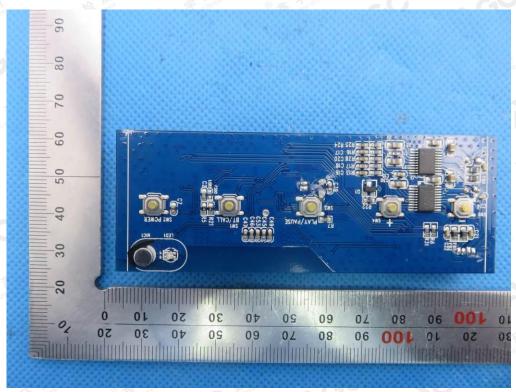


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (GC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a titp://www.agc.gatt.com.


Attestation of Global Compliance



INTERNAL VIEW OF EUT-3

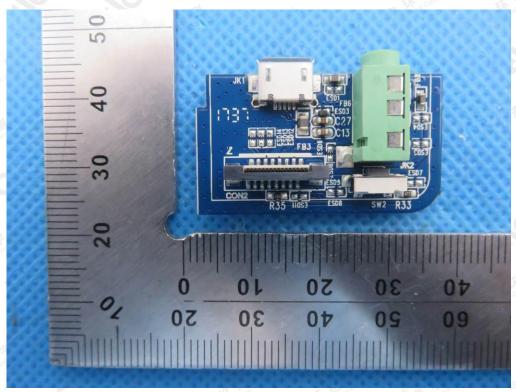

INTERNAL VIEW OF EUT-4

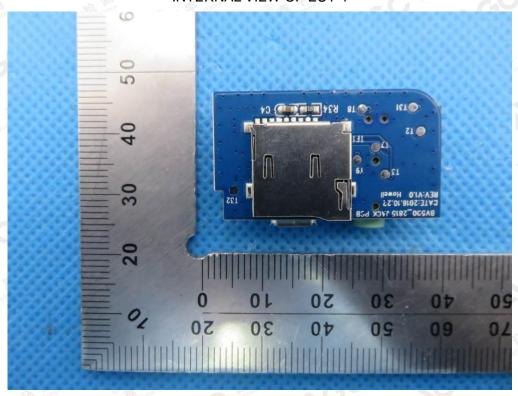


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance



INTERNAL VIEW OF EUT-5

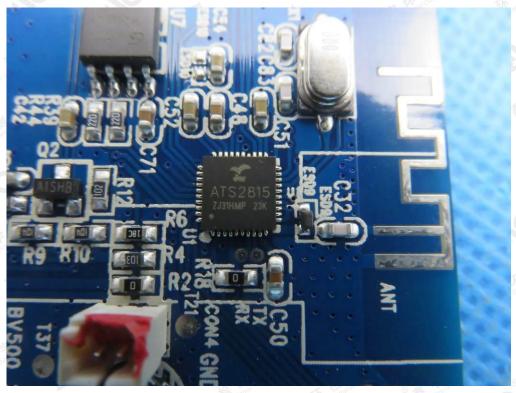

VIEW OF ADAPTER(AE)



The adapter was supplied by AGC

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.

Attestation of Global Compliance