



FCC RADIO TEST REPORT

FCC ID : TLZ-CU484
Equipment : IEEE 802.15.4 and Bluetooth LE 5.0 wireless microcontroller Stamp LGA Module
Brand Name : AzureWave
Model Name : AW-CU484 , AW-CU480 , AW-CU485
Applicant : AzureWave Technologies, Inc.
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231
Standard : 47 CFR FCC Part 15.247

The product was received on Oct. 14, 2020, and testing was started from Oct. 23, 2020 and completed on Nov. 30, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	7
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 Test Configuration of EUT	8
2.1 Test Channel Mode	8
2.2 The Worst Case Measurement Configuration.....	9
2.3 EUT Operation during Test	10
2.4 Accessories	11
2.5 Support Equipment.....	11
2.6 Test Setup Diagram	13
3 Transmitter Test Result	16
3.1 AC Power-line Conducted Emissions	16
3.2 DTS Bandwidth	18
3.3 Maximum Conducted Output Power	19
3.4 Power Spectral Density	22
3.5 Emissions in Non-restricted Frequency Bands	24
3.6 Emissions in Restricted Frequency Bands.....	25
4 Test Equipment and Calibration Data	29
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_9 Ver1.2



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Wendy Pan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std.	Ch. Frequency (MHz)	Channel Number
2400-2483.5	802.15.4	2405-2480	11-26 [16]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	Zigbee	5	1TX

Note:

- ♦ Zigbee uses a O-QPSK (250kbps) modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	LYNwave	ALX20M-052AA1	PIFA Antenna	N/A	2.8

Note: The above information was declared by manufacturer.

For Bluetooth and Zigbee(1TX/1RX):

Only Ant.1 can be used as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
Zigbee	1	0	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

EUT Power Type	From host system		
Function	☒ Point-to-multipoint	☐ Point-to-point	
Test Software Version	Tera Term (Version 4.63)		

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The EUT has three model names which are identical to each other in all aspects except for the following table:

Brand Name	Model Name	Chipset Nuber	Description
AzureWave	AW-CU484	K32W061/41	The EUT has three model names which are identical to each other in all aspect except for the chipset solutions. These chipset solutions have the same circuitry, electrical, mechanical, and physical construction.
	AW-CU480	QN9090/30	
	AW-CU485	JN5189/88	

Note 1: From the above models, model: AW-CU484 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL	886-3-327-3456	FAX : 886-3-327-0973
☒	JHUBEI	ADD	No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	
		TEL	886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Serway Li	23.3-24.5°C / 55-57%	Oct. 20, 2020 ~ Nov. 30, 2020
Radiated<1GHz	03CH04-CB	Eason Chen	23.9-25.1°C / 56-60%	Nov. 20, 2020
Radiated>1GHz	03CH01-CB	Nyle Chang	23.9-25.2 / 55-58	Oct. 19, 2020 ~ Oct. 29, 2020
	03CH04-CB	Nyle Chang	24.1-25.3 °C / 54-57%	
AC Conduction	CO01-CB	Wei Li	22~23°C / 56~59%	Oct. 23, 2020

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.6 dB	Confidence levels of 95%
Conducted Emission	2.8 dB	Confidence levels of 95%
Output Power Measurement	1.4 dB	Confidence levels of 95%
Power Density Measurement	2.8 dB	Confidence levels of 95%
Bandwidth Measurement	0.39%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
Zigbee	-
2405MHz	10
2440MHz	10
2480MHz	10

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	EUT Zigbee
2	EUT Bluetooth
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT in Z axis_Zigbee
2	EUT in Z axis_Bluetooth
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position and the worst case was found at Z axis. So the measurement will follow this same test configuration.	
1	EUT in Z axis

Note: The EUT can only be used in Z-axis position for normal link mode.



2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.



2.4 Accessories

N/A

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6430	N/A
B	Fixture	NXP	OM15076-3 / JN5189 Carrier Main Board DK6 V3	N/A
C	iPhone 4	Apple	A1332	BCG-E2380A
D	Earphone	SHYARO CHI	MIC-04	N/A
E	Mouse	HP	FM100	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Fixture	NXP	OM15076-3 / JN5189 Carrier Main Board DK6 V3	N/A
B	iPhone 4	Apple	A1332	BCG-E2380A
C	Notebook	DELL	E4300	N/A
D	Mouse	Logitech	M-U0026	N/A
E	Earphone	SHYARO CHI	MIC-04	N/A


**For Radiated (above 1GHz):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Fixture	NXP	OM15076-3 / JN5189 Carrier Main Board DK6 V3	N/A
B	Notebook	DELL	E4300	N/A

For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Fixture	NXP	OM15076-3 / JN5189 Carrier Main Board DK6 V3	N/A

2.6 Test Setup Diagram

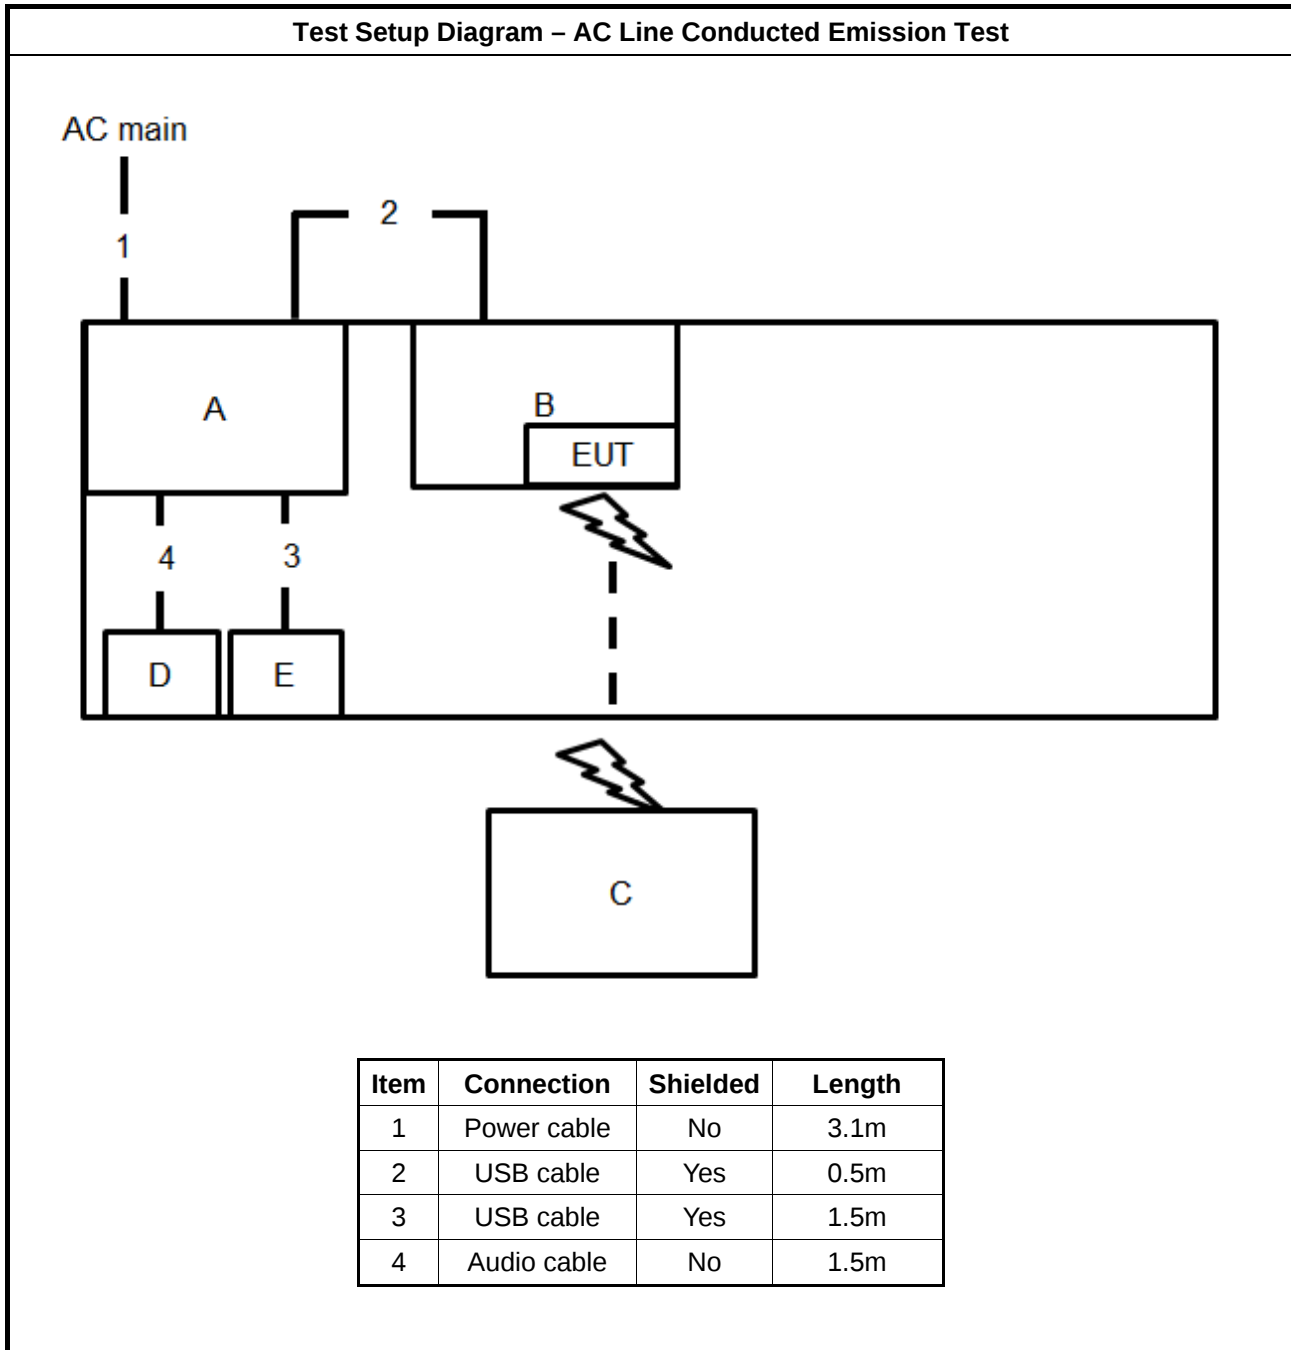


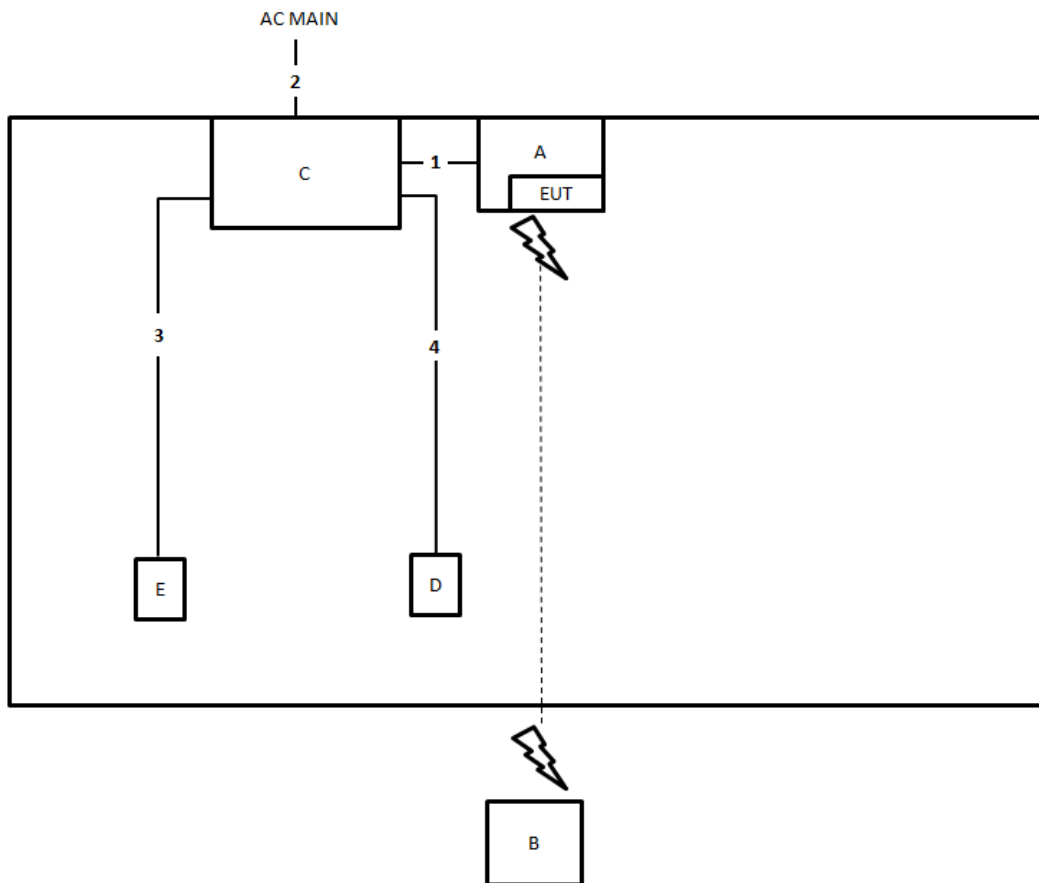Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	USB cable	Yes	0.5m
2	Power cable	No	2.6m
3	Audio cable	No	1.1m
4	USB cable	Yes	1.8m



Test Setup Diagram - Radiated Test > 1GHz

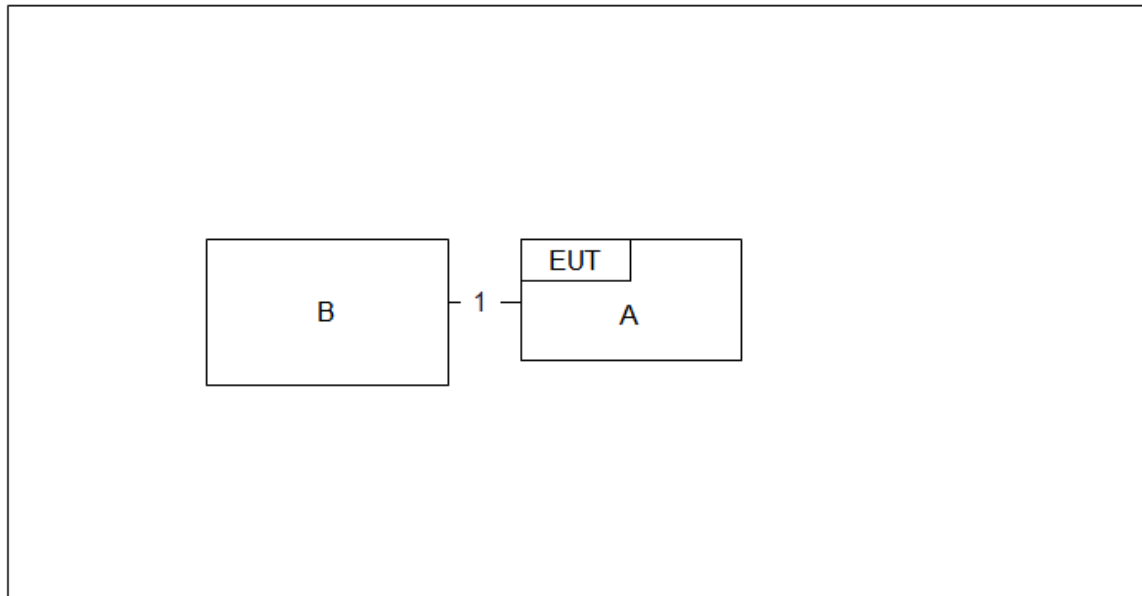

Item	Connection	Shielded	Length
1	USB cable	Yes	1.3m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

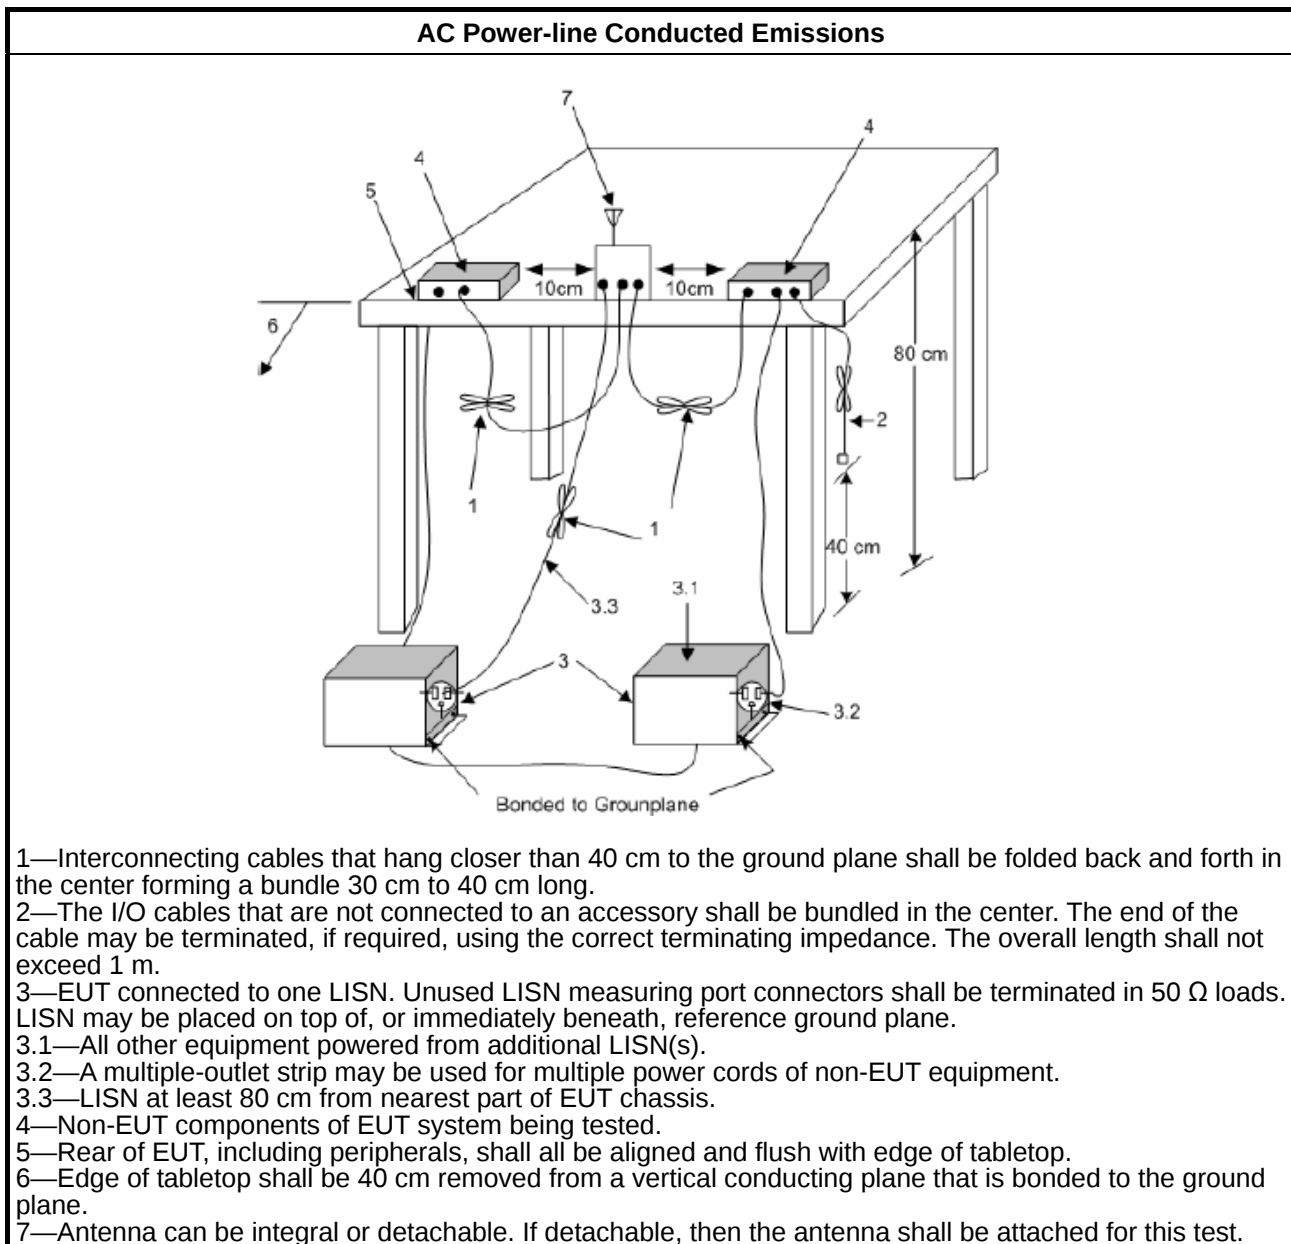

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

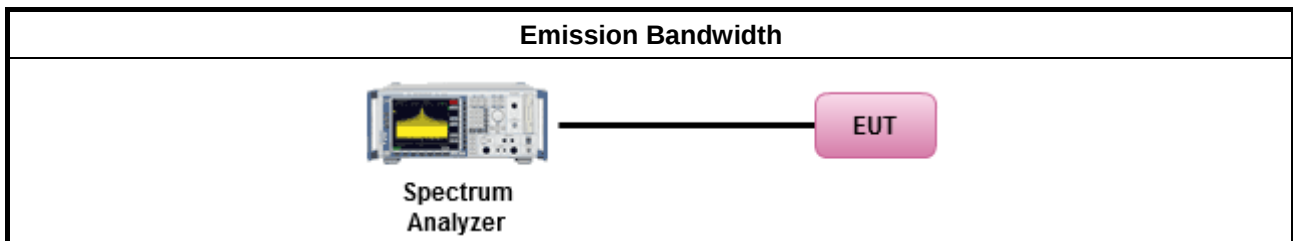

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☒	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

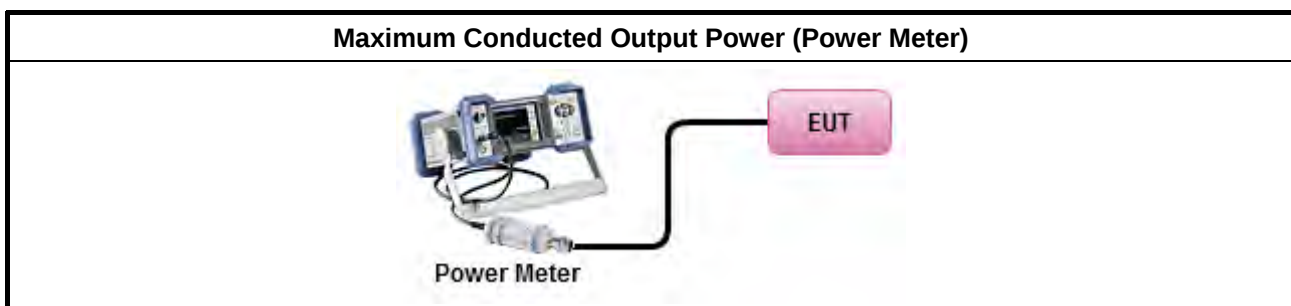



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

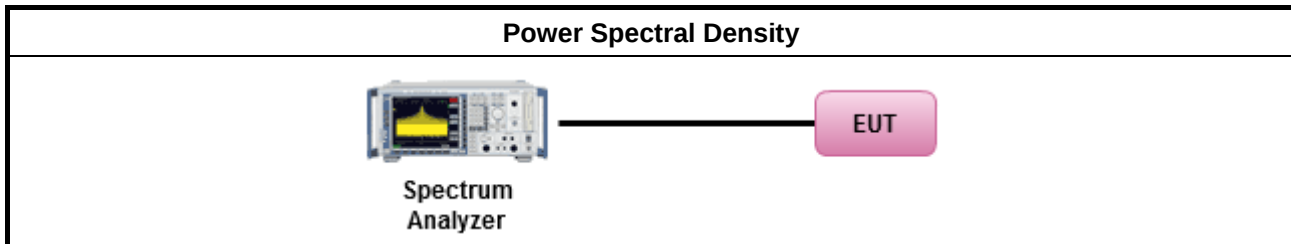

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

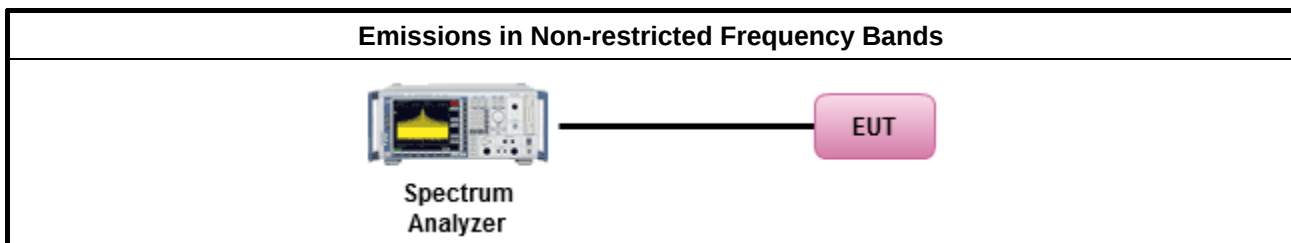

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

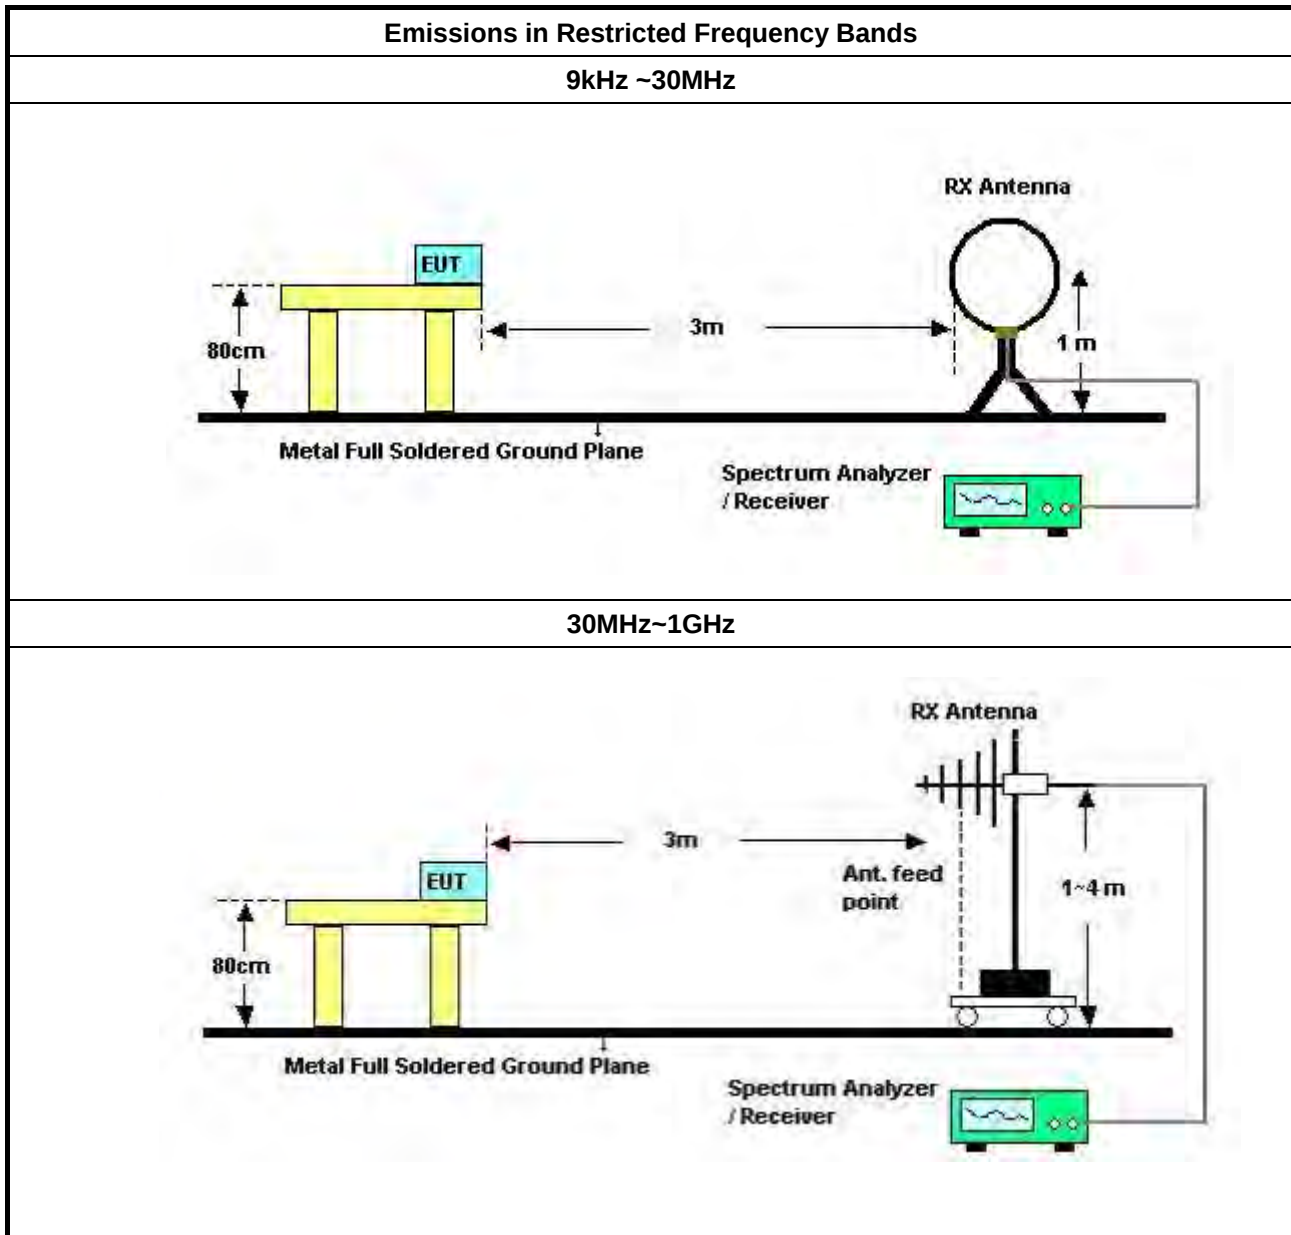

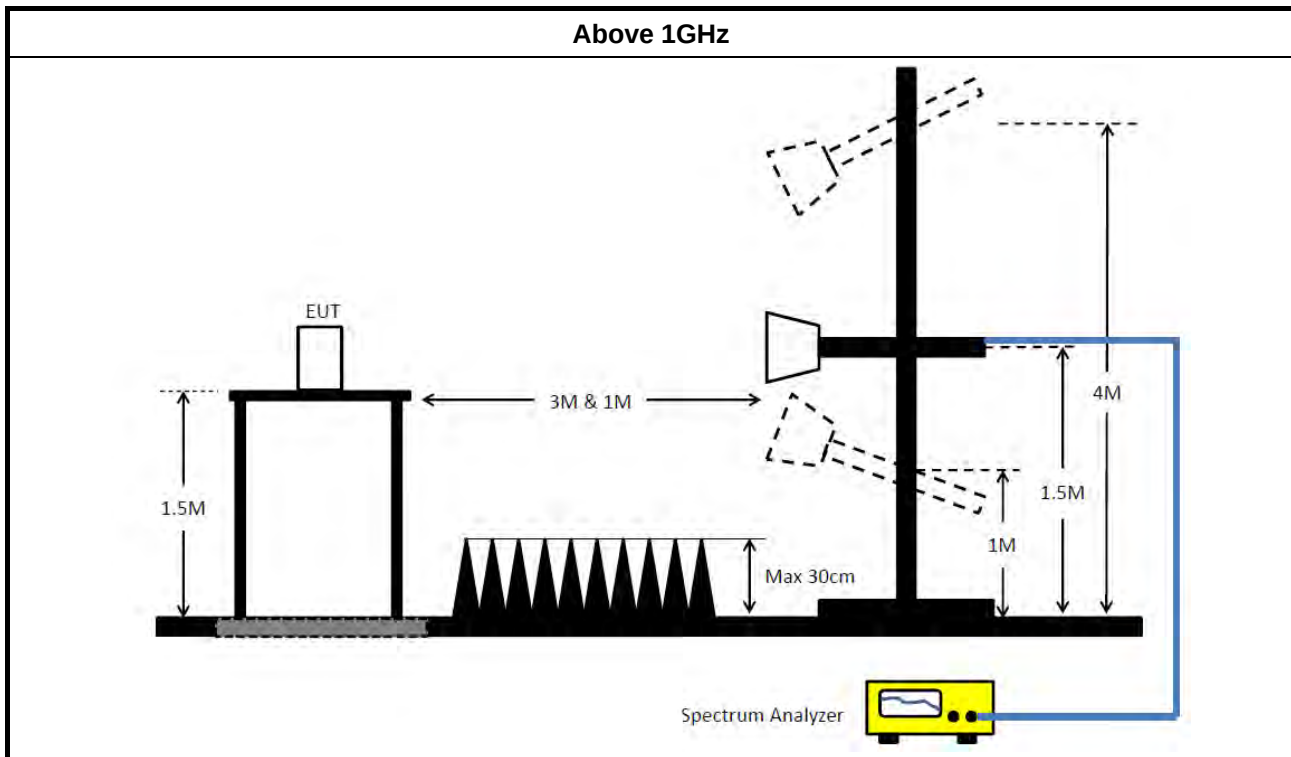

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 26, 2020	Feb. 25, 2021	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 25, 2019	Dec. 24, 2020	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Feb. 25, 2020	Feb. 24, 2021	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 31, 2020	Jan. 30, 2021	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 20, 2020	May 19, 2021	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH04-CB	30 MHz ~ 1 GHz	Aug. 08, 2020	Aug. 07, 2021	Radiation (03CH04-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Radiation (03CH04-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N0607	30MHz ~ 1GHz	Oct. 11, 2020	Oct. 10, 2021	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	310N	187290	0.1MHz ~ 1GHz	Apr. 28, 2020	Apr. 27, 2021	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Dec. 18, 2019	Dec. 17, 2020	Radiation (03CH04-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+67	30MHz ~ 1GHz	Nov. 05, 2020	Nov. 04, 2021	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 26, 2020	Feb. 25, 2021	Radiation (03CH04-CB)
Horn Antenna	ETS • Lindgren	3115	00143147	750MHz~18GHz	Oct. 23, 2020	Oct. 22, 2021	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	83017A	MY53270063	0.5GHz ~ 26.5GHz	Mar. 11, 2020	Mar. 10, 2021	Radiation (03CH04-CB)
Pre-Amplifier	MITEQ	ITA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Dec. 18, 2019	Dec. 17, 2020	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+22	1GHz - 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 29, 2020	May 28, 2021	Radiation (03CH01-CB)
Horn Antenna	ETS-LINDGREN	3115	00075790	750MHz ~ 18GHz	Nov. 04, 2019	Nov. 03, 2020	Radiation (03CH01-CB)
Horn Antenna	ETS-LINDGREN	3115	00075790	750MHz ~ 18GHz	Nov. 06, 2020	Nov. 05, 2021	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2020	Jan. 07, 2021	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	ITA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Apr. 16, 2020	Apr. 15, 2021	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 05, 2020	May 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~ 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.
N.C.R. means Non-Calibration required.



Conducted Emissions at Powerline


Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	AV	16.464M	42.71	50.00	-7.29	Line

Mode 2


23/10/2020

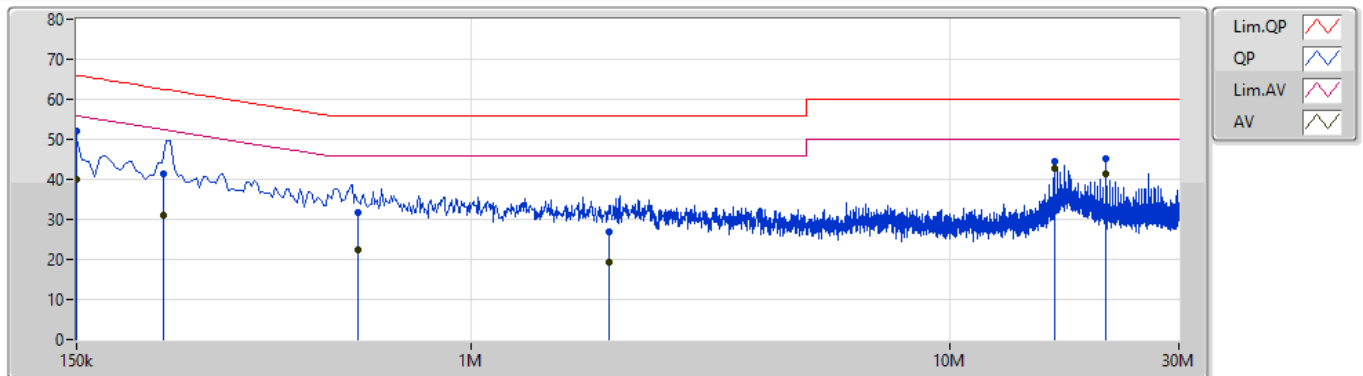

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150k	52.17	66.00	-13.83	9.87	Line	-	42.30	0.05	0.03	9.79			
AV	150k	40.15	56.00	-15.85	9.87	Line	-	30.28	0.05	0.03	9.79			
QP	227.55k	41.45	62.54	-21.09	9.86	Line	-	31.59	0.04	0.03	9.79			
AV	227.55k	31.08	52.54	-21.46	9.86	Line	-	21.22	0.04	0.03	9.79			
QP	580.6k	31.68	56.00	-24.32	9.88	Line	-	21.80	0.04	0.03	9.81			
AV	580.6k	22.26	46.00	-23.74	9.88	Line	-	12.38	0.04	0.03	9.81			
QP	1.941M	26.88	56.00	-29.12	9.96	Line	-	16.92	0.06	0.07	9.83			
AV	1.941M	19.38	46.00	-26.62	9.96	Line	-	9.42	0.06	0.07	9.83			
QP	16.464M	44.32	60.00	-15.68	10.42	Line	-	33.90	0.22	0.26	9.94			
AV	16.464M	42.71	50.00	-7.29	10.42	Line	"Worst"	32.29	0.22	0.26	9.94			
QP	21.169M	45.17	60.00	-14.83	10.58	Line	-	34.59	0.25	0.33	10.00			
AV	21.169M	41.54	50.00	-8.46	10.58	Line	-	30.96	0.25	0.33	10.00			

Mode 2

23/10/2020

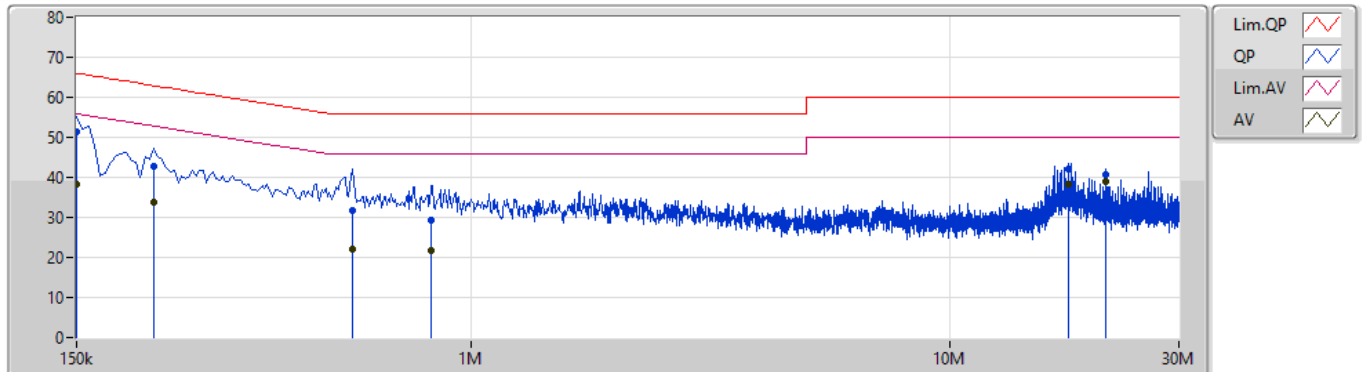

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150k	51.37	66.00	-14.63	9.86	Neutral	-	41.51	0.04	0.03	9.79			
AV	150k	38.24	56.00	-17.76	9.86	Neutral	-	28.38	0.04	0.03	9.79			
QP	217.5k	42.63	62.92	-20.29	9.86	Neutral	-	32.77	0.04	0.03	9.79			
AV	217.5k	33.71	52.92	-19.21	9.86	Neutral	-	23.85	0.04	0.03	9.79			
QP	564k	31.59	56.00	-24.41	9.89	Neutral	-	21.70	0.05	0.03	9.81			
AV	564k	22.18	46.00	-23.82	9.89	Neutral	-	12.29	0.05	0.03	9.81			
QP	825k	29.47	56.00	-26.53	9.92	Neutral	-	19.55	0.06	0.04	9.82			
AV	825k	21.81	46.00	-24.19	9.92	Neutral	-	11.89	0.06	0.04	9.82			
QP	17.599M	42.04	60.00	-17.96	10.45	Neutral	-	31.59	0.20	0.29	9.96			
AV	17.599M	38.41	50.00	-11.59	10.45	Neutral	-	27.96	0.20	0.29	9.96			
QP	21.17M	40.59	60.00	-19.41	10.56	Neutral	-	30.03	0.23	0.33	10.00			
AV	21.17M	38.94	50.00	-11.06	10.56	Neutral	"Worst"	28.38	0.23	0.33	10.00			

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
Zigbee	1.569M	2.336M	2M34G1D	1.481M	2.044M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
Zigbee	-	-	-	-
2405MHz	Pass	500k	1.569M	2.336M
2440MHz	Pass	500k	1.563M	2.33M
2480MHz	Pass	500k	1.481M	2.044M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

Zigbee
2405MHz
EBW

20/10/2020

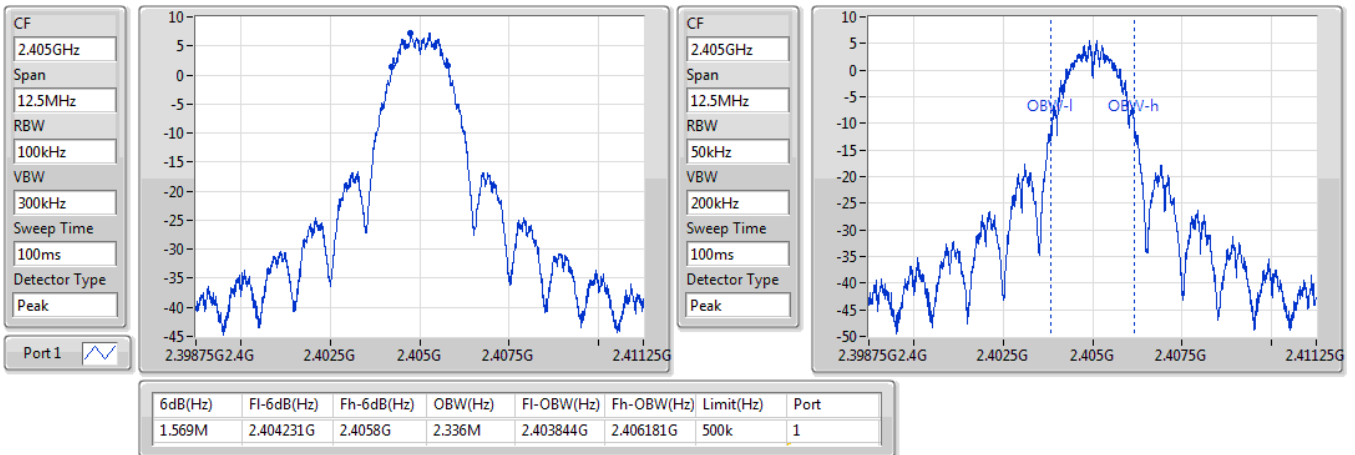
Zigbee
2440MHz
EBW

20/10/2020

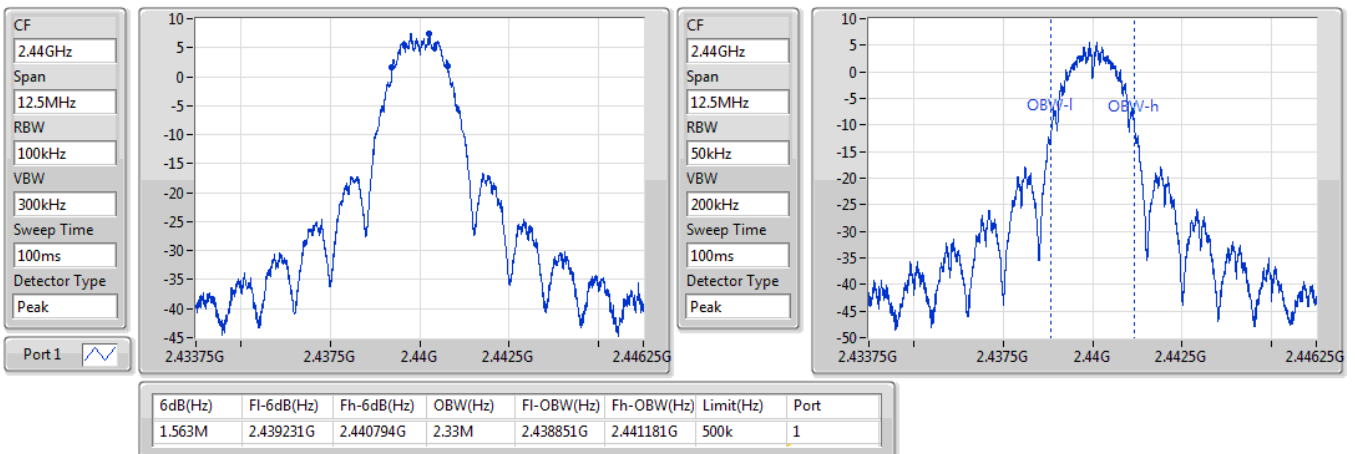


Zigbee

2480MHz

EBW

30/11/2020

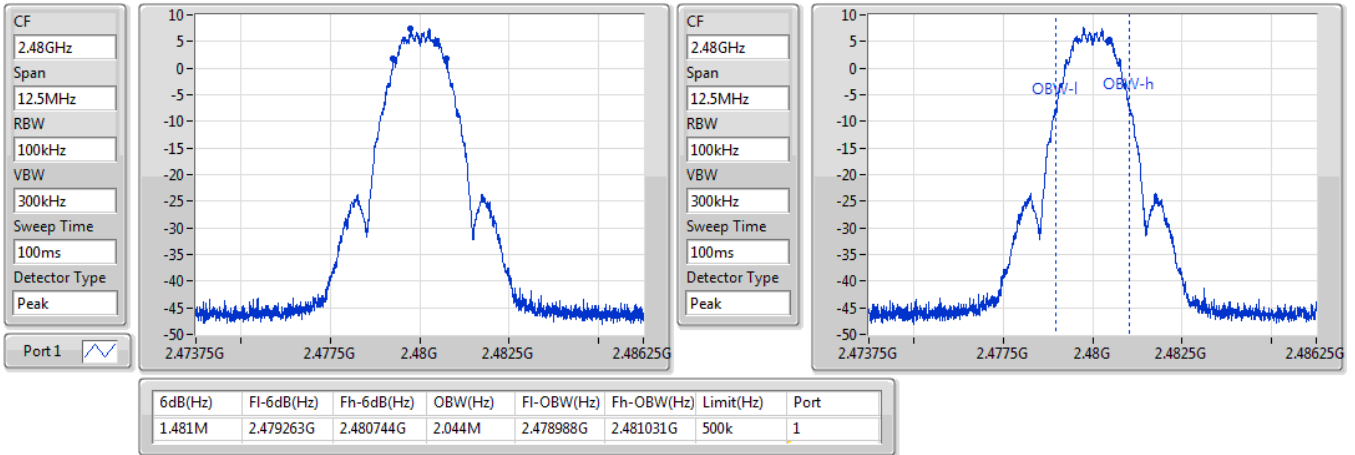



Average Power

Appendix C

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
Zigbee	10.53	0.01130

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
Zigbee	-	-	-	-	-
2405MHz	Pass	2.80	10.41	10.41	30.00
2440MHz	Pass	2.80	10.53	10.53	30.00
2480MHz	Pass	2.80	10.45	10.45	30.00

DG = Directional Gain; **Port X** = Port X output power

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
Zigbee	-1.29

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
Zigbee	-	-	-	-	-
2405MHz	Pass	2.80	-2.81	-2.81	8.00
2440MHz	Pass	2.80	-2.68	-2.68	8.00
2480MHz	Pass	2.80	-1.29	-1.29	8.00

DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

Zigbee

2405MHz

PSD

20/10/2020

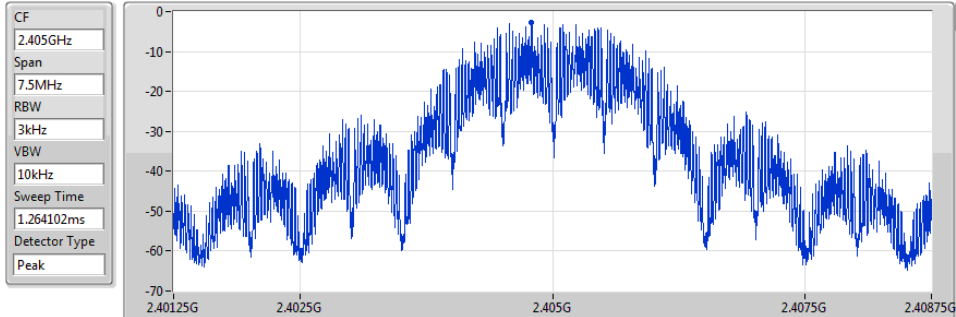


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.81	-2.81	-2.81

Zigbee

2440MHz

PSD

20/10/2020

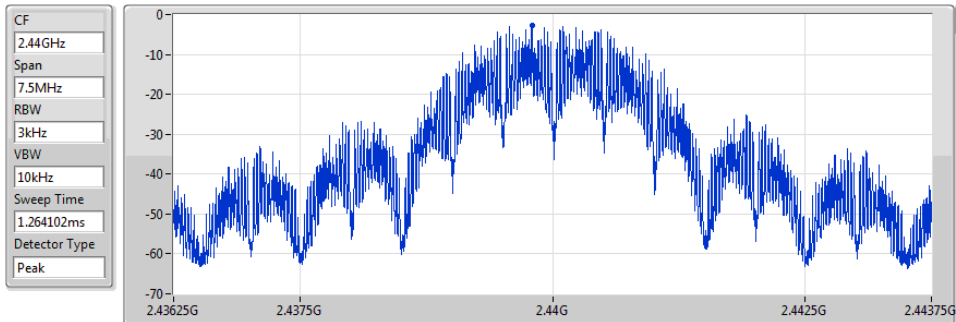


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.68	-2.68	-2.68

Zigbee

2480MHz

PSD

30/11/2020

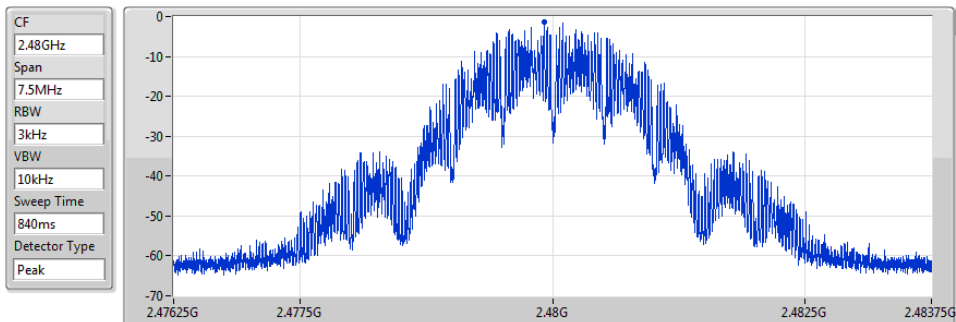

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.29	-1.29	-1.29



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Zigbee	Pass	2.43975G	7.21	-22.79	686.08M	-42.22	2.39601G	-41.49	2.4835G	-44.50	2.49302G	-41.56	24.91279G	-36.20	1

Result



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
Zigbee	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2405MHz	Pass	2.44029G	7.29	-22.71	1.64719G	-52.94	2.39993G	-36.05	2.4G	-36.95	2.49227G	-51.64	16.85546G	-46.41	1
2440MHz	Pass	2.44029G	7.29	-22.71	2.11329G	-52.29	2.39871G	-50.84	2.4835G	-54.45	2.48532G	-51.42	16.74574G	-46.15	1
2480MHz	Pass	2.43975G	7.21	-22.79	686.08M	-42.22	2.39601G	-41.49	2.4835G	-44.50	2.49302G	-41.56	24.91279G	-36.20	1

Zigbee 2405MHz

CSE NdB

20/10/2020

Port1

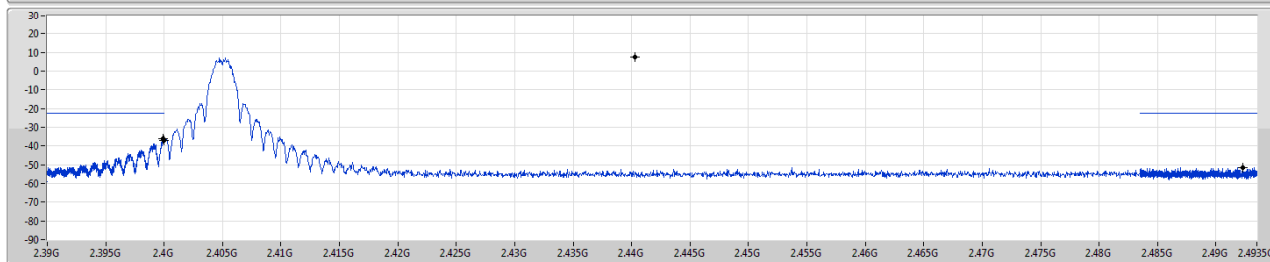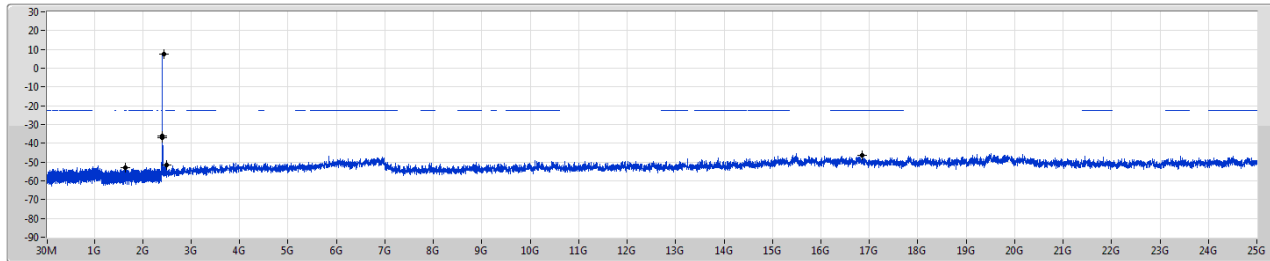

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44029G	7.29	-22.71	1.64719G	-52.94	2.39993G	-36.05	2.4G	-36.95	2.49227G	-51.64	16.85546G	-46.41	1

Zigbee 2440MHz

CSE NdB

20/10/2020

Port1

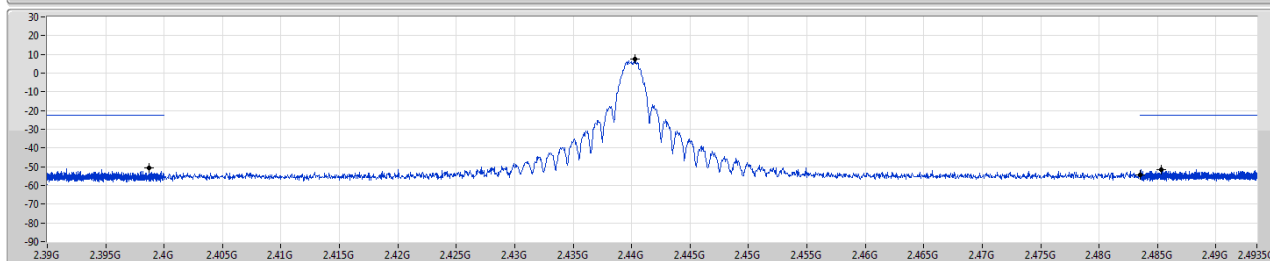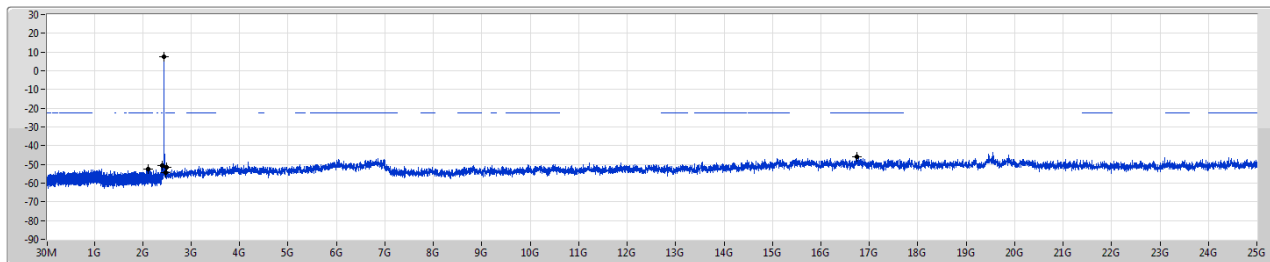

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44029G	7.29	-22.71	2.11329G	-52.29	2.39871G	-50.84	2.4835G	-54.45	2.48532G	-51.42	16.74574G	-46.15	1

Zigbee
2480MHz

CSE NdB

30/11/2020

Port 1

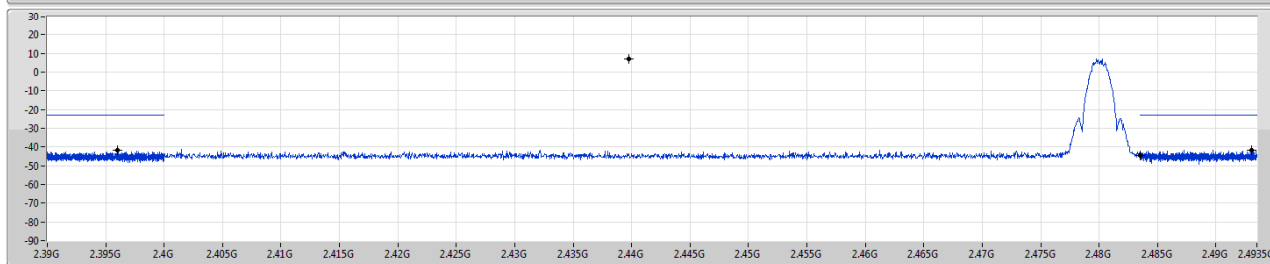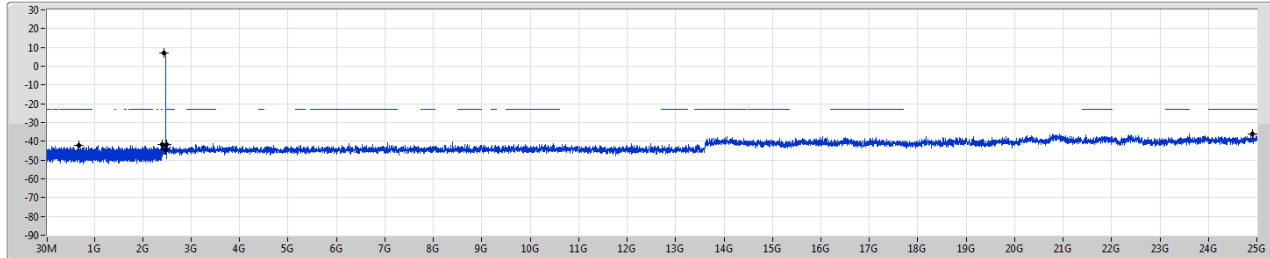

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43975G	7.21	-22.79	686.08M	-42.22	2.39601G	-41.49	2.4835G	-44.50	2.49302G	-41.56	24.91279G	-36.20	1




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	PK	530.52M	44.10	46.00	-1.90	Vertical

Mode 2


20/11/2020

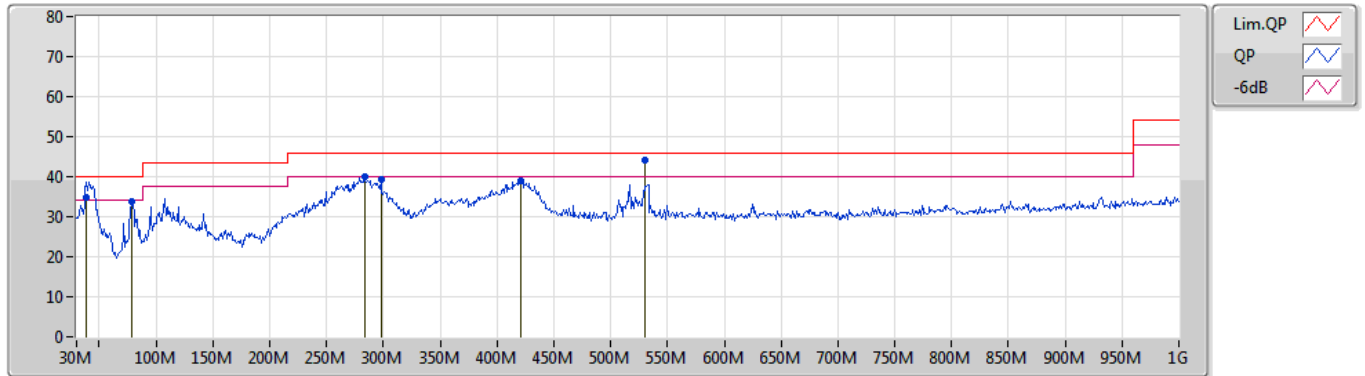

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
QP	38.73M	34.79	40.00	-5.21	-11.21	3	Vertical	148	1.00	"	46.00	19.79	0.60	31.60
PK	78.5M	33.90	40.00	-6.10	-18.04	3	Vertical	304	3.00	-	51.94	12.64	0.90	31.58
PK	283.17M	39.91	46.00	-6.09	-10.93	3	Vertical	105	1.00	-	50.84	18.69	1.83	31.45
PK	297.72M	39.41	46.00	-6.59	-10.55	3	Vertical	217	1.00	-	49.96	19.01	1.89	31.45
PK	420.91M	38.92	46.00	-7.08	-6.66	3	Vertical	205	1.50	-	45.58	22.54	2.24	31.44
PK	530.52M	44.10	46.00	-1.90	-5.43	3	Vertical	182	1.25	"Worst"	49.53	23.62	2.52	31.57

Mode 2

20/11/2020

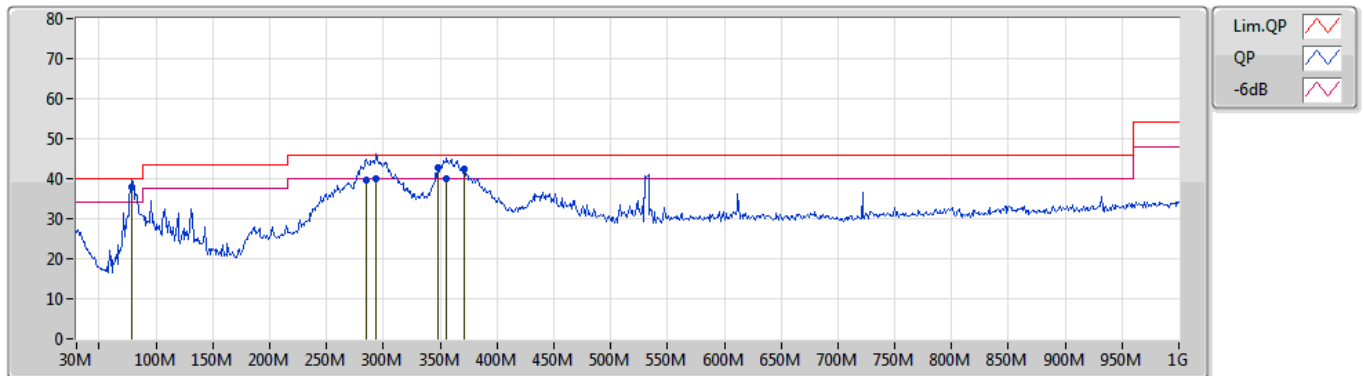

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
QP	78.5M	38.06	40.00	-1.94	-18.04	3	Horizontal	200	3.00	"Worst"	56.10	12.64	0.90	31.58
QP	285M	39.79	46.00	-6.21	-10.91	3	Horizontal	282	1.00	-	50.70	18.70	1.84	31.45
QP	293.84M	39.86	46.00	-6.14	-10.64	3	Horizontal	302	1.25	-	50.50	18.93	1.88	31.45
PK	348.16M	42.60	46.00	-3.40	-9.21	3	Horizontal	148	1.25	-	51.81	20.16	2.00	31.37
QP	355.92M	39.83	46.00	-6.17	-8.87	3	Horizontal	152	1.00	-	48.70	20.49	2.02	31.38
PK	371.44M	42.41	46.00	-3.59	-8.59	3	Horizontal	152	1.00	-	51.00	20.73	2.09	31.41




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
Zigbee	Pass	AV	2.4835G	51.96	54.00	-2.04	3	Horizontal	126	1.00	-

Zigbee

2405MHz_TX

19/10/2020

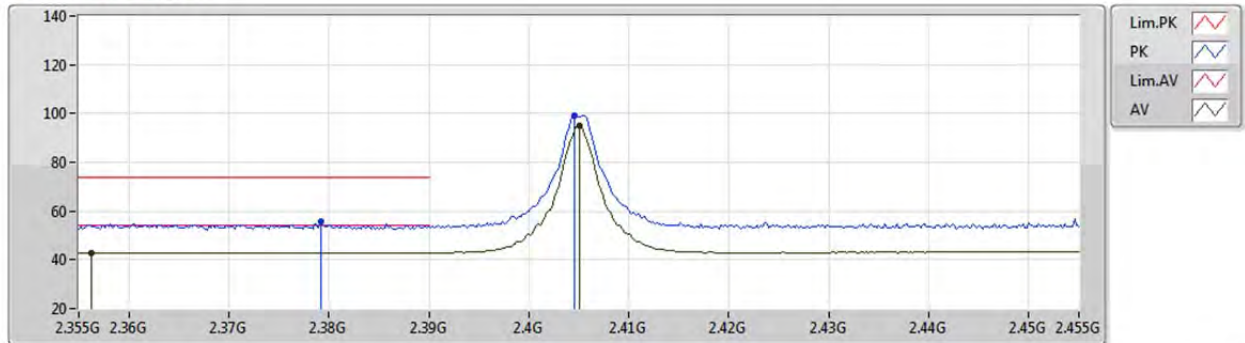


EUT Z_1TX
Setting 10dB
04-E-P-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3792G	55.49	74.00	-18.51	24.69	3	Vertical	309	2.26	-	27.52	3.28	-
AV	2.3562G	42.97	54.00	-11.03	12.17	3	Vertical	309	2.26	-	27.54	3.26	-
PK	2.4046G	99.37	Inf	-Inf	68.55	3	Vertical	309	2.26	-	27.52	3.30	-
AV	2.405G	95.24	Inf	-Inf	64.42	3	Vertical	309	2.26	-	27.52	3.30	-

Zigbee

2405MHz_TX

19/10/2020

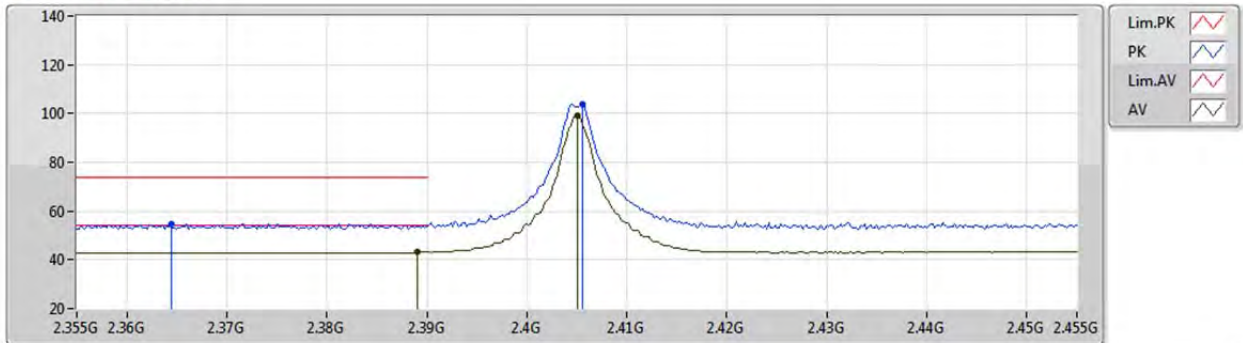


EUT Z_1TX
Setting 10dB
04-E-P-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3644G	54.90	74.00	-19.10	24.10	3	Horizontal	182	1.11	-	27.54	3.26	-
AV	2.389G	43.05	54.00	-10.95	12.25	3	Horizontal	182	1.11	-	27.51	3.29	-
PK	2.4056G	103.62	Inf	-Inf	72.80	3	Horizontal	182	1.11	-	27.52	3.30	-
AV	2.405G	99.32	Inf	-Inf	68.50	3	Horizontal	182	1.11	-	27.52	3.30	-

Zigbee

2405MHz_TX

19/10/2020

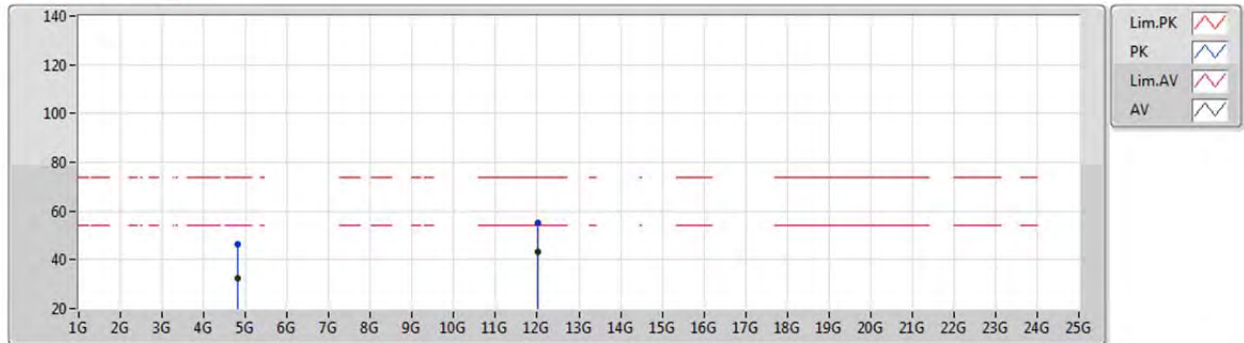


EUT Z_1TX
Setting 10dB
01-A-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80508G	46.59	74.00	-27.41	43.92	3	Vertical	120	2.32	-	32.41	5.00	34.74
AV	4.80116G	32.44	54.00	-21.56	29.78	3	Vertical	120	2.32	-	32.40	5.00	34.74
PK	12.02736G	55.28	74.00	-18.72	43.80	3	Vertical	230	2.52	-	38.47	8.01	35.00
AV	12.02252G	43.06	54.00	-10.94	31.57	3	Vertical	230	2.52	-	38.48	8.01	35.00

Zigbee

2405MHz_TX

19/10/2020

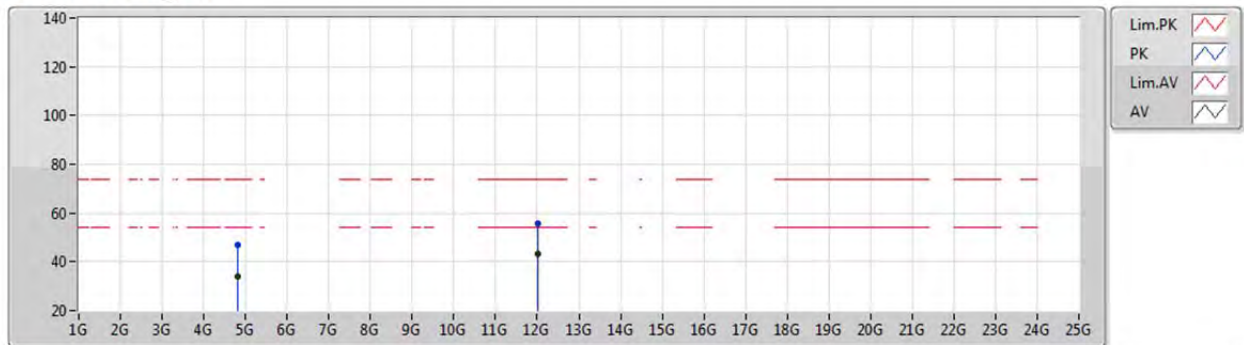


EUT Z_1TX
Setting 10dB
01-A-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.81104G	46.93	74.00	-27.07	44.23	3	Horizontal	228	2.42	-	32.42	5.01	34.73
AV	4.80896G	34.21	54.00	-19.79	31.53	3	Horizontal	228	2.42	-	32.42	5.00	34.74
PK	12.02216G	55.94	74.00	-18.06	44.45	3	Horizontal	274	2.17	-	38.48	8.01	35.00
AV	12.0226G	43.27	54.00	-10.73	31.78	3	Horizontal	274	2.17	-	38.48	8.01	35.00

Zigbee

2440MHz_TX

19/10/2020

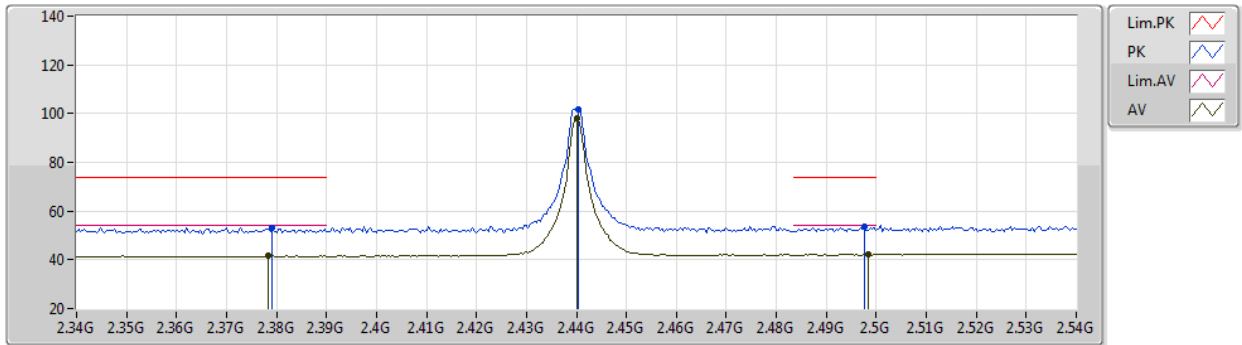


EUT Z_1TX
Setting 10dB
01-A-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3792G	53.07	74.00	-20.93	23.47	3	Vertical	249	2.17	-	27.42	2.18	-
AV	2.3784G	41.57	54.00	-12.43	11.98	3	Vertical	249	2.17	-	27.41	2.18	-
PK	2.4404G	101.98	Inf	-Inf	72.16	3	Vertical	249	2.17	-	27.58	2.24	-
AV	2.44G	98.02	Inf	-Inf	68.20	3	Vertical	249	2.17	-	27.58	2.24	-
PK	2.4976G	53.84	74.00	-20.16	23.65	3	Vertical	249	2.17	-	27.89	2.30	-
AV	2.4984G	42.25	54.00	-11.75	12.06	3	Vertical	249	2.17	-	27.89	2.30	-

Zigbee

2440MHz_TX

19/10/2020

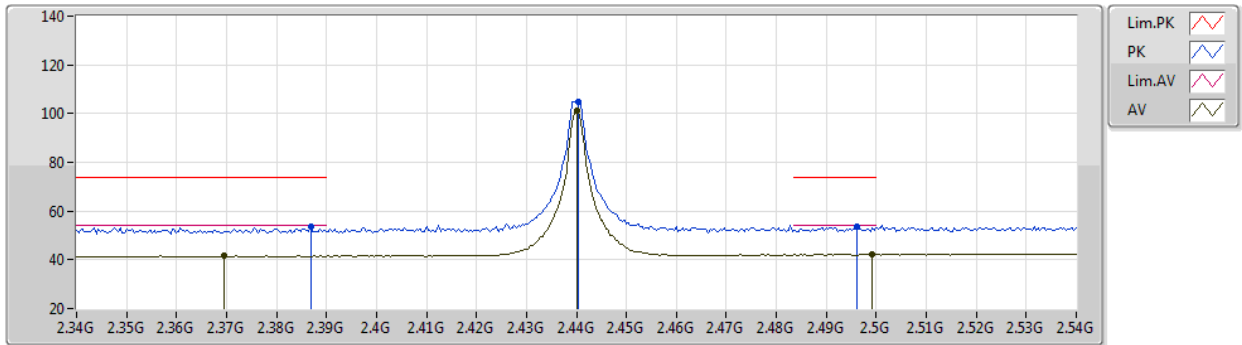


EUT Z_1TX
Setting 10dB
01-A-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	2.3696G	41.52	54.00	-12.48	11.97	3	Horizontal	311	1.26	-	27.38	2.17	-
PK	2.3868G	53.62	74.00	-20.38	23.98	3	Horizontal	311	1.26	-	27.45	2.19	-
AV	2.44G	101.14	Inf	-Inf	71.32	3	Horizontal	311	1.26	-	27.58	2.24	-
PK	2.4404G	105.06	Inf	-Inf	75.24	3	Horizontal	311	1.26	-	27.58	2.24	-
AV	2.4992G	42.23	54.00	-11.77	12.03	3	Horizontal	311	1.26	-	27.90	2.30	-
PK	2.496G	53.37	74.00	-20.63	23.19	3	Horizontal	311	1.26	-	27.88	2.30	-

Zigbee

2440MHz_TX

19/10/2020

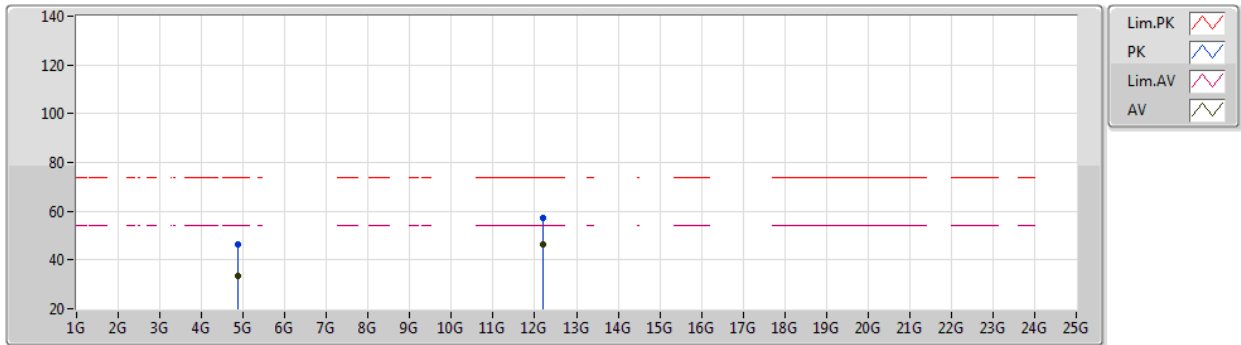


EUT_Z_1TX
Setting 10dB
01-A-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87872G	46.56	74.00	-27.44	43.64	3	Vertical	225	2.33	-	32.56	5.04	34.68
AV	4.88104G	33.29	54.00	-20.71	30.37	3	Vertical	225	2.33	-	32.56	5.04	34.68
PK	12.20268G	57.20	74.00	-16.80	45.65	3	Vertical	151	2.36	-	38.40	8.09	34.94
AV	12.20236G	46.63	54.00	-7.37	35.08	3	Vertical	151	2.36	-	38.40	8.09	34.94

Zigbee

2440MHz_TX

19/10/2020

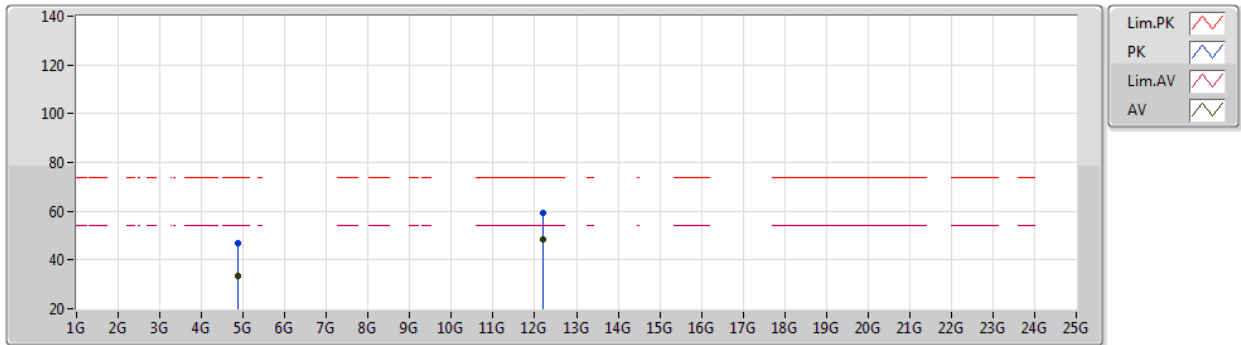


EUT Z_1TX
Setting 10dB
01-A-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8814G	46.77	74.00	-27.23	43.85	3	Horizontal	160	2.78	-	32.56	5.04	34.68
AV	4.88064G	33.34	54.00	-20.66	30.42	3	Horizontal	160	2.78	-	32.56	5.04	34.68
PK	12.19752G	59.50	74.00	-14.50	47.95	3	Horizontal	277	2.20	-	38.40	8.09	34.94
AV	12.20236G	48.46	54.00	-5.54	36.91	3	Horizontal	277	2.20	-	38.40	8.09	34.94

Zigbee

2480MHz_TX

29/10/2020

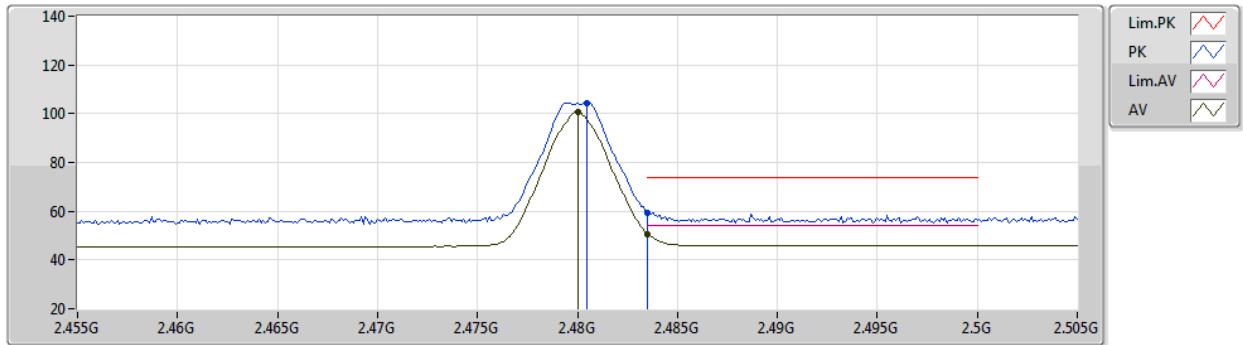


EUT Z_1TX
Setting 10dB
04-F-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4805G	104.52	Inf	-Inf	71.31	3	Vertical	154	2.14	-	29.93	3.28	-
AV	2.48G	100.79	Inf	-Inf	67.59	3	Vertical	154	2.14	-	29.92	3.28	-
PK	2.4835G	59.42	74.00	-14.58	26.17	3	Vertical	154	2.14	-	29.97	3.28	-
AV	2.4835G	50.70	54.00	-3.30	17.45	3	Vertical	154	2.14	-	29.97	3.28	-

Zigbee

2480MHz_TX

29/10/2020

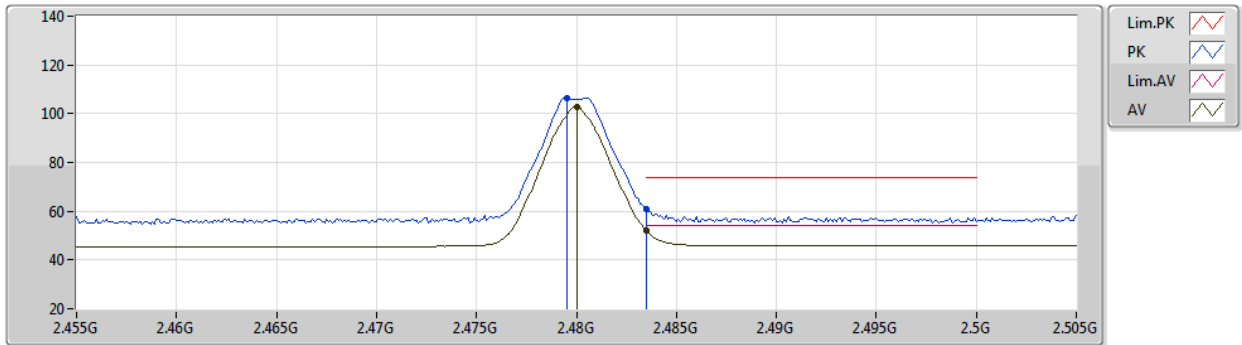


EUT Z_1TX
Setting 10dB
04-F-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4795G	106.48	Inf	-Inf	73.29	3	Horizontal	126	1.00	-	29.91	3.28	-
AV	2.48G	102.72	Inf	-Inf	69.52	3	Horizontal	126	1.00	-	29.92	3.28	-
PK	2.4835G	60.90	74.00	-13.10	27.65	3	Horizontal	126	1.00	-	29.97	3.28	-
AV	2.4835G	51.96	54.00	-2.04	18.71	3	Horizontal	126	1.00	-	29.97	3.28	-

Zigbee

2480MHz_TX

29/10/2020

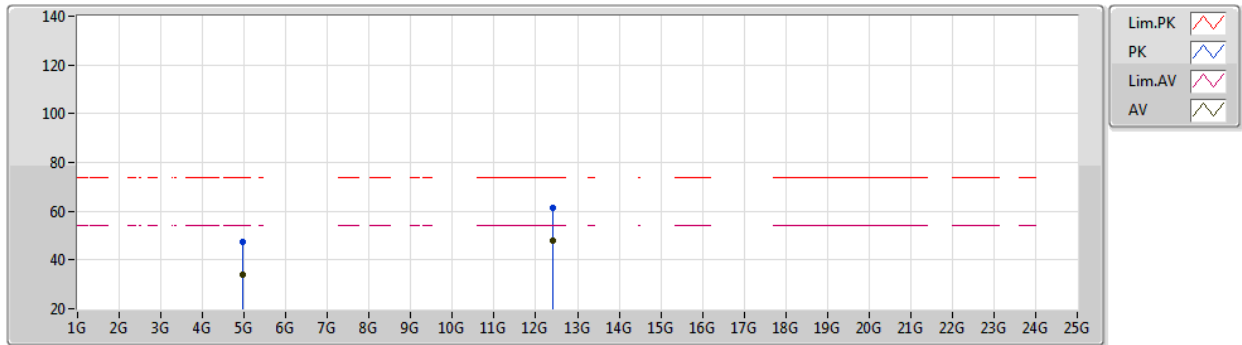


EUT_Z_1TX
Setting 10dB
04-F-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.95708G	47.45	74.00	-26.55	40.73	3	Vertical	103	1.83	-	34.00	5.58	32.86
AV	4.95508G	33.82	54.00	-20.18	27.10	3	Vertical	103	1.83	-	34.00	5.58	32.86
PK	12.40282G	61.13	74.00	-12.87	42.73	3	Vertical	220	1.36	-	42.69	9.96	34.25
AV	12.40228G	48.03	54.00	-5.97	29.62	3	Vertical	220	1.36	-	42.70	9.96	34.25

Zigbee

2480MHz_TX

29/10/2020

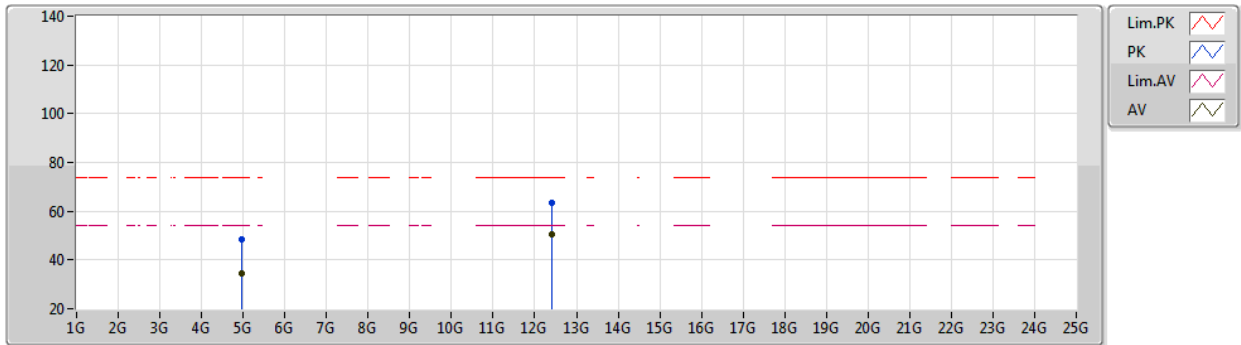

EUT_Z_1TX
Setting 10dB
04-F-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.95124G	48.26	74.00	-25.74	41.54	3	Horizontal	309	1.80	-	34.00	5.58	32.86
AV	4.9534G	34.26	54.00	-19.74	27.54	3	Horizontal	309	1.80	-	34.00	5.58	32.86
PK	12.40228G	63.42	74.00	-10.58	45.01	3	Horizontal	137	3.00	-	42.70	9.96	34.25
AV	12.40222G	50.61	54.00	-3.39	32.20	3	Horizontal	137	3.00	-	42.70	9.96	34.25