

FCC AND ISED TEST REPORT FOR CERTIFICATION
On Behalf of

INMUSIC BRANDS INC

CD player

Model Number: DN-700CB

Additional Model: DP30

FCC ID:Y4O-DP30

IC: 11215A-DP30

Prepared for:	INMUSIC BRANDS INC
	200 SCENIC VIEW DRIVE, SUITE 201, CUMBERLAND, RI 02864,
	U.S.A
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R1809085
Date of Test:	September 06 ~ 26, 2018
Date of Report:	September 28, 2018

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram	8
2.6. Test mode	9
2.7. Channel List	9
2.8. Test Equipment.....	10
3 POWER LINE CONDUCTED EMISSION TEST.....	12
3.1. Limit.....	12
3.2. Test Procedure.....	12
3.3. Test Result.....	12
3.4. Test Data	13
4 RADIATED EMISSION TEST	19
4.1. Limit.....	19
4.2. Block Diagram of Test setup.....	20
4.3. Test Procedure.....	21
4.4. Test Result.....	21
4.5. Test Data	22
5 BAND EDGE COMPLIANCE TEST	48
5.1. Limit.....	48
5.2. Block Diagram of Test setup.....	48
5.3. Test Procedure.....	48
5.4. Test Result.....	48
5.5. Test Data	49
6 6dB Bandwidth Test.....	57
6.1. Limit.....	57
6.2. Test Procedure.....	57
6.3. Test Result.....	57
6.4. Test Data	58
7 99% BANDWIDTH	60
7.1. Limit.....	60
7.2. Test Procedure.....	60
7.3. Test Result.....	60
7.4. Test Data	61
8 OUTPUT POWER TEST	63
8.1. Limit.....	63
8.2. Test Procedure.....	63
8.3. Test Result.....	63
8.4. Test Data	64

9 POWER SPECTRAL DENSITY TEST66

 9.1 Limit66

 9.2 Test Procedure66

 9.3 Test Result.....66

 9.4 Test Data67

10 ANTENNA REQUIREMENTS69

 10.1 Limit69

 10.2 Result.....69

11 TEST SETUP PHOTO70

12 PHOTO EUT.....73

EST Technology Co., Ltd.

Applicant:	INMUSIC BRANDS INC		
Address:	200 SCENIC VIEW DRIVE, SUITE 201, CUMBERLAND, RI 02864,U.S.A		
Manufacturer:	INMUSIC BRANDS INC		
Address:	200 SCENIC VIEW DRIVE, SUITE 201, CUMBERLAND, RI 02864,U.S.A		
E.U.T:	CD player		
Model Number:	DN-700CB		
Additional Model:	DP30 Note: They are identical to each other, only except for model name, appearance in color or decorating parts and silkscreen for marketing purpose.		
Power Supply:	AC 100-240V ~ 50/60Hz, 20W		
Test Voltage:	AC 120V/60Hz AC 240V/60Hz		
Trade Name:	Denon professional	Serial No.:	-----
Date of Receipt:	August 30, 2018	Date of Test:	September 06 ~ 26, 2018
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2017 ANSI C63.10:2013 RSS 247 Issue 2.0 February 2017 RSS GEN Issue 5, April 2018		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the Regulations Part 15 Subpart C and RSS-247 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: September 28, 2018		
Prepared by:	Reviewed by:	Approved by:	
 Ring / Assistant	 Tony / Engineer	 Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	CD player			
Model Number	:	DN-700CB			
FCC ID	:	Y4O-DP30			
IC	:	11215A-DP30			
Operation frequency	:	2402MHz~2480MHz			
Number of channel	:	79		40	
Antenna	:	Antenna	M/N	Type	Gain
		1	AN13-04	External Antenna	2.5 dBi
		2	TQC-2400-1.8DXBNC		2.5 dBi
		Note: The device has one BNC jack, and include two antennas for customers to choose one to use.			
Modulation	:	Dual-mode Bluetooth 4.0 BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK BT EDR: 8-DPSK		Dual-mode Bluetooth 4.0 BLE: GFSK	
Product Software Version	:	V1.07			
Product Hardware Version	:	HMS1			
Radio Software Version	:	BT V0101			
Radio Hardware Version	:	OTS1			
RF power setting in test SW	:	7			
Test SW Version	:	RTK BT MP TOOL			

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013 RSS Gen Issue 5 Section8.8	PASS
Radiated Emissions	FCC Part 15: 15.209 ANSI C63.10:2013 KDB 558074 RSS 247 Issue 2 Section5.5 RSS Gen Issue 5 Section8.9 RSS Gen Issue 5 Section8.10	PASS
Band Edge Compliance Test	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074 RSS Gen Issue 5 Section6.6	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074 RSS 247 Issue 2 Section5.2 (a)	PASS
99% Bandwidth	RSS Gen Issue 5 Section6.6	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074 RSS Gen Issue 5 Section8.6	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074 RSS 247 Issue 2 Section5.2 (b)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: KDB 558074 D01 15.247 Meas Guidance v05		

2.2. Test Facilities

EMC Lab	:	Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: November 13, 2017 Certificated by A2LA, USA Registration No.: 4366.01 Date of registration: November 07, 2017 Certificated by FCC, USA Designation Number: CN1215 Registration No.: 722932 Date of registration: November 21, 2017 Certificated by Industry Canada Registration No.: 9405A Date of registration: December 03, 2015 Certificated by VCCI, Japan Registration No.: R-13663; C-14103 Date of registration: July 25, 2017 This Certificate is valid until: July 24, 2020 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: February 07, 2015 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L2-64 Date of registration: April 28, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 18GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2.4. Assistant equipment used for test

2.4.1. N/A

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was be set into Bluetooth test mode by software before test.



(EUT: CD player)

2.6. Test mode

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

Mode	Channel	Frequency
BT 4.0-BLE GFSK	Low	2402MHz
	Middle	2440MHz
	High	2480MHz

2.7. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2404
3	2406	4	2408
5	2410	6	2412
7	2414	8	2416
9	2418	10	2420
11	2422	12	2424
13	2426	14	2428
15	2430	16	2432
17	2434	18	2436
19	2438	20	2440
21	2442	22	2444
23	2446	24	2448
25	2450	26	2452
27	2454	28	2456
29	2458	30	2460
31	2462	32	2464
33	2466	34	2468
35	2470	36	2472
37	2474	38	2476
39	2478	40	2480

2.8. Test Equipment

2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	CEPREI	June 15,18	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	CEPREI	June 15,18	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB1519	1519-038	CEPREI	October 08,17	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA912 0D1002	CEPREI	June 18,18	1 Year
Horn Antenna	SCHWARZB ECK	BBHA9170	BBHA917 0242	CEPREI	June 18,18	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	MY50180 031	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.5. For connect EUT antenna terminal test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211 139	CEPREI	June 15,18	1 Year

3 POWER LINE CONDUCTED EMISSION TEST

3.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.2 Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.


3.3. Test Result

PASS. (All emissions not reported below are too low against the prescribed limits.)

3.4. Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

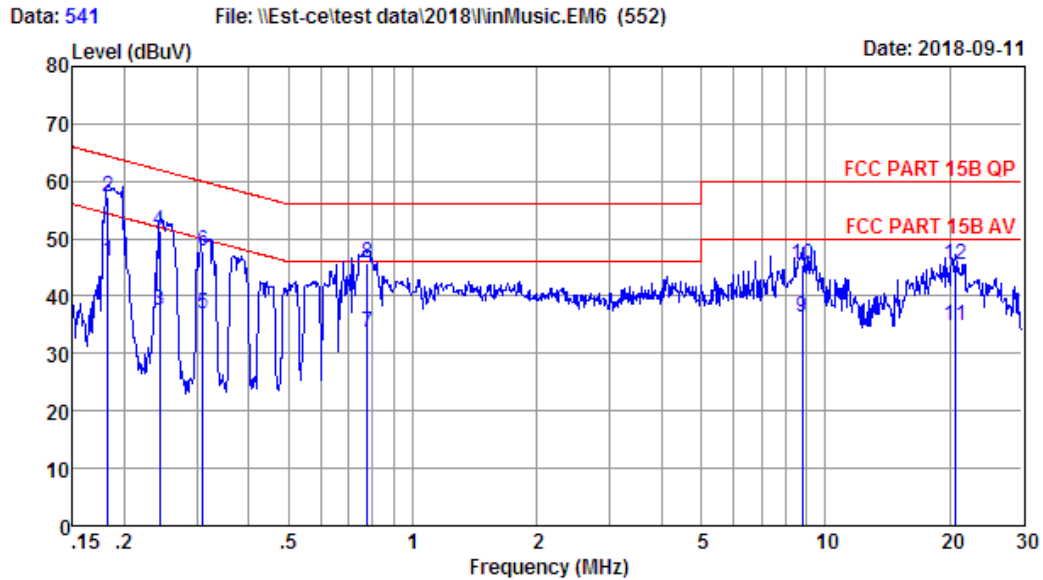

Site no : 844 Shield Room Data no. : 541
 Env. / Ins. : Temp:23.4°C Humi:49% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.182	9.73	9.77	26.43	45.93	54.37	8.44	Average
2	0.182	9.73	9.77	37.69	57.19	64.37	7.18	QP
3	0.243	9.72	9.92	17.90	37.54	52.00	14.46	Average
4	0.243	9.72	9.92	31.81	51.45	62.00	10.55	QP
5	0.310	9.72	9.92	17.30	36.94	49.97	13.03	Average
6	0.310	9.72	9.92	28.23	47.87	59.97	12.10	QP
7	0.775	9.72	9.93	13.93	33.58	46.00	12.42	Average
8	0.775	9.72	9.93	26.24	45.89	56.00	10.11	QP
9	8.776	9.81	10.05	16.43	36.29	50.00	13.71	Average
10	8.776	9.81	10.05	25.63	45.49	60.00	14.51	QP
11	20.594	10.07	10.16	14.67	34.90	50.00	15.10	Average
12	20.594	10.07	10.16	25.09	45.32	60.00	14.68	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 543

File: \\Est-ce\test data\2018\WinMusic.EM6 (552)

Date: 2018-09-11

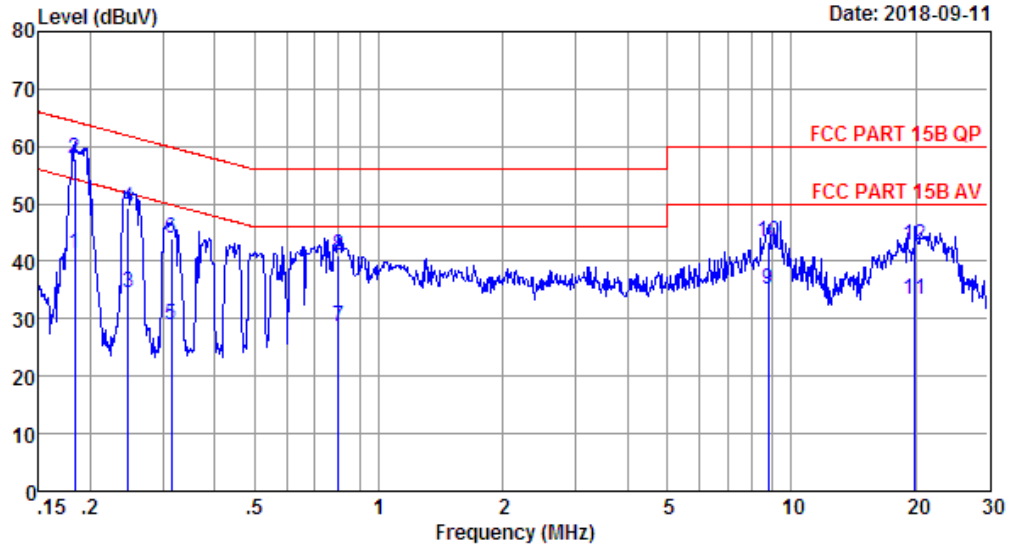

Site no : 844 Shield Room Data no. : 543
Env. / Ins. : Temp:23.4°C Humi:49% Press:101.50kPa LINE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : Viking
EUT : CD player
Power : AC 120V/60Hz
M/N : DN-700CB
Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.183	9.62	9.77	22.04	41.43	54.33	12.90	Average
2	0.183	9.62	9.77	38.40	57.79	64.33	6.54	QP
3	0.247	9.62	9.92	14.90	34.44	51.86	17.42	Average
4	0.247	9.62	9.92	29.83	49.37	61.86	12.49	QP
5	0.315	9.63	9.92	9.30	28.85	49.84	20.99	Average
6	0.315	9.63	9.92	24.44	43.99	59.84	15.85	QP
7	0.800	9.70	9.93	8.93	28.56	46.00	17.44	Average
8	0.800	9.70	9.93	21.54	41.17	56.00	14.83	QP
9	8.776	10.00	10.05	15.06	35.11	50.00	14.89	Average
10	8.776	10.00	10.05	23.36	43.41	60.00	16.59	QP
11	19.950	10.18	10.16	13.15	33.49	50.00	16.51	Average
12	19.950	10.18	10.16	22.60	42.94	60.00	17.06	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 545

File: \\Est-ce\test data\2018\linMusic.EM6 (552)

Date: 2018-09-11

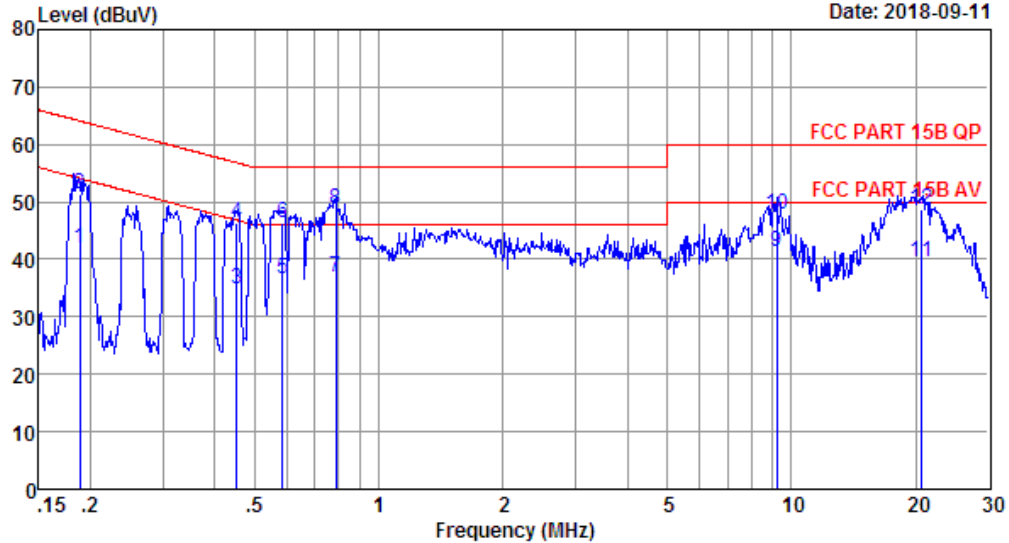

Site no : 844 Shield Room Data no. : 545
Env. / Ins. : Temp:23.4°C Humi:49% Press:101.50kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : Viking
EUT : CD player
Power : AC 240V/60Hz
M/N : DN-700CB
Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.188	9.73	9.77	22.43	41.93	54.11	12.18	Average
2	0.188	9.73	9.77	31.97	51.47	64.11	12.64	QP
3	0.452	9.72	9.92	15.20	34.84	46.85	12.01	Average
4	0.452	9.72	9.92	26.62	46.26	56.85	10.59	QP
5	0.585	9.72	9.92	17.05	36.69	46.00	9.31	Average
6	0.585	9.72	9.92	26.75	46.39	56.00	9.61	QP
7	0.788	9.72	9.93	17.33	36.98	46.00	9.02	Average
8	0.788	9.72	9.93	28.98	48.63	56.00	7.37	QP
9	9.204	9.81	10.06	21.59	41.46	50.00	8.54	Average
10	9.204	9.81	10.06	27.97	47.84	60.00	12.16	QP
11	20.704	10.07	10.15	19.20	39.42	50.00	10.58	Average
12	20.704	10.07	10.15	28.58	48.80	60.00	11.20	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 547

File: \\Est-ce\test data\2018\WinMusic.EM6 (552)

Date: 2018-09-11

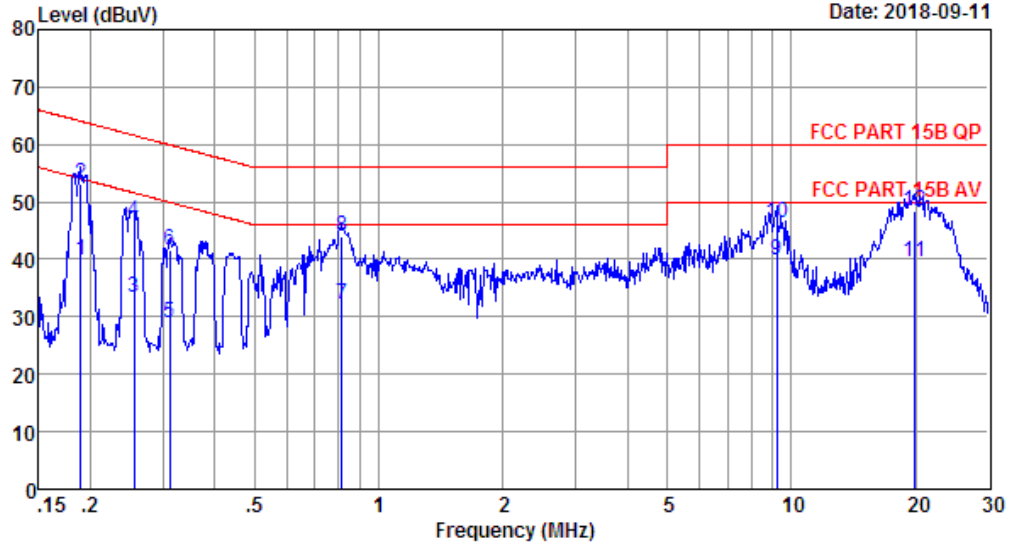

Site no : 844 Shield Room Data no. : 547
Env. / Ins. : Temp:23.4°C Humi:49% Press:101.50kPa LINE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : Viking
EUT : CD player
Power : AC 240V/60Hz
M/N : DN-700CB
Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.189	9.62	9.77	20.43	39.82	54.06	14.24	Average
2	0.189	9.62	9.77	33.70	53.09	64.06	10.97	QP
3	0.255	9.62	9.92	13.90	33.44	51.60	18.16	Average
4	0.255	9.62	9.92	27.01	46.55	61.60	15.05	QP
5	0.312	9.63	9.92	9.30	28.85	49.93	21.08	Average
6	0.312	9.63	9.92	22.16	41.71	59.93	18.22	QP
7	0.813	9.70	9.93	12.57	32.20	46.00	13.80	Average
8	0.813	9.70	9.93	24.30	43.93	56.00	12.07	QP
9	9.204	10.00	10.06	19.69	39.75	50.00	10.25	Average
10	9.204	10.00	10.06	26.38	46.44	60.00	13.56	QP
11	19.950	10.18	10.16	19.15	39.49	50.00	10.51	Average
12	19.950	10.18	10.16	27.99	48.33	60.00	11.67	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 549

File: \\Est-ce\test data\2018\11\inMusic.EM6 (552)

Date: 2018-09-11

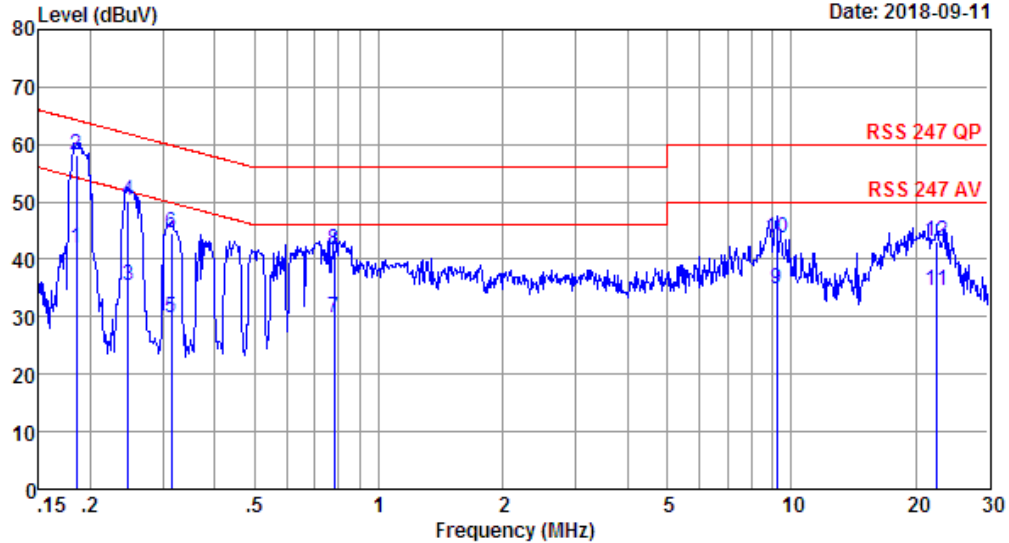

Site no : 844 Shield Room Data no. : 549
Env. / Ins. : Temp:23.4°C Humi:49% Press:101.50kPa LINE Phase : NEUTRAL
Limit : RSS 247 QP
Engineer : Viking
EUT : CD player
Power : AC 120V/60Hz
M/N : DN-700CB
Test Mode : RX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.185	9.62	9.77	22.43	41.82	54.24	12.42	Average
2	0.185	9.62	9.77	38.80	58.19	64.24	6.05	QP
3	0.247	9.62	9.92	15.90	35.44	51.86	16.42	Average
4	0.247	9.62	9.92	30.77	50.31	61.86	11.55	QP
5	0.315	9.63	9.92	10.30	29.85	49.84	19.99	Average
6	0.315	9.63	9.92	25.02	44.57	59.84	15.27	QP
7	0.779	9.70	9.93	10.26	29.89	46.00	16.11	Average
8	0.779	9.70	9.93	21.92	41.55	56.00	14.45	QP
9	9.204	10.00	10.06	14.69	34.75	50.00	15.25	Average
10	9.204	10.00	10.06	23.50	43.56	60.00	16.44	QP
11	22.535	10.20	10.16	14.22	34.58	50.00	15.42	Average
12	22.535	10.20	10.16	22.61	42.97	60.00	17.03	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 551

File: \\Est-ce\test data\2018\WinMusic.EM6 (552)

Date: 2018-09-11

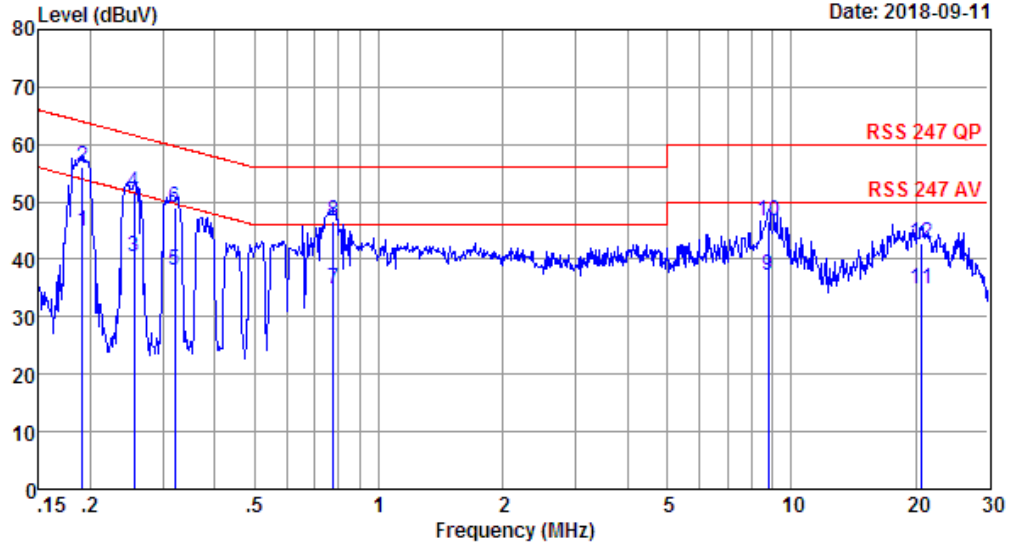

Site no : 844 Shield Room Data no. : 551
Env. / Ins. : Temp:23.4°C Humi:49% Press:101.50kPa LINE Phase : LINE
Limit : RSS 247 QP
Engineer : Viking
EUT : CD player
Power : AC 120V/60Hz
M/N : DN-700CB
Test Mode : RX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.191	9.73	9.77	25.43	44.93	53.98	9.05	Average
2	0.191	9.73	9.77	36.55	56.05	63.98	7.93	QP
3	0.255	9.72	9.92	20.90	40.54	51.60	11.06	Average
4	0.255	9.72	9.92	32.13	51.77	61.60	9.83	QP
5	0.320	9.72	9.92	18.33	37.97	49.71	11.74	Average
6	0.320	9.72	9.92	29.23	48.87	59.71	10.84	QP
7	0.775	9.72	9.93	15.33	34.98	46.00	11.02	Average
8	0.775	9.72	9.93	26.94	46.59	56.00	9.41	QP
9	8.776	9.81	10.05	17.43	37.29	50.00	12.71	Average
10	8.776	9.81	10.05	26.83	46.69	60.00	13.31	QP
11	20.594	10.07	10.16	14.67	34.90	50.00	15.10	Average
12	20.594	10.07	10.16	22.67	42.90	60.00	17.10	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4 RADIATED EMISSION TEST

4.1 Limit

4.1.1 15.209 limits

Frequency (MHz)	Field Strength($\mu\text{V/m}$)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.


(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.1.2 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2. Block Diagram of Test setup

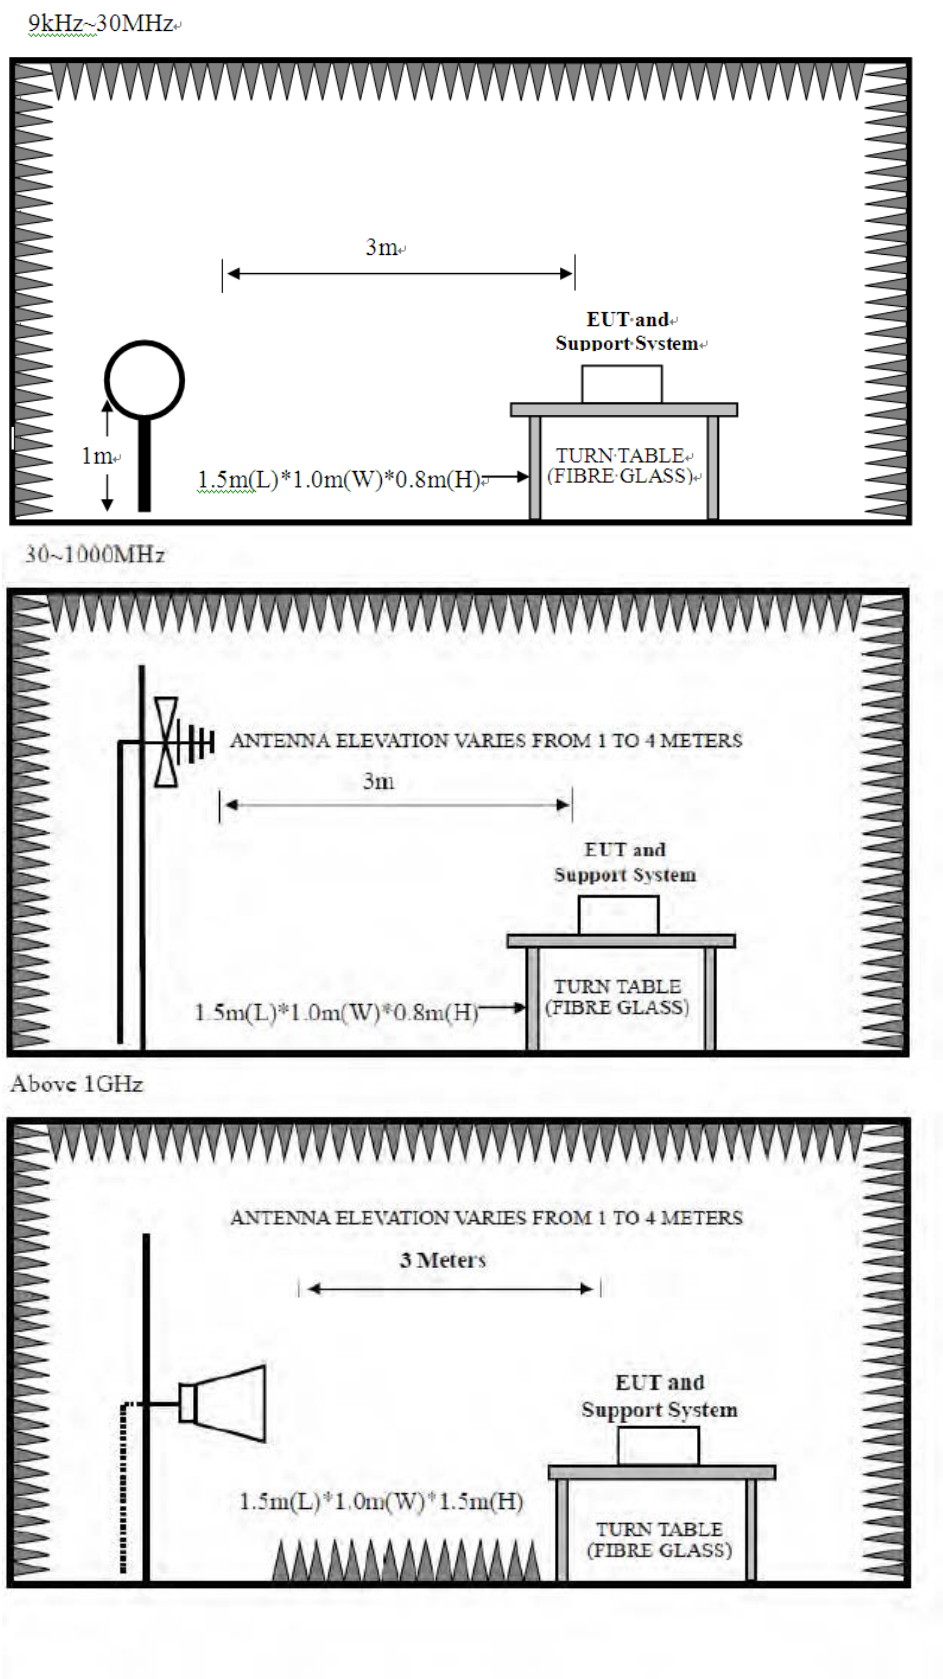

4.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 30~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,
PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

4.4. Test Result

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、 2440MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

4.5. Test Data

9 kHz – 30 MHz

Pass

Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30-1000 MHz


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 235

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

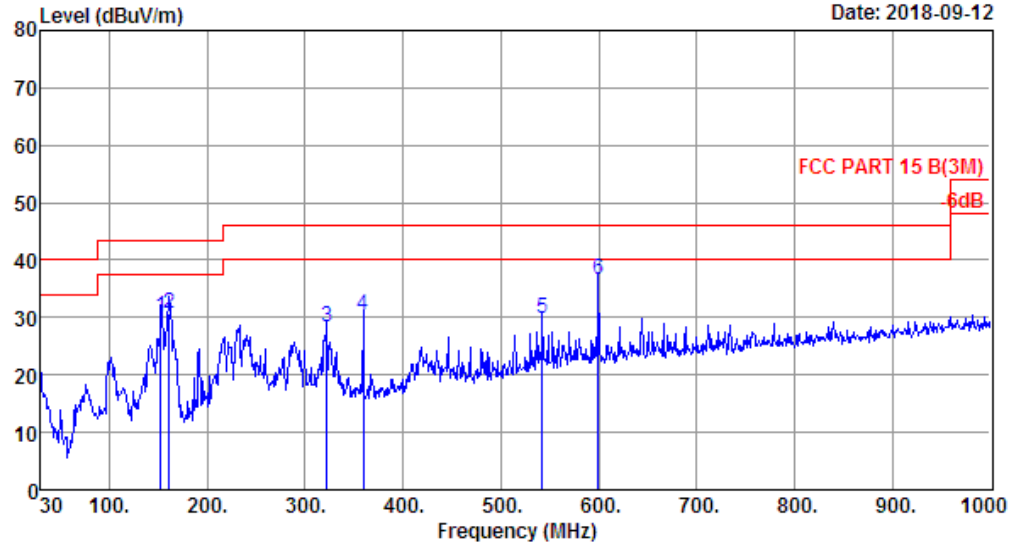

Site no. : 1# 966 Chamber Data no. : 235
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.2';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : TX Mode
 Antenna:AN13-04

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	152.22	11.56	1.32	17.20	30.08	43.50	13.42	QP
2	160.95	11.02	1.36	18.21	30.59	43.50	12.91	QP
3	321.97	14.24	2.13	12.12	28.49	46.00	17.51	QP
4	359.80	15.20	2.37	12.77	30.34	46.00	15.66	QP
5	542.16	19.04	3.01	7.69	29.74	46.00	16.26	QP
6	599.39	20.17	3.19	13.15	36.51	46.00	9.49	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 236

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

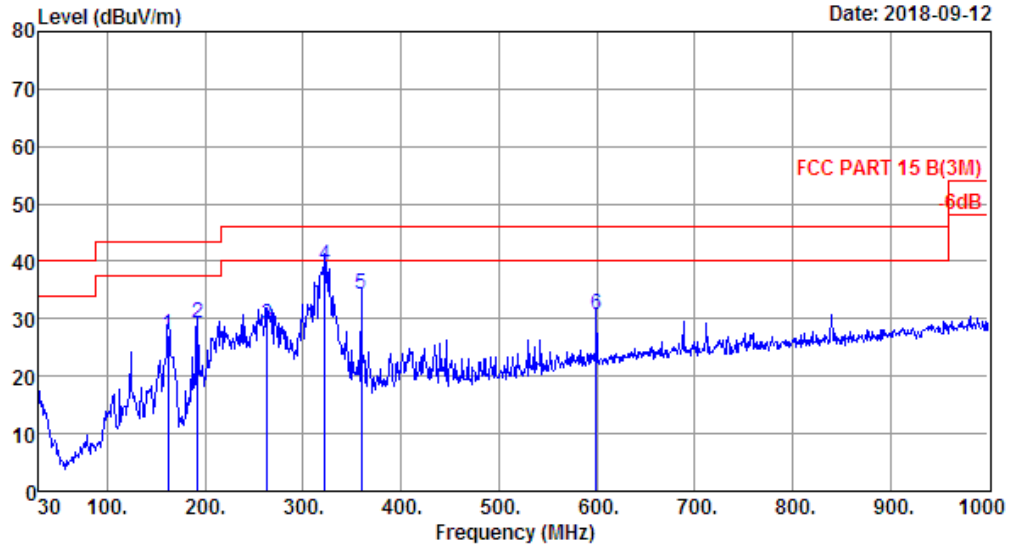

Site no. : 1# 966 Chamber Data no. : 236
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.2'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : TX Mode
 Antenna: AN13-04

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	161.92	10.84	1.37	15.06	27.27	43.50	16.23	QP
2	191.99	8.52	1.45	19.35	29.32	43.50	14.18	QP
3	263.77	13.48	1.91	13.57	28.96	46.00	17.04	QP
4	321.97	14.24	2.13	22.87	39.24	46.00	6.76	QP
5	359.80	15.20	2.37	16.66	34.23	46.00	11.77	QP
6	599.39	20.17	3.19	7.25	30.61	46.00	15.39	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 237

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

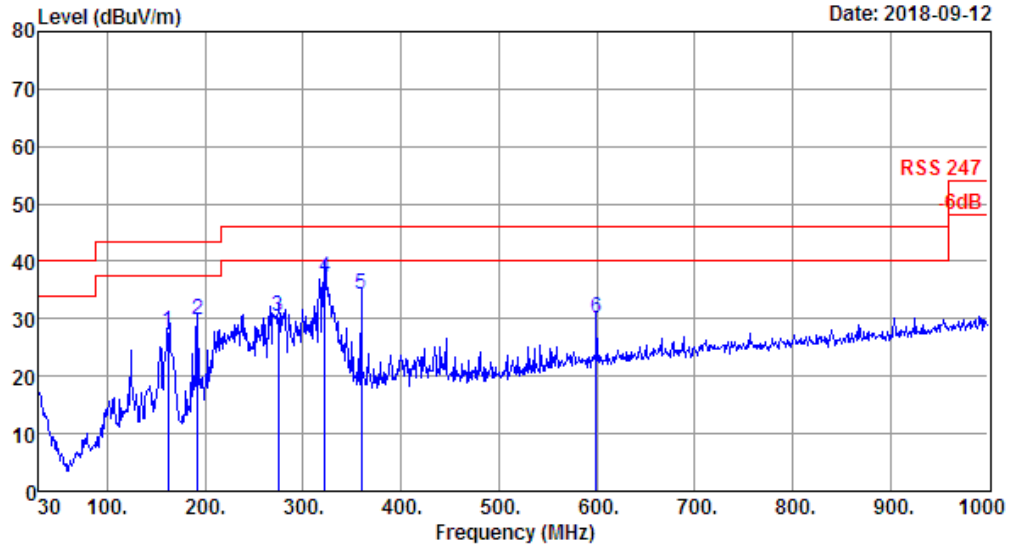

Site no. : 1# 966 Chamber Data no. : 237
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : RSS 247
 Env. / Ins. : Temp:23.2';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : RX Mode
 Antenna:AN13-04

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	161.92	10.84	1.37	15.56	27.77	43.50	15.73	QP
2	191.99	8.52	1.45	19.90	29.87	43.50	13.63	QP
3	274.44	12.77	1.95	15.69	30.41	46.00	15.59	QP
4	321.97	14.24	2.13	20.82	37.19	46.00	8.81	QP
5	359.80	15.20	2.37	16.55	34.12	46.00	11.88	QP
6	599.39	20.17	3.19	6.69	30.05	46.00	15.95	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 238

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

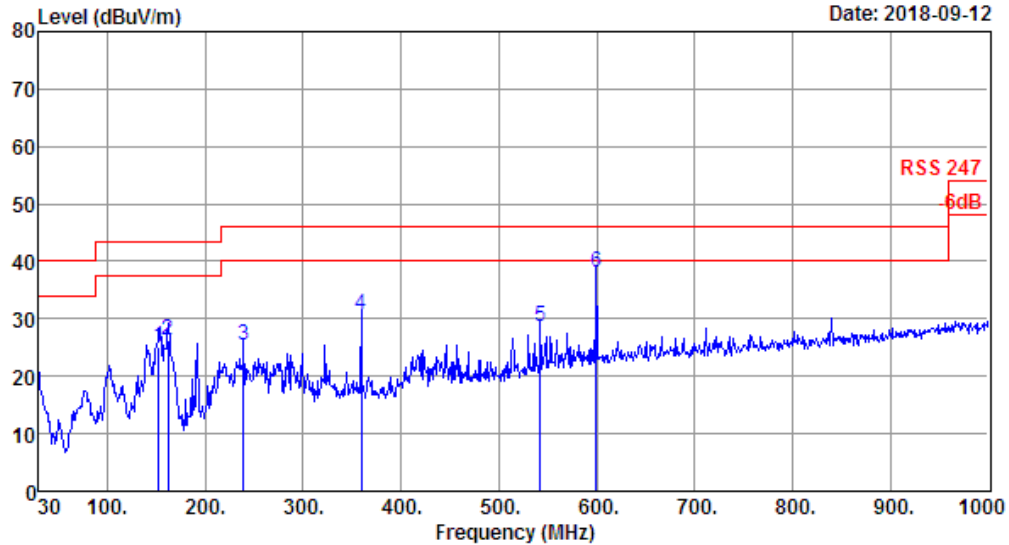

Site no. : 1# 966 Chamber Data no. : 238
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : RSS 247
 Env. / Ins. : Temp:23.2'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : RX Mode
 Antenna: AN13-04

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	152.22	11.56	1.32	12.29	25.17	43.50	18.33	QP
2	161.92	10.84	1.37	14.01	26.22	43.50	17.28	QP
3	239.52	11.00	1.78	12.62	25.40	46.00	20.60	QP
4	359.80	15.20	2.37	13.13	30.70	46.00	15.30	QP
5	542.16	19.04	3.01	6.58	28.63	46.00	17.37	QP
6	599.39	20.17	3.19	14.74	38.10	46.00	7.90	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 239 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

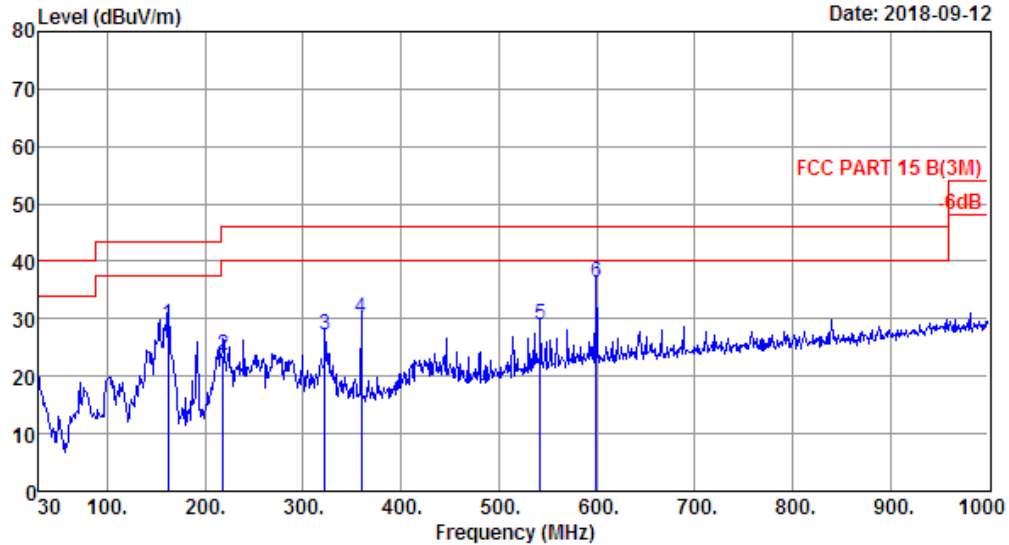

Site no. : 1# 966 Chamber Data no. : 239
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.2'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : TX Mode
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	161.92	10.84	1.37	16.83	29.04	43.50	14.46	QP
2	218.18	9.52	1.62	12.45	23.59	46.00	22.41	QP
3	321.97	14.24	2.13	10.74	27.11	46.00	18.89	QP
4	359.80	15.20	2.37	12.62	30.19	46.00	15.81	QP
5	542.16	19.04	3.01	6.81	28.86	46.00	17.14	QP
6	599.39	20.17	3.19	13.01	36.37	46.00	9.63	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 240 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

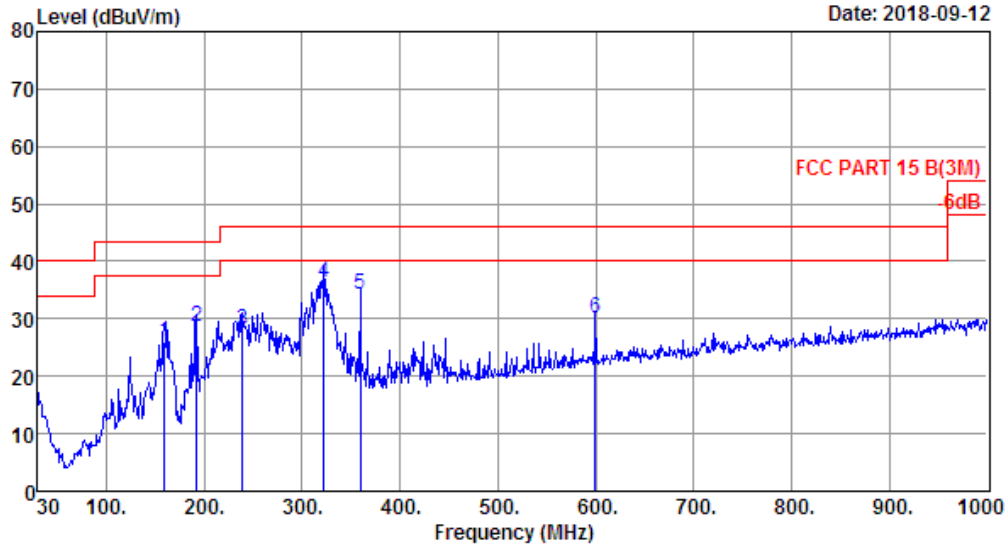

Site no. : 1# 966 Chamber Data no. : 240
Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:23.2'; Humi:53%; Press:101.52kPa
Engineer : Viking
EUT : CD player
Power : AC 120V/60Hz
M/N : DN-700CB
Test Mode : TX Mode
Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.01	11.26	1.36	13.41	26.03	43.50	17.47	QP
2	191.99	8.52	1.45	18.68	28.65	43.50	14.85	QP
3	239.52	11.00	1.78	15.30	28.08	46.00	17.92	QP
4	321.97	14.24	2.13	19.99	36.36	46.00	9.64	QP
5	359.80	15.20	2.37	16.79	34.36	46.00	11.64	QP
6	599.39	20.17	3.19	6.82	30.18	46.00	15.82	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 241 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

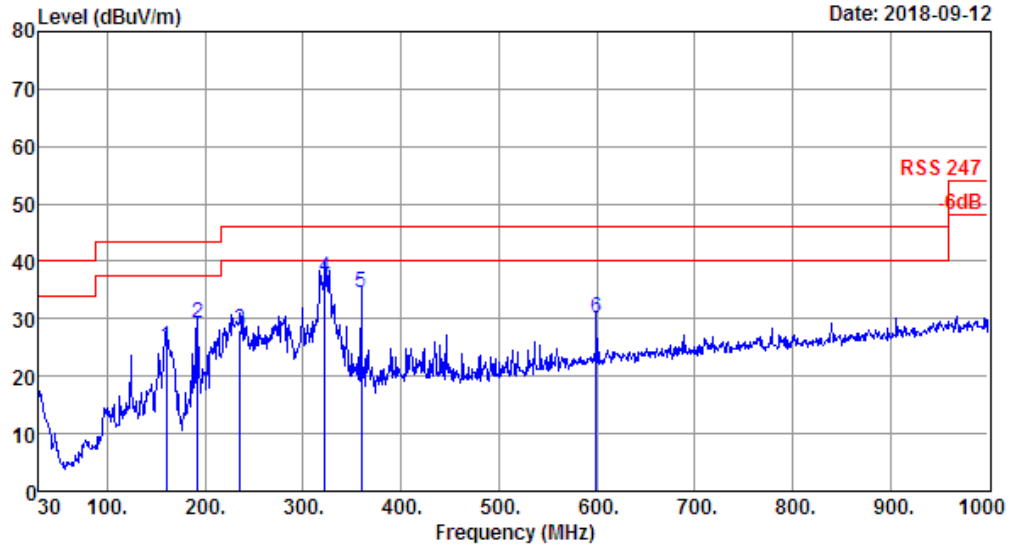

Site no. : 1# 966 Chamber Data no. : 241
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : RSS 247
 Env. / Ins. : Temp:23.2';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : RX Mode
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.98	11.20	1.36	12.56	25.12	43.50	18.38	QP
2	191.99	8.52	1.45	19.32	29.29	43.50	14.21	QP
3	235.64	10.68	1.75	15.53	27.96	46.00	18.04	QP
4	321.97	14.24	2.13	20.73	37.10	46.00	8.90	QP
5	359.80	15.20	2.37	16.87	34.44	46.00	11.56	QP
6	599.39	20.17	3.19	6.64	30.00	46.00	16.00	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 242 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (250)

Date: 2018-09-12

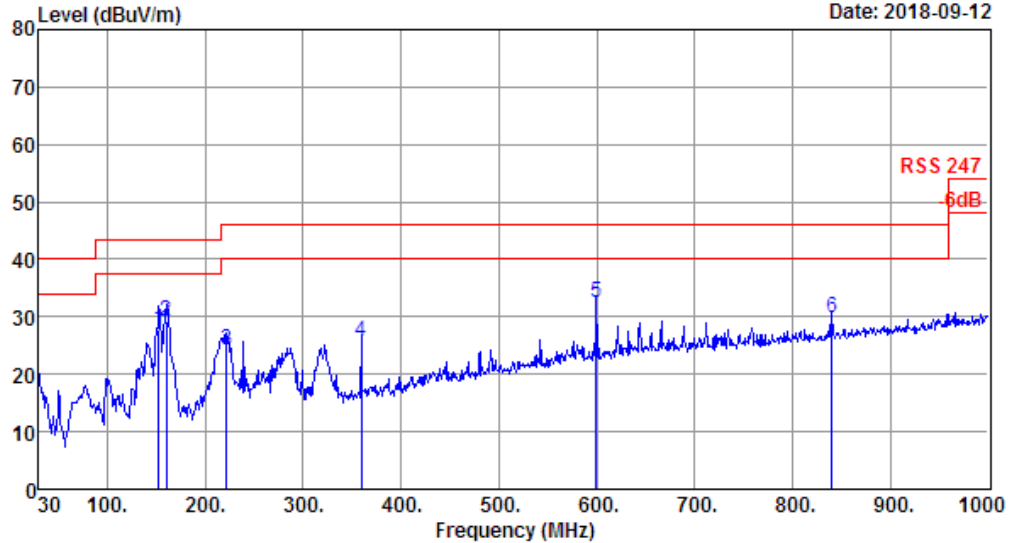

Site no. : 1# 966 Chamber Data no. : 242
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : RSS 247
 Env. / Ins. : Temp:23.2';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : RX Mode
 Antenna:TQC-2400-1.8DXBNC


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	152.22	11.56	1.32	14.86	27.74	43.50	15.76	QP
2	159.98	11.20	1.36	16.52	29.08	43.50	14.42	QP
3	222.06	9.92	1.68	12.48	24.08	46.00	21.92	QP
4	359.80	15.20	2.37	8.18	25.75	46.00	20.25	QP
5	599.39	20.17	3.19	9.09	32.45	46.00	13.55	QP
6	839.95	23.20	3.89	2.59	29.68	46.00	16.32	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

1000-18000MHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

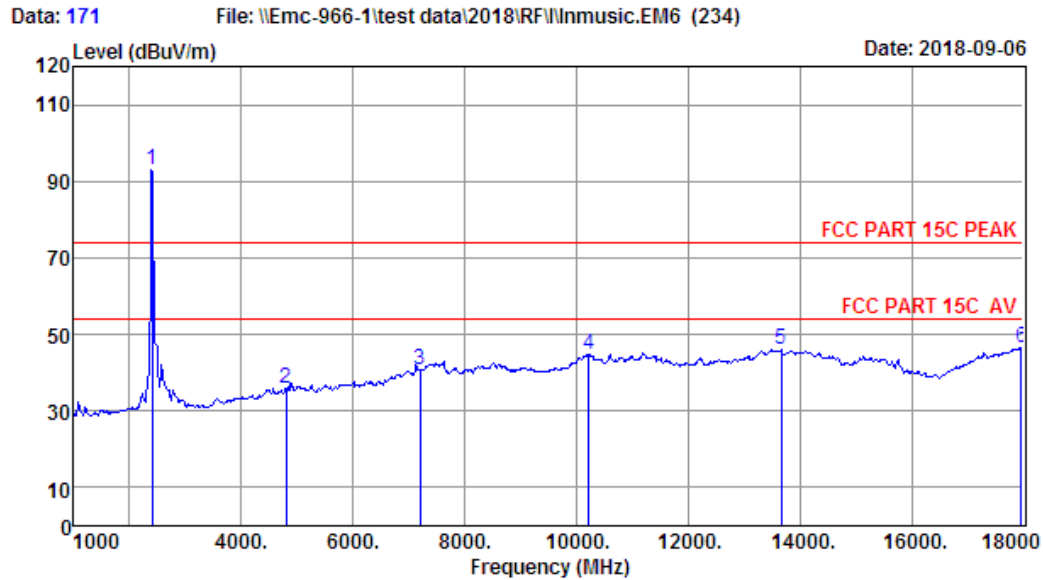

Site no. : 1# 966 Chamber Data no. : 171
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2402MHz
 Antenna:AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	97.56	93.18	74.00	-19.18	Peak
2	4804.00	32.06	4.67	35.06	34.11	35.78	74.00	38.22	Peak
3	7206.00	36.56	5.99	33.45	31.53	40.63	74.00	33.37	Peak
4	10214.00	39.19	9.77	34.43	30.38	44.91	74.00	29.09	Peak
5	13665.00	41.43	9.89	32.62	27.30	46.00	74.00	28.00	Peak
6	17966.00	44.61	12.57	31.48	20.94	46.64	74.00	27.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 172

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

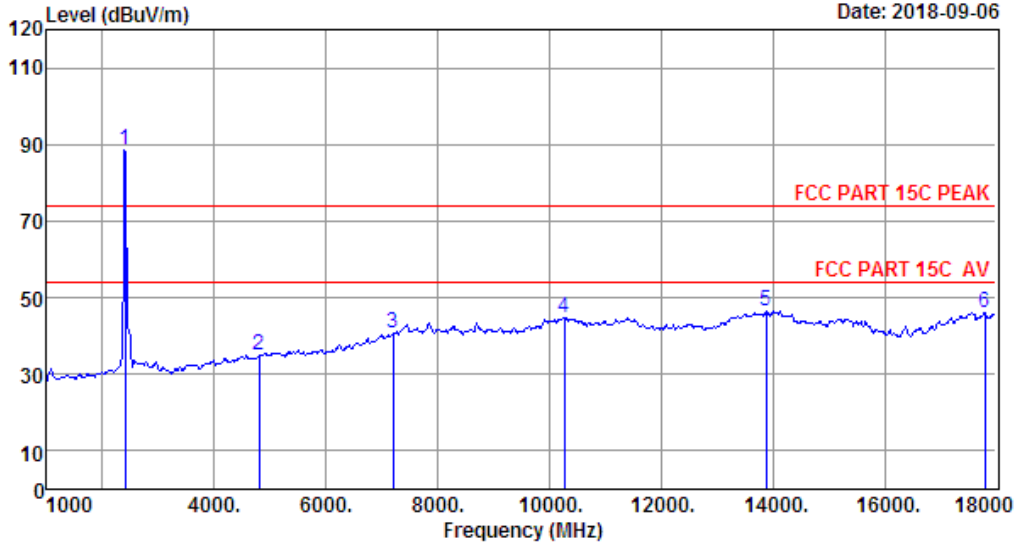

Site no. : 1# 966 Chamber Data no. : 172
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9'; Humi:52%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2402MHz
 Antenna: AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	92.94	88.56	74.00	-14.56	Peak
2	4804.00	32.06	4.67	35.06	33.27	34.94	74.00	39.06	Peak
3	7206.00	36.56	5.99	33.45	31.44	40.54	74.00	33.46	Peak
4	10265.00	39.21	9.98	34.39	30.02	44.82	74.00	29.18	Peak
5	13886.00	41.61	10.11	32.80	27.65	46.57	74.00	27.43	Peak
6	17796.00	44.16	12.19	31.13	20.89	46.11	74.00	27.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 173 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

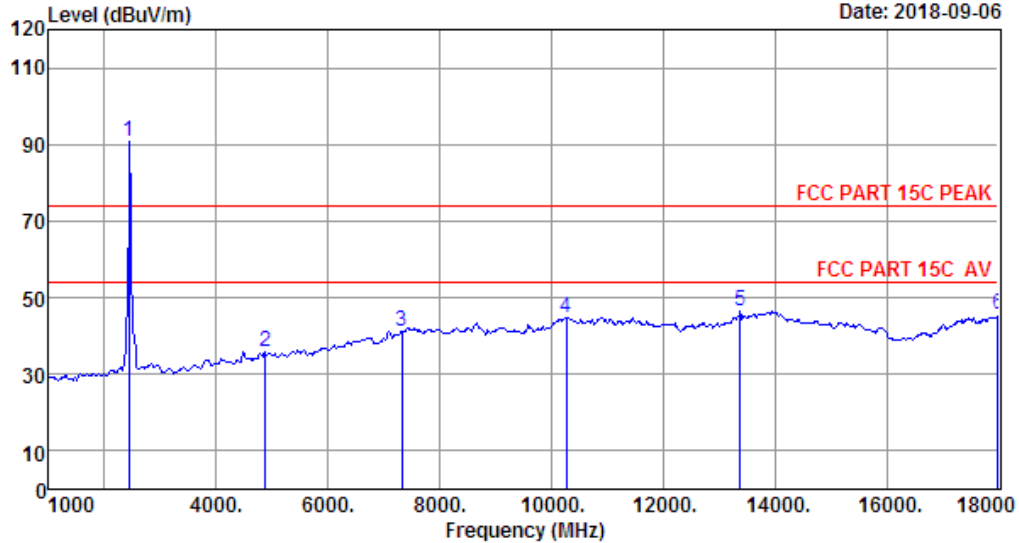

Site no. : 1# 966 Chamber Data no. : 173
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9'; Humi:52%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2440MHz
 Antenna: AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	94.93	90.60	74.00	-16.60	Peak
2	4880.00	32.18	4.73	35.14	33.93	35.70	74.00	38.30	Peak
3	7320.00	36.82	6.10	33.28	31.58	41.22	74.00	32.78	Peak
4	10265.00	39.21	9.98	34.39	29.86	44.66	74.00	29.34	Peak
5	13376.00	41.01	9.50	32.62	28.50	46.39	74.00	27.61	Peak
6	18000.00	44.70	12.64	31.56	19.63	45.41	74.00	28.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 174 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

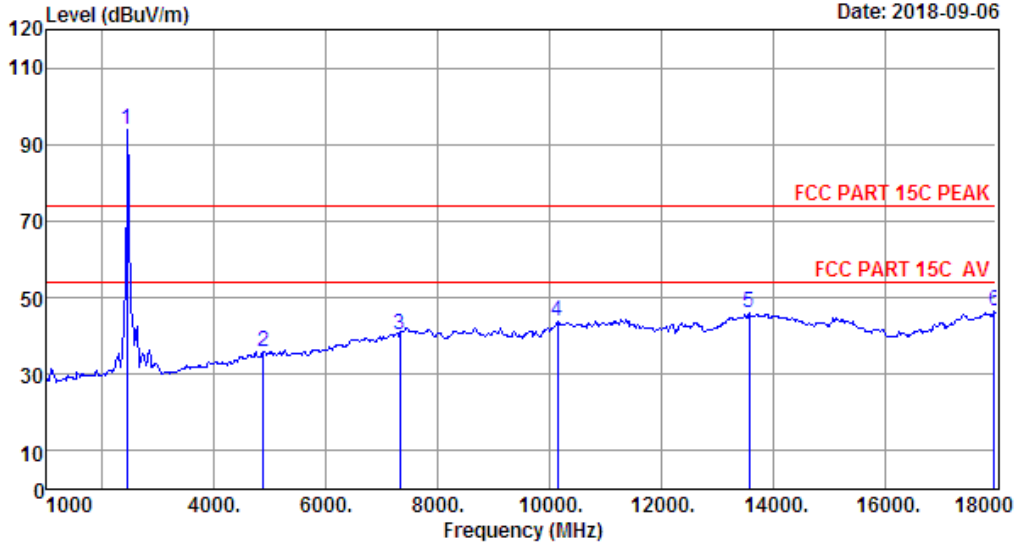

Site no. : 1# 966 Chamber Data no. : 174
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9'; Humi:52%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2440MHz
 Antenna: AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	98.35	94.02	74.00	-20.02	Peak
2	4880.00	32.18	4.73	35.14	34.07	35.84	74.00	38.16	Peak
3	7320.00	36.82	6.10	33.28	30.71	40.35	74.00	33.65	Peak
4	10146.00	39.16	9.48	34.51	29.79	43.92	74.00	30.08	Peak
5	13580.00	41.37	9.78	32.57	27.47	46.05	74.00	27.95	Peak
6	17966.00	44.61	12.57	31.48	20.94	46.64	74.00	27.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 175 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

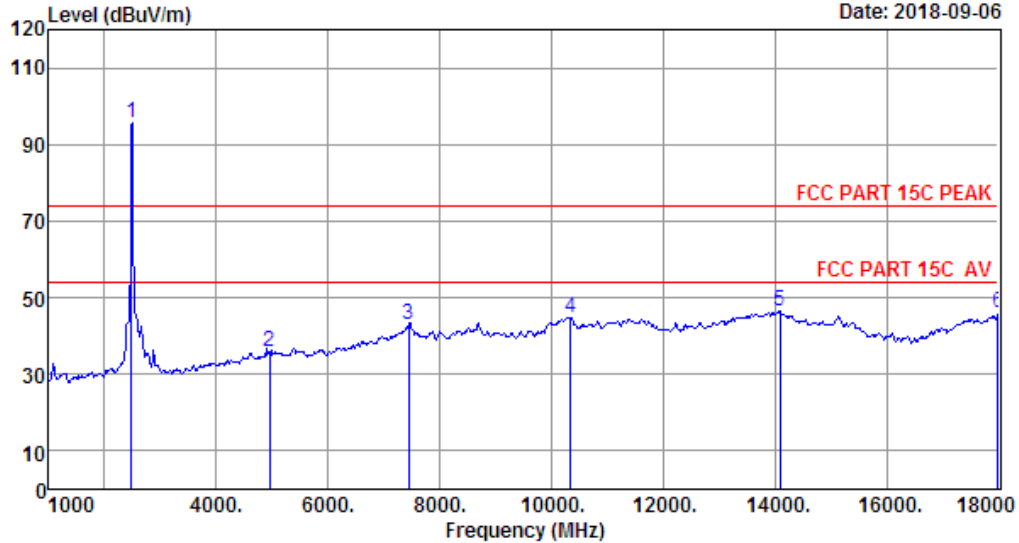

Site no. : 1# 966 Chamber Data no. : 175
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9'; Humi:52%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2480MHz
 Antenna: AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	100.09	95.73	74.00	-21.73	Peak
2	4960.00	32.34	4.80	35.24	34.01	35.91	74.00	38.09	Peak
3	7440.00	37.09	6.13	33.08	32.94	43.08	74.00	30.92	Peak
4	10350.00	39.24	10.10	34.30	29.88	44.92	74.00	29.08	Peak
5	14090.00	41.61	10.14	32.99	27.59	46.35	74.00	27.65	Peak
6	18000.00	44.70	12.64	31.56	20.30	46.08	74.00	27.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 176 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

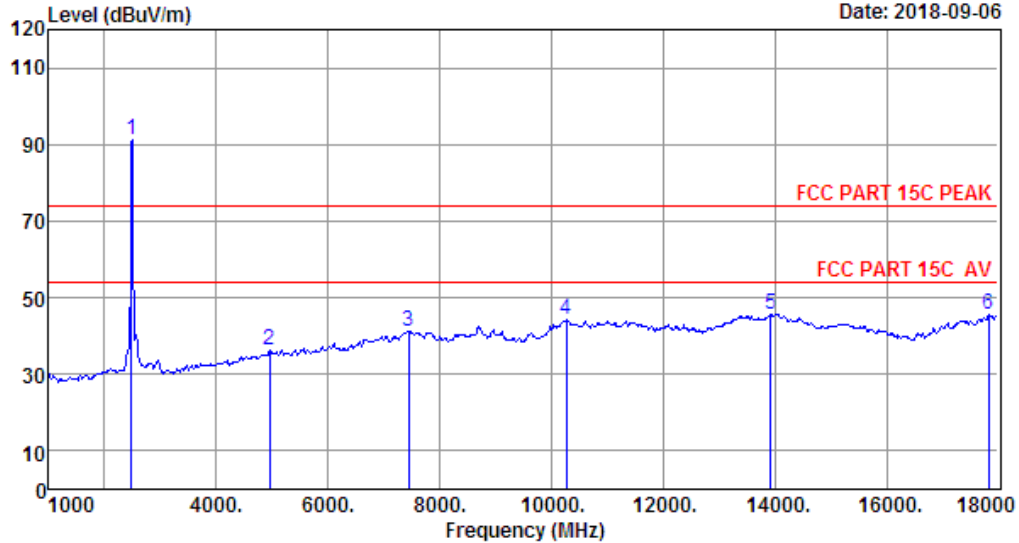

Site no. : 1# 966 Chamber Data no. : 176
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9'; Humi:52%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2480MHz
 Antenna: AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	95.43	91.07	74.00	-17.07	Peak
2	4960.00	32.34	4.80	35.24	34.59	36.49	74.00	37.51	Peak
3	7440.00	37.09	6.13	33.08	31.09	41.23	74.00	32.77	Peak
4	10265.00	39.21	9.98	34.39	29.37	44.17	74.00	29.83	Peak
5	13920.00	41.63	10.11	32.83	26.68	45.59	74.00	28.41	Peak
6	17830.00	44.25	12.27	31.21	20.29	45.60	74.00	28.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 153 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

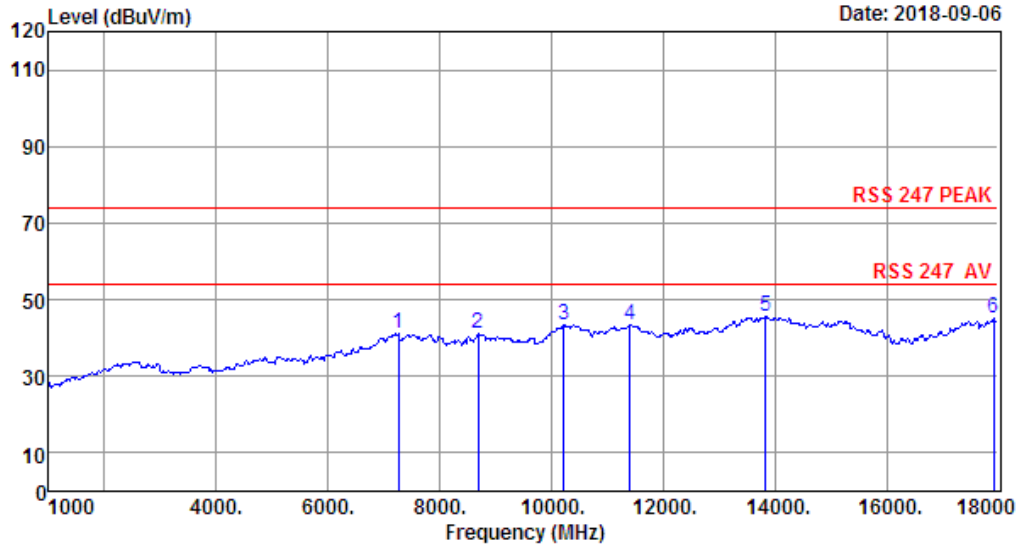

Site no. : 1# 966 Chamber Data no. : 153
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : RSS 247 PEAK
Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
Engineer : Viking
EUT : CD player
Power : AC 120V/60Hz
M/N : DN-700CB
Test Mode : RX Mode
Antenna:AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	7256.00	36.67	6.04	33.39	31.90	41.22	74.00	32.78	Peak
2	8684.00	37.46	6.90	33.06	29.92	41.22	74.00	32.78	Peak
3	10214.00	39.19	9.77	34.43	28.93	43.46	74.00	30.54	Peak
4	11404.00	40.06	8.29	32.71	27.87	43.51	74.00	30.49	Peak
5	13835.00	41.57	10.10	32.76	26.61	45.52	74.00	28.48	Peak
6	17915.00	44.48	12.45	31.40	19.51	45.04	74.00	28.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 154 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

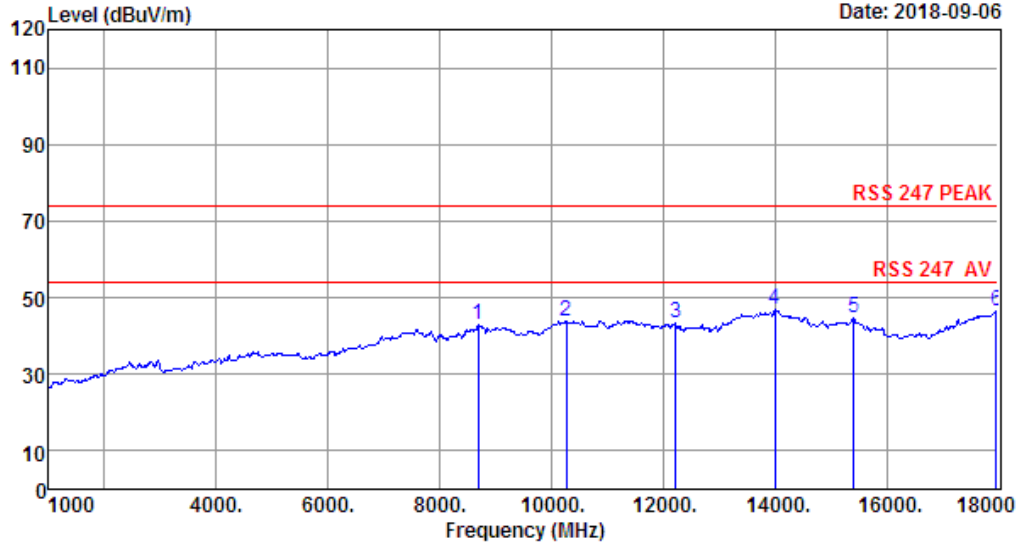

Site no. : 1# 966 Chamber Data no. : 154
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : RSS 247 PEAK
 Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : RX Mode
 Antenna:AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	8684.00	37.46	6.90	33.06	31.67	42.97	74.00	31.03	Peak
2	10265.00	39.21	9.98	34.39	29.14	43.94	74.00	30.06	Peak
3	12220.00	39.36	8.39	32.60	28.04	43.19	74.00	30.81	Peak
4	14005.00	41.70	10.13	32.88	27.93	46.88	74.00	27.12	Peak
5	15416.00	39.64	10.90	32.53	26.87	44.88	74.00	29.12	Peak
6	17966.00	44.61	12.57	31.48	20.79	46.49	74.00	27.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 225

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

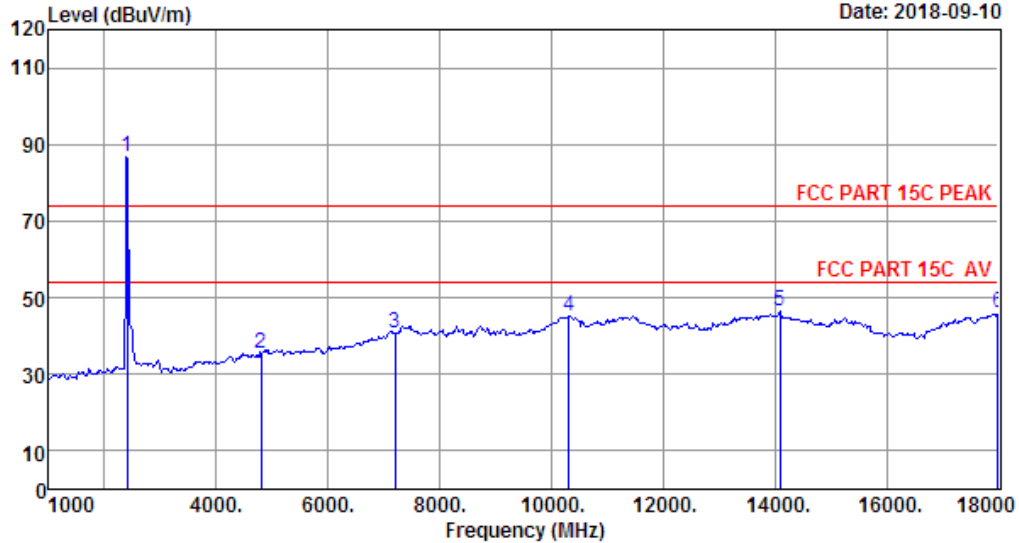

Site no. : 1# 966 Chamber Data no. : 225
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2402MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	91.21	86.83	74.00	-12.83	Peak
2	4804.00	32.06	4.67	35.06	33.67	35.34	74.00	38.66	Peak
3	7206.00	36.56	5.99	33.45	31.42	40.52	74.00	33.48	Peak
4	10316.00	39.23	10.20	34.34	30.04	45.13	74.00	28.87	Peak
5	14090.00	41.61	10.14	32.99	27.85	46.61	74.00	27.39	Peak
6	18000.00	44.70	12.64	31.56	20.30	46.08	74.00	27.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 226 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

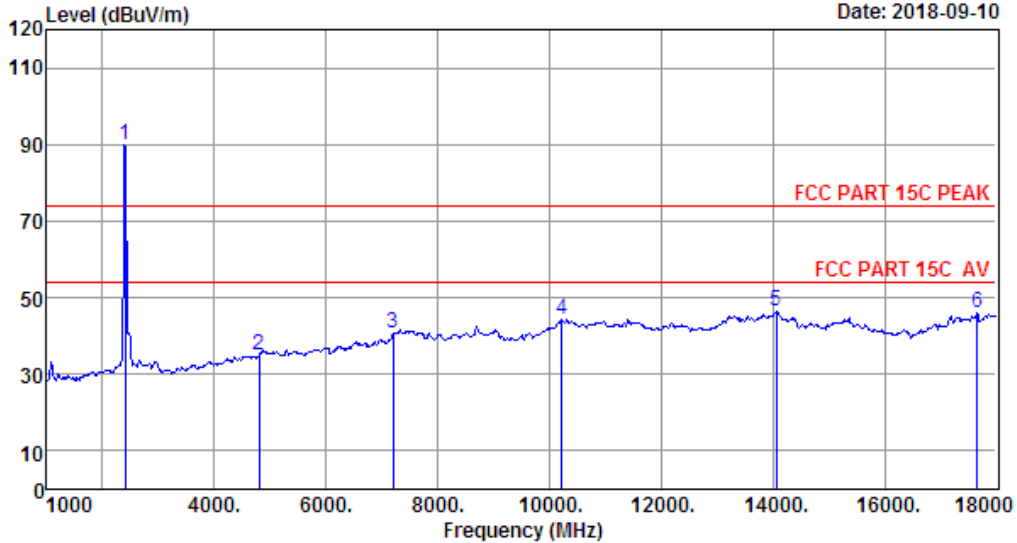

Site no. : 1# 966 Chamber Data no. : 226
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2402MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.35	3.21	34.94	94.25	89.87	74.00	-15.87	Peak
2	4804.00	32.06	4.67	35.06	33.49	35.16	74.00	38.84	Peak
3	7206.00	36.56	5.99	33.45	31.60	40.70	74.00	33.30	Peak
4	10214.00	39.19	9.77	34.43	29.71	44.24	74.00	29.76	Peak
5	14056.00	41.65	10.13	32.95	27.51	46.34	74.00	27.66	Peak
6	17660.00	43.80	11.90	31.25	21.72	46.17	74.00	27.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 227

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

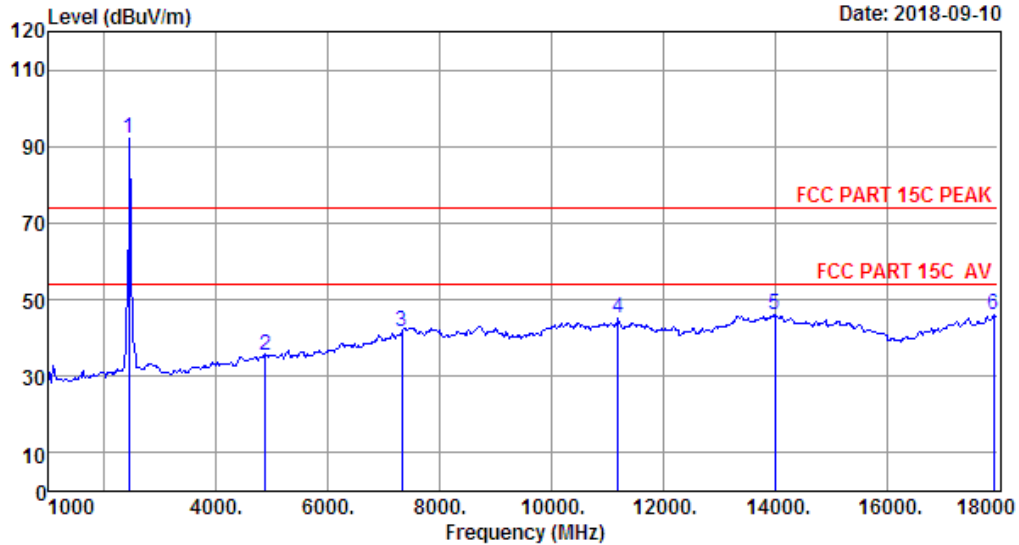

Site no. : 1# 966 Chamber Data no. : 227
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2440MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	96.42	92.09	74.00	-18.09	Peak
2	4880.00	32.18	4.73	35.14	33.70	35.47	74.00	38.53	Peak
3	7320.00	36.82	6.10	33.28	31.85	41.49	74.00	32.51	Peak
4	11200.00	39.98	8.43	33.10	29.72	45.03	74.00	28.97	Peak
5	14005.00	41.70	10.13	32.88	27.08	46.03	74.00	27.97	Peak
6	17915.00	44.48	12.45	31.40	20.48	46.01	74.00	27.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 228

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

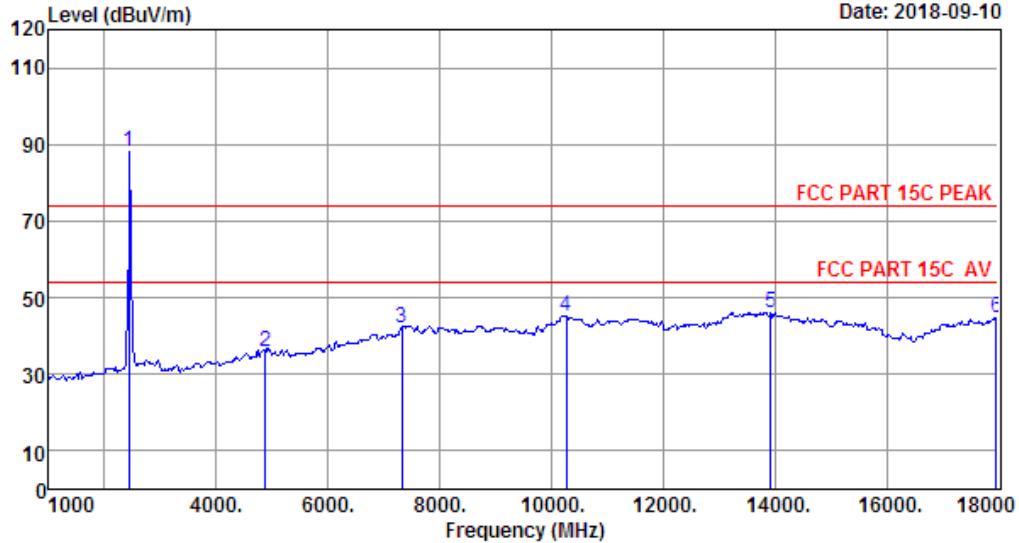

Site no. : 1# 966 Chamber Data no. : 228
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2440MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.48	3.26	35.07	92.27	87.94	74.00	-13.94	Peak
2	4880.00	32.18	4.73	35.14	34.26	36.03	74.00	37.97	Peak
3	7320.00	36.82	6.10	33.28	32.33	41.97	74.00	32.03	Peak
4	10265.00	39.21	9.98	34.39	30.48	45.28	74.00	28.72	Peak
5	13920.00	41.63	10.11	32.83	27.28	46.19	74.00	27.81	Peak
6	17966.00	44.61	12.57	31.48	19.00	44.70	74.00	29.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 229

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

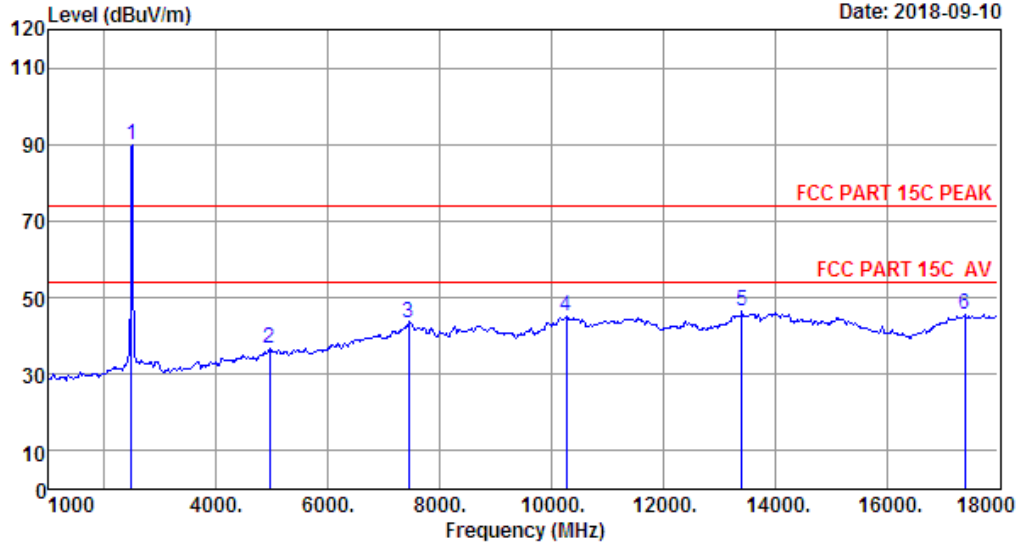

Site no. : 1# 966 Chamber Data no. : 229
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2480MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	94.22	89.86	74.00	-15.86	Peak
2	4960.00	32.34	4.80	35.24	34.79	36.69	74.00	37.31	Peak
3	7440.00	37.09	6.13	33.08	33.19	43.33	74.00	30.67	Peak
4	10265.00	39.21	9.98	34.39	30.31	45.11	74.00	28.89	Peak
5	13410.00	41.09	9.55	32.61	28.24	46.27	74.00	27.73	Peak
6	17405.00	43.02	11.33	30.96	22.13	45.52	74.00	28.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 230

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

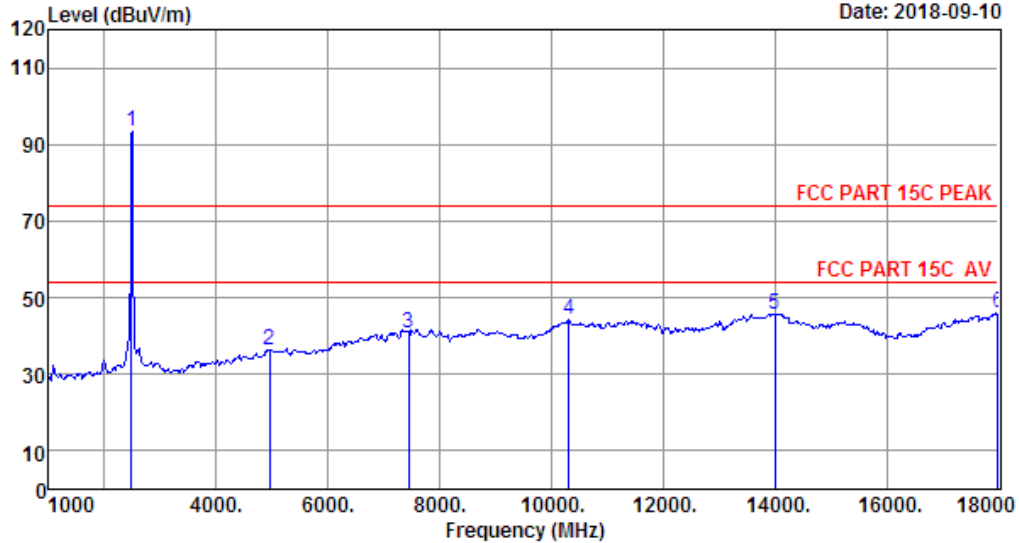

Site no. : 1# 966 Chamber Data no. : 230
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2480MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.56	3.29	35.21	97.97	93.61	74.00	-19.61	Peak
2	4960.00	32.34	4.80	35.24	34.41	36.31	74.00	37.69	Peak
3	7440.00	37.09	6.13	33.08	30.47	40.61	74.00	33.39	Peak
4	10316.00	39.23	10.20	34.34	29.14	44.23	74.00	29.77	Peak
5	14005.00	41.70	10.13	32.88	26.77	45.72	74.00	28.28	Peak
6	18000.00	44.70	12.64	31.56	20.19	45.97	74.00	28.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 207

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

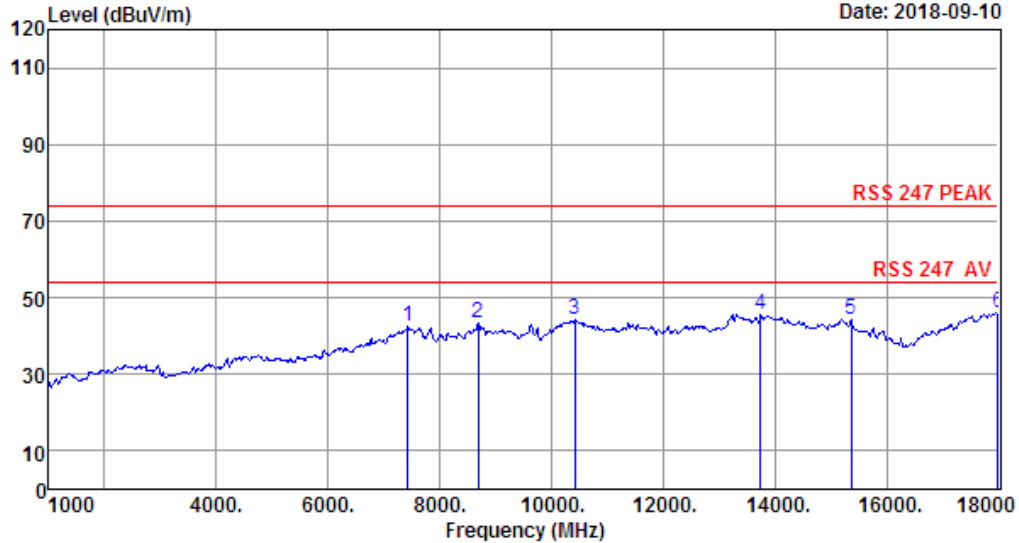

Site no. : 1# 966 Chamber Data no. : 207
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : RSS 247 PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : RX Mode
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	7426.00	37.05	6.13	33.11	32.24	42.31	74.00	31.69	Peak
2	8684.00	37.46	6.90	33.06	32.22	43.52	74.00	30.48	Peak
3	10418.00	39.27	9.90	34.22	29.29	44.24	74.00	29.76	Peak
4	13750.00	41.50	10.01	32.69	26.90	45.72	74.00	28.28	Peak
5	15365.00	39.72	10.93	32.64	26.46	44.47	74.00	29.53	Peak
6	18000.00	44.70	12.64	31.56	20.40	46.18	74.00	27.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 208

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

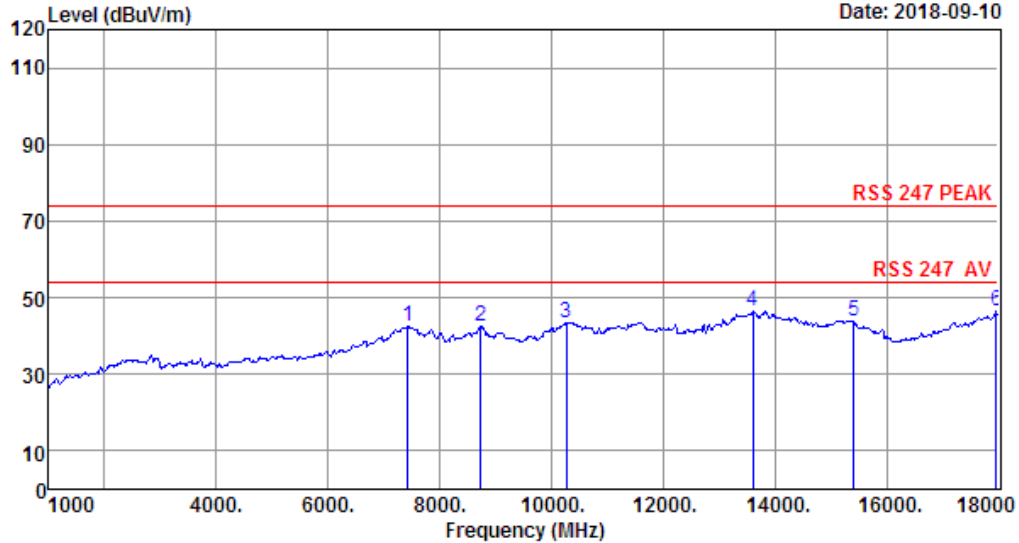

Site no. : 1# 966 Chamber Data no. : 208
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : RSS 247 PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : RX Mode
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	7426.00	37.05	6.13	33.11	32.37	42.44	74.00	31.56	Peak
2	8735.00	37.53	6.90	32.88	30.95	42.50	74.00	31.50	Peak
3	10265.00	39.21	9.98	34.39	28.59	43.39	74.00	30.61	Peak
4	13614.00	41.39	9.82	32.59	27.91	46.53	74.00	27.47	Peak
5	15416.00	39.64	10.90	32.53	25.79	43.80	74.00	30.20	Peak
6	17966.00	44.61	12.57	31.48	20.67	46.37	74.00	27.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

18000MHz – 25000MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

5 BAND EDGE COMPLIANCE TEST

5.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

5.2 Block Diagram of Test setup

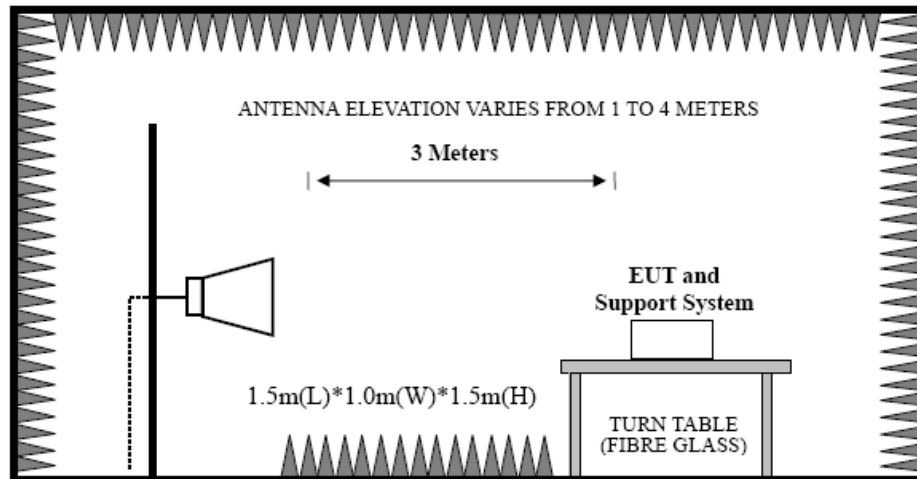

5.3 Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto
 - (b) AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto

5.4 Test Result


Pass (The testing data was attached in the next pages.)

- Note:
- 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
 - 2、 The frequency 2402MHz and 2480 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

5.5 Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

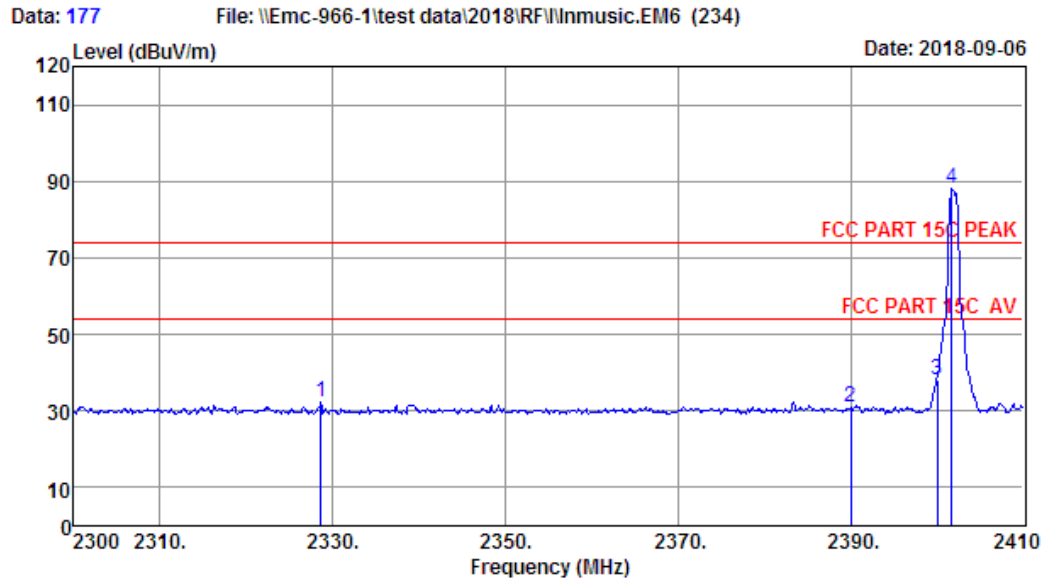

Site no. : 1# 966 Chamber Data no. : 177
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9'; Humi:52%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2402MHz
 Antenna: AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2328.60	27.19	3.15	34.67	36.71	32.38	74.00	41.62	Peak
2	2390.00	27.35	3.21	34.87	35.09	30.78	74.00	43.22	Peak
3	2400.00	27.35	3.21	34.94	42.41	38.03	74.00	35.97	Peak
4	2401.75	27.35	3.21	34.94	92.40	88.02	74.00	-14.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 178 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

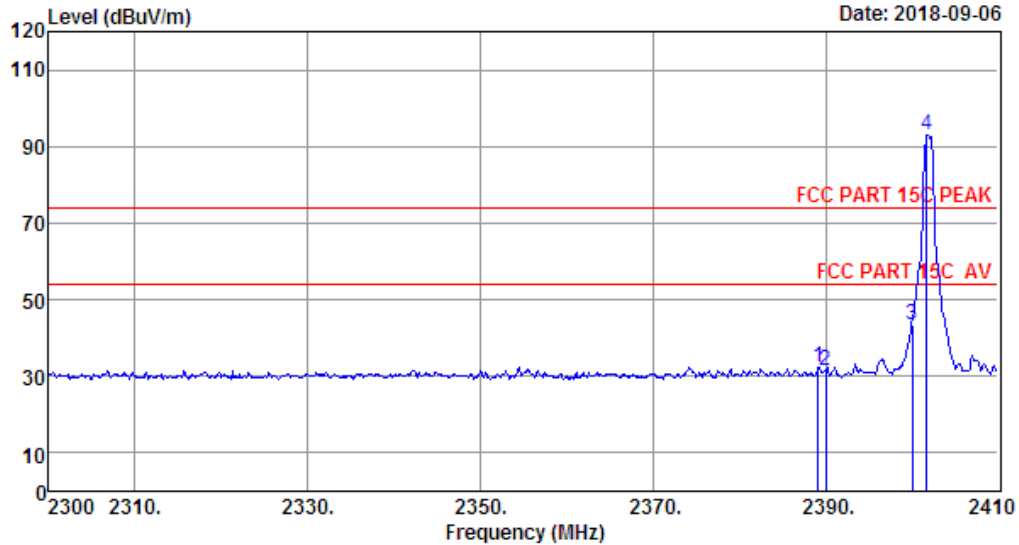

Site no. : 1# 966 Chamber Data no. : 178
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
Engineer : Viking
EUT : CD player
Power : AC 120V/60Hz
M/N : DN-700CB
Test Mode : GFSK TX 2402MHz
Antenna:AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.10	27.35	3.21	34.87	36.78	32.47	74.00	41.53	Peak
2	2390.00	27.35	3.21	34.87	35.90	31.59	74.00	42.41	Peak
3	2400.00	27.35	3.21	34.94	47.78	43.40	74.00	30.60	Peak
4	2401.75	27.35	3.21	34.94	97.50	93.12	74.00	-19.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 179

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-06

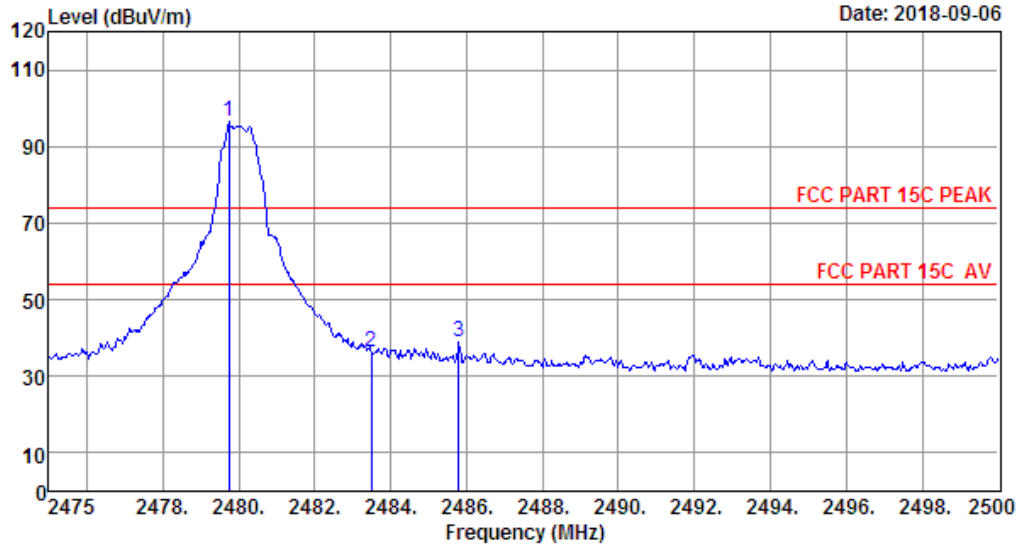


Site no. : 1# 966 Chamber Data no. : 179
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.9'; Humi:52%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2480MHz
 Antenna: AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.75	27.56	3.29	35.21	101.02	96.66	74.00	-22.66	Peak
2	2483.50	27.56	3.29	35.21	40.63	36.27	74.00	37.73	Peak
3	2485.80	27.56	3.29	35.21	43.28	38.92	74.00	35.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

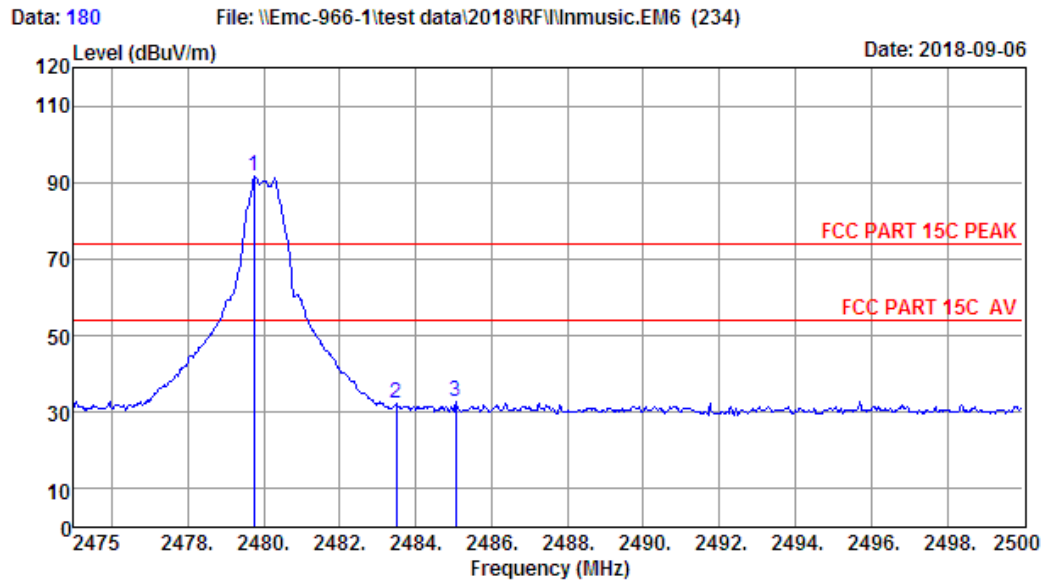

Site no. : 1# 966 Chamber Data no. : 180
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.9';Humi:52%;Press:101.52kPa
Engineer : Viking
EUT : CD player
Power : AC 120V/60Hz
M/N : DN-700CB
Test Mode : GFSK TX 2480MHz
Antenna:AN13-04

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.75	27.56	3.29	35.21	96.06	91.70	74.00	-17.70	Peak
2	2483.50	27.56	3.29	35.21	36.73	32.37	74.00	41.63	Peak
3	2485.05	27.56	3.29	35.21	37.12	32.76	74.00	41.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 231 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

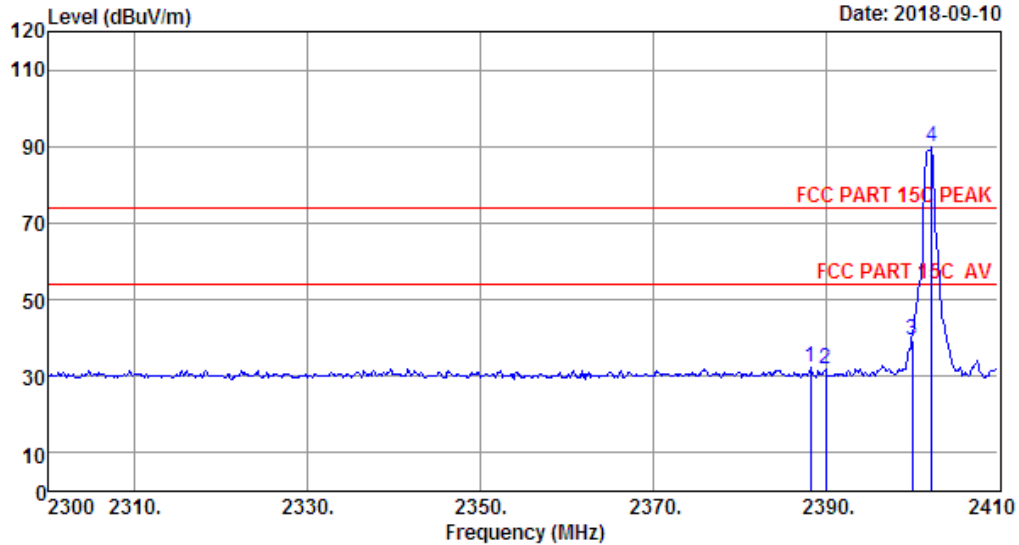

Site no. : 1# 966 Chamber Data no. : 231
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2402MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.22	27.35	3.21	34.87	36.44	32.13	74.00	41.87	Peak
2	2390.00	27.35	3.21	34.87	36.29	31.98	74.00	42.02	Peak
3	2400.00	27.35	3.21	34.94	43.69	39.31	74.00	34.69	Peak
4	2402.30	27.35	3.21	34.94	94.07	89.69	74.00	-15.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 232 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

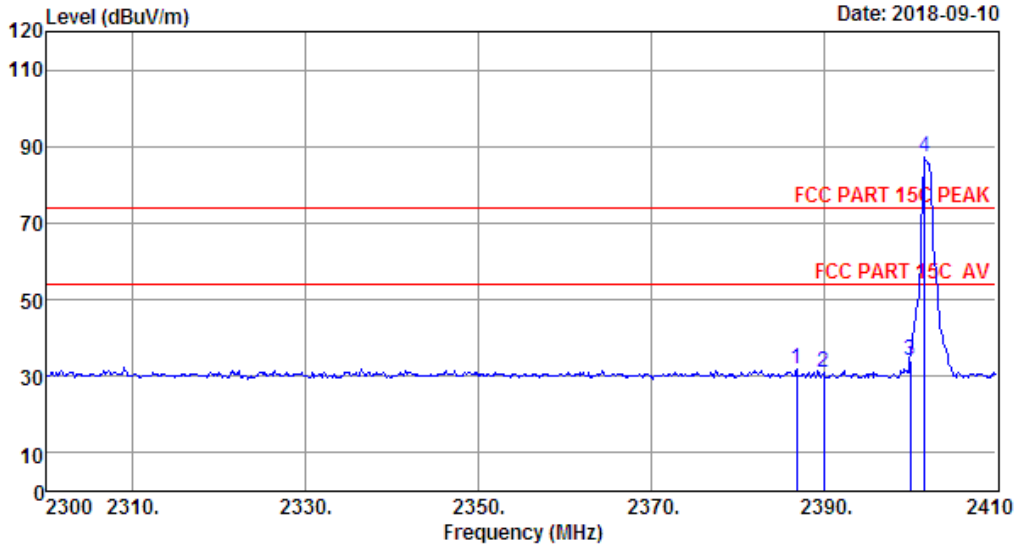

Site no. : 1# 966 Chamber Data no. : 232
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2402MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2386.90	27.35	3.21	34.87	36.24	31.93	74.00	42.07	Peak
2	2390.00	27.35	3.21	34.87	35.36	31.05	74.00	42.95	Peak
3	2400.00	27.35	3.21	34.94	38.62	34.24	74.00	39.76	Peak
4	2401.75	27.35	3.21	34.94	91.46	87.08	74.00	-13.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 233

File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

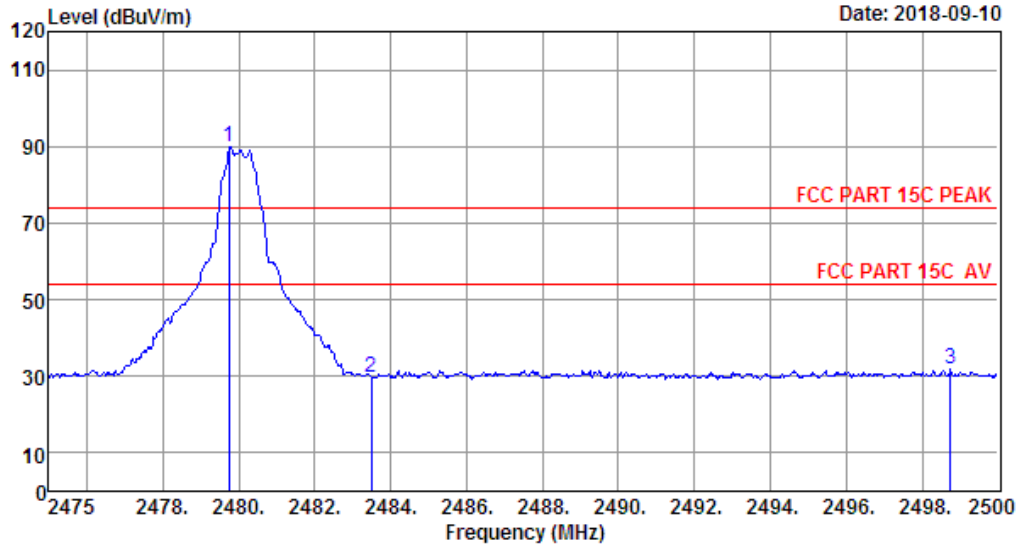

Site no. : 1# 966 Chamber Data no. : 233
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2480MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.75	27.56	3.29	35.21	94.29	89.93	74.00	-15.93	Peak
2	2483.50	27.56	3.29	35.21	34.05	29.69	74.00	44.31	Peak
3	2498.75	27.60	3.30	35.27	36.05	31.68	74.00	42.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 234 File: \\Emc-966-1\test data\2018\RF\Inmusic.EM6 (234)

Date: 2018-09-10

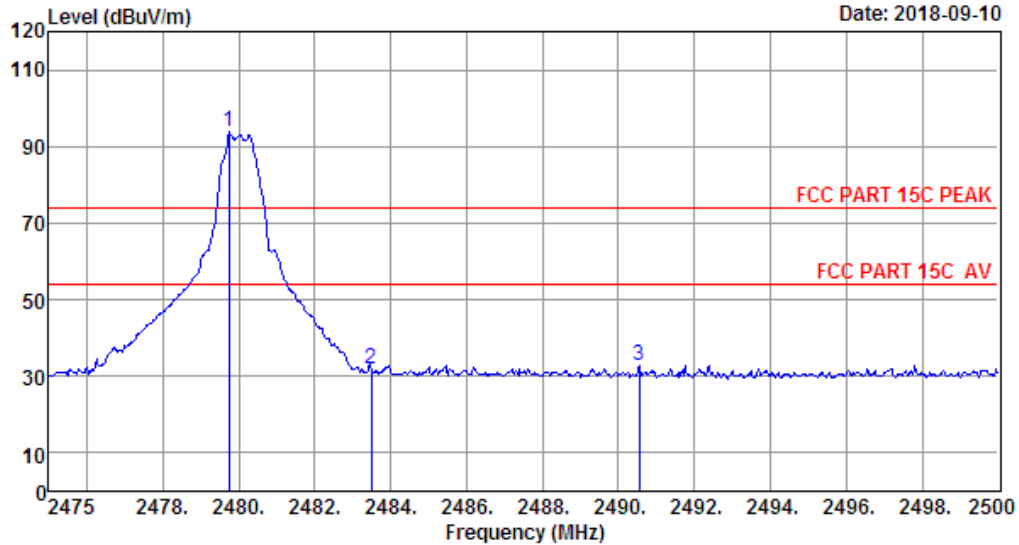

Site no. : 1# 966 Chamber Data no. : 234
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.3'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : CD player
 Power : AC 120V/60Hz
 M/N : DN-700CB
 Test Mode : GFSK TX 2480MHz
 Antenna: TQC-2400-1.8DXBNC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.75	27.56	3.29	35.21	98.31	93.95	74.00	-19.95	Peak
2	2483.50	27.56	3.29	35.21	36.16	31.80	74.00	42.20	Peak
3	2490.55	27.60	3.30	35.27	37.23	32.86	74.00	41.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

6 6dB Bandwidth Test

6.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

6.2 Test Procedure


- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1). Set resolution bandwidth (RBW) = 100 kHz.
 - (2). Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - (3). Detector = Peak.
 - (4). Trace mode = max hold.
 - (5). Sweep = auto couple.
 - (6). Allow the trace to stabilize.
 - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Test Result


EUT: CD player			
M/N: DN-700CB			
Test date: 2018-09-14		Test site: RF Site	Tested by: Tony
Test Mode	CH	6dB bandwidth (MHz)	Limit (KHz)
BT 4.0-BLE GFSK	CH1	0.803	>500
	CH20	0.813	>500
	CH40	0.817	>500
Conclusion : PASS			

6.4 Test Data


Test Mode: BT 4.0-BLE GFSK 2402MHz

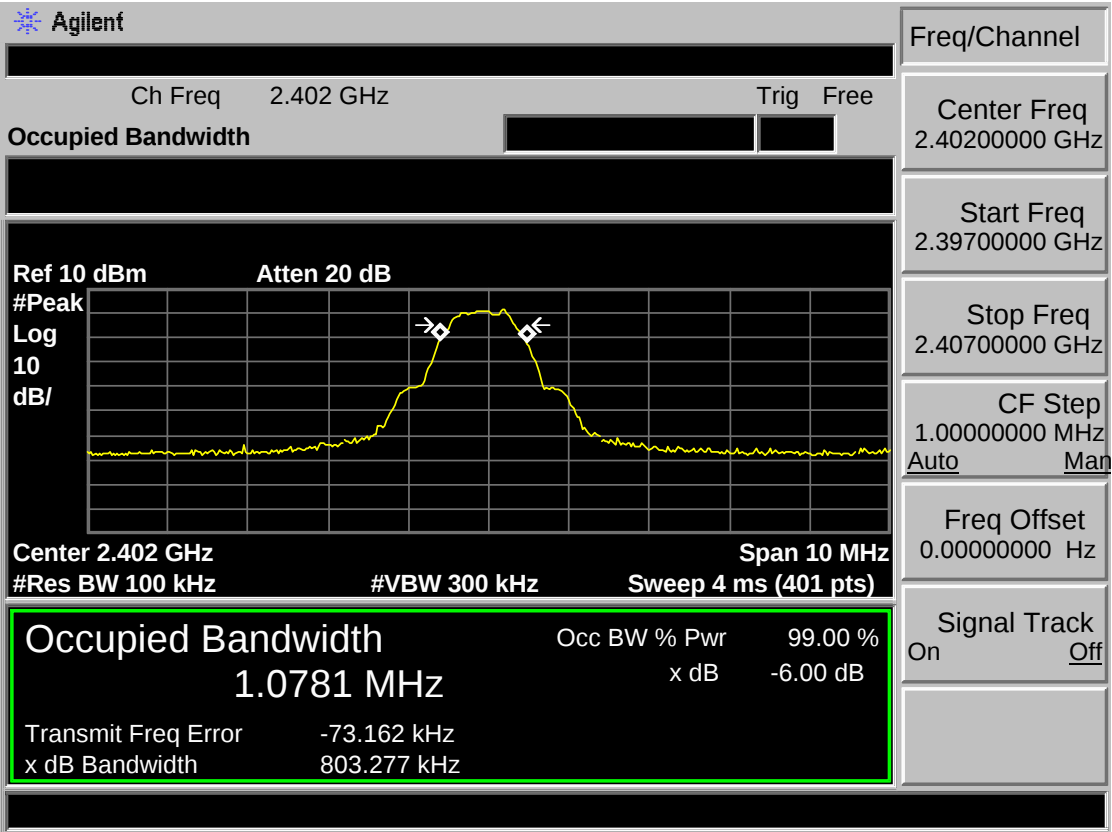

Test Mode: BT 4.0-BLE GFSK 2440MHz

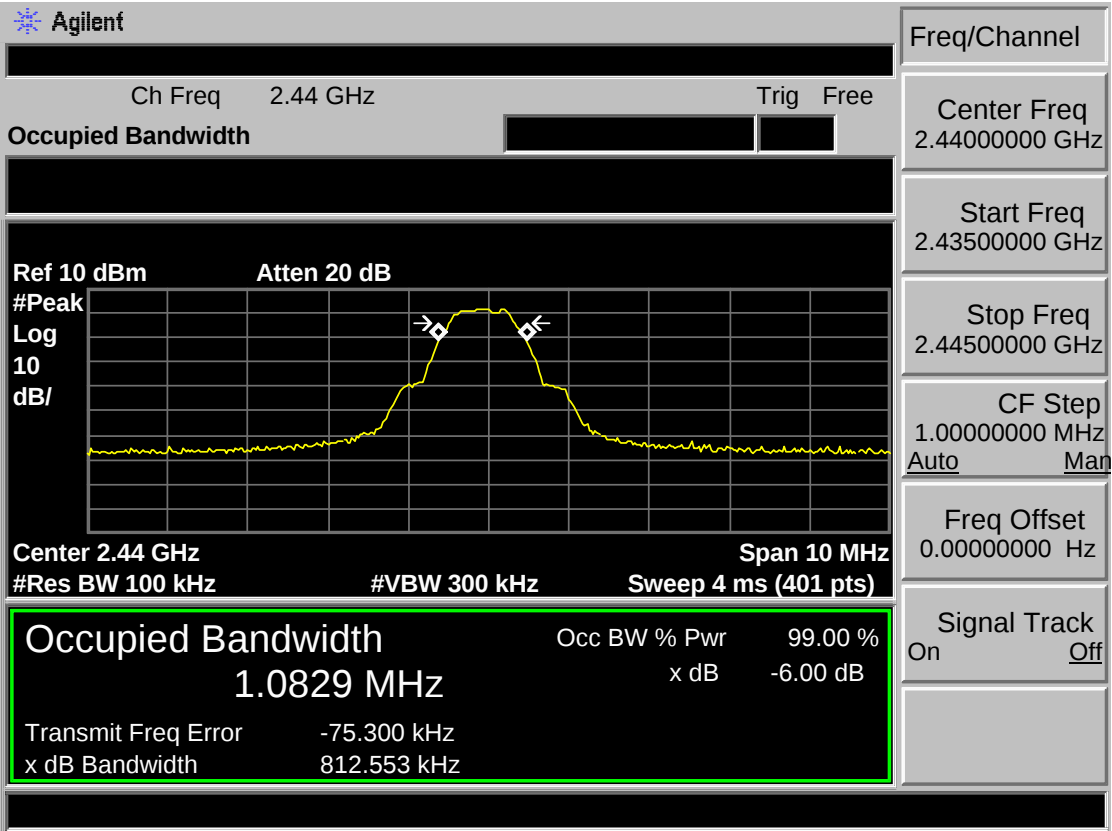

Test Mode: BT 4.0-BLE GFSK 2480MHz

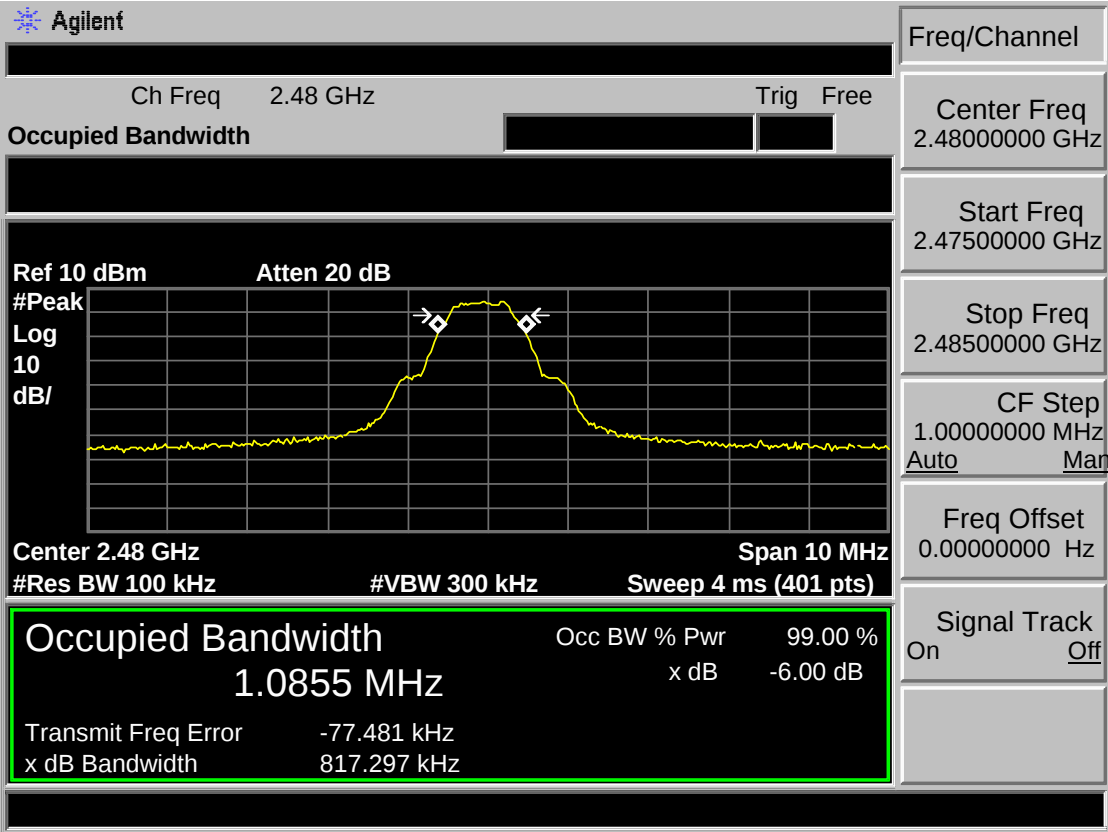

7 99% BANDWIDTH

7.1 Limit

N/A

7.2 Test Procedure


- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure
 - (1). RBW used must be at least 1-5% of OBW.
 - (2). Set the video bandwidth (VBW) = 3 x RBW.
 - (3). Detector = Peak.
 - (4). Trace mode = max hold.
 - (5). Sweep = auto couple.

7.3 Test Result


EUT: CD player			
M/N: DN-700CB			
Test date: 2018-09-14		Test site: RF Site	Tested by: Tony
Test Mode	CH	99% bandwidth (MHz)	Limit (KHz)
BT 4.0-BLE GFSK	CH1	1.045	/
	CH20	1.048	/
	CH40	1.051	/
Conclusion : PASS			

7.4 Test Data


Test Mode: BT 4.0-BLE GFSK 2402MHz

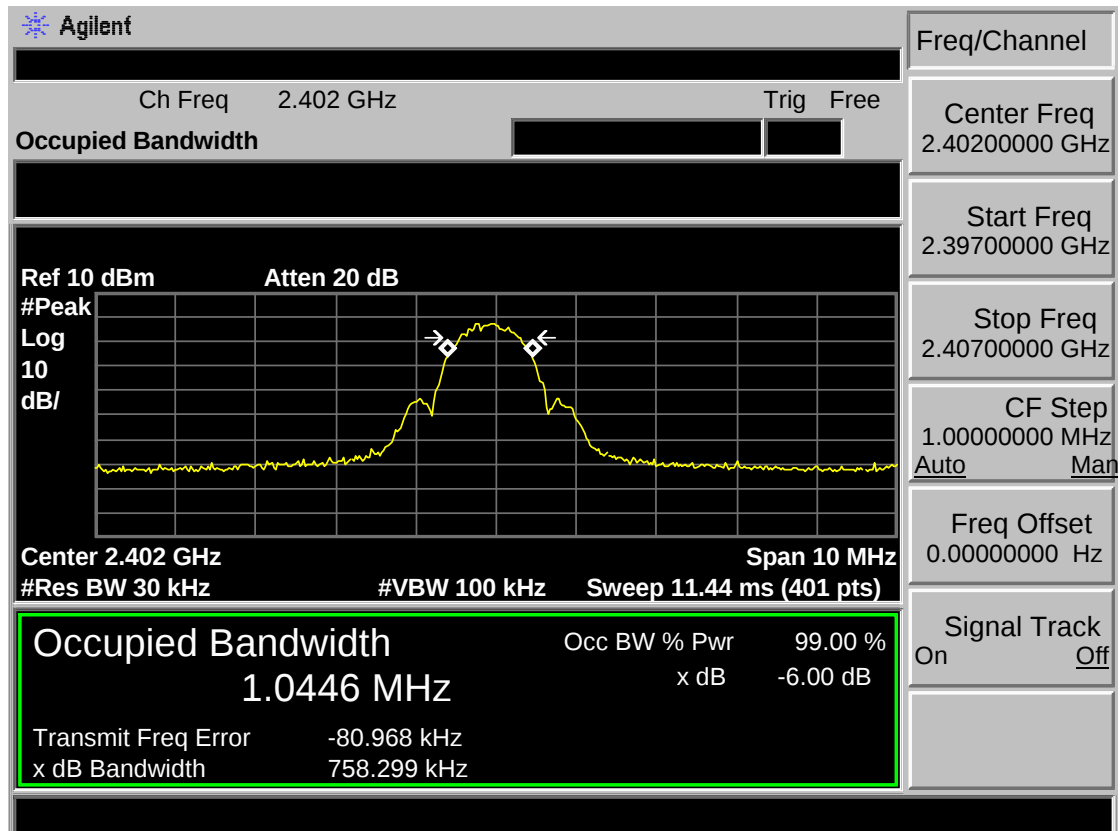

Test Mode: BT 4.0-BLE GFSK 2440MHz

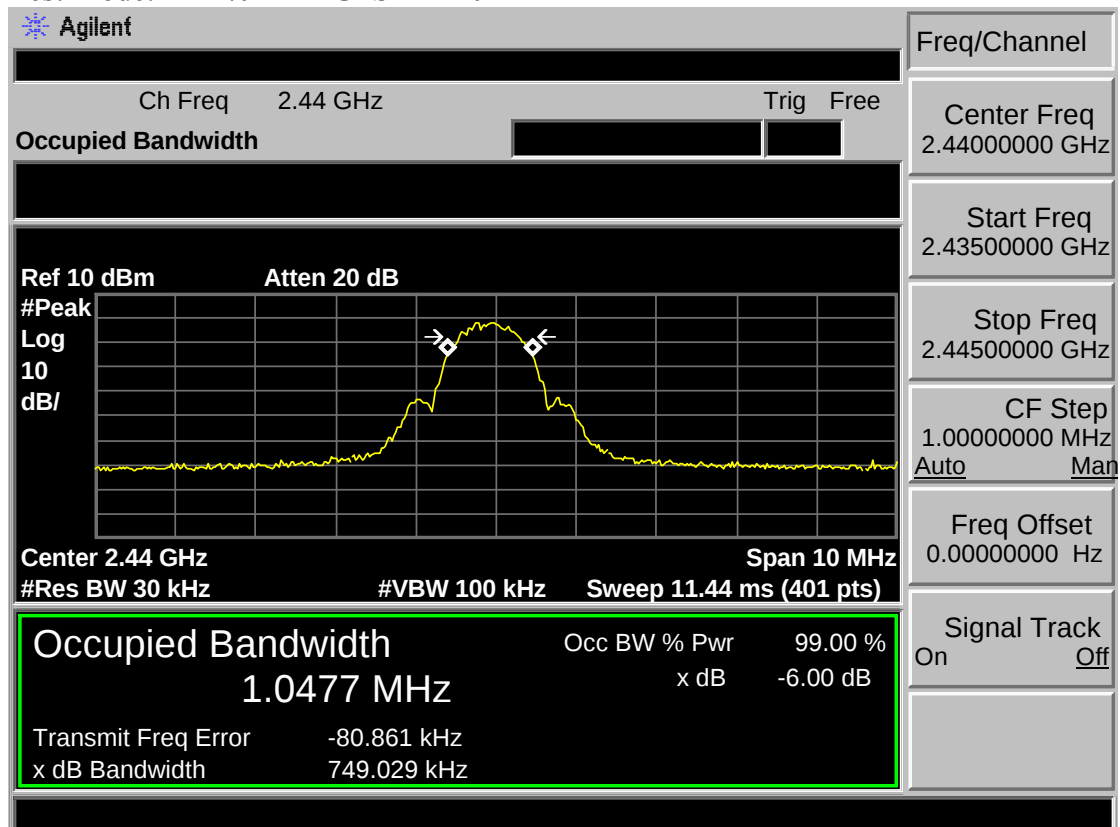

Test Mode: BT 4.0-BLE GFSK 2480MHz

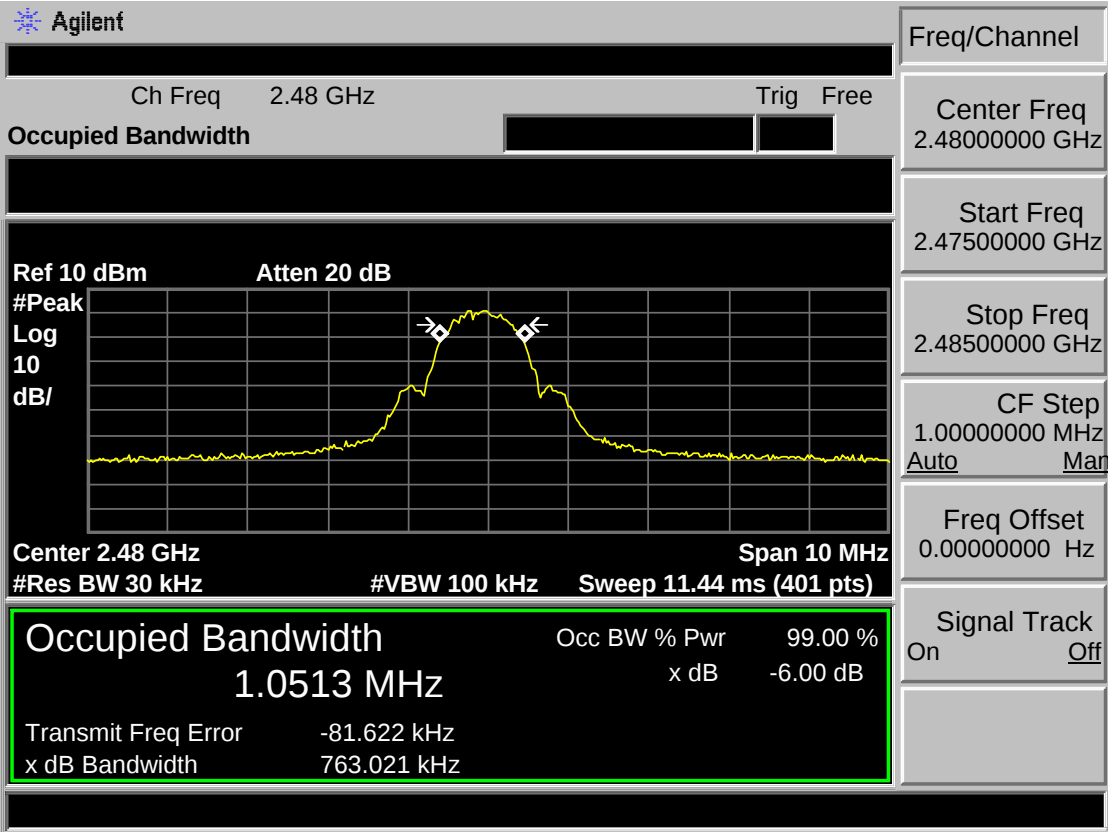

8 OUTPUT POWER TEST

8.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak output Power shall not exceed 1W(30dBm)

8.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1). Set the RBW $\geq$ DTS bandwidth.
 - (2). Set VBW $\geq 3 \times$ RBW.
 - (3). Set span $\geq 3 \times$ RBW.
 - (4). Sweep time = auto couple.
 - (5). Detector = peak.
 - (6). Trace mode = max hold.
 - (7). Allow trace to fully stabilize.
 - (8). Use peak marker function to determine the peak amplitude level.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.3 Test Result


EUT:CD player			
M/N:DN-700CB			
Test date: 2018-09-14		Test site: RF Site	Tested by: Tony
Pass			
Test Mode	CH	Peak output Power (dBm)	Limit (dBm)
BT 4.0-BLE GFSK	CH1	0.74	30
	CH20	2.31	30
	CH40	3.95	30
Conclusion : PASS			

8.4 Test Data


Test Mode: BT 4.0-BLE GFSK 2402MHz

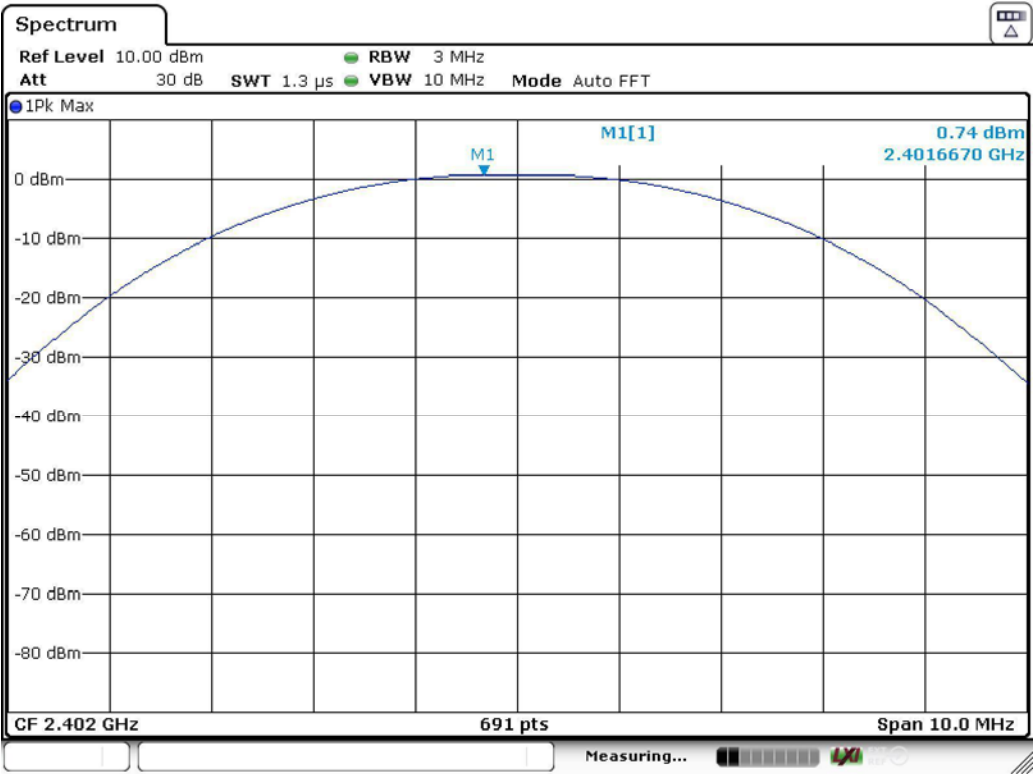

Test Mode: BT 4.0-BLE GFSK 2440MHz

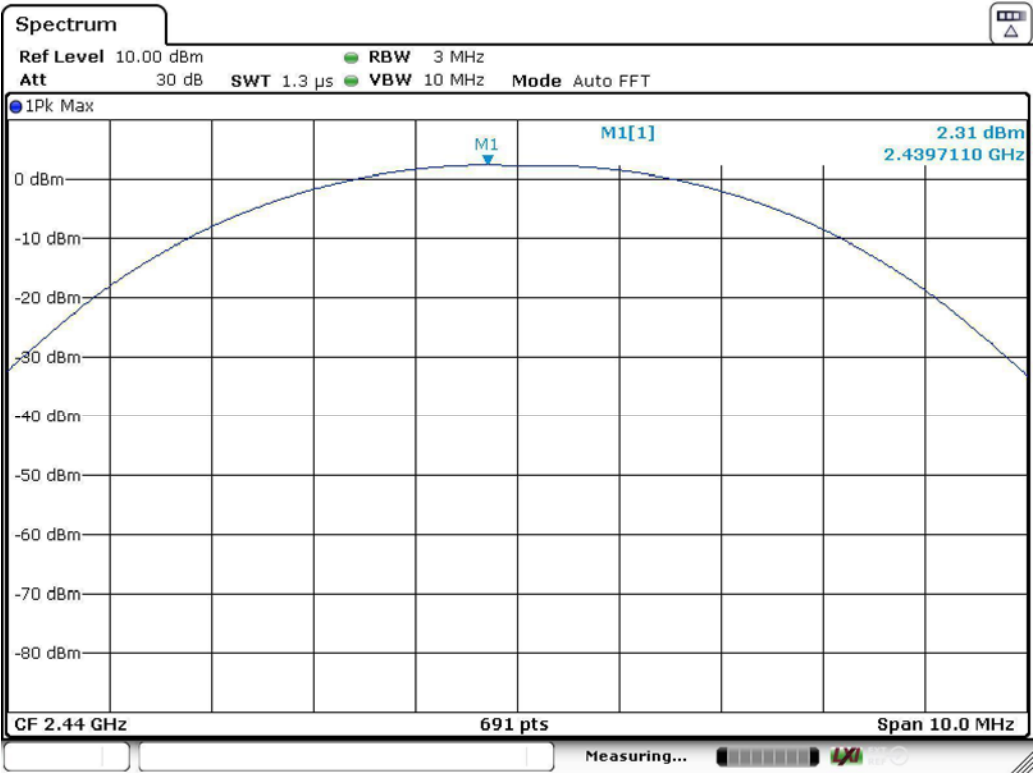

Test Mode: BT 4.0-BLE GFSK 2480MHz

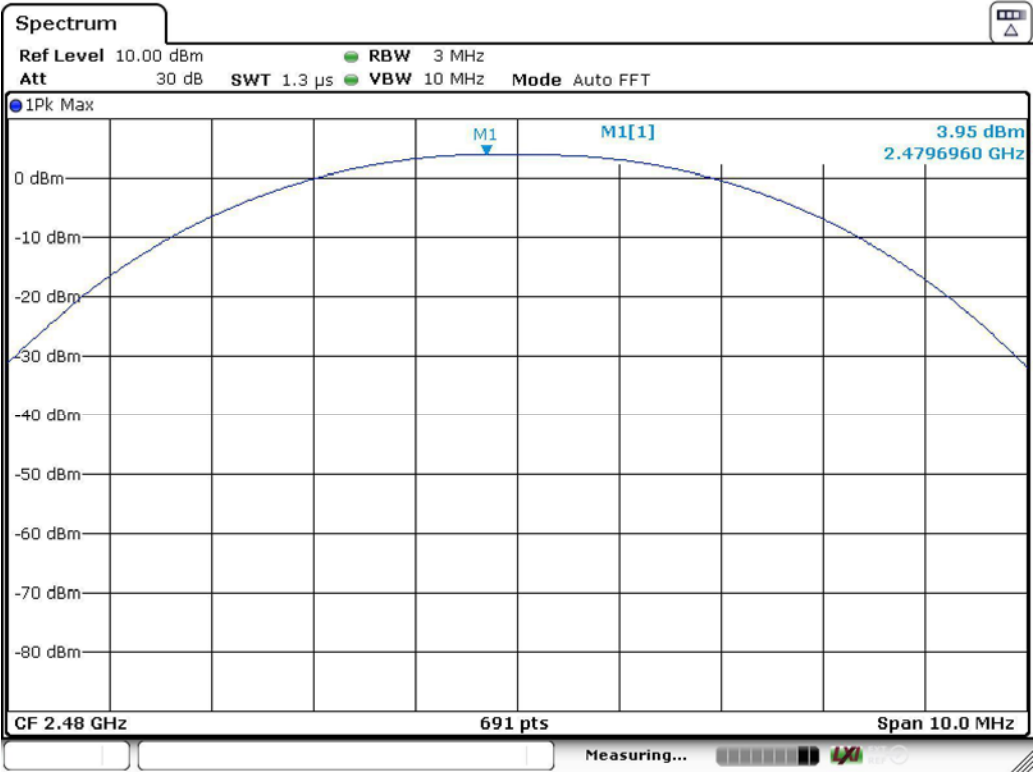

9 POWER SPECTRAL DENSITY TEST

9.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.2 Test Procedure


- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1). Set analyzer center frequency to DTS channel center frequency.
 - (2). Set the span to 1.5 times the DTS bandwidth.
 - (3). Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - (4). Set the VBW $\geq 3 \text{ RBW}$.
 - (5). Detector = peak.
 - (6). Sweep time = auto couple.
 - (7). Trace mode = max hold.
 - (8). Allow trace to fully stabilize.
 - (9). Use the peak marker function to determine the maximum amplitude level.
 - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.3 Test Result


EUT: CD player			
M/N: DN-700CB			
Test date: 2018-09-14		Test site: RF Site	Tested by: Tony
Pass			
Test Mode	CH	Power density (dBm/3kHz)	Limit (dBm/3kHz)
BT 4.0-BLE GFSK	CH1	-13.54	8
	CH20	-12.89	8
	CH40	-10.27	8
Conclusion : PASS			

9.4 Test Data


Test Mode: BT 4.0-BLE GFSK 2402MHz

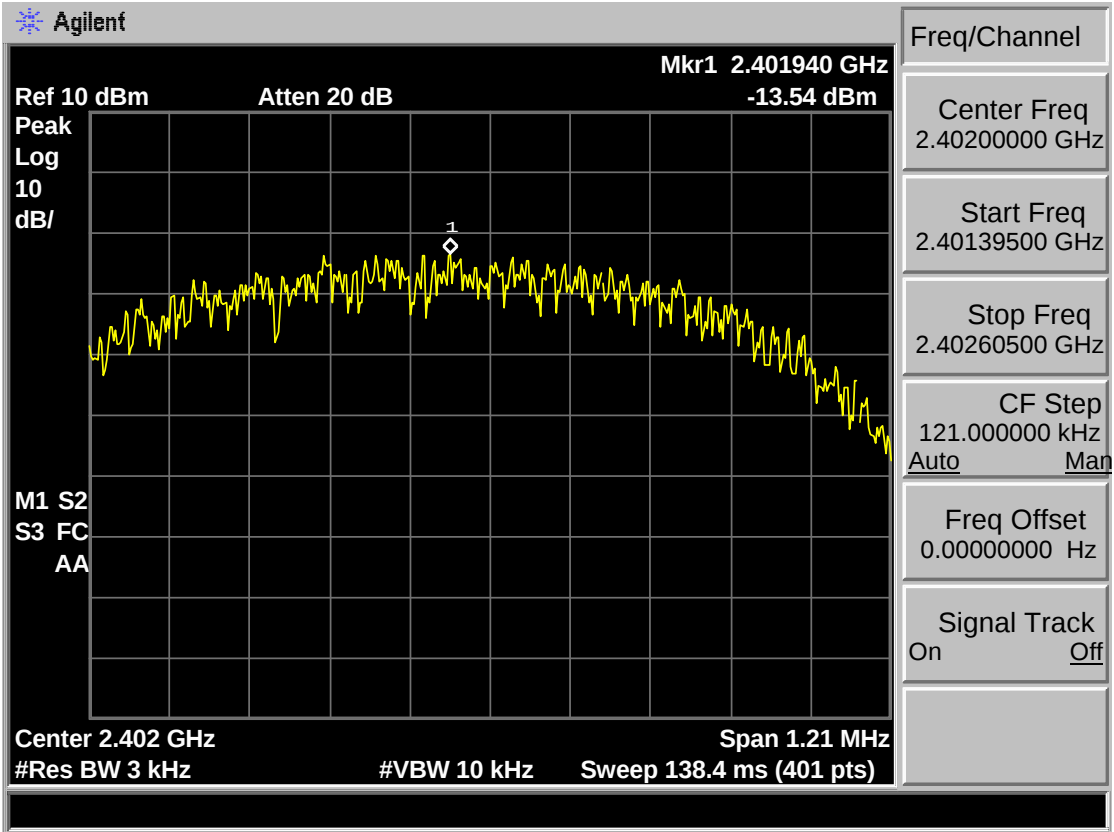

Test Mode: BT 4.0-BLE GFSK 2440MHz

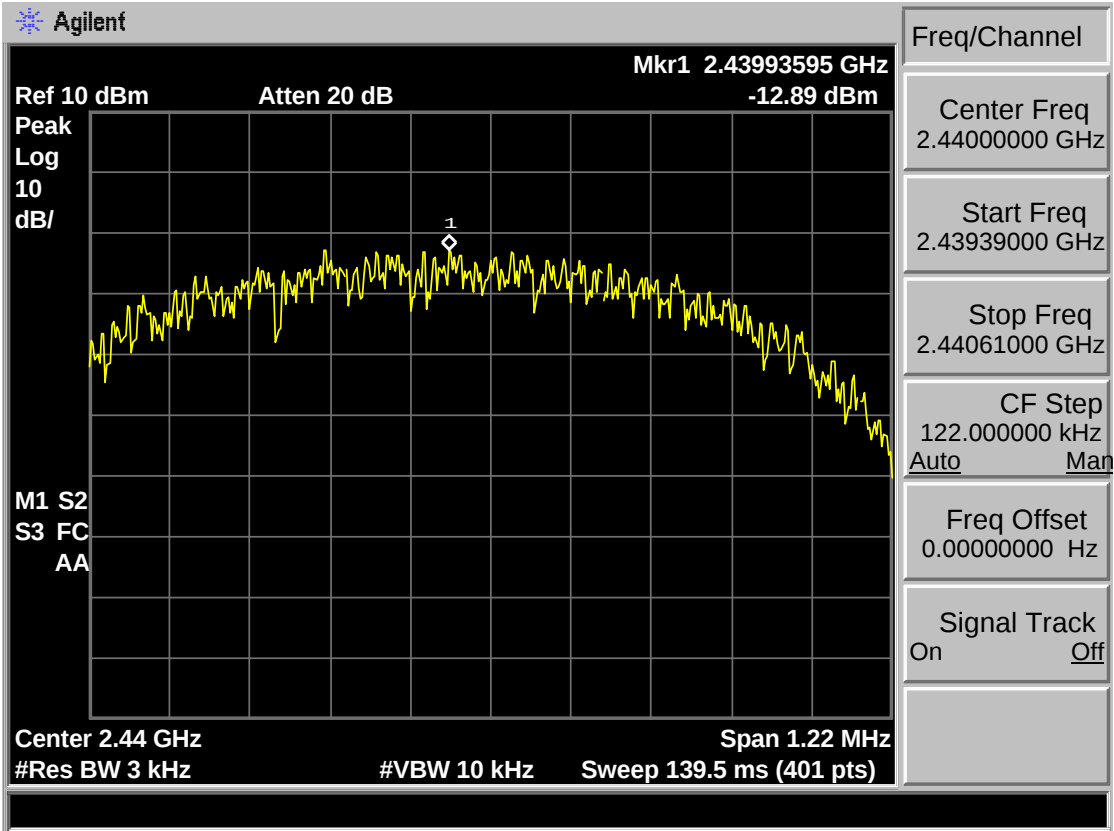

Test Mode: BT 4.0-BLE GFSK 2480MHz

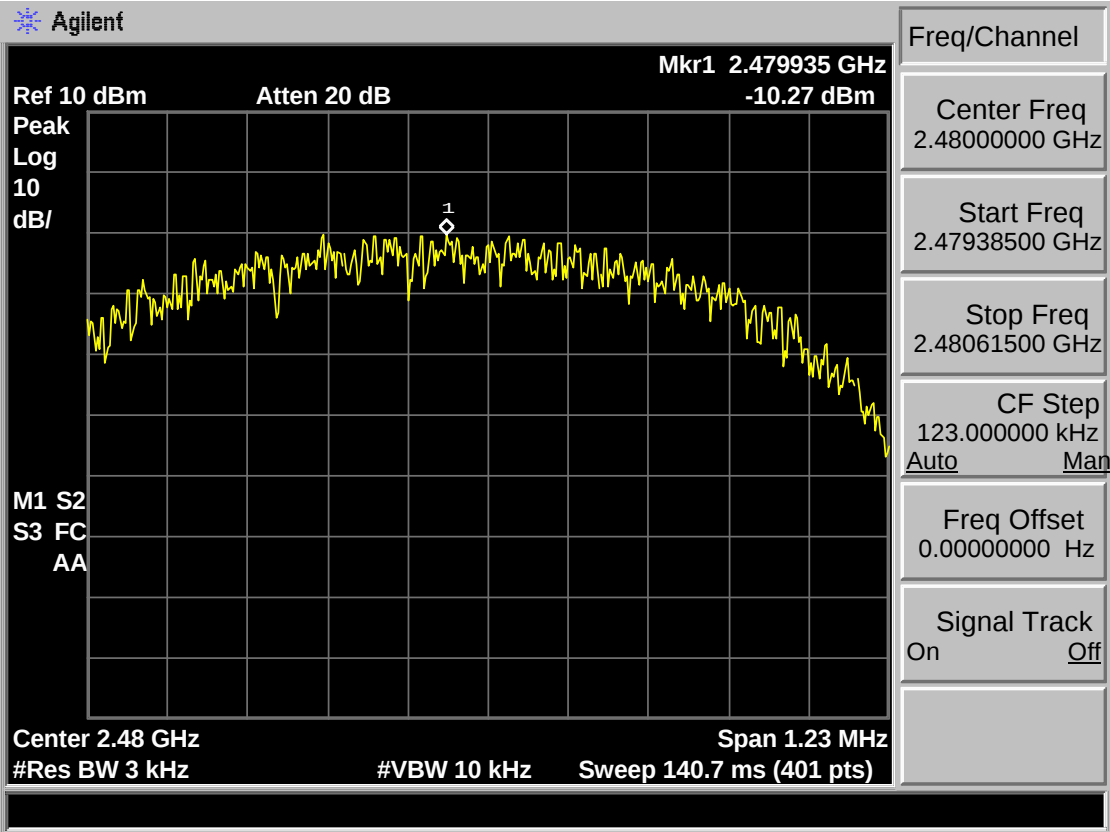

10 ANTENNA REQUIREMENTS

10.1 Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2 Result



The antennas used for this product are External antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.5dBi.

11 TEST SETUP PHOTO


Conducted Test

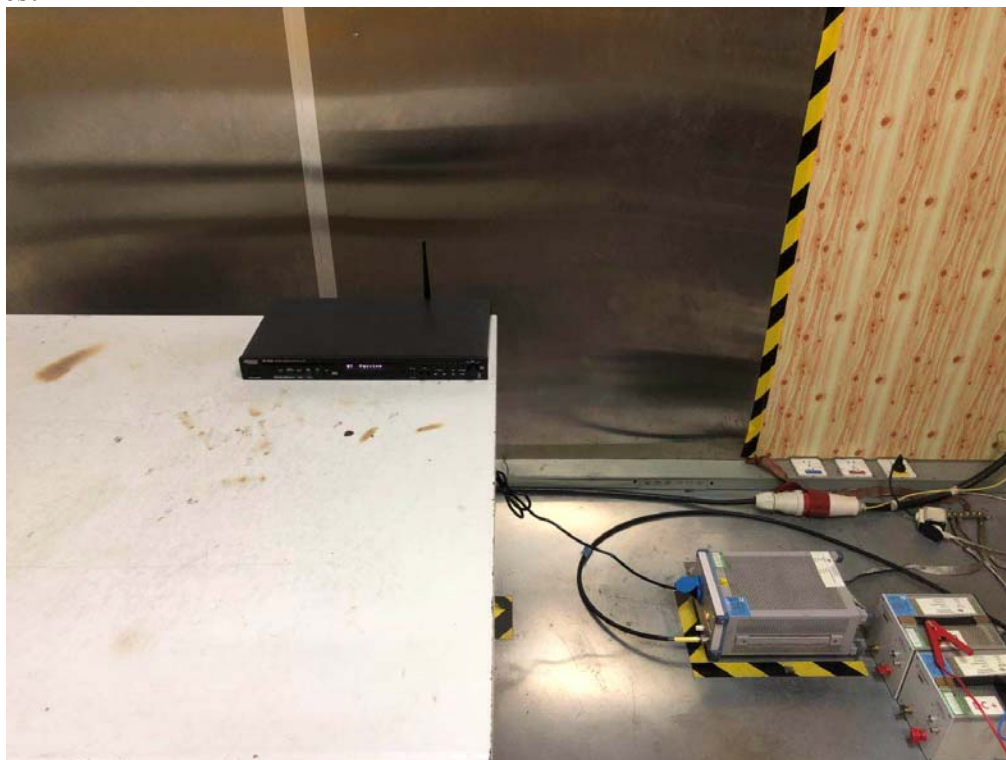

Radiated Test (30-1000 MHz)

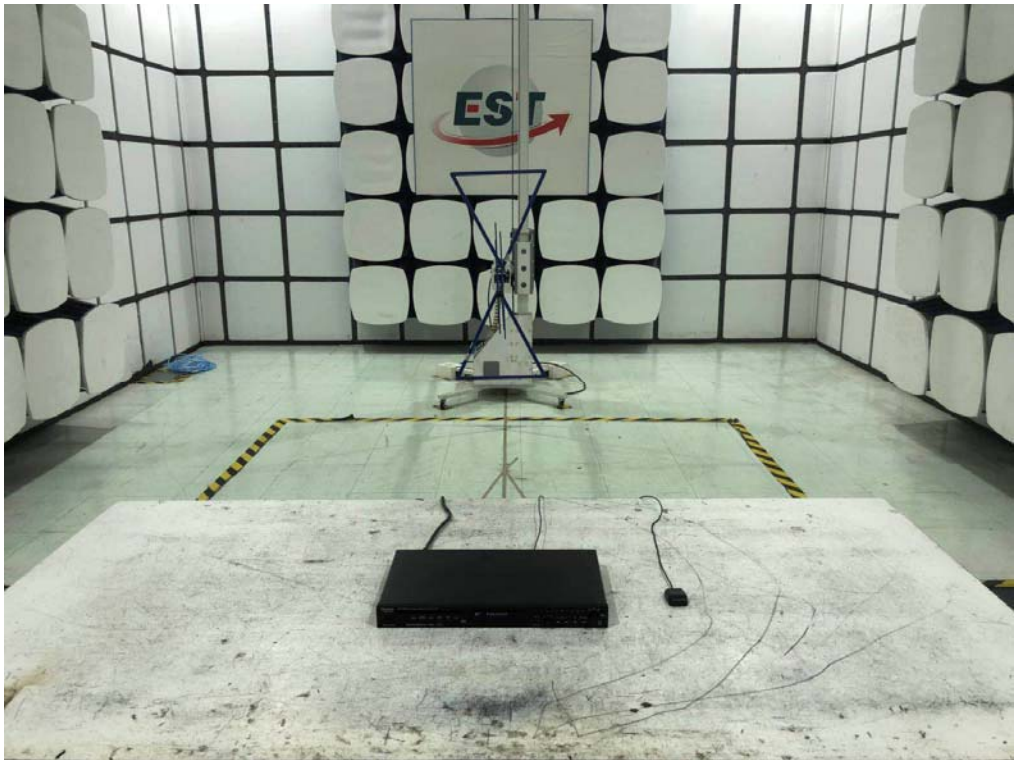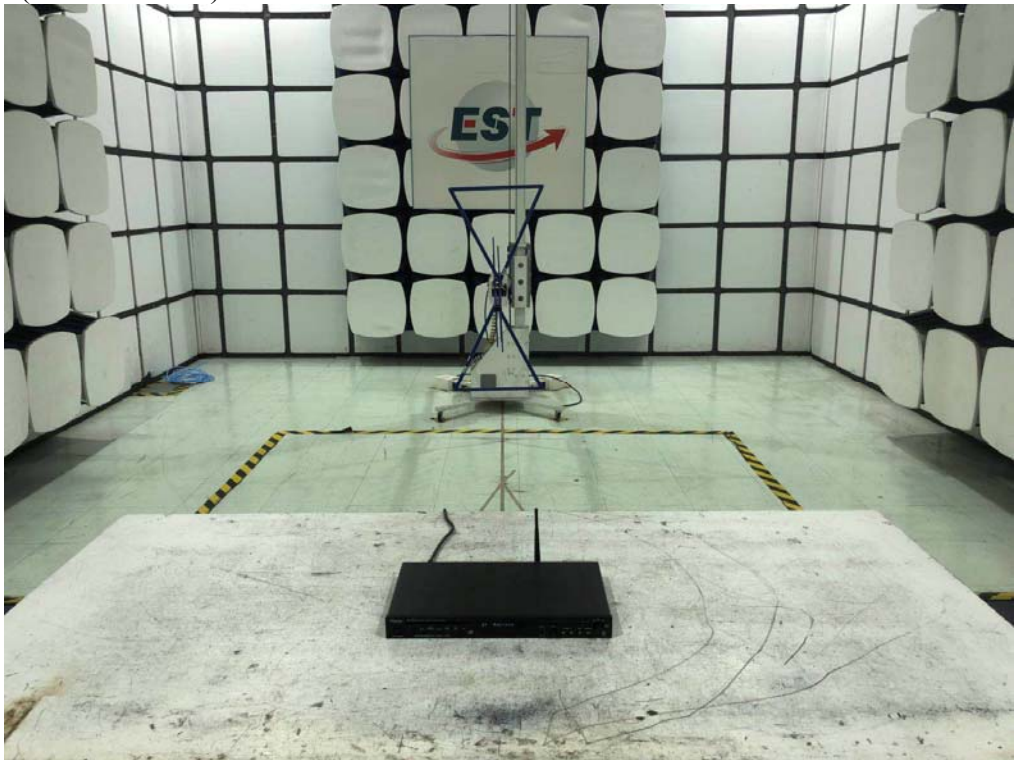

Radiated Test (Above 1GHz)


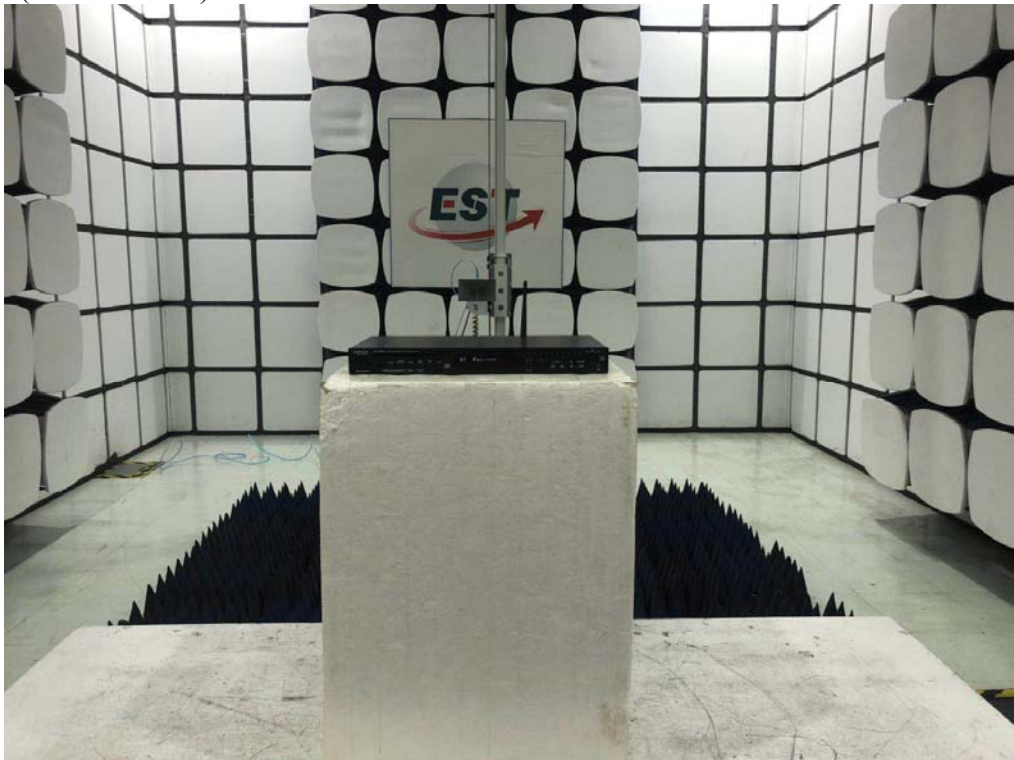


12PHOTO EUT

External Photos
M/N: DN-700CB



External Photos
M/N: DN-700CB

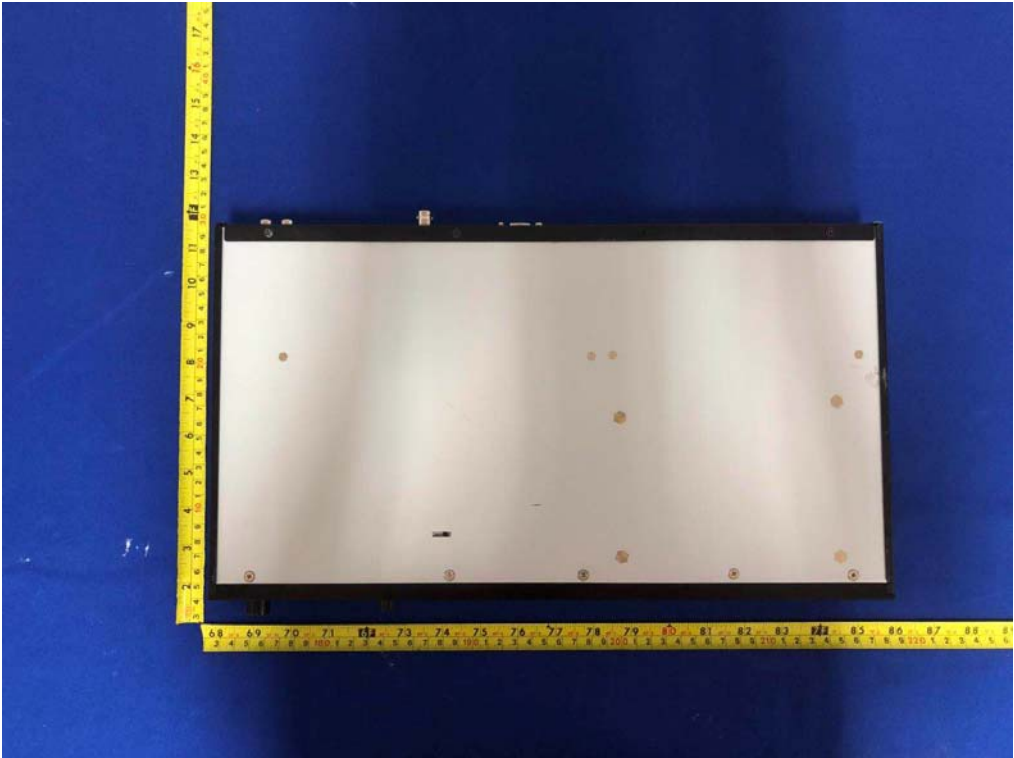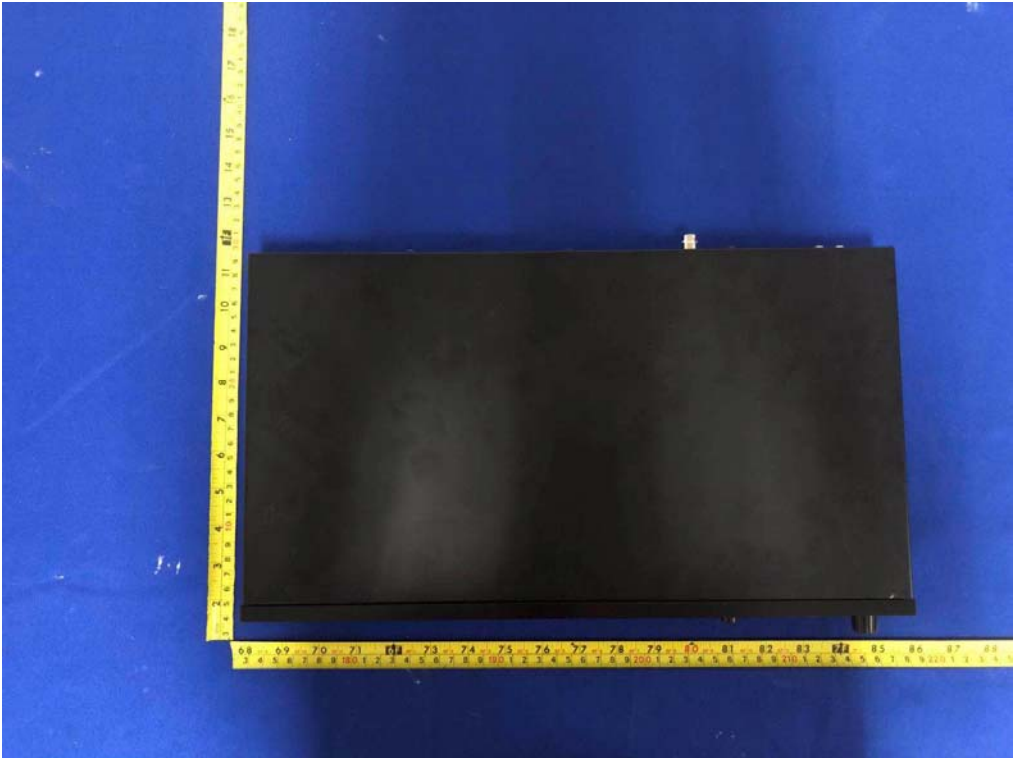


External Photos
M/N: DN-700CB



External Photos
M/N: DN-700CB




External Photos
M/N: DN-700CB


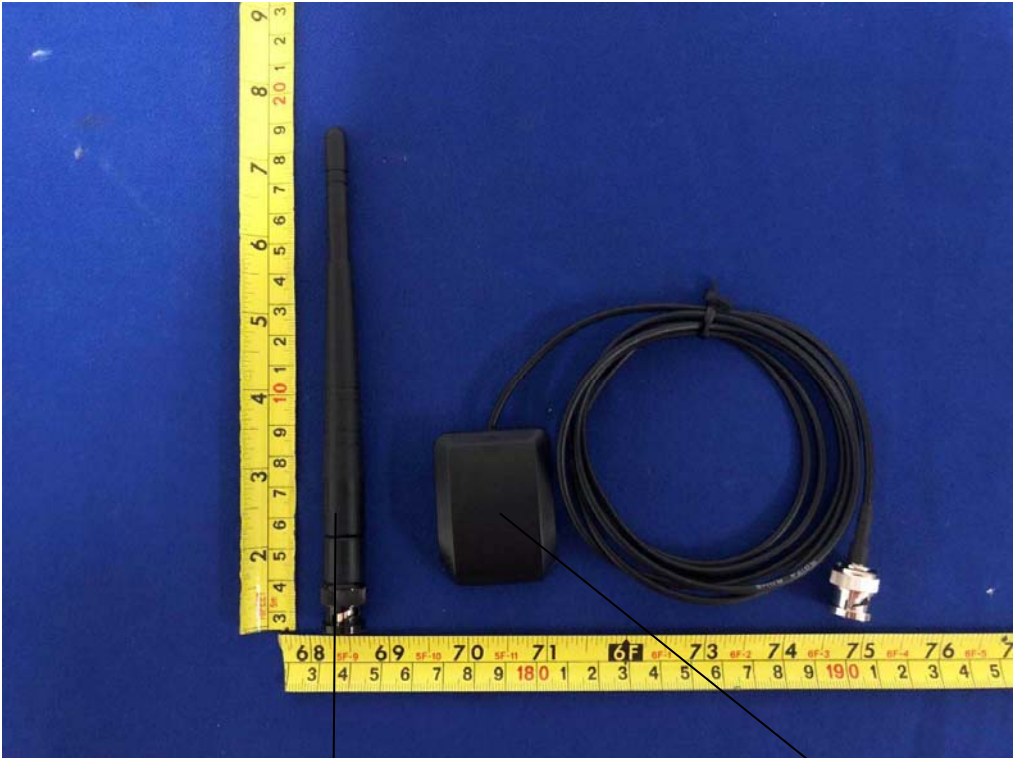


Antenna 1

Antenna 2


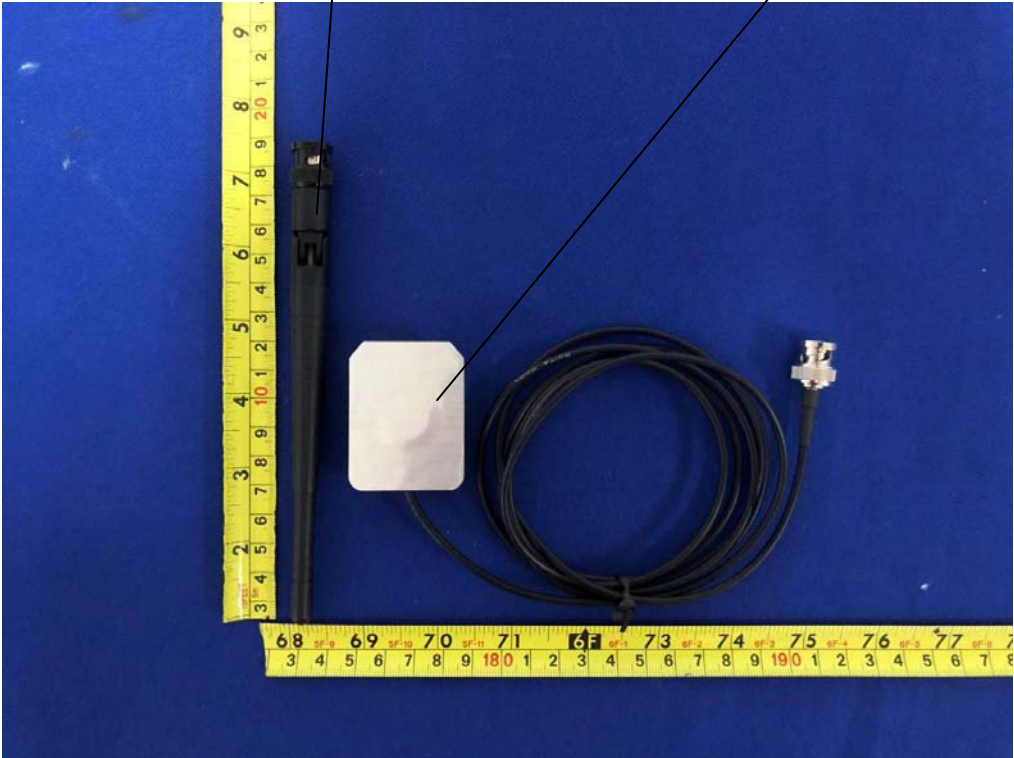


Internal Photos
M/N: DN-700CB

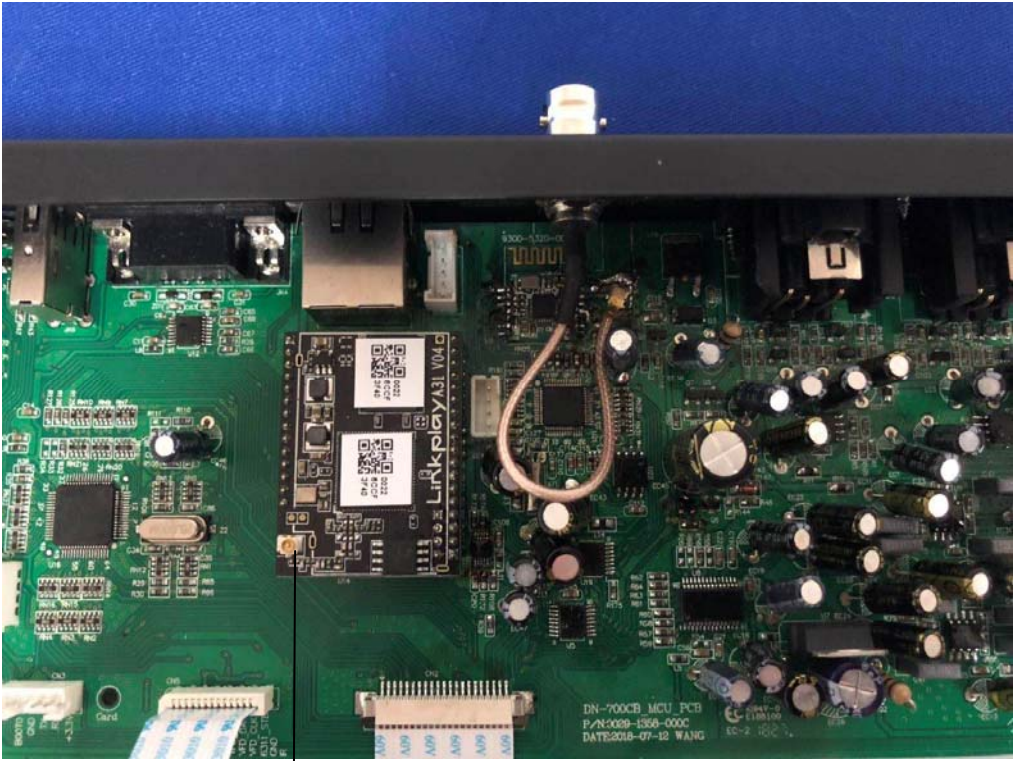
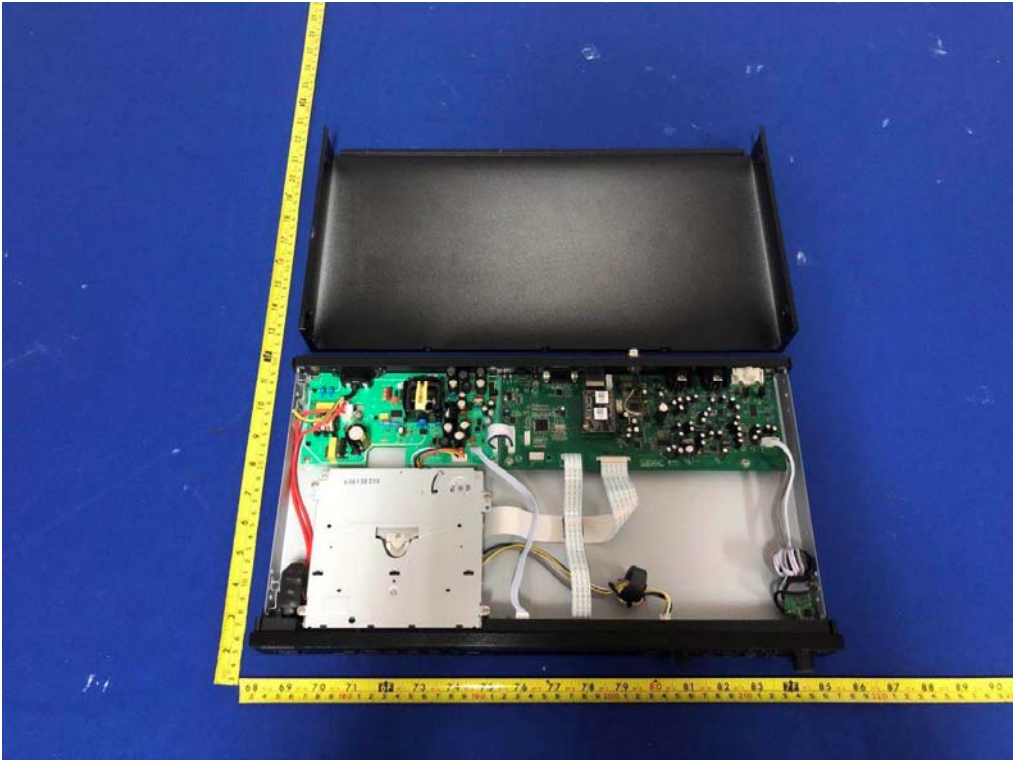


This is Wi-Fi module, But closed Wi-Fi function on this product, only used the RJ45 ethernet function. The Wi-Fi function has been closed, and this ipex connector have not used.



Internal Photos
M/N: DN-700CB

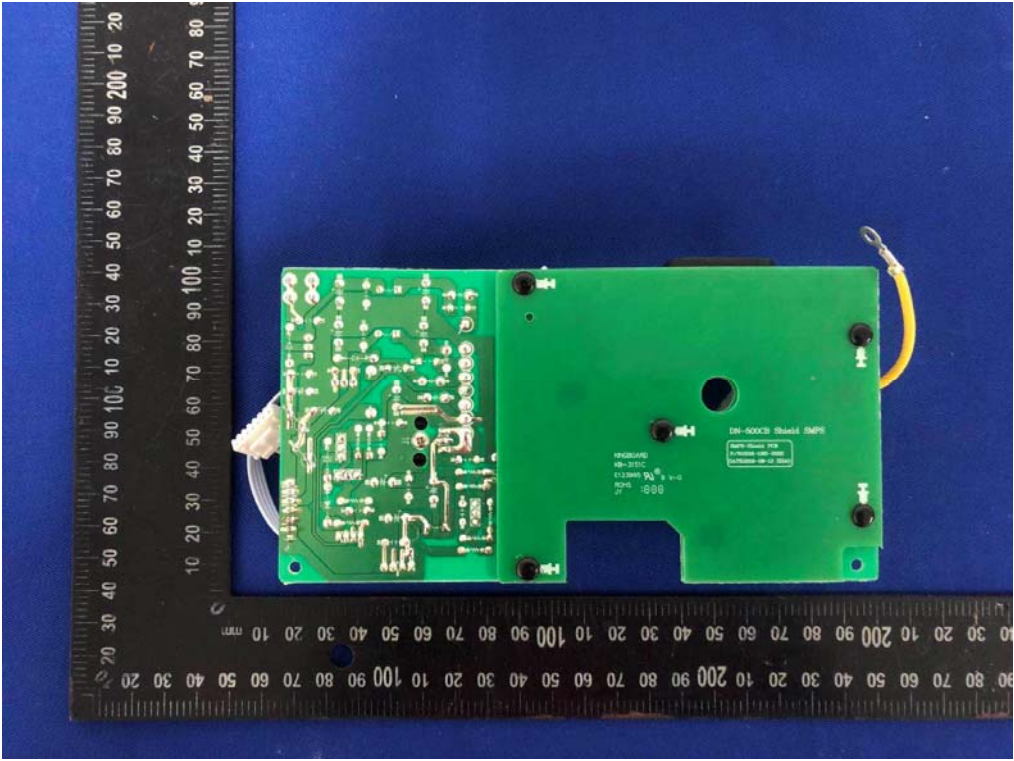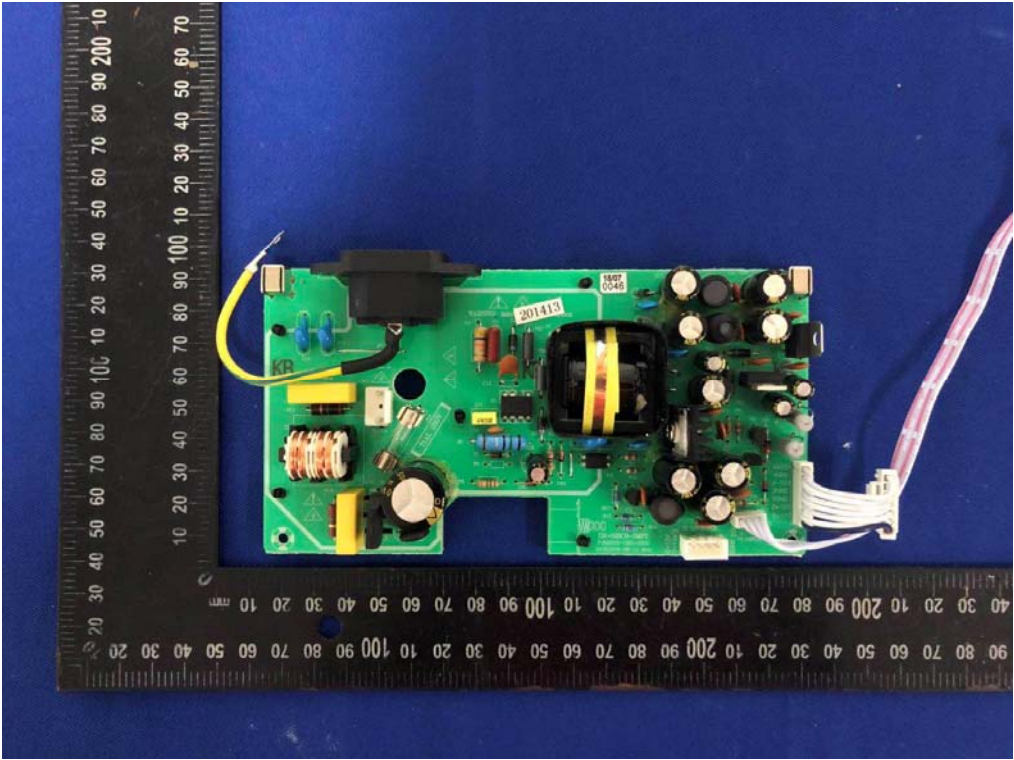


Internal Photos
M/N: DN-700CB

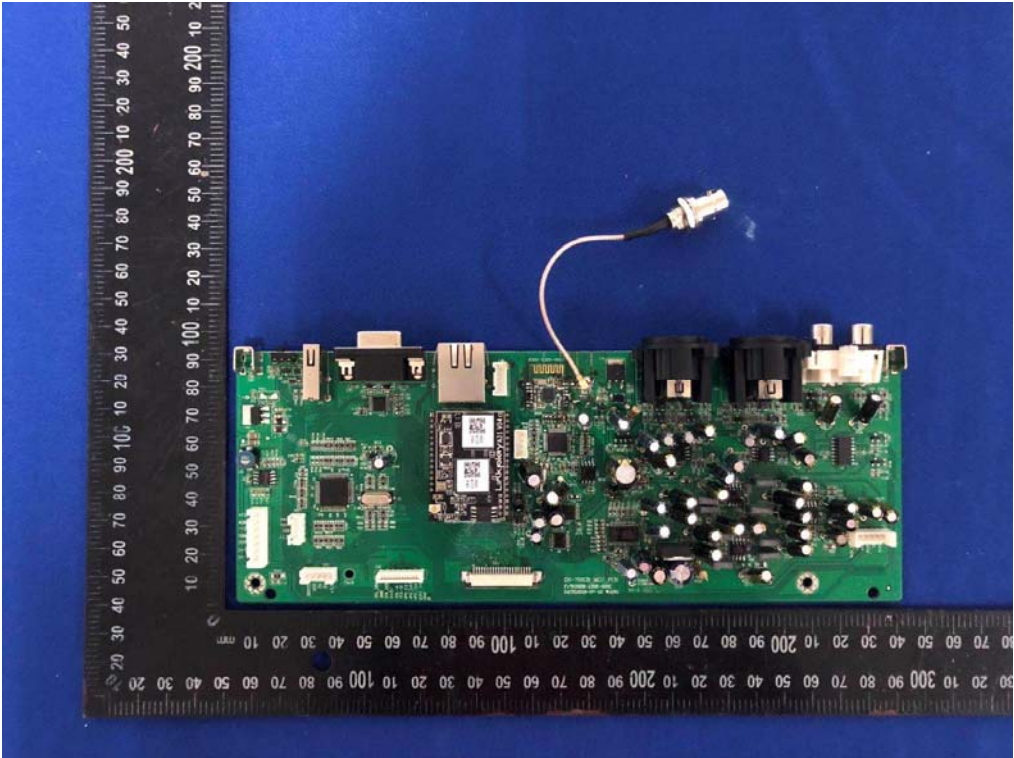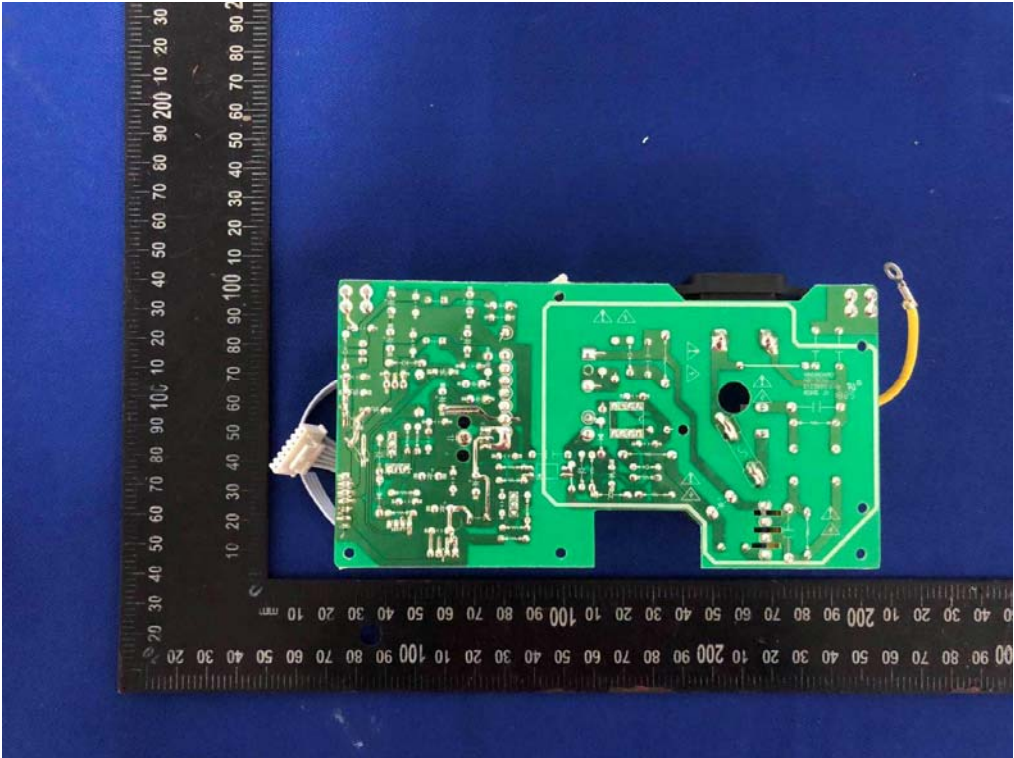

Internal Photos
M/N: DN-700CB

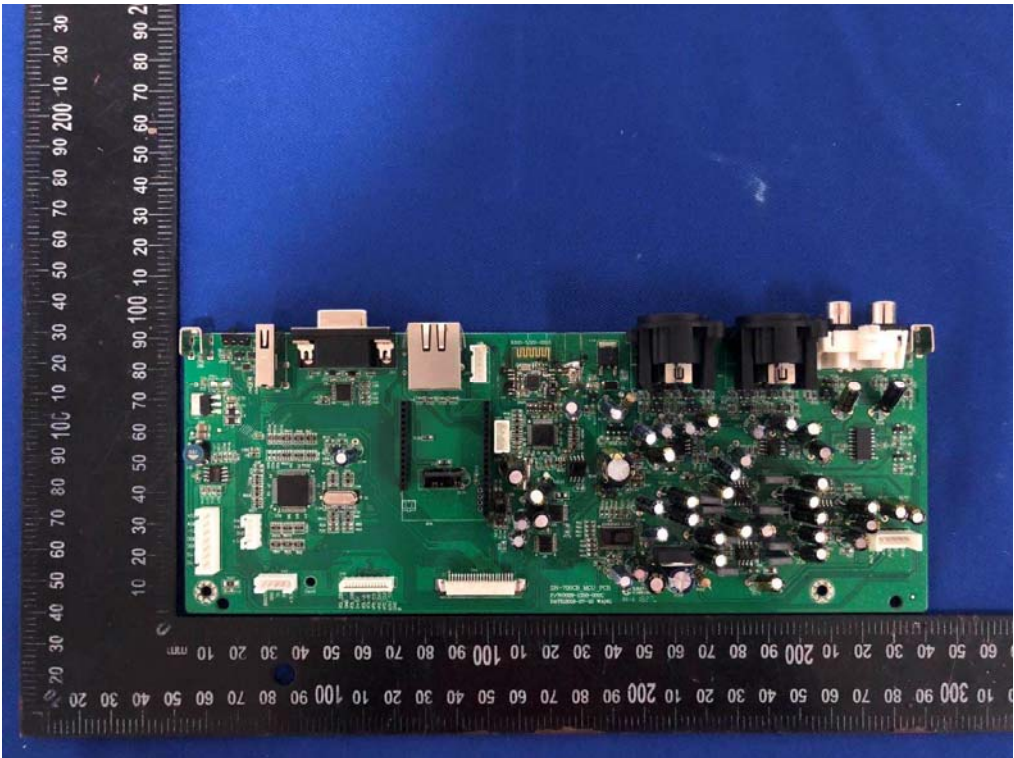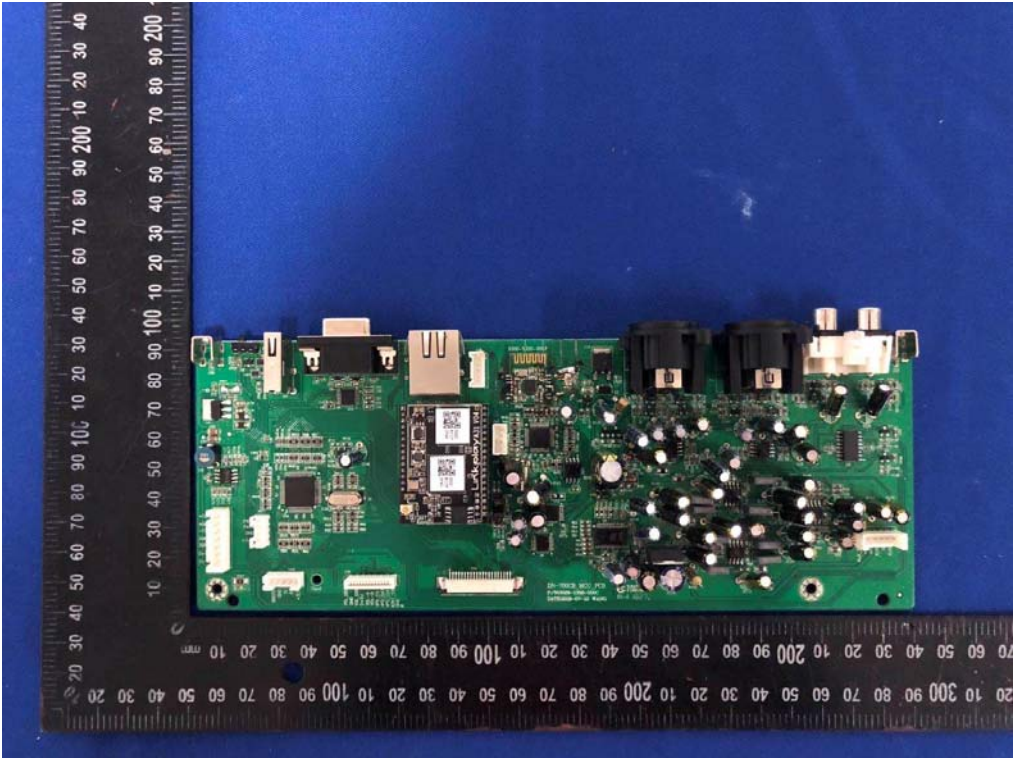



Internal Photos
M/N: DN-700CB

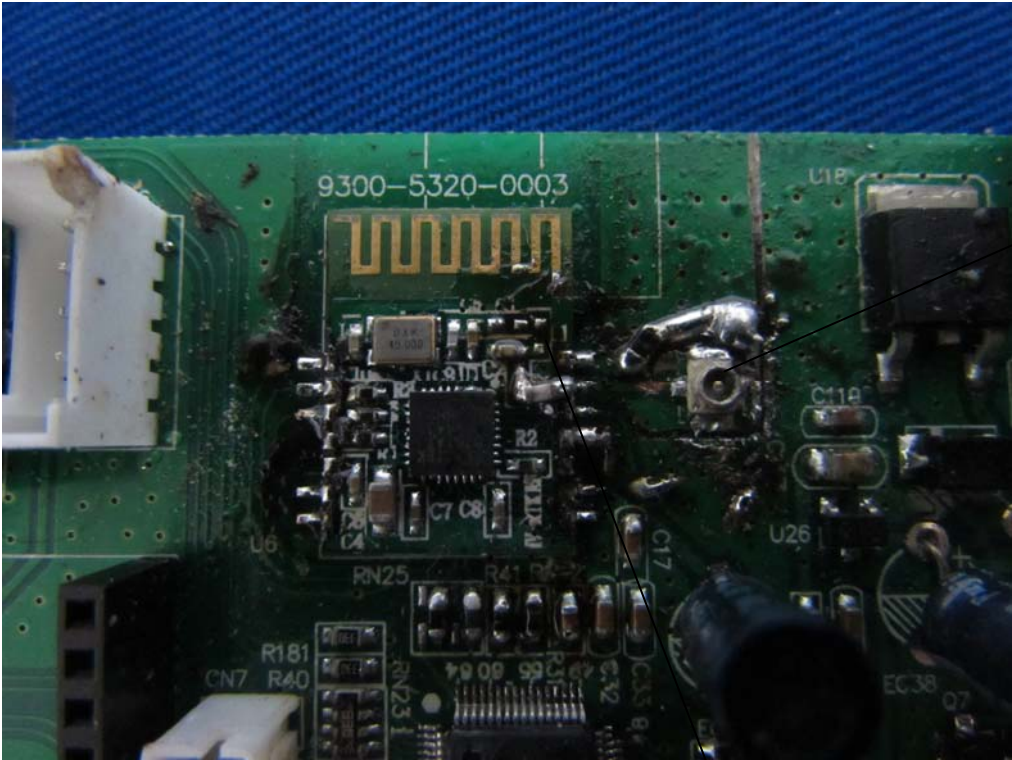



L1 chip inductor has been deleted, so the PCB antenna has not been used.





Internal Photos
M/N: DN-700CB

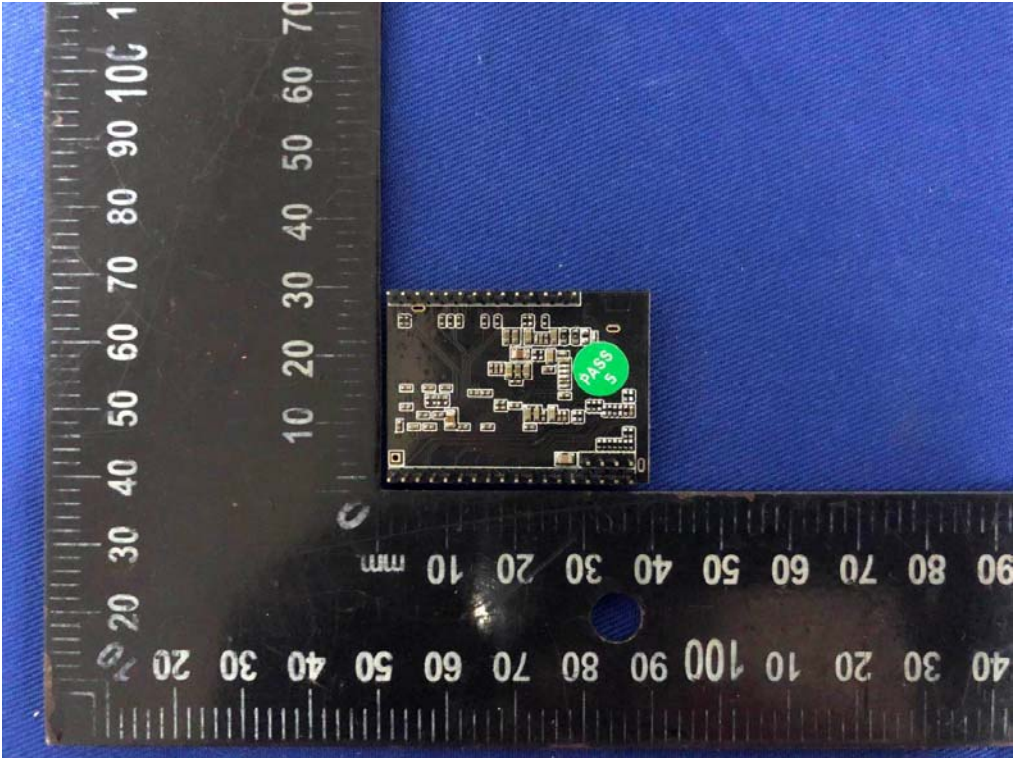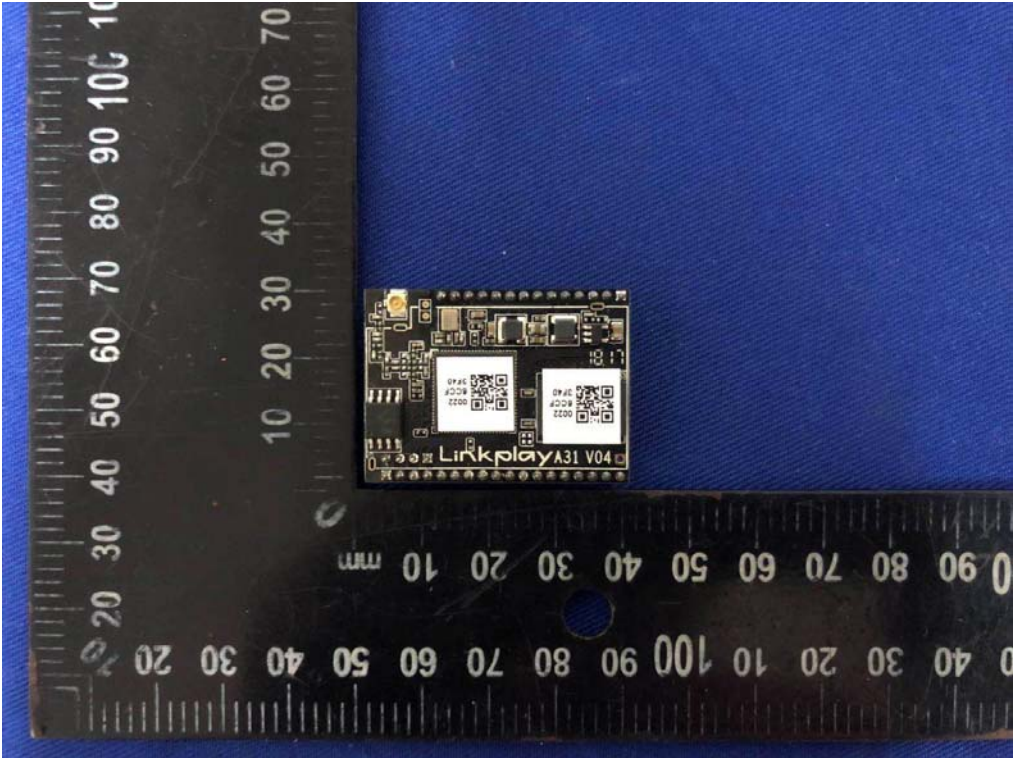



Internal Photos
M/N: DN-700CB

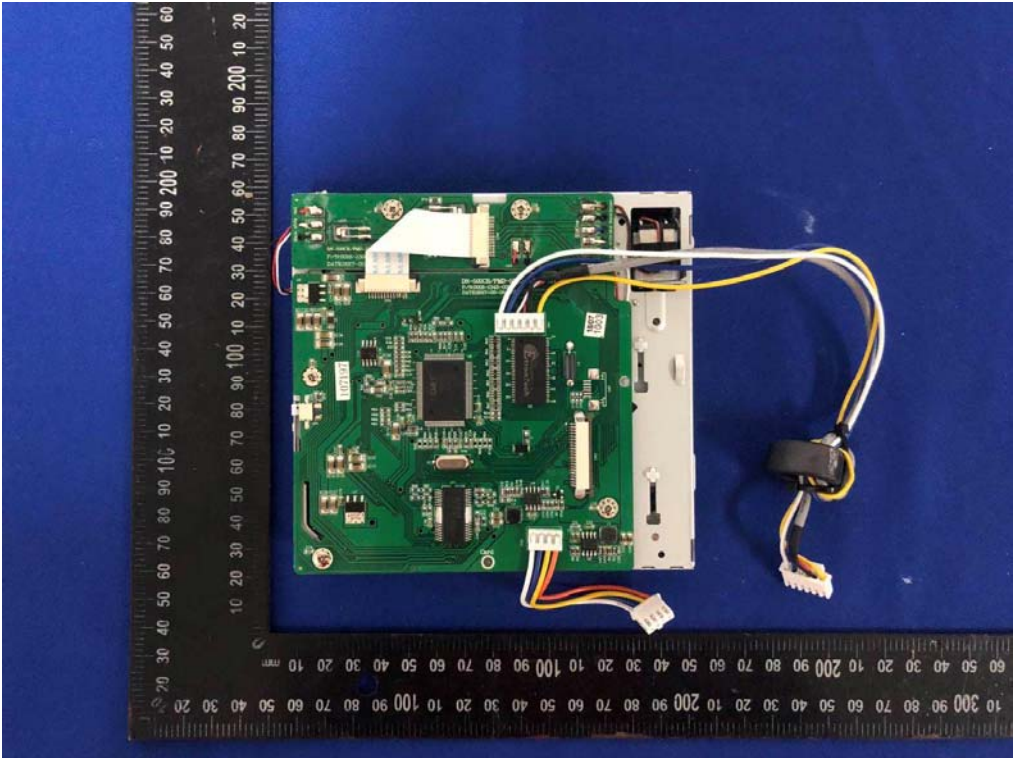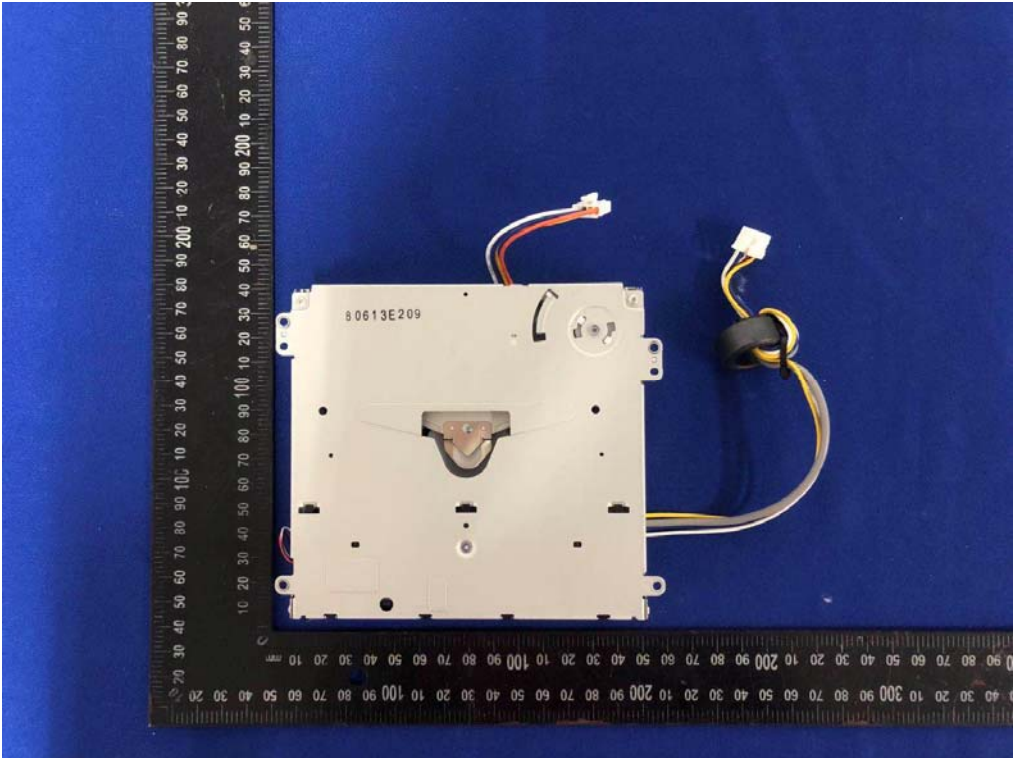

Internal Photos
M/N: DN-700CB

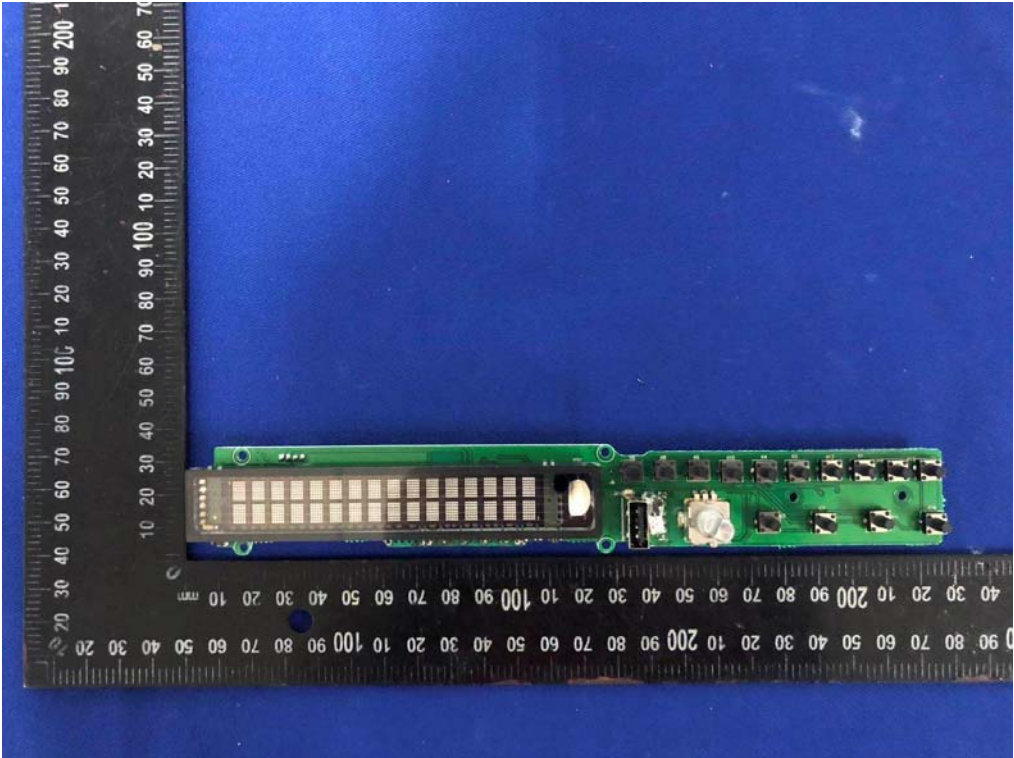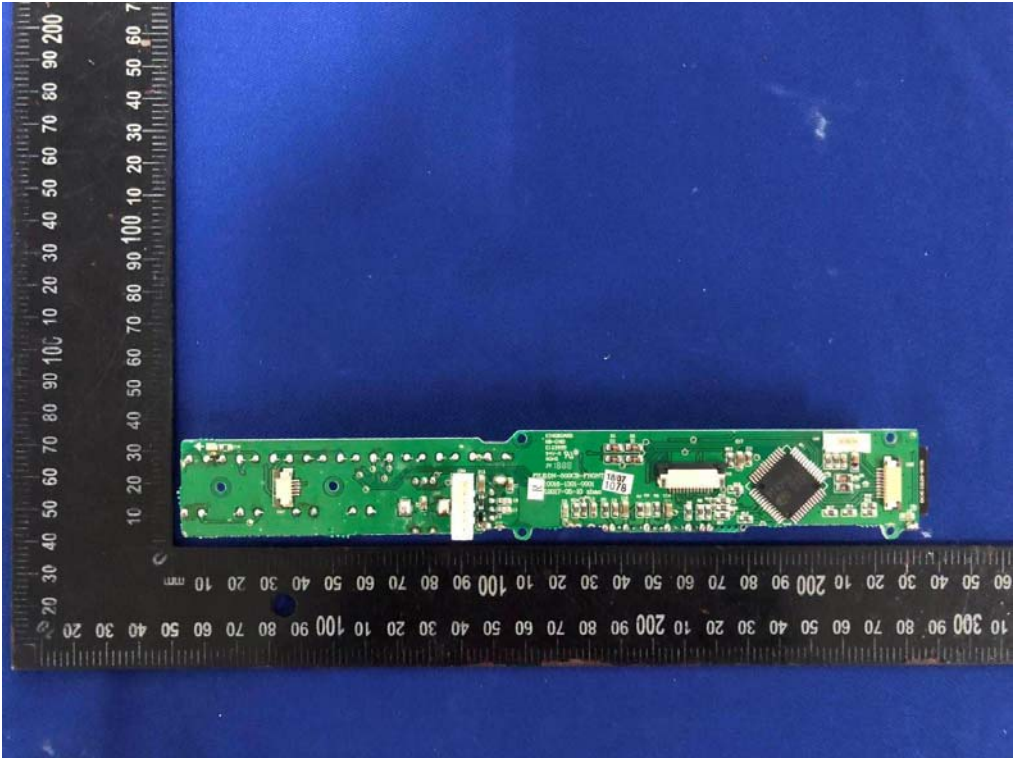

Internal Photos
M/N: DN-700CB

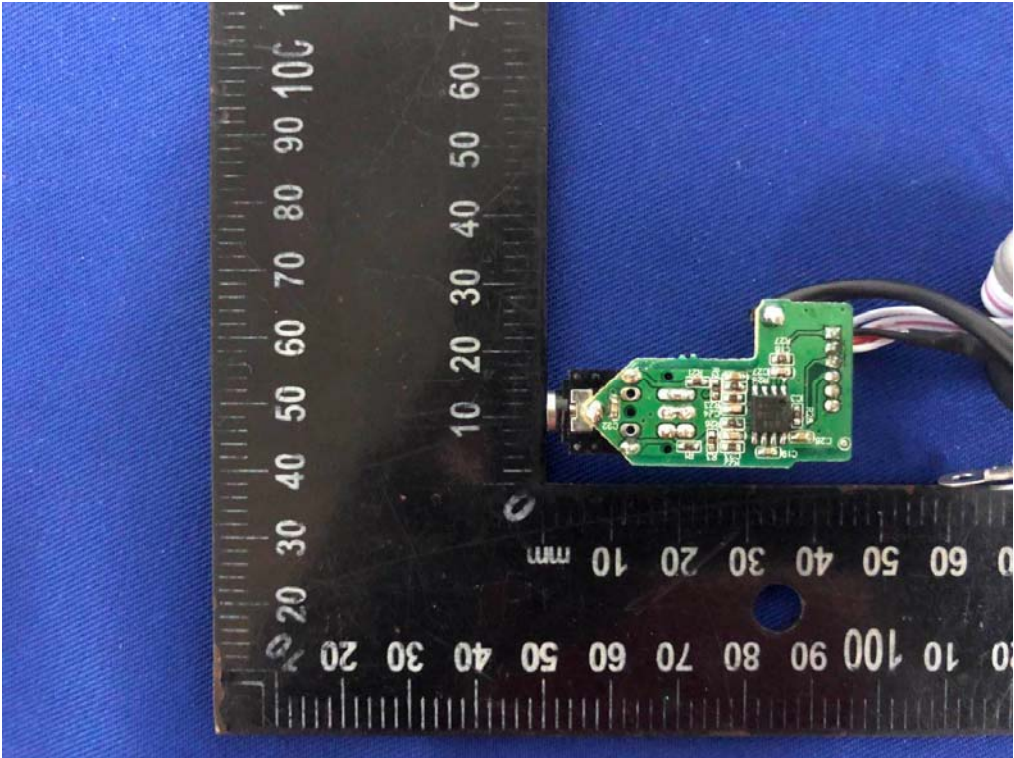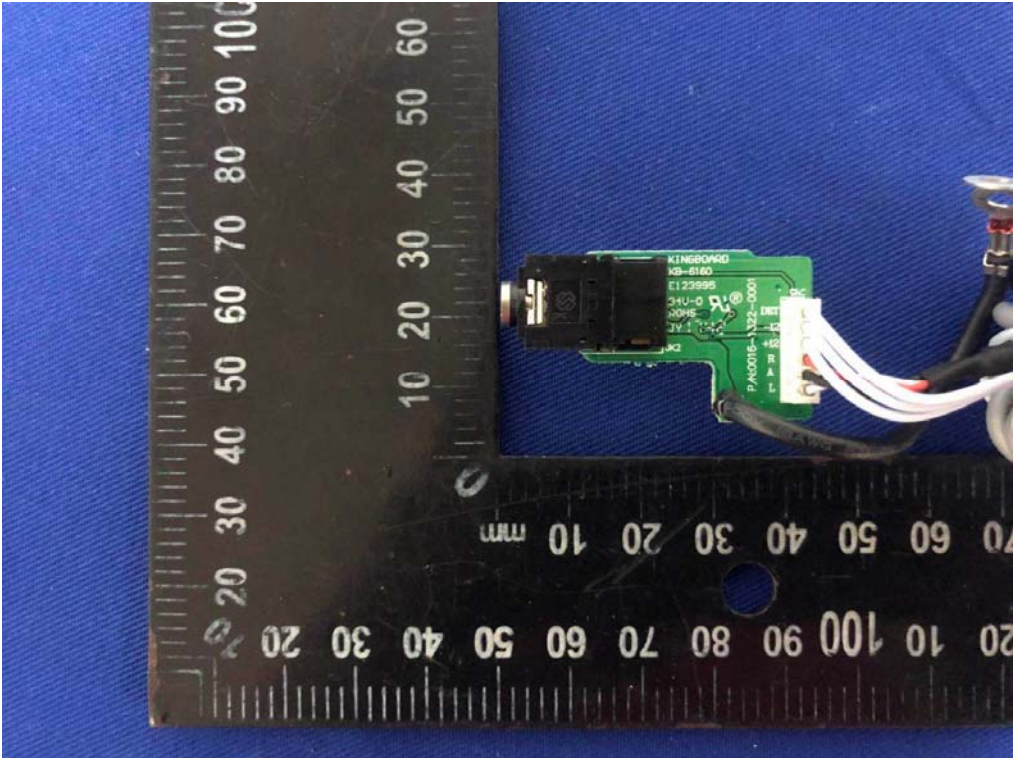

Internal Photos
M/N: DN-700CB

