

Test Report Prepared By:

Electronics Test Centre  
27 East Lake Hill  
Airdrie, Alberta  
Canada  
T4A 2K3

[sales@etc-mpbtech.com](mailto:sales@etc-mpbtech.com)  
<http://www.etc-mpb.com>

Telephone: 1-403-912-0037

ETC Report #: t29e23a302\_DTS Release 2

Report date: October 24, 2023

**EMC testing of the Tektelic Communication Inc. Seal/Seal Ex in accordance with  
FCC Part 15.247 and ANSI C63.10: 2013 as referenced by FCC OET KDB 558074  
D01 15.247 Meas Guidance v05r02.**

**FCC ID: 2ALEPT0007705**

Test Dates: 2023-09-22 to 2023-09-27

Test Personnel: Brendan Van Hee, Janet Mijares, Imran Akram

Prepared for: Tektelic Communication Inc.

7657 10<sup>th</sup> Street NE  
Calgary, Alberta  
Canada  
T2E 8X2

Telephone: 1-403-338-6910



Imran Akram  
[iakram@etc-mpbtech.com](mailto:iakram@etc-mpbtech.com)  
EMC Technologist  
Electronics Test Centre (Airdrie)



Marc Rousseau  
[marc.rousseau@mpbc.ca](mailto:marc.rousseau@mpbc.ca)  
QA Manager  
Electronics Test Centre (Airdrie)

## REVISION RECORD

ISSUE	DATE	AUTHOR	REVISIONS
DRAFT 1	2023-10-02	I. Akram	Initial draft submitted for review.
DRAFT 2	2023-10-16	I. Akram	Added antenna info, Serial# and FCC ID
Release 1	2023-10-17	I. Akram	Sign Off
Release 2	2023-10-24	I. Akram	Added duty cycle statement in section 1.4
			Sign Off

## TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope.....	5
1.2	Applicant .....	5
1.3	Test Sample Description .....	5
1.4	General Test Conditions .....	5
1.5	Reference Standards.....	6
1.6	Test Methodology .....	6
1.6.1	Variations in Test Methodology .....	6
1.6.2	Test Sample Verification, Configuration & Modifications .....	6
1.6.3	Uncertainty of Measurement:.....	6
2.0	TEST CONCLUSION	7
2.1	AC Main Power Line Conducted Emissions: N/A.....	8
2.2	6dB Bandwidth.....	9
2.2.1	Test Guidance: ANSI C63.10-2013, Clause 11.8 / FCC OET KDB 558074 .....	9
2.2.2	Deviations From The Standard:.....	9
2.2.3	Test Equipment .....	9
2.2.4	Test Sample Verification, Configuration & Modifications .....	10
2.2.5	Channel Bandwidth Data: LoRa DTS .....	10
2.2.6	Channel Bandwidth Data: BLE .....	12
2.3	Max Average Output Power .....	14
2.3.1	Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2/ FCC OET KDB 558074 ...	14
2.3.2	Deviations From The Standard:.....	14
2.3.3	Test Equipment .....	15
2.3.4	Test Sample Verification, Configuration & Modifications .....	15
2.3.5	Max Average Output Power Data: LoRa DTS.....	15
2.3.6	Max Average Output Power Data: BLE .....	18
2.4	Band Edge Attenuation .....	20
2.4.1	Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074	20
2.4.2	Deviations From The Standard:.....	20
2.4.3	Test Equipment .....	21
2.4.4	Test Sample Verification, Configuration & Modifications .....	21
2.4.5	Band Edge Data LoRa DTS.....	21
2.4.6	Band Edge Data BLE .....	23
2.5	Power Spectral Density.....	25
2.5.1	Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / FCC OET KDB 558074 .....	25
2.5.2	Deviations From The Standard:.....	26
2.5.3	Test Equipment .....	26
2.5.4	Test Sample Verification, Configuration & Modifications .....	26
2.5.5	Average PSD Data LoRa DTS.....	26
2.5.6	Average PSD Data BLE.....	29

2.6	Conducted Spurious Emissions (Non-Restricted Band) .....	31
2.6.1	Test Guidance: ANSI C63.10-2013, Clause 6.7 .....	31
2.6.2	Deviations From The Standard: .....	31
2.6.3	Test Equipment .....	31
2.6.4	Test Sample Verification, Configuration & Modifications .....	31
2.6.5	Conducted Emissions Data: LoRa DTS .....	32
2.6.6	Conducted Emissions Data: BLE .....	35
2.7	EUT Positioning Assessment .....	38
2.8	Radiated Spurious Emissions within restricted band .....	39
2.8.1	Test Guidance: ANSI C63.10-2013, Clause 13.4.2 .....	40
2.8.2	Deviations From The Standard: .....	40
2.8.3	Test Equipment .....	40
2.8.4	Test Sample Verification, Configuration & Modifications .....	41
2.8.5	Radiated Emissions Data: LoRa DTS .....	42
2.8.6	Radiated Emissions Data: BLE .....	46
2.9	Radiated Emissions (RX Mode) .....	52
2.9.1	Test Guidance: .....	52
2.9.2	Deviations From The Standard: .....	52
2.9.3	Test Equipment .....	52
2.9.4	Test Sample Verification, Configuration & Modifications .....	53
2.9.5	Radiated Emissions Data: .....	54
2.10	RF Exposure .....	57
3.0	TEST FACILITY .....	58
3.1	Location .....	58
3.2	Grounding Plan .....	58
3.3	Power Supply .....	58
	Appendix A – Test Setup Block Diagram .....	59

## 1.0 INTRODUCTION

### 1.1 Scope

The purpose of this report is to present the results of compliance testing performed in accordance with FCC Part 15.247 and ANSI C63.10-2013 to gain FCC new Authorization for Low-Power License-Exempt transmitters. All test procedures, limits, criteria, and results described in this report apply only to the Tektelic Communication Inc. Seal/Seal Ex test sample, referred to herein as the EUT (Equipment Under Test).

This report does not imply product endorsement by the Electronics Test Centre, A2LA, nor any Canadian Government agency.

### 1.2 Applicant

This test report has been prepared for Tektelic Communication Inc., located in Calgary, Alberta, Canada.

### 1.3 Test Sample Description

As provided to ETC (Airdrie) by Tektelic Communication Inc.:

Product Name:	Seal/Seal Ex	
Radio	LoRa	BT
Frequency Band	902 – 928 MHz	2400 – 2483.5 MHz
Frequency Range	903 – 914.2 MHz	2402 – 2480 MHz
Operating Mode	500KHz DTS	BLE
Max Transmit Power (Conducted)	0.023 W (13.57 dBm)	0.000703 W (-1.53 dBm)
Associated Antennas	RUN mXTEND™ Model# NN02-224 operating ISM band (863 – 928 MHz) Peak Gain = 2.2 dBi, Polarization = Linear	Pulse Larsen Antennas, Ceramic SMT linear, Gain: 1.1dBi
Model#	T0008769	
Serial#	2341K0001, 2341K0002, 2338K0003	
Power supply:	Battery Powered	
<b>Note:</b> There are two variant of the EUT named as <u>Seal</u> and <u>Seal Ex</u> . There is no difference in radio circuitry/enclosure between two variant except Seal variant powered by three batteries and Seal Ex powered by two batteries and ATEX certified. The seal variant was chosen as a worst-case condition for emission testing. Both variant tested for emission profile and found no difference in emission. Detail differences between the models are given in <u>EUT description exhibit</u> . All three channels (LOW, MID, High) on each axis (X, Y & Z) are analyzed to determine the worse channel. Full emission scan is performed on worse channel at worse axis.		

### 1.4 General Test Conditions

The EUT was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. All inputs and outputs to and from other equipment associated with the EUT were adequately simulated. In order to meet the operational requirements during testing as per KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10-2013 clause 5.11 the device was programmed with a special firmware to transmit at a continuous transmit mode (100% duty cycle). Special firmware is strictly for testing purpose only and not available to end user. This special test case represents the worst-case duty cycle. For antenna port conducted emission SMA connector is soldered to the circuit board at the output of the radio to provide direct access to the radio output to connect spectrum analyzer and power cable to battery terminals to connect DC power supply. Where relevant, the EUT was only tested using the monitoring methods and test criteria defined in this report.

The environmental conditions are recorded during each test, and are reported in the relevant sections of this document.

## 1.5 Reference Standards

Standards	Description
FCC, title 47 CFR § 15.247	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
FCC, title 47 CFR § 15.207	Conducted limits for an intentional radiator that is designed to be connected to the public utility (AC) power line.
FCC, title 47 CFR § 15.107	Conducted limits for equipment that is designed to be connected to the public utility (AC) power line.
FCC, title 47 CFR § 15.209	Radiated emission limits; general requirements
FCC, title 47 CFR § 15.109	Radiated emission limits; from unintentional radiators digital devices.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio – Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz
558074 D01 15.247 Meas Guidance v05r02	Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules

## 1.6 Test Methodology

Test methods are specified in the Basic Standard as referenced and/or modified by the Product Standard in the part of Section 2 of this report associated with each particular test case. EUT is tested in RX mode to cover FCC part 15 Sub Part B (Digital Circuitry).

### 1.6.1 Variations in Test Methodology

Any variance in methodology or deviation from the reference Standard is documented in the part of Section 2 of this report associated with each particular Test Case.

### 1.6.2 Test Sample Verification, Configuration & Modifications

EUT setup, configuration, protocols for operation and monitoring of EUT functions, and any modifications performed in order to meet the requirements, are detailed in each Test Case of Section 2 of this report.

### 1.6.3 Uncertainty of Measurement:

The factors contributing to measurement uncertainty are identified and calculated in accordance with CISPR 16-4-2: 2011.

This uncertainty estimate represents an expended uncertainty expressed at approximately 95% confidence using a coverage factor of  $k = 2$ .

Test Method	Uncertainty
Radiated Emissions Level (9 KHz – 1 GHz)	±5.8 dB
Radiated Emissions Level (1 GHz – 18 GHz)	±4.9 dB
Radiated Emissions Level (18 GHz – 26.5 GHz)	±5.0 dB
Conducted Emissions Level (150 KHz – 30 MHz)	±3.0 dB
Uncertainty Conducted Power level	±0.5 dB
Uncertainty Conducted Spurious emission level	±0.6 dB
Uncertainty for Bandwidth test	±1.5 %

## 2.0 TEST CONCLUSION

### STATEMENT OF COMPLIANCE

The customer equipment referred to in this report was found to comply with the requirements, as summarized below.

The EUT was subjected to the following tests. Compliance status is reported as **Compliant** or **Non-compliant**. **N/A** indicates the test was Not Applicable to the EUT.

The measurement uncertainty is not accounted for determination of the statement of compliance. The statement of compliance is based only on the measurement value recorded.

**Note:** Maintenance of compliance is the responsibility of the Manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the EUT with respect to the standards detailed in this test report.

The following table summarizes the tests performed in terms of the specification, class or performance criterion applied, and the EUT modification state.

Test Case	Test Type	Specification	Test Sample	Modifications	Config.	Result
2.1	AC Main Conducted Emissions	15.207 / 15.109	Seal/Seal Ex	none	see § 2.1	N/A
2.2	6dB Bandwidth	15.247(a)	Seal/Seal Ex	none	see § 2.2	Compliant
2.3	Max Output Power	15.247(d)	Seal/Seal Ex	none	see § 2.3	Compliant
2.4	Band Edge	15.247(d)	Seal/Seal Ex	none	see § 2.4	Compliant
2.5	Power Spectral Density	15.247(e)	Seal/Seal Ex	none	see § 2.5	Compliant
2.6	Conducted Spurious Emissions (Non-Restricted Band)	15.247(d)	Seal/Seal Ex	none	see § 2.6	Compliant
2.7	EUT Position	ANSI C63.4	Seal/Seal Ex	none	see § 2.7	Y-Axis
2.8	Radiated Spurious Emission (Restricted Band)	15.205, 15.209 15.247(d)	Seal/Seal Ex	none	see § 2.8	Compliant
2.9	Radiated Emission	15.109	Seal/Seal Ex	none	see § 2.9	Compliant
2.10	RF Exposure	15.247(i)	Seal/Seal Ex	none	see § 2.10	Exempt

Refer to the test data for applicable test conditions.

## 2.1 AC Main Power Line Conducted Emissions: N/A

Test Lab: Electronics Test Centre, Airdrie	EUT: Seal/Seal Ex Standard: FCC Part 15.207, FCC Part 15.107 Basic Standard: ANSI C63.10: 2013 Basic Standard: ANSI C63.4: 2014
EUT status: N/A	
Comments: EUT is Battery Powered. No Direct/indirect connection to AC main.	



## 2.2 6dB Bandwidth

Test Lab: Electronics Test Centre, Airdrie	EUT: Seal/Seal Ex
Test Personnel: Brendan Van Hee	Standard: FCC PART 15.247
Date: : 2023-09-22 (21.7°C, 22.8% RH)	Basic Standard: ANSI C63.10-2013 FCC OET KDB 558074
EUT status: Compliant	

**Specification: FCC Part 15.247 (a, 2), FCC 15.215 (c)**

**Criteria:** Systems using digital modulation techniques may operate in the 902-928 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.2.1 Test Guidance: ANSI C63.10-2013, Clause 11.8 / FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

For DTS the spectrum analyzer is set for a frequency span  $\geq (2 * \text{OBW})$ ,  $\leq (5 * \text{OBW})$ , selected to clearly display the channel. The RBW is set to 100 kHz. The VBW is set to  $\geq (3 * \text{RBW})$ . The Peak detector is used, with the trace set to Max Hold.

The automated 99% BW function of the spectrum analyzer is engaged, and the 6 dB OBW and/or 20 dB OBW is measured with the x dB function.

### 2.2.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.2.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.22.08)	6906	2022-12-20	2023-12-20
Temp/Humidity	Extech	42270	5871	2023-04-14	2024-04-14
Attenuator	PCB	BWS102W263	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	Huber+Suhner	Enviroflex 400	-	Cal. before each use	
DC Blocker	Centric RF	C0927 SMA	6987	Cal. before each use	


## 2.2.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

## Test setup diagrams for Occupied Bandwidth testing:


Conducted:



## 2.2.5 Channel Bandwidth Data: LoRa DTS

Mode of operation	Channel	Freq. [MHz]	6 dB BW [kHz]	Limit BW [KHz]
LoRa 500 KHz	Low	903.0	644.3	≥ 500
	Mid	907.8	643.9	
	High	914.2	643.3	

## Screen Captures from the spectrum analyzer: Low Channel

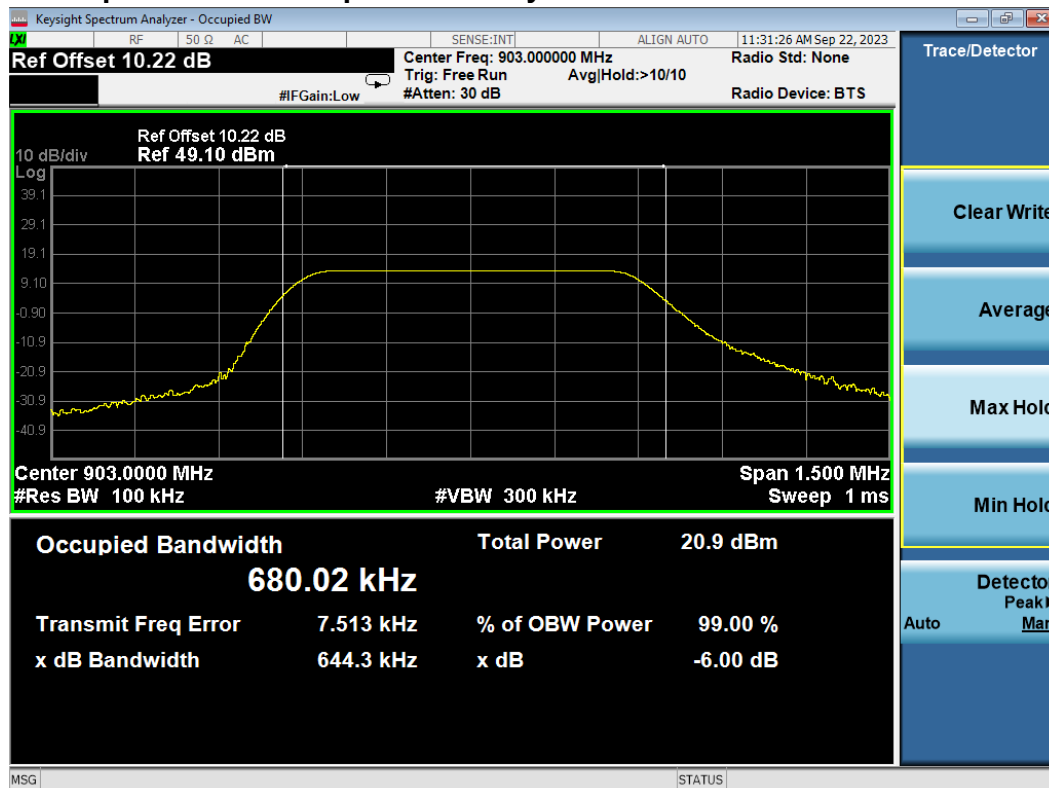

## Screen Captures from the spectrum analyzer: MID Channel



## Screen Captures from the spectrum analyzer: High Channel



## 2.2.6 Channel Bandwidth Data: BLE

Mode of operation	Channel	Freq. [MHz]	6 dB BW [MHz]	Limit BW [KHz]
BLE	Low	2402	669.6	≥ 500
	Mid	2440	667.5	
	High	2480	670.1	

## Screen Captures from the spectrum analyzer: Low Channel



## Screen Captures from the spectrum analyzer: MID Channel



## Screen Captures from the spectrum analyzer: High Channel



## 2.3 Max Average Output Power

Test Lab: Electronics Test Centre, Airdrie	EUT: Seal/Seal Ex
Test Personnel: Brendan Van Hee	Standard: FCC PART 15.247
Date: 2023-09-22 (21.7°C, 22.8% RH)	Basic Standard: ANSI C63.10: 2013 FCC OET KDB 558074
EUT status: Compliant	

Specification: FCC Part 15.247(b, 3)

Criteria (3) For systems using digital modulation in the 902-928 MHz bands: 1 Watt.

### 2.3.1 Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2/ FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Output Power Method AVGSA-1 For LoRa DTS	
Span	$\geq 1.5$ times the OBW
RBW	1 – 5 % of the OBW, $\leq 1$ MHz
VBW	$\geq 3 \times$ RBW
Number of Points in sweep	$\geq 2 \times$ Span / RBW
Sweep time	Auto
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle $\geq 98\%$ )
Trace Average	100 traces in power Averaging (RMS)
Power measured	Integrated the spectrum across the OBW of the signal using the S/A band power measurement function, with band limit set equal to the OBW band edge.

### 2.3.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.3.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.22.08)	6906	2022-12-20	2023-12-20
Temp/Humidity	Extech	42270	5871	2023-04-14	2024-04-14
Attenuator	PCB	BWS102W263	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	Huber+Suhner	Enviroflex 400	-	Cal. before each use	
DC Blocker	Centric RF	C0927 SMA	6987	Cal. before each use	


### 2.3.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

Test setup diagrams for Power testing:


Conducted:




### 2.3.5 Max Average Output Power Data: LoRa DTS

Mode of operation	Channel	Freq. [MHz]	Max Average Power [dBm]	Limit Power [dBm]
LoRa 500 KHz	Low	903.0	12.71	≤ 30 (1Watt)
	Mid	909.95	12.38	
	High	914.2	13.57	

## Screen Captures from the spectrum analyzer Low Channel

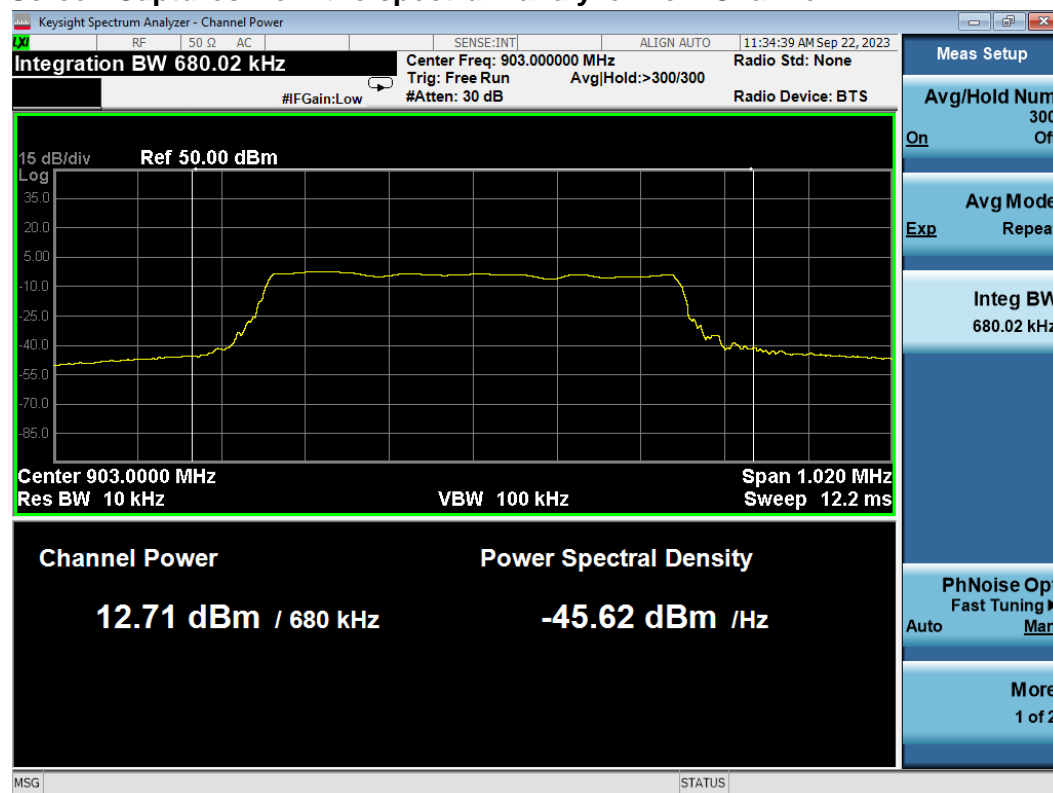


## Screen Captures from the spectrum analyzer: MID Channel

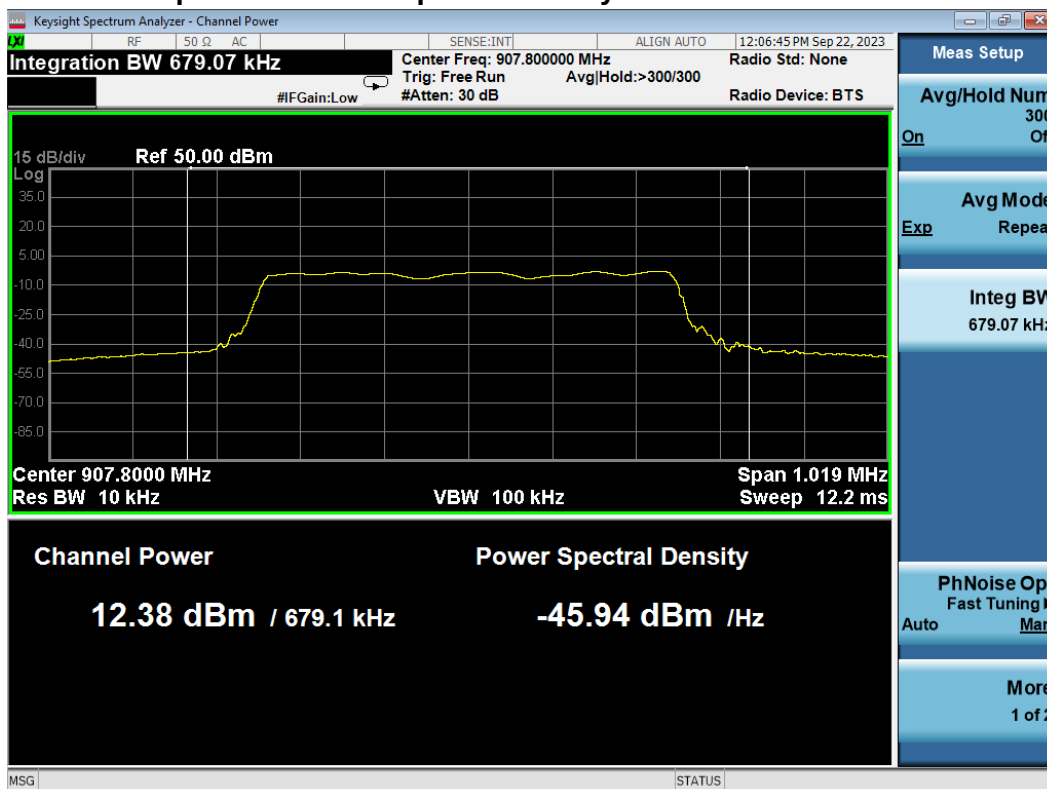




## Screen Captures from the spectrum analyzer: High Channel

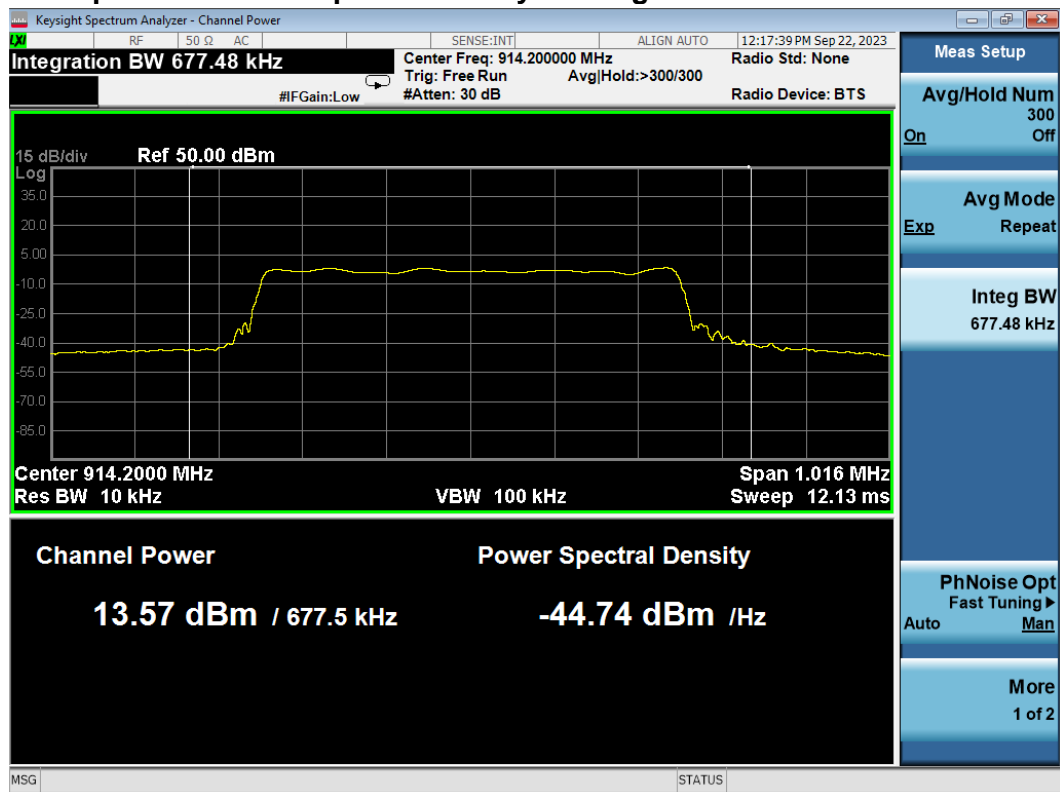


### 2.3.6 Max Average Output Power Data: BLE

Mode of operation	Channel	Freq. [MHz]	Max Average Power [dBm]	Limit Power [dBm]
BLE	Low	2402	-1.66	≤ 30 (1Watt)
	Mid	2440	-1.53	
	High	2480	-1.57	


### Screen Captures from the spectrum analyzer Low Channel

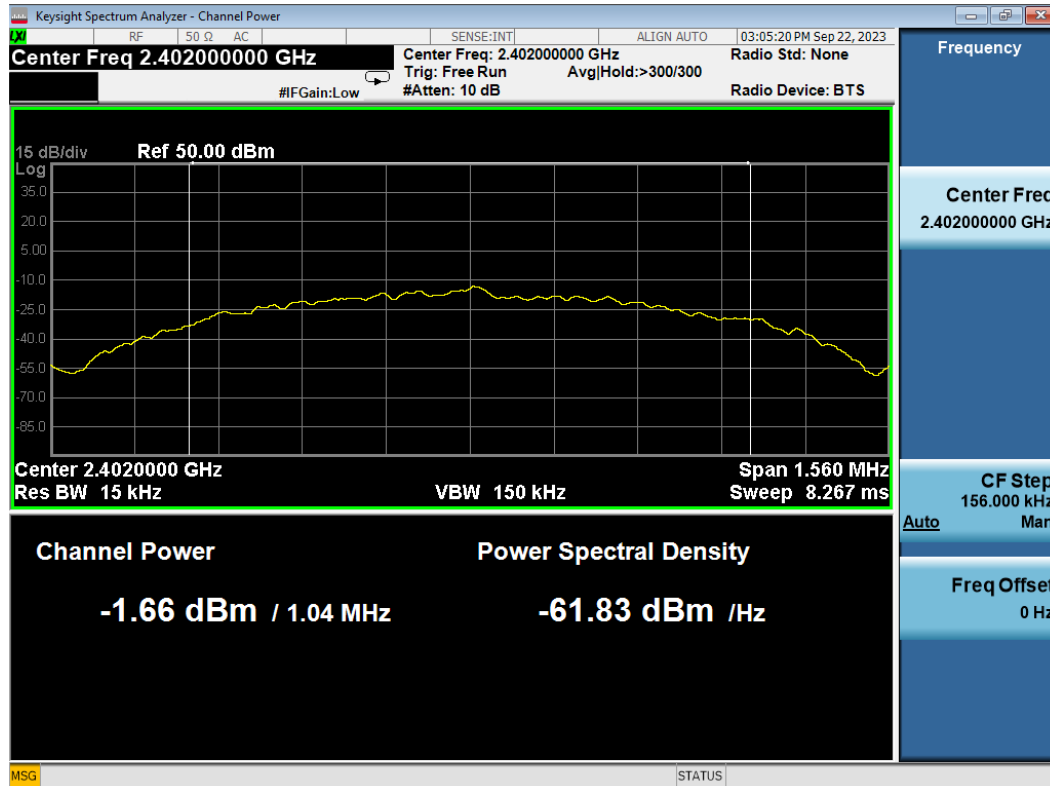

### Screen Captures from the spectrum analyzer: MID Channel

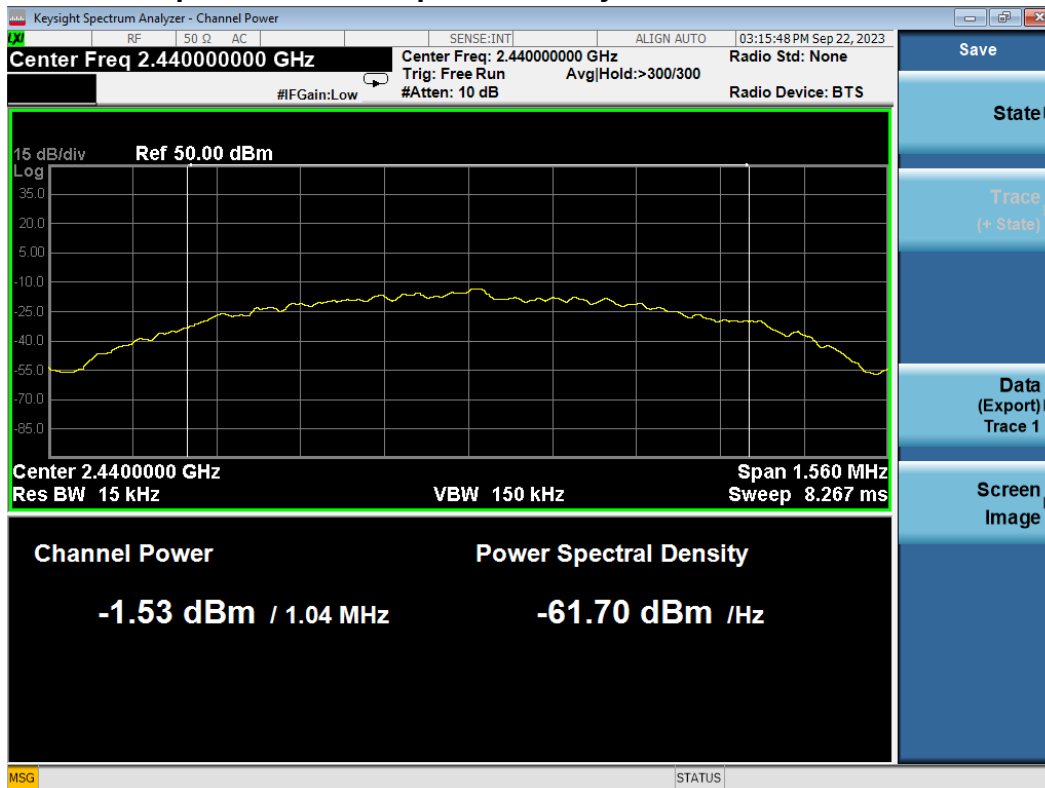

### Screen Captures from the spectrum analyzer: High Channel

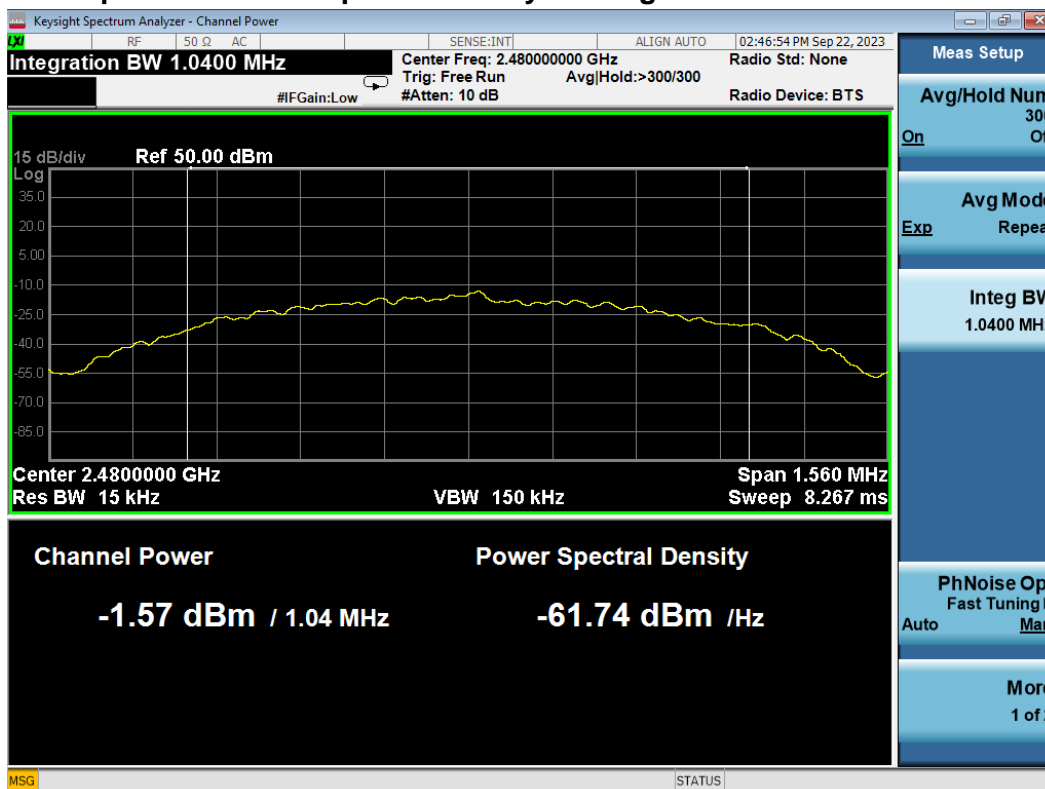

## 2.4 Band Edge Attenuation

Test Lab: Electronics Test Centre, Airdrie

EUT: Seal/Seal Ex

Test Personnel: Brendan Van Hee

Standard: FCC PART 15.247

Date: 2023-09-22 (21.7°C, 22.8% RH)

Basic Standard: ANSI C63.10: 2013  
FCC OET KDB 558074

**EUT status: Compliant**

### Specification: FCC Part 15.247(d)

**Criteria:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 2.4.1 Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074

This measurement is performed at the low and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

The spectrum analyzer is set for a frequency span to show the band edge and the nearest channel. The RBW is set to  $\geq 100$  kHz. The VBW is set to  $\geq (\text{RBW} * 3)$ . The Peak detector is used, with the trace set to Max Hold.

The attenuation is measured with the Marker Delta function.

### 2.4.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.4.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.22.08)	6906	2022-12-20	2023-12-20
Temp/Humidity	Extech	42270	5871	2023-04-14	2024-04-14
Attenuator	PCB	BWS102W263	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	Huber+Suhner	Enviroflex 400	-	Cal. before each use	
DC Blocker	Centric RF	C0927 SMA	6987	Cal. before each use	


### 2.4.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

Test setup diagrams for Band Edge Attenuation testing:

Conducted:




### 2.4.5 Band Edge Data LoRa DTS


Worse Case Data

Mode of operation	Channel	Attenuation at Band Edge	Attenuation Limit at Band Edge
Lora 500KHz	903.0	50.280 dBc	≥30 dBc
	914.2	66.724 dBc	

## Screen Capture from the spectrum analyzer: Lower Band Edge

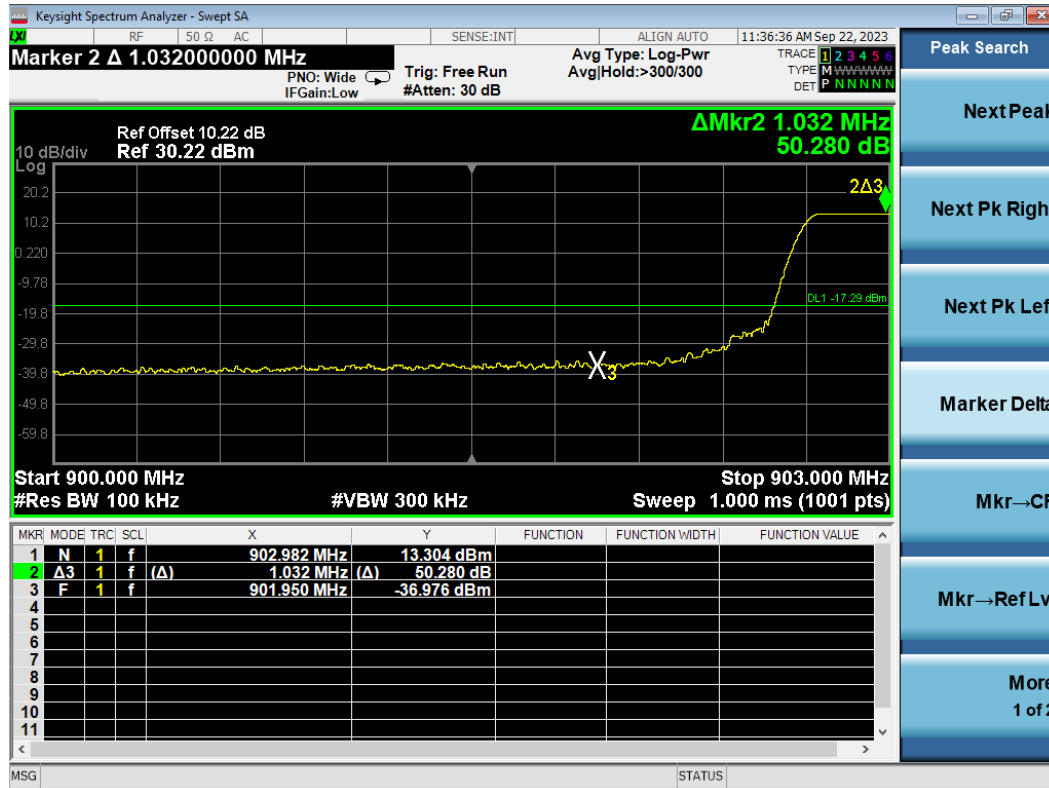

## Screen Capture from the spectrum analyzer: Upper Band Edge

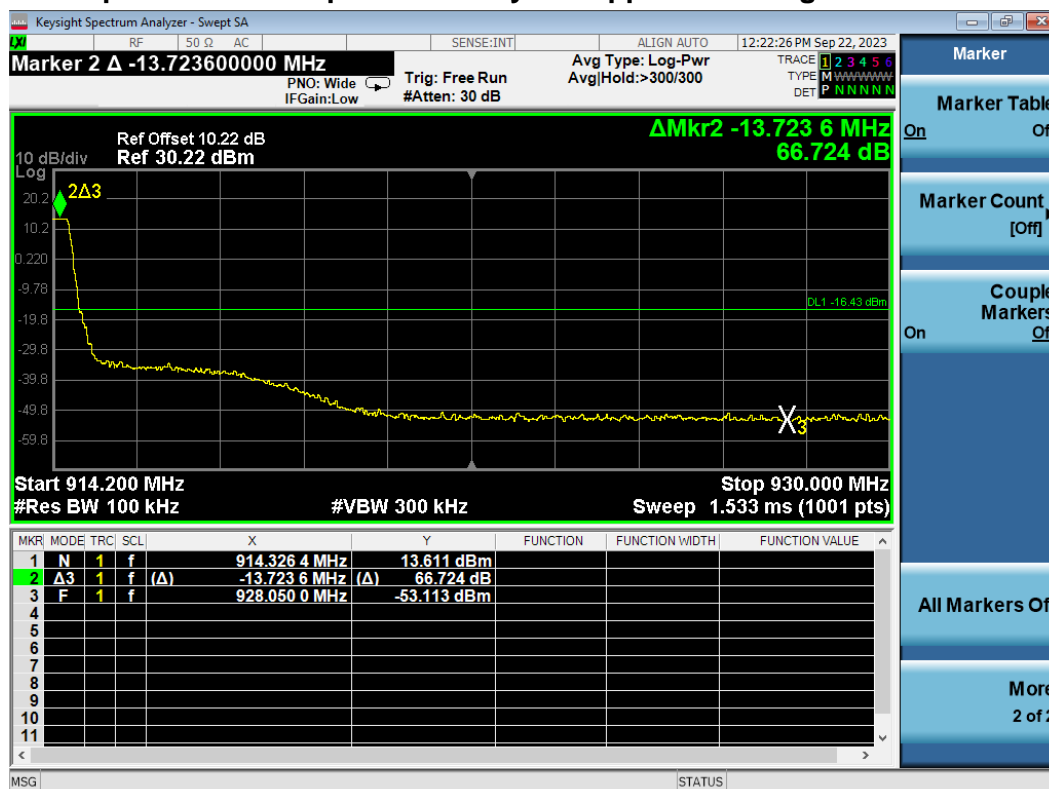

**2.4.6 Band Edge Data BLE**  
**Worse Case Data**

Mode of operation	Channel	Attenuation at Band Edge	Attenuation Limit at Band Edge
BLE	2402	54.001 dBc	$\geq 30$ dBc
	2480	59.013 dBc	

## Screen Capture from the spectrum analyzer: Lower Band Edge



## Screen Capture from the spectrum analyzer: Upper Band Edge





## 2.5 Power Spectral Density

Test Lab: Electronics Test Centre, Airdrie

EUT: Seal/Seal Ex

Test Personnel: Brendan Van Hee

Standard: FCC PART 15.247

Date: 2023-09-22 (21.7°C, 22.8% RH)

Basic Standard: ANSI C63.10: 2013

**EUT status: Compliant**

### Specification: FCC Part 15.247(e)

**Criteria** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 2.5.1 Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, in continuous transmission, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Method AVGPSD-1 For DTS	
Span	$\geq 1.5$ times the OBW
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
VBW	$\geq 3 \times \text{RBW}$
Number of Points in sweep	$\geq 2 \times \text{Span} / \text{RBW}$
Sweep time	auto couple
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle $\geq 98\%$ )
Trace Average	Minimum 100 traces in power Averaging (RMS)
PSD measured	Use the peak marker function to determine the maximum amplitude level.
If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).	

### 2.5.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.5.3 Test Equipment

Testing was performed with this equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.22.08)	6906	2022-12-20	2023-12-20
Temp/Humidity	Extech	42270	5871	2023-04-14	2024-04-14
Attenuator	PCB	BWS102W263	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	Huber+Suhner	Enviroflex 400	-	Cal. before each use	
DC Blocker	Centric RF	C0927 SMA	6987	Cal. before each use	


### 2.5.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

**Test setup diagrams for Power Spectral Density testing:**


**Conducted:**




### 2.5.5 Average PSD Data LoRa DTS

Mode	Channel	Frequency (MHz)	Average PSD (dBm)	Limit
LoRa 500 KHz	Low	903.0	-6.357	≤ 8 / 3KHz
	Mid	907.8	-6.840	
	High	914.2	-6.905	


### Screen Capture from Spectrum Analyzer: Low Channel

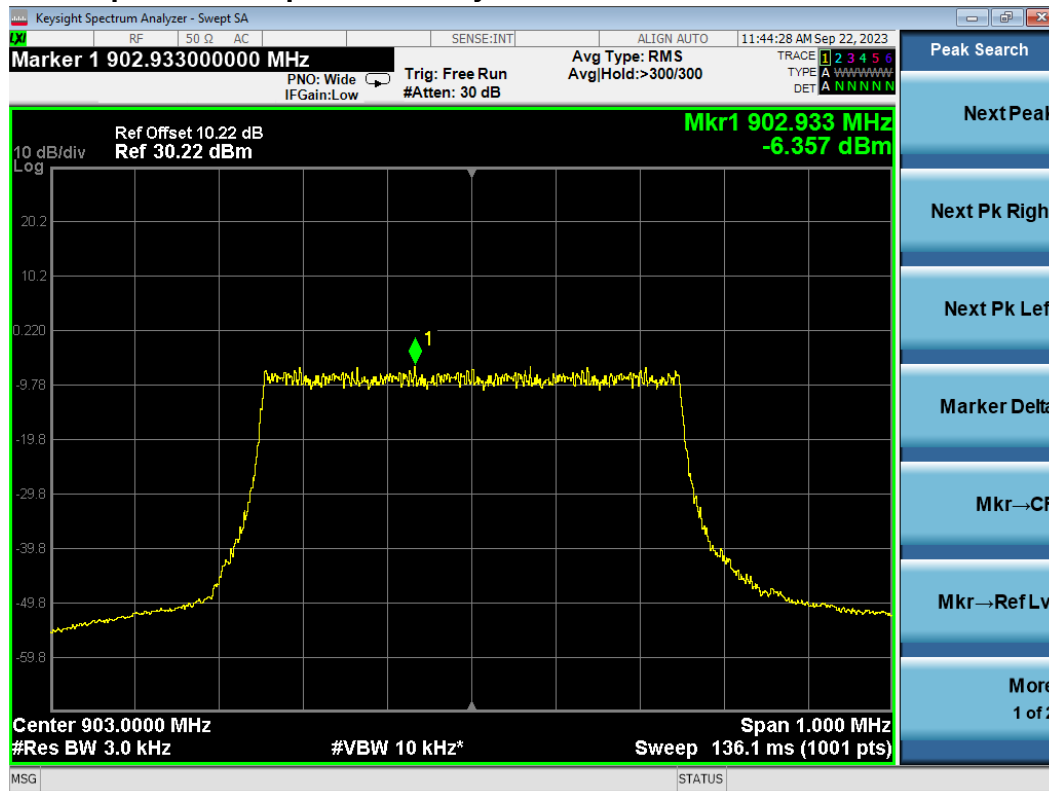

### Screen Capture from Spectrum Analyzer: MID Channel

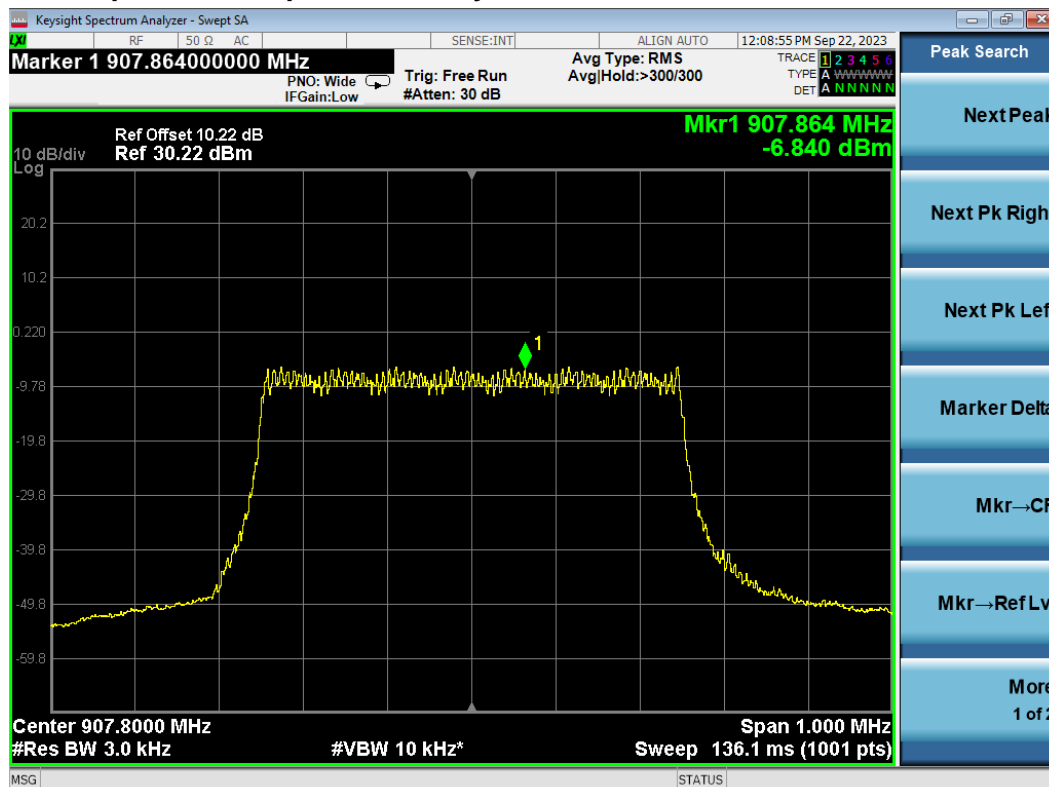


## Screen Capture from Spectrum Analyzer: High Channel

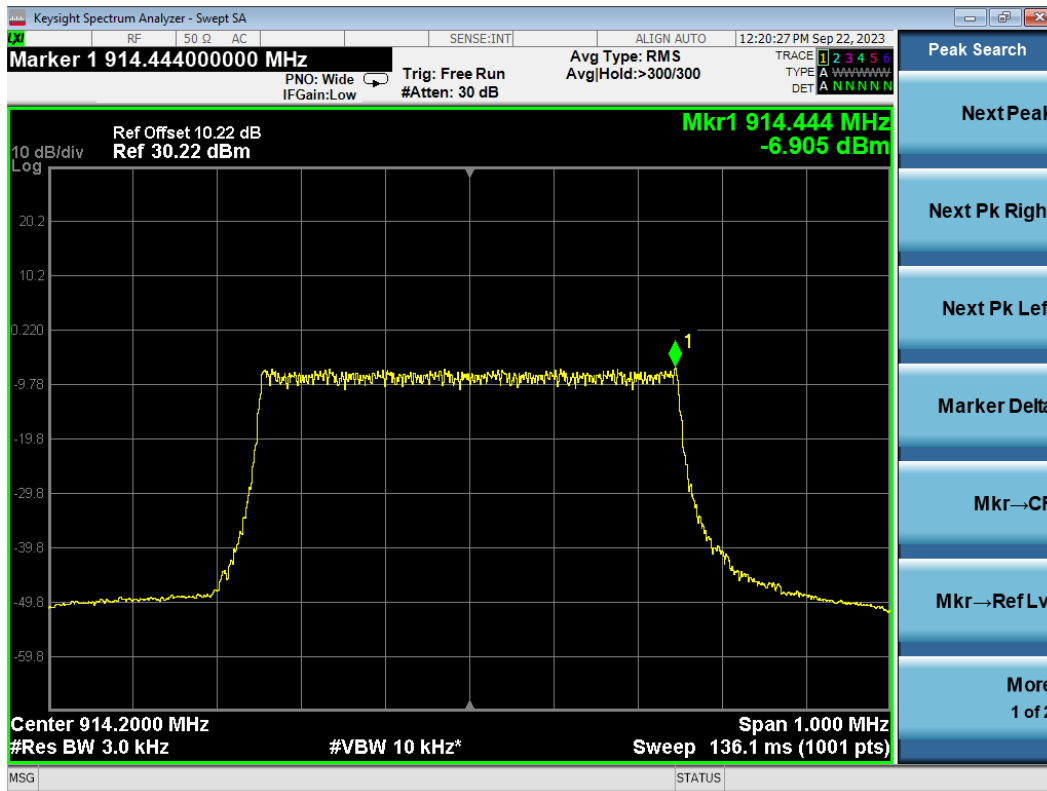

## 2.5.6 Average PSD Data BLE

Mode	Channel	Frequency (MHz)	Average PSD (dBm)	Limit
BLE	Low	2402	-18.838	$\leq 8 / 3\text{KHz}$
	Mid	2440	-19.050	
	High	2480	-19.076	


## Screen Capture from Spectrum Analyzer: Low Channel

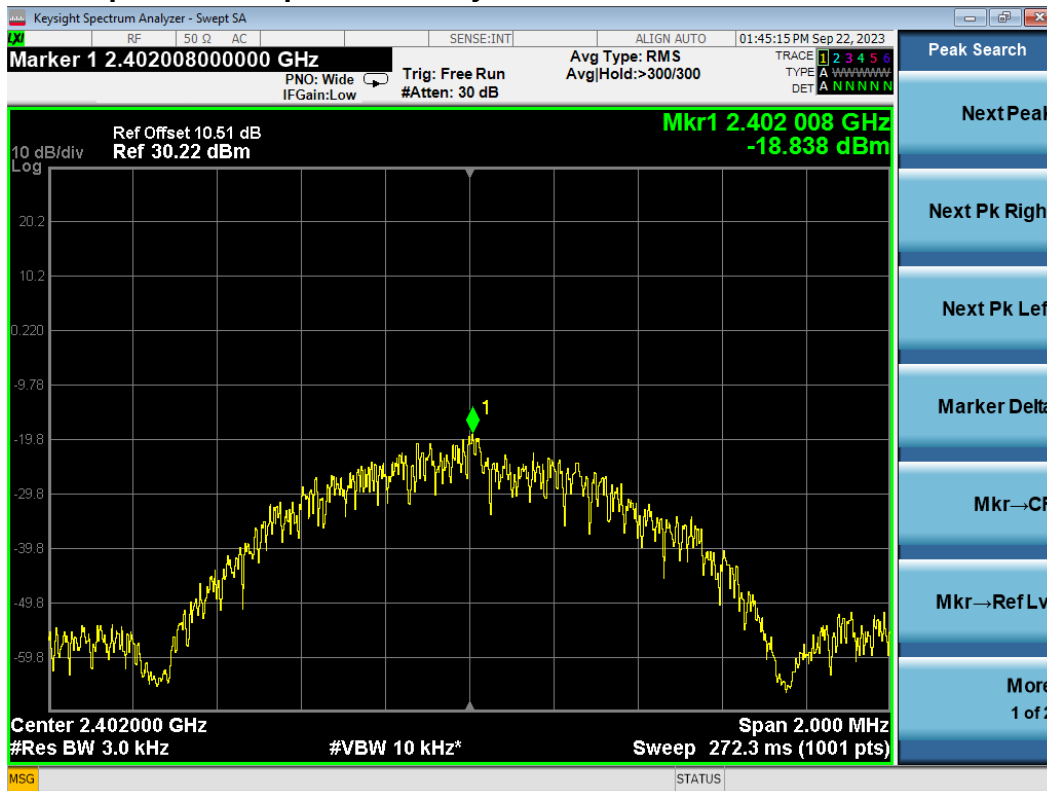

## Screen Capture from Spectrum Analyzer: MID Channel



## Screen Capture from Spectrum Analyzer: High Channel

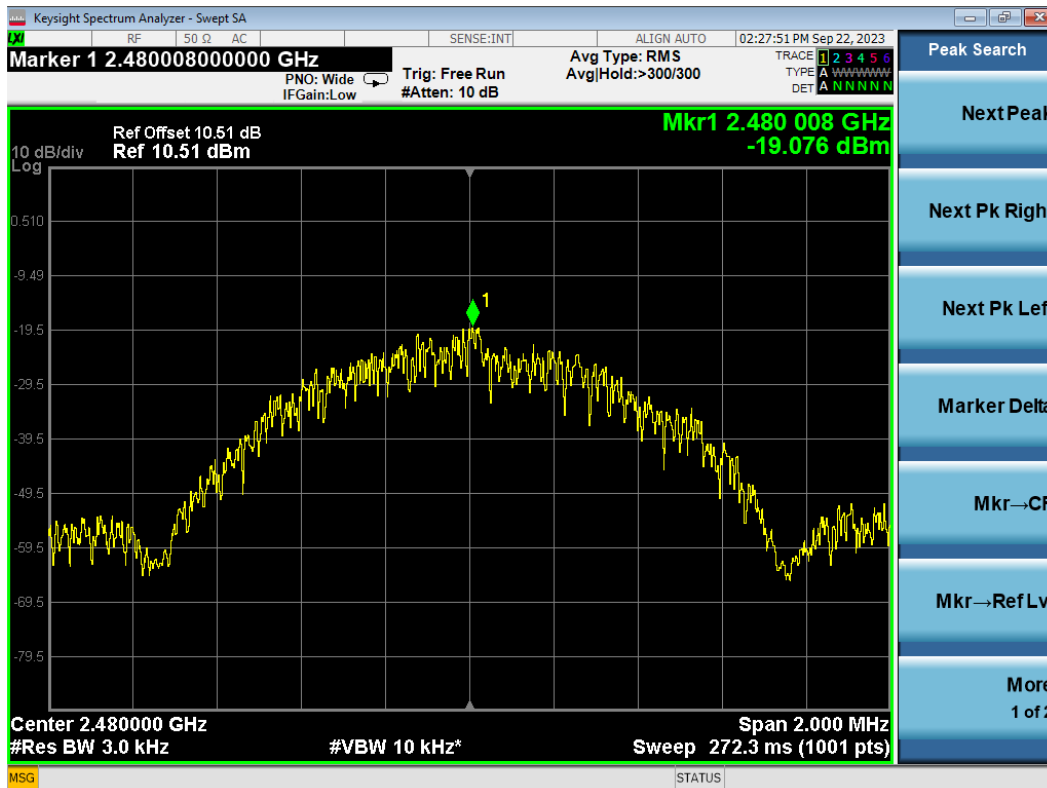

## 2.6 Conducted Spurious Emissions (Non-Restricted Band)

Test Lab: Electronics Test Centre, Airdrie	EUT: Seal/Seal Ex
Test Personnel: Brendan Van Hee	Standard: FCC PART 15.247
Date: 2023-09-22 (21.7°C, 22.8% RH)	Basic Standard: ANSI C63.4-2014 FCC OET KDB 558470 v04 DTS

**EUT status: Compliant**

### Specification: FCC Part 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 2.6.1 Test Guidance: ANSI C63.10-2013, Clause 6.7

This measurement is performed at the low, mid and high frequencies, with modulation. The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

The spectrum analyzer is stepped through the spectrum in frequency spans selected to ensure acceptable frequency resolution. The RBW is set to 100 kHz. The VBW is set to  $\geq 300$  kHz. The Peak detector is used, with the trace set to Max Hold.

#### 2.6.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

#### 2.6.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.22.08)	6906	2022-12-20	2023-12-20
Temp/Humidity	Extech	42270	5871	2023-04-14	2024-04-14
Attenuator	PCB	BWS102W/263	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	Huber+Suhner	Enviroflex 400	-	Cal. before each use	
DC Blocker	Centric RF	C0927 SMA	6987	Cal. before each use	

#### 2.6.4 Test Sample Verification, Configuration & Modifications





The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

#### Test setup diagram for Conducted Spurious Emissions testing:







## 2.6.5 Conducted Emissions Data: LoRa DTS Low Channel

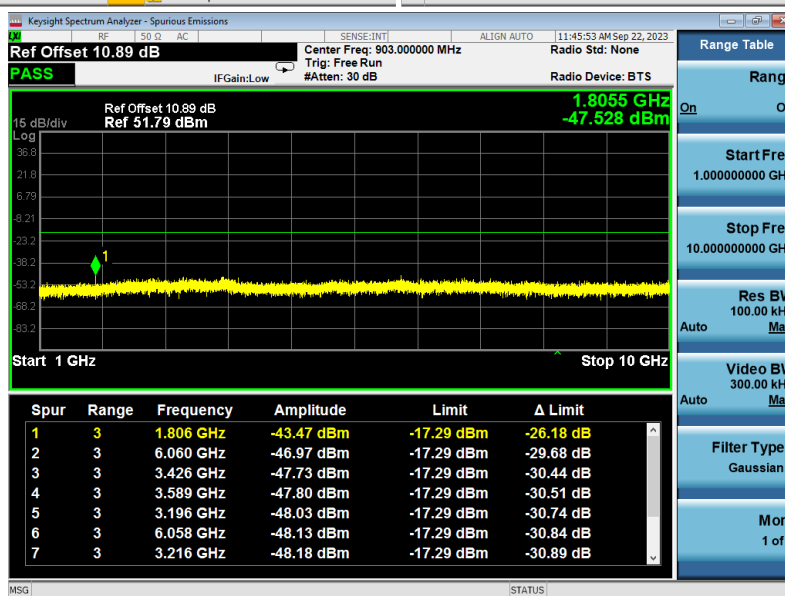
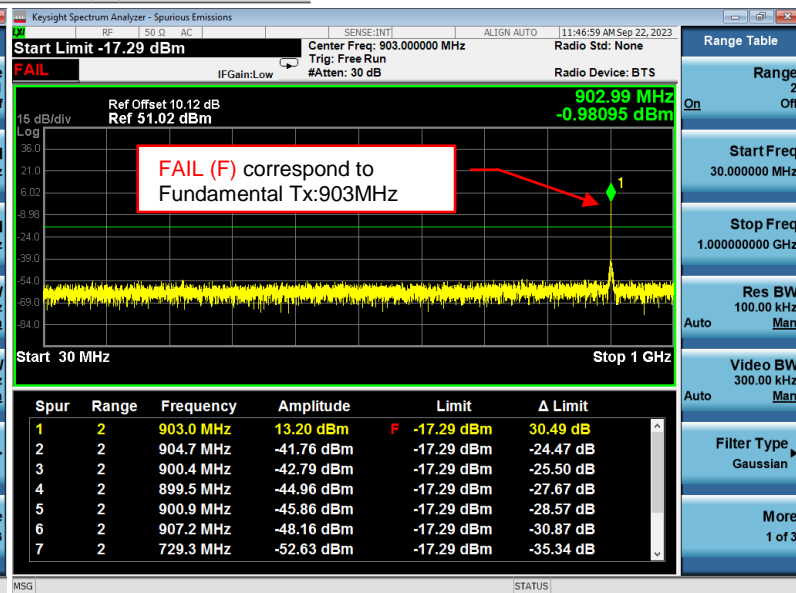
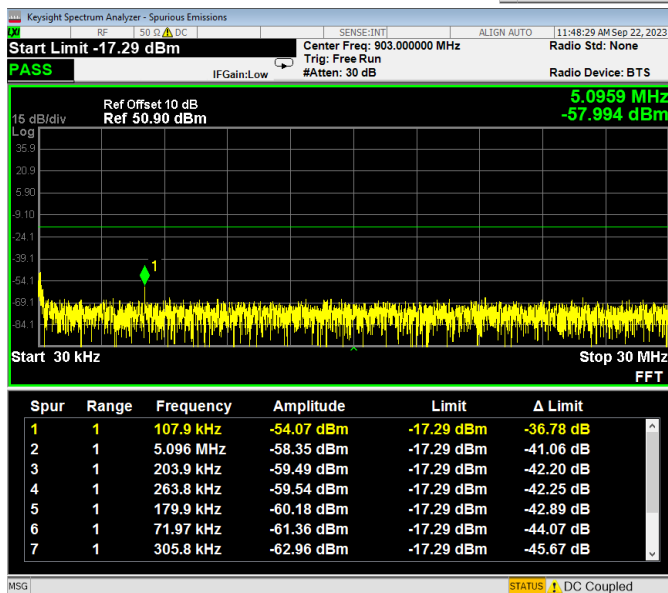
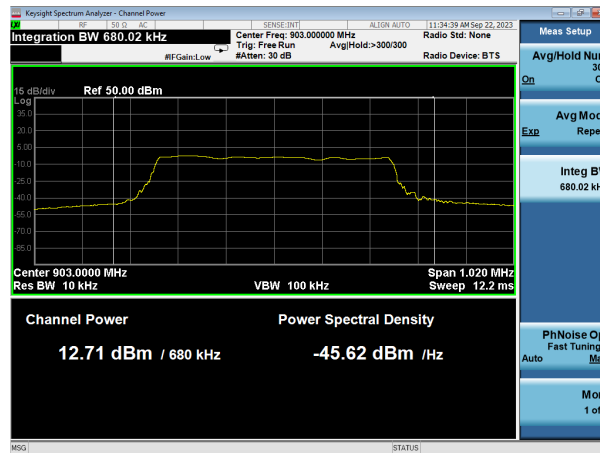




## MID Channel

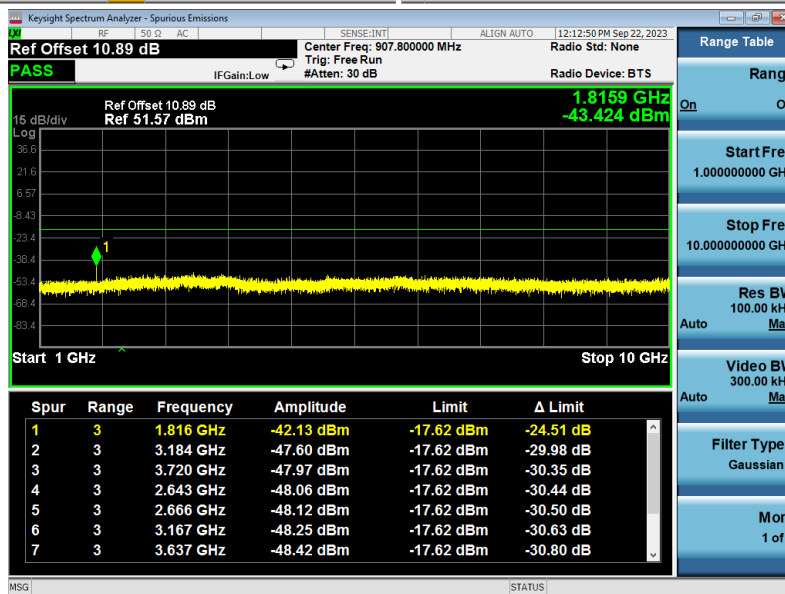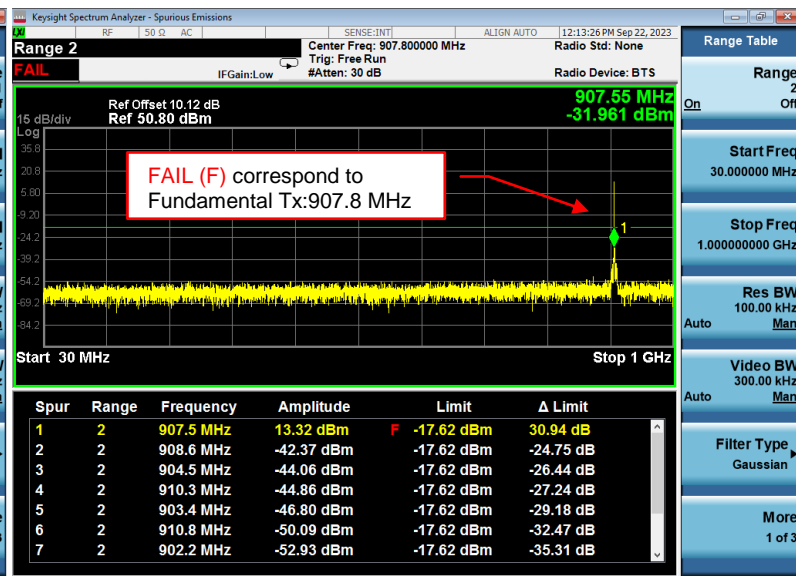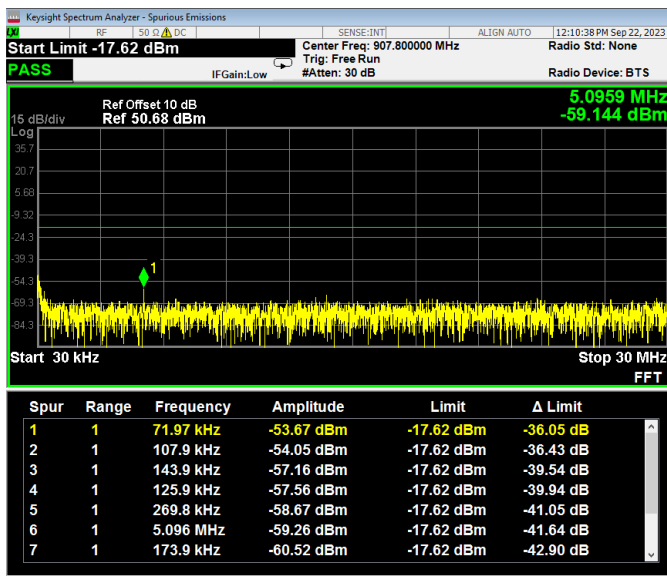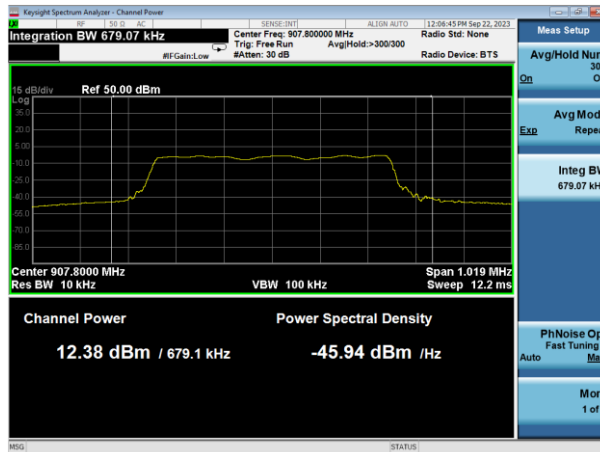


## High Channel

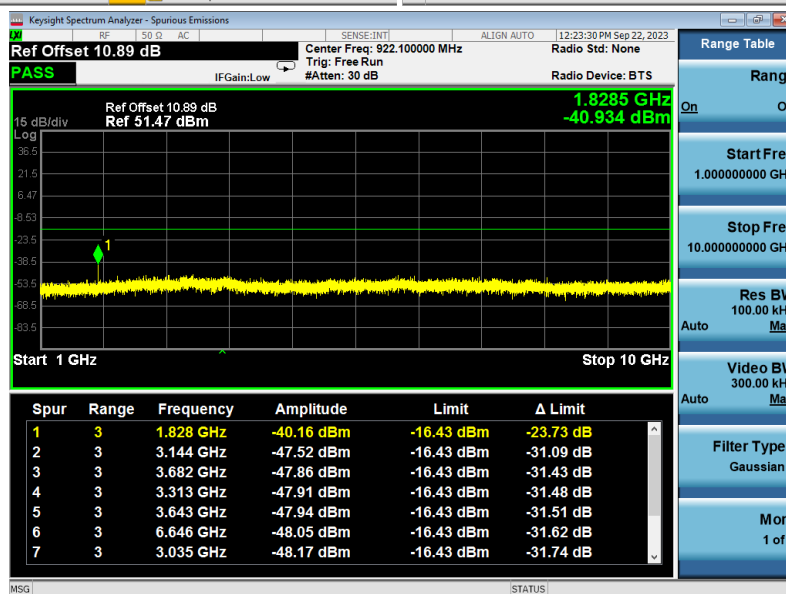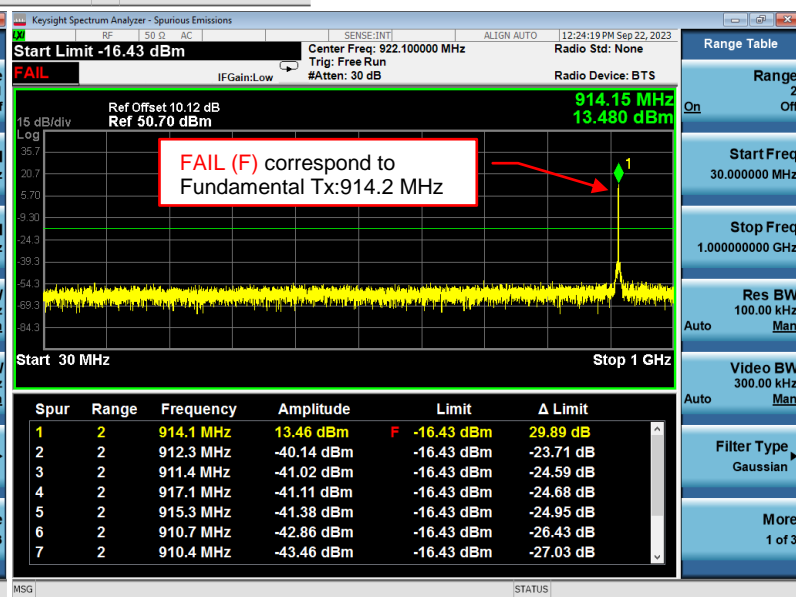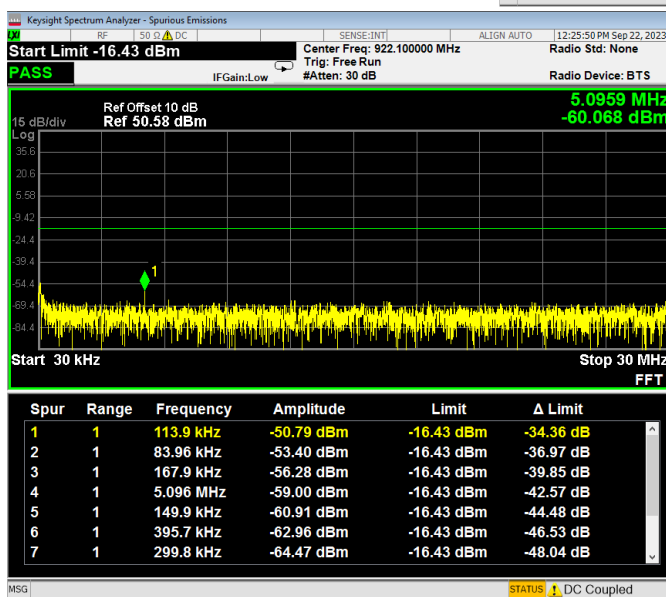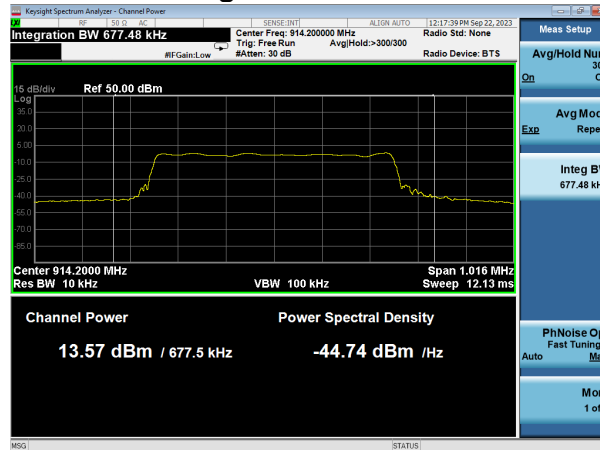


## 2.6.6 Conducted Emissions Data: BLE


### Low Channel

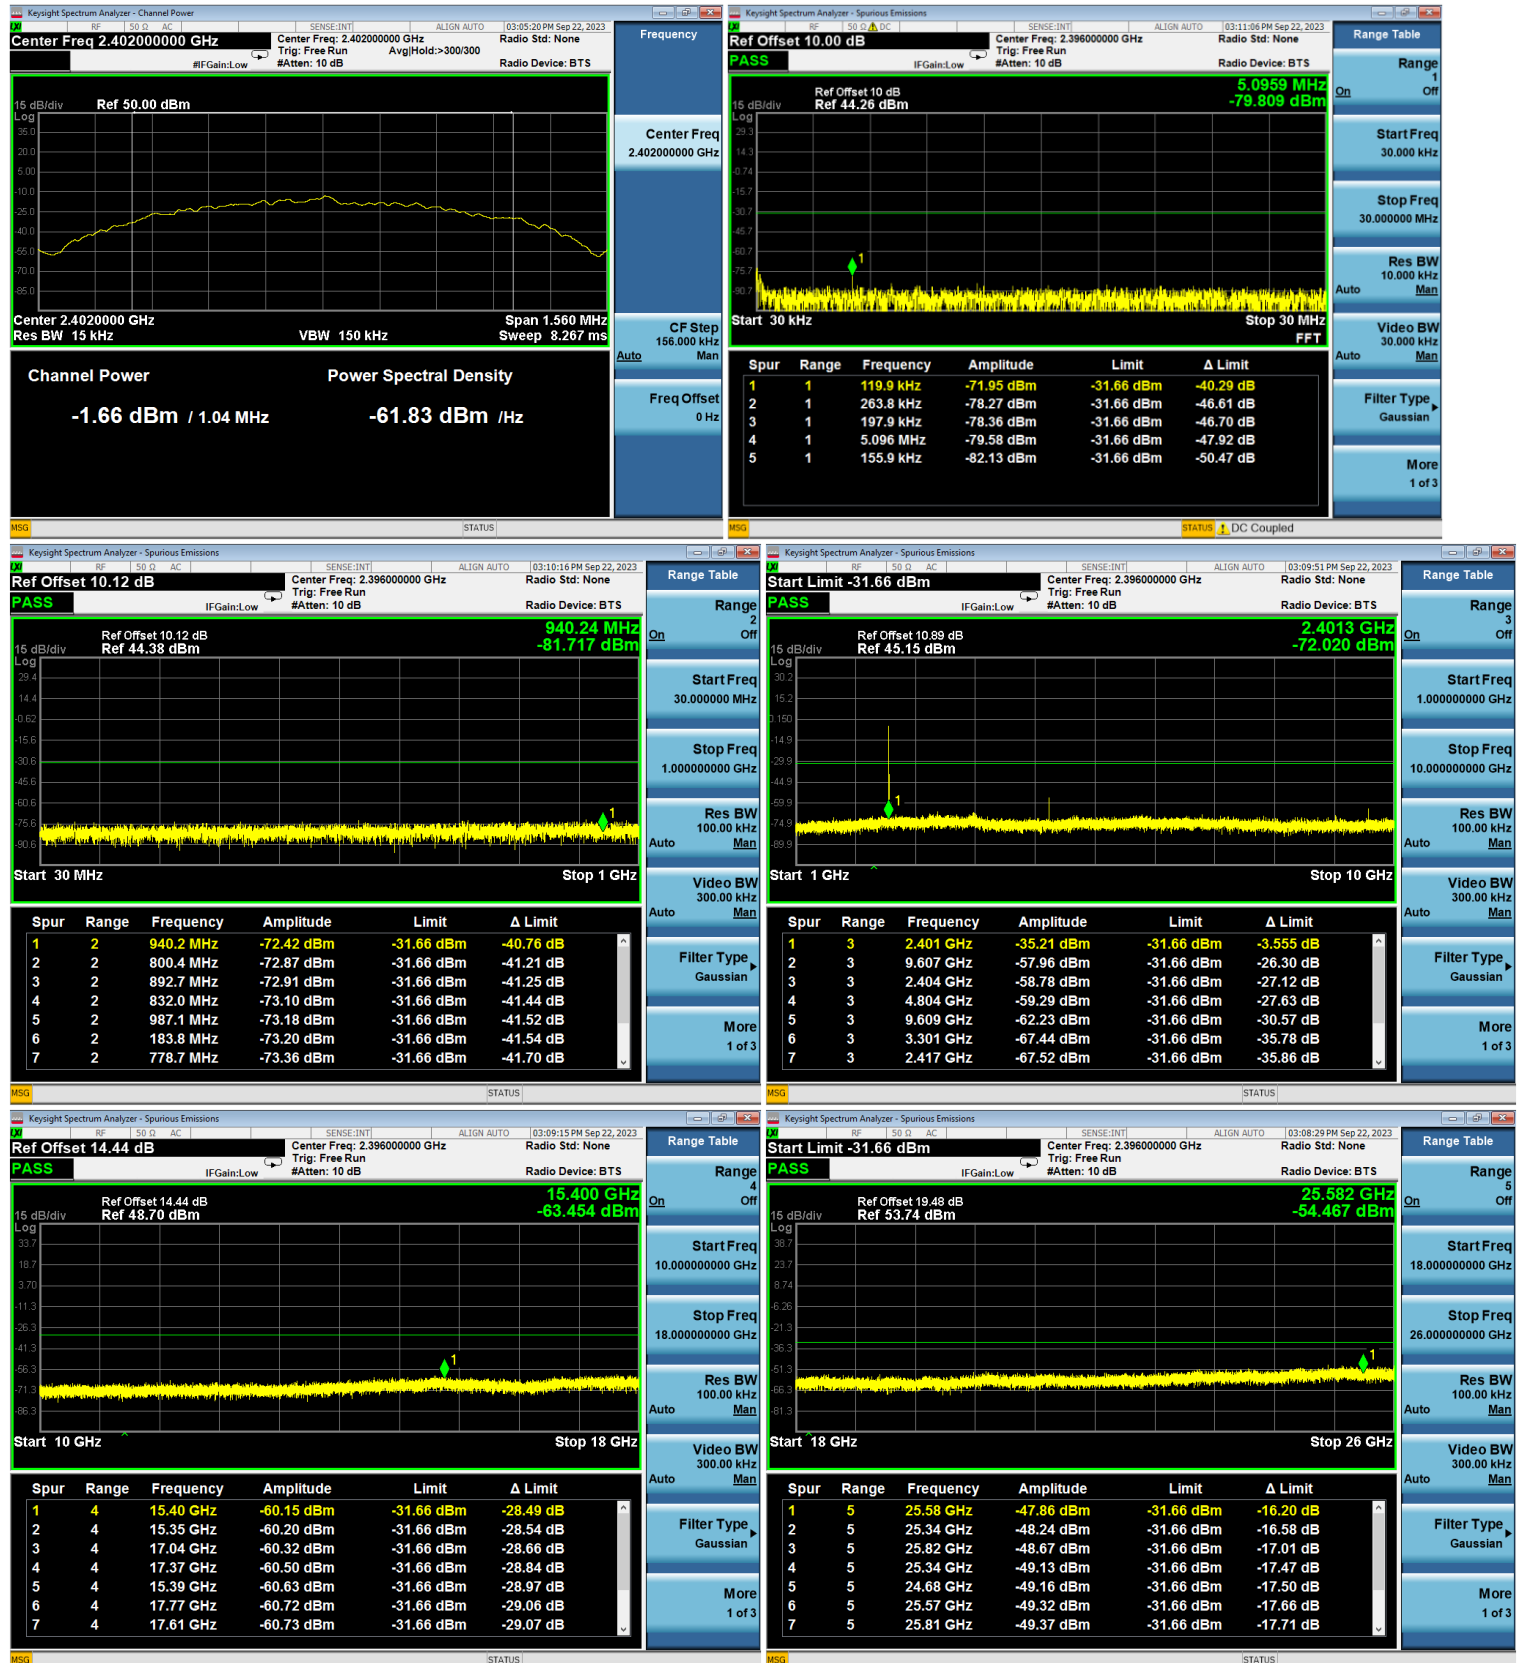

## MID Channel

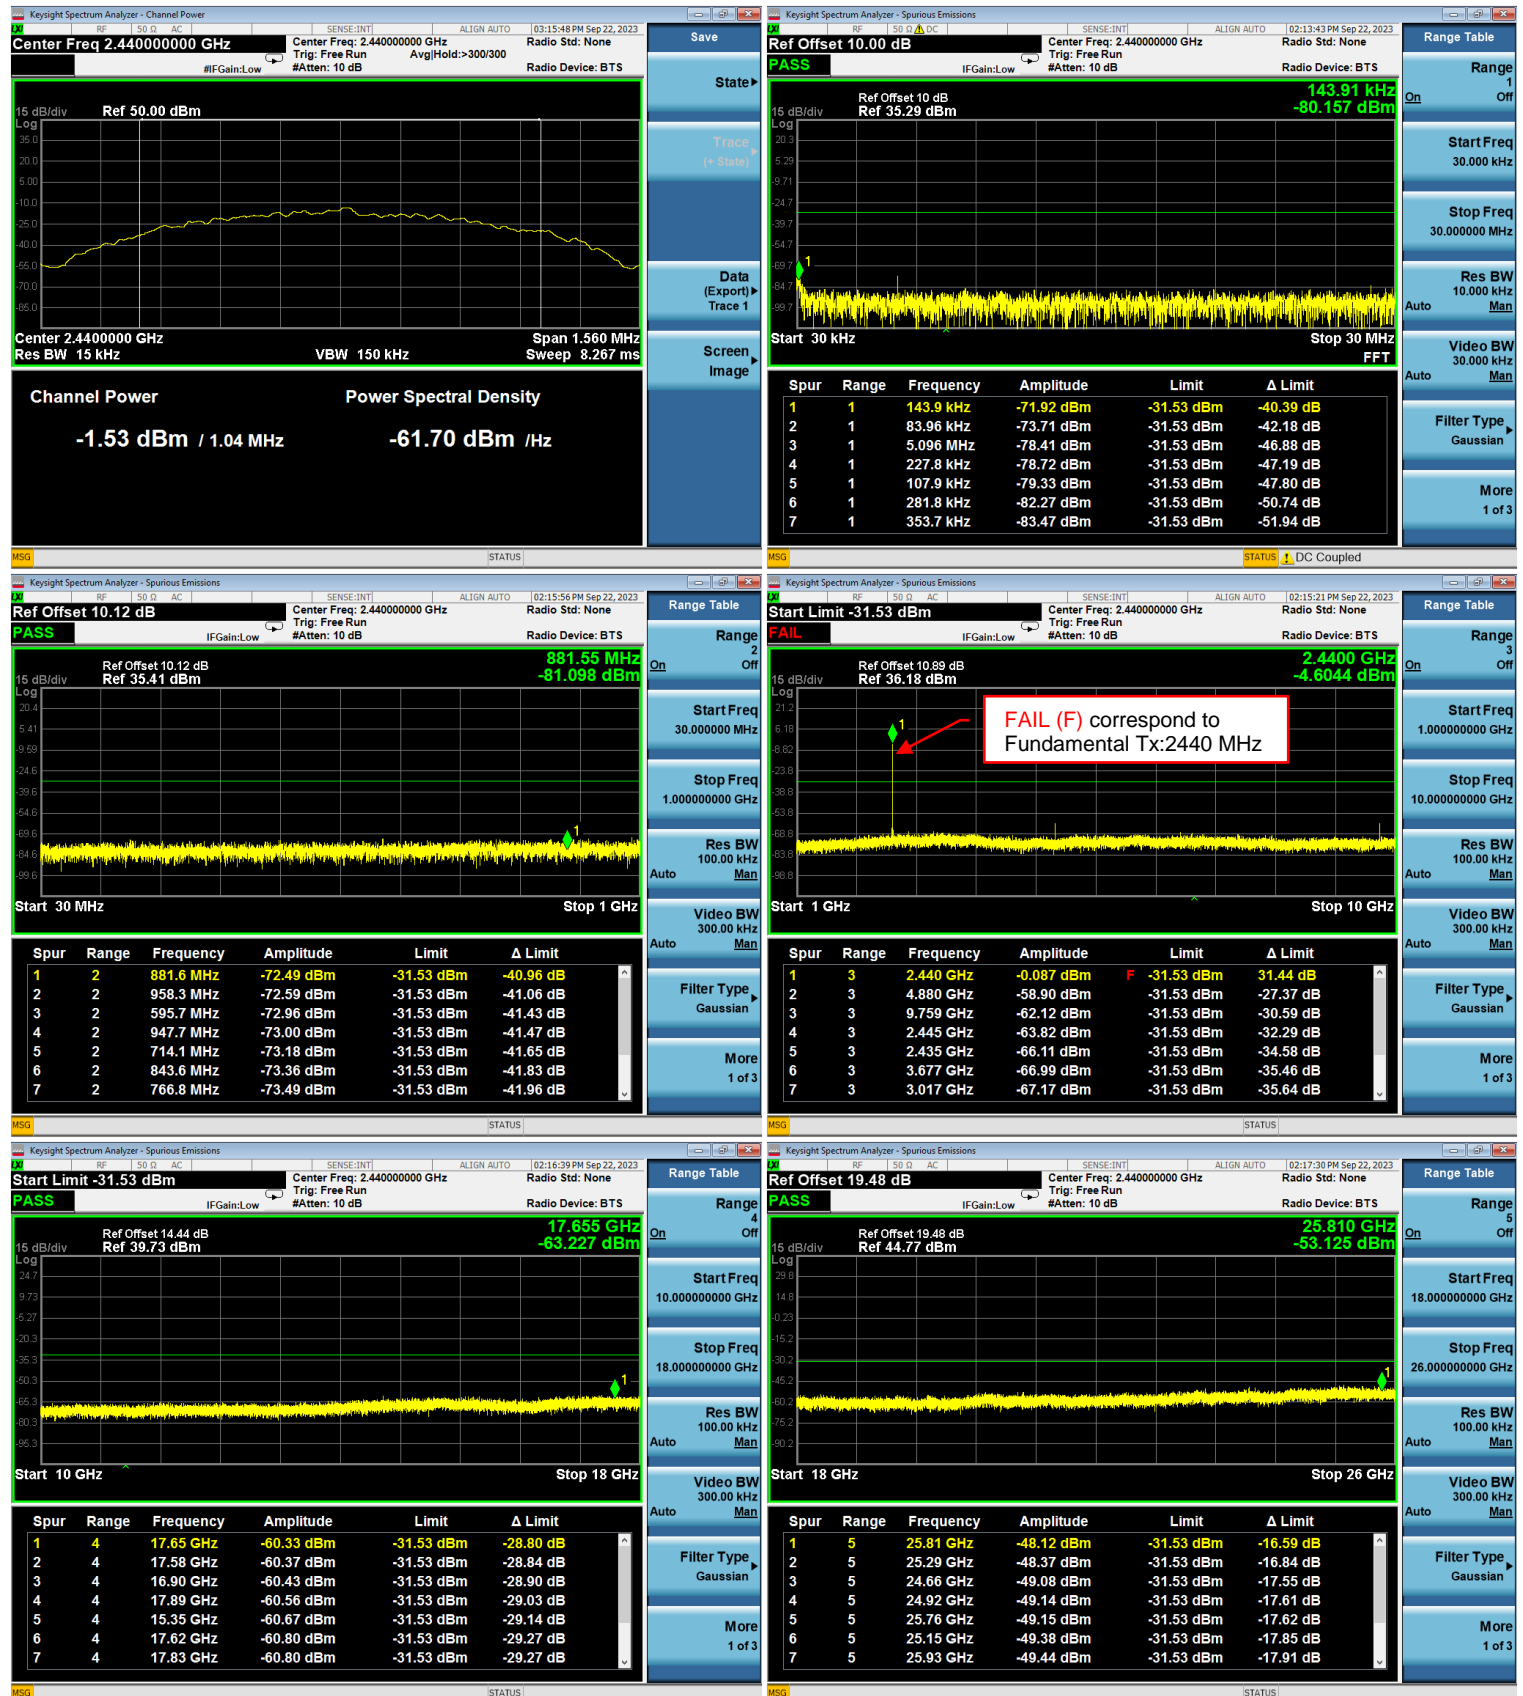

## High Channel

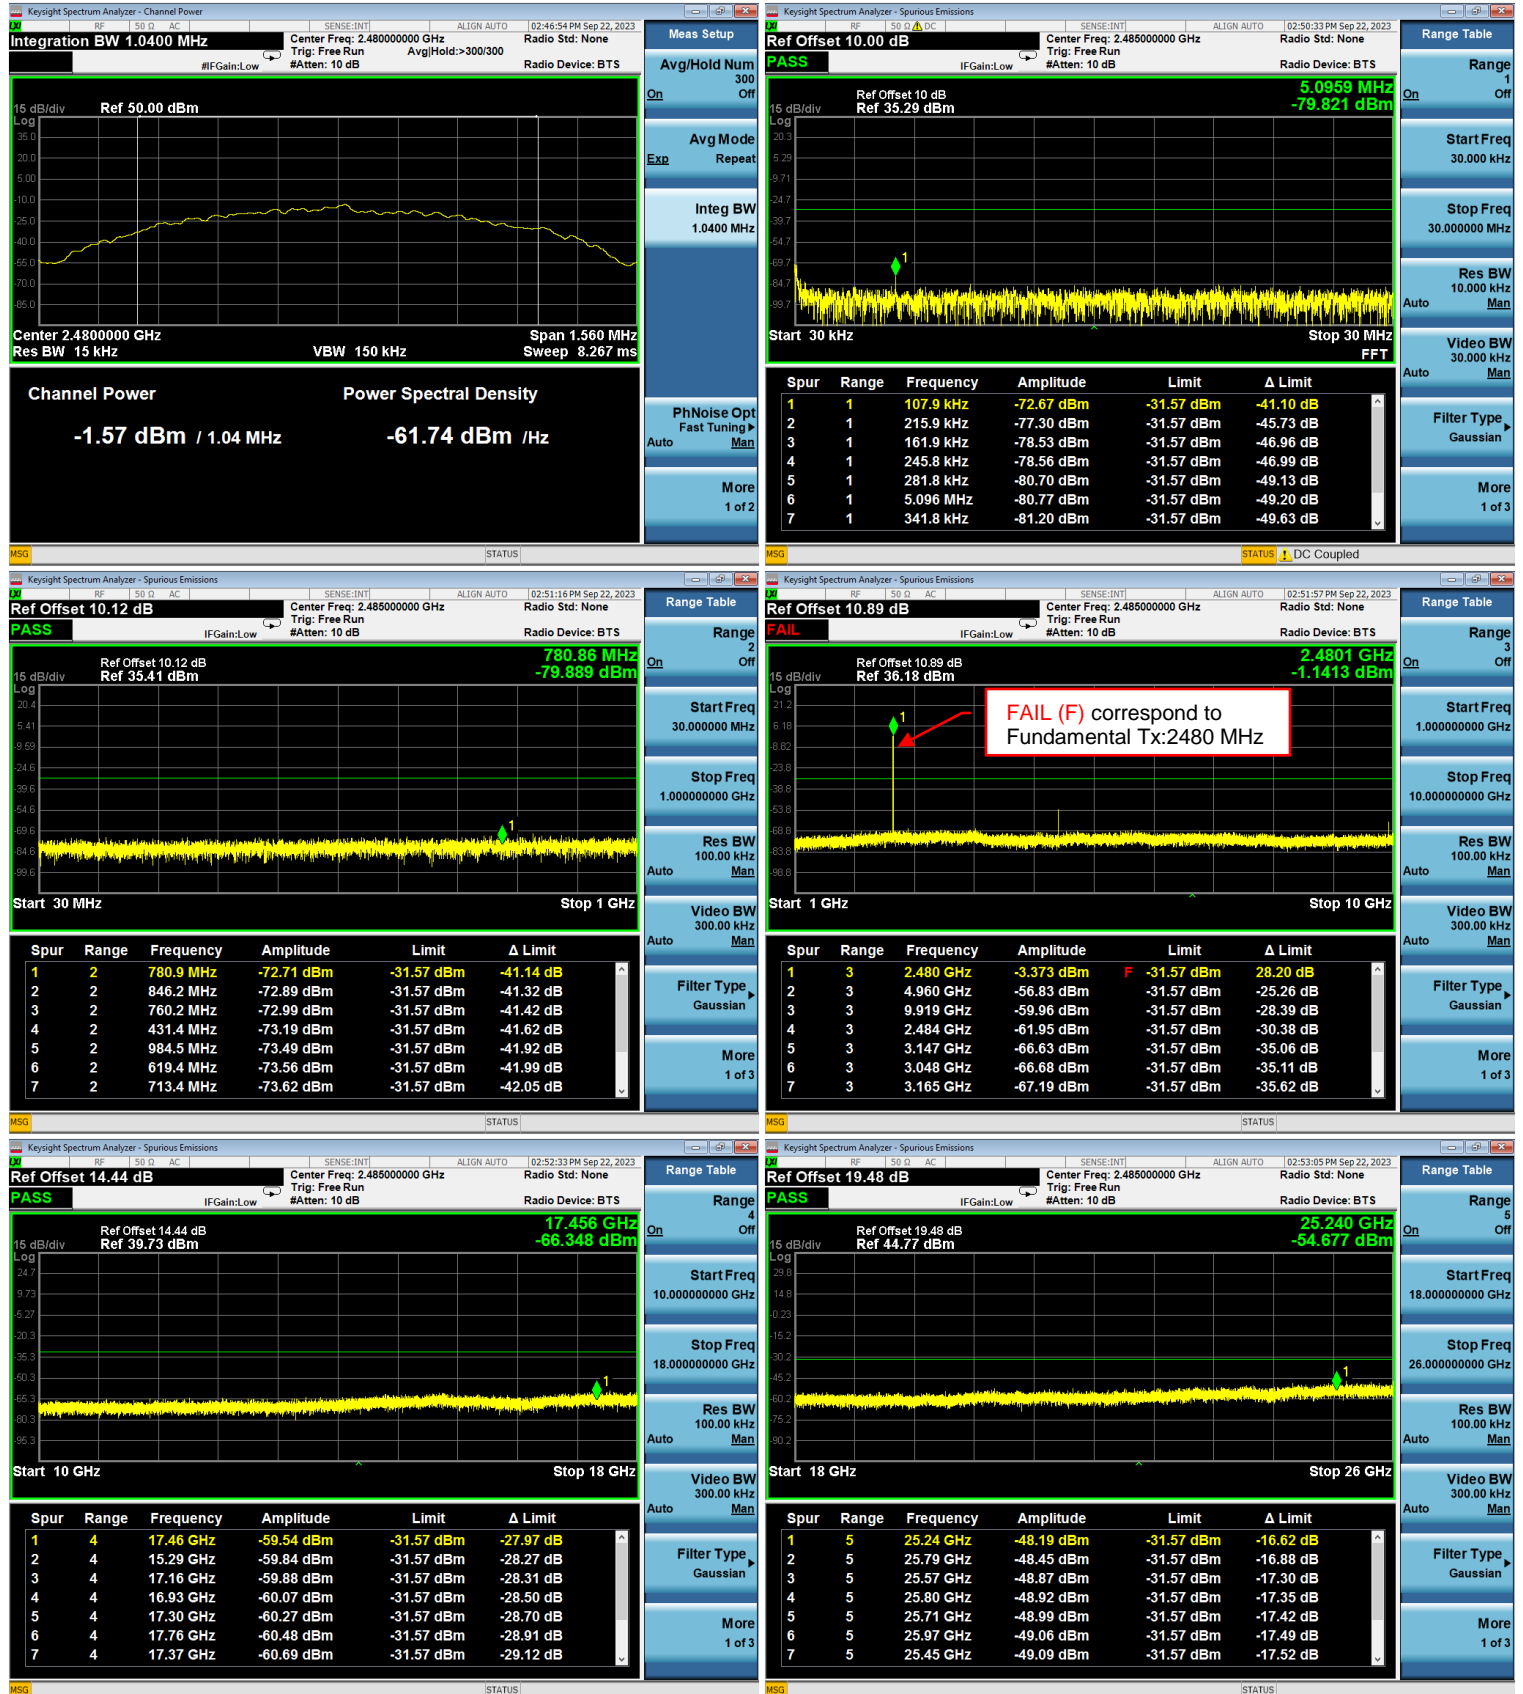

## 2.7 EUT Positioning Assessment

Test Lab: Electronics Test Centre, Airdrie

EUT: Seal/Seal Ex

Test Personnel: Janet Mijares

Standard: FCC PART 15.247


Date: 2023-09-22 (21.7°C, 22.8% RH)

Basic Standard: ANSI C63.4-2014

Comments: Y-Axis

### Specification: ANSI C63.4-2014, Clause 6.3.2.1

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs (see Figure 6, Figure 7, and Figure 9). For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

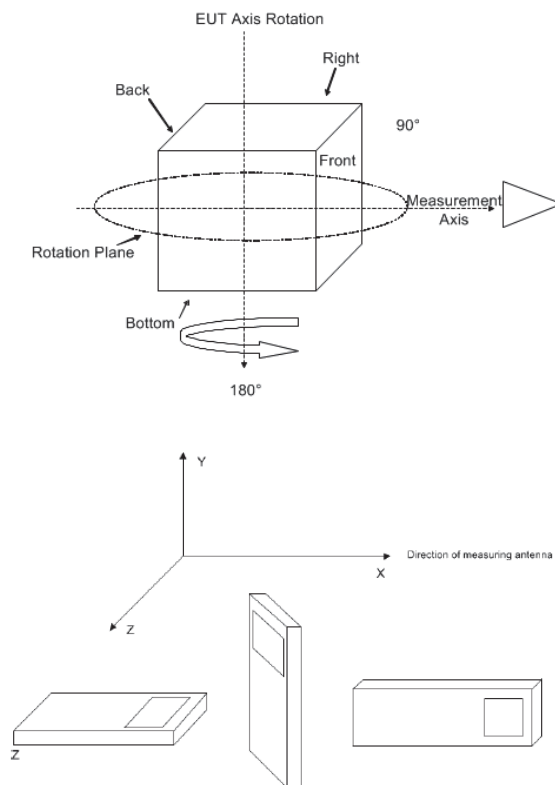



## 2.8 Radiated Spurious Emissions within restricted band

Test Lab: Electronics Test Centre, Airdrie	EUT: SEAL/SEAL EX
Test Personnel: Brendan Van Hee /Janet Mijares I. Akram	Standard: FCC PART 15.247/15.209 Basic Standard: ANSI C63.10-2013
Date: 2023-09-22/25/27 (21.9° C,24.9 % RH)	
<b>EUT status: Compliant</b>	

### Specification: FCC PART 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Restricted Bands of Operation:

MHz	MHz	MHz	MHz	MHz	GHz	GHz
0.0900000 – 0.1100000	8.2910000 - 8.2940000	16.804250 - 16.804750	162.01250 - 167.17000	1660.0000 – 1710.0000	3.6000000 – 4.4000000	14.470000 – 14.500000
0.4950000 - 0.5050000	8.3620000 - 8.3660000	25.500000 - 25.670000	167.72000 - 173.20000	1718.8000 – 1722.2000	4.5000000 – 5.1500000	15.350000 – 16.200000
2.1735000 - 2.1905000	8.3762500 - 8.3867500	37.500000 - 38.250000	240.00000 – 285.00000	2200.0000 – 2300.0000	5.3500000 – 5.4600000	17.700000 – 21.400000
4.1250000 - 4.1280000	8.4142500 - 8.4147500	73.000000 - 74.600000	322.00000 - 335.40000	2310.0000 – 2390.0000	7.2500000 – 7.7500000	22.010000 – 23.120000
4.1772500 - 4.1777500	12.290000 - 12.293000	74.800000 - 75.200000	399.90000 – 410.00000	2483.5000 – 2500.0000	8.0250000 – 8.5000000	23.600000 – 24.000000
4.2072500 - 4.2077500	12.519750 - 12.520250	108.00000 - 121.94000	608.00000 – 614.00000	2655.0000 – 2900.0000	9.0000000 – 9.2000000	31.200000 – 31.800000
5.6770000 - 5.6830000	12.576750 - 12.577250	123.00000 - 138.00000	960.00000 – 1240.0000	3260.0000 – 3267.0000	9.3000000 – 9.5000000	36.430000 – 36.500000
6.2150000 - 6.2180000	13.360000 - 13.410000	149.90000 - 150.05000	1300.0000 – 1427.0000	3332.0000 – 3339.0000	10.600000 – 12.700000	Above 38.600000
6.2677500 - 6.2682500	16.420000 - 16.423000	156.52475- 156.52525	1435.0000 – 1626.5000	3345.8000 – 3358.0000	13.250000 – 13.400000	
6.3117500 - 6.3122500	16.694750 - 16.695250	156.70000 - 156.90000	1645.5000 – 1646.5000	3500.0000 – 3600.0000		

US only      \*\* Canada 108 – 138 MHz      \*\*\* Canada 960 – 1427 MHz      \*\*\*\* Canada only

### 2.8.1 Test Guidance: ANSI C63.10-2013, Clause 13.4.2

From 9 kHz to 150 kHz (resolution bandwidth of 200 Hz) and from 150 kHz to 30 MHz (resolution bandwidth 9 kHz) measurements are performed with a loop antenna (as per KDB 460108).

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz The EUT is raised to 150 cm above the ground plane, and the area between the EUT and the antenna mast is covered with RF absorbent material.

The scan is performed at discreet increments of turntable azimuth and antenna height, which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

Frequencies having peak emissions within 10dB of the limits are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

### 2.8.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.8.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date (yyyy-mm-dd)	Cal. Due (yyyy-mm-dd)
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A (FW A.22.08)	6906	2022-12-12	2023-12-12
Loop Antenna (9KHz – 30MHz)	Electro-Metrics	ALP-70	3703	2022-01-05	2025-01-05
Biconilog Antenna (30 – 1000 MHz)	AR	JB1	6905	2021-10-29	2023-10-29
DRG Horn (1000 – 18000 MHz)	EMCO	3115	19357	2022-10-05	2024-10-05
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2023-04-14	2024-04-14
Pre-Amplifier (30 – 1400 MHz)	HP	8447D	9291	2023-05-11	2024-05-11
Low Noise Amplifier (1 – 18 GHz)	MITEQ	JS43-01001800-21- 5P	4354	2023-05-11	2024-05-11
RE Cable below 1GHz	Insulated Wire Inc.	KPS-1501A-3600- KPA-01102006	4419	2023-05-11	2024-05-11
Re Cable Above 1 GHz	A.H. System Inc.	SAC-26G-8.23	6187	2023-05-11	2024-05-11
0.9GHz Notch Filter	Microtronics	BRM20784	6947	2023-05-11	2024-05-11




## 2.8.4 Test Sample Verification, Configuration & Modifications


The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation. LoRa radio is transmitting at mid channel in ingle carrier configuration and high channel in dual carrier configurations.

The EUT met the requirements without modification.

### Test setup diagram for Radiated Spurious Emissions testing (below 1GHz):

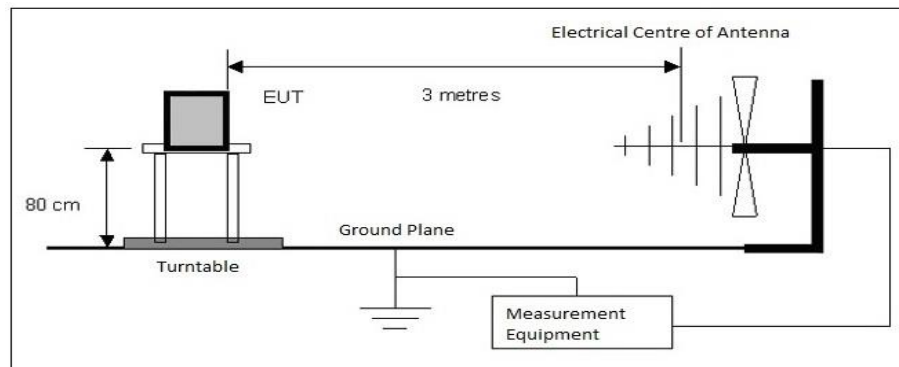

### Test setup diagram for Radiated Spurious Emissions testing (above 1GHz):

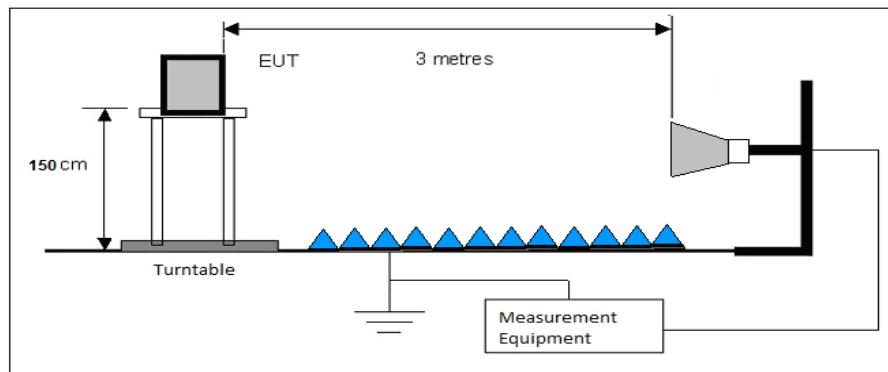

## 2.8.5 Radiated Emissions Data: LoRa DTS

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

**Meter Reading in dBμV + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dBμV/m.**

**Delta = Field Strength – Limit**

### Notes:

- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- Measurements reported are the result of adjusting the turntable azimuth and antenna height to obtain the maximum EUT emission. This may produce a different reading than the plot trace. The plot is a Peak Hold function obtained at discreet increments of height and azimuth, while the reported measurement is obtained with the appropriate Quasi Peak or Average detector after the height and azimuth have been adjusted for maximum emission.
- Preliminary scans were performed for all channels in Transmit modes. The LOW band channel 903 MHz was selected as the worst-case condition for detailed examination.
- In Transmit mode, the EUT was assessed up to 10.0 GHz.


**Negative values for Delta indicate compliance.**

Freq. Marker	Freq. [GHz]	Raw reading[ dBμv]	Det	Antenna Factor [dB/m]	Pre amp Gain [dB]	Corrected Reading [dBμv/m]	FCC 15.209 Limit [dBμv/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
1	1.8061	50.12	PK	27.5	-34	43.62	74	-30.38	188	282	Horizontal
1	1.8061	45.63	AV	27.5	-34	39.13	54	-14.87	188	282	Horizontal
2	*5.4182	41.73	PK	34	-30	45.73	74	-28.27	76	214	Horizontal
2	*5.4182	29.88	AV	34	-30	33.88	54	-20.12	76	214	Horizontal
3	*9.0291	37.73	PK	37.2	-25.1	49.83	74	-24.17	93	212	Horizontal
3	*9.0291	24.23	AV	37.2	-25.1	36.33	54	-17.67	93	212	Horizontal
4	1.806	53.33	PK	27.5	-34	46.83	74	-27.17	189	138	Vertical
4	1.806	49.66	AV	27.5	-34	43.16	54	-10.84	189	138	Vertical
6	7.2245	38.03	PK	36.1	-26.6	47.53	74	-26.47	334	308	Vertical
6	7.2245	25.41	AV	36.1	-26.6	34.91	54	-19.09	334	308	Vertical
7	*9.0295	35.56	PK	37.2	-25.1	47.66	74	-26.34	340	346	Vertical
7	*9.0295	22.39	AV	37.2	-25.1	34.49	54	-19.51	340	346	Vertical


**QP: Quasi-Peak Detector, PK: Peak Detector, AV: Average Detector**

**\* Spurious Emission in Restricted Band**


## Plot of Radiated Emissions: Parallel

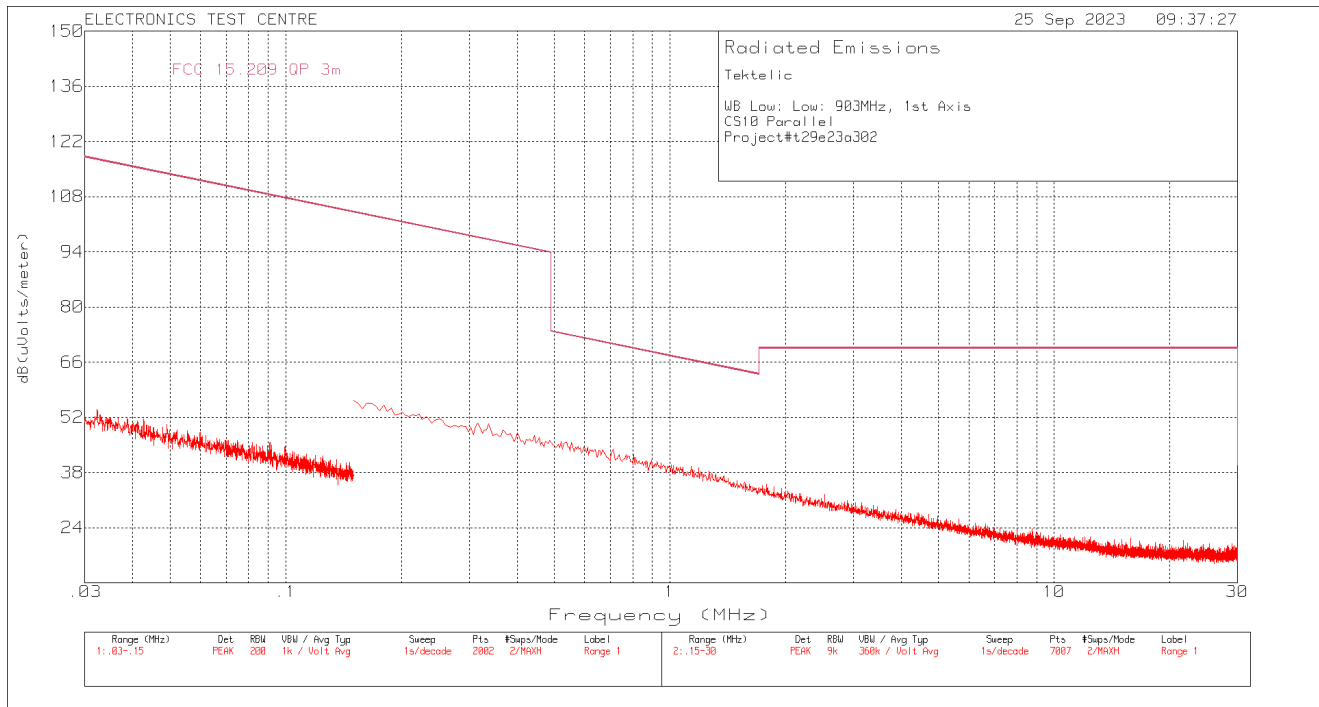


## Plot of Radiated Emissions: Perpendicular

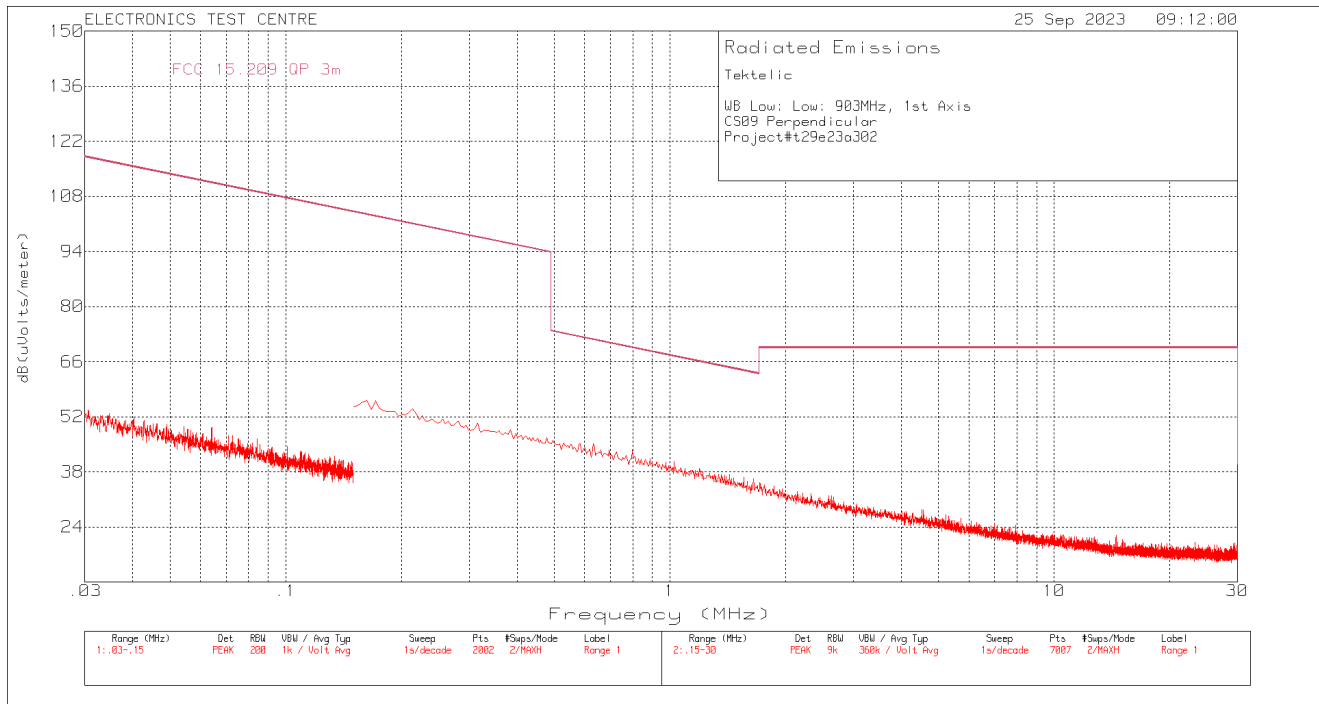


## Plot of Radiated Emissions: Horizontal polarization

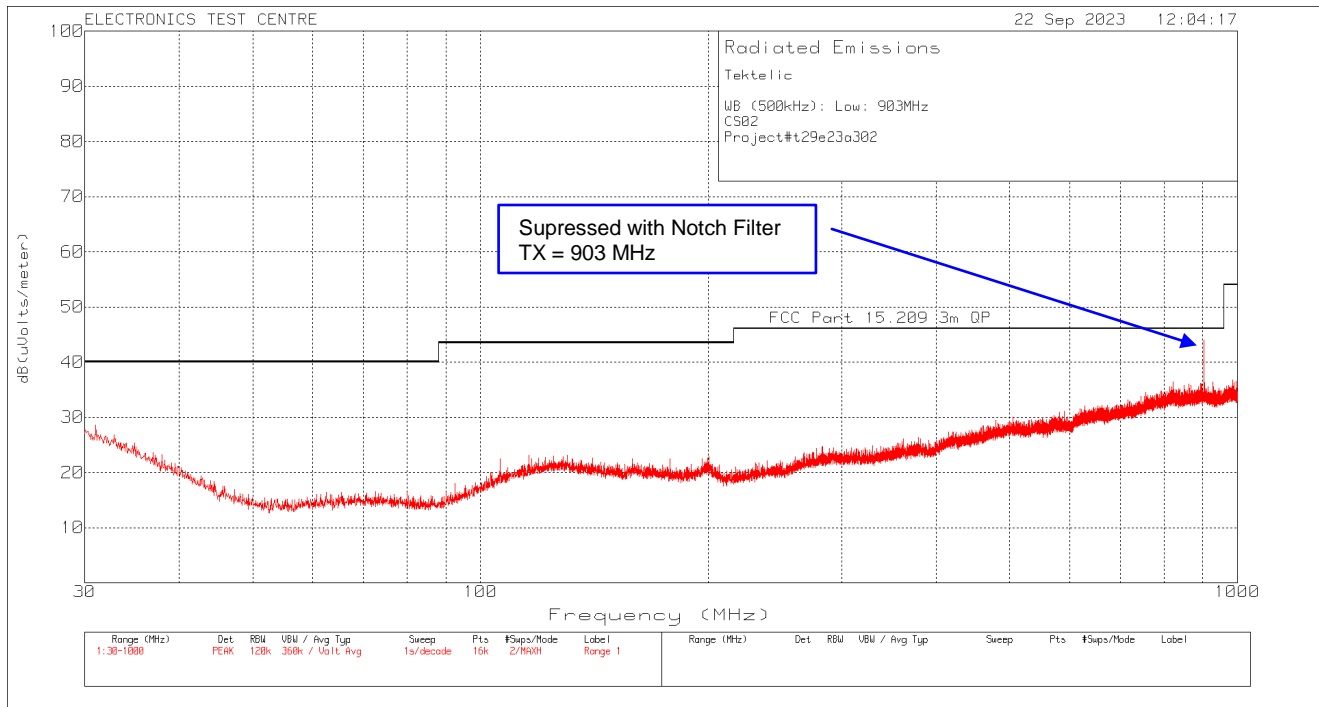


## Plot of Radiated Emissions: Vertical polarization

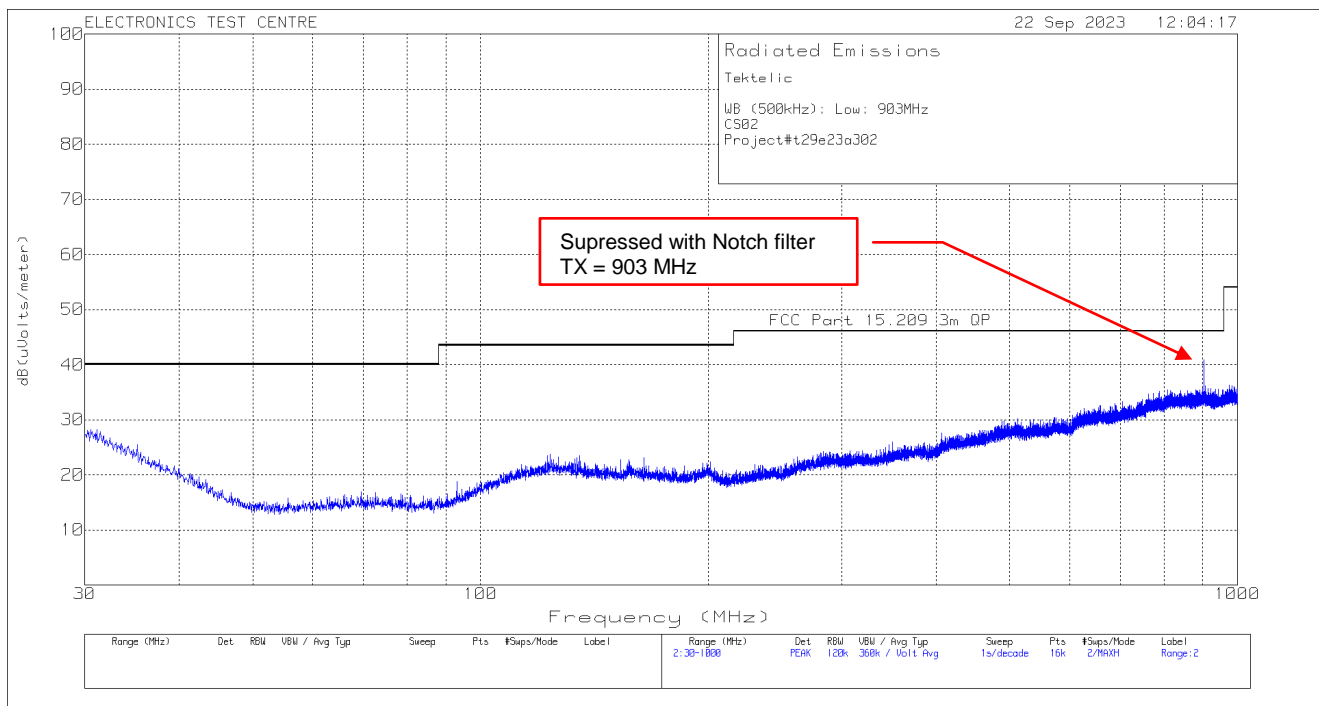

Plot of Radiated Emissions: Horizontal polarization

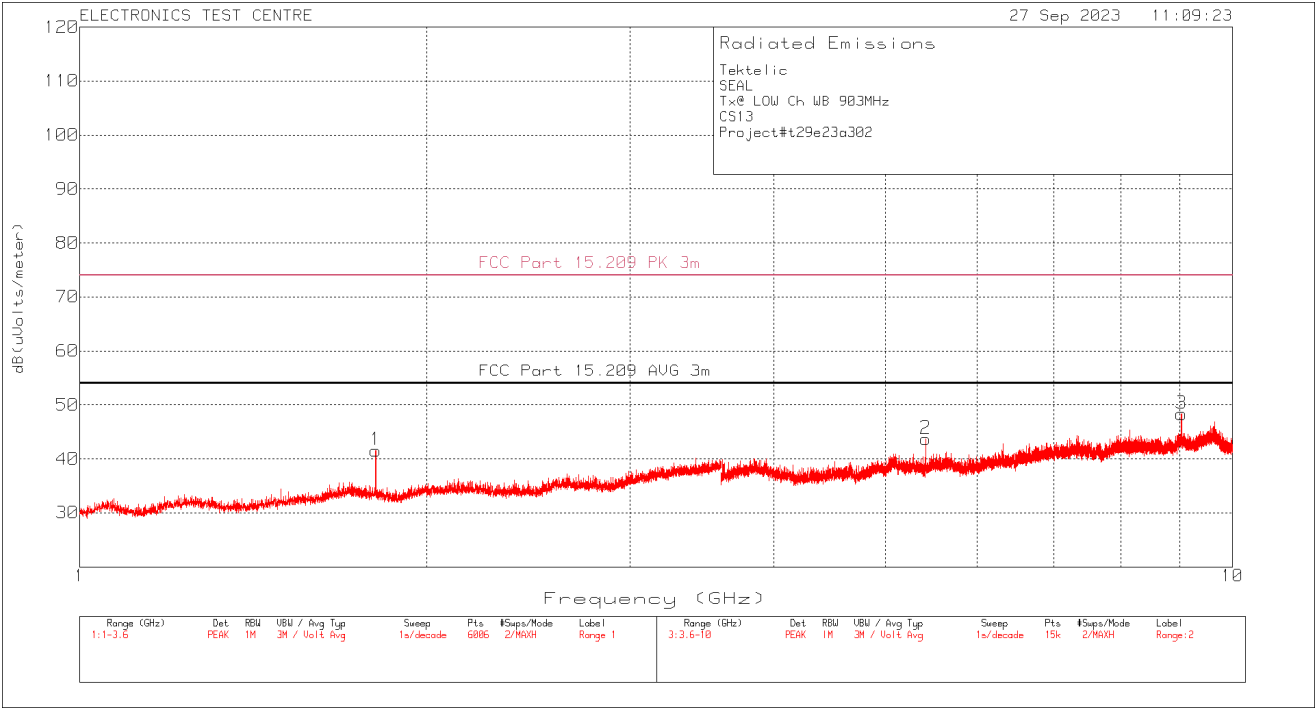

Plot of Radiated Emissions: Vertical polarization

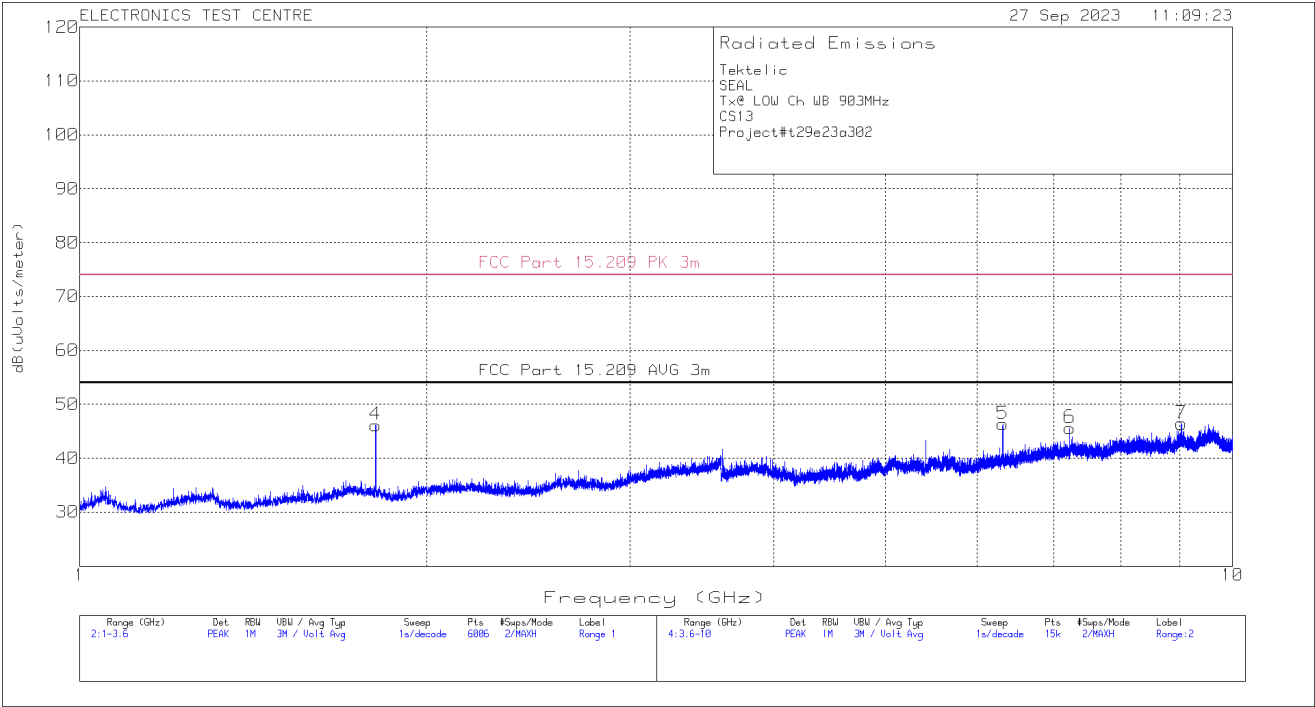

## 2.8.6 Radiated Emissions Data: BLE

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

**Meter Reading in dBμV + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dBμV/m.**

**Delta = Field Strength – Limit**

### Notes:

- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- Measurements reported are the result of adjusting the turntable azimuth and antenna height to obtain the maximum EUT emission. This may produce a different reading than the plot trace. The plot is a Peak Hold function obtained at discreet increments of height and azimuth, while the reported measurement is obtained with the appropriate Quasi Peak or Average detector after the height and azimuth have been adjusted for maximum emission.
- Preliminary scans were performed for all channels in Transmit modes. The LOW band channel 2402 MHz was selected as the worst-case condition for detailed examination.
- In Transmit mode, the EUT was assessed up to 26.0 GHz.


**Negative values for Delta indicate compliance.**

Freq. Marker	Freq. [GHz]	Raw reading[dBμV]	Det	Antenna Factor [dB/m]	Pre amp Gain [dB]	Corrected Reading [dBμV/m]	FCC 15.209 Limit [dBμV/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
1	0.194	19.34	QP	15.5	-22.5	12.34	43.53	-31.19	253	314	Horizontal
1	*4.8041	55.2	PK	32.8	-30.9	57.1	74	-16.9	313	113	Horizontal
1	*4.8041	47.42	AV	32.8	-30.9	49.32	54	-4.68	313	113	Horizontal
7	7.206	40.36	PK	36	-26.6	49.76	74	-24.24	289	137	Horizontal
7	7.206	28.69	AV	36	-26.6	38.09	54	-15.91	289	137	Horizontal
8	9.6081	37.41	PK	37.6	-24.7	50.31	74	-23.69	34	180	Horizontal
8	9.6081	23.84	AV	37.6	-24.7	36.74	54	-17.26	34	180	Horizontal
2	*12.01	46.71	PK	39.5	-23.3	62.91	74	-11.09	247	106	Horizontal
2	*12.01	31.74	AV	39.5	-23.3	47.94	54	-6.06	247	106	Horizontal
3	*4.8034	52.05	PK	32.8	-30.9	53.95	74	-20.05	238	243	Vertical
3	*4.8034	41.81	AV	32.8	-30.9	43.71	54	-10.29	238	243	Vertical
4	9.608	41.85	PK	37.6	-24.7	54.75	74	-19.25	226	232	Vertical
4	9.608	28.17	AV	37.6	-24.7	41.07	54	-12.93	226	232	Vertical
5	*12.0087	49.1	PK	39.5	-23.3	65.3	74	-8.7	301	232	Vertical
5	*12.0087	37.1	AV	39.5	-23.3	53.38	54	-0.8	301	232	Vertical
6	14.4109	35.42	PK	42.1	-22	55.33	74	-18.67	62	210	Vertical
6	14.4109	23.42	AV	42.1	-22	43.52	54	-10.48	62	210	Vertical


**QP: Quasi-Peak Detector, PK: Peak Detector, AV: Average Detector**

**\* Spurious Emission in Restricted Band**


## Plot of Radiated Emissions: Parallel

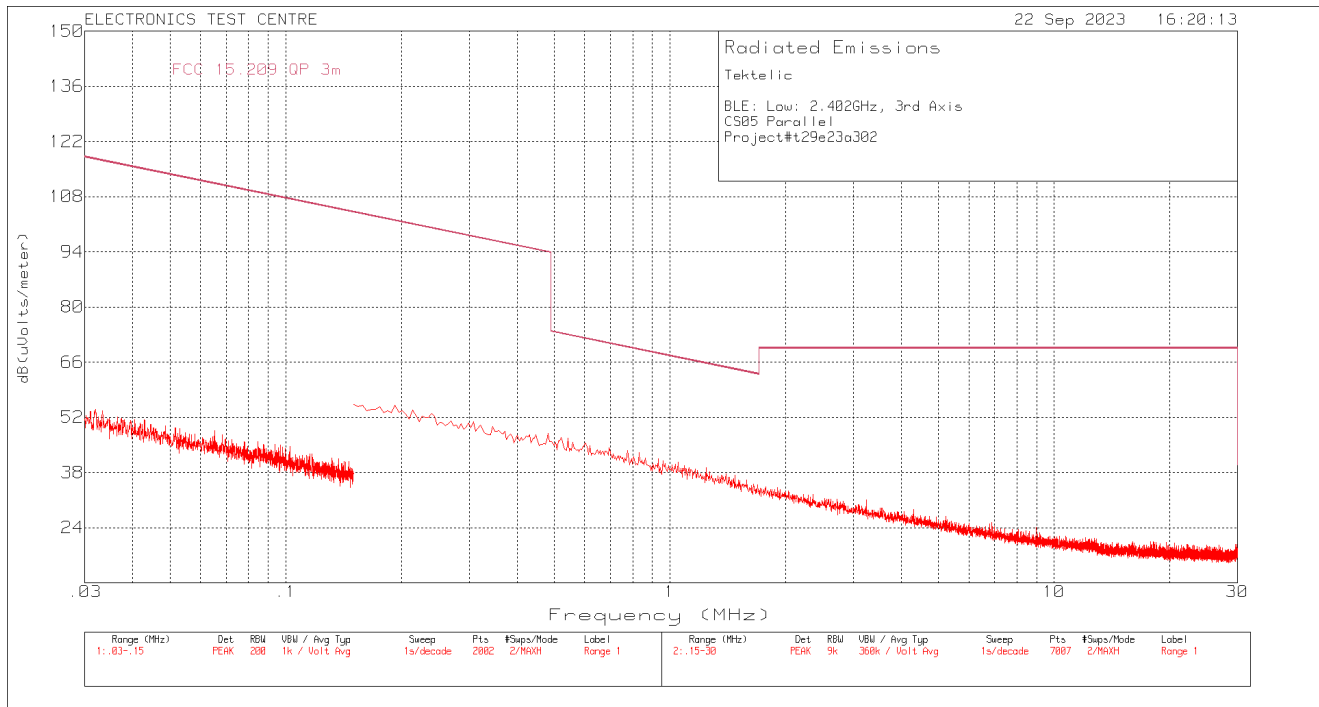


## Plot of Radiated Emissions: Perpendicular

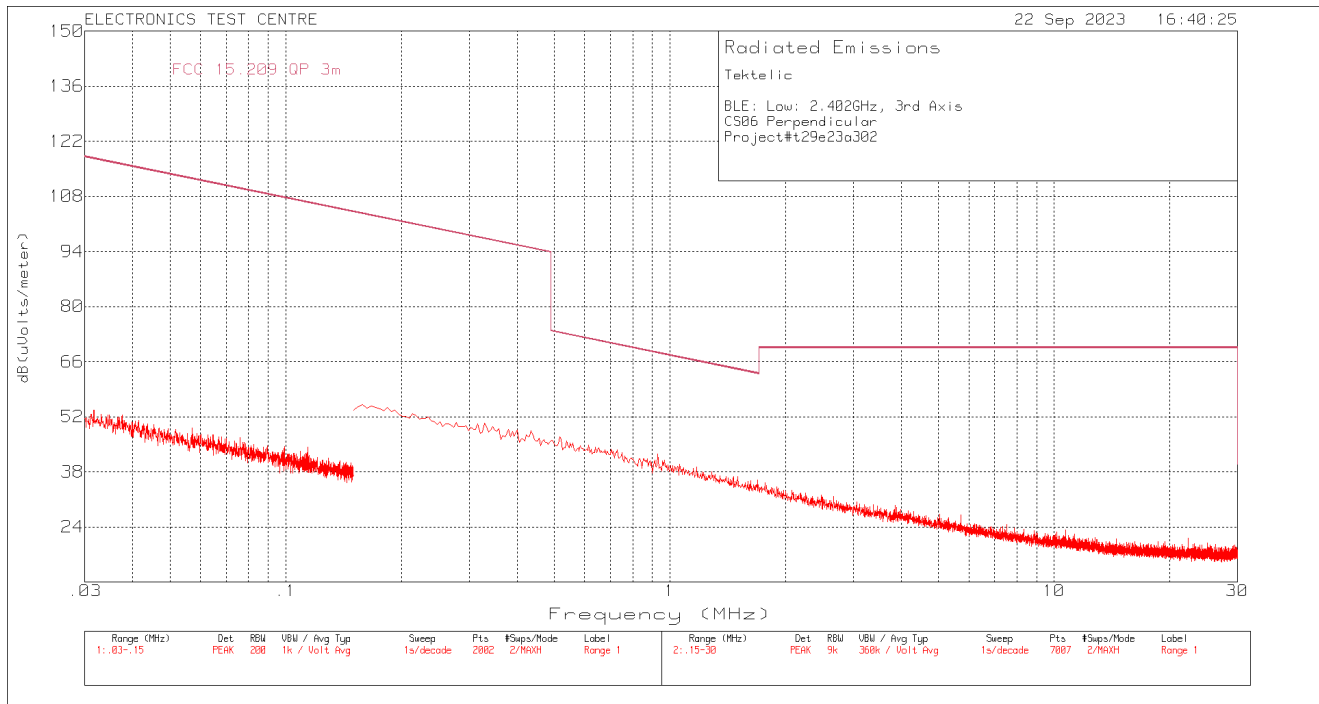

## Plot of Radiated Emissions: Horizontal polarization

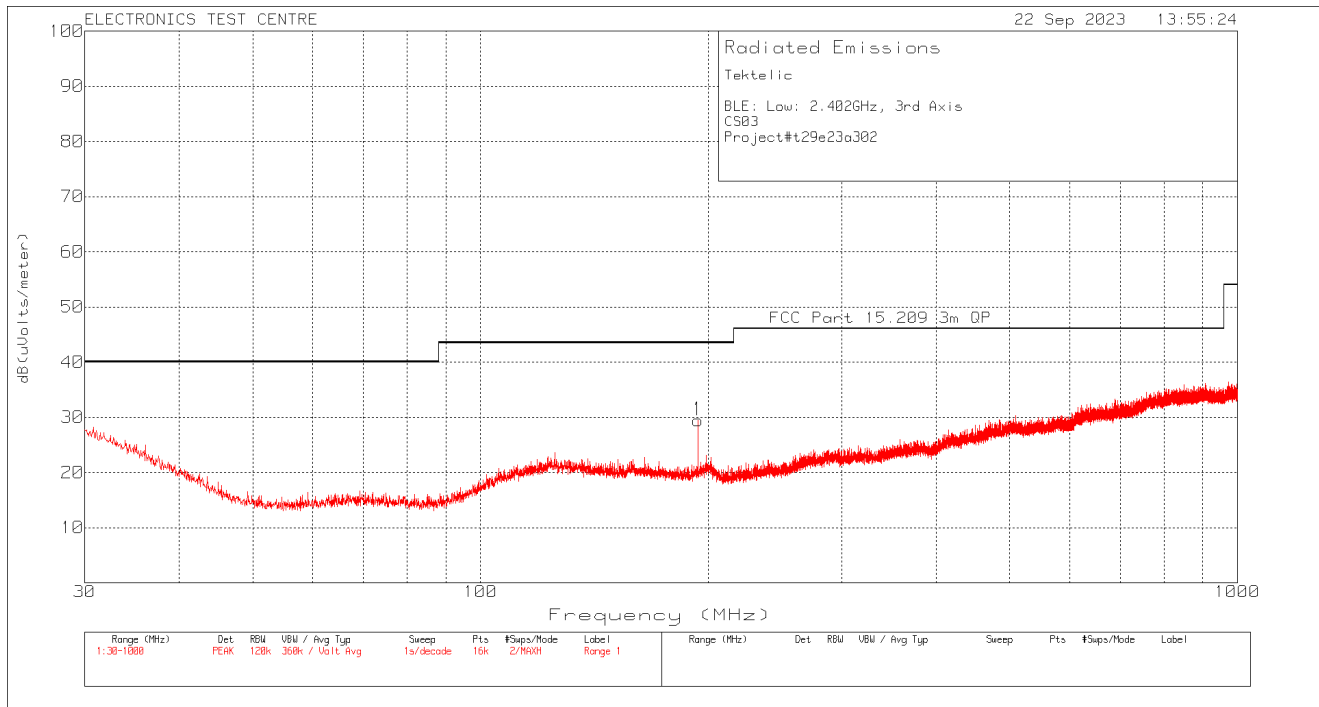


## Plot of Radiated Emissions: Vertical polarization

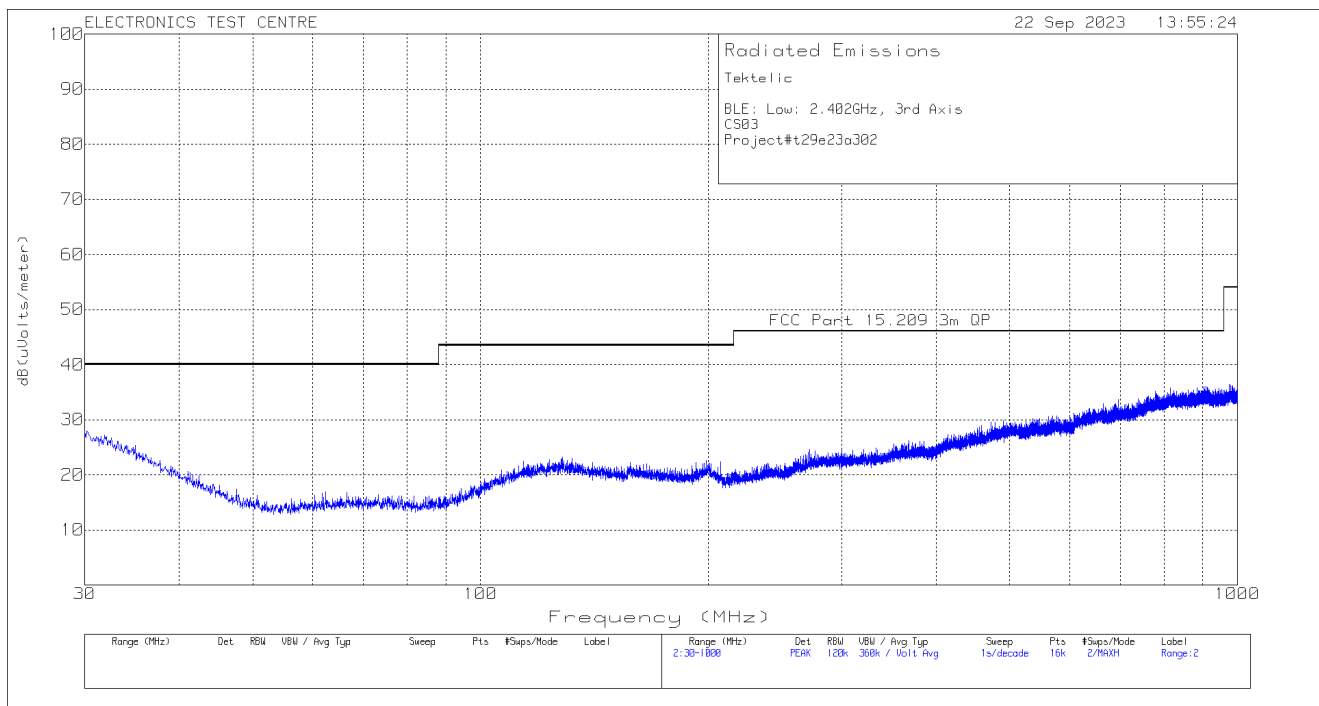





## Plot of Radiated Emissions: Horizontal polarization

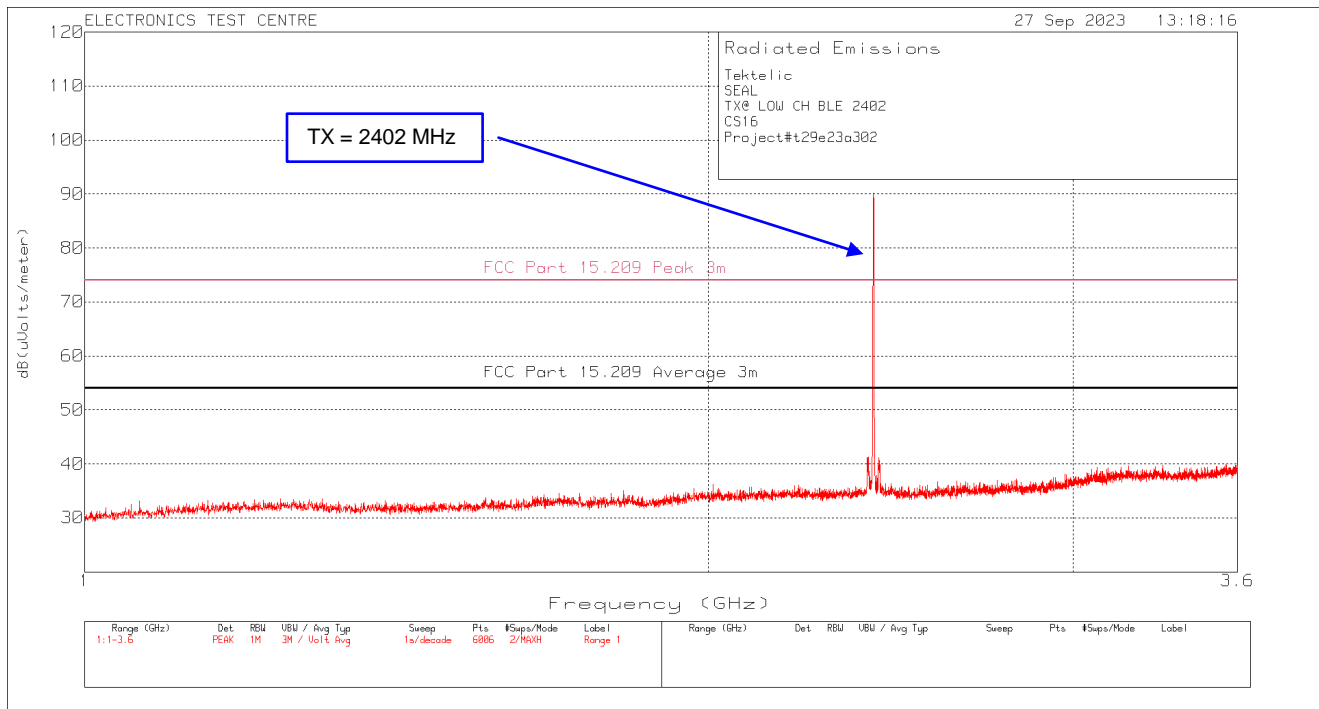


## Plot of Radiated Emissions: Vertical polarization

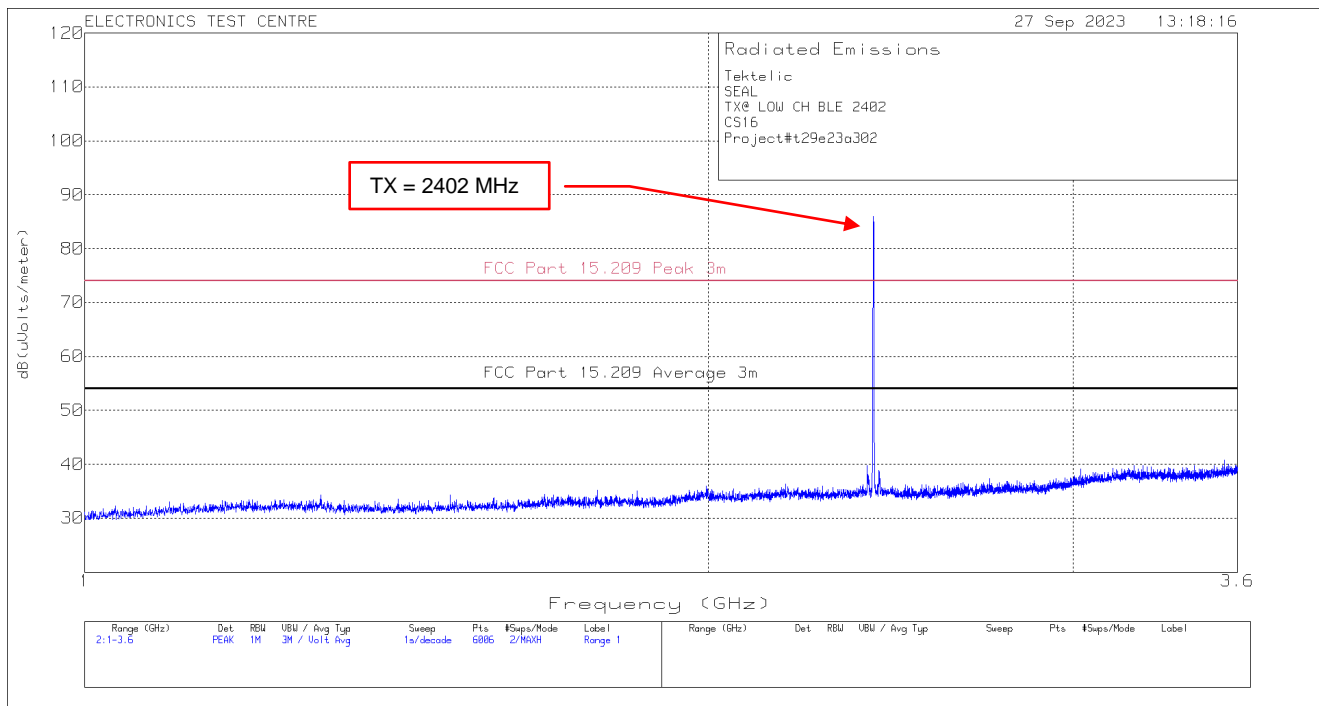


## Plot of Radiated Emissions: Horizontal polarization

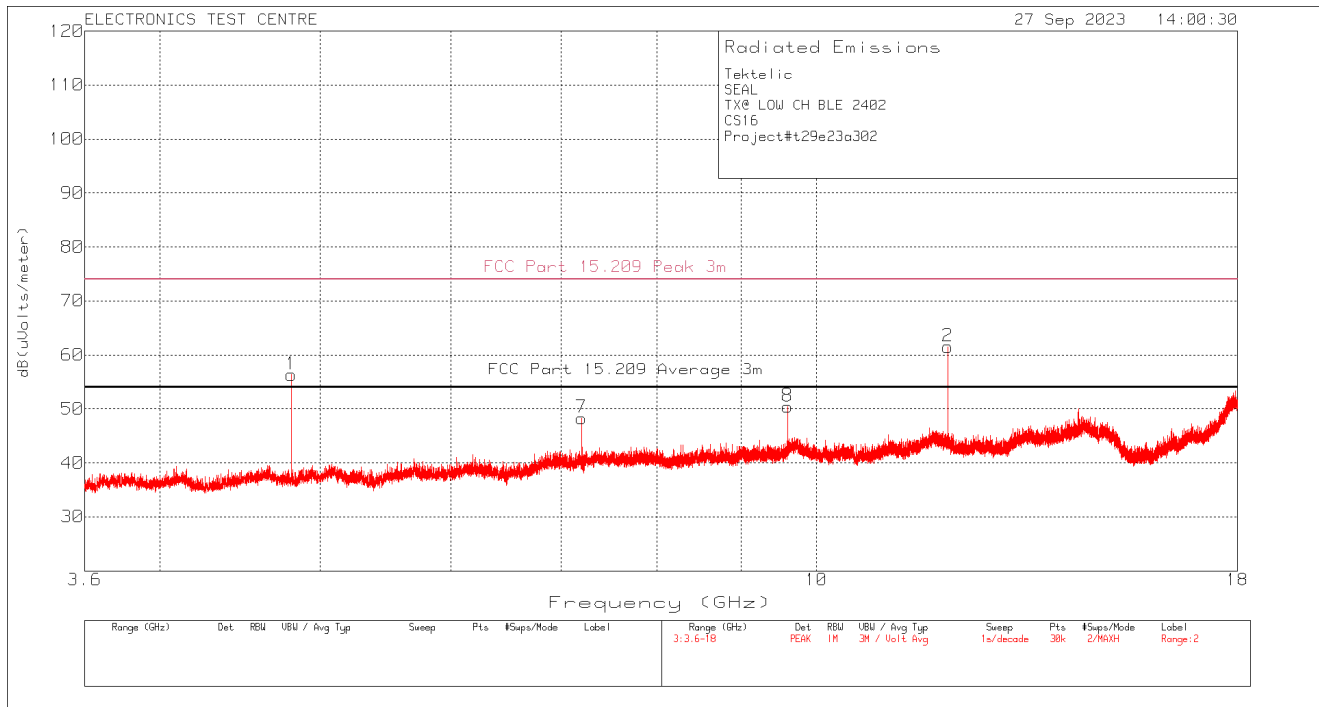


## Plot of Radiated Emissions: Vertical polarization

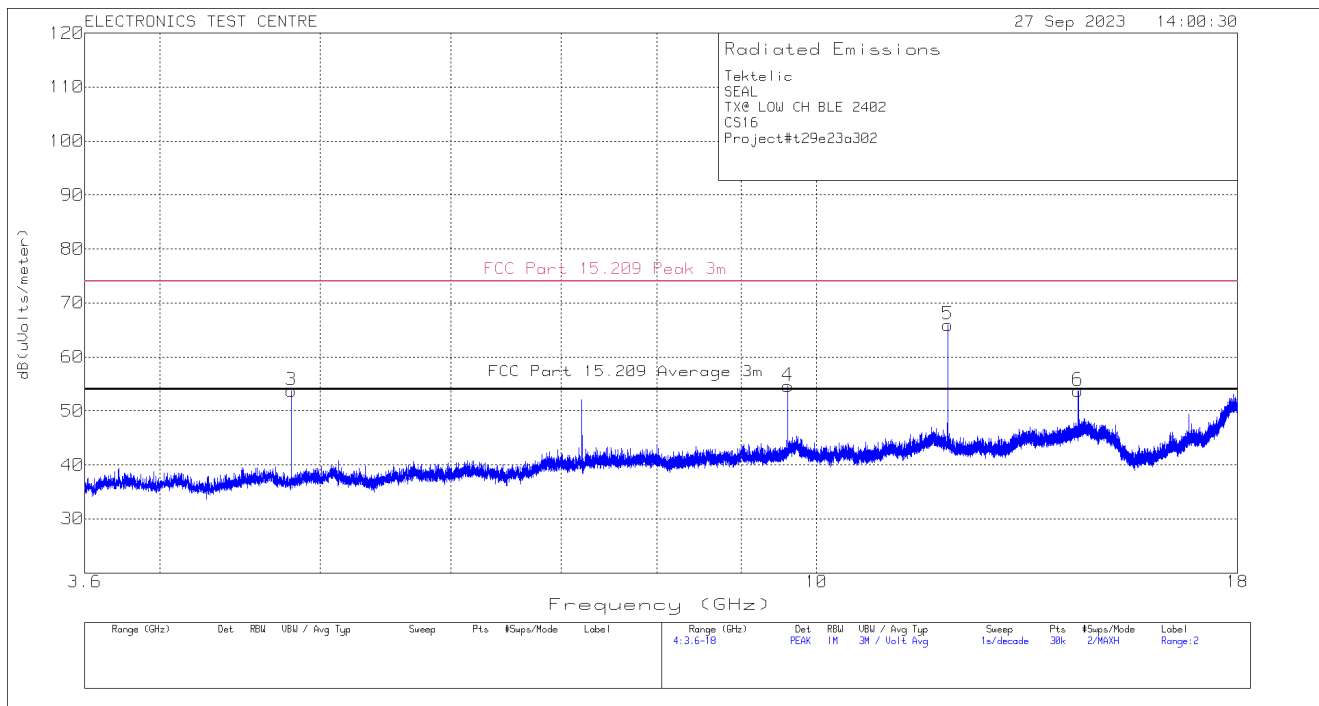

## Plot of Radiated Emissions: Horizontal polarization

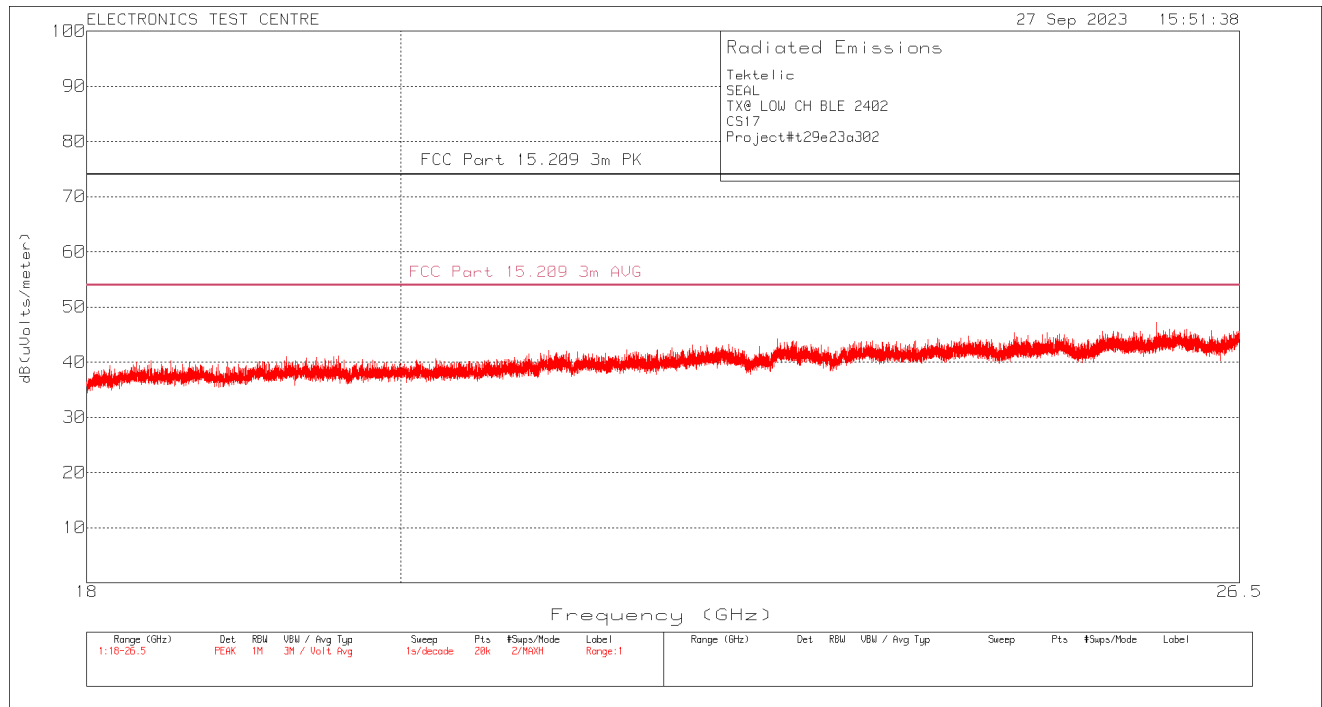

## Plot of Radiated Emissions: Vertical polarization

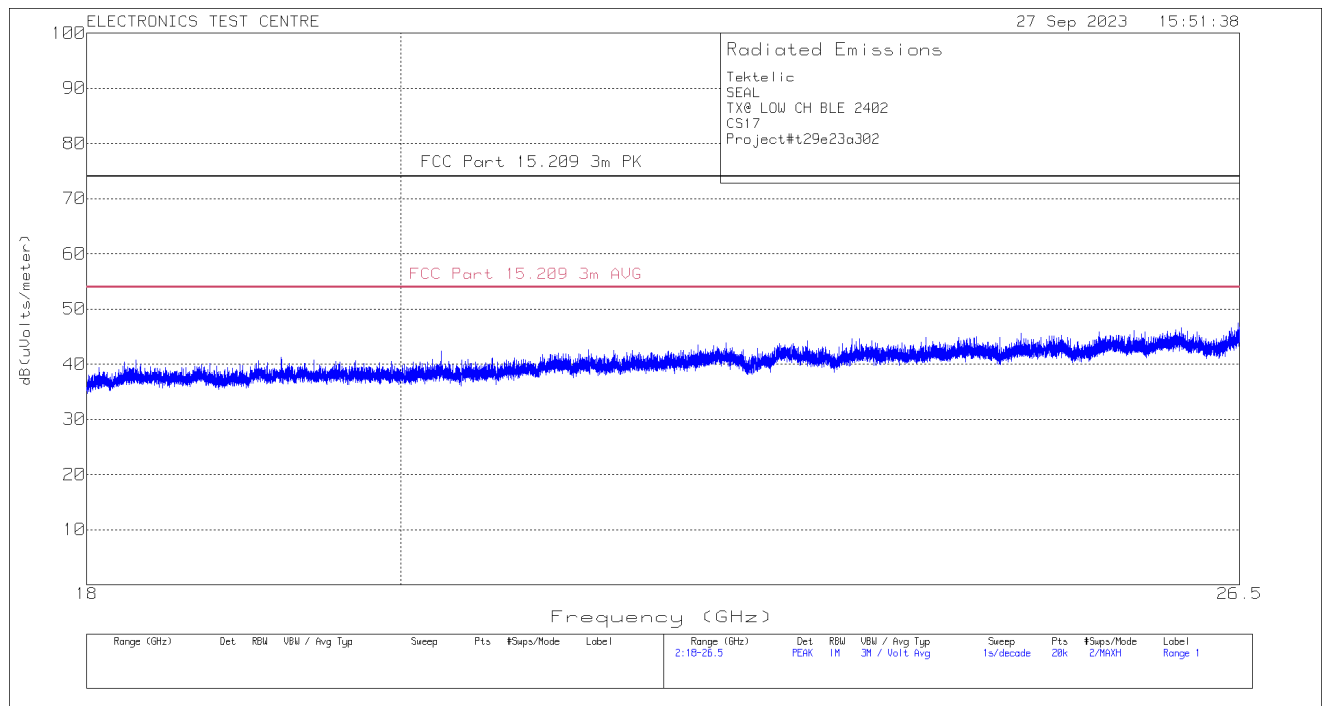

## 2.9 Radiated Emissions (RX Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Seal/Seal Ex
Test Personnel: Brendan Van Hee, Janet Mijares	Standard: FCC Part 15.109
Date: 2023-09-22/26 (25.4° C, 22.2 % RH)	Basic Standard: ANSI C63.4: 2014
	Class: B
EUT status: Compliant	

Frequency (MHz)	FCC Part 15.109 Class B Limit (3m)
30 – 88	40 (dBµV/m)
88 – 216	43.52 (dBµV/m)
216 – 960	46.02 (dBµV/m)
Above 960	53.98 (dBµV/m)
<b>Criteria:</b> The radiated emissions produced by a device, measured at a distance of 3 meters, shall not exceed the limits as specified.	

### 2.9.1 Test Guidance:

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz.

The scan is performed at discreet increments of turntable azimuth and stepped antenna height, with peak detector and Max Hold function which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

After the pre-scan is completed, the frequencies of interest are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. This may produce a different reading than the pre scan trace. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

### 2.9.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.9.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A (FW A.22.08)	6906	2022-07-12	2023-07-12
Biconilog Antenna	SunAR RF Motion;	JB1	6905	2021-10-29	2023-10-29
DRG Horn	EMCO	3115	19357	2022-10-05	2024-10-05
T/H Logger	EXTECH Ins.	42270	5892	2023-04-14	2024-04-14
Pre- Amp	HP	8447D	9291	2023-05-11	2024-05-11
Low Noise Amplifier	MITEQ	JS43-01001800-21-5P	4354	2023-05-11	2024-05-11
RE Cable	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4419	2023-05-11	2024-05-11

#### 2.9.4 Test Sample Verification, Configuration & Modifications

To cover the unintentional radiated emission. The EUT was configured in receive mode. Unit was placed at the center of turntable in semi-anechoic chamber 80cm above the ground plane and at a distance of 3m from the test receive antenna.

The EUT met the requirements without modification. Power cable is soldered to the battery terminal to connect the DC power supply during radiated emission.

#### EUT RX configuration Block Diagram for Radiated Emissions testing:

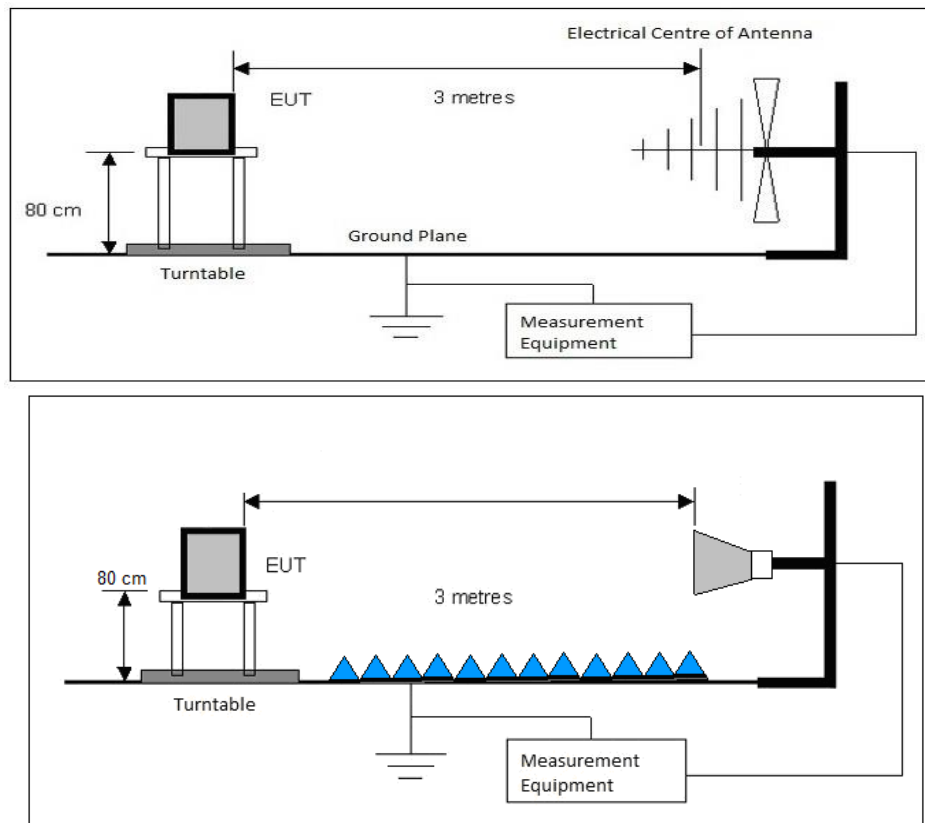


## 2.9.5 Radiated Emissions Data:


Emission is more than 20 dB below the limit

Meter Reading in dB $\mu$ V + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in db $\mu$ V/m.


## Plot of Radiated Emissions: Horizontal polarization

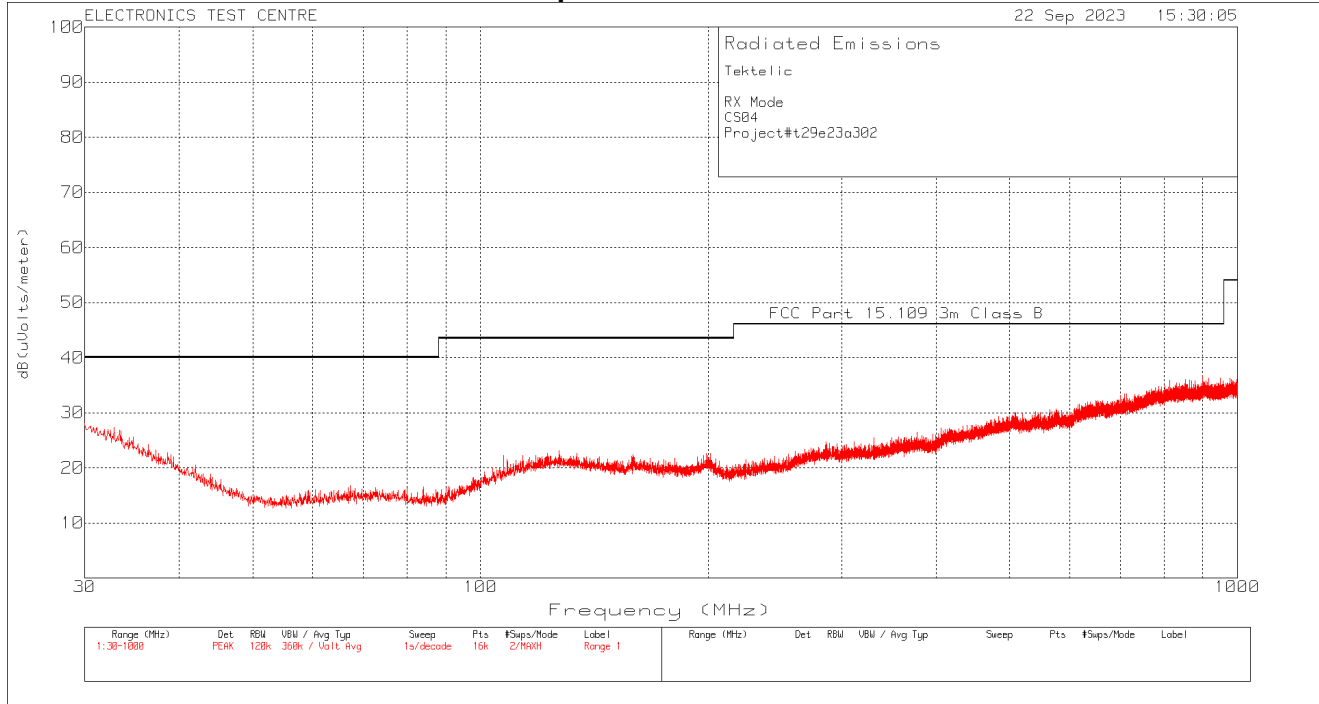


## Plot of Radiated Emissions: Vertical polarization

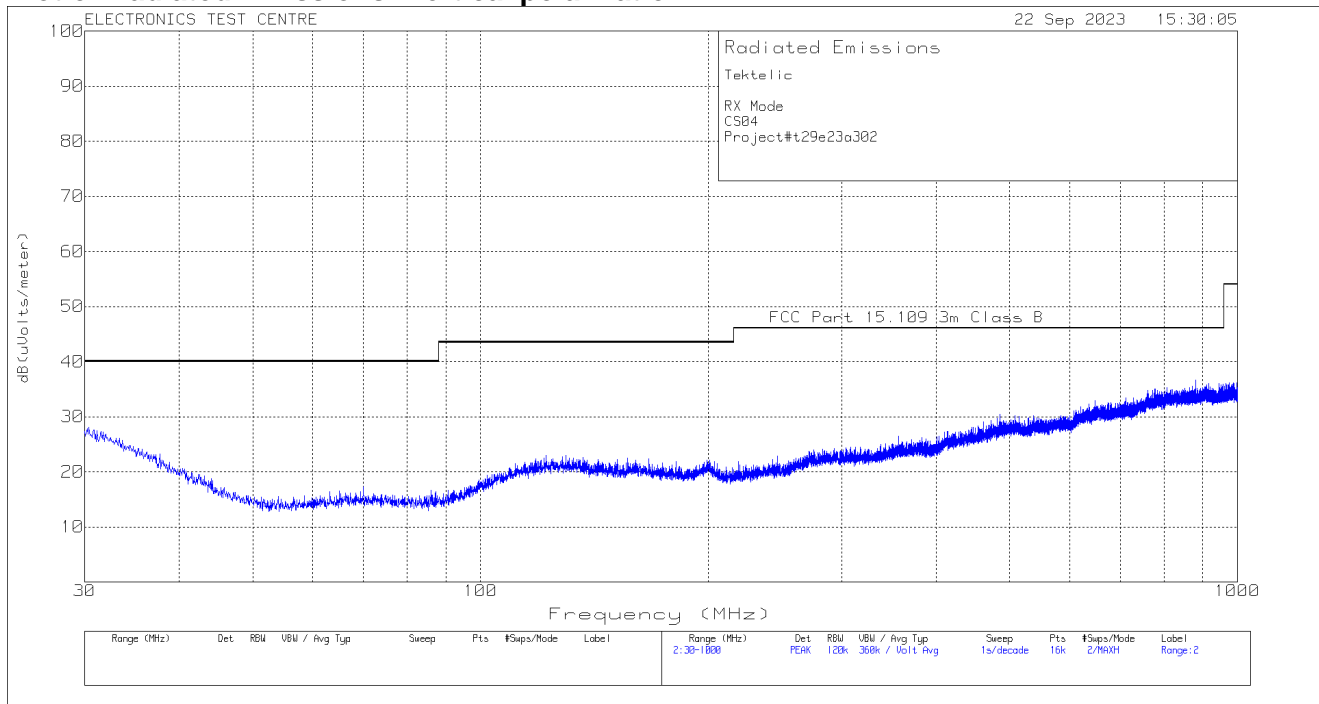

## Plot of Radiated Emissions: Horizontal polarization

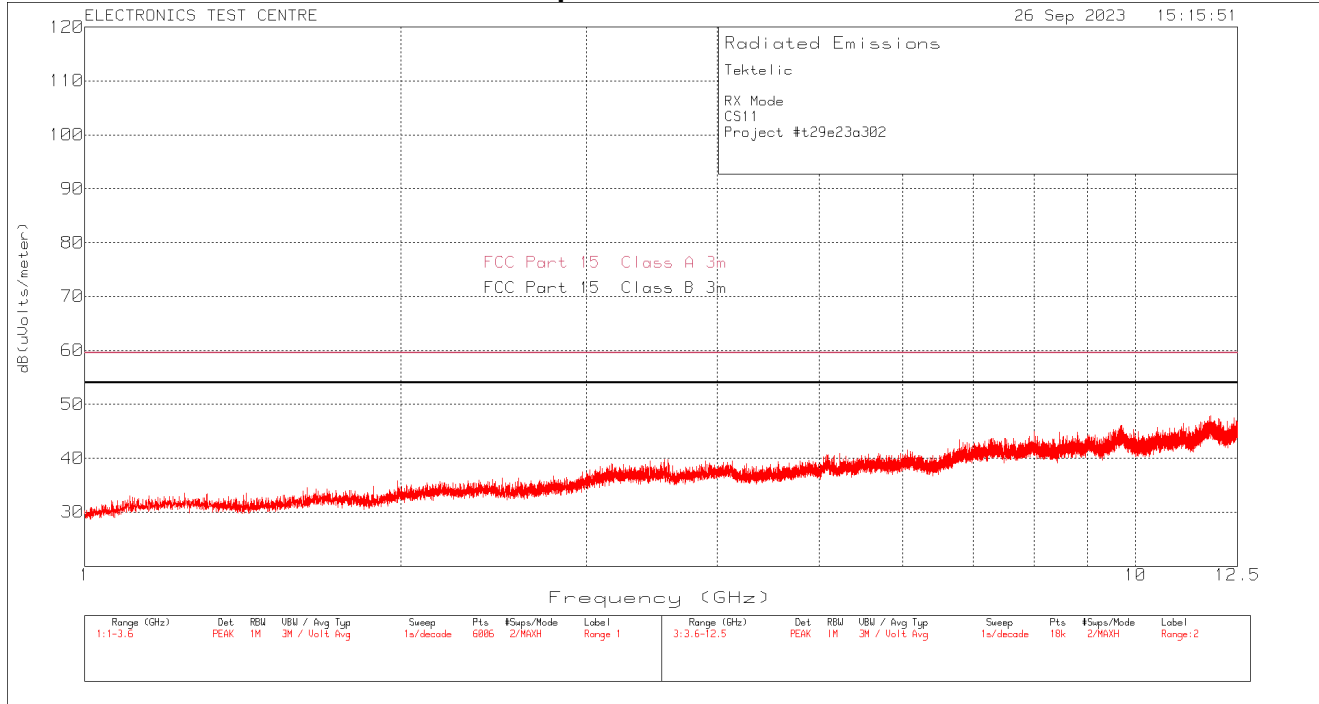

## Plot of Radiated Emissions: Vertical polarization

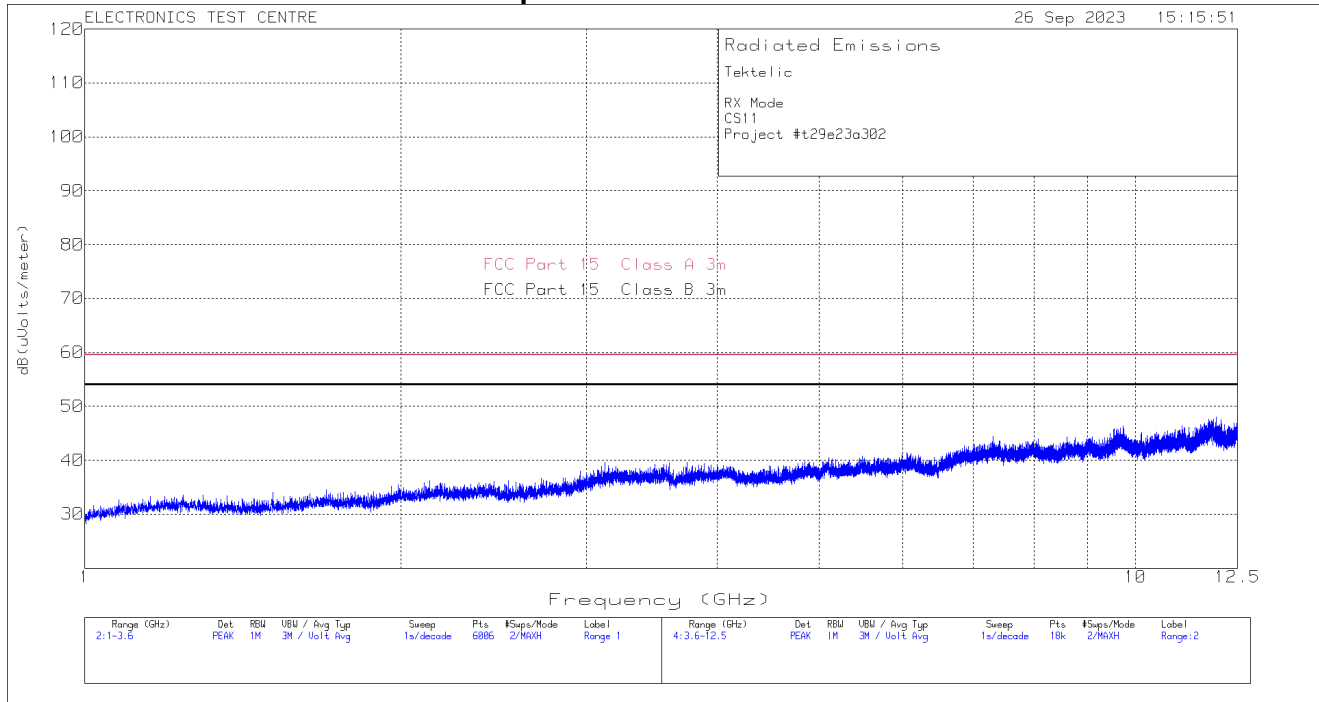



## 2.10 RF Exposure

Test Lab: Electronics Test Centre, Airdrie	EUT: Seal/Seal Ex
Test Personnel:	Standard: FCC PART 15.247
Date:	
<b>EUT status: Compliant</b>	

**Compliant:** RF exposure assessment to be provided in a separate Exhibit.

## **3.0 TEST FACILITY**

### **3.1 Location**

The Seal/Seal Ex was tested at the Electronics Test Centre laboratory located in Airdrie, Alberta, Canada. The Radio Frequency Anechoic Chamber (RFAC), identified as Chamber 1, has a usable working space measuring 10.6 m long x 7.3 m wide x 6.5 m high.

Measurements taken at this site are accepted by Industry Canada as evidence of conformity per registration file # 2046A. This site is also listed with the FCC under Registration Number CA2046.

The floor, walls and ceiling consist of annealed steel panels. The walls and ceiling are covered with ferrite tile, augmented by RF absorbant foam material on the end wall nearest the turntable, and on the adjacent walls and the ceiling. The chamber floor supports a 15 cm high internal floor, constructed of annealed steel panels, that forms the ground plane, and is bonded to the chamber walls.

The 3-m diameter turntable is flush-mounted with the floor. A sub-floor cable-way is provided to route cables between the turntable pit and EUT support equipment located in the Control Room. Cables reach the EUT through an opening in the centre of the turntable.

Test instrumentation and EUT support equipment is located in the Control Room, consisting of two shielded vestibules joined together at the side of the main room. Cables are routed through bulkhead panels between the rooms and the test chamber as required. Power feeds are routed into the main room and vestibules through line filters providing at least 100 dB of attenuation between 10 kHz and 10 GHz.

Either floor mounted or table-top equipment can be tested at this facility.


### **3.2 Grounding Plan**

The Seal/Seal Ex was placed at the center of the test chamber turntable on top of an 80-cm high polystyrene foam table below 1GHz and at 1.5m high polystyrene foam table above 1 GHz for transmits mode and 80cm high for RX mode. No provision is made within the Seal/Seal Ex for an earth ground connection.

### **3.3 Power Supply**

For radiated Emission new three AA batteries was used. For antenna port conducted emission power supplied via DC power supply.

## Appendix A – Test Setup Block Diagram

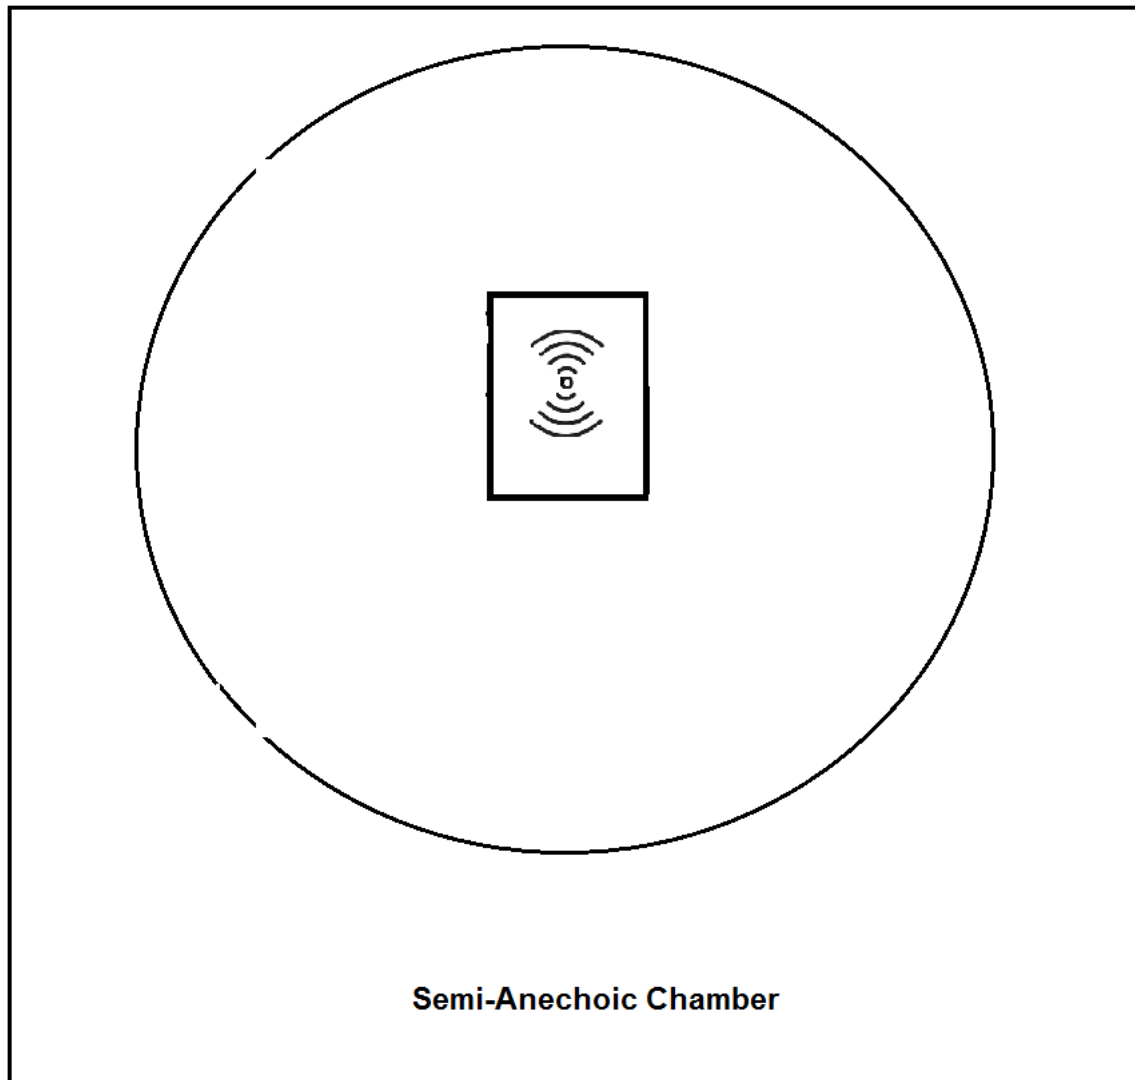

# End of Document