

Duracell U.S. Operations, Inc.

RF TEST REPORT

Report Type:
FCC Part 15C RF report

Model:
MBA250W-219Wh-120V

REPORT NUMBER:
231000636SHA-001

ISSUE DATE:
October 21, 2023

DOCUMENT CONTROL NUMBER:
TTRFFCCPART15C_V1 © 2018 Intertek



TEST REPORT

Telephone: 86 21 6127 8200

www.intertek.com

Report no.: 231000636SHA-001

Applicant : Duracell U.S. Operations, Inc.
Berkshire Corporate Park, 14 Research Drive, BETHEL CT 06801

Manufacturer : Duracell U.S. Operations, Inc.
Berkshire Corporate Park, 14 Research Drive, BETHEL CT 06801

Manufacturer Site : NanChang Innotech International Co., Ltd
Building No.6, Guowei Industrial Park, No.669 Huangtang E Rd, Linkong
Economic Zone, NANCHANG, Jiangxi

Type/Model: : MBA250W-219Wh-120V

FCC ID : 2AMUD-M250

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2021): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:

REVIEWED BY:



Project Engineer
Dylan Tang



Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	6
1.3 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS.....	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST.....	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST	8
2.5 TEST ENVIRONMENT CONDITION:.....	8
2.6 INSTRUMENT LIST	9
2.7 MEASUREMENT UNCERTAINTY	10
3 RADIATED EMISSIONS	11
3.1 LIMIT	11
3.2 MEASUREMENT PROCEDURE	11
3.3 TEST CONFIGURATION	12
3.4 TEST RESULTS OF RADIATED EMISSIONS	14
4 CONDUCTED EMISSIONS	17
4.1 LIMIT	17
4.2 TEST CONFIGURATION	17
4.3 MEASUREMENT PROCEDURE	18
4.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	19
5 ANTENNA REQUIREMENT	21

Revision History

Report No.	Version	Description	Issued Date
231000636SHA-001	Rev. 01	Initial issue of report	October 21, 2023

Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Radiated emissions	15.209	Pass
Conducted emissions	15.207	Pass
Antenna requirement	15.203	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Portable Power Station
Type/Model:	MBA250W-219Wh-120V
Description of EUT:	The EUT is Portable Power Station which supports Wireless Charger function, it has only one model.
Rating:	219Wh, 14.6V, 15Ah Dock Input: 24VDC 2.5A (60W Max.) USB-C Input/Output: 5VDC 3A, 9VDC 3A, 15VDC 3A, 20VDC 3A, 20VDC 5A (100W Max) AC Output: 120V~, 0.83A, 60Hz, 100W Max. USB-C Output: 5VDC 3A, 9VDC 3A, 15VDC 3A, 20VDC 3A (60W Max.) USB-Ax2 Output: 5VDC 3A, 9VDC 3A, 12VDC 3A, 20VDC 3A (60W Max.) Wireless charger output: 15W Max. AC and DC total output: 248W Max. Ring Light: 2W Max.
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	0
Hardware Version:	V3
Sample received date:	October 17, 2023
Date of test:	October 17, 2023 ~ October 21, 2023

1.2 Technical Specification

Frequency Range:	111kHz – 145kHz
Modulation:	ASK
Antenna:	Inductive loop coil antenna

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2021)

ANSI C63.10 (2013)

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency are specified if used.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Brand and Model	Description
1	Wireless load	Iphone X	100% power level
2	Wireless load	Iphone X	50% power level
3	Wireless load	Iphone X	0% power level

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	25°C	54% RH
Power line conducted emission	24°C	54% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2024-02-08
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2023-11-09
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2024-06-04
<input checked="" type="checkbox"/>	Attenuator	Huaxiang	Ts5-10db-6g	EC 6194-1	2023-12-07
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2024-01-11
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-08-24
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR	EC6501	2024-09-05
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-08-23
<input type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2024-02-15
<input type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2023-12-07
<input type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2024-08-28
<input type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2024-07-29
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2024-07-16
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-08
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2024-03-24
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2024-08-16

TEST REPORT

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.90 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

3 Radiated emissions

Test result: Pass

3.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

3.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are

TEST REPORT

set to make the measurement.


- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported

3.3 Test Configuration


For Radiated emission below 30MHz:

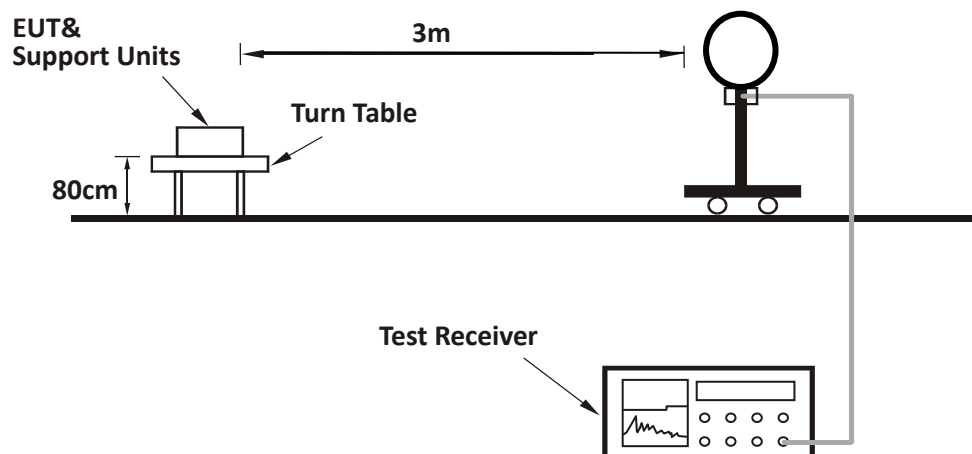

For Radiated emission 30MHz to 1GHz:

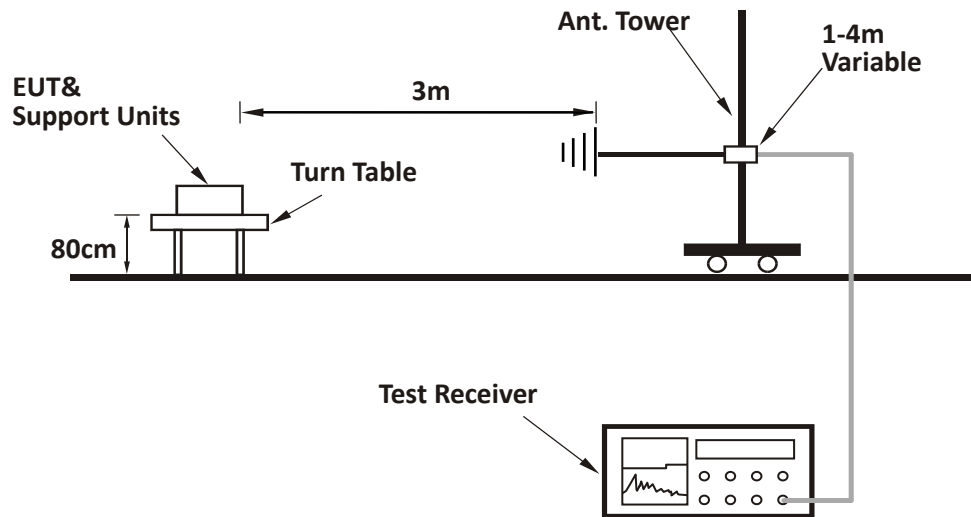

For Radiated emission above 1GHz:

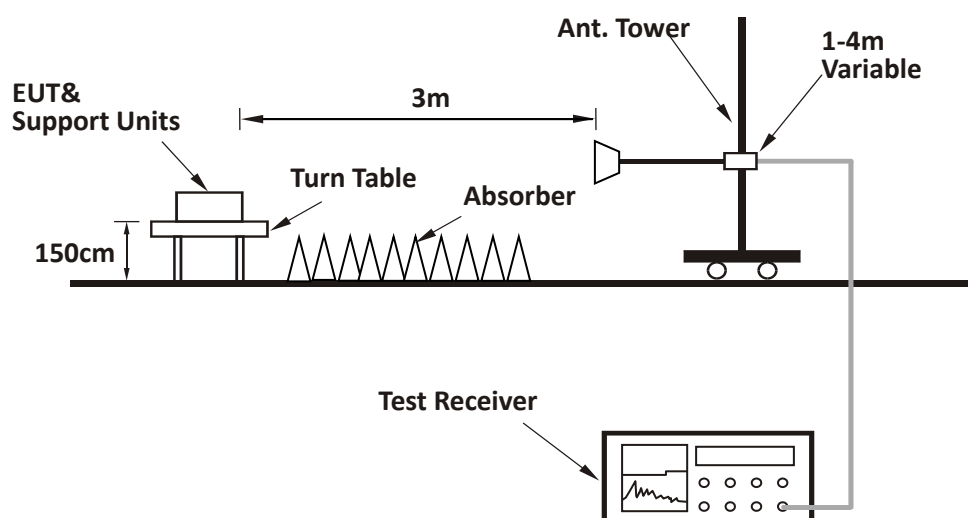

TEST REPORT


3.4 Test Results of Radiated Emissions

EUT was tested with empty load, half load and full load, the full load is the worst case and we listed the results in the report.


Test data below 30MHz:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector	Remark
X	0.1293	80.1	20.1	105.4	25.3	PK	Fundamental
X	0.1000	57.7	20.1	127.6	69.9	PK	Spurious
X	0.4200	65.3	20.1	95.1	29.8	PK	Spurious
X	0.5190	65.8	20.2	73.3	7.5	PK	Spurious
X	0.6000	65.8	20.2	72.0	6.2	PK	Spurious
X	0.7530	60.0	20.1	70.1	10.1	PK	Spurious
X	10.163	43.1	20.4	69.5	26.4	PK	Spurious
Y	0.1293	75.4	20.1	104.7	29.3	PK	Fundamental
Y	0.0101	70.0	20.1	127.5	57.5	PK	Spurious
Y	0.4515	64.5	20.1	94.5	30.0	PK	Spurious
Y	0.5460	65.5	20.2	72.9	7.4	PK	Spurious
Y	0.6630	62.5	20.2	71.2	8.7	PK	Spurious
Y	0.7665	56.5	20.1	69.9	13.4	PK	Spurious
Y	7.134	46.4	20.4	69.5	23.1	PK	Spurious
Z	0.1292	74.5	20.1	104.6	30.1	PK	Fundamental
Z	0.0239	51.5	20.1	120.0	68.5	PK	Spurious
Z	0.4245	63.1	20.1	95.0	31.9	PK	Spurious
Z	0.4920	67.6	20.2	73.8	6.2	PK	Spurious
Z	0.5865	63.7	20.2	72.2	8.5	PK	Spurious
Z	0.7035	61.9	20.2	70.7	8.8	PK	Spurious
Z	7.328	41.9	20.4	69.5	27.6	PK	Spurious

Horizontal

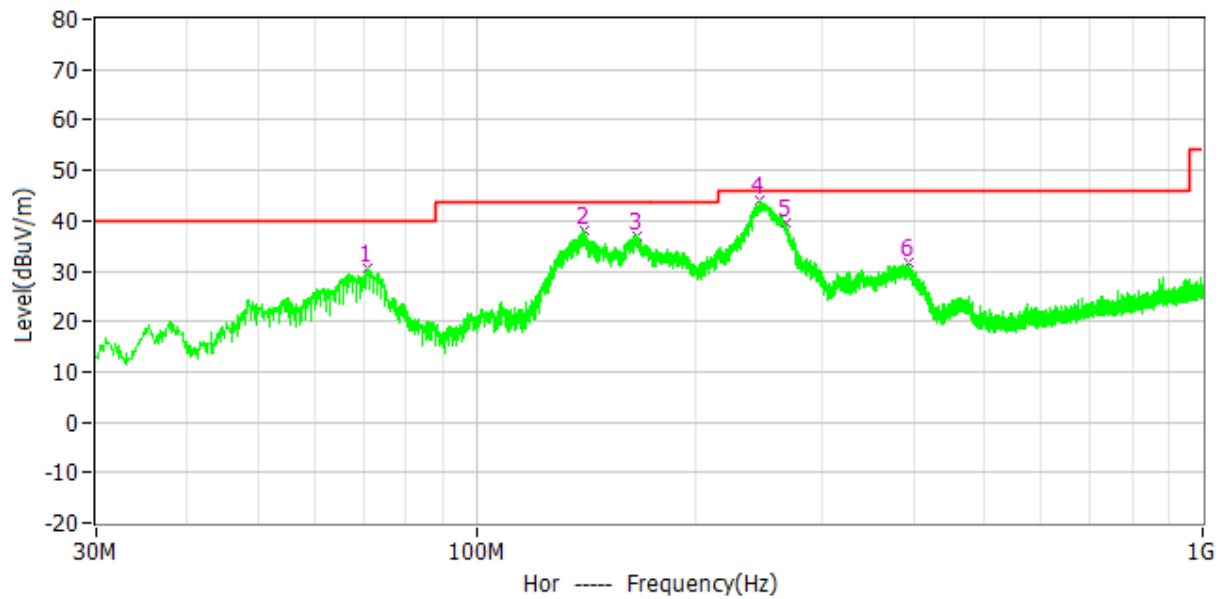

Vertical

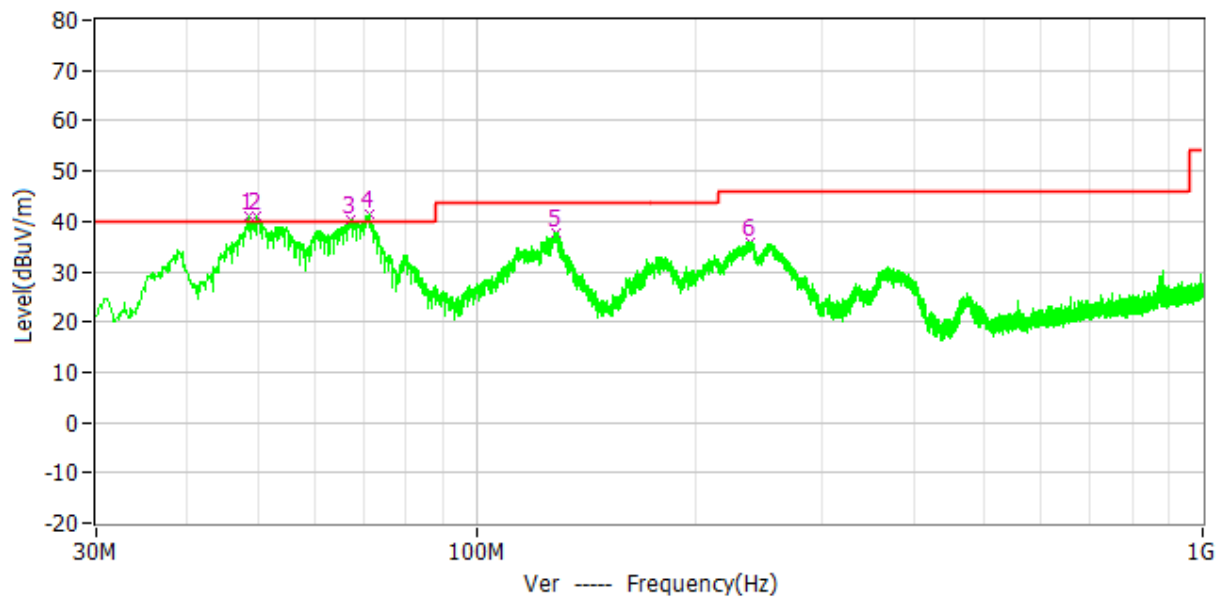

TEST REPORT

Test data from 30MHz to 1000MHz:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
H	70.740	30.6	12.3	40.0	9.4	QP
H	140.580	37.9	14.1	43.5	5.6	QP
H	166.285	37.1	14.1	43.5	6.4	QP
H	245.825	44.1	13.2	46.0	1.9	QP
H	267.650	39.4	14.0	46.0	6.6	QP
H	394.623	31.5	17.4	46.0	14.5	QP
V	48.527	39.6	14.3	40.0	0.4	QP
V	49.982	39.7	14.4	40.0	0.3	QP
V	67.345	39.5	12.8	40.0	0.5	QP
V	71.225	39.8	12.2	40.0	0.2	QP
V	128.843	37.8	13.0	43.5	5.7	QP
V	238.065	35.9	12.9	46.0	10.1	QP

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

4 Conducted emissions


Test result: **PASS**

4.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

4.2 Test Configuration

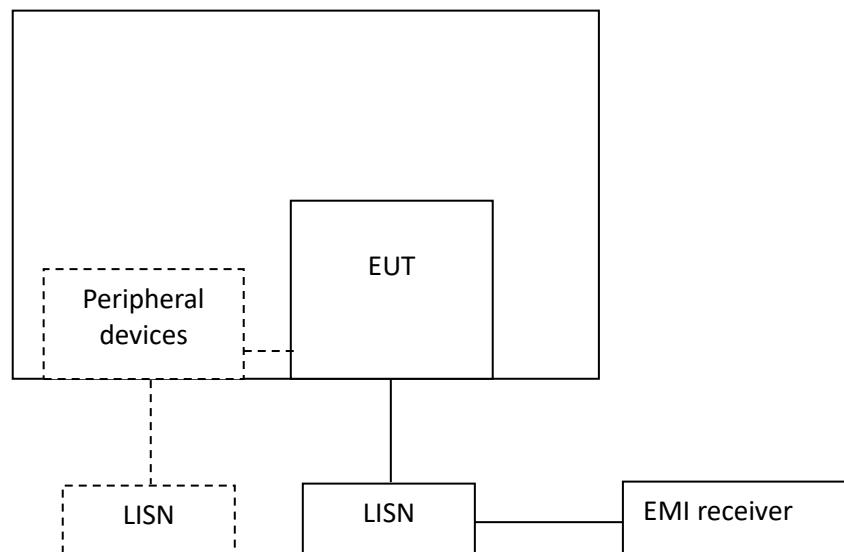

TEST REPORT**4.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.



The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT

4.4 Test Results of Conducted Emissions

EUT was tested with empty load, half load and full load, the full load is the worst case and we listed the results in the report.

Test Curve:

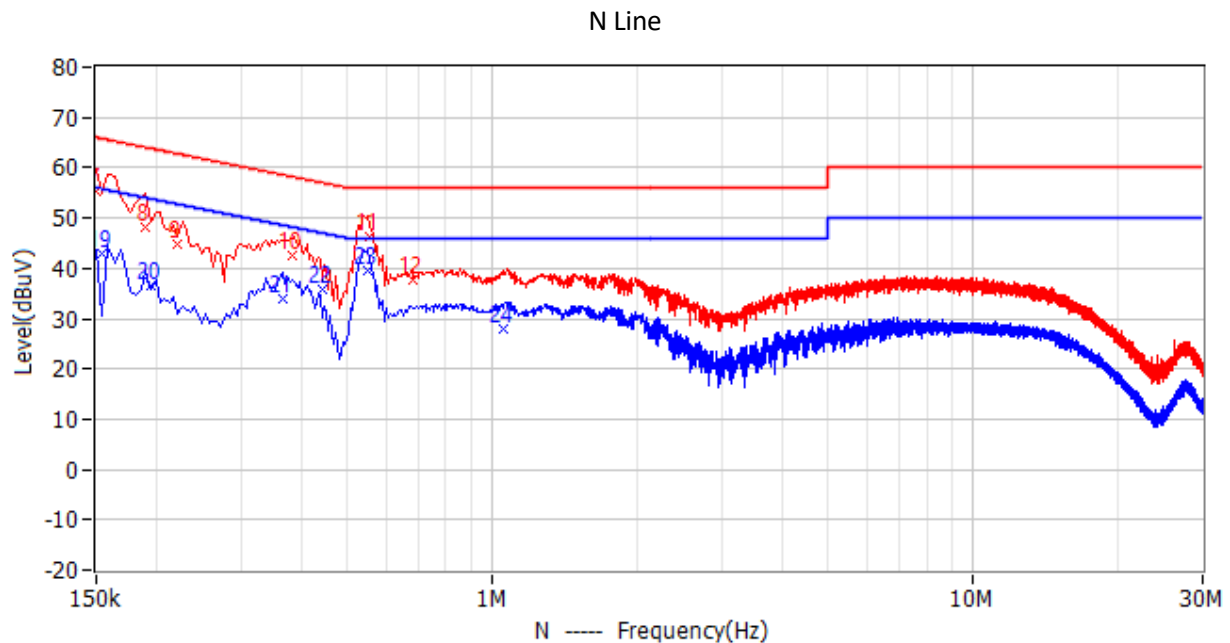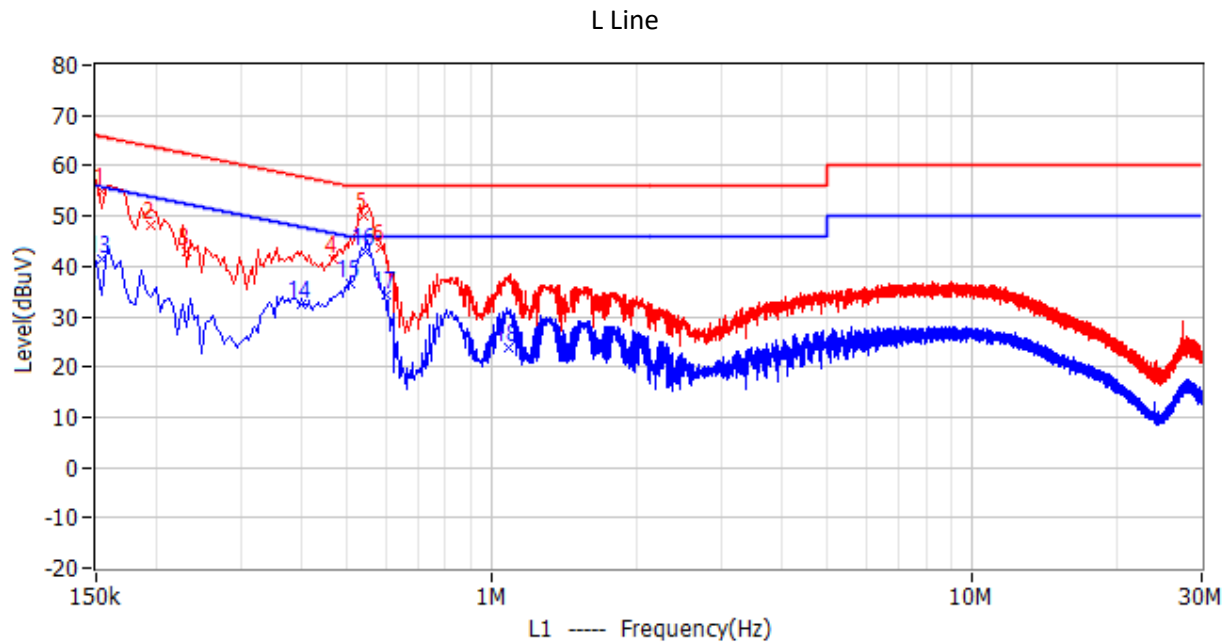

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	154.500kHz	65.8	54.9	10.9	48.7	6.2	QP	L1
2	195.000kHz	63.8	48.1	15.7	41.8	6.3	QP	L1
3	231.000kHz	62.4	43.1	19.3	36.8	6.3	QP	L1
4	469.500kHz	56.5	41.6	15.0	35.4	6.2	QP	L1
5	541.500kHz	56.0	50.1	5.9	43.8	6.3	QP	L1
6	586.500kHz	56.0	43.7	12.3	37.4	6.3	QP	L1
7	150.000kHz	66.0	55.1	10.9	48.9	6.2	QP	N
8	190.500kHz	64.0	48.1	15.9	41.9	6.2	QP	N
9	222.000kHz	62.7	44.9	17.9	38.6	6.3	QP	N
10	384.000kHz	58.2	42.6	15.6	36.4	6.2	QP	N
11	555.000kHz	56.0	46.3	9.7	40.1	6.2	QP	N
12	685.500kHz	56.0	37.5	18.5	31.2	6.3	QP	N
13	154.500kHz	55.8	41.5	14.2	35.3	6.2	AV	L1
14	402.000kHz	47.8	32.3	15.5	26.1	6.2	AV	L1
15	505.500kHz	46.0	36.6	9.4	30.3	6.3	AV	L1
16	546.000kHz	46.0	43.1	2.9	36.8	6.3	AV	L1
17	600.000kHz	46.0	34.4	11.6	28.1	6.3	AV	L1
18	1.086MHz	46.0	23.8	22.2	17.4	6.4	AV	L1
19	154.500kHz	55.8	43.1	12.7	36.8	6.3	AV	N
20	195.000kHz	53.8	36.6	17.2	30.3	6.3	AV	N
21	366.000kHz	48.6	34.1	14.5	27.9	6.2	AV	N
22	442.500kHz	47.0	35.8	11.2	29.6	6.2	AV	N
23	550.500kHz	46.0	39.7	6.3	33.5	6.2	AV	N
24	1.055MHz	46.0	27.8	18.2	21.5	6.3	AV	N

Remark: 1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Reading = Original Receiver Reading + Factor

3. Margin = Limit - Level

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

5 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****