

ISED CABid: ES1909
Lab. Company Number: 4621A

Test Report No:
80874RRF.002A1

Test Report

USA FCC Part 24

CANADA RSS-133

(*) Identification of item tested	LTE Cat 1 bis data module
(*) Trademark	u-blox
(*) Model and /or type reference	LEXI-R10011D
Other identification of the product	FCC ID: XPYUBX24AD02 IC: 8595A-UBX24AD02
(*) Features	LTE Cat1 bis, Wi-fi Scan / Locate HW version: UBX-463AD0 SW version: 01.07.A01.00
Applicant	u-blox AG Zürcherstrasse 68, CH-8800 Thalwil, Switzerland
Test method requested, standard	USA FCC Part 24 (10-1-23 Edition). CANADA RSS-133 Issue 7, July 2024. ANSI C63.26-2015. KDB 971168 D01 Power Meas License Digital Systems v03r01, April. 2018.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager
Date of issue	2025-04-24
Report template No	FDT08_25 (*) "Data provided by the client"



Index

Competences and guarantees3

General conditions.....3

Uncertainty.....3

Data provided by the client3

Usage of samples4

Test sample description.....4

Identification of the client6

Testing period and place6

Document history.....6

Environmental conditions6

Remarks and comments.....7

Testing verdicts.....8

Summary8

Appendix A: Test results for FCC 24 / RSS-1339

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación) to perform the tests indicated in the Certificate No. 51/LE 147. Tests conditions marked with “#” are out of the scope of ENAC accreditation.

DEKRA Testing and Certification is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a Cat1 bis data only module for industrial IoT applications.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results. The laboratory is not responsible for such information and it is not covered by accreditation.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date Reception of	Application
S/01	80874/013	LTE Cat 1 bis data module	LEXI-R10011D	-	2024-11-05	Element Under Test
S/01	80874/008	Antenna	-		2024-11-05	Auxiliary Element
S/01	80874/009	Antenna GPS	-		2024-11-05	Auxiliary Element
S/01	80874/010	AC/DC	-	-	2024-11-05	Auxiliary Element
S/01	80874/005	USB Cable	-	-	2024-11-05	Auxiliary Element
S/01	80874/011	USB Cable	-	-	2024-11-05	Auxiliary Element

Notes referenced to samples during the project:

Id	Type
S/01	Radiated and conducted tests.

Test sample description

Ports.....:	Port name and description	Cable					
		Specified max length [m]	Attached during test		Shielded		
	USB	2	☒		☒		
Supplementary information to the ports.....:	-						
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: Min: 3.3, Typical: 3.8, Max: 4.5					
Rated Power..... :	-						
Clock frequencies..... :	26 MHz						
Other parameters	-						
Software version..... :	01.07.A01.00						
Hardware version	UBX-463AD0						
Dimensions in cm (W x H x D) ... :	1.6 x 0.2 x 1.6						
Mounting position	☐	Table top equipment					
	☐	Wall/Ceiling mounted equipment					
	☐	Floor standing equipment					
	☐	Hand-held equipment					
	☒	Other: Industrial modem component					
Modules/parts..... :	Module/parts of test item		Type		Manufacturer		
	-		-		-		
Accessories (not part of the test item)	Description		Type		Manufacturer		
	Power supply unit		UUX324-1215		Unifive		
	Antenna		GSA.8835		Taoglass		
Documents as provided by the applicant	Description		File name		Issue date		
	-		-		-		

Identification of the client

u-blox AG
Zürcherstrasse 68, CH-8800 Thalwil, Switzerland

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2024-11-14
Date (finish)	2025-02-19

Document history

Report number	Date	Description
80874RRF.002	2025-03-25	First release.
80874RRF.002A1	2025-04-24	Second release. Modification due to typos. This test reports cancels and replaces to 80874RRF.002

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semi-anechoic chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Antonio Maireles, Carmen Vázquez, Sergio Carrasco.

Used instrumentation:

Control No.	Equipment	Next Calibration
08002	TEMPERATURE CHAMBER BINDER MK 56	2026-02-12
09555	TWO CHANNEL POWER SUPPLY, 32V, 10/5A, 188W ROHDE AND SCHWARZ HMP2020	N/A
07794	SIGNAL AND SPECTRUM ANALYZER 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2025-04-21
08912	WIDEBAND RADIO COMMUNICATION TESTER ROHDE AND SCHWARZ CMW500	2025-10-05
06043	POWER DIVIDER, DC-26 GHz TEKTRONIX 5333	N/A
06792	SHIELDED ROOM ETS LINDGREN S101	N/A
06609	TEMPERATURE AND HUMIDITY PROBE HW GROUP HWg-STE	2025-04-22
06615	TEMPERATURE AND HUMIDITY PROBE HW GROUP HWg-STE	2025-04-04
06165	EMI TEST RECEIVER 9 kHz-7 GHz ROHDE AND SCHWARZ ESR7	2025-12-27
07611	PREAMPLIFIER BOX INTERNO -	2026-01-23
04578	HYBRID BILOG ANTENNA 30 MHz - 6 GHz ETS LINDGREN 3142E	2026-06-01
07692	ATTENUATOR 3 dB, 2 W, DC, 18 GHz TECHNIWAVE TWTS2G	2026-02-03
04716	SIGNAL AND SPECTRUM ANALYZER 2 Hz - 50 GHz ROHDE AND SCHWARZ FSW50	2026-08-02
05705	PRE-AMPLIFIER G>40dB, 1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2025-07-18
04611	HORN ANTENNA 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2026-01-16
06157	SIGNAL AND SPECTRUM ANALYZER 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2025-01-18
08856	PRE-AMPLIFIER G>30 dB, 17-40 GHz BONN ELEKTRONIK BLMA 1840-4A	2025-02-27
04657	HORN ANTENNA 18-40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2026-06-12
04848	EMC/RF Testing SW ROHDE AND SCHWARZ EMC32	N/A

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

LTE Cat 1bis Bands 2, 25.

FCC 24 / RSS-133		
Requirement – Test case	Verdict	Remark
FCC 24.232 / RSS-133 6.4: RF Output Power	P	
FCC 2.1047 / RSS-133 6.2: Modulation characteristics	P	
FCC 24.235 / RSS-133 6.3: Frequency stability	P	
FCC 2.1049: Occupied Bandwidth	P	
FCC 24.238 / RSS-133 6.5: Spurious emissions at antenna terminals	P	
FCC 24.238 / RSS-133 6.5: Spurious emissions at antenna terminals at Block Edges	P	
FCC 24.238 / RSS-133 6.5: Radiated Emissions	P	
<u>Supplementary information and remarks:</u> None.		

Appendix A: Test results for FCC 24 / RSS-133

INDEX

TEST CONDITIONS11

RF Output Power11

Frequency Stability18

Modulation Characteristics21

Occupied Bandwidth23

Spurious emissions at antenna terminals23

Spurious emissions at antenna terminals at Block Edges51

Radiated emissions51

TEST CONDITIONS

POWER SUPPLY (*):

Vnominal: 3.8 Vdc
Vminimum: 3.3 Vdc
Vmaximum: 4.5 Vdc

Type of Power Supply: DC External (USB).

ANTENNA (*):

MIDDLE BAND		ANTENNA TYPE
LTE Cat 1bis Bands 2, 25	-1.41 dBi	External (Taoglass GSA_8835 (standard reference antenna provided with EVK))

TEST FREQUENCIES:

LTE Cat 1bis Band 2. QPSK and 16QAM:

	Channel per BW=(Frequency, MHz)			
	BW=5 MHz	BW=10 MHz	BW=15 MHz	BW=20 MHz
Low	18625 (1852.5)	18650 (1855)	18675 (1857.5)	18700 (1860)
Middle	18900 (1880)	18900 (1880)	18900 (1880)	18900 (1880)
High	19175 (1907.5)	19150 (1905)	19125 (1902.5)	19100 (1900)

NOTE: LTE Cat 1bis Band 2 is completely included in LTE Cat 1bis Band 25, so the channels of the LTE Cat 1bis Band 25 were tested to give conformity to the assigned block.

LTE Cat 1bis Band 25. QPSK and 16QAM:

	Channel per BW=(Frequency, MHz)					
	BW=1.4 MHz	BW=3 MHz	BW=5 MHz	BW=10 MHz	BW=15 MHz	BW=20 MHz
Low	26047 (1850.7)	26055 (1851.5)	26065 (1852.5)	26090 (1855)	26115 (1857.5)	26140 (1860)
Middle	26365 (1880)	26365 (1880)	26365 (1882.5)	26365 (1882.5)	26365 (1882.5)	26365 (1882.5)
High	26683 (1914.3)	26675 (1913.5)	26665 (1912.5)	26640 (1910)	26615 (1907.5)	26590 (1905)

RF Output Power

Limits

* FCC § 2.1046 and § 24.232:

Mobile/portable stations are limited to 2 Watts (33 dBm) Effective Isotropic Radiated Power (E.I.R.P.).
The peak-to-average ratio (PAR) of the transmission shall not exceed 13 dB.

* RSS-133 Clause 6.4:

Mobile stations and hand-held portables are limited to 2 watts maximum e.i.r.p. The peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the High PAPR during periods of continuous transmission.

Method

The conducted RF output power measurements were made at the RF output terminals of the EUT using the power meter of the Universal Radio Communication tester CMW500, selecting maximum transmission power of the EUT and different modes of modulation.

The peak-to-average power ratio (PAPR) is measured using an attenuator, power splitter and spectrum analyser with a Complementary Cumulative Distribution Function implemented.

The maximum equivalent isotropically radiated power (e.i.r.p.) is calculated by adding the declared maximum antenna gain (dBi).

The maximum effective radiated power e.r.p. is calculated from the maximum equivalent isotropically radiated power (e.i.r.p.) by subtracting 2.15 dB:


$$\text{E.R.P.} = \text{E.I.R.P.} - 2.15 \text{ dB}$$

Test Setup

1. CONDUCTED AVERAGE POWER:



2. PEAK-TO-AVERAGE POWER RATIO (PAPR) and Conducted Average power:

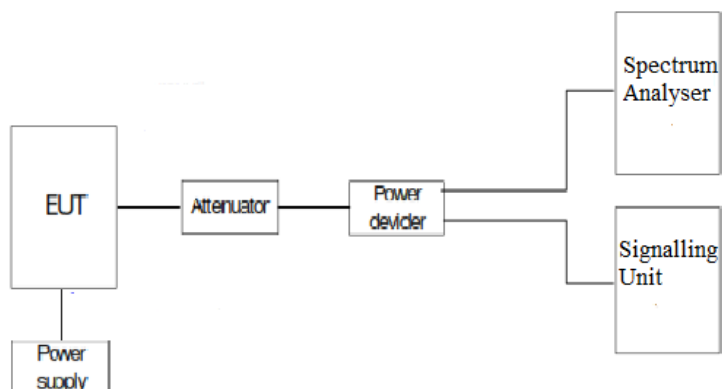

Results

1. CONDUCTED AVERAGE POWER:

LTE Cat 1bis Band 25:

Worst-case of RF Power is BW=5 MHz, High Channel, QPSK, RB Size=1, RB Offset=12.

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)
5	Low 26065	1852,5	QPSK	1	0	23.13
				1	12	23
				1	24	22.92
				12	0	22.13
				12	6	22.1
				12	11	22.1
				25	0	22.12
			16-QAM	1	0	22.4
				1	12	22.34
				1	24	22.27
				12	0	21.31
				12	6	21.27
				12	11	21.27
	Middle 26365	1882,5	QPSK	25	0	21.27
				1	0	23.18
				1	12	23.2
				1	24	23.02
				12	0	22.27
				12	6	22.23
				12	11	22.19
				25	0	22.21
			16-QAM	1	0	22.28
				1	12	22.3
				1	24	22.12
				12	0	21.44
				12	6	21.46
				12	11	21.41
	High 26665	1912,5	QPSK	25	0	21.35
				1	0	23.31
				1	12	23.54
				1	24	23.11
				12	0	22.37
				12	6	22.47
				12	11	22.45
			16-QAM	25	0	22.38
				1	0	22.26
				1	12	22.56
				1	24	22.16

				12	0	21.59
				12	6	21.68
				12	11	21.65
				25	0	21.57

BW=5 MHz. QPSK:

MAX POWER	QPSK COND. POWER AVG (dBm)	ANTENNA GAIN (dBi)	RAD. POWER AVG EIRP (dBm)	RAD. POWER AVG ERP (dBm)
LOW	23.13	-1.41	21.72	19.57
MIDDLE	23.2	-1.41	21.79	19.64
HIGH	23.54	-1.41	22.13	19.98
MAX:	23.54		22.13	19.98

BW=5 MHz. 16QAM:


MAX POWER	16QAM COND. POWER AVG (dBm)	ANTENNA GAIN (dBi)	RAD. POWER AVG EIRP (dBm)	RAD. POWER AVG ERP (dBm)
LOW	22.4	-1.41	20.99	18.84
MIDDLE	22.3	-1.41	20.89	18.74
HIGH	22.56	-1.41	21.15	19
MAX:	22.56		21.15	19

2. PEAK-TO-AVERAGE POWER RATIO (PAPR)


LTE Cat 1bis Band 25:

Worst-case of PAPR is BW=15 MHz, High Channel, 16QAM, RB Size=1, RB Offset=37.


Low Channel:

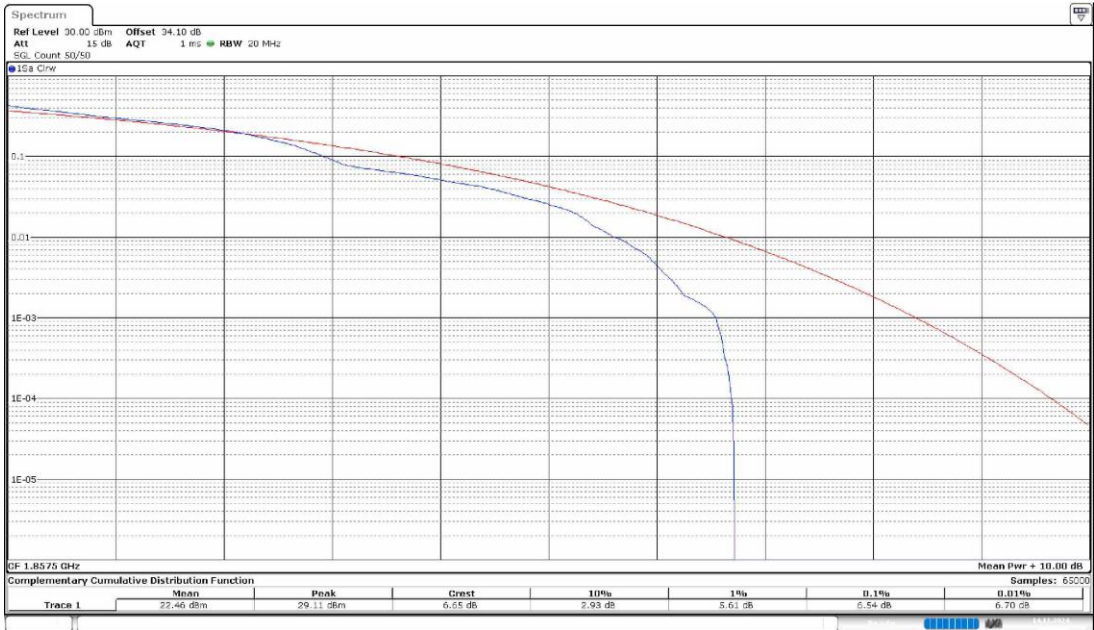

Middle Channel:

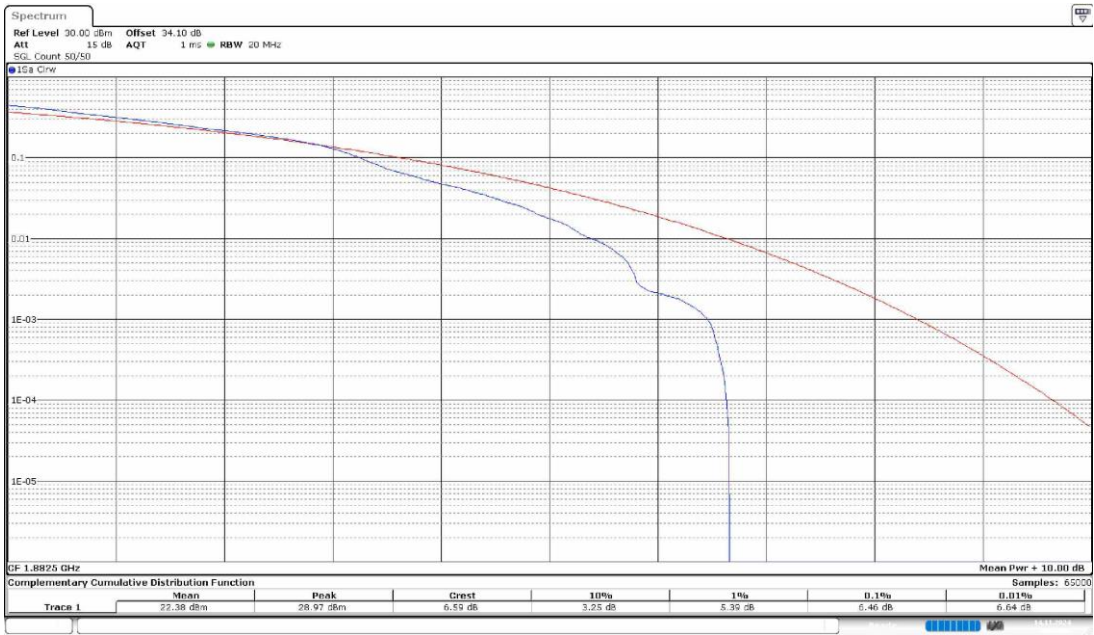

High Channel:

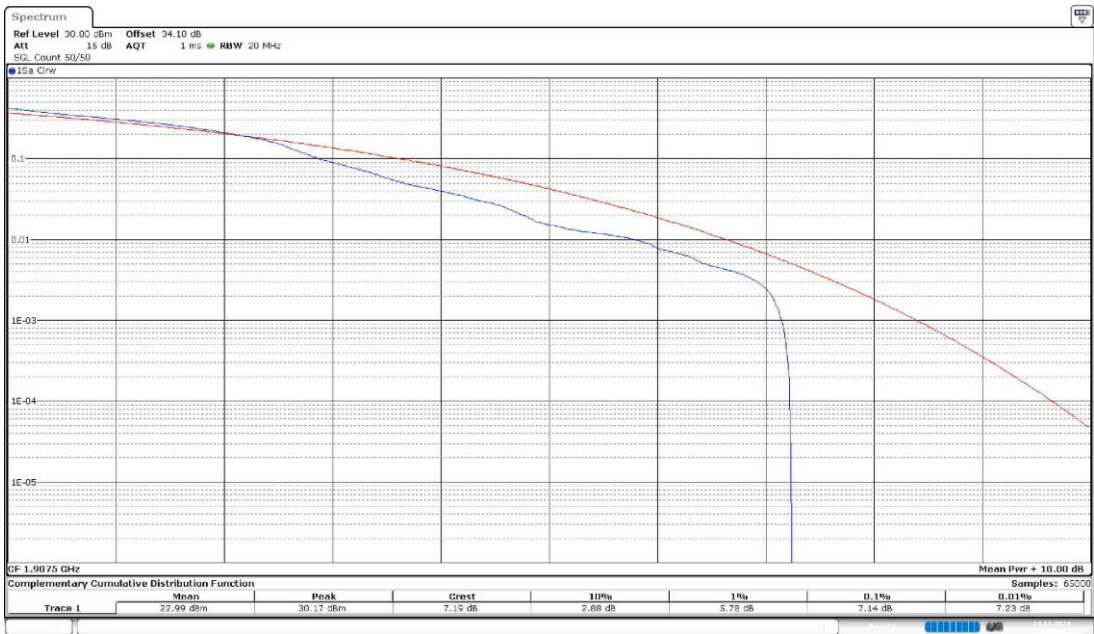

16QAM	Low	Middle	High
PAPR (dB)	6.54	6.46	7.14

Verdict

Pass

Frequency Stability

Limits

* FCC §2.1055 and §24.235. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

* RSS-133, Clause 6.3. The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

Method

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The supply voltage was varied between 85% and 115% of nominal voltage.

Temperature and voltage range of testing has been extended to the maximum and minimum values declared by customer.

The EUT was set in "Radio Resource Control (RRC) mode" on the middle channel using the Universal Radio Communication tester R&S CMW500 and the maximum frequency error was measured using the built-in calibrated frequency meter.


The worst case LTE mode for conducted power was used for the test.

In order to check that the frequency stability is sufficient such that the fundamental emissions stay within the authorized bands of operation, a reference point is established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channels of operation are identified as fL and fH respectively. The worst-case frequency offset determined in the above methods is added or subtracted from the values of fL and fH to check that the resulting frequencies remain within the band.


The reference point measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMW500 selecting maximum transmission power of the EUT and different modes of modulation.

Test Setup

Frequency tolerance:

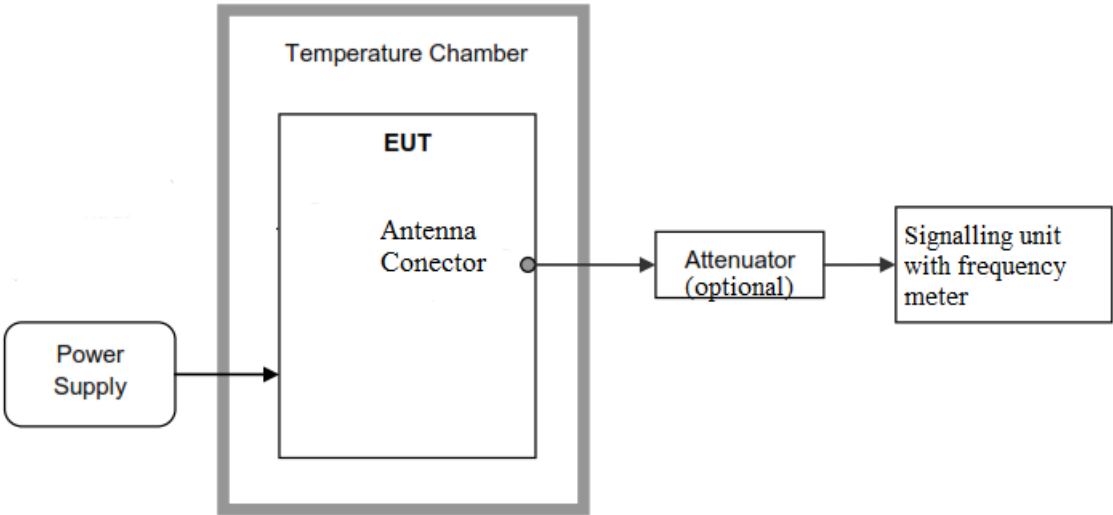

Reference points f_L and f_H :

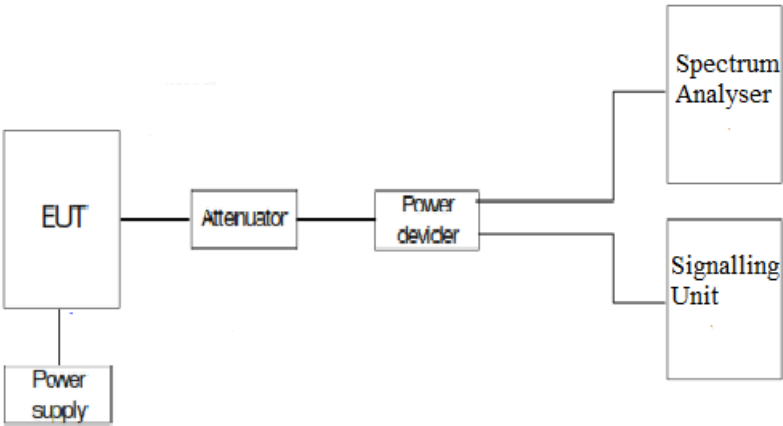

Results

LTE Cat 1bis Band 25:

The worst case modulation in terms of Frequency Stability is BW=1.4 MHz, QPSK, RB Size=1, RB Offset=0.

1. FREQUENCY TOLERANCE:

- Frequency stability over temperature variations.

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
+85 [#]	0.94	0.000499336
+80 [#]	4.15	0.002204515
+70 [#]	0.6	0.000318725
+60 [#]	0.99	0.000525896
+50	-0.36	-0.000191235
+40	-0.13	-6.90571E-05
+30	-1.88	-0.000998672
+20	-2.25	-0.001195219
+10	0.33	0.000175299
0	-1.02	-0.000541833
-10	-0.66	-0.000350598
-20	-0.13	-6.90571E-05
-30	-0.27	-0.000143426
-40 [#]	-0.06	-3.18725E-05

Tests conditions marked with “#” are out of the scope of ENAC accreditation.

- Frequency stability over voltage variations.

Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
Vmax	4.5	2.03	0.001078353
Vmin	3.3	1.86	0.000988048

2. REFERENCE FREQUENCY POINTS fL AND fH:

The worst-case frequency offsets added or subtracted per band and bandwidth:

fL (MHz)	1850.0325
fH (MHz)	1914.9716

The reference frequency points fL and fH stay within the authorized blocks for the band above.

Measurement uncertainty (Hz): <±223.94

Verdict

PASS

Modulation Characteristics


Limits

- * FCC §2.1047.
- * RSS-133. Clause 6.2. Equipment certified under this standard shall use digital modulation.

Method

For LTE the EUT operates with QPSK and 16QAM modes in which the information is digitised and coded into a bit stream. The RF transmission is multiplexed using *Orthogonal Frequency Division Multiplexing (OFDM)* using different possible arrangement of subcarriers (Resource Blocks RB).


Test Setup

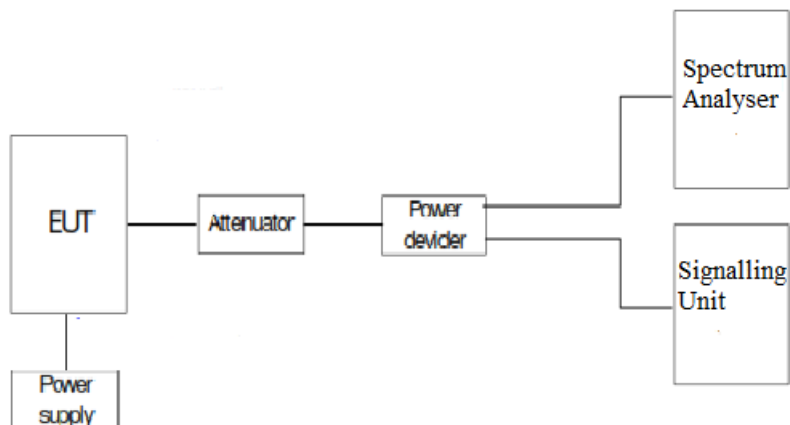


Results

The following plots show the modulation schemes in the EUT.

LTE Cat 1bis Band 2: BW=1.4 MHz. QPSK. RB Size=1. RB Offset=0. Middle Channel.

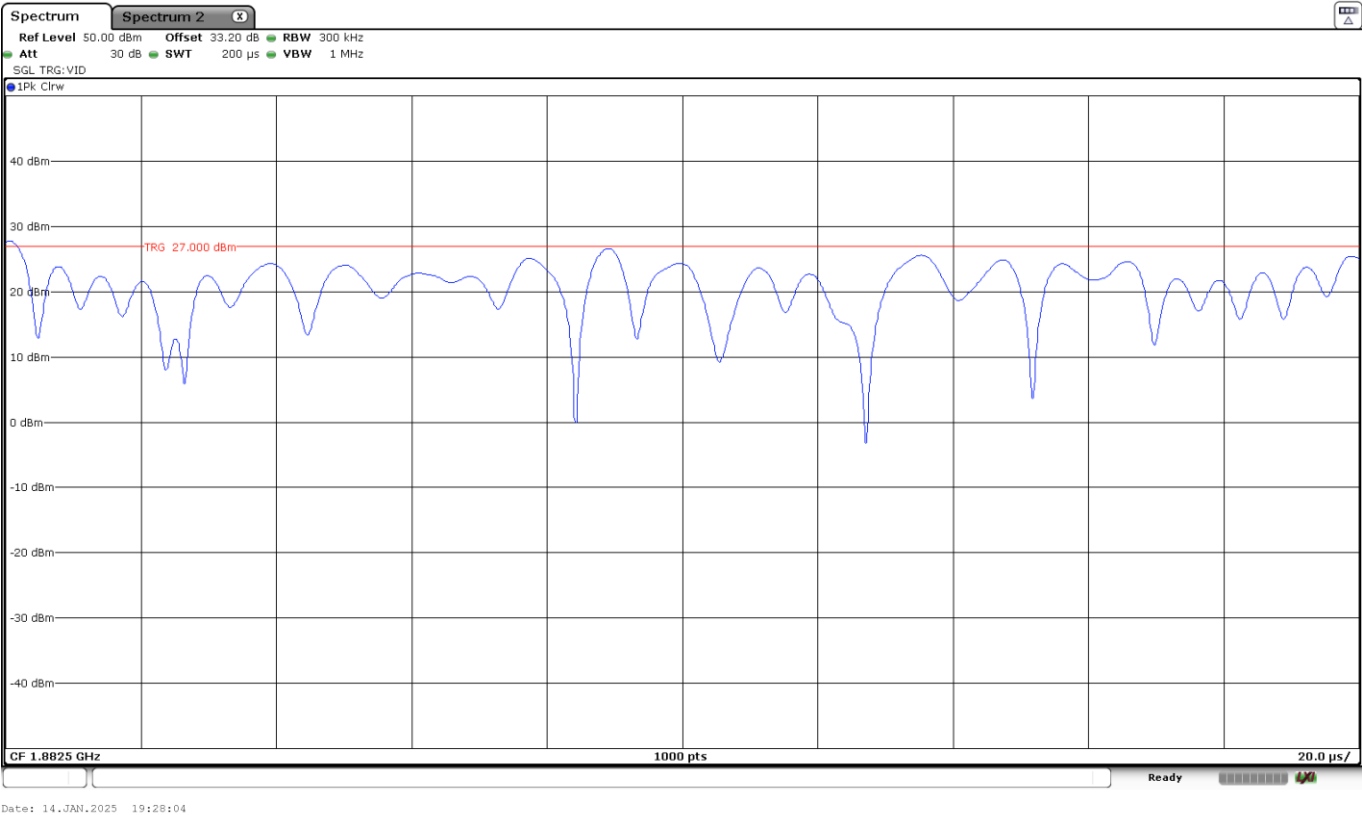

LTE Cat 1bis Band 2: BW=1.4 MHz. 16QAM. RB Size=1. RB Offset=0. Middle Channel.

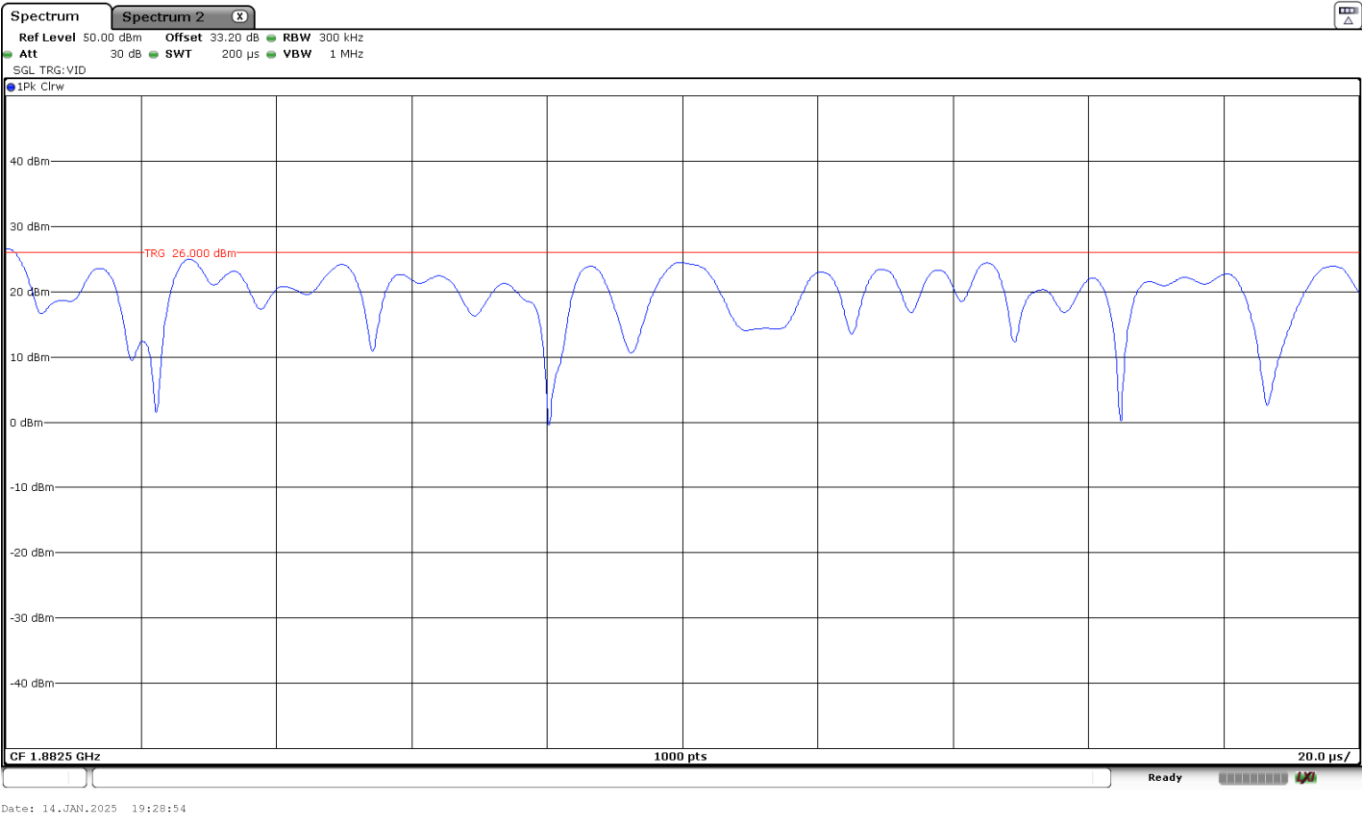

Occupied Bandwidth


Limits

- * FCC §2.1049: Measurements required: Occupied bandwidth.
- * RSS-Gen, 6.7: Occupied bandwidth (or 99% emission bandwidth).

Method

The occupied bandwidth measurement was performed at the output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMW500 selecting maximum transmission power of the EUT and different modes of modulation. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyser.

Test Setup

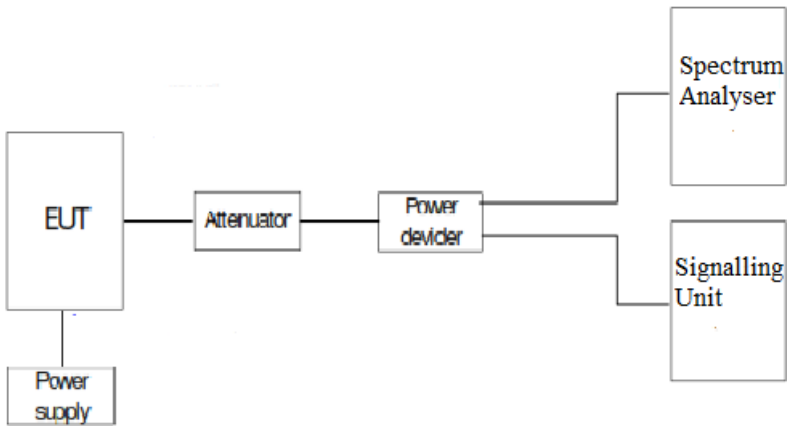

Results

The worst case per modulation is:

LTE Cat 1bis Band 25:

LTE Cat 1bis Band 25. BW=1.4 MHz. QPSK. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	1.0823058980	1.0823058980	1.0851049650
-26 dBc Bandwidth (MHz)	1.2567810000	1.2717090000	1.2679770000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=1.4 MHz. 16QAM. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	1.0841719430	1.0813728760	1.0851049650
-26 dBc Bandwidth (MHz)	1.2679770000	1.2577140000	1.2969010000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=1.4 MHz. QPSK. RB Size=All.


Low Channel:

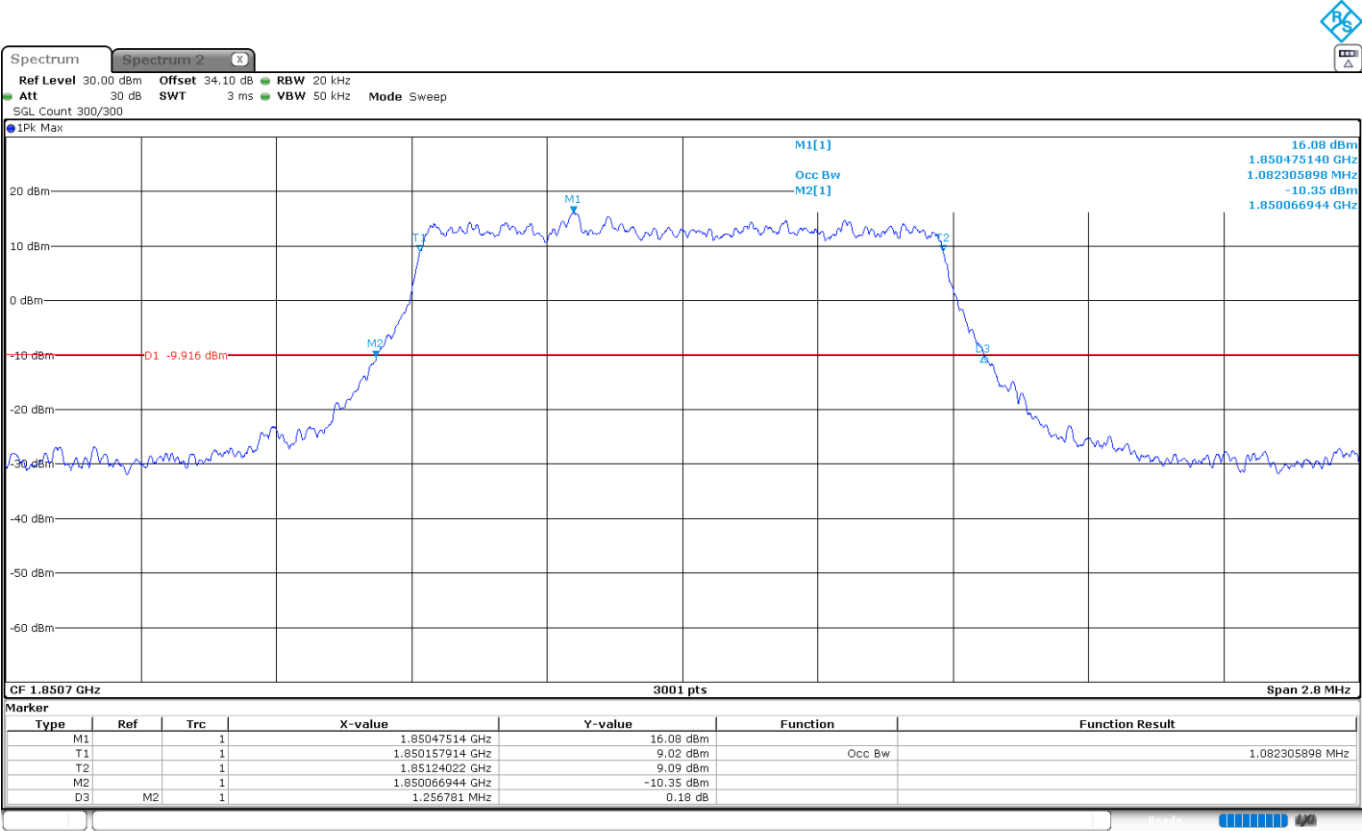

Middle Channel:

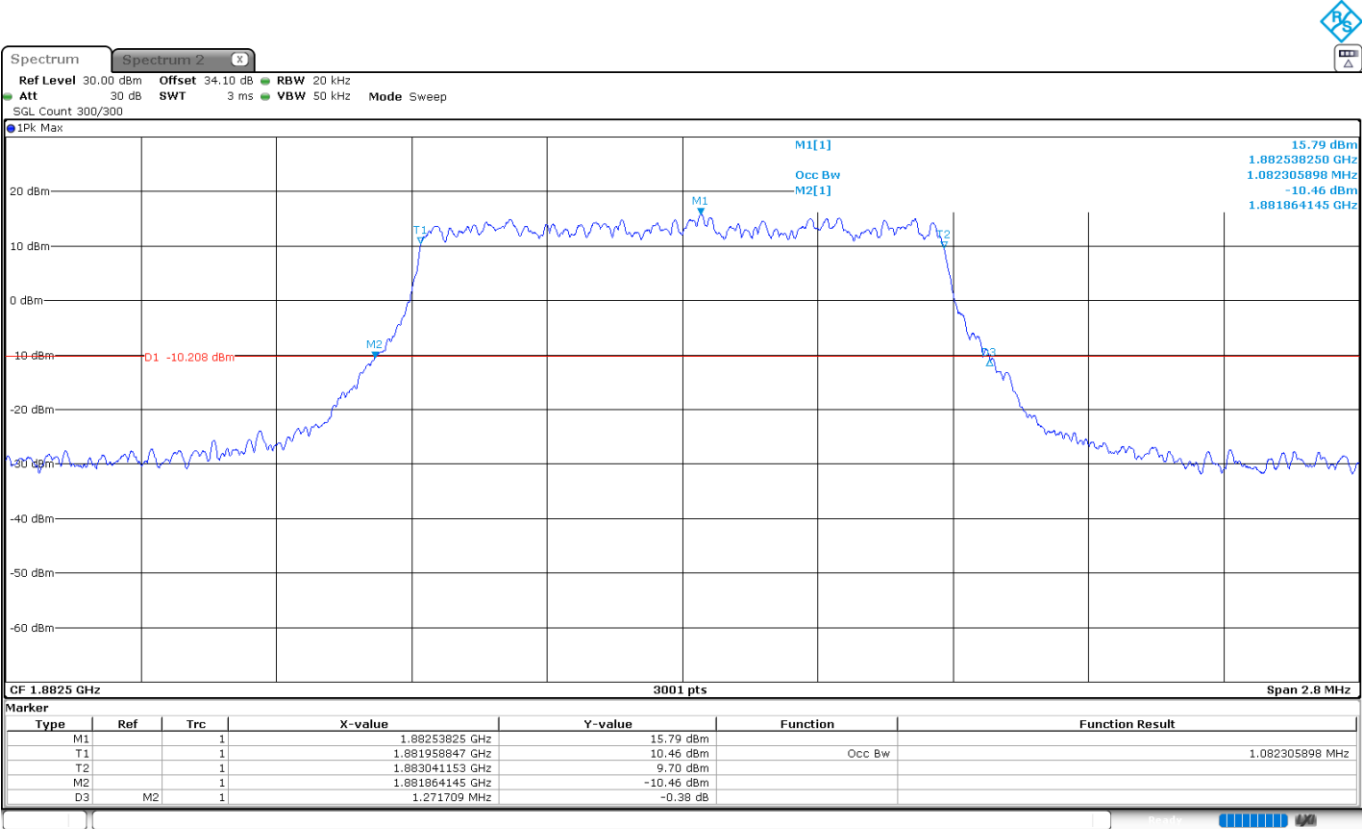


High Channel:

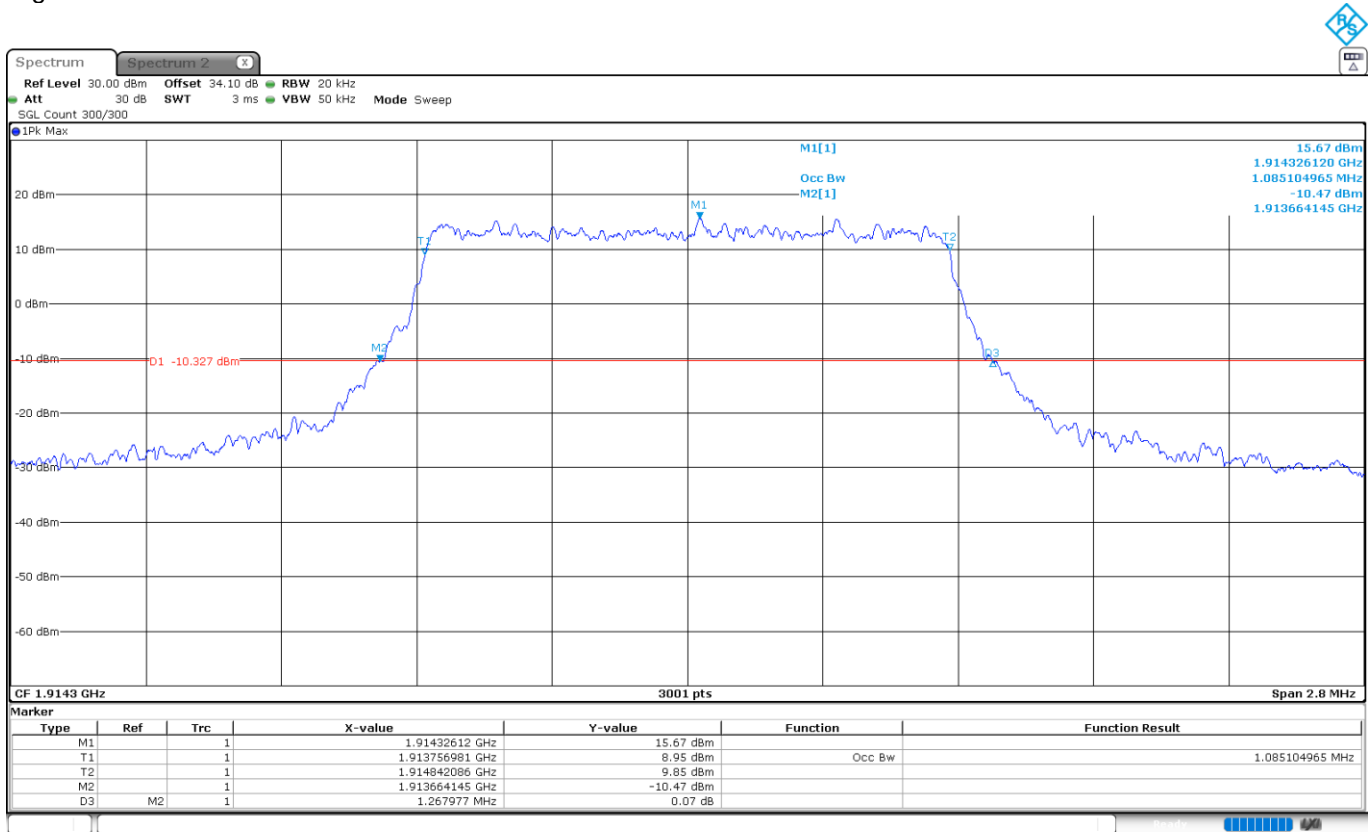


LTE Cat 1bis Band 25. BW=1.4 MHz. 16QAM. RB Size=All.


Low Channel:

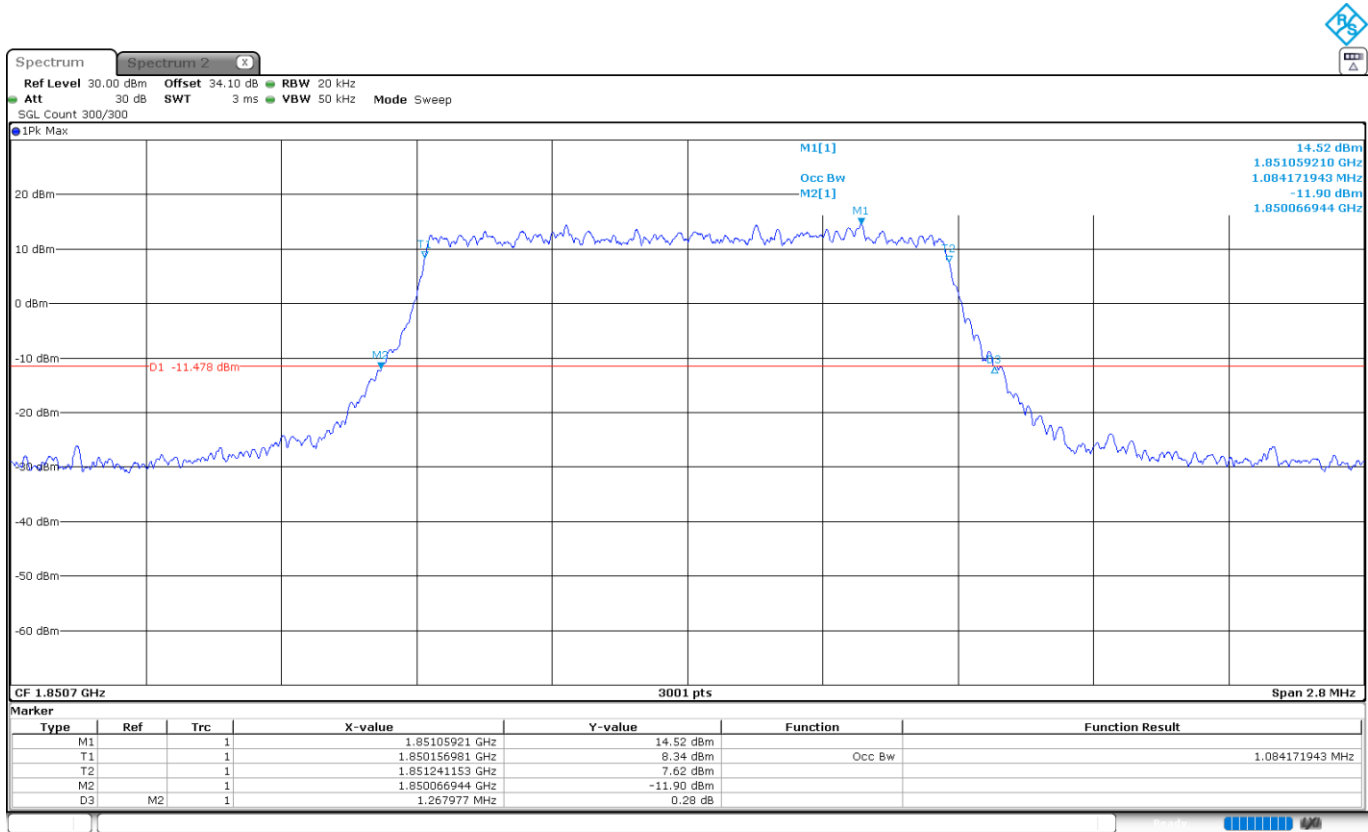

Middle Channel:

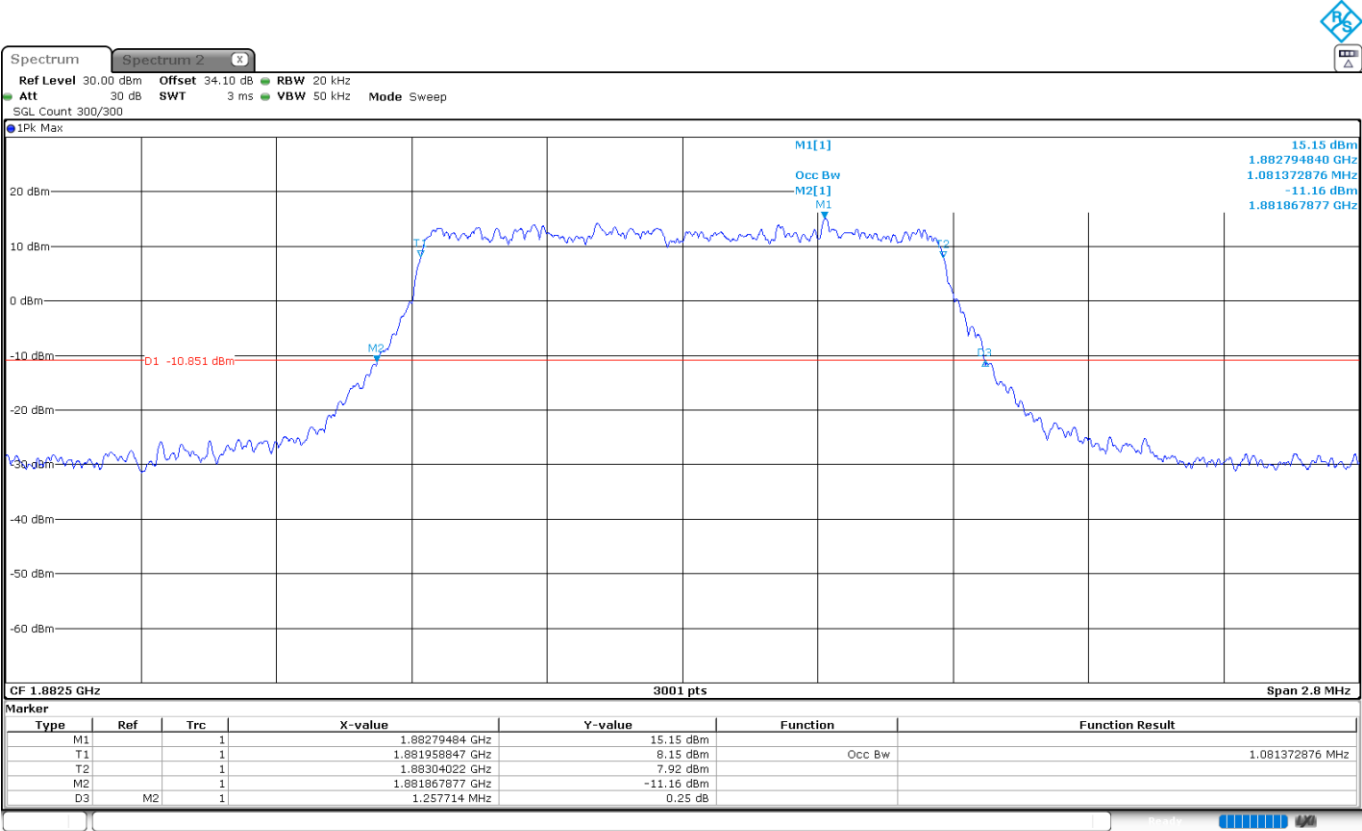

High Channel:

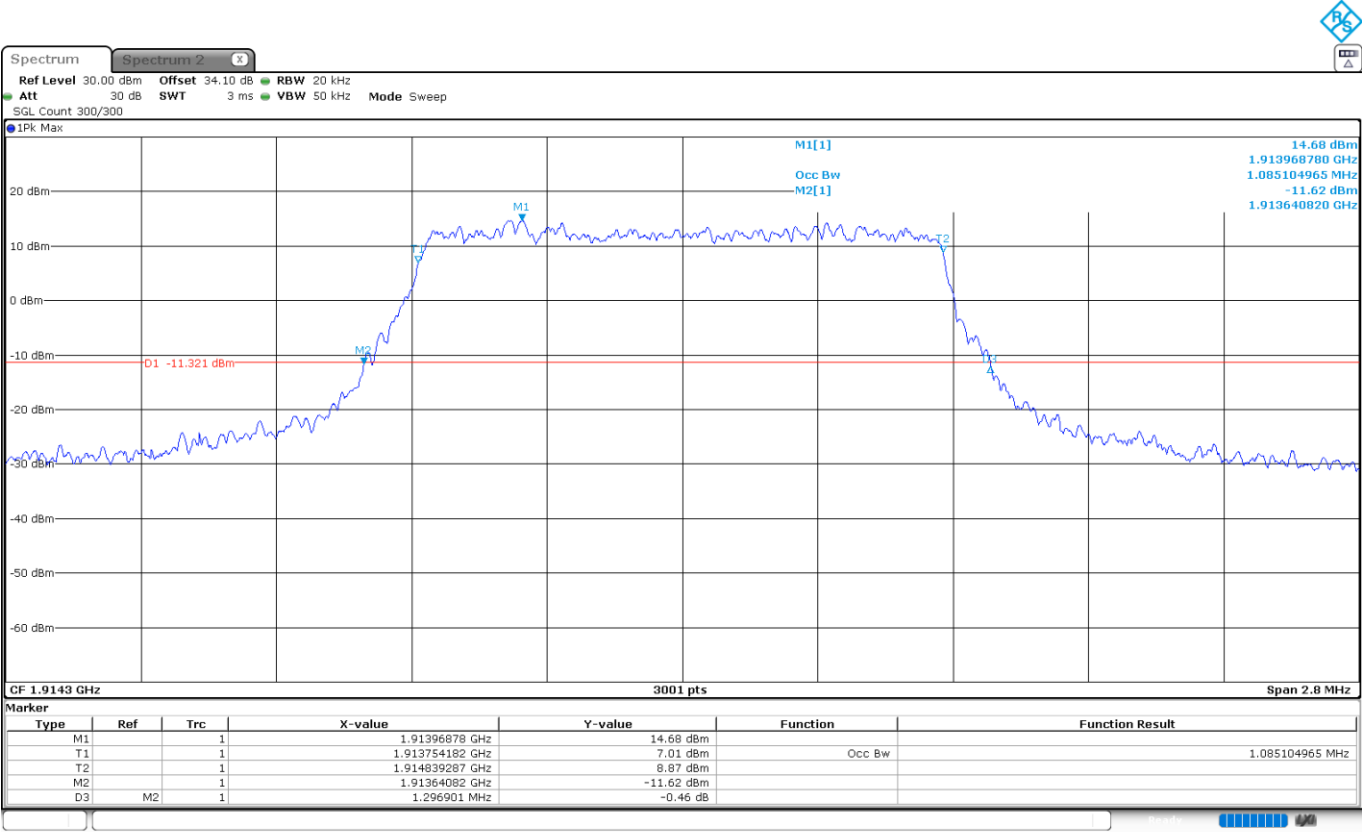

LTE Cat 1bis Band 25. BW=3 MHz. QPSK. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	2.6911029660	2.6971009660	2.6931022990
-26 dBc Bandwidth (MHz)	2.9610100000	2.9450200000	2.9430200000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=3 MHz. 16QAM. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	2.6851049650	2.6891036320	2.6851049650
-26 dBc Bandwidth (MHz)	2.9930000000	2.9510200000	2.9490200000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=3 MHz. QPSK. RB Size=All.


Low Channel:

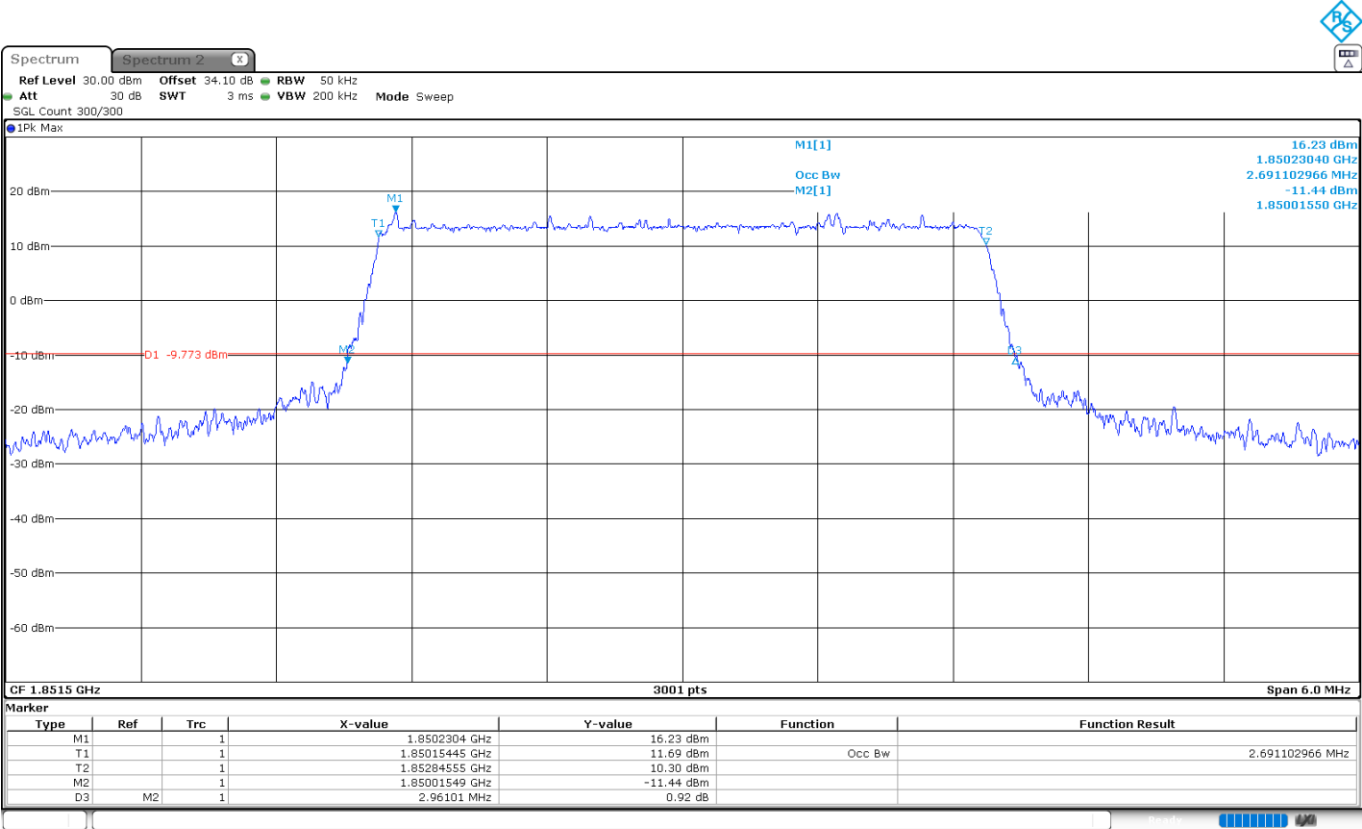

Middle Channel:

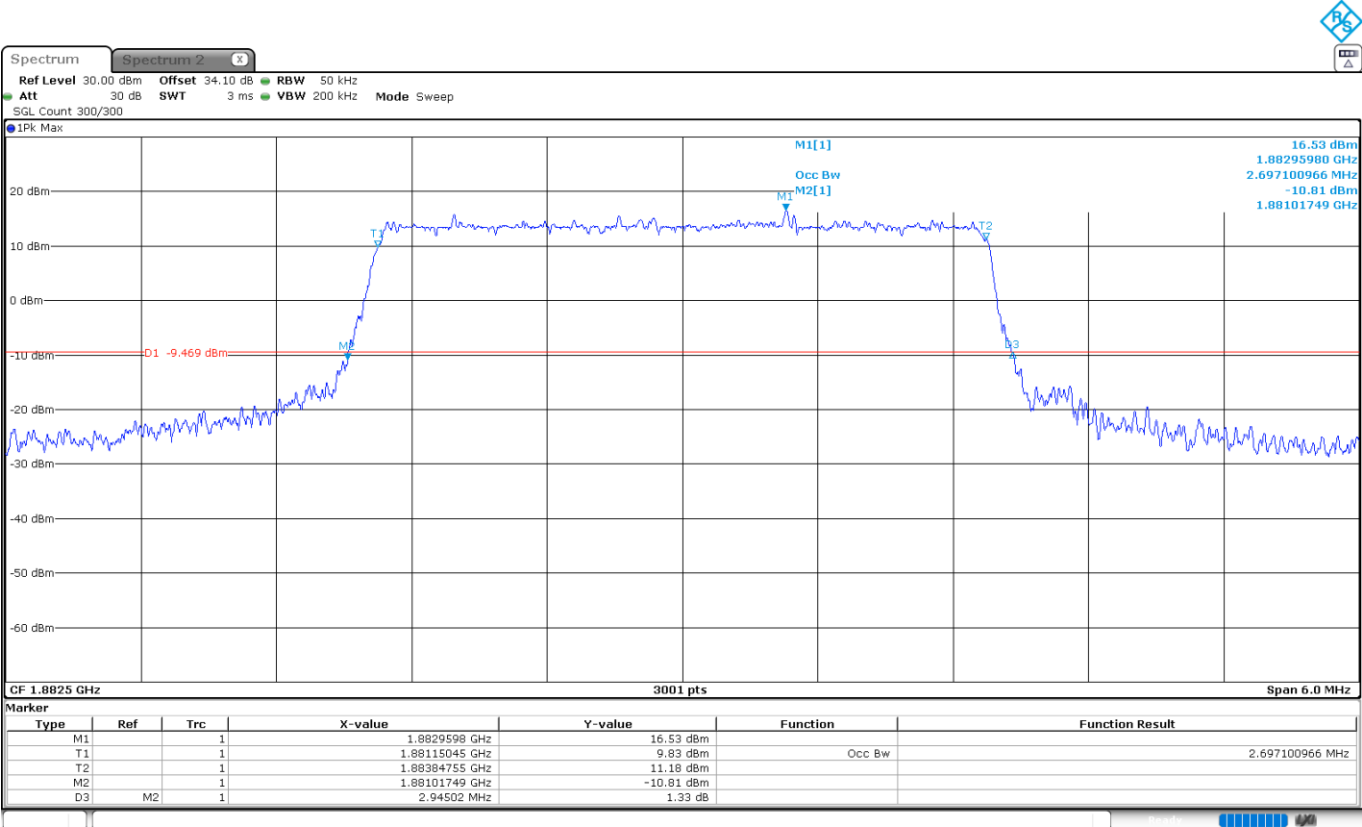


High Channel:

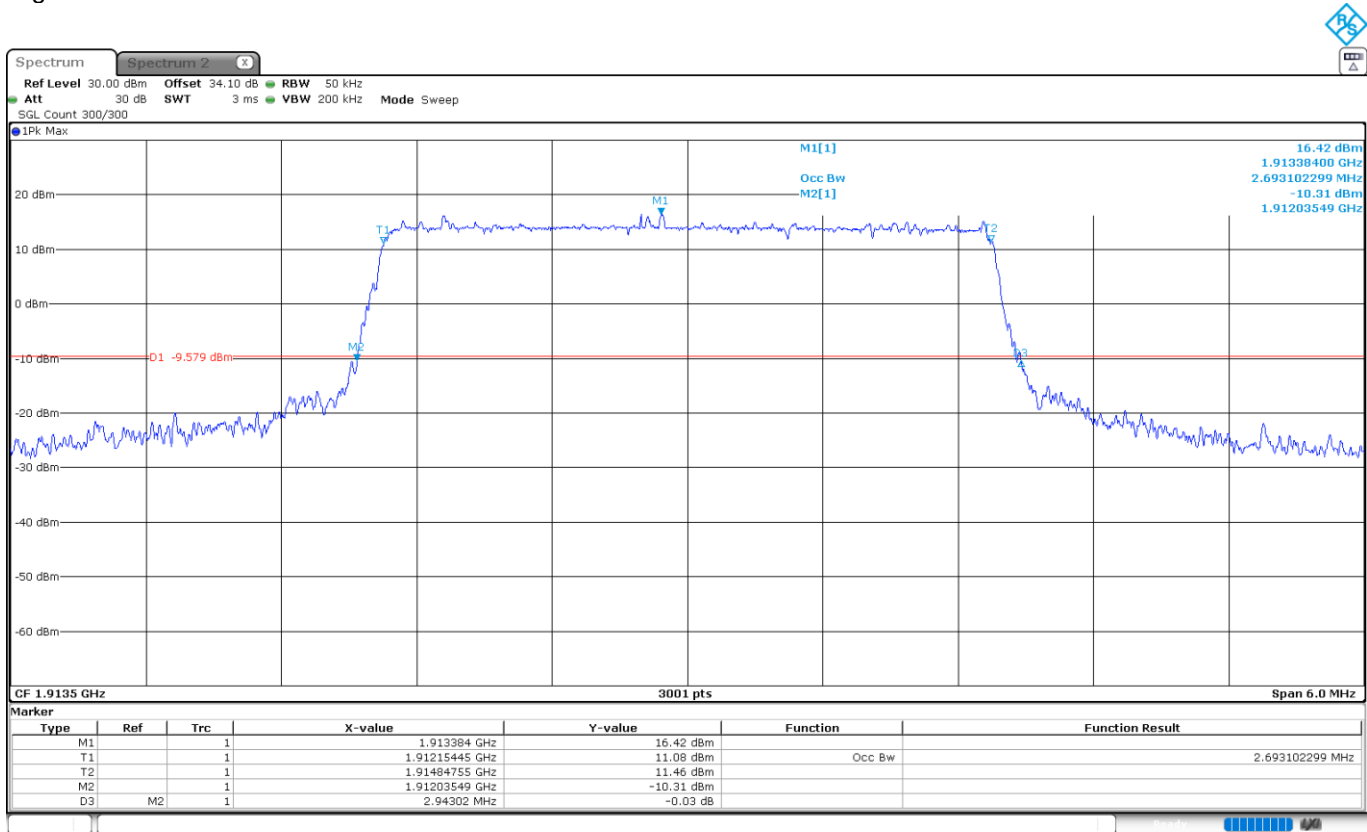


LTE Cat 1bis Band 25. BW=3 MHz. 16QAM. RB Size=All.


Low Channel:

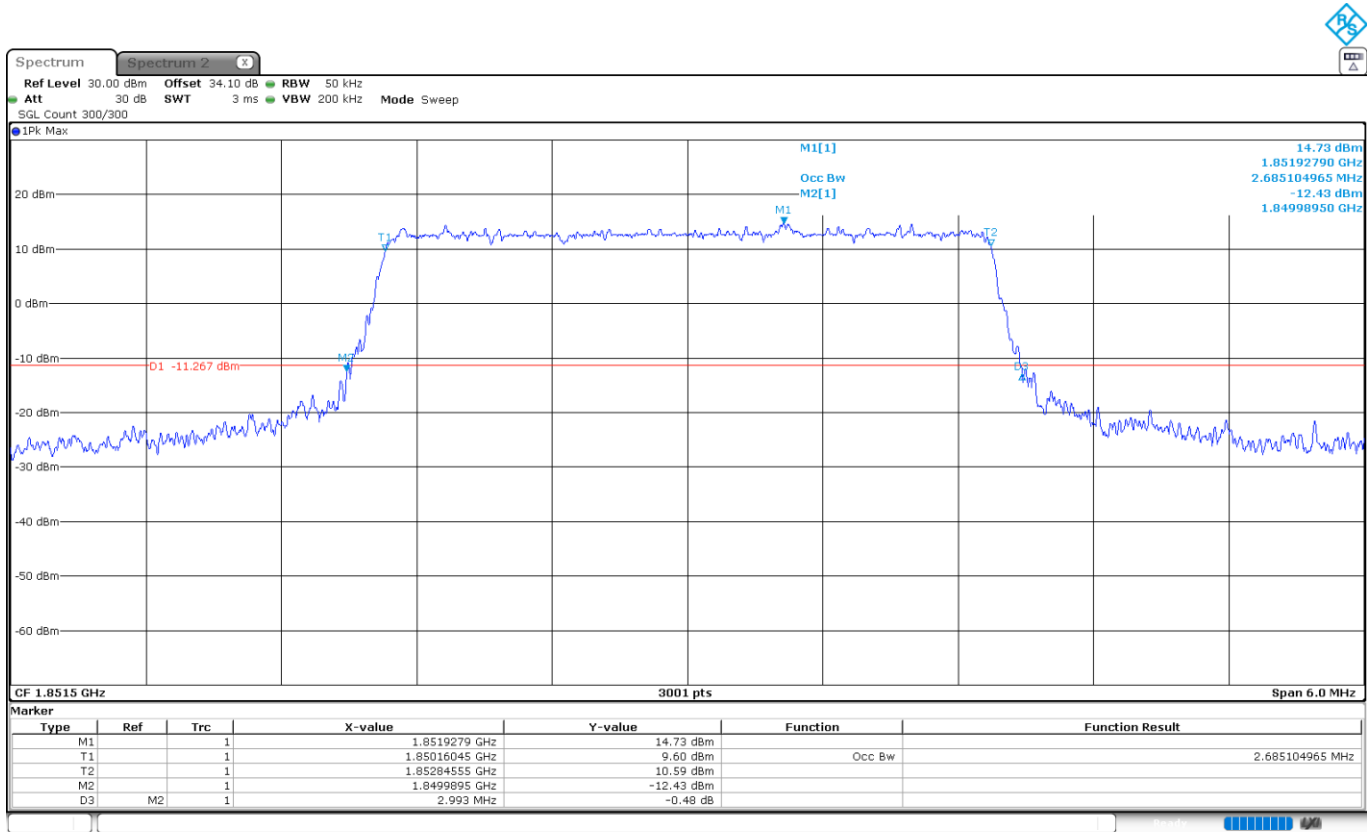

Middle Channel:

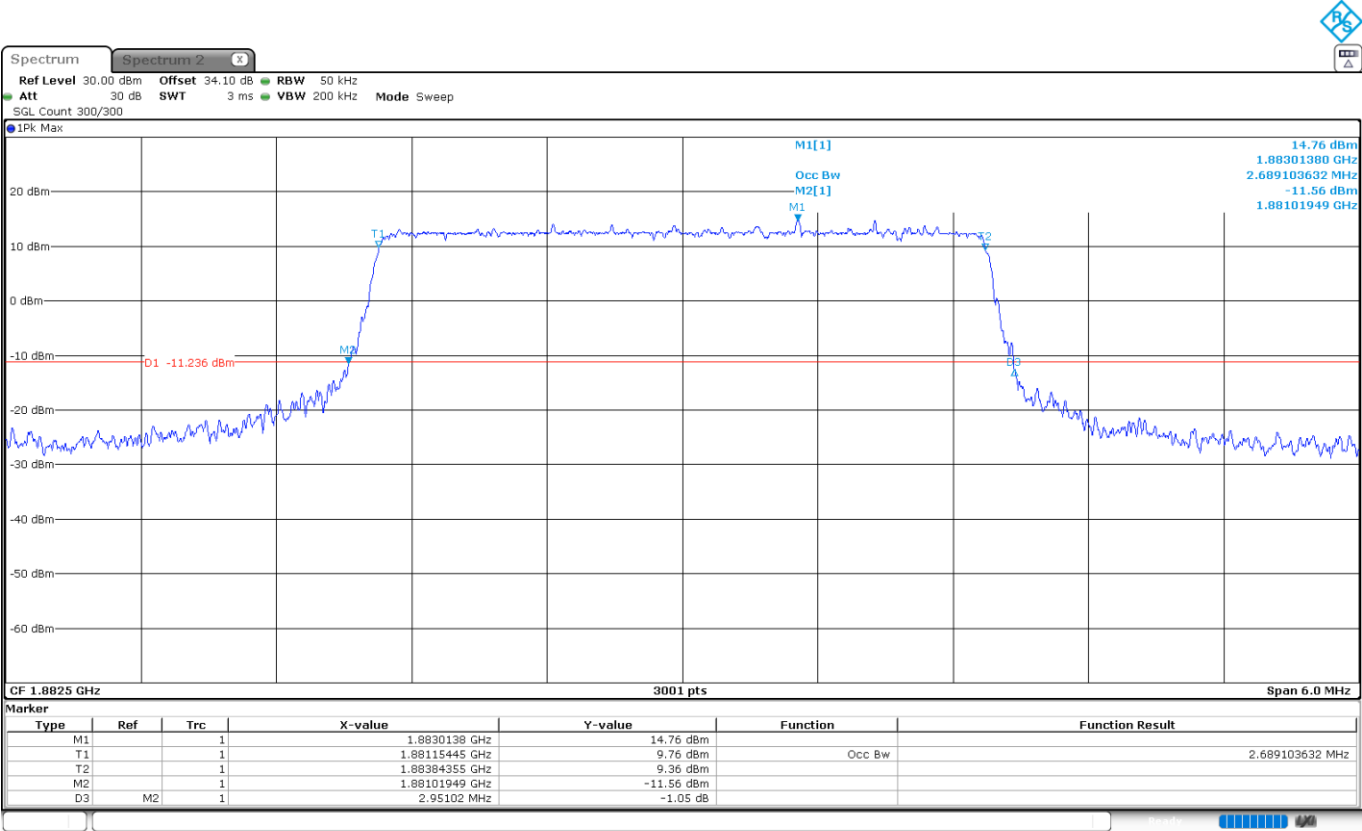

High Channel:

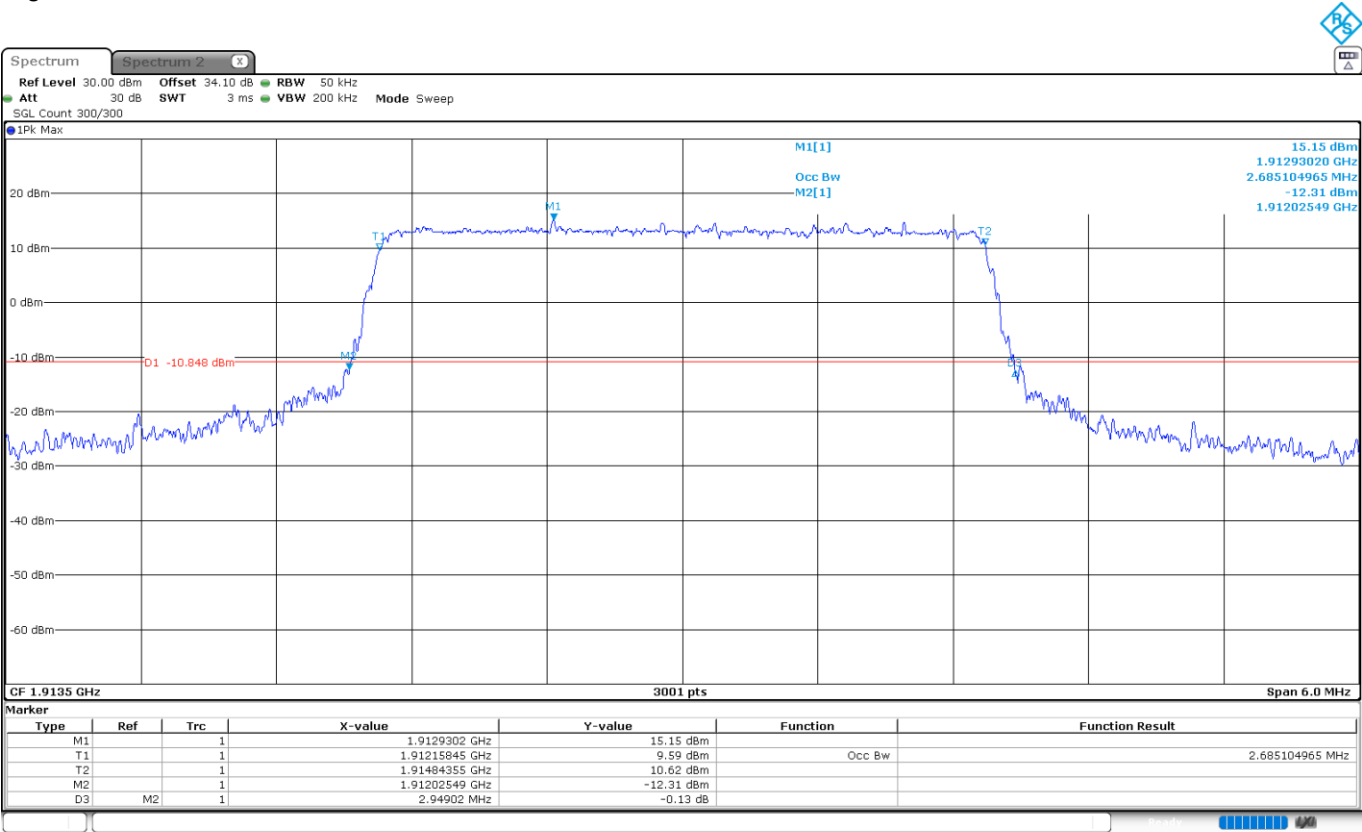

LTE Cat 1bis Band 25. BW=5 MHz. QPSK. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	4.51849384	4.51516161	4.49850050
-26 dBc Bandwidth (MHz)	5.20160000	5.05165000	5.16495000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=5 MHz. 16QAM. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	4.51516161	4.50849717	4.50849717
-26 dBc Bandwidth (MHz)	5.21160000	5.27491000	5.01500000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=5 MHz. QPSK. RB Size=All.


Low Channel:

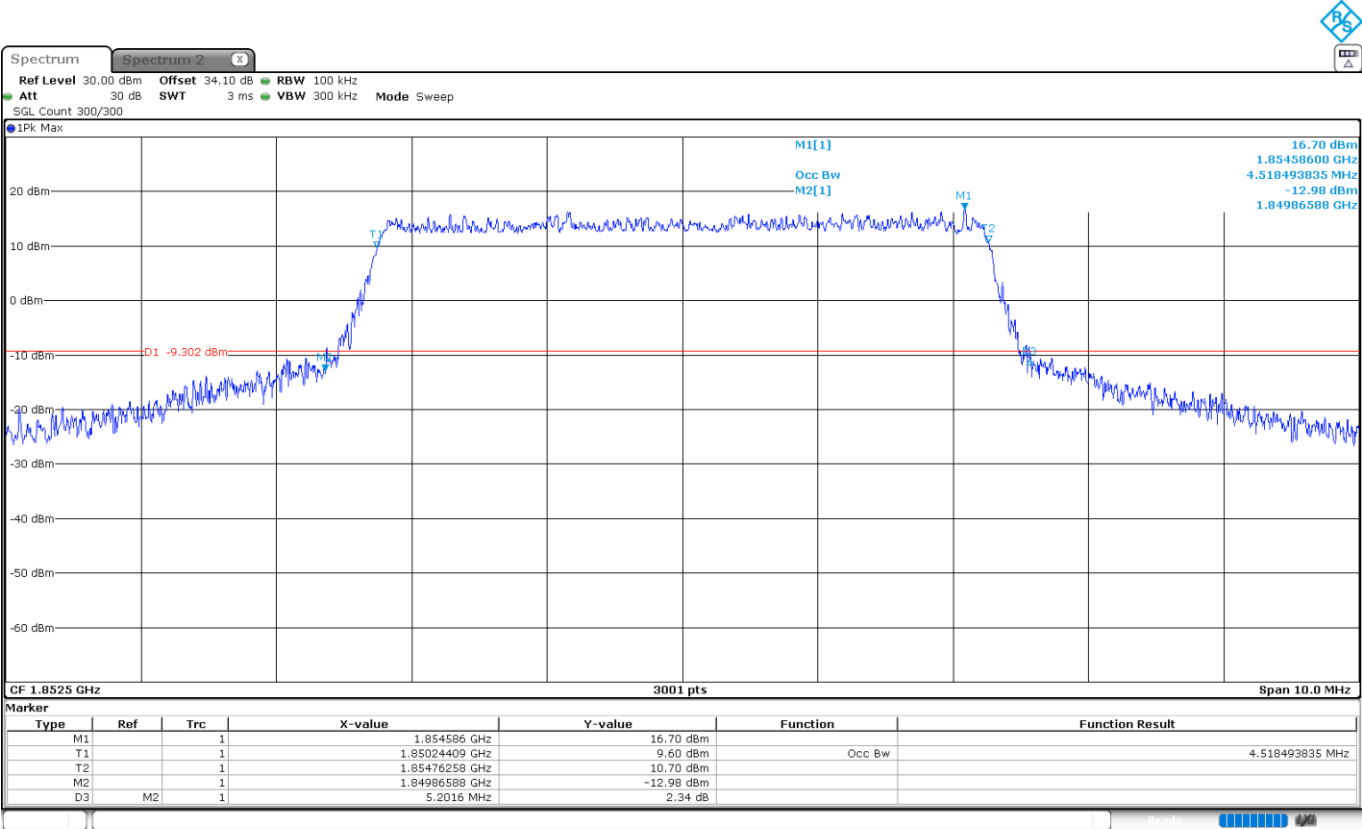

Middle Channel:

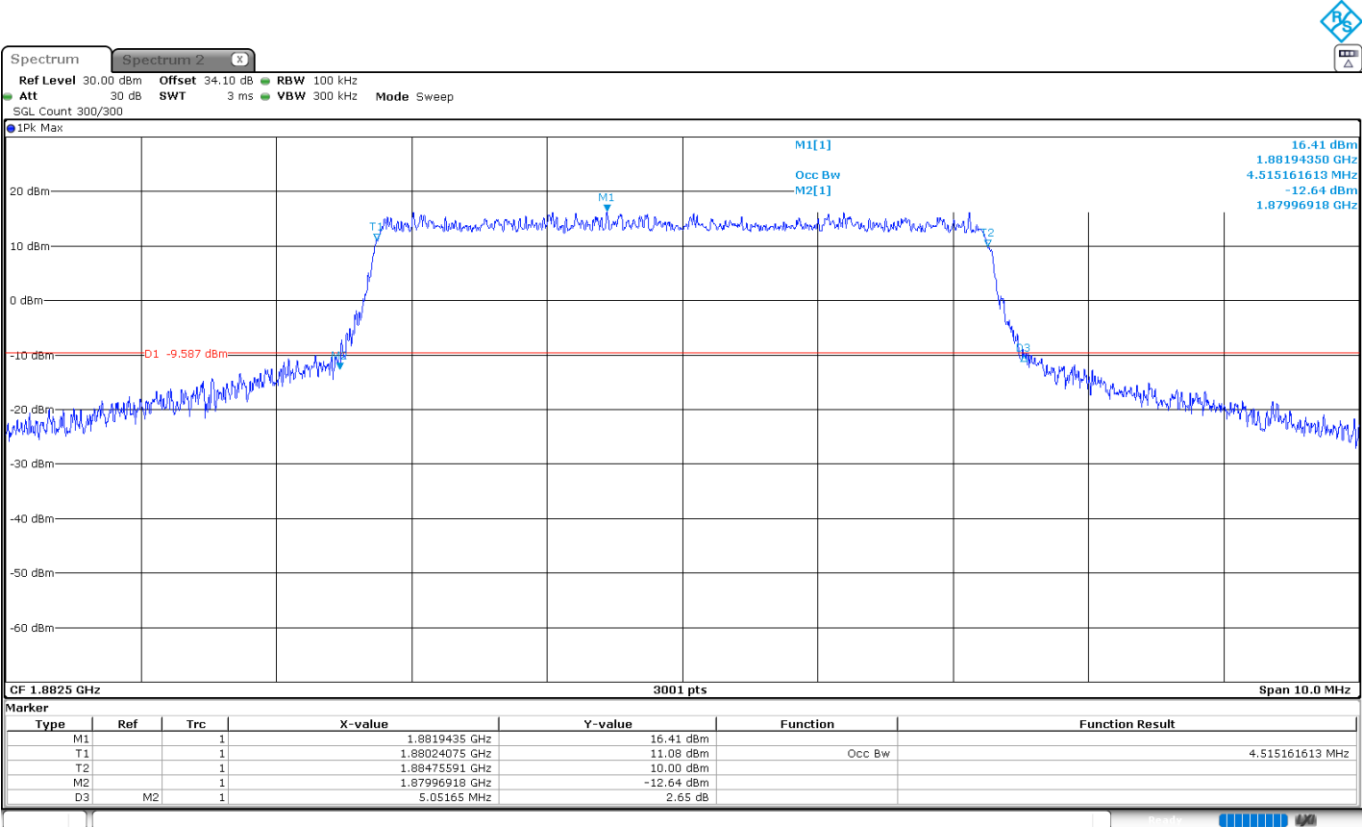


High Channel:

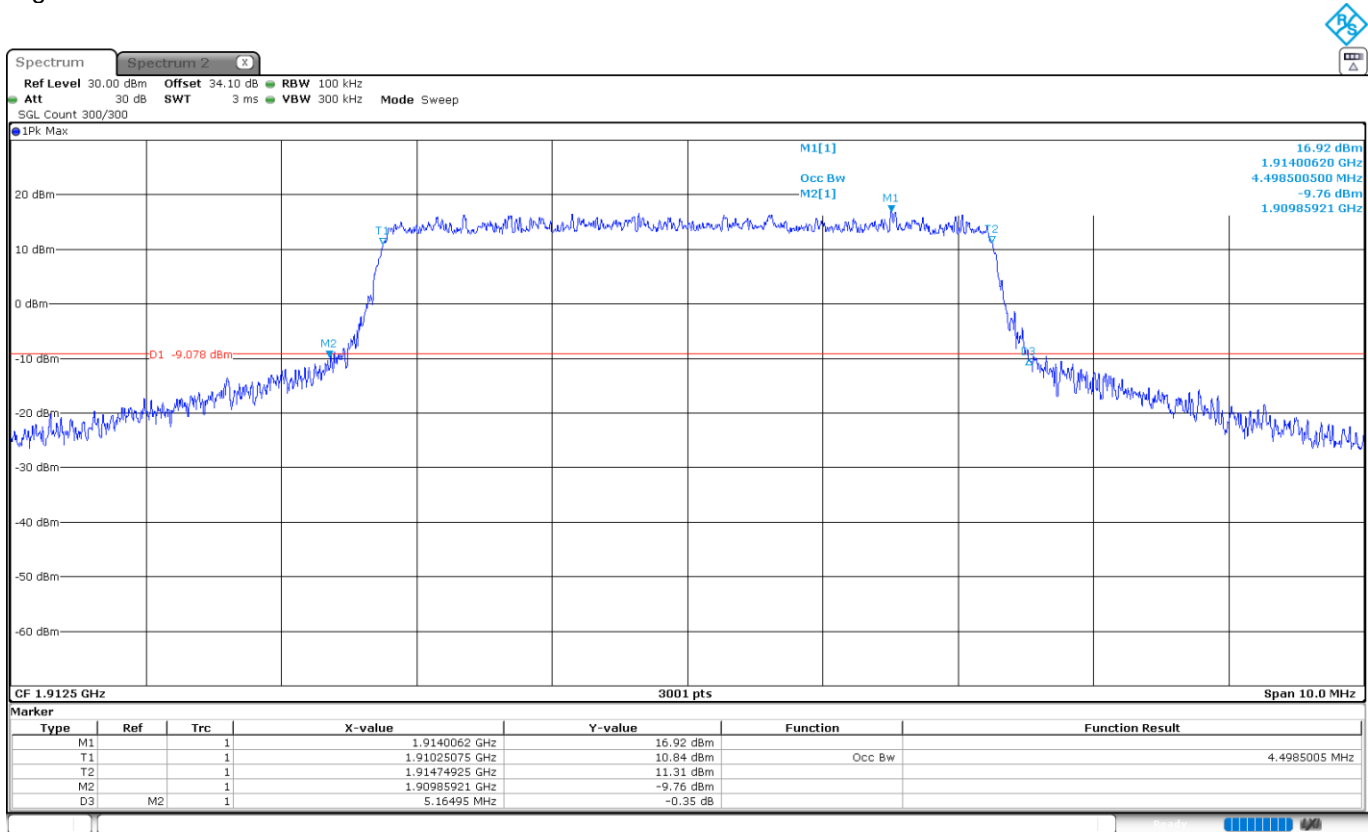


LTE Cat 1bis Band 25. BW=5 MHz. 16QAM. RB Size=All.


Low Channel:

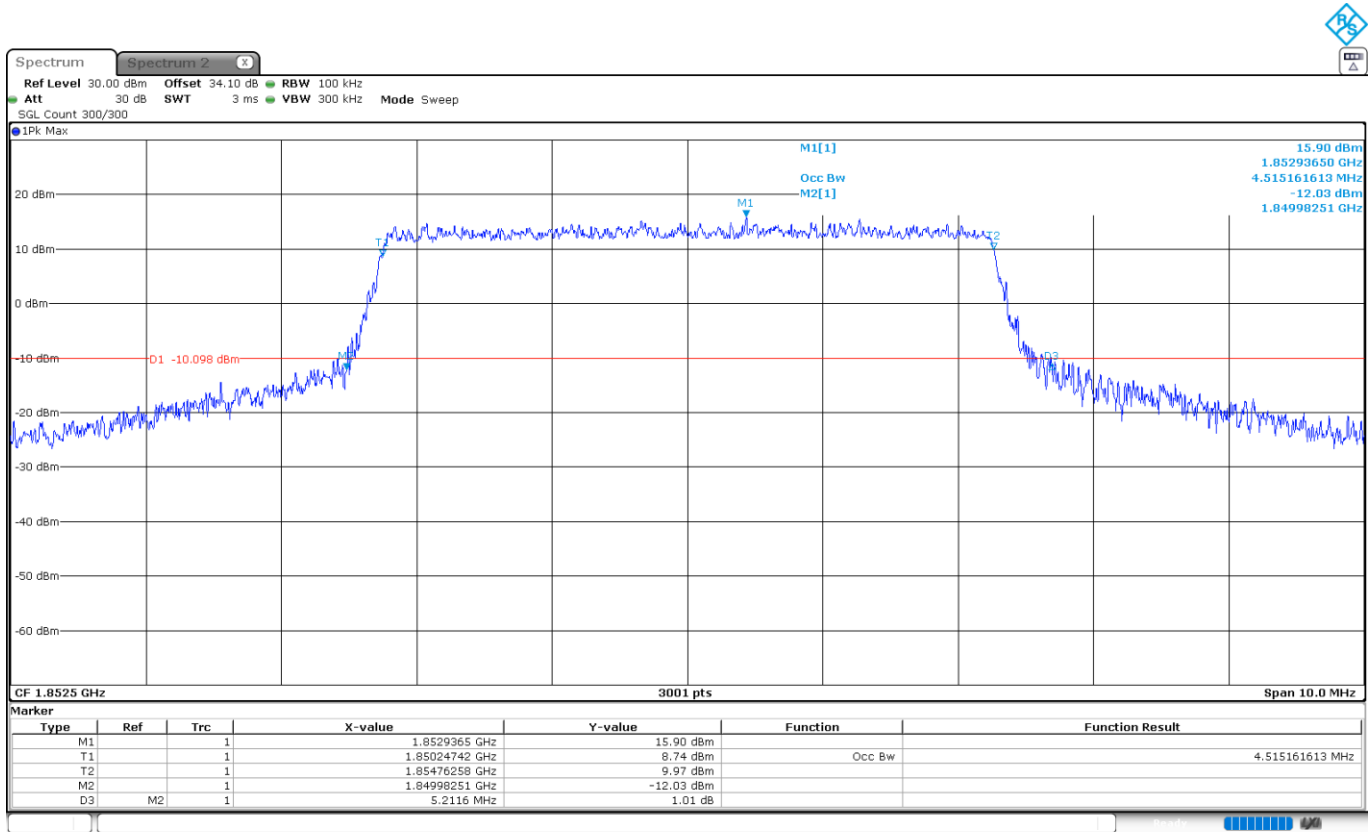

Middle Channel:

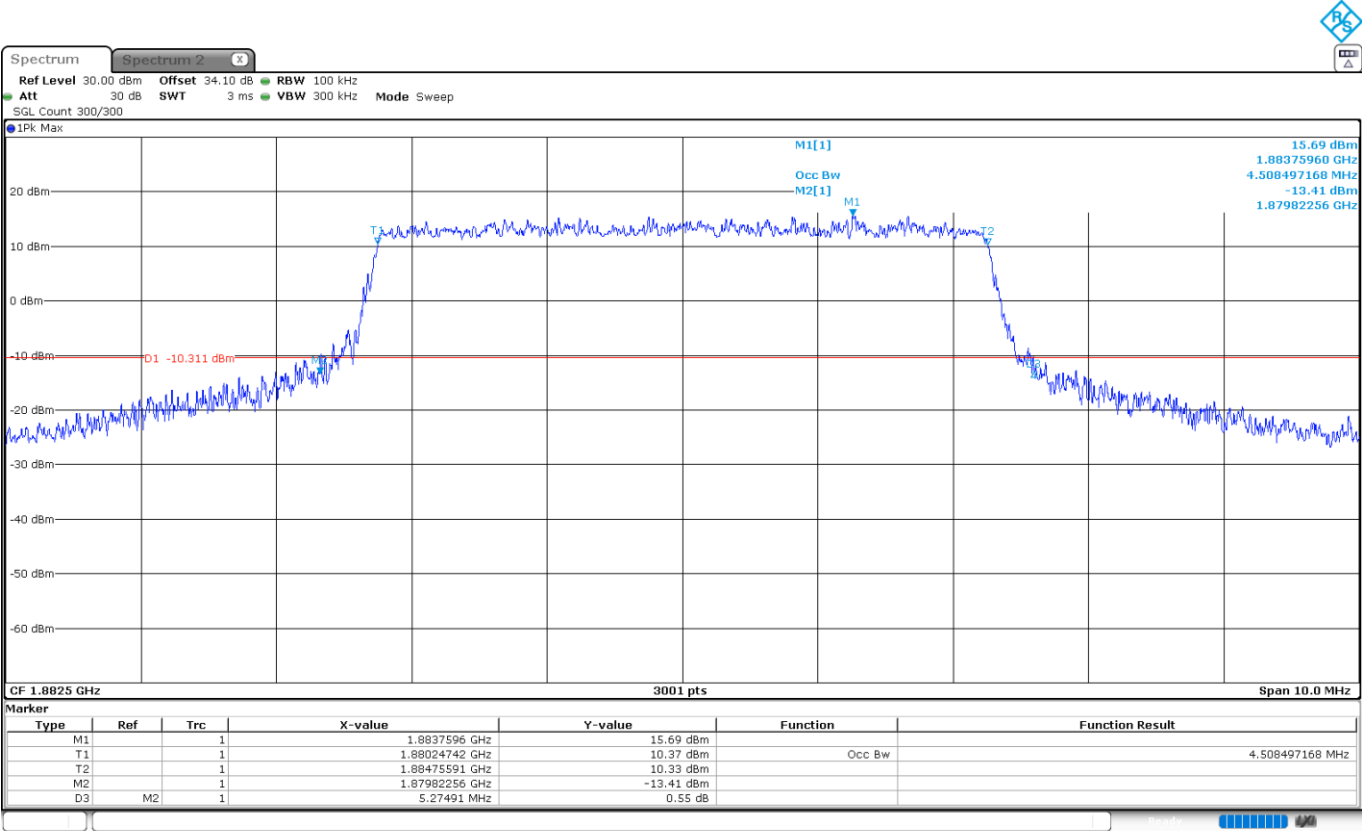

High Channel:

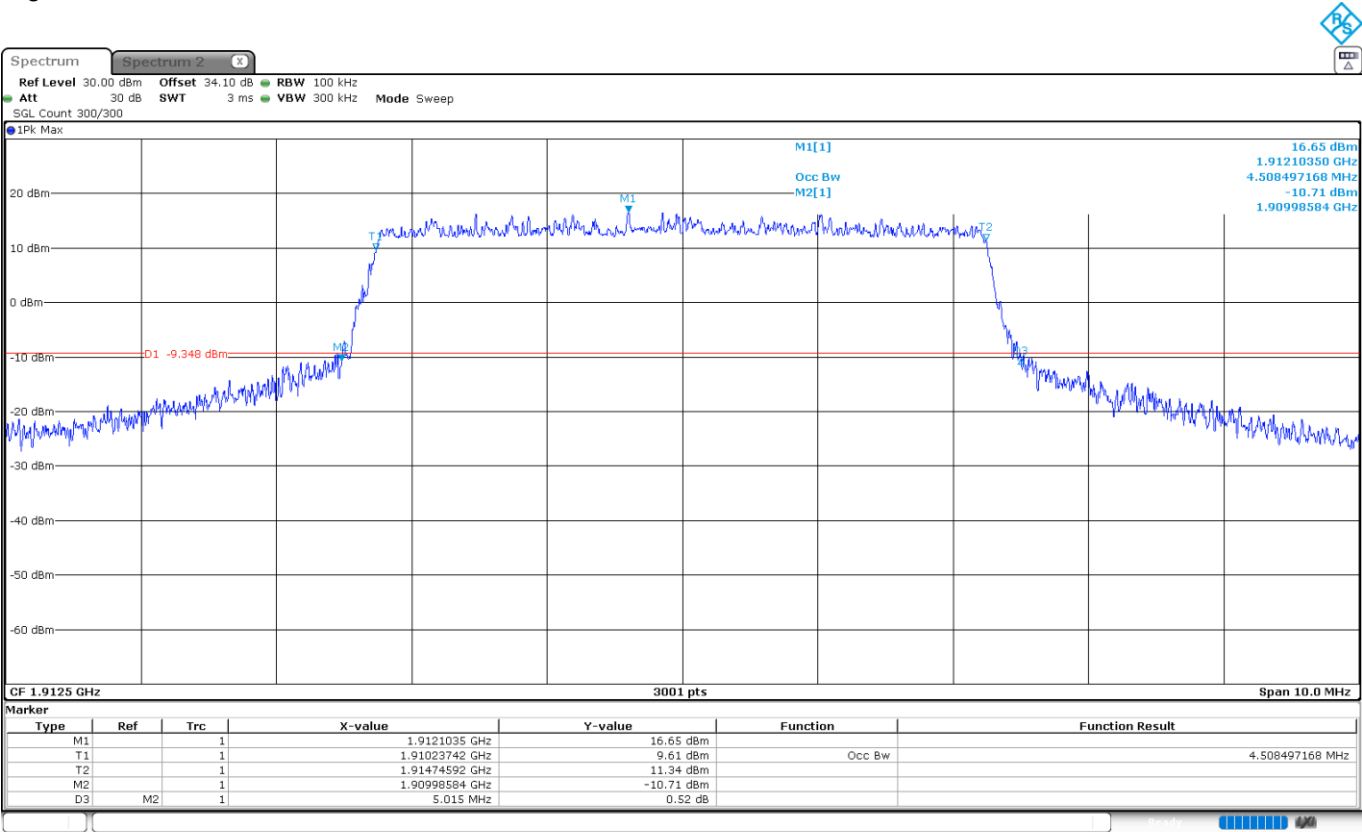

LTE Cat 1bis Band 25. BW=10 MHz. QPSK. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	9.00366545	8.99700100	9.00366545
-26 dBc Bandwidth (MHz)	10.23659000	10.12996000	10.06998000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=10 MHz. 16QAM. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	4.52515828	4.53848717	4.52251583
-26 dBc Bandwidth (MHz)	5.45818000	5.68477000	5.51816000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=10 MHz. QPSK. RB Size=All.


Low Channel:

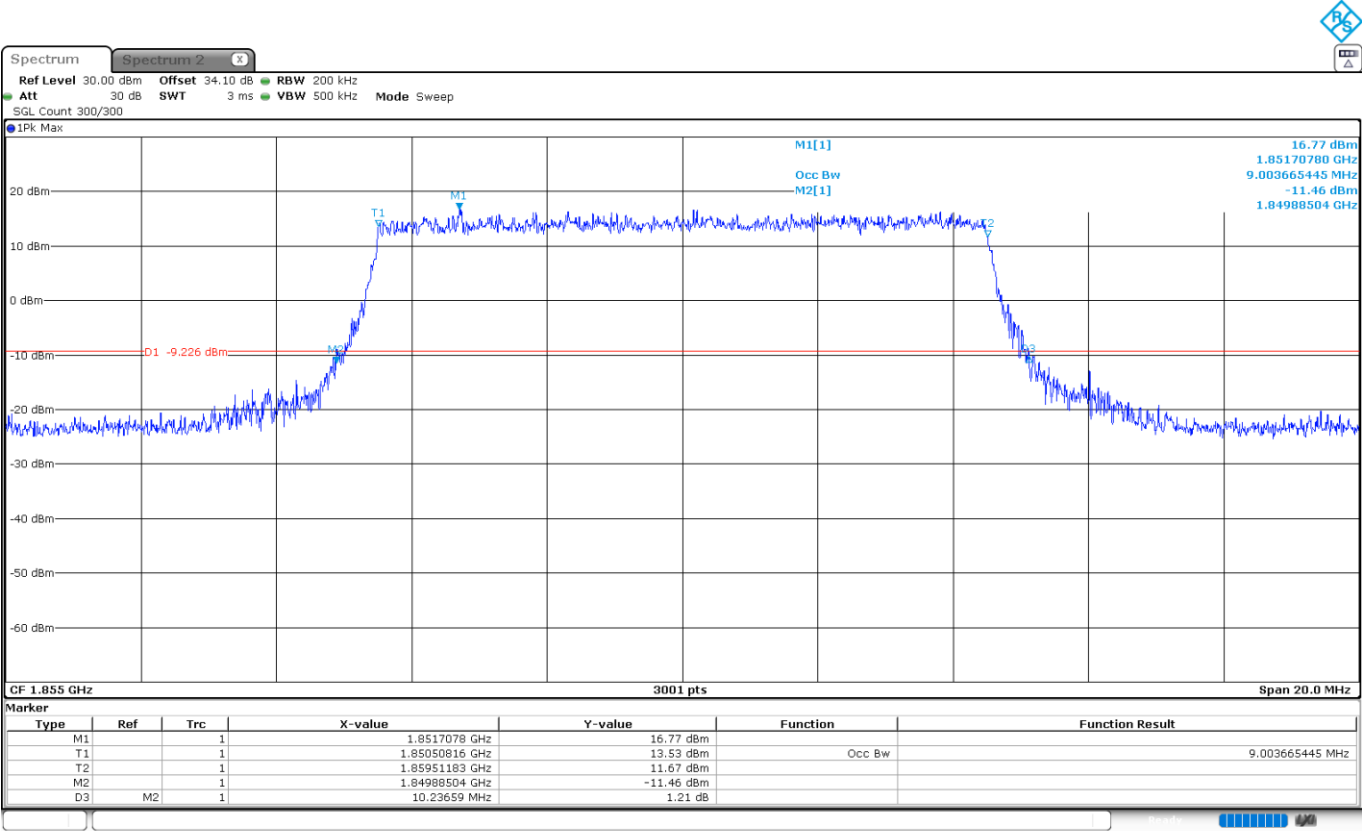

Middle Channel:

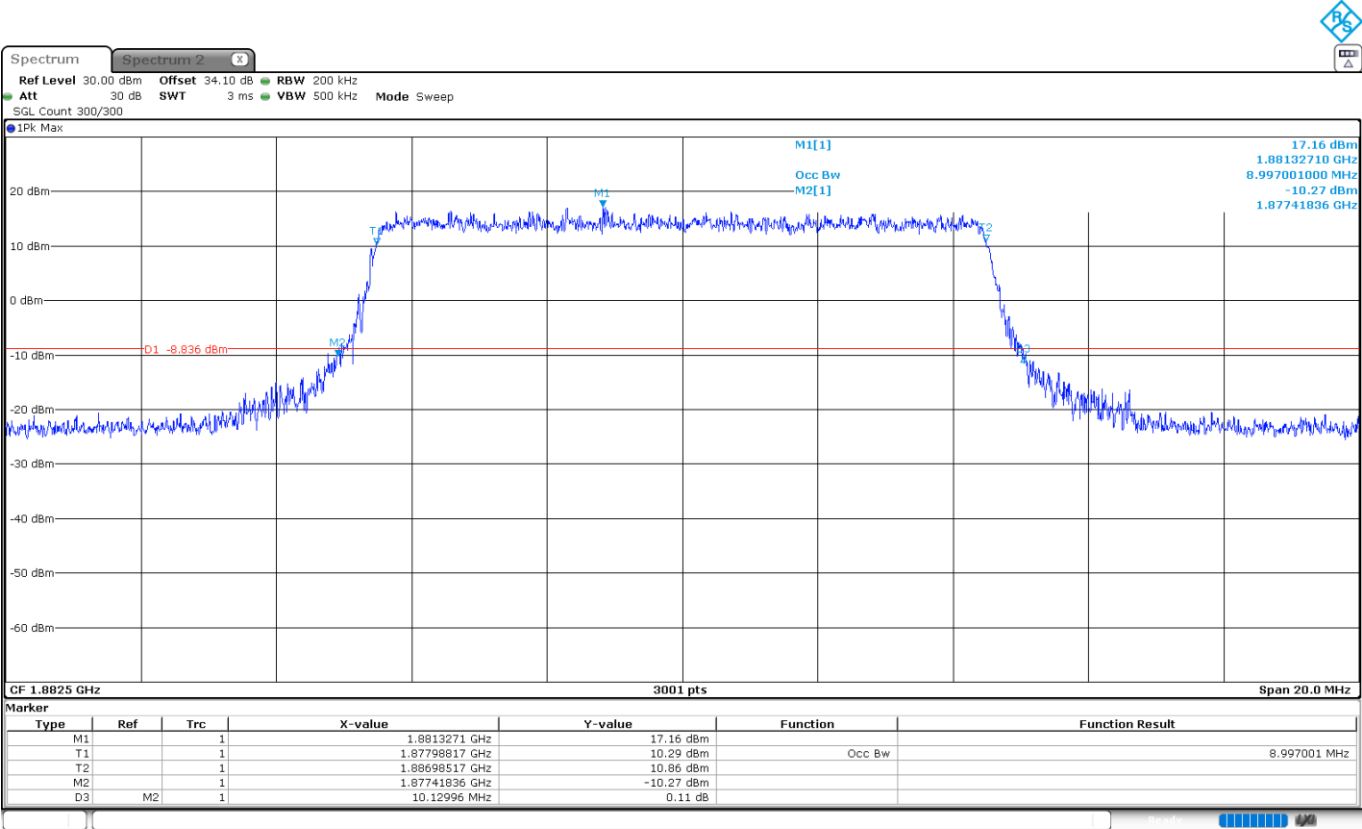


High Channel:

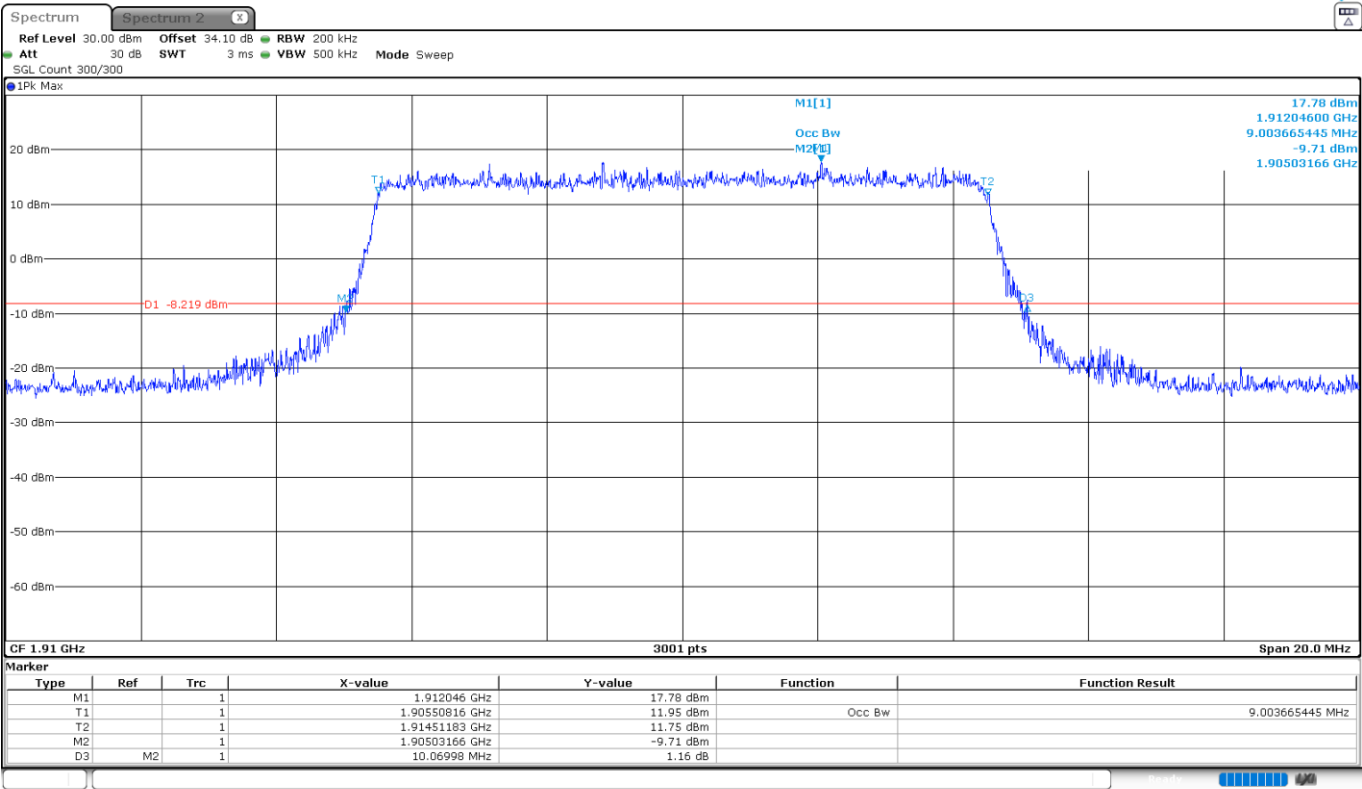


LTE Cat 1bis Band 25. BW=10 MHz. 16QAM. RB Size=All.


Low Channel:

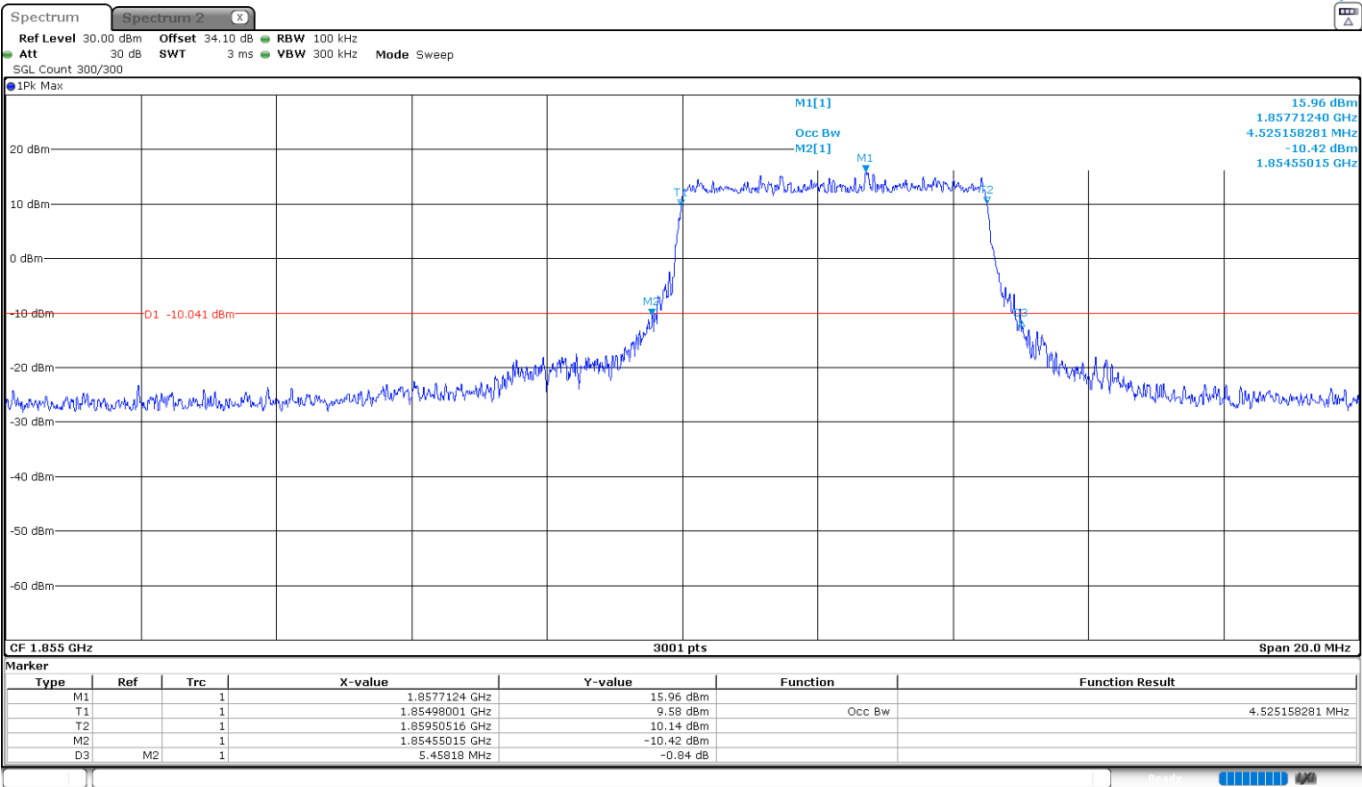

Middle Channel:

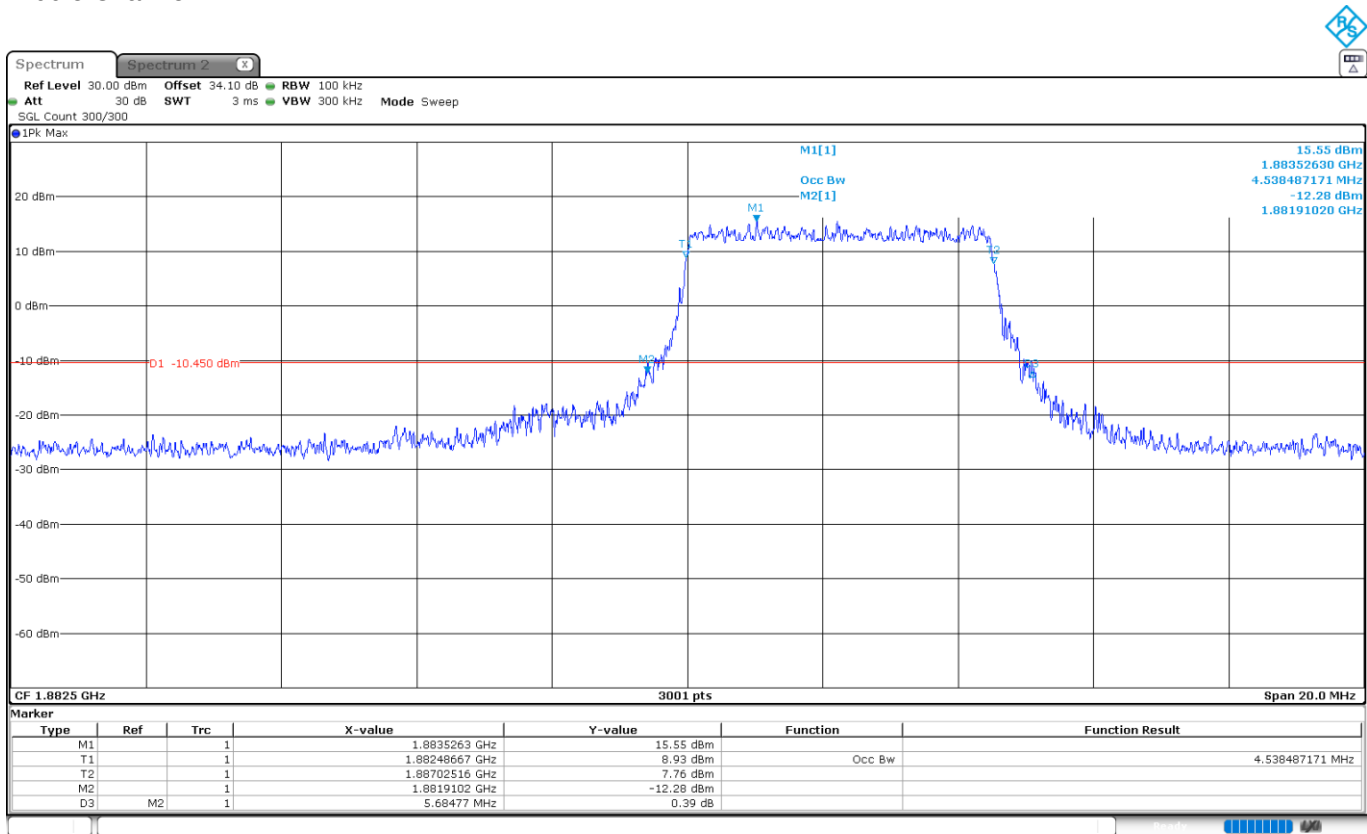

High Channel:

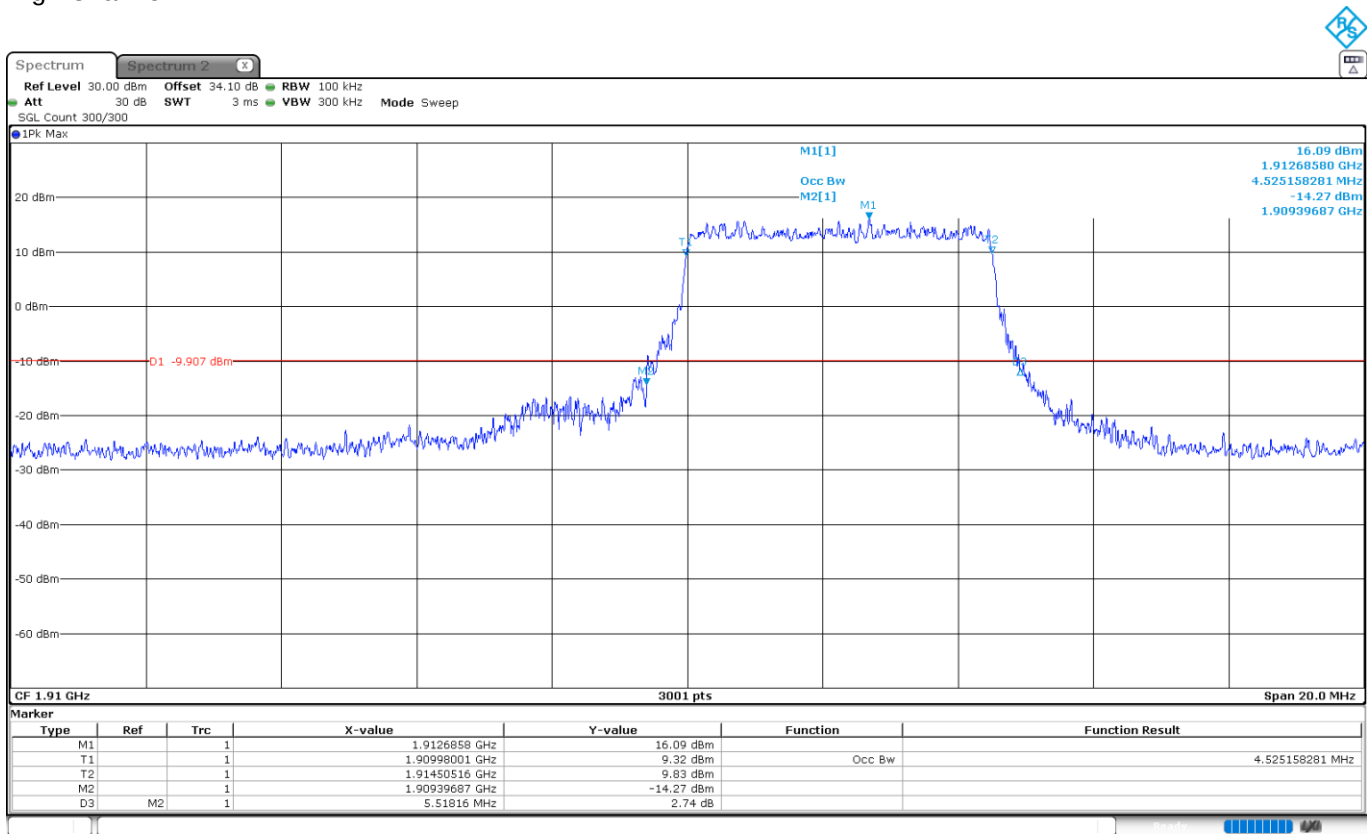

LTE Cat 1bis Band 25. BW=15 MHz. QPSK. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	13.4255248250	13.4455181610	13.4455181610
-26 dBc Bandwidth (MHz)	14.5751400000	15.0050000000	15.3149000000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=15 MHz. 16QAM. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	4.5384871710	4.5384871710	4.5384871710
-26 dBc Bandwidth (MHz)	5.5281600000	5.7380900000	5.6981000000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=15 MHz. QPSK. RB Size=All.


Low Channel:

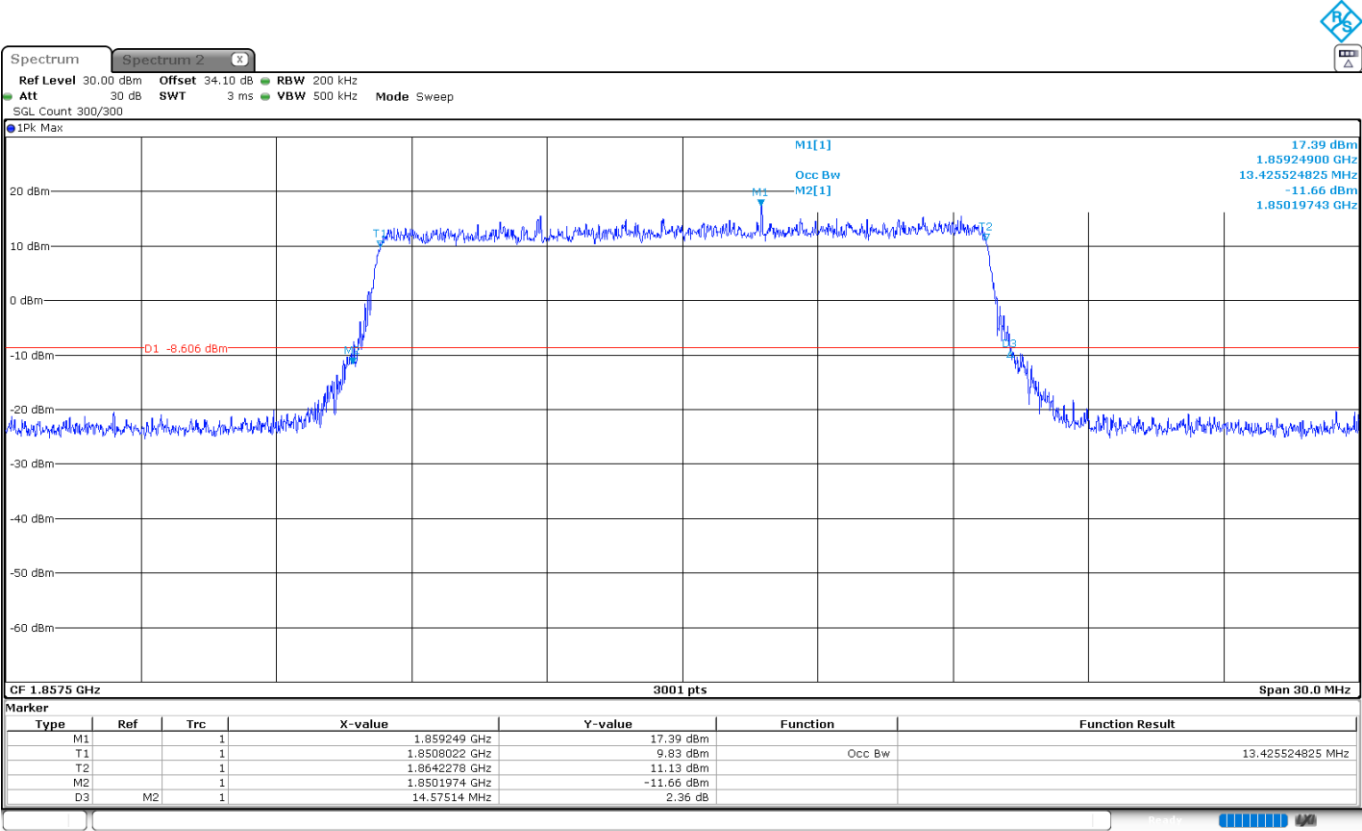

Middle Channel:

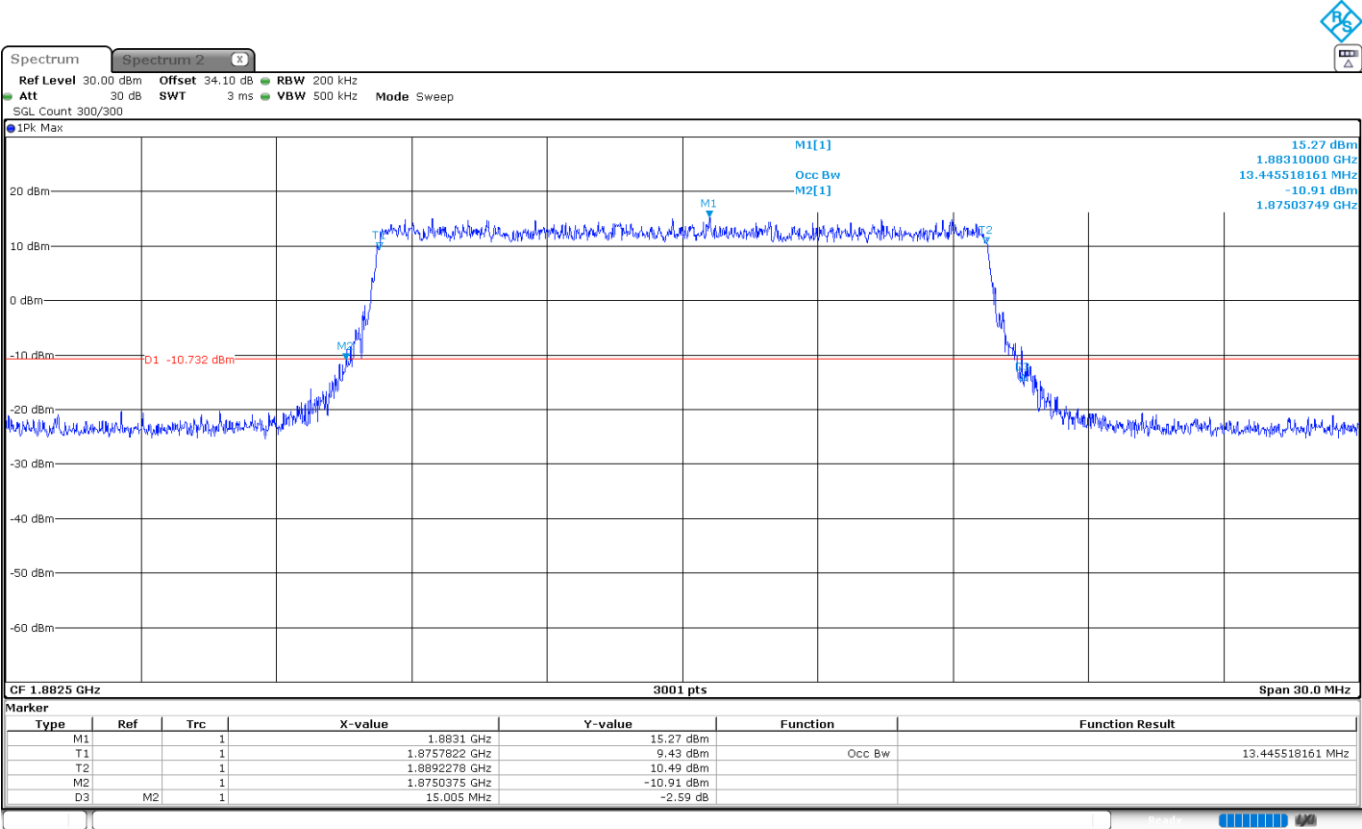


High Channel:

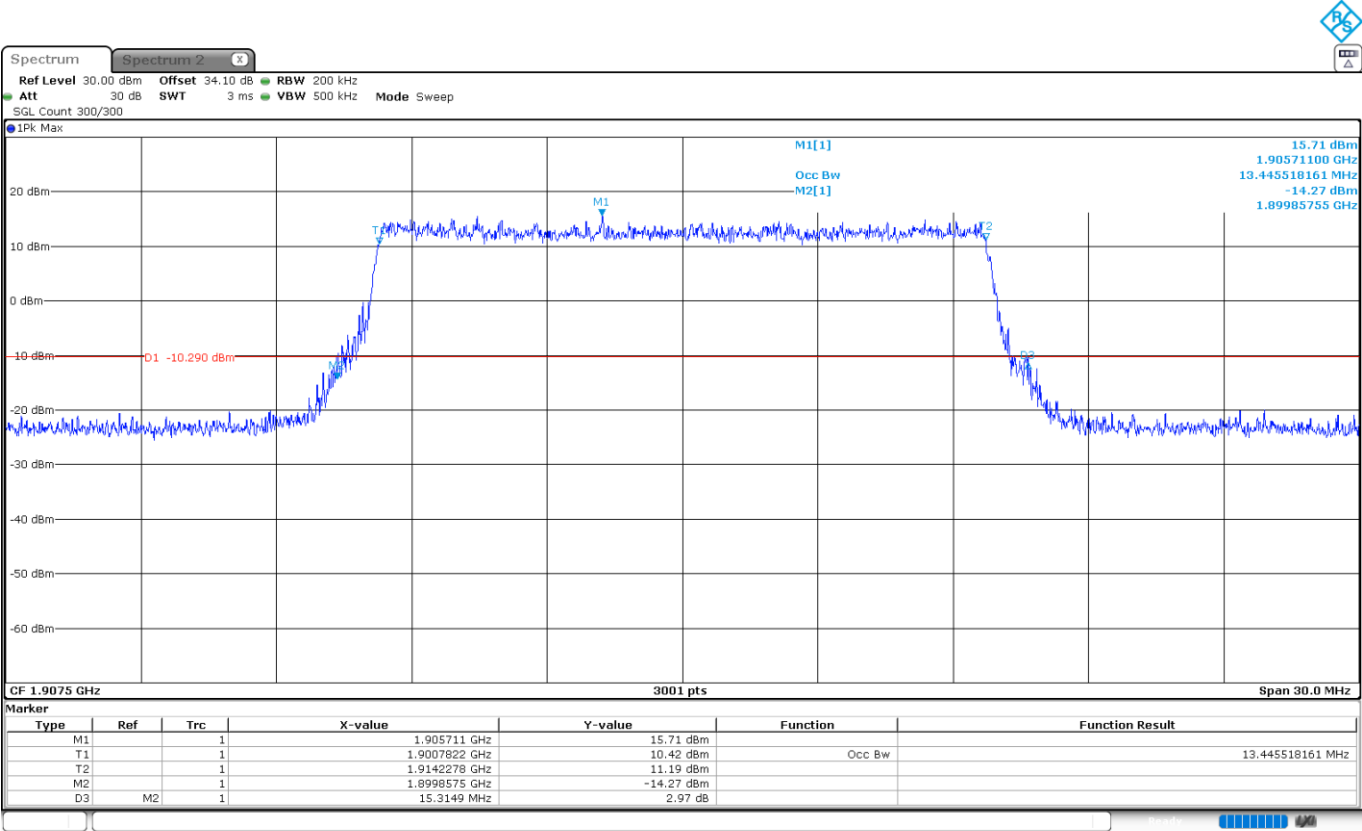


LTE Cat 1bis Band 25. BW=15 MHz. 16QAM. RB Size=All.


Low Channel:

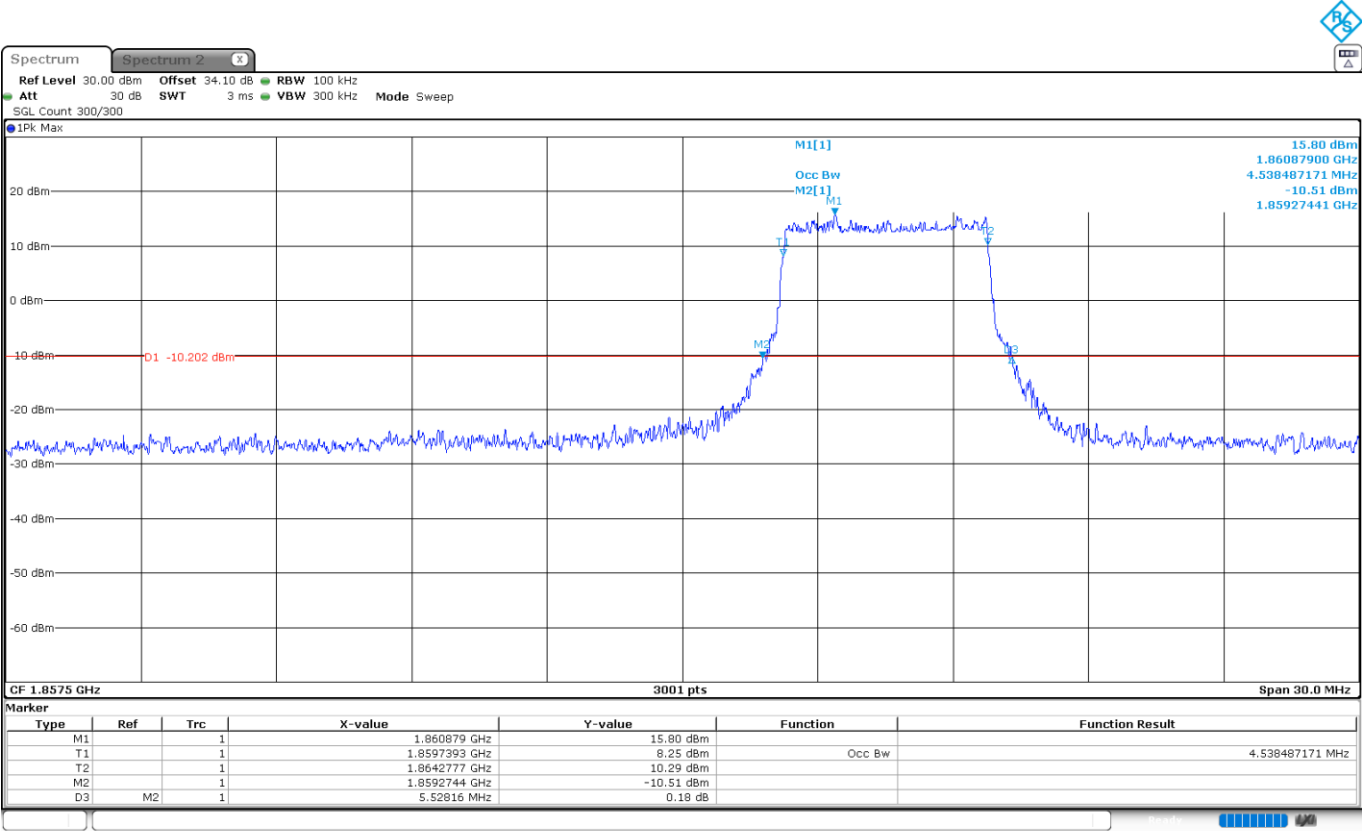

Middle Channel:

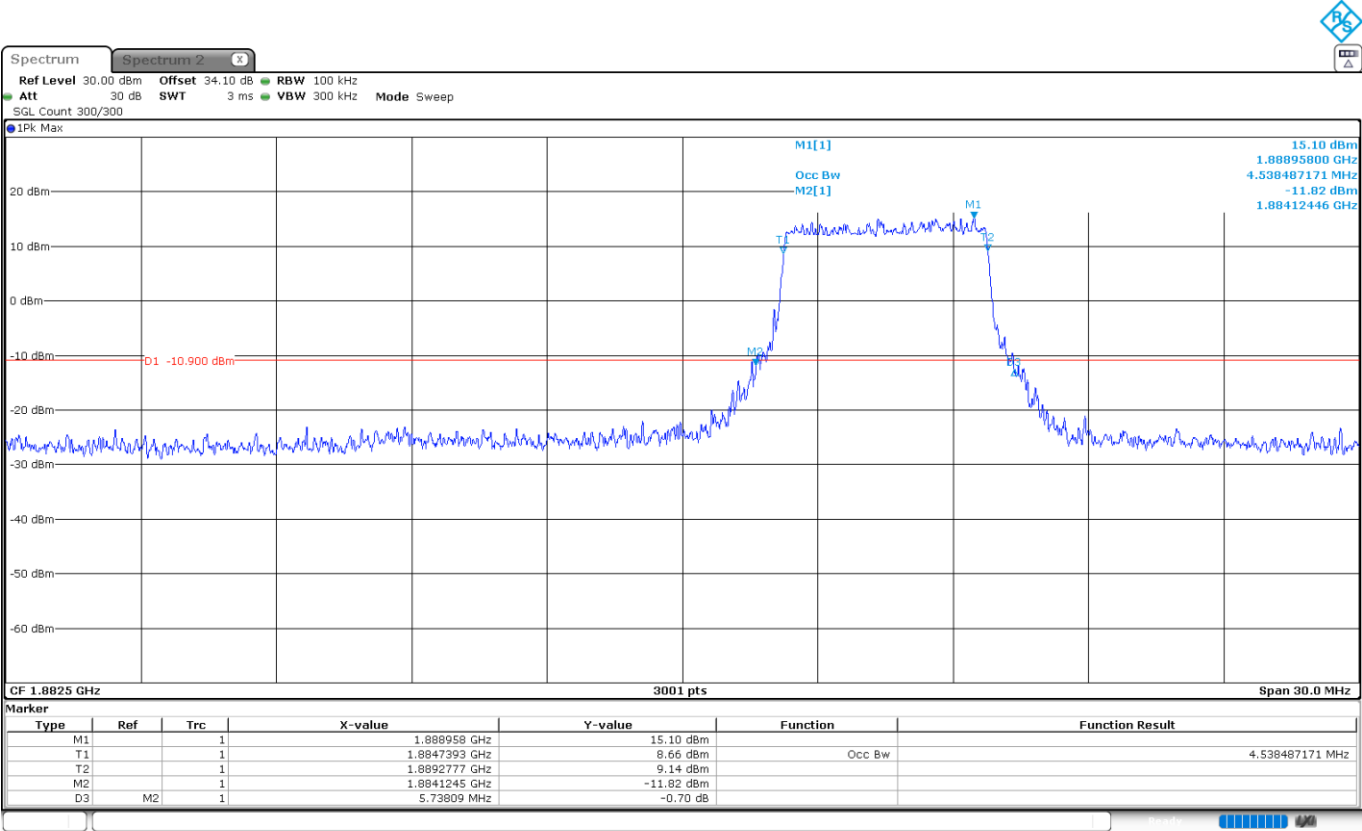

High Channel:

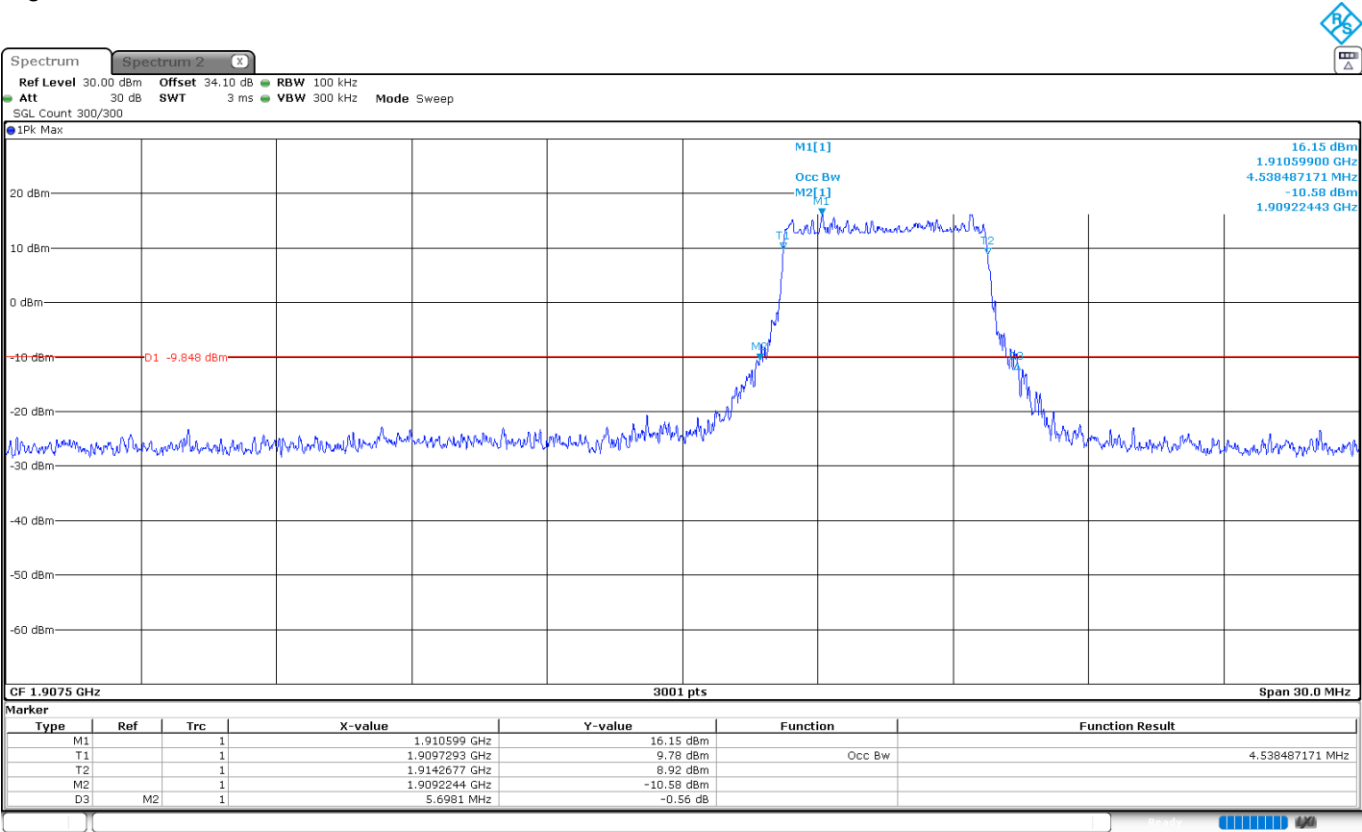

LTE Cat 1bis Band 25. BW=20 MHz. QPSK. RB Size=All.


Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	17.9540153280	17.9406864380	17.9006997670
-26 dBc Bandwidth (MHz)	19.7134000000	19.6868000000	19.9000000000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=20 MHz. 16QAM. RB Size=All.

Channel	Low	Middle	High
99% Occupied Bandwidth (MHz)	4.5718093970	4.5584805060	4.5718093970
-26 dBc Bandwidth (MHz)	6.0113000000	5.8914000000	5.9447000000
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 25. BW=20 MHz. QPSK. RB Size=All.

Low Channel:

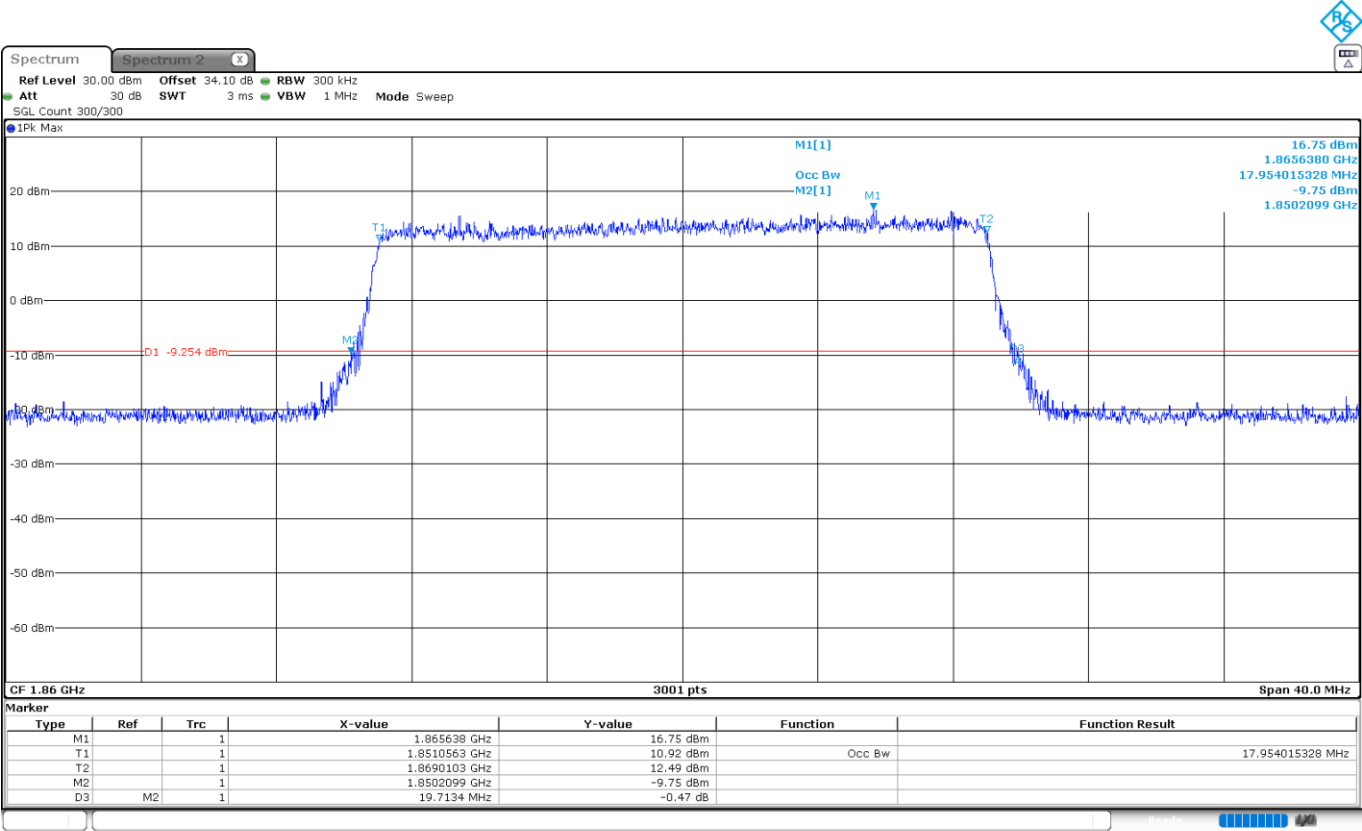

Middle Channel:

