



FCC Certification Test Report

Product Evaluated

Alcatel-Lucent AWS LTE B66a RRH 4x45W
(FCC ID: AS5BBTRX-28)

Customer

Alcatel-Lucent USA, Inc
600-700 Mountain Avenue
Murray Hill, New Jersey 07974-0636 USA

Test Laboratory

Global Product Compliance Laboratory

Alcatel-Lucent USA, Inc
600-700 Mountain Avenue, Rm 5B-108
Murray Hill, New Jersey 07974-0636 USA

Date: September 20, 2016

Revisions

Date	Revision	Section	Change
09/20/16	0		Initial Release

Nokia Global Product Compliance Laboratory represents to the client that testing was done in accordance with standard procedures as applicable, and that reported test results are accurate within generally accepted commercial ranges of accuracy in accordance with the scope of our NVLAP Accreditation. Nokia Global Product Compliance reports only apply to the specific samples tested. This report is the property of the client. This report shall not be reproduced except in full without the written approval of the Nokia Global Product Compliance Laboratory.

Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.

Nokia Global Product Compliance Laboratory represents to the client that the laboratory's accreditation or any of its calibration or test reports in no way constitutes or implies product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Prepared By: Michael P. Farina

Approved By: Ray Johnson

Signed: Michael P. Farina 9/20/2016
Compliance Engineer

Signed: Raymond L. Johnson 9/20/2016
Technical Manager

Table of Contents

1. ATTESTATION OF TEST RESULTS	4
2. SUMMARY OF THE TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY.....	5
2.2 MEASUREMENT UNCERTAINTY FOR ANTENNA PORT TESTING:.....	5
3. GENERAL INFORMATION	6
3.1 PRODUCT DESCRIPTIONS	6
3.2 ANTENNA INFORMATION	7
4. REQUIRED MEASUREMENTS AND RESULTS.....	8
4.1 SECTION 2.1046 MEASUREMENT REQUIRED: RF POWER OUTPUT	9
4.1.1 <i>RF Power Output Measurement</i>	9
4.1.2 <i>Peak-to-Average Power Ratio Measurement</i>	9
4.2 SECTION 2.1047 MEASUREMENT REQUIRED: MODULATION CHARACTERISTICS	20
4.2.1 <i>Modulation Characteristics Measurement</i>	20
4.3 SECTION 2.1049 MEASUREMENT REQUIRED: OCCUPIED BANDWIDTH AND OUT-OF-BAND EMISSIONS 26	
4.3.1 <i>Measurement of Occupied Bandwidth</i>	26
4.3.2 <i>Results:</i>	29
4.4 SECTION 2.1051 MEASUREMENT REQUIRED: SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS	63
4.4.1 <i>Results:</i>	63
4.5 SECTION 2.1055 MEASUREMENT REQUIRED: FREQUENCY STABILITY	64
4.5.1 <i>Frequency Stability Results:</i>	Error! Bookmark not defined.
4.6 SECTION 2.1053 MEASUREMENT REQUIRED: FIELD STRENGTH OF SPURIOUS RADIATION	65
4.7 LIST OF TEST EQUIPMENT	68
4.8 FACILITIES AND ACCREDITATION	70

1. ATTESTATION OF TEST RESULTS

Company Name	Alcatel-Lucent USA, Inc.
FCC ID	AS5BBTRX-28
Product Name	B66a RRH 4x45W
Model Name	AWS LTE B66a RRH 4x45W
Part No	3JR59011AAAC, P2
Serial Number(s)	LBALLU-YD160403FA7
Test Standard(s)	47 CFR FCC Part 27
Reference(s)	<ul style="list-style-type: none">• 47 CFR FCC Part 2 and Part 27• FCC KDB 971168 D01 (October 17, 2014)• ANSI C63.4 (2009)• 3GPP TS 36.104 v12.6.0 (2015-02)
Operating Frequency Band	AWS (Tx: 2110 - 2180 MHz and Rx: 1710 – 1780 MHz), E-UTRAN Band 66a (AWS-1 + AWS-3)
Technology	LTE
Test Frequency Range	10 MHz – 22 GHz
Operation Mode(s)	2x90W MIMO and 4x45W MIMO
Submission Type	Class II Permissive Change
FCC Part 15 Subpart B Compliance	Compliance with Class B
Test Date	July 25 – September 15, 2016
Test Laboratory	Global Product Compliance Laboratory 600-700 Mountain Avenue, Rm 5B-108 Murray Hill, New Jersey 07974-0636 USA

This is to certify that the above product has been evaluated and found to be in compliance with the Rules and Regulations set forth in the above standard(s). The data and the descriptions about the test setup, procedures and configuration presented in this report are accurate. The results of testing in this report apply only to the product/system which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Per the requirement of Section 2.911(d) Certification of Technical Test Data, I hereby certify that the technical test data are the results of tests either performed or supervised by me.

Michael P. Farina
Member of Technical Staff
Global Product Compliance Laboratory
Alcatel-Lucent USA, Inc

2. SUMMARY OF THE TEST RESULTS

47 CFR FCC Sections	Description of Tests	Compliance Results	Notes
2.1046	RF Power Output	Yes	
2.1047	Modulation Characteristics	Yes	
2.1049, 27.53(h)	(a) Occupied Bandwidth (b) Out-of-Band Emissions	Yes	
2.1051, 27.53(h)	Spurious Emissions at Antenna Terminals	Yes	
2.1053, 27.53(h)	Field Strength of Spurious Radiation	Yes	
2.1055, 27.54	Measurement of Frequency Stability	NR	

NR: Not Required

NA: Not Applicable

2.1 Measurement Uncertainty

The results of the calculations to estimate uncertainties for the several test methods and standards are shown in the Table below. These are the worst-case values.

Worst-Case Estimated Measurement Uncertainties

Standard, Method or Procedure	Condition	Frequency MHz	Expanded Uncertainty (k=2)
a. Classical Emissions, (<i>e.g.</i> , ANSI C63.4, CISPR 11, 14, 22, <i>etc.</i> , using ESHS 30,	Conducted Emissions	0.009 - 30	±3.5 dB
	Radiated Emissions (AR-4 Semi-Anechoic Chamber)	30 MHz – 200MHz 200 MHz – 1000 MHz	±5.1 dB ±4.7 dB

2.2 Measurement uncertainty for Antenna Port Testing:

- 9 kHz to 20 MHz: Frequency = 10 Hz, Amplitude = 0.5 dB
- 20 MHz to 1 GHz: Frequency = 100Hz, Amplitude = 0.5 dB
- 1 GHz to 10 GHz: Frequency = 10 kHz, Amplitude = 0.5 dB

3. GENERAL INFORMATION

3.1 Product Descriptions

The equipment under test (EUT) has the following specifications.

Table 3.1.1 Product Specifications

Specification Items	Description
Product Type	Remote Radio Head (RRH) (4Tx, 4Rx), 2x90W MIMO (2T4R) and 4x45W MIMO (4T4R)
Radio Type	Intentional Transceiver
Power Type	- 48 Vdc , 14 Adc nominal
Modulation	QPSK, 16QAM, 64QAM
Operating Frequency Range	Tx 2110 - 2180 MHz/Rx 1710-1780 MHz
Channel Bandwidth	5, 10, 15 and 20 MHz
Max Conducted Power (Rated)	46.53 dBm per port for 4T4R and 49.54dBm per port for 2T4R
Min Conducted Power (Rated)	30.53 dBm per port for 4T4R and 33.54dBm per port for 2T4R
Max EIRP Power (Rated)	82.23 dBμV/m at 3 m and 71.77 dBμV/m at 10 m
Min EIRP Power (Rated)	
Software Version	LR 16.2
Hardware Version	B66a RRH 4x45, P2
Antenna(s)	Refer to Section 3.2

The EUT supports the following carrier configurations:

Table 3.1.2 EUT Supported Configurations

Carrier Bandwidth (MHz)	Maximum No of Carriers per Path	Technology	Supported?
1.23		CDMA	
1.25		CDMA	
5	2	LTE	✓
10	2	LTE	✓
15	1	LTE	✓
20	1	LTE	✓

The operating band consists of the following blocks and spectrum:

Table 3.1.3 EUTRAN 66a, AWS Band
AWS-1 (45 MHz) [Original Equipment Grant]

Blocks	Tx Frequency (MHz)	Rx Frequency (MHz)	Bandwidth (MHz)
A	2110 - 2120	1710 - 1720	10
B	2120 - 2130	1720 - 1730	10
C	2130 - 2135	1730 - 1735	5
D	2135 - 2140	1735 - 1740	5
E	2140 - 2145	1740 - 1745	5
F	2145 - 2155	1745 - 1755	10

AWS-3 (25 MHz) [Class II Permissive Change Request]

Blocks	Tx Frequency (MHz)	Rx Frequency (MHz)	Bandwidth (MHz)
G	2155 - 2160	1755 - 1760	5
H	2160 - 2165	1760 - 1765	5
I	2165 - 2170	1765 - 1770	5
J	2170 - 2180	1770 - 1780	10

3.2 Antenna Information

The product does not incorporate integrated antennas.

4. REQUIRED MEASUREMENTS AND RESULTS

The EUT software has been upgraded to enable it to transmit and receive in the AWS-3 band, which is the subject of this Class II Permissive Change authorization request. Per 47CFR FCC Section 2.1033(c)(14), the following certification tests are required by Section 2.1046 through Section 2.1057. The measurements were conducted in accordance with the procedures set out in Section 2.1041.

47 CFR FCC Sections	Description of Tests	Required	Notes
2.1046	RF Power Output	Yes	
2.1047	Modulation Characteristics	Yes	
2.1049, 27.53(h)	(a) Occupied Bandwidth (b) Out-of-Band Emissions	Yes	
2.1051, 27.53(h)	Spurious Emissions at Antenna Terminals	Yes	
2.1053, 27.53(h)	Field Strength of Spurious Radiation	Yes	
2.1055, 27.54	Measurement of Frequency Stability	No	Same As Original Equipment Filing

4.1 Section 2.1046 MEASUREMENT REQUIRED: RF POWER OUTPUT

This test is a measurement of the total RF power level transmitted at the antenna-transmitting terminal, as shown in the accompanying test set-up diagram. The radio was tuned to a channel which is transmitting continuously in its operating frequency band. The power level of the base station was calibrated to allow the base station to operate at the manufacturer's maximum rated mean power level, i.e., ± 1 dBm (1.25 mW) per LTE carrier at the antenna-transmitting terminal.

4.1.1 RF Power Output Measurement

Power measurements were conducted with a broadband Power Meter in the average mode per KDB 971168 D01. Before the testing was started, the Base Station was given a sufficient "warm-up" period as required.

The maximum rated mean power per single carrier and per dual carrier, were measured at the antenna transmitting terminal for each carrier bandwidth (5, 10, 15 & 20 MHz) with QPSK, 16QAM and 64QAM modulation across the entire AWS-3 operating frequency band, respectively. The maximum rated mean RF power outputs of the EUT measured are given in Table 4.1.1. The RF power output measured for each configuration was also shown as "Ref Lvl" in the plots provided in Sections 4.3 and 4.4.

**Table 4.1.1 The Maximum Average RF Output Power of the EUT- Measured
Single Carrier per Antenna Port**

Transmit Configuration	Measurement Configuration	Maximum Average RF Output Power		Maximum Derivation
		Watts	dBm	dB
2xMIMO	BW 5 MHz	40	46.02	$\leq \pm 1$
2xMIMO	BW 10, 15, 20 MHz	90	49.54	
4xMIMO	BW 5 MHz	20	43.01	
4xMIMO	BW 10, 15, 20 MHz	45	46.53	$\leq \pm 1$

4.1.1.1 RF Power Output Results:

The maximum mean RF power outputs of the EUT measured at its antenna transmitting terminals were measured in full compliance with the Rules of the Commission and are listed above.

4.1.2 Peak-to-Average Power Ratio Measurement:

The Peak-to-Average Power Ratio (PAPR) of the EUT has also been measured per KDB 971168 D01 procedures for 5 MHz, 10 MHz, 15 MHz and 20 MHz carriers at the lowest settable and the highest settable channels of the AWS-3 operating band, with QPSK+16QAM and 64QAM, respectively. Measurements were made for both single and dual carriers at Tx1 & Tx2 for 2T4R operation and at Tx3 & Tx4 for 4T4R operation. The PAPR values (0.1% probability) of the EUT measured are all below 13dB. The maximum PAPR value measured is given in Table 4.1.2 and the plot below.

In order to keep this report to a manageable size, it is sufficient to display only the single carrier configurations for PAPR results.

**Table 4.1.2 The Maximum PAPR Value at 0.1% probability of the EUT
Lowest and Highest Settable Carriers/Fundamentals for QPSK+16QAM and 64QAM Test Modulations**

2T4R MIMO Operation AWS-3

BW MHz	Ant. Term.	Freq MHz	Power 2T	Configuration Modulation	Maximum PAPR Value at 0.1% probability (dB)
5	Tx1	2157.5	40W	QPSK + 16QAM	< 8dB
5	Tx1	2177.5	40W	64QAM	< 8dB
10	Tx1	2160	90W	QPSK + 16QAM	< 8dB
10	Tx1	2175	90W	64QAM	< 8dB
15	Tx2	2162.5	90W	QPSK + 16QAM	≤ 8dB
15	Tx2	2172.5	90W	64QAM	≤ 8dB
20	Tx2	2165	90W	QPSK + 16QAM	< 8dB
20	Tx2	2170	90W	64QAM	≤ 8dB

4T4R MIMO Operation AWS-3

BW MHz	Ant. Term.	Freq MHz	Power 4T	Configuration Modulation	Maximum PAPR Value at 0.1% probability (dB)
5	Tx3	2157.5	20W	QPSK + 16QAM	< 8dB
5	Tx3	2177.5	20W	64QAM	< 8dB
10	Tx3	2160	45W	QPSK + 16QAM	< 10dB
10	Tx3	2175	45W	64QAM	≤ 9dB
15	Tx4	2162.5	45W	QPSK + 16QAM	< 10dB
15	Tx4	2172.5	45W	64QAM	< 10dB
20	Tx4	2165	45W	QPSK + 16QAM	< 10dB
20	Tx4	2170	45W	64QAM	< 10dB

4.1.2.1 Peak-to-Average Power Ratio Results:

The maximum Peak-to-Average Power Ratio (PAPR) of the EUT measured at its antenna transmitting terminals were measured to be in full compliance with the ≤13 dB Rules of the Commission and are listed above.

As stated in KDB 971168 D01 *Power Meas License Digital Systems v02r02*, the peak power of a digitally-modulated signal is predictable only on a statistical basis. Thus, for these types of signals, a statistical measurement of the peak power is necessary. The power complementary cumulative distribution function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.

Plots of the CCDF curves are shown in the following **Fig. 4.1.2**

**Figure 4.1.1 Test Set-Up for Measurement of
Radio Frequency Power Output**



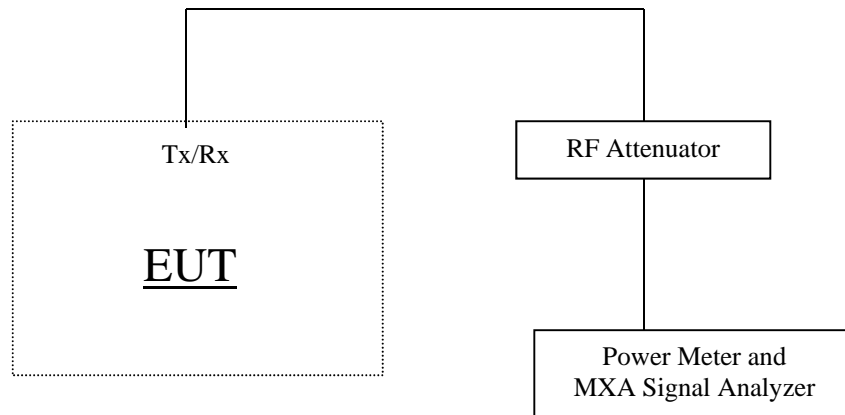


Figure 4.1.2 PAPR Plot Measured with the Maximum Value


BW 5 MHz	Tx1	2157.5 MHz	40W	QPSK + 16QAM
----------	-----	------------	-----	--------------

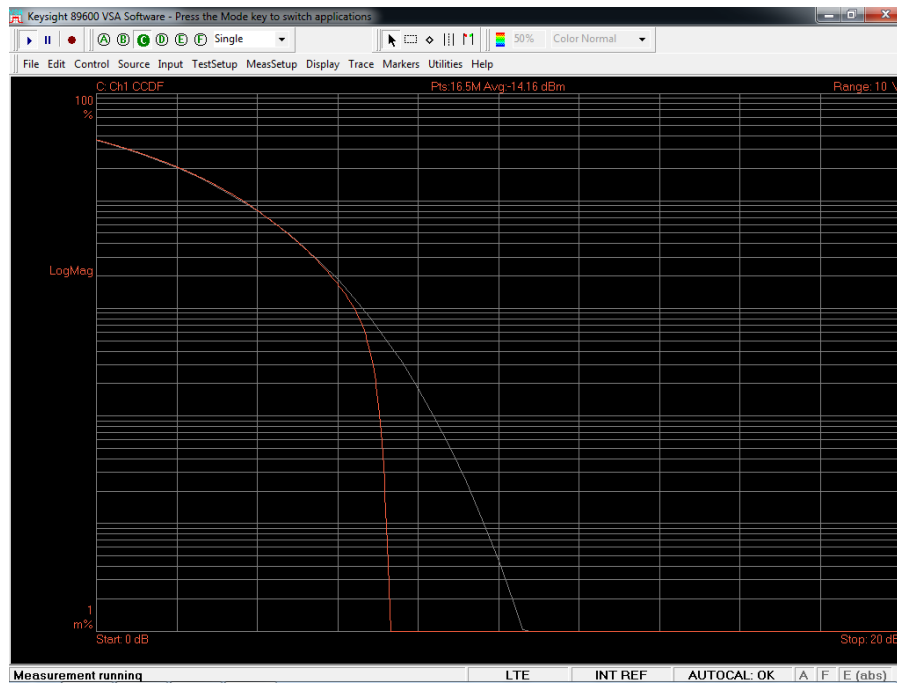


BW 5 MHz	Tx1	2177.5 MHz	40W	64QAM
----------	-----	------------	-----	-------

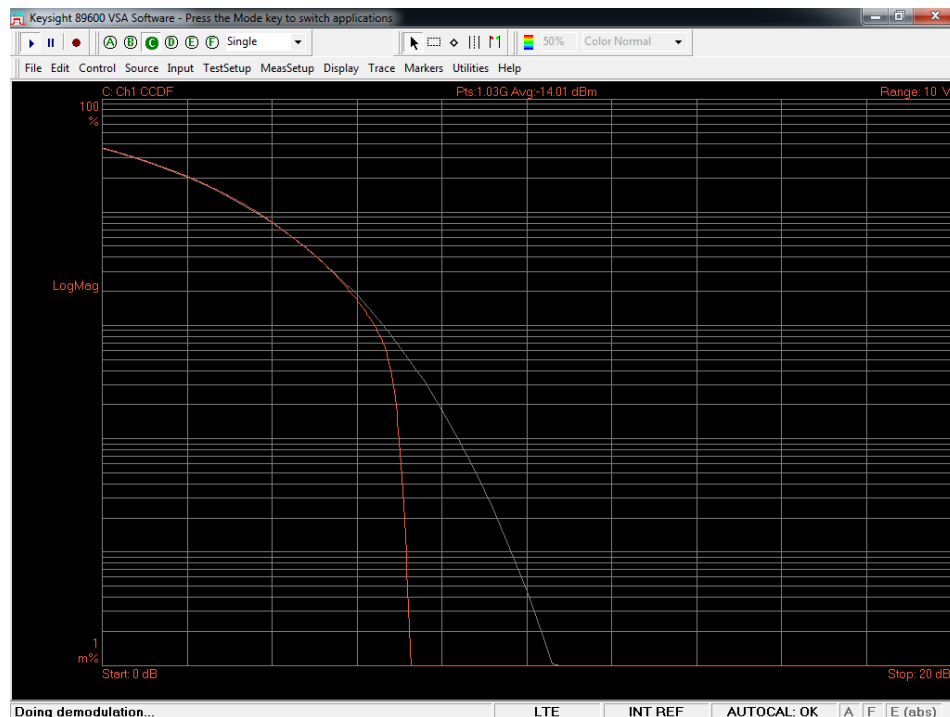


BW 10 MHz	Tx1	2160 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

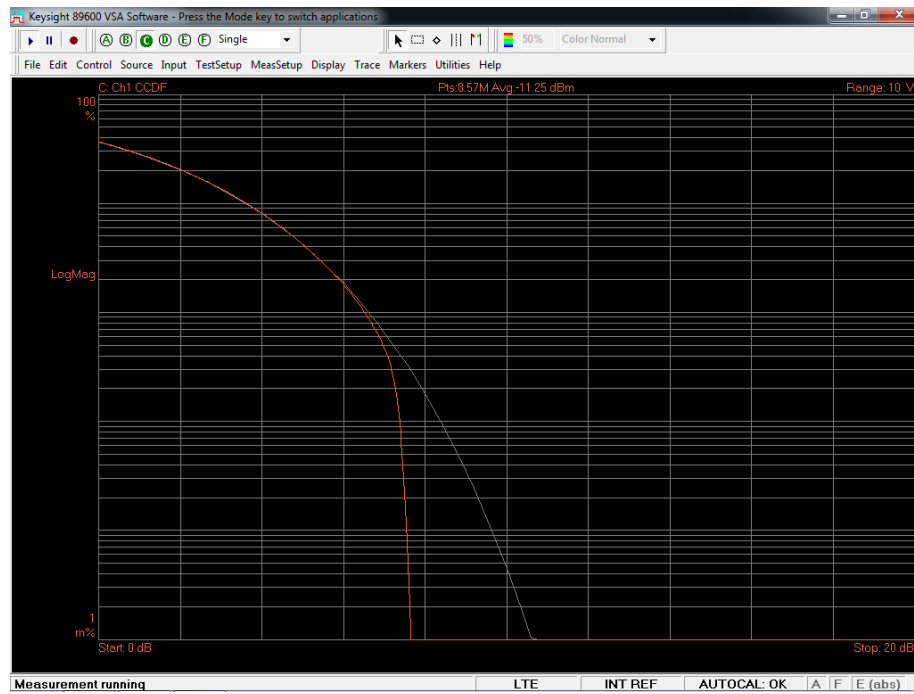


BW 10 MHz	Tx1	2175 MHz	90W	64QAM
-----------	-----	----------	-----	-------

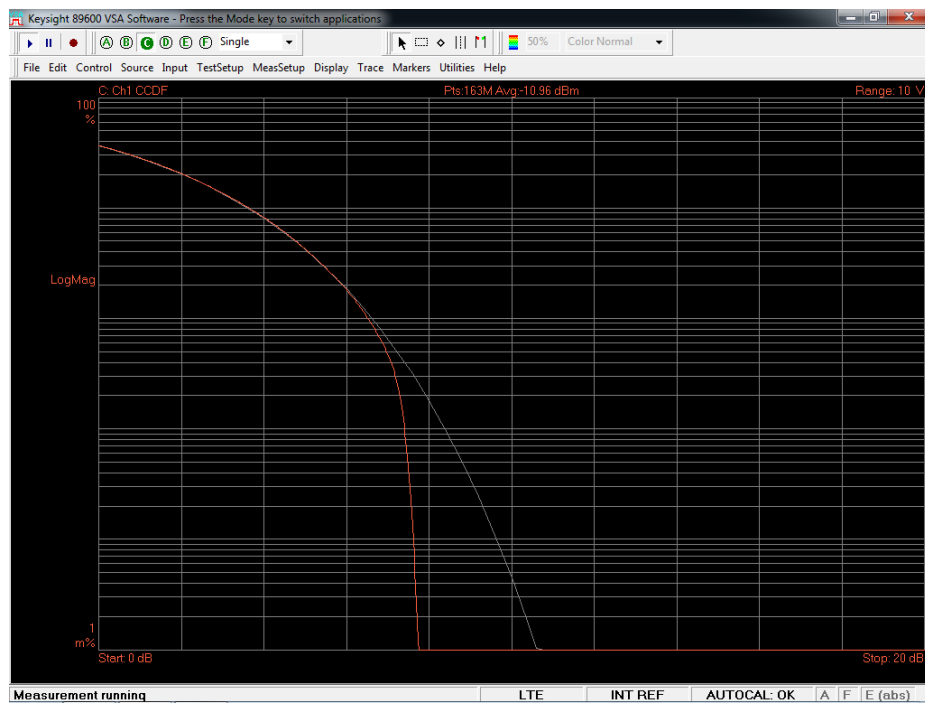


BW 15 MHz	Tx2	2162.5 MHz	90W	QPSK + 16QAM
-----------	-----	------------	-----	--------------

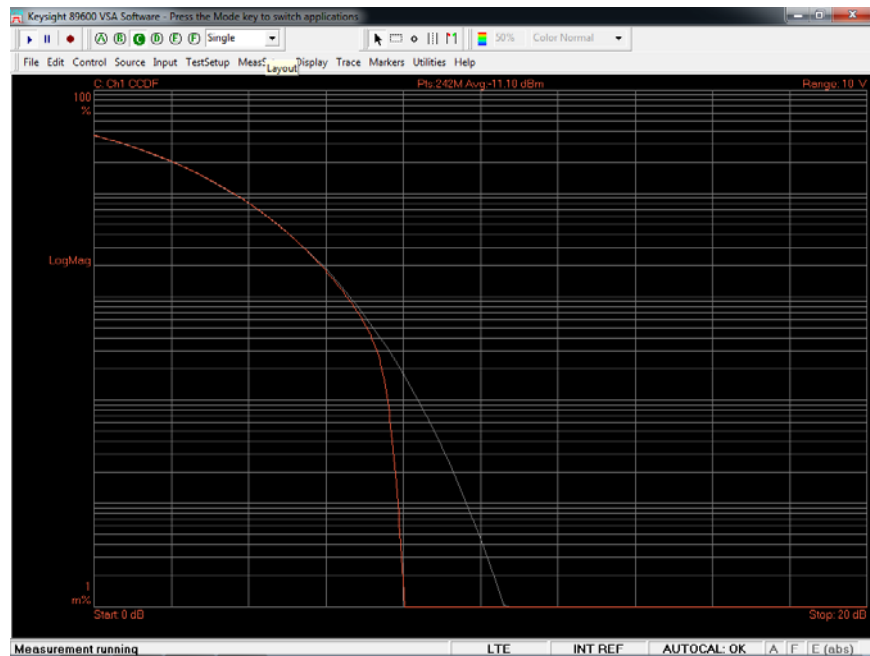


BW 15 MHz	Tx2	2172.5 MHz	90W	64QAM
-----------	-----	------------	-----	-------

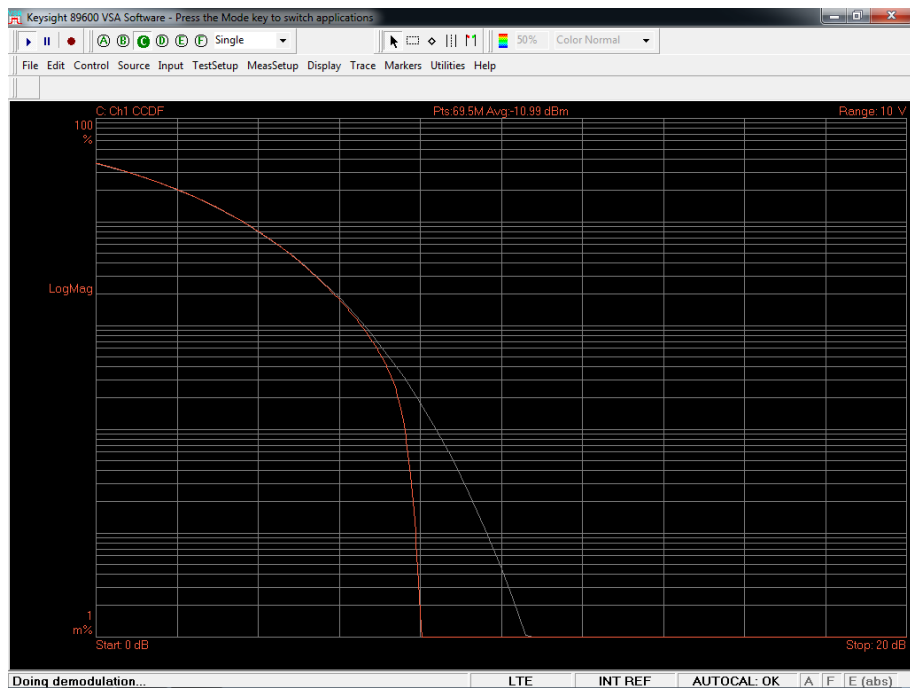


BW 20 MHz	Tx2	2165 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

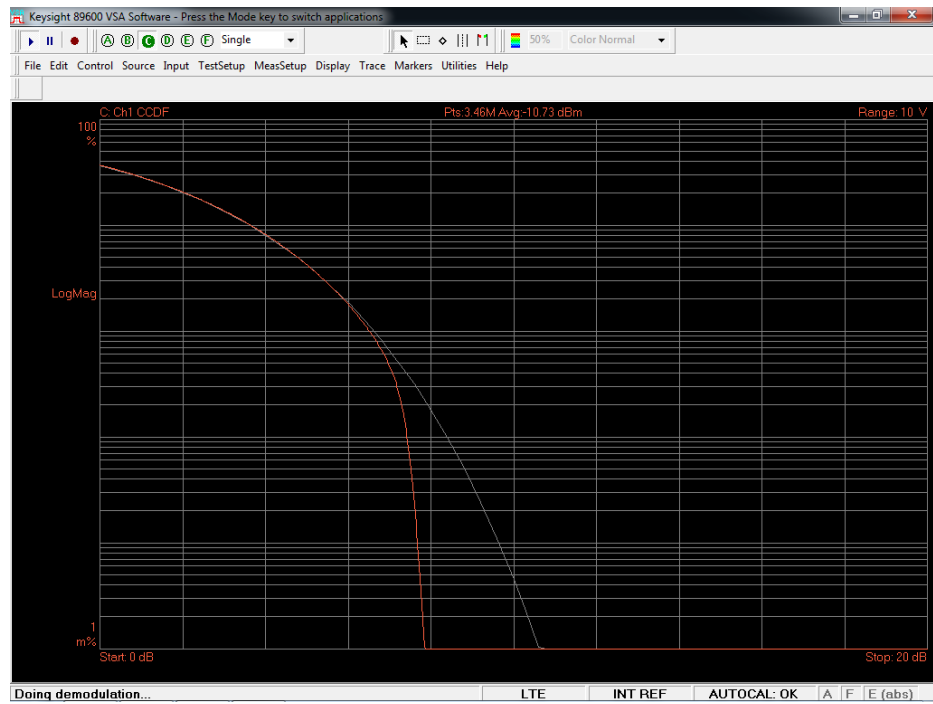


BW 20 MHz	Tx2	2170 MHz	90W	64QAM
-----------	-----	----------	-----	-------

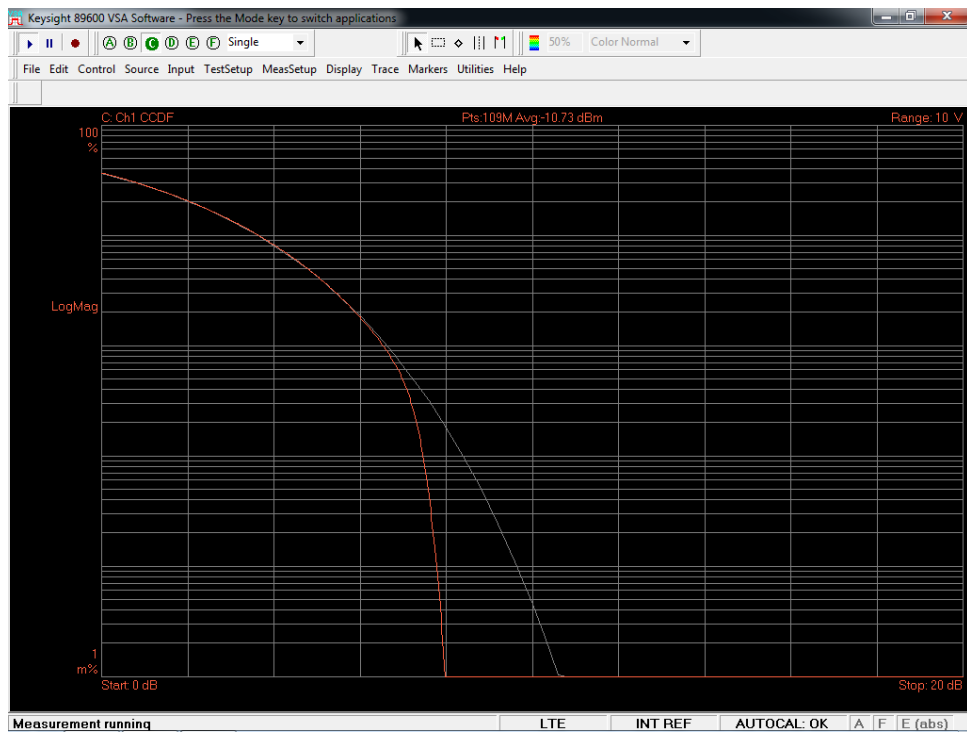


BW 5 MHz	Tx3	2157.5 MHz	20W	QPSK + 16QAM
----------	-----	------------	-----	--------------

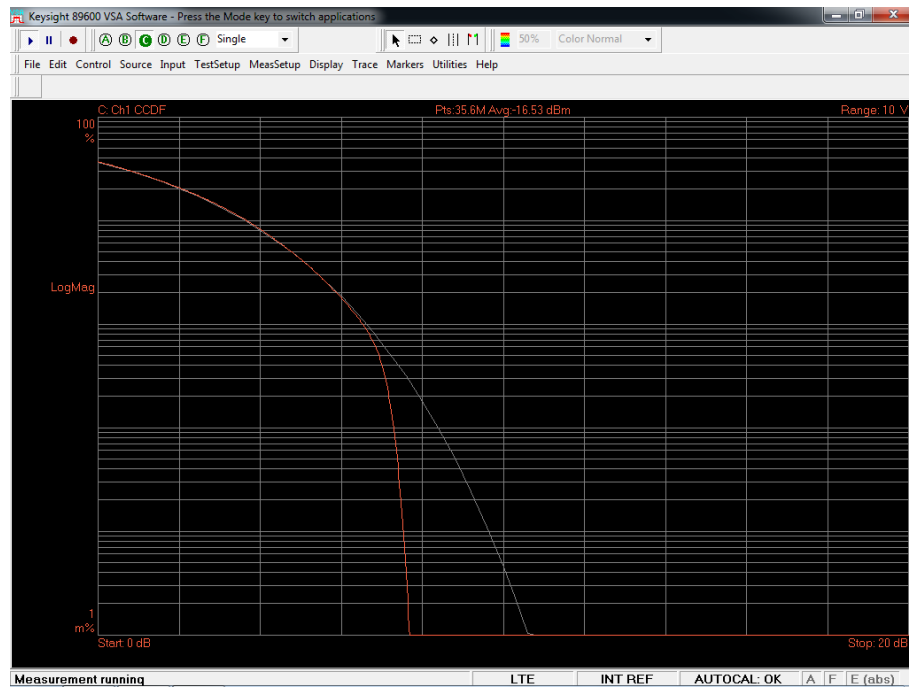


BW 5 MHz	Tx3	2177.5 MHz	20W	64QAM
----------	-----	------------	-----	-------

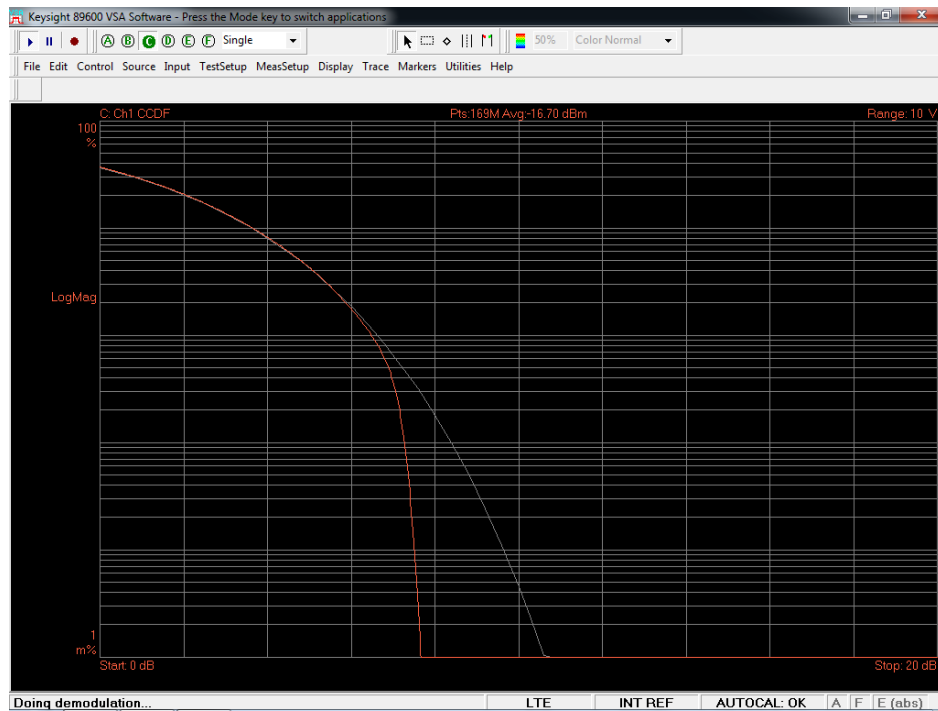


BW 10 MHz	Tx3	2160 MHz	45W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

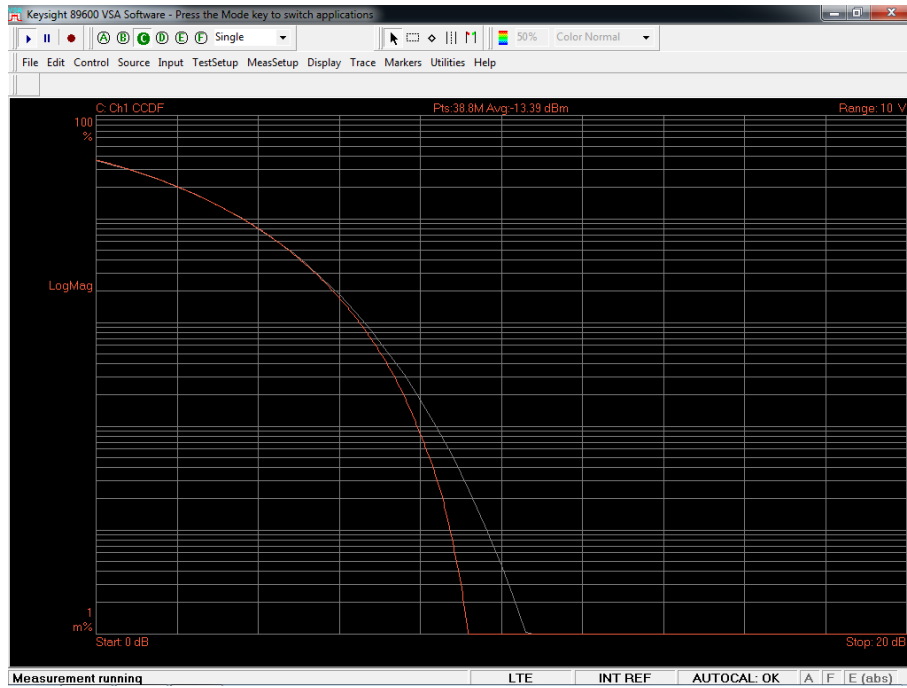


BW 10 MHz	Tx3	2175 MHz	45W	64QAM
-----------	-----	----------	-----	-------

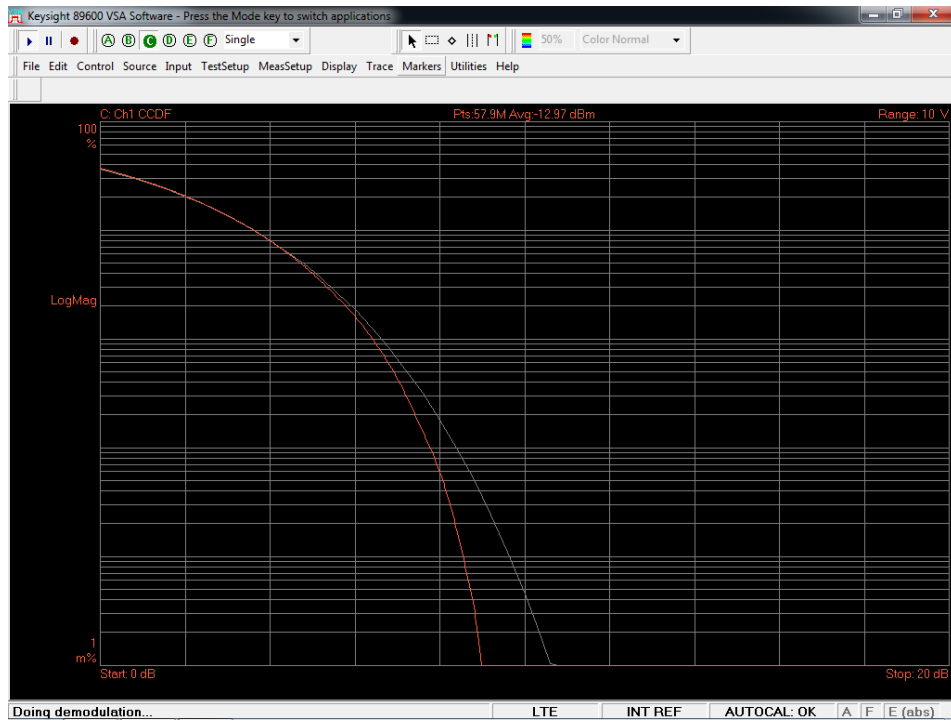


BW 15 MHz	Tx4	2162.5 MHz	45W	QPSK + 16QAM
-----------	-----	------------	-----	--------------

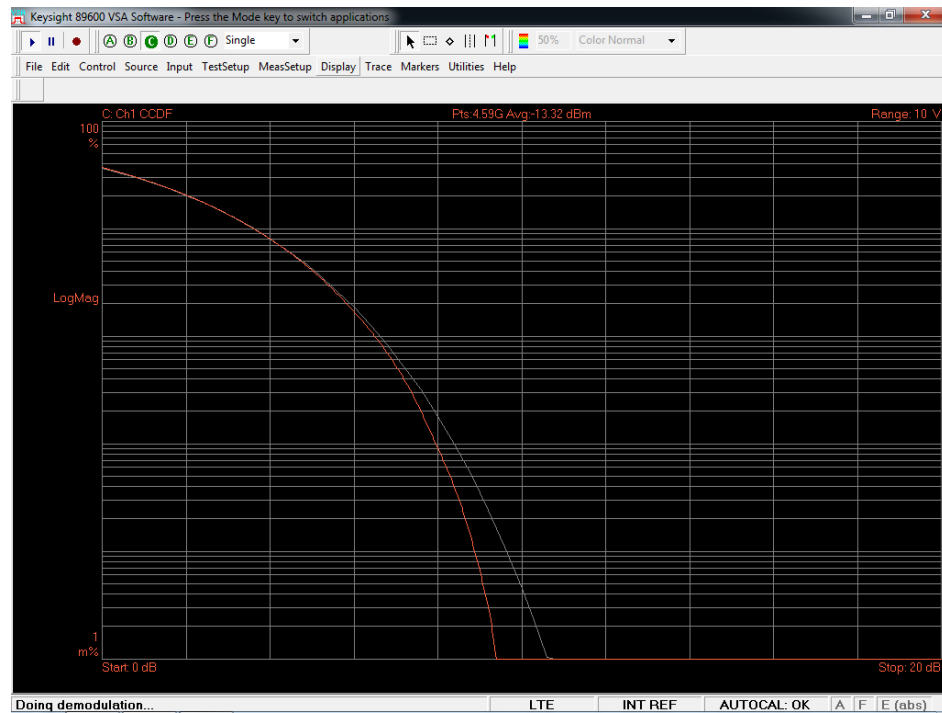


BW 15 MHz	Tx4	2172.5 MHz	45W	64QAM
-----------	-----	------------	-----	-------

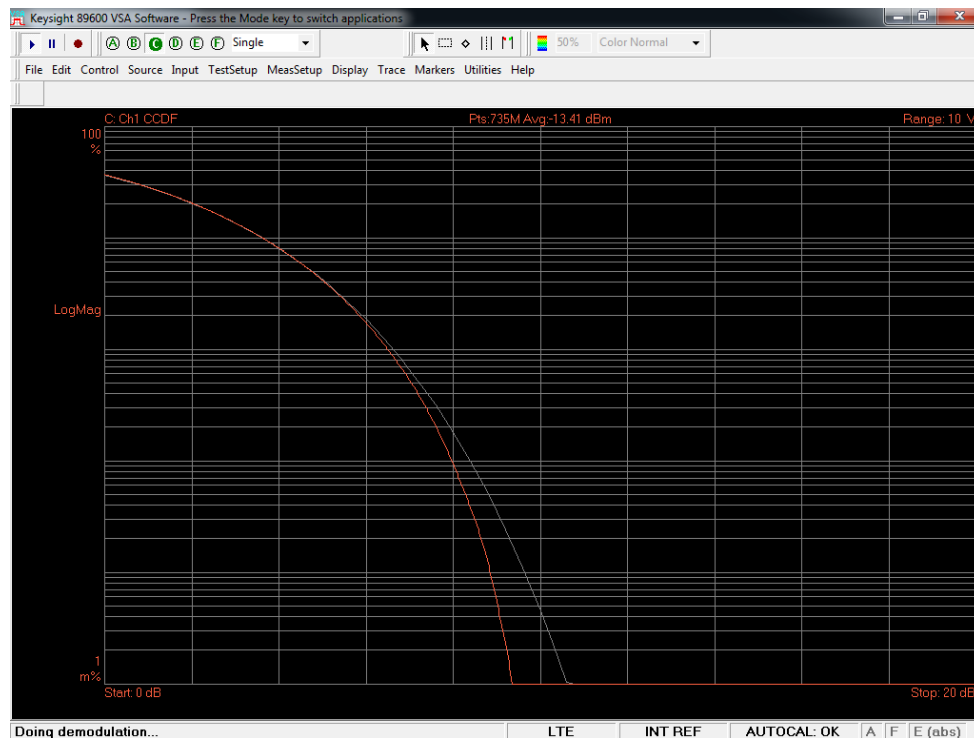

BW 20 MHz	Tx4	2165 MHz	45W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

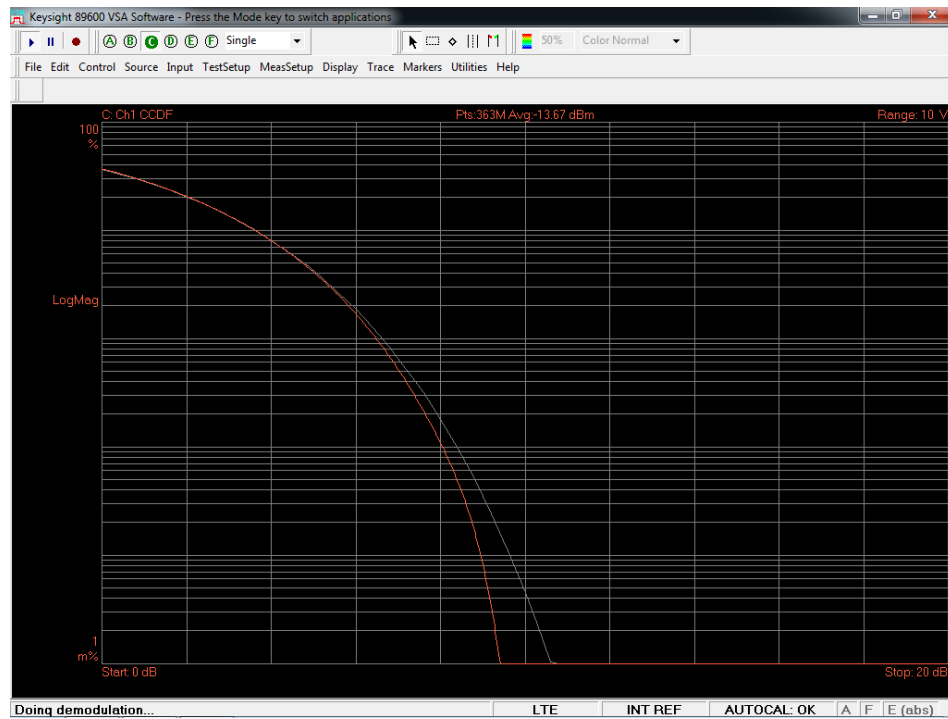

BW 20 MHz	Tx4	2170 MHz	45W	64QAM
-----------	-----	----------	-----	-------

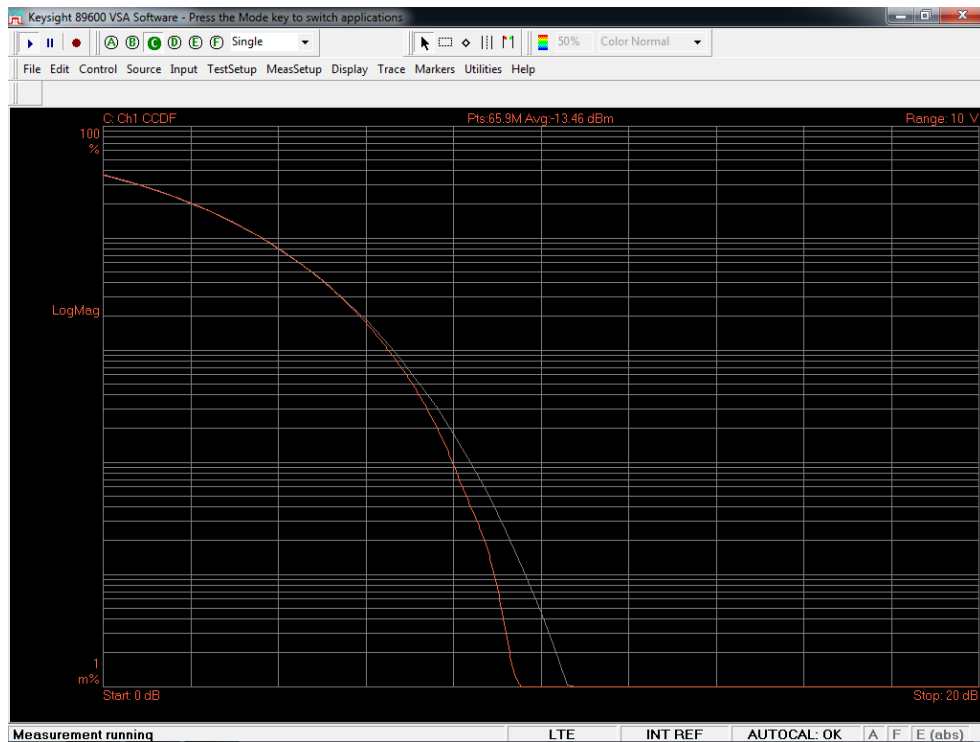

4.2 Section 2.1047 MEASUREMENT REQUIRED: MODULATION CHARACTERIST

The EUT supports LTE technology only. The LTE utilizes Orthogonal Frequency Division Multiplexing (OFDM) which splits the carrier frequency bandwidth into many small subcarriers. Each individual subcarrier is modulated with QPSK, 16QAM and 64QAM digital modulation formats.

In QPSK, there are 4 possible symbol states and each symbol carries 2 bits of information. In 16QAM, there are 16 possible symbol states and each 16-QAM symbol carries 4 bits of information. While in 64QAM, there are 64 possible symbol states and each 64-QAM symbol carries 6 bits of information. Higher-order modulation, where the constellations become more dense, is more sensitive to poor channel conditions than the lower-order modulation.

The modulation characteristics measurement of LTE carriers measures the difference between the ideal symbols and the measured symbols after the equalization. The measurement was performed for QPSK, 16QAM and 64QAM, respectively, where the carrier power level was adjusted to the maximum rated mean power at the antenna terminal.

4.2.1 Modulation Characteristics Measurement

The measurements were performed at the antenna transmitting terminal of the base station system with a signal analyzer, which was calibrated in accordance with ISO 9001 process. The test set-up diagram is given in the Figure 4.2.1, where the signal analyzer used the external signals from the base station as its trigger source and time reference. Figures 4.2.2, 4.2.3, 4.2.4 and 4.2.5 show representative screen plots of the modulation measurement for 5 MHz, 10 MHz, 15 MHz and 20 MHz LTE carriers, respectively, in QPSK+16QAM combined and 64QAM modulations.

4.2.1.1 Modulation Measurements Results:

The modulation characteristics of the EUT measured are in full compliance with the Rules of the Commission. Since these measurements are repetitive, it is sufficient to display only the higher power 2T4R measurements.

Figure 4.2.1 Test Set-Up for Measurement of Modulation Characteristics, Occupied Bandwidth and Out-of-Band Emissions


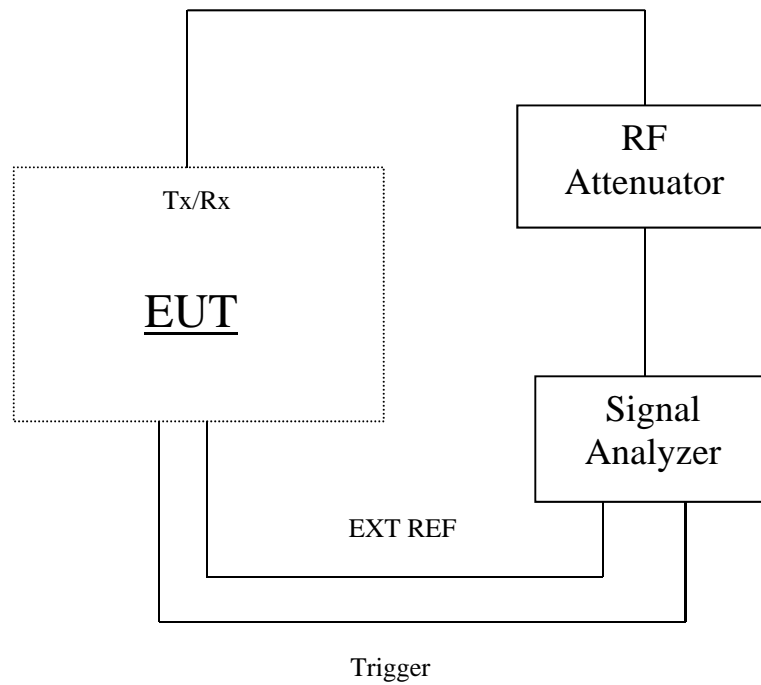


FIGURE 4.2.2 Modulation Measurement for a 5 MHz LTE Carrier with QPSK +16QAM and 64QAM Modulations

BW 5 MHz	Tx1	2157.5 MHz	40W	QPSK + 16QAM
----------	-----	------------	-----	--------------

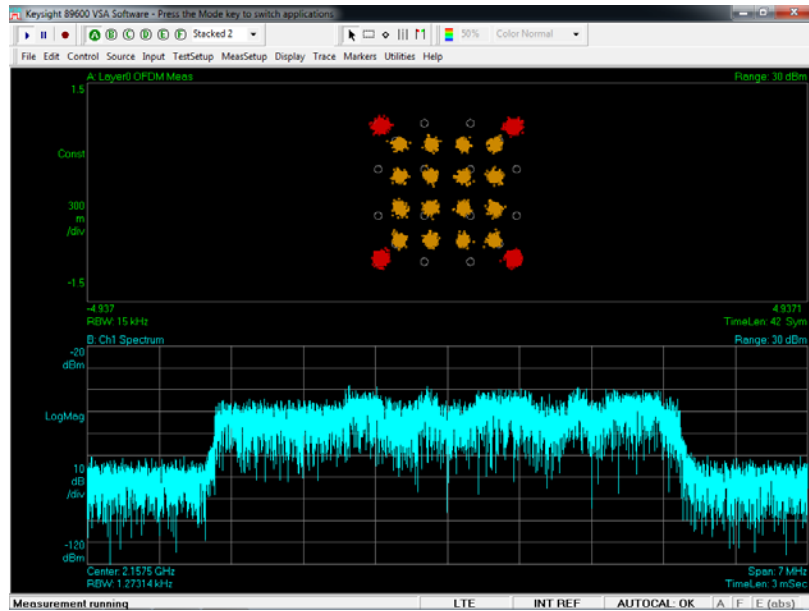

BW 5 MHz	Tx1	2177.5 MHz	40W	64QAM
----------	-----	------------	-----	-------


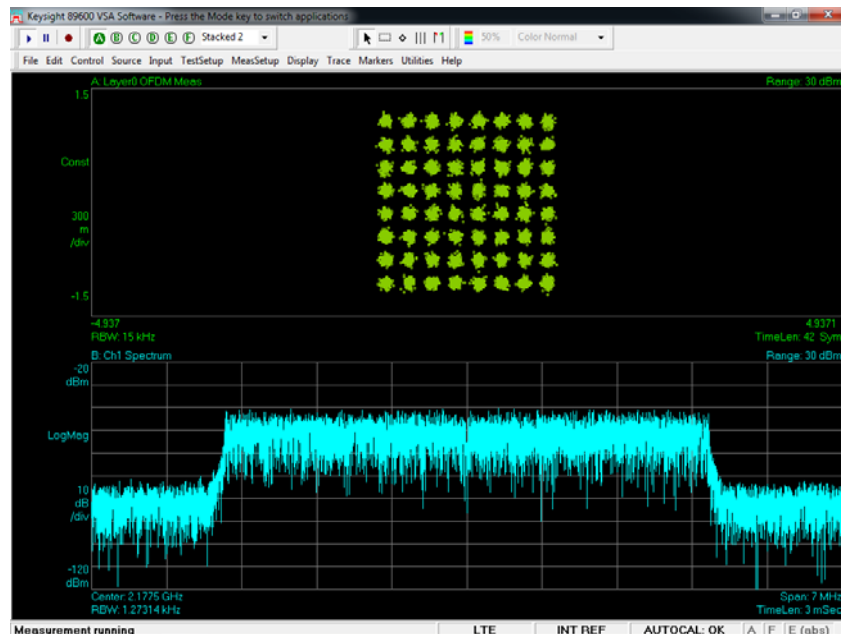


FIGURE 4.2.3 Modulation Measurement for a 10 MHz LTE Carrier with QPSK + 16QAM and 64QAM Modulations

BW 10 MHz	Tx1	2160 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

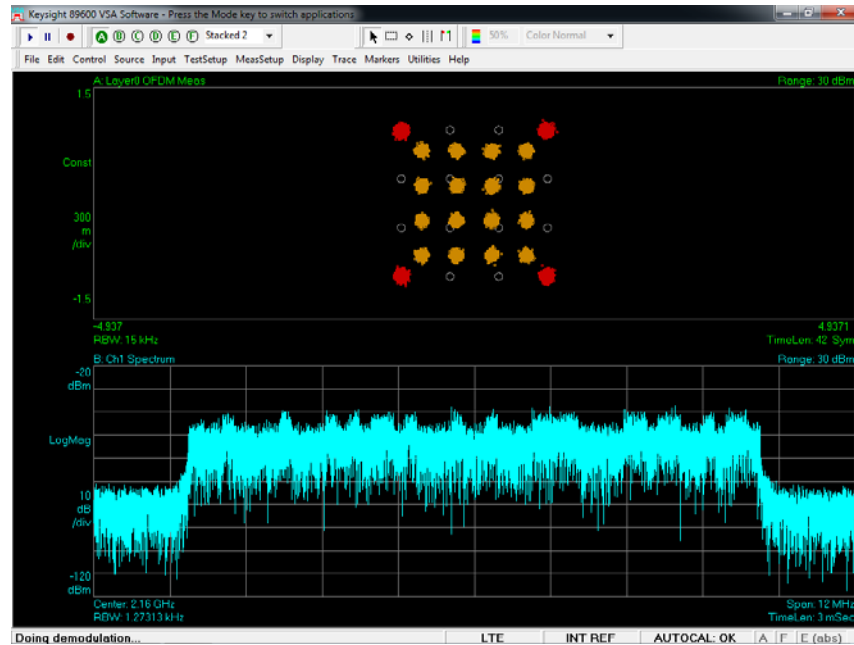

BW 10 MHz	Tx1	2175 MHz	90W	64QAM
-----------	-----	----------	-----	-------


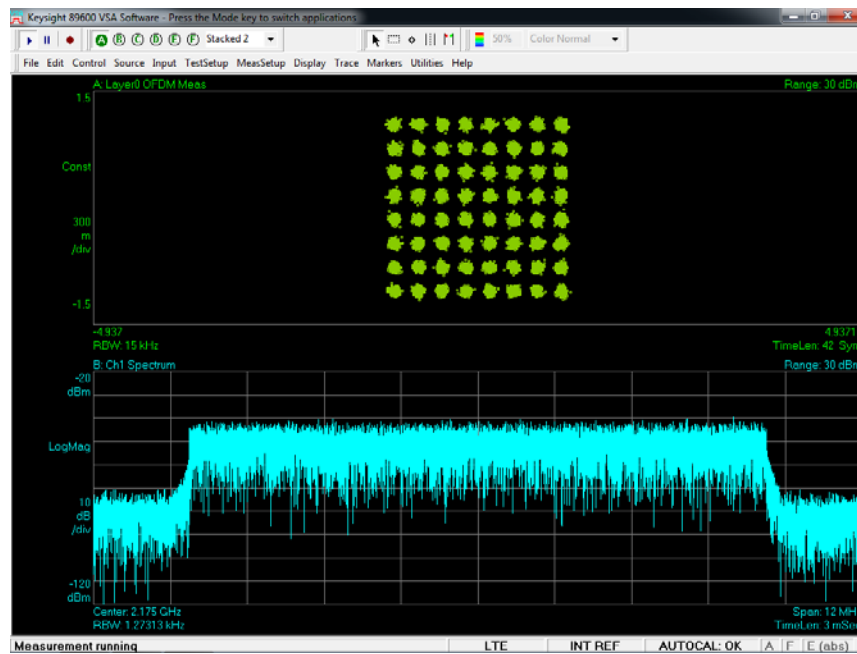


FIGURE 4.2.4 Modulation Measurement for a 15 MHz LTE Carrier with QPSK + 16QAM and with 64QAM Modulations

BW 15 MHz	Tx2	2162.5 MHz	90W	QPSK + 16QAM
-----------	-----	------------	-----	--------------

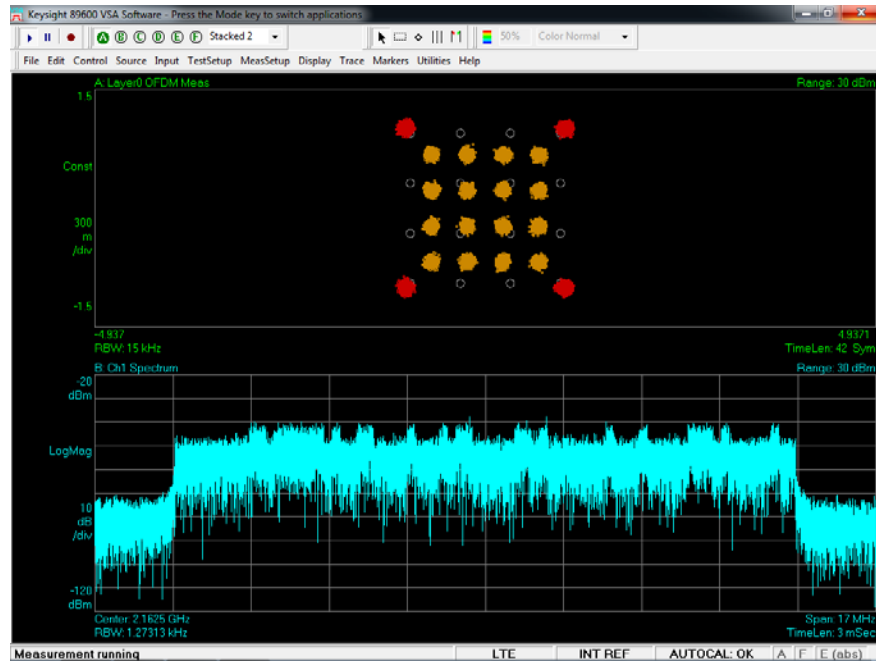

BW 15 MHz	Tx2	2172.5 MHz	90W	64QAM
-----------	-----	------------	-----	-------



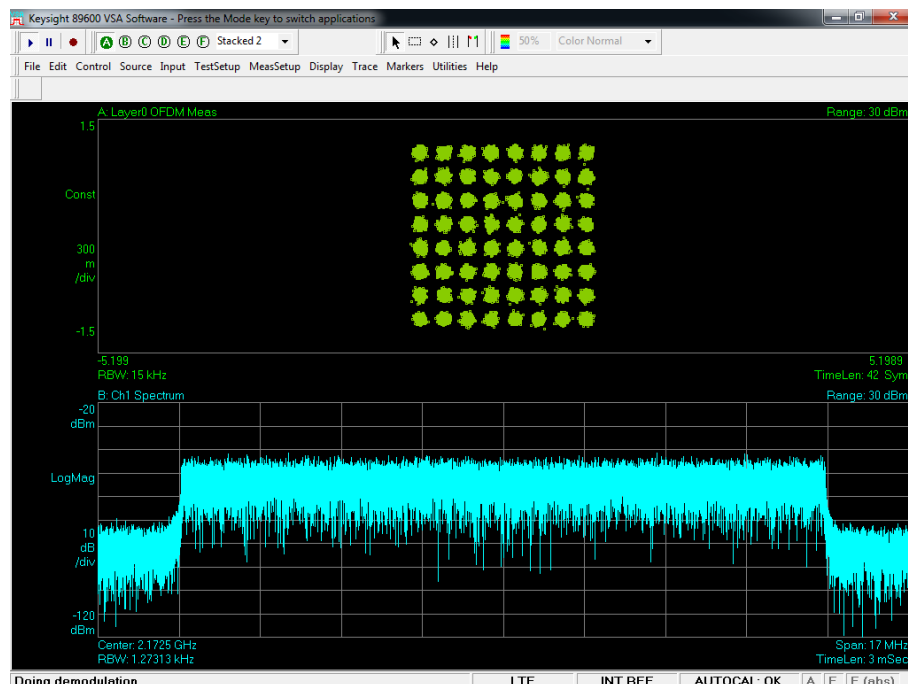


FIGURE 4.2.5 Modulation Measurement for a 20 MHz LTE Carrier with QPSK +16QAM and with 64QAM Modulations

BW 20 MHz	Tx2	2165 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

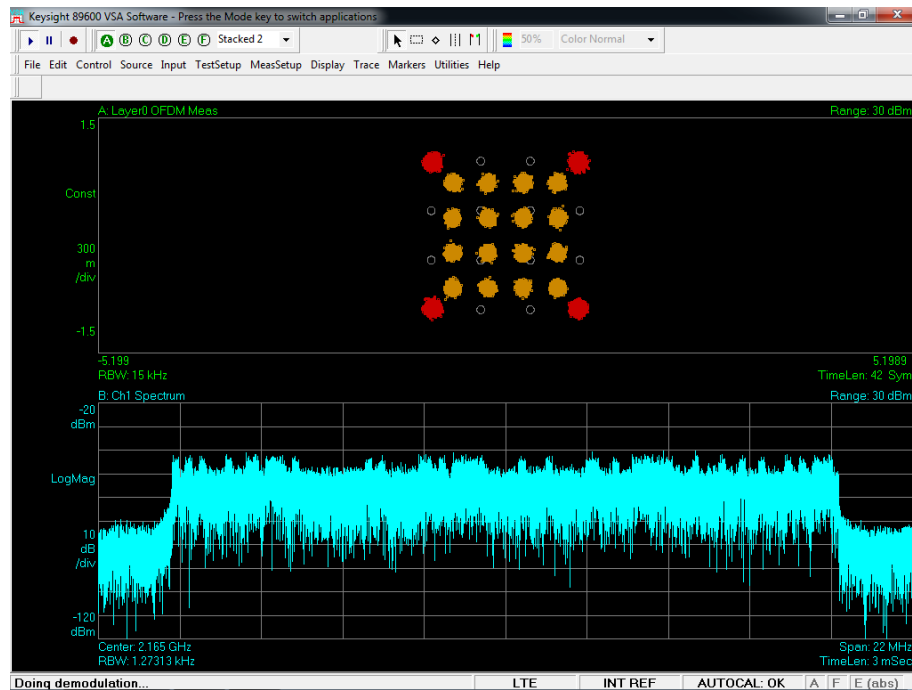

BW 20 MHz	Tx2	2170 MHz	90W	64QAM
-----------	-----	----------	-----	-------

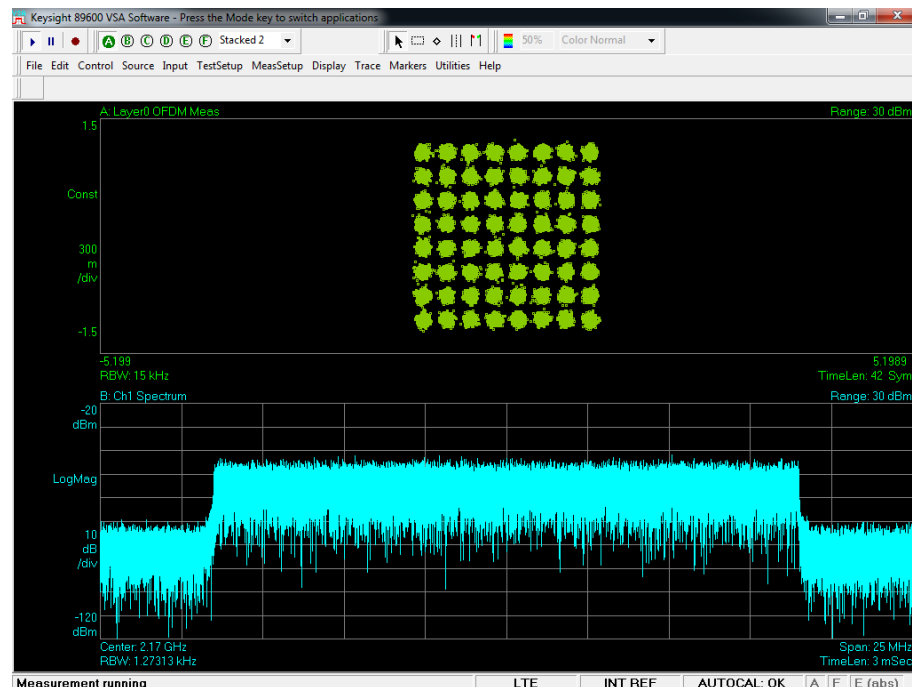

4.3 Section 2.1049 MEASUREMENT REQUIRED: OCCUPIED BANDWIDTH AND OUT-OF-BAND EMISSIONS

This test measures the Occupied Bandwidth of the transmitting carrier and the Out-of-Band Emissions in the frequency spectrum immediately outside and adjacent to the transmitting carrier(s).

The occupied bandwidth (OBW) is usually defined either as the 99% power OBW or a relative OBW. The 99% OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated or conducted are each equal to 0.5 percent of the total mean power radiated or conducted by a given emission. The relative OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

Per KDB 971168 D01 v02r02, the relative OBW must be measured and reported when it is specified in the applicable rule part; otherwise, the 99% OBW shall be measured and reported. The OBW shall be measured when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment is operated.

4.3.1 Measurement of Occupied Bandwidth

The operating blocks and carrier configurations supported are provided in Section 3.1 Product Descriptions. The EUT transmitting band for wireless communication is governed by the FCC rules in CFR 47, Part 27, Subpart C. The minimum emission requirements and the setting of measurement equipment for the out-of-band emissions measurement of carriers were specified in FCC Part 27.53(h). The FCC's requirements are tabulated in the following table:

Table 4.3.1 FCC Part 27.53(h) Transmitter Unwanted Emission Limits

Frequency	Required Minimum Attenuation below the Mean Carrier Power P	Measurement Resolution Bandwidth (RBW)** of Spectrum Analyzer
1MHz Bands Immediately Outside the Transmitting Frequency Band	$(43 + 10 \log P \text{ watts}) \text{ dBc} = -13\text{dBm}^*$	30 kHz for BW 5 MHz 100kHz for BW 10MHz 100kHz for BW 15MHz 100kHz for BW 20MHz
Outside the above Frequency Range	$(43 + 10 \log P \text{ watts}) \text{ dBc} = -13\text{dBm}^*$	1MHz

*For Nx MIMO, the limit is reduced by $10 \cdot \log(N)$ dB.

** 3GPP TS 36.104, Table 6.6.3.3-2: Additional operating band unwanted emission limits for E-UTRA bands > 1GHz

The above requirement was used as the required emission limit mask in the out-of-band emissions measurement. The occupied bandwidth and out-of-band emissions measurements were made at the antenna transmitting terminal for QPSK+16QAM and 64QAM modulations, respectively. The appropriate E-UTRA test model specified in 3GPP TS 36.141 and TS 36.104 was used for LTE carriers.

The measurements were performed with a spectrum analyzer, consistent with ANSI C63.26. The test set-up diagram is same as the one shown in the Figure 4.3.1.

The 99% occupied bandwidth measurement of an LTE carrier was measured per FCC KDB 971168, using an Agilent Technologies N9020A MXA Signal Analyzer. For the out-of-band emissions measurement, the spectrum analyzer is normally set with a resolution bandwidth which is equal to at least 1% of carrier bandwidth [Part 27.53 (h) (1), (3)] and a video bandwidth which is equal to at least 3xRBW as shown in the plots of the occupied bandwidth measurement attached in the following pages. The emissions outside the above spans were evaluated in Measurement Required: Out-of-Block Spurious Conducted Emissions. The top of the carrier measured with a resolution bandwidth which is equal to 1% of carrier bandwidth was 20 dB below the LTE carrier power measured with a resolution bandwidth greater than the carrier bandwidth (if available) or a wideband power meter. This 20dB offset was due to the fact that $10 \log (BW/1\% * BW) = 20$ dB. The RMS average detector was used in all above measurements. The measurement met the requirements of ANSI C63.26 paragraphs 5.2.4.4.1 and 5.7 which requires that the number of points in the sweep be $> 2 \times \text{Span}/\text{RBW}$.

The B66a RRH 4x45W operates either with a single carrier set to bandwidths (BW) of 5 MHz, 10 MHz, 15 MHz or 20 MHz, at either the 2x90W MIMO or 4x45W MIMO power levels as previously cited. It can also operate in dual carrier mode with any combination of bandwidths (BW): 5+5, 5+10, 5+15, 5+20, 10+15, 10+20, 15+20 and 10+10. Measurements for single carriers were made at the lowest settable and highest settable carrier frequencies for the AWS-3 (2155 – 2180 MHz) frequency band (Blocks G, H, I & J). To keep this test report to a manageable size, it is sufficient to display plots for the lowest settable and highest settable carriers for all four bandwidths, which is representative of the product.

The emission masks and measurement resolution bandwidths (RBW) were consistent with 3GPP TS 36.104 Table 6.6.3.3-2. The out-of-band emissions were measured using Total Integrated Laboratory Environment (TILE) EMI test software, by ETS-Lindgren. The carrier configurations displayed are tabulated below.

Table 4.3.2 Channels Tested for Occupied Bandwidth and Out-of-Band

Single Carrier at Max Power
AWS-3 (2155 – 2180 MHz) Only
2T = 10 log 2 = 3.01 dB

Test Number	BW	Block	DL Carrier Frequency	DL Earfcn	Max Power 2T	Modulation	99% Power OBW
1 Tx1	5 MHz	G low	2157.5 MHz	66911	40 W	QPSK + 16QAM	4.4492 MHz
2 Tx1	5 MHz	J high	2177.5 MHz	67111	40 W	64QAM	4.4812 MHz
3 Tx1	10 MHz	GH low	2160.0 MHz	66936	90 W	QPSK + 16QAM	8.9577 MHz
4 Tx1	10 MHz	J high	2175.0 MHz	67086	90 W	64QAM	8.9642 MHz
5 Tx2	15 MHz	GHI low	2162.5 MHz	66961	90 W	QPSK + 16QAM	13.418 MHz
6 Tx2	15 MHz	IJ high	2172.5 MHz	67061	90 W	64QAM	13.412 MHz
7 Tx2	20 MHz	GHIJ low	2165.0 MHz	66986	90 W	QPSK + 16QAM	17.874 MHz
8 Tx2	20 MHz	HIJ high	2170.0 MHz	67036	90 W	64QAM	17.875 MHz

Single Carrier at Max Limitation
AWS-3 (2155 – 2180 MHz) Only
4T = 10 log 4 = 6.02 dB

Test Number	BW	Block	DL Carrier Frequency	DL Earfcn	Max Power 4T	Modulation	99% Power OBW
9 Tx3	5 MHz	G low	2157.5 MHz	66911	20 W	QPSK + 16QAM	4.4709 MHz
10 Tx3	5 MHz	J high	2177.5 MHz	67111	20 W	64QAM	4.4815 MHz
11 Tx3	10 MHz	GH low	2160.0 MHz	66936	45 W	QPSK + 16QAM	8.9696 MHz
12 Tx3	10 MHz	J high	2175.0 MHz	67086	45 W	64QAM	8.9501 MHz
13 Tx4	15 MHz	GHI low	2162.5 MHz	66961	45 W	QPSK + 16QAM	13.454 MHz
14 Tx4	15 MHz	IJ high	2172.5 MHz	67061	45 W	64QAM	13.437 MHz
15 Tx4	20 MHz	GHIJ low	2165.0 MHz	66986	45 W	QPSK + 16QAM	17.897 MHz
16 Tx4	20 MHz	HIJ high	2170.0 MHz	67036	45 W	64QAM	17.884 MHz

Dual Carrier
AWS-1 (2110 – 2155 MHz)
AWS-3 (2155 – 2180 MHz)
Non-Contiguous, Mixed and Non-Mixed Mode
2T = 10 log 2 = 3.01 dB

Test Number	Block	BW	Center Frequency C1 + C2 MHz	Power per Carrier W	Max Power 2T	Modulation C1	Modulation C2
17 Tx1	G-J	5 + 5	2157.5 + 2177.5	40 + 40	80 W	QPSK+16QAM	64QAM
18 Tx1	G-J	5 + 10	2157.5 + 2175	40 + 50	90 W	QPSK+16QAM	64QAM
19 Tx1	G-IJ	5 + 15	2157.5 + 2172.5	40 + 50	90 W	QPSK+16QAM	64QAM
20 Tx1 Mixed Mode	E-HIJ	5 + 20	2142.5 + 2170	40 + 50	90 W	QPSK+16QAM	64QAM
21 Tx2 Mixed Mode	DE-IJ	10 + 15	2140 + 2172.5	45 + 45	90 W	QPSK+16QAM	64QAM
22 Tx2 Mixed Mode	DE-HIJ	10 + 20	2140 + 2170	45 + 45	90 W	QPSK+16QAM	64QAM
23 Tx2 Mixed Mode	EF-HIJ	15 + 20	2147.5 + 2170	45 + 45	90 W	QPSK+16QAM	64QAM
24 Tx2	GH-J	10 + 10	2160 + 2175	45 + 45	90 W	QPSK+16QAM	64QAM

4.3.1.1 Mask Parameters

§27.53 (h) AWS Emission Limits

(1) *General protection levels.* Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.


(3) *Measurement procedure.* (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Results:


The widest occupied bandwidth plots for each single carrier configuration, with QPSK+16QAM and 64 QAM test modulations, is displayed below. The results are tabulated above.

FIGURE 4.3.1 99% Power OCCUPIED BANDWIDTH PLOTS


BW 5 MHz	Tx1	2157.5 MHz	40W	QPSK + 16QAM
----------	-----	------------	-----	--------------

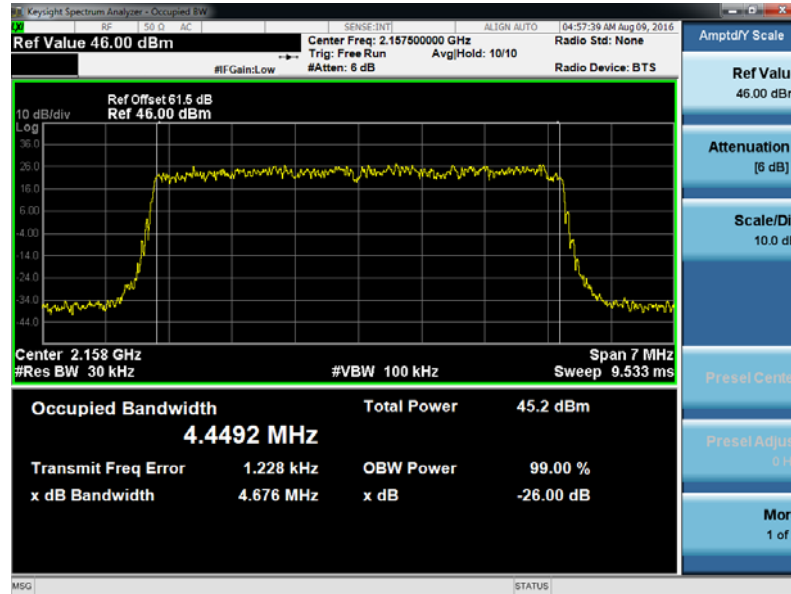


BW 5 MHz	Tx1	2177.5 MHz	40W	64QAM
----------	-----	------------	-----	-------

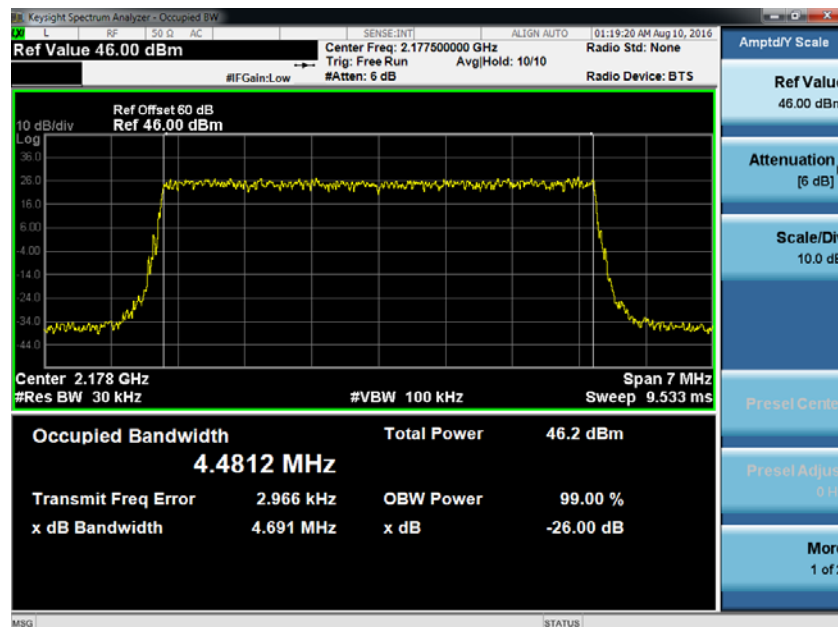


BW 10 MHz	Tx1	2160 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

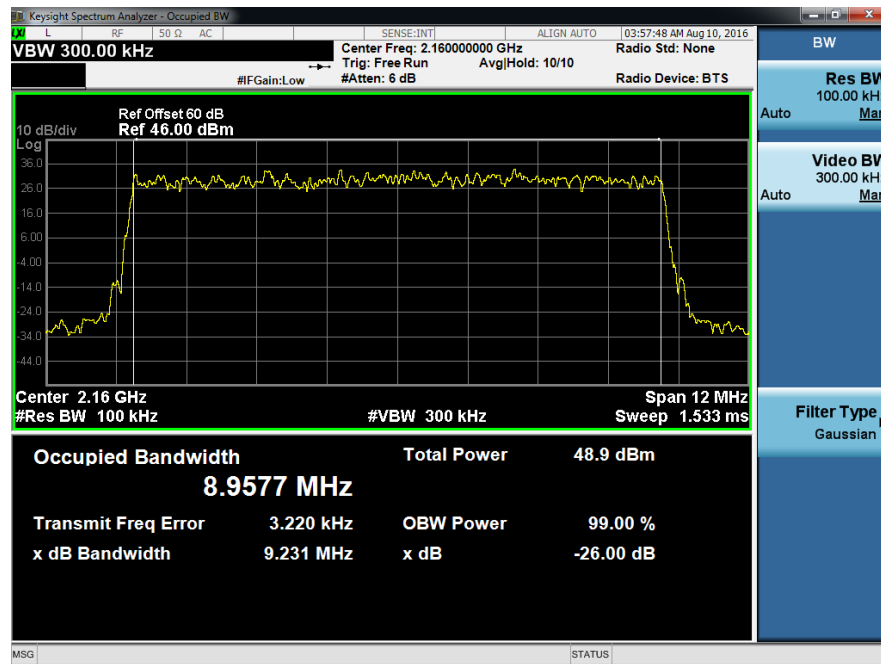


BW 10 MHz	Tx1	2175 MHz	90W	64QAM
-----------	-----	----------	-----	-------

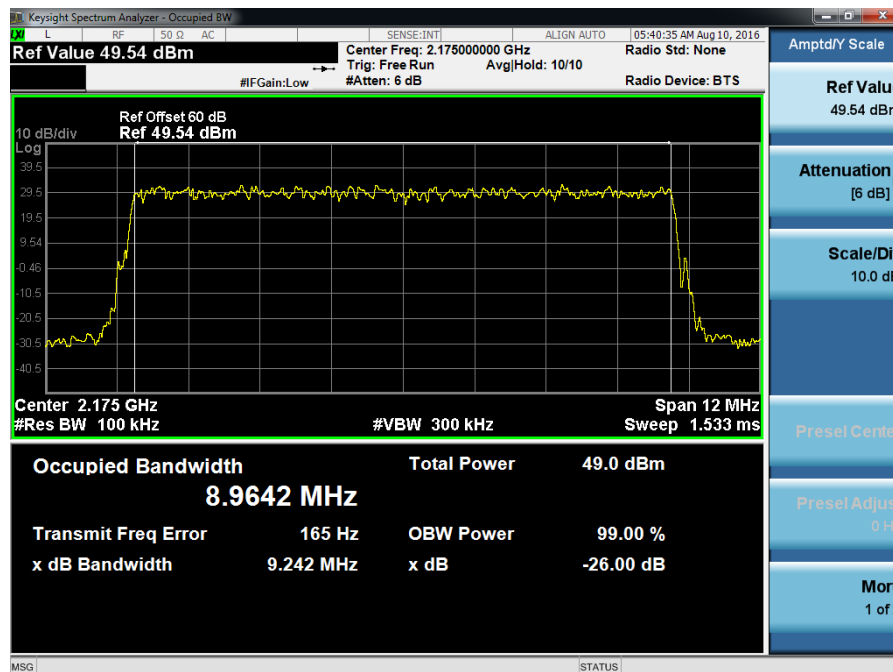


BW 15 MHz	Tx2	2162.5 MHz	90W	QPSK + 16QAM
-----------	-----	------------	-----	--------------

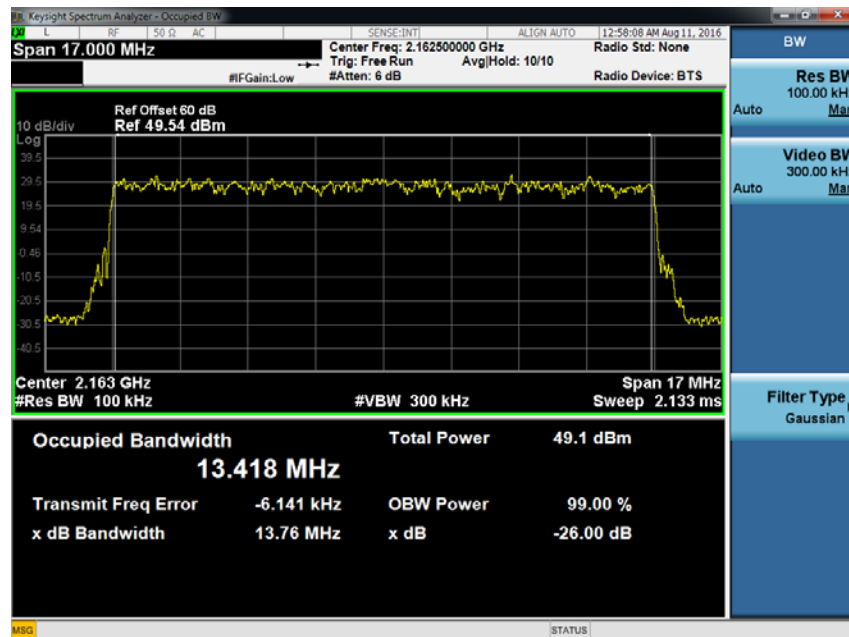


BW 15 MHz	Tx2	2172.5 MHz	90W	64QAM
-----------	-----	------------	-----	-------

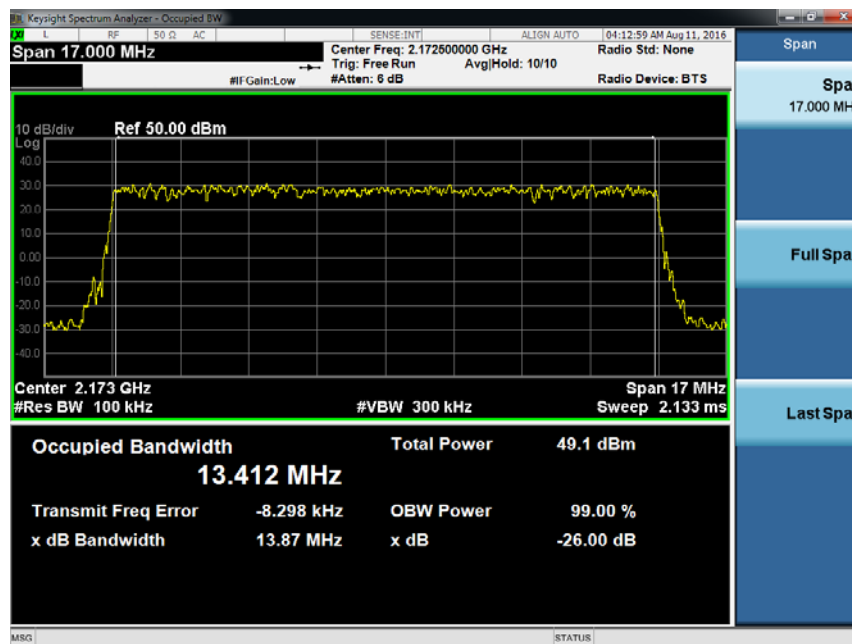


BW 20 MHz	Tx2	2165 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

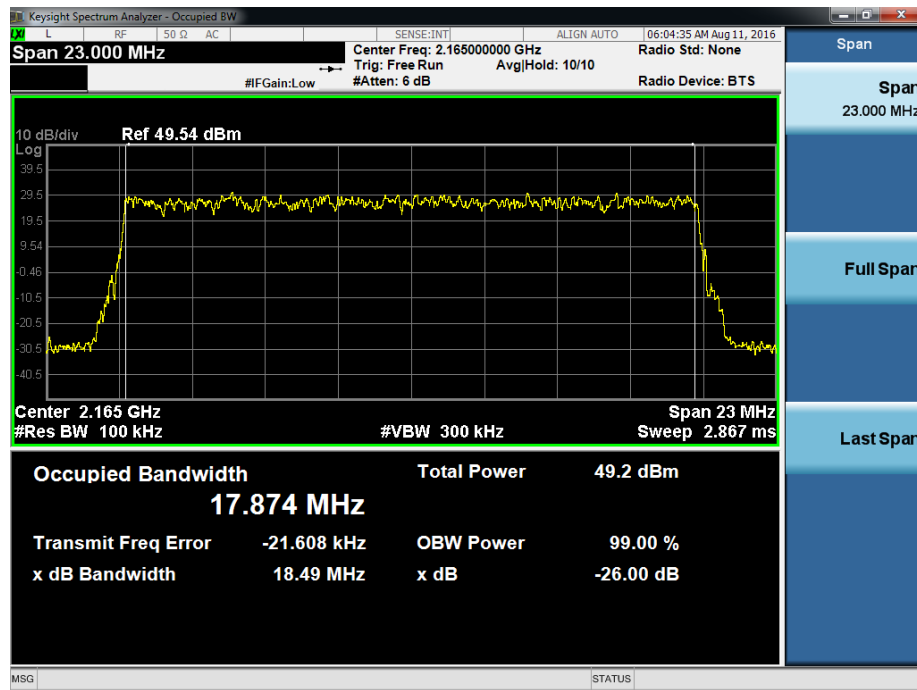


BW 20 MHz	Tx2	2170 MHz	90W	64QAM
-----------	-----	----------	-----	-------

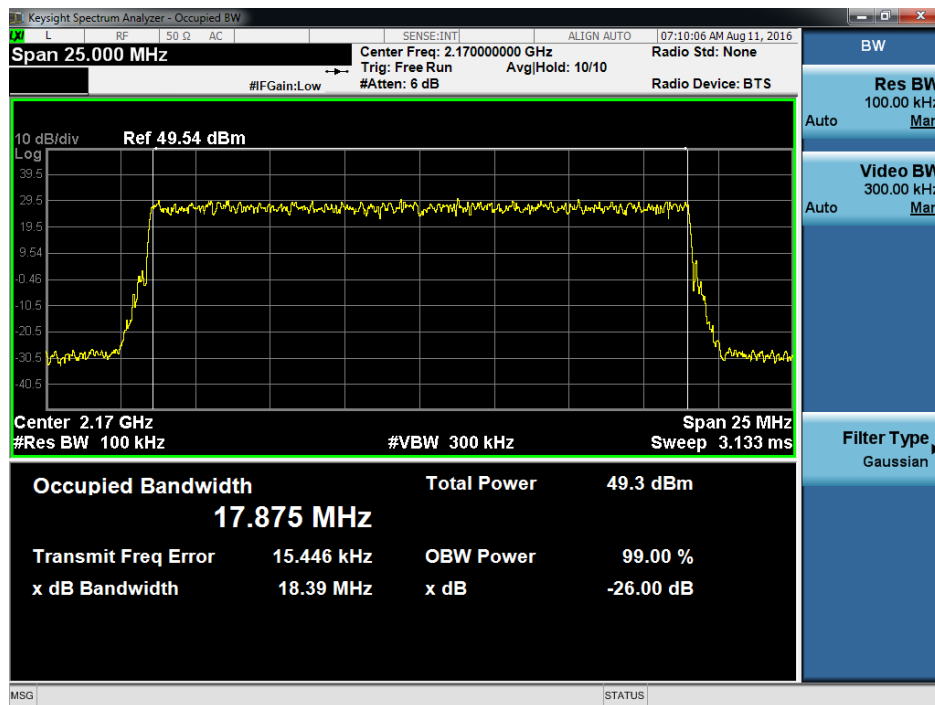


BW 5 MHz	Tx3	2157.5 MHz	20W	QPSK + 16QAM
----------	-----	------------	-----	--------------

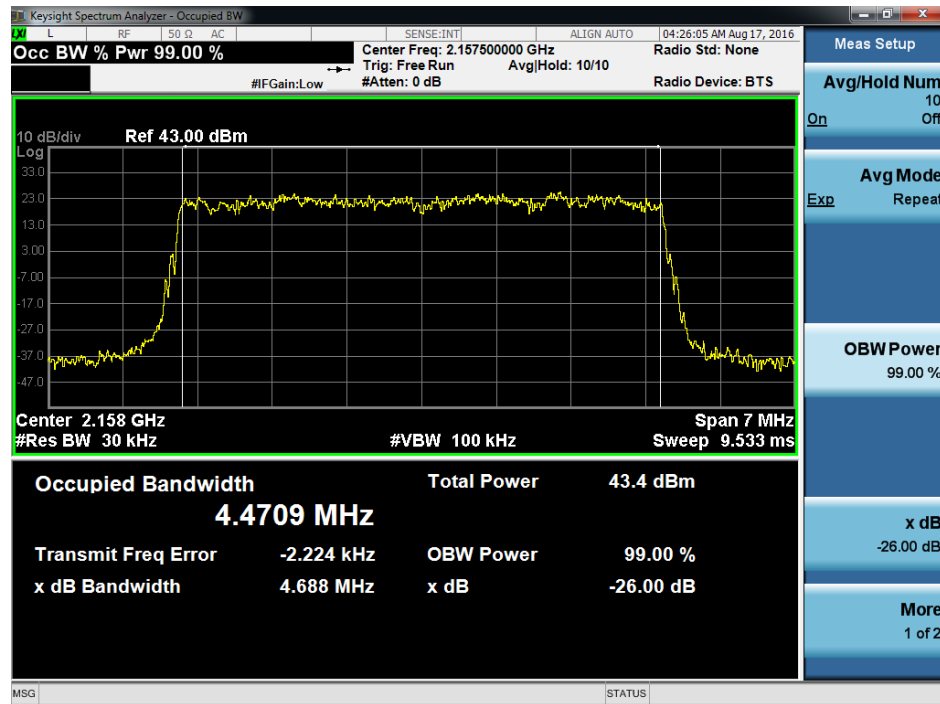


BW 5 MHz	Tx3	2177.5 MHz	20W	64QAM
----------	-----	------------	-----	-------

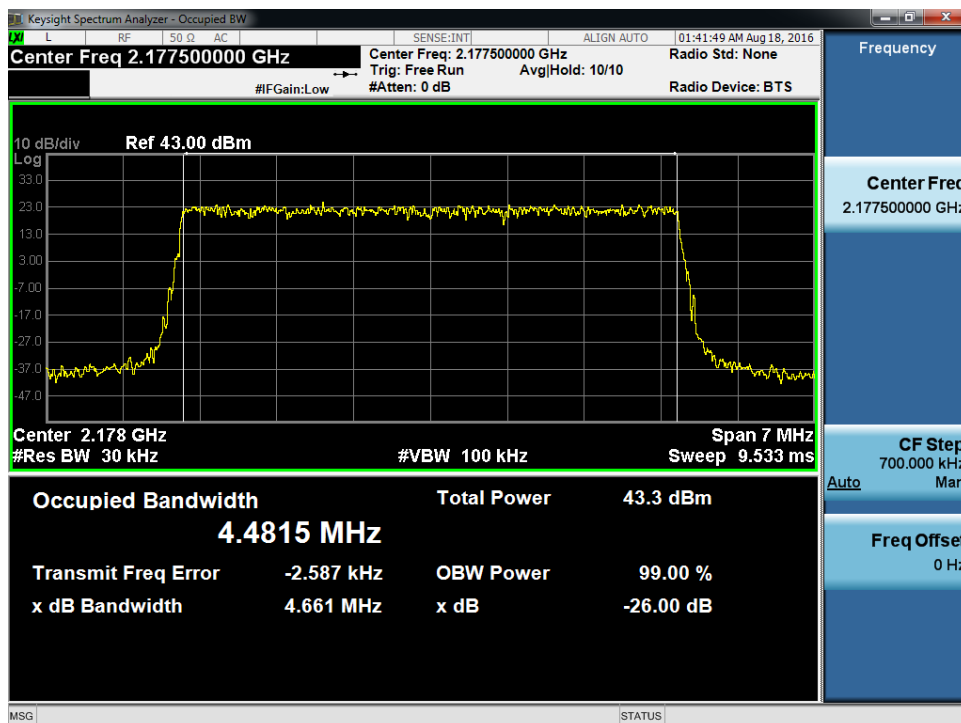


BW 10 MHz	Tx3	2160 MHz	45W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

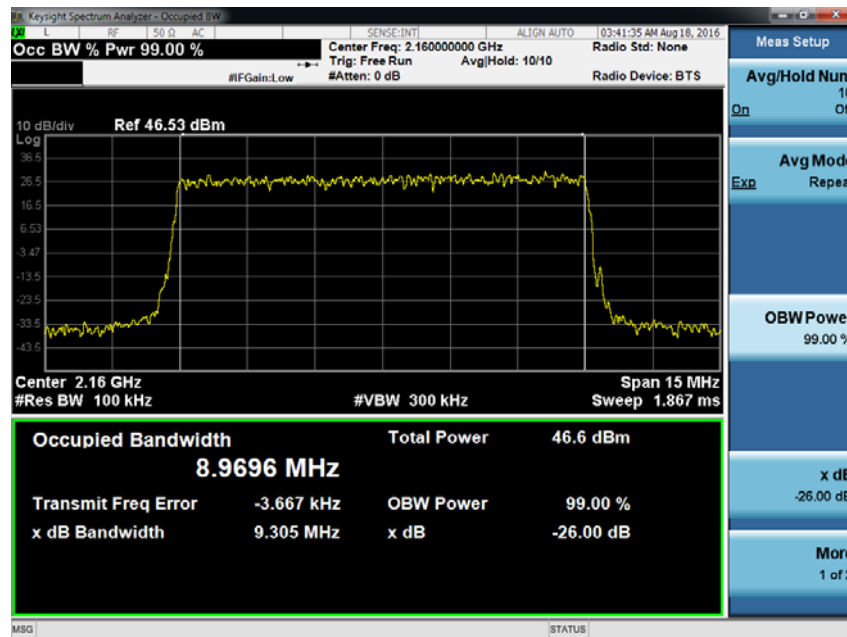


BW 10 MHz	Tx3	2175 MHz	45W	64QAM
-----------	-----	----------	-----	-------

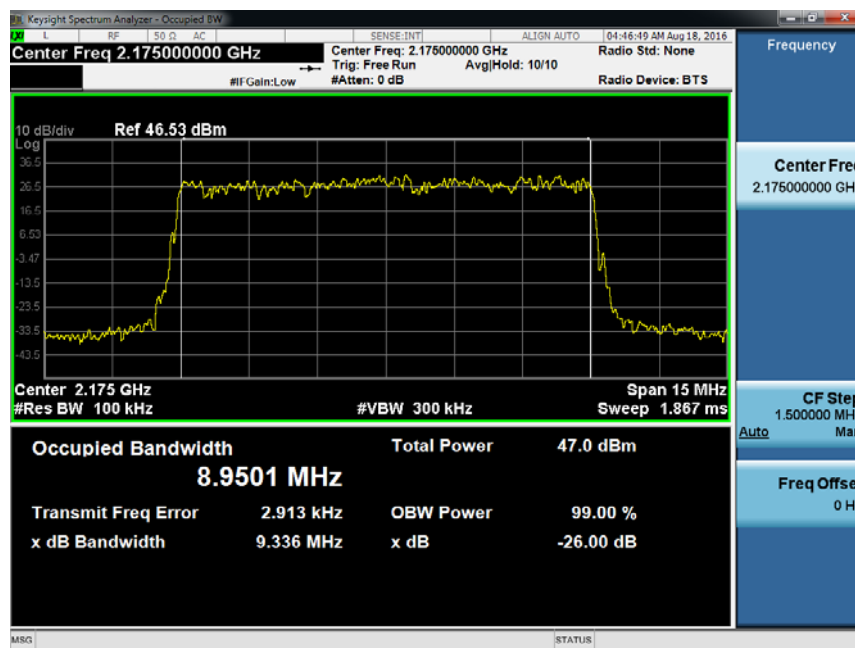


BW 15 MHz	Tx4	2162.5 MHz	45W	QPSK + 16QAM
-----------	-----	------------	-----	--------------

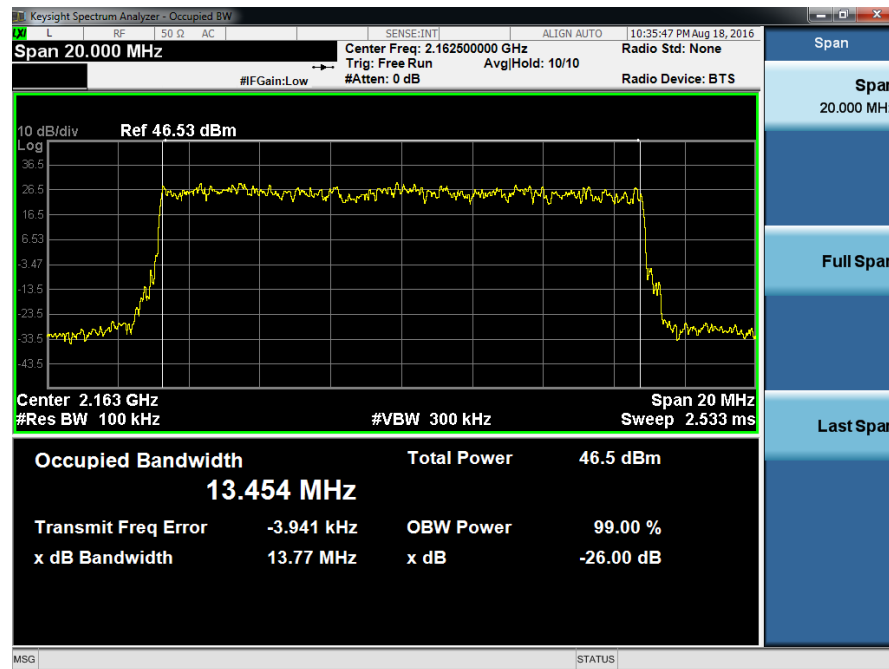


BW 15 MHz	Tx4	2172.5 MHz	45W	64QAM
-----------	-----	------------	-----	-------

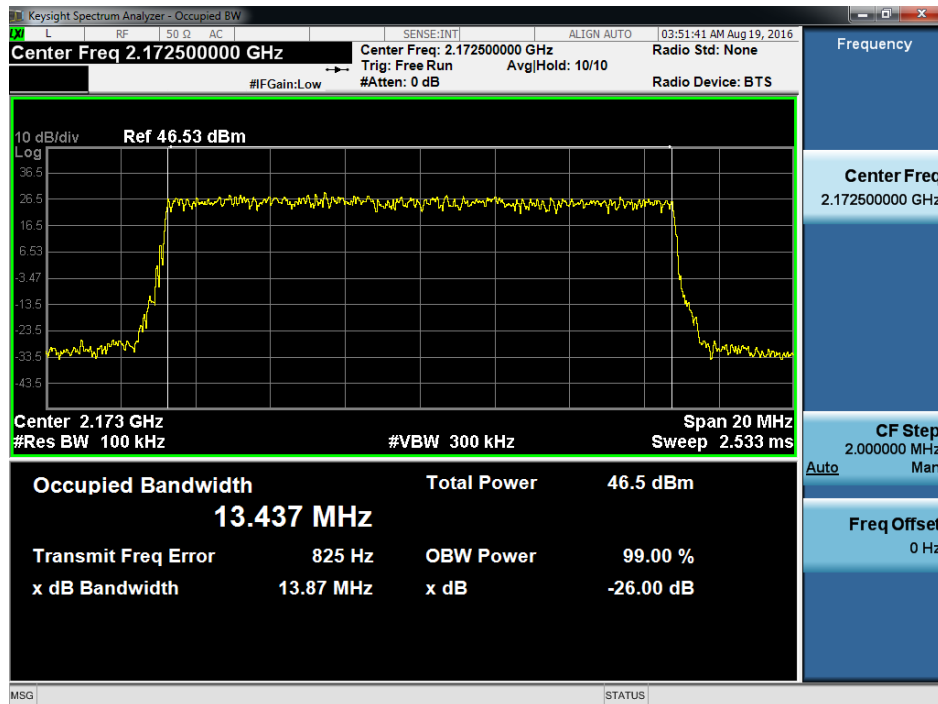

BW 20 MHz	Tx4	2165 MHz	45W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

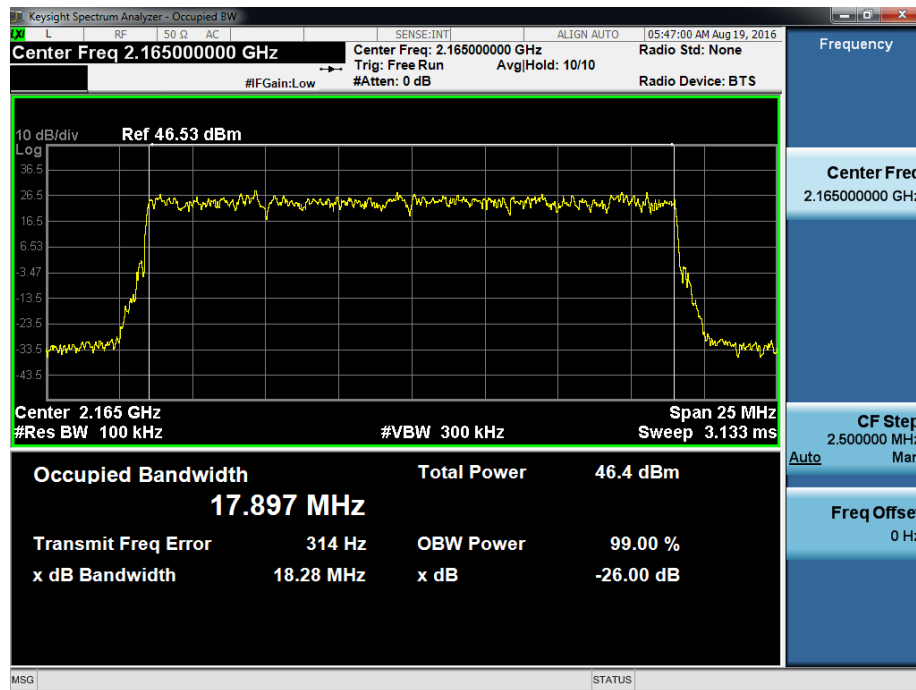

BW 20 MHz	Tx4	2170 MHz	45W	64QAM
-----------	-----	----------	-----	-------

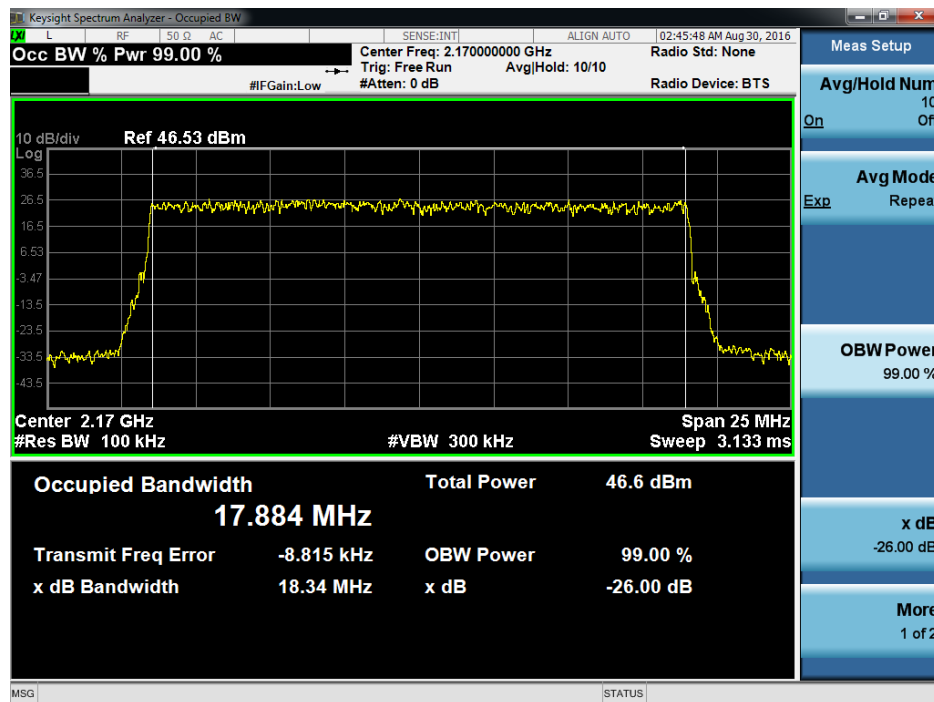

Out-of-Band Emission Mask Compliance

The emission mask limits are defined by:

For the 1 MHz spectrum immediately adjacent to the upper and lower edge of the measurement block/band:

$$P \text{ dBm} - [43 + 10 \log P W] - 10 \log (\text{Meas RBW}/1\% \text{ BW}) - 10 \log N$$

For greater than 1 MHz from the upper and lower edge of the measurement block/band:

$$P \text{ dBm} - [43 + 10 \log P W] - 10 \log (\text{Meas RBW}/1 \text{ MHz}) - 10 \log N$$

Where N = the number of transmit antenna terminals/ports.

The carriers are offset from the top of the emission mask by:


$$P \text{ dBm} - 10 \log (\text{Meas RBW}/ \text{BW})$$

The data plots that follow show compliance for all four carrier bandwidths, both single and dual. From the out-of-band emissions plots attached below, it can be seen that all the emissions are under the required FCC emission masks for both 2xMIMO (2T4R) and 4xMIMO (4T4R) operation, i.e., the mask is not cut. Plots are displayed for both single and dual carrier operation, with the single carriers positioned at the lowest settable and highest settable AWS-3 frequencies.

FIGURE 4.3.2 OUT-OF-BAND EMISSIONS PLOTS – SINGLE CARRIER

Lowest AWS-3 Settable BW5 MHz 2T4R

BW 5 MHz	Tx1	2157.5 MHz	40W	QPSK + 16QAM
----------	-----	------------	-----	--------------

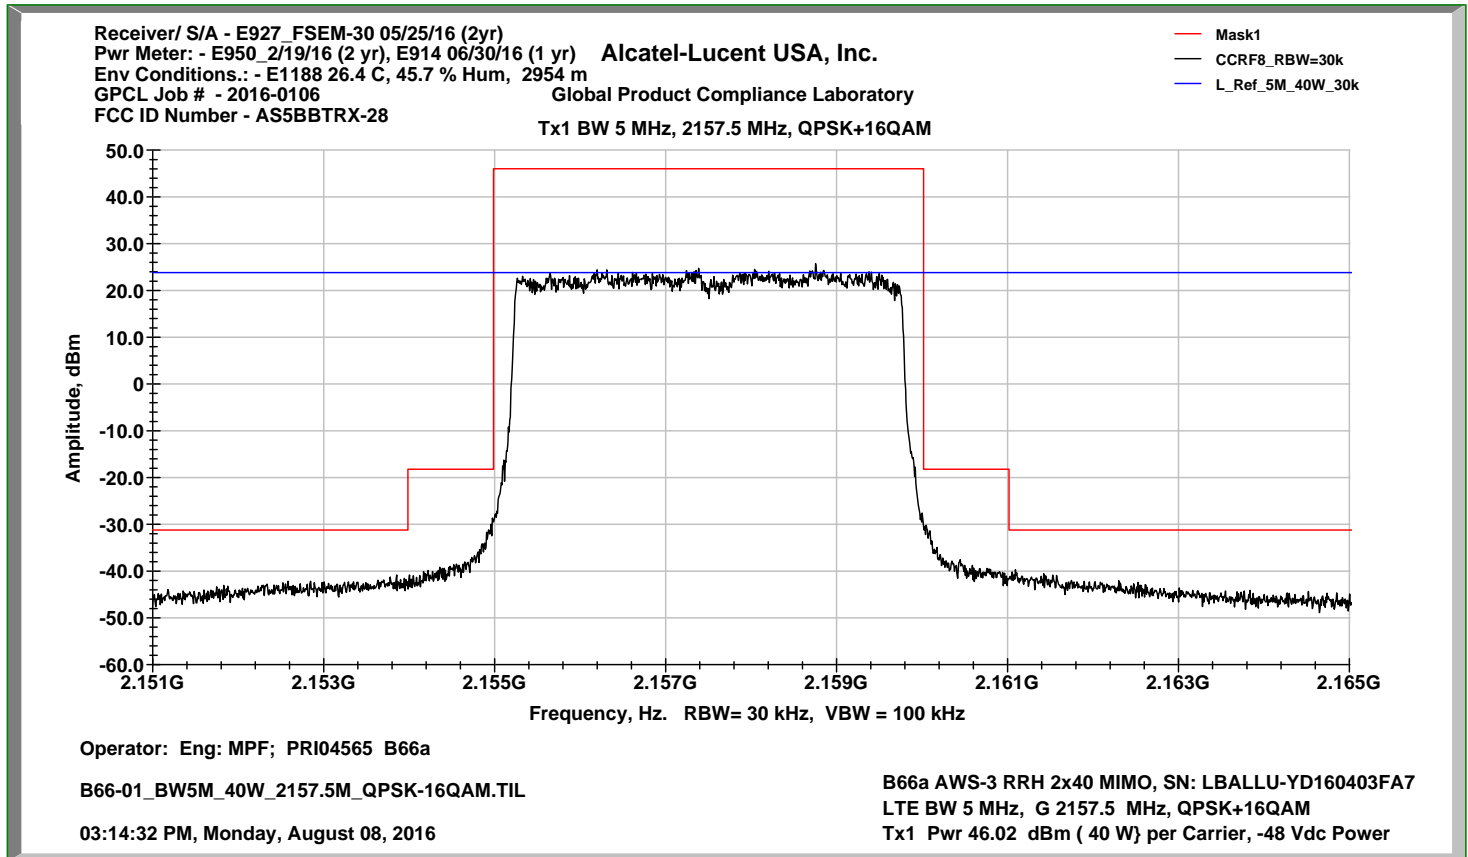

Highest AWS-3 Settable BW5 MHz 2T4R

BW 5 MHz	Tx1	2177.5 MHz	40W	64QAM
----------	-----	------------	-----	-------

Receiver/ S/A - E927 FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 26.3 C, 54.4% Hum, 29.69 Hg


GPCL Job # - 2016-0106

Global Product Compliance Laboratory

FCC ID Number - AS5BBTRX-28

Tx1 BW 5 MHz, 2177.5 MHz, 40W, 64QAM

Mask1
CCRF8_RBW=30k
L_Ref_5M_40W_30k

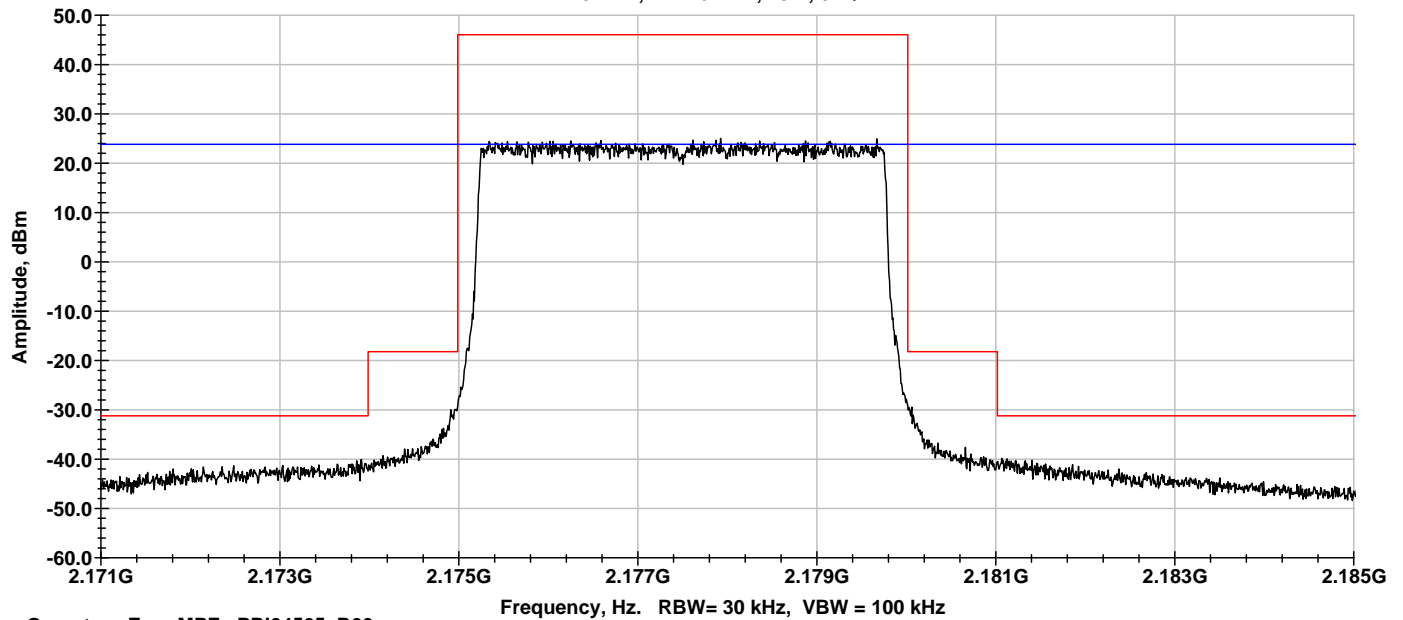

Operator: Eng: MPF; PRI04565 B66a

B66-02_BW5M_40W_2177.5M_64QAM.TIL

11:16:30 AM, Tuesday, August 09, 2016

Frequency, Hz. RBW= 30 kHz, VBW = 100 kHz

B66a AWS-3 RRH 4x45 (4T4R), 2x90 (2T2R) MIMO, SN: LBALLU-YD160403FA7

LTE BW 5 MHz, J 2177.5 MHz, 64QAM

Tx1 Pwr 46.02 dBm (40 W) per Carrier, -48 Vdc Power

Lowest AWS-3 Settable BW10 MHz 2T4R

BW 10 MHz	Tx1	2160 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

Receiver/ S/A - E927 FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950 2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 26.6 C, 46.3 % Hum, 29.70 Hg


GPCL Job # - 2016-0106

Global Product Compliance Laboratory

FCC ID Number - AS5BBTRX-28

Tx1 Single Carrier BW 10 MHz, 2160 MHz, 90W, QPSK+16QAM

— CCRF8_RBW=30k
— L_Ref_10M_90W_100kHz
— Mask2

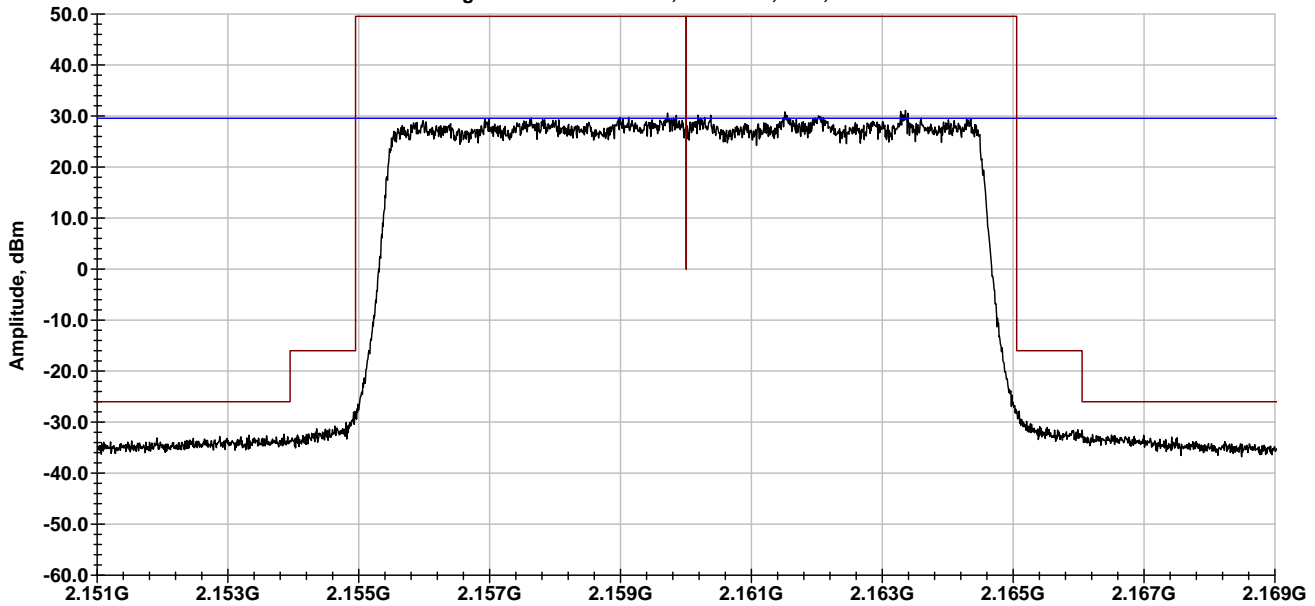

Operator: Eng: MPF; PRI04565, B66a

Frequency, Hz. RBW= 100 kHz, VBW = 300 kHz

B66-03_BW10M_90W_2160M_QPSK-16QAM.TIL

B66a AWS-3 RRH 2x90 MIMO, SN: LBALLU-YD160403FA7


LTE BW 10 MHz, GH 2160 MHz, QPSK+16QAM

Tx1 Pwr 49.54 dBm (90 W) per Carrier, -48 Vdc

01:27:26 PM, Tuesday, August 09, 2016


Highest AWS-3 Settable BW 10 MHz 2T4R

BW 10 MHz	Tx1	2175 MHz	90W	64QAM
-----------	-----	----------	-----	-------

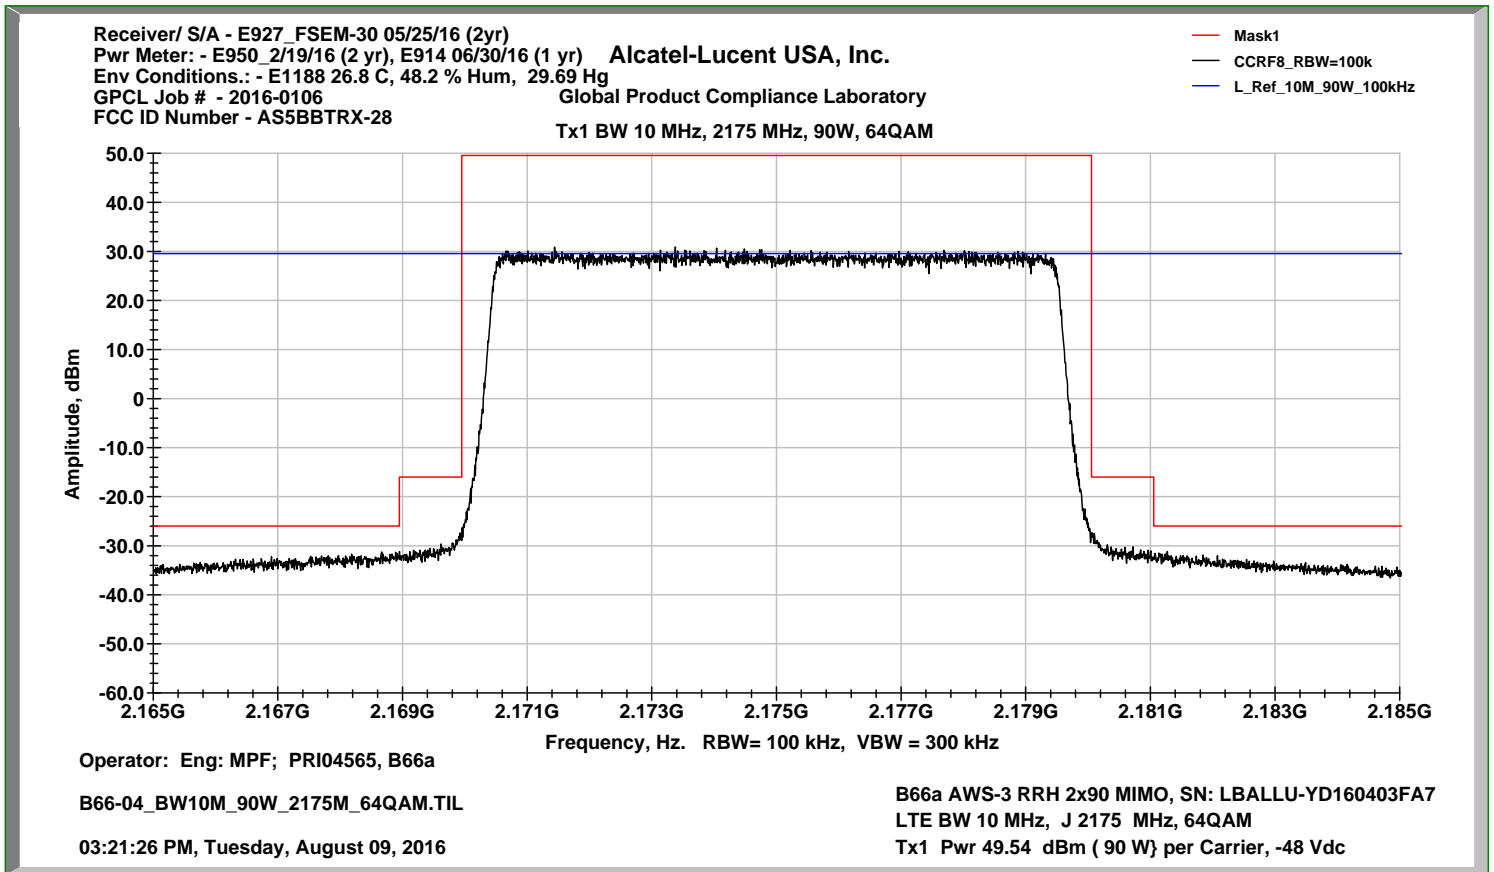

Lowest AWS-3 Settable BW 15 MHz 2T4R

BW 15 MHz	Tx2	2162.5 MHz	90W	QPSK + 16QAM
-----------	-----	------------	-----	--------------

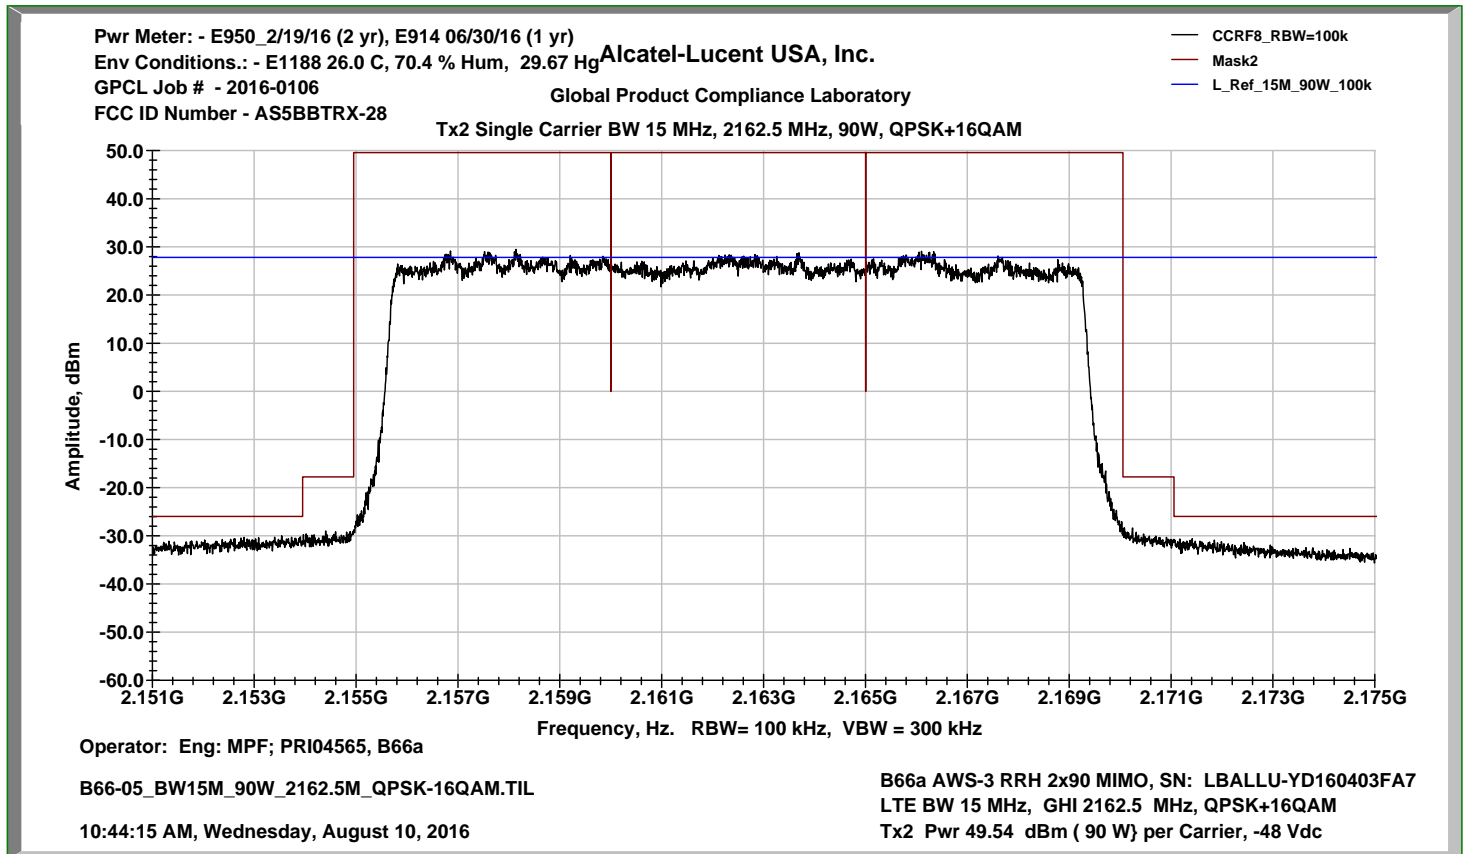

Highest AWS-3 Settable BW 15 MHz 2T4R

BW 15 MHz	Tx2	2172.5 MHz	90W	64QAM
-----------	-----	------------	-----	-------

Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 22.3 C, 61.04 % Hum, 29.66 Hg


GPCL Job # - 2016-0106

Global Product Compliance Laboratory

FCC ID Number - AS5BBTRX-28

Tx2 Single Carrier BW 15 MHz, 2172.5 MHz, 90W, 64QAM

— CCRF8_RBW=100k
— Mask2
— L_Ref_15M_90W_100k

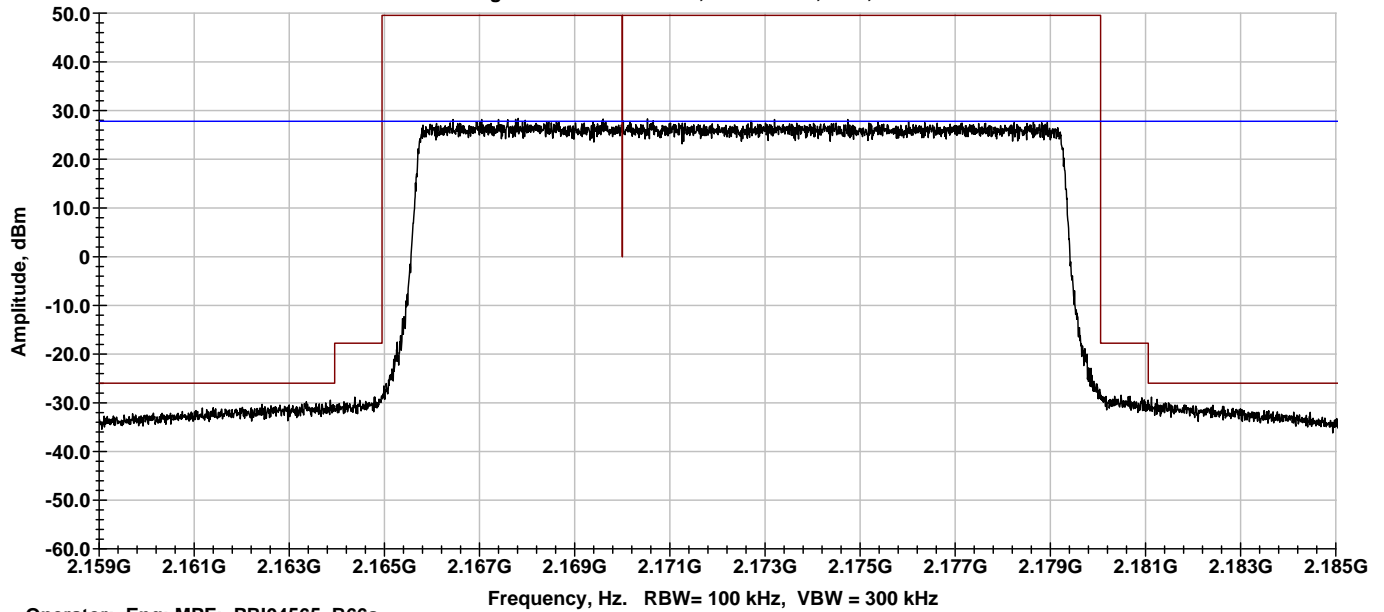

Operator: Eng: MPF; PRI04565 B66a

B66-06_BW15M_90W_2172.5M_64QAM.TIL

01:27:12 PM, Wednesday, August 10, 2016

B66a AWS-3 RRH 2x90 MIMO, SN: LBALLU-YD160403FA7

LTE BW 15 MHz, IJ 2172.5 MHz, 64QAM

Tx2 Pwr 49.54 dBm (90 W) per Carrier, -48 Vdc

Lowest AWS-3 Settable BW 20 MHz 2T4R

BW 20 MHz	Tx2	2165 MHz	90W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 22.3 C, 61.04 % Hum, 29.66 Hg

GPCL Job # - 2016-0106

Global Product Compliance Laboratory


FCC ID Number - AS5BBTRX-28

CCRF8_RBW=100k

Mask2

L_Ref_20M_90W

Tx2 Single Carrier BW 15 MHz, 2162.5 MHz, 90W, QPSK+16QAM

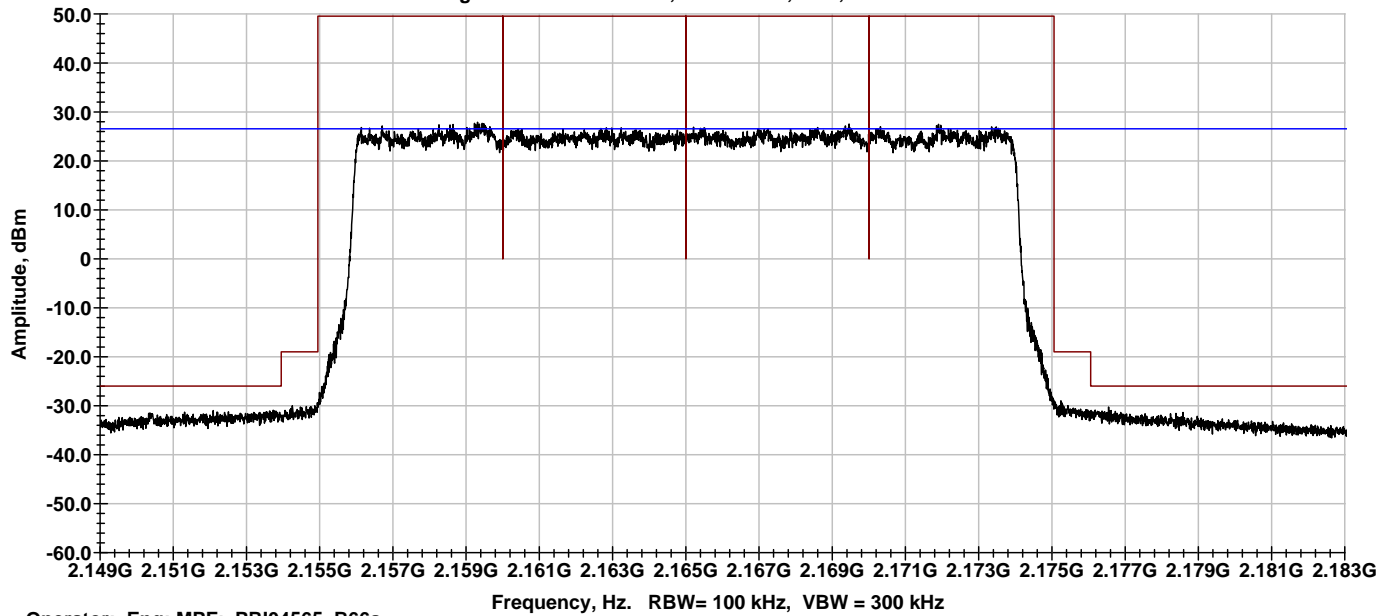

Operator: Eng: MPF; PRI04565, B66a

B66-07_BW20M_90W_2165M_QPSK-16QAM.TIL

03:23:31 PM, Wednesday, August 10, 2016

B66a AWS-3 RRH 2x90 MIMO, SN: LBALLU-YD160403FA7

LTE BW 20 MHz, GHIJ 2165 MHz, QPSK+16QAM

Tx2 Pwr 49.54 dBm (90 W) per Carrier, -48 Vdc

Highest AWS-3 Settable BW5 MHz 2T4R

20	Tx2	2170	90W	64QAM
----	-----	------	-----	-------

Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 25.7 C, 61.9 % Hum, 29.58 Hg

GPCL Job # - 2016-0106

Global Product Compliance Laboratory


FCC ID Number - AS5BBTRX-28

Tx2 Single Carrier BW 20 MHz, 2170.5 MHz, 90W, 64QAM

CCRF8_RBW=100k

Mask2

L_Ref_20M_90W

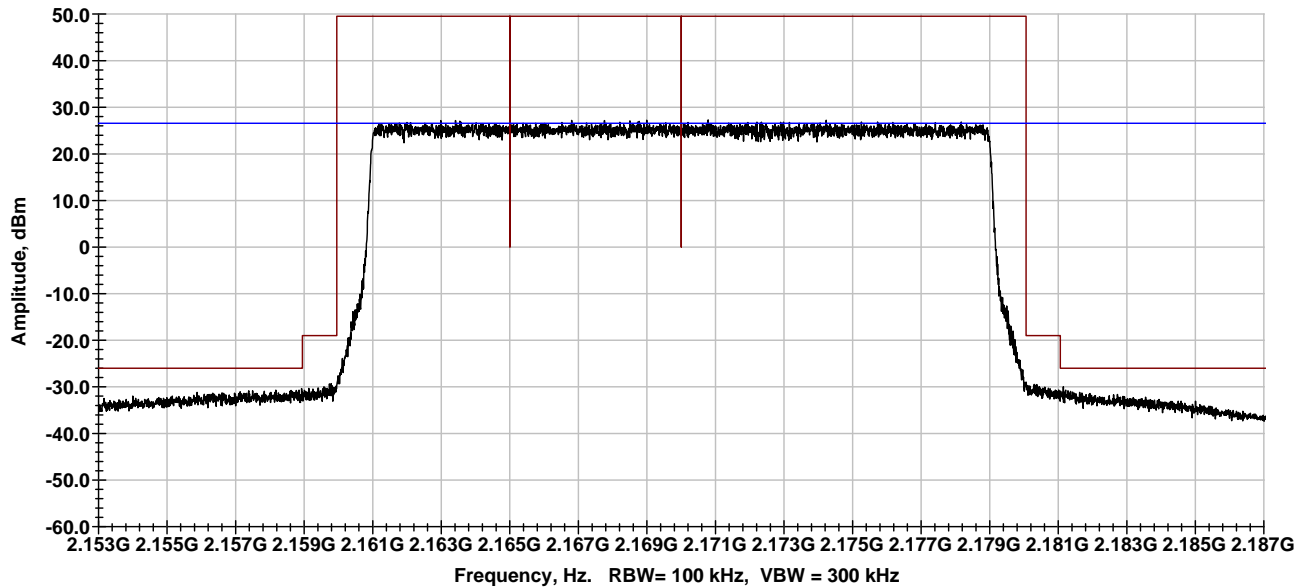

Operator: Eng: MPF; PRI04565, B66a

B66-08_BW20M_90W_2170M_64QAM.TIL

04:34:05 PM, Wednesday, August 10, 2016


B66a AWS-3 RRH 2x90 MIMO, SN: LBALLU-YD160403FA7

LTE BW 20 MHz, HIJ 2170 MHz, 64QAM

Tx2 Pwr 49.54 dBm (90 W) per Carrier, -48 Vdc


Lowest AWS-3 Settable BW5 MHz 4T4R

BW 5 MHz	Tx3	2157.5 MHz	20W	QPSK + 16QAM
----------	-----	------------	-----	--------------

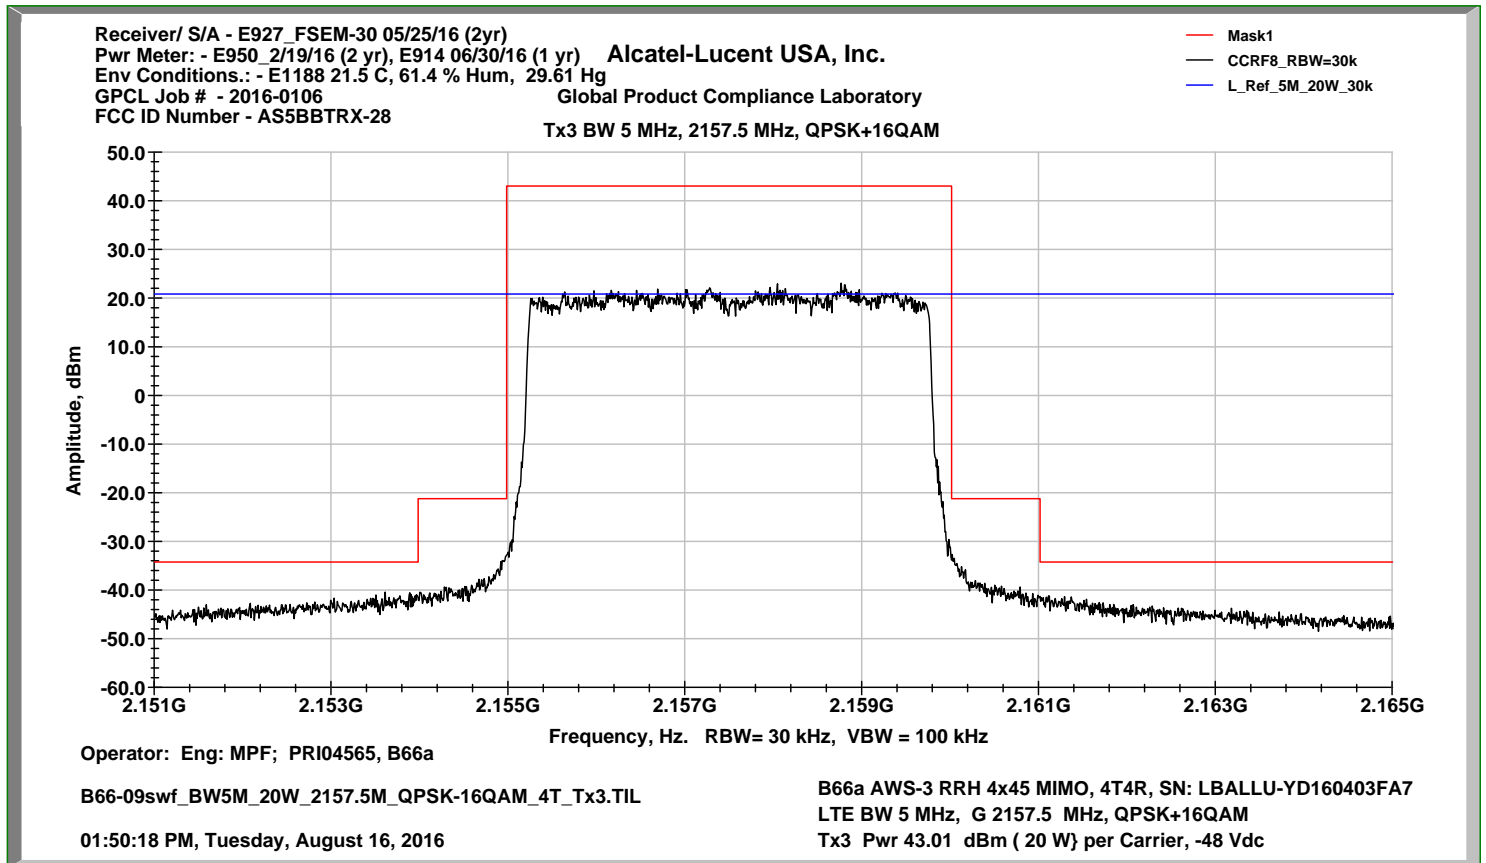

Highest AWS-3 Settable BW 5 MHz 4T4R

BW 5 MHz	Tx3	2177.5 MHz	20W	64QAM
----------	-----	------------	-----	-------

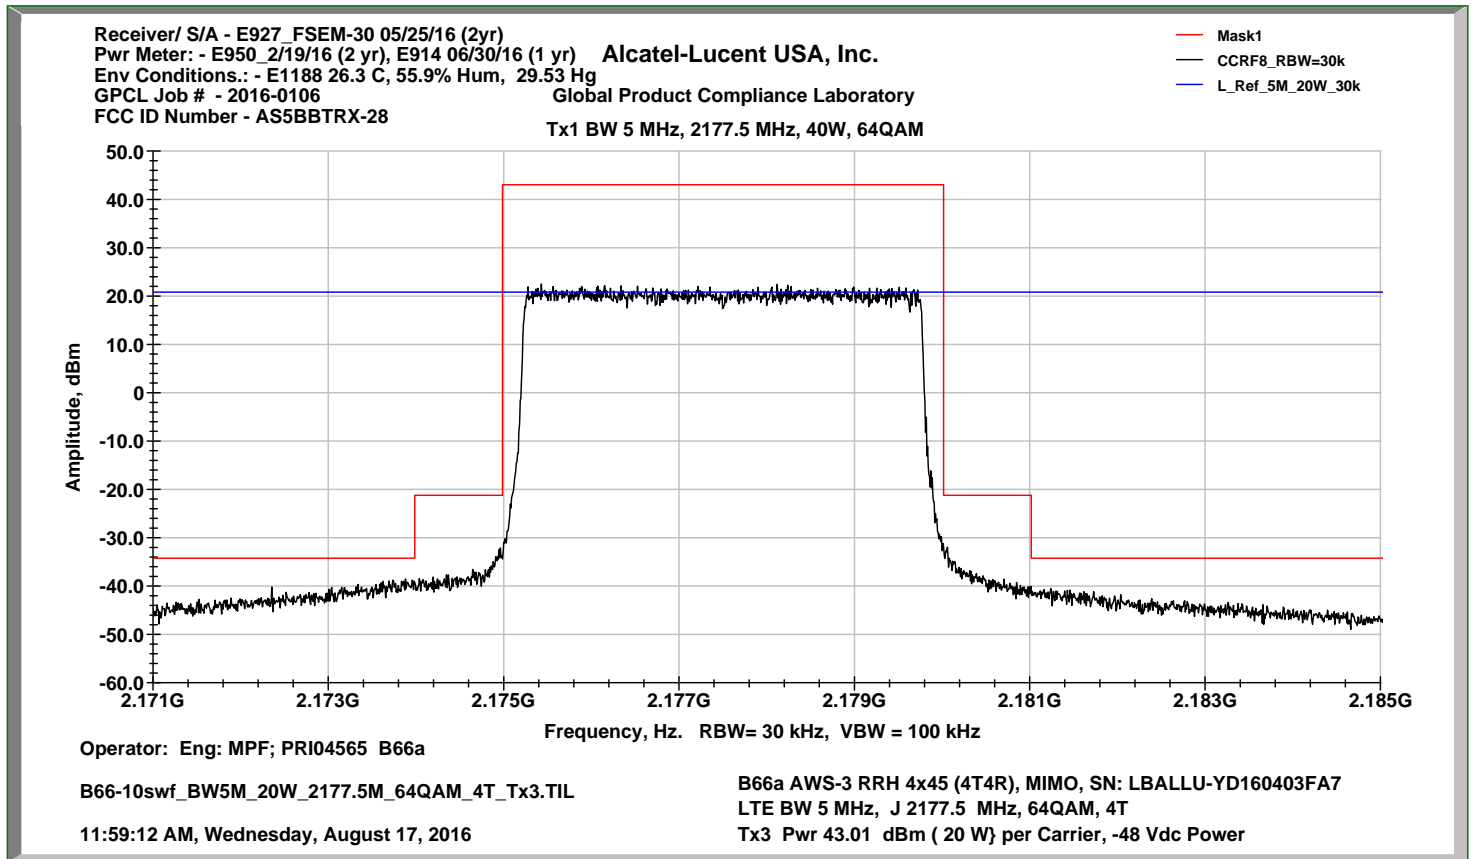

Lowest AWS-3 Settable BW 10 MHz 4T4R

BW 10 MHz	Tx3	2160 MHz	45W	QPSK + 16QAM
-----------	-----	----------	-----	--------------


Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)
Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr)
Env Conditions.: - E1188 26.2 C, 56.9 % Hum, 29.53 Hg
GPCL Job # - 2016-0106
FCC ID Number - AS5BBTRX-28

Alcatel-Lucent USA, Inc.

Global Product Compliance Laboratory

Tx3 Single Carrier BW 10 MHz, 2160 MHz, 45W, 4T, 64QAM

CCRF8_RBW=100k
Mask2
L_Ref_10M_45W_100k

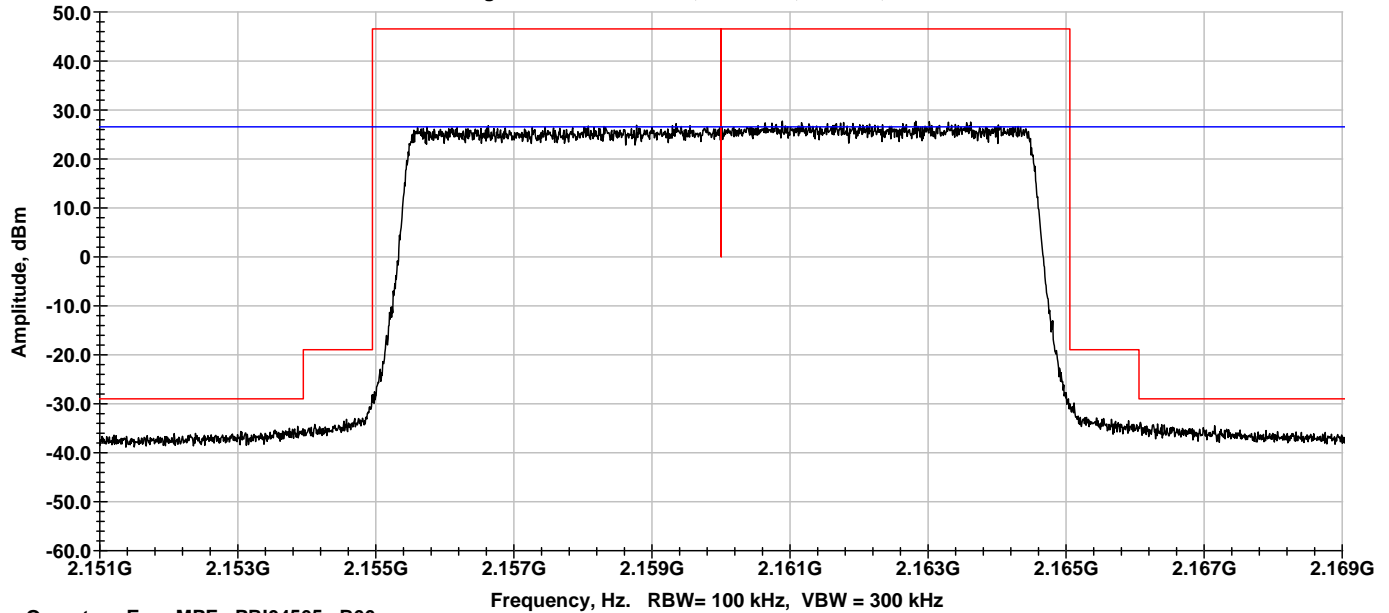

Operator: Eng: MPF; PRI04565, B66a

B66-11swf_BW10M_45W_2160M_64QAM_4T_Tx3.TIL

01:32:40 PM, Wednesday, August 17, 2016

B66a AWS-3 RRH 4x45 MIMO, 4T4R, SN: LBALLU-YD160403FA7
LTE BW 10 MHz, GH 2160 MHz, 64QAM
Tx3 Pwr 46.53 dBm (45 W) per Carrier, -48 Vdc

Highest AWS-3 Settable BW 10 MHz 4T4R

BW 10 MHz	Tx3	2175 MHz	45W	64QAM
-----------	-----	----------	-----	-------

Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 26.8 C, 48.2 % Hum, 29.69 Hg


GPCL Job # - 2016-0106

Global Product Compliance Laboratory

FCC ID Number - AS5BBTRX-28

Tx3 BW 10 MHz, 2175 MHz, 45W, 4T, QPSK + 16QAM

Mask1
CCRF8_RBW=100k
L_Ref_10M_45W_100kHz

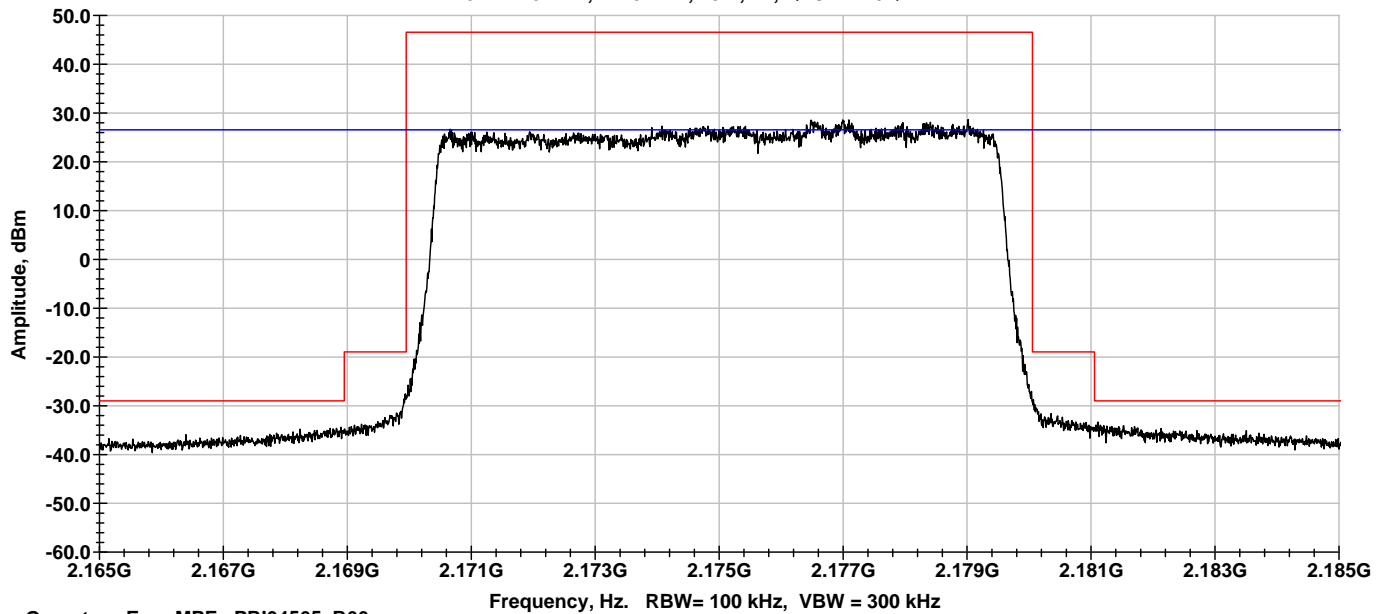

Operator: Eng: MPF; PRI04565, B66a

B66-12swf_BW10M_45W_2175M_QPSK-16QAM_4T_Tx3.TIL

02:31:04 PM, Wednesday, August 17, 2016


B66a AWS-3 RRH 4x45 MIMO, 4T4R, SN: LBALLU-YD160403FA7

LTE BW 10 MHz, J 2175 MHz, QPSK + 16QAM

Tx3 Pwr 46.53 dBm (45 W) per Carrier, -48 Vdc


Lowest AWS-3 Settable BW 15 MHz 4T4R

BW 15 MHz	Tx4	2162.5 MHz	45W	QPSK + 16QAM
-----------	-----	------------	-----	--------------

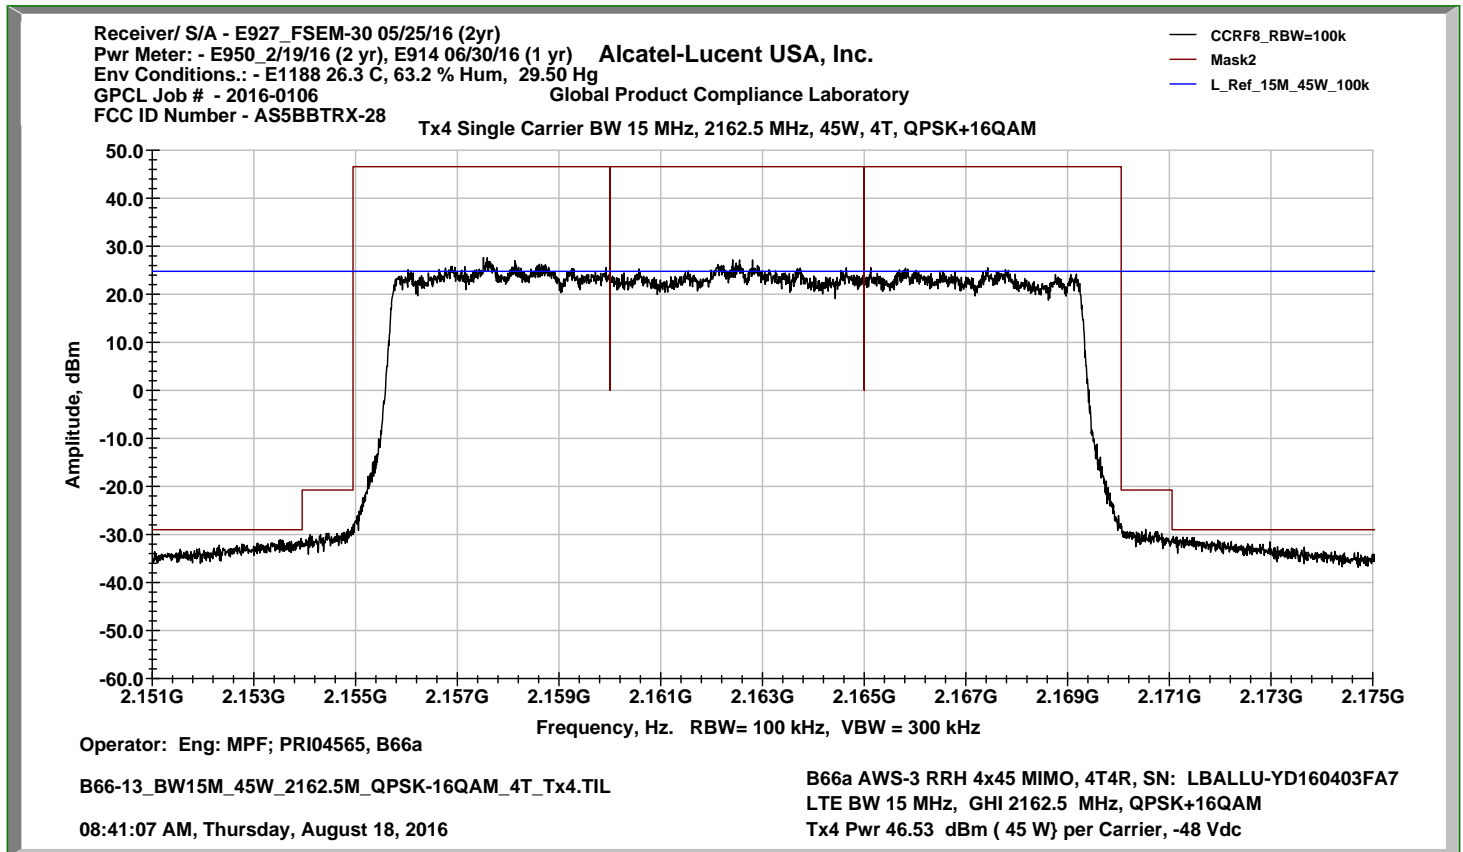

Highest AWS-3 Settable BW 15 MHz 4T4R

BW 15 MHz	Tx4	2172.5 MHz	45W	64QAM
-----------	-----	------------	-----	-------

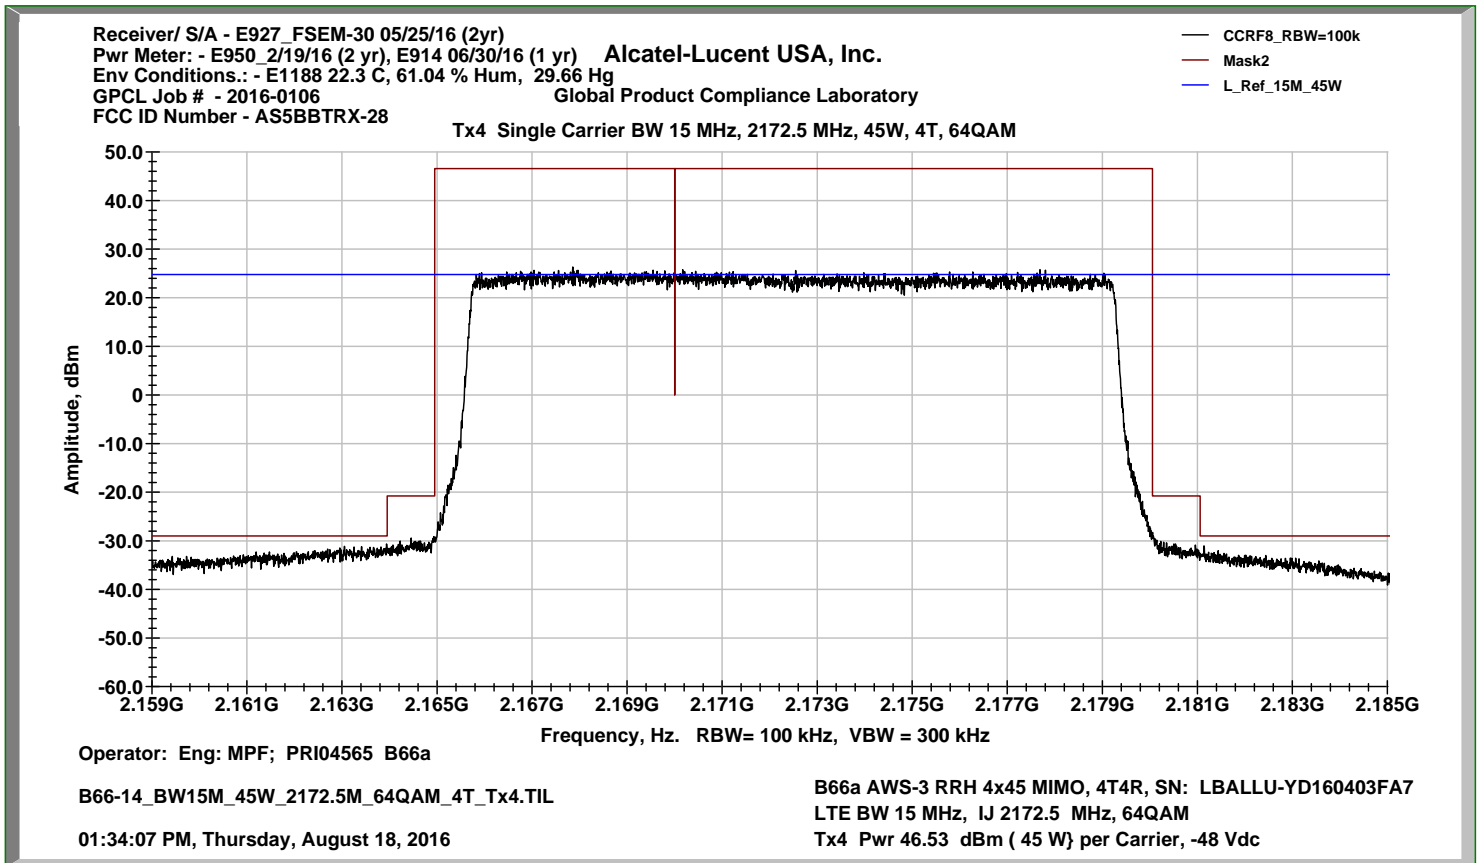

Lowest AWS-3 Settable BW 20 MHz 4T4R

BW 20 MHz	Tx4	2165 MHz	45W	QPSK + 16QAM
-----------	-----	----------	-----	--------------

Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 22.3 C, 61.04 % Hum, 29.66 Hg


GPCL Job # - 2016-0106

Global Product Compliance Laboratory

FCC ID Number - AS5BBTRX-28

Tx4 BW 20 MHz, 2165 MHz, 45W, 4T, QPSK+16QAM

— CCRF8_RBW=100k
— Mask2
— L_Ref_20M_45W

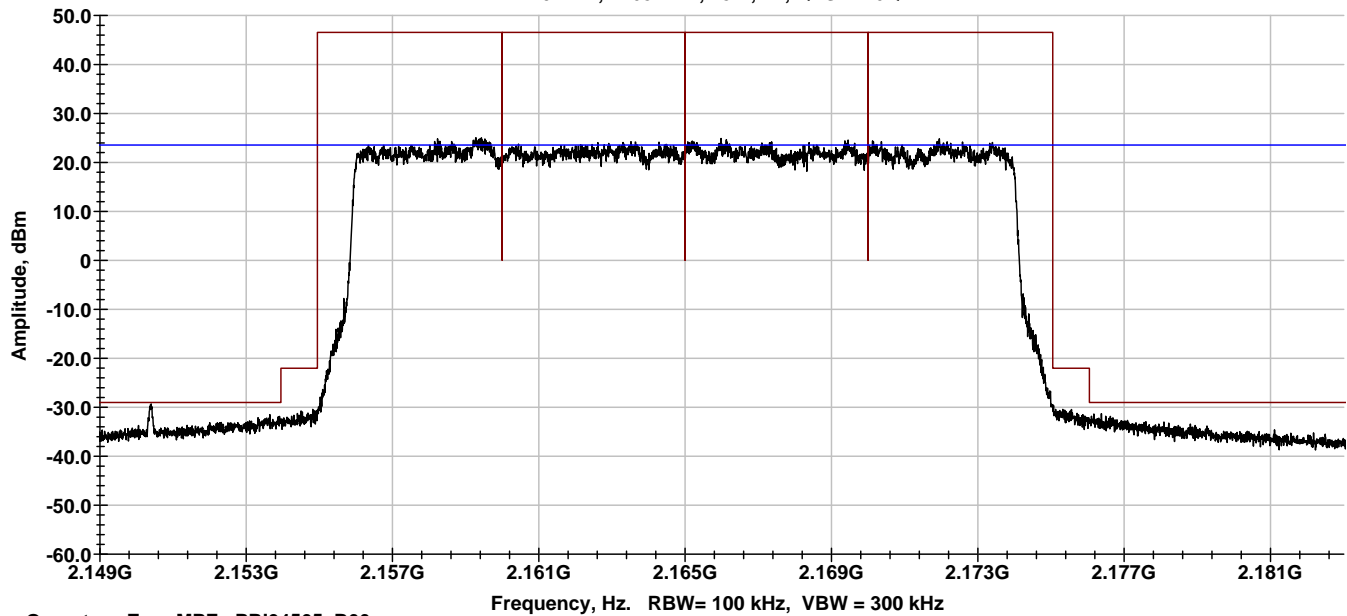

Operator: Eng: MPF; PRI04565, B66a

B66-15_BW20M_45W_2165M_QPSK-16QAM_4T_Tx4.TIL

03:18:55 PM, Thursday, August 18, 2016

B66a AWS-3 RRH 4x45 MIMO, 4T4R, SN: LBALLU-YD160403FA7

LTE BW 20 MHz, GHIJ 2165 MHz, QPSK+16QAM

Tx4 Pwr 46.53 dBm (45 W) per Carrier, -48 Vdc

Highest AWS-3 Settable BW 20 MHz 4T4R

BW 20 MHz	Tx4	2170 MHz	45W	64QAM
-----------	-----	----------	-----	-------

Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)

Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.

Env Conditions.: - E1188 20.9 C, 59.8 % Hum, 1002.7 m


GPCL Job # - 2016-0106

Global Product Compliance Laboratory

FCC ID Number - AS5BBTRX-28

Tx4 Single Carrier BW 20 MHz, 2170 MHz, 45W, 4T, 64QAM

— CCRF8_RBW=100k
— Mask2
— L_Ref_20M_45W

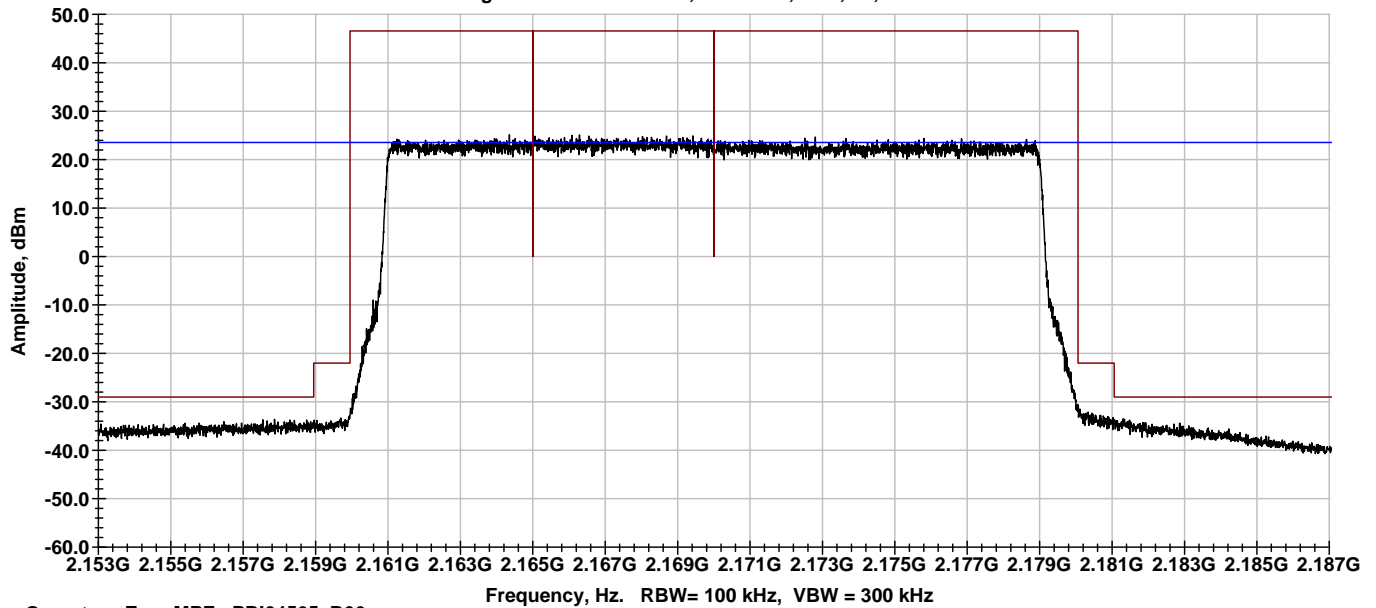

Operator: Eng: MPF; PRI04565, B66a

B66-16_BW20M_45W_2170M_64QAM_4T_Tx4.TIL

12:17:42 PM, Monday, August 29, 2016

B66a AWS-3 RRH 4x45 MIMO, 4T4R, SN: LBALLU-YD160403FA7


LTE BW 20 MHz, HIJ 2170 MHz, 64QAM

Tx4 Pwr 46.53 dBm (45 W) per Carrier, -48 Vdc

FIGURE 4.3.3 OUT-OF-BAND EMISSIONS PLOTS – DUAL CARRIER

Test Number	Block	BW	Center Frequency C1 + C2 MHz	Power per Carrier W	Max Power 2T	Modulation C1	Modulation C2
17 Tx1	G-J	5 +5	2157.5 + 2177.5	40 + 40	80 W	QPSK+16QAM	64QAM
18 Tx1	G-J	5 + 10	2157.5 + 2175	40 + 50	90 W	QPSK+16QAM	64QAM
19 Tx1	G-IJ	5 + 15	2157.5 + 2172.5	40 + 50	90 W	QPSK+16QAM	64QAM
20 Tx1 Mixed Mode	E-HIJ	5 + 20	2142.5 + 2170	40 + 50	90 W	QPSK+16QAM	64QAM
21 Tx2 Mixed Mode	DE-IJ	10 + 15	2140 + 2172.5	45 + 45	90 W	QPSK+16QAM	64QAM
22 Tx2 Mixed Mode	DE-HIJ	10 + 20	2140 + 2170	45 + 45	90 W	QPSK+16QAM	64QAM
23 Tx2 Mixed Mode	EF-HIJ	15 + 20	2147.5 + 2170	45 + 45	90 W	QPSK+16QAM	64QAM
24 Tx2	GH-J	10 + 10	2160 + 2175	45 + 45	90 W	QPSK+16QAM	64QAM


17 Tx1	G-J	5 +5 MHz	2157.5 + 2177.5 MHz	40 + 40 W	80 W	QPSK+16QAM	64QAM
--------	-----	----------	---------------------	-----------	------	------------	-------

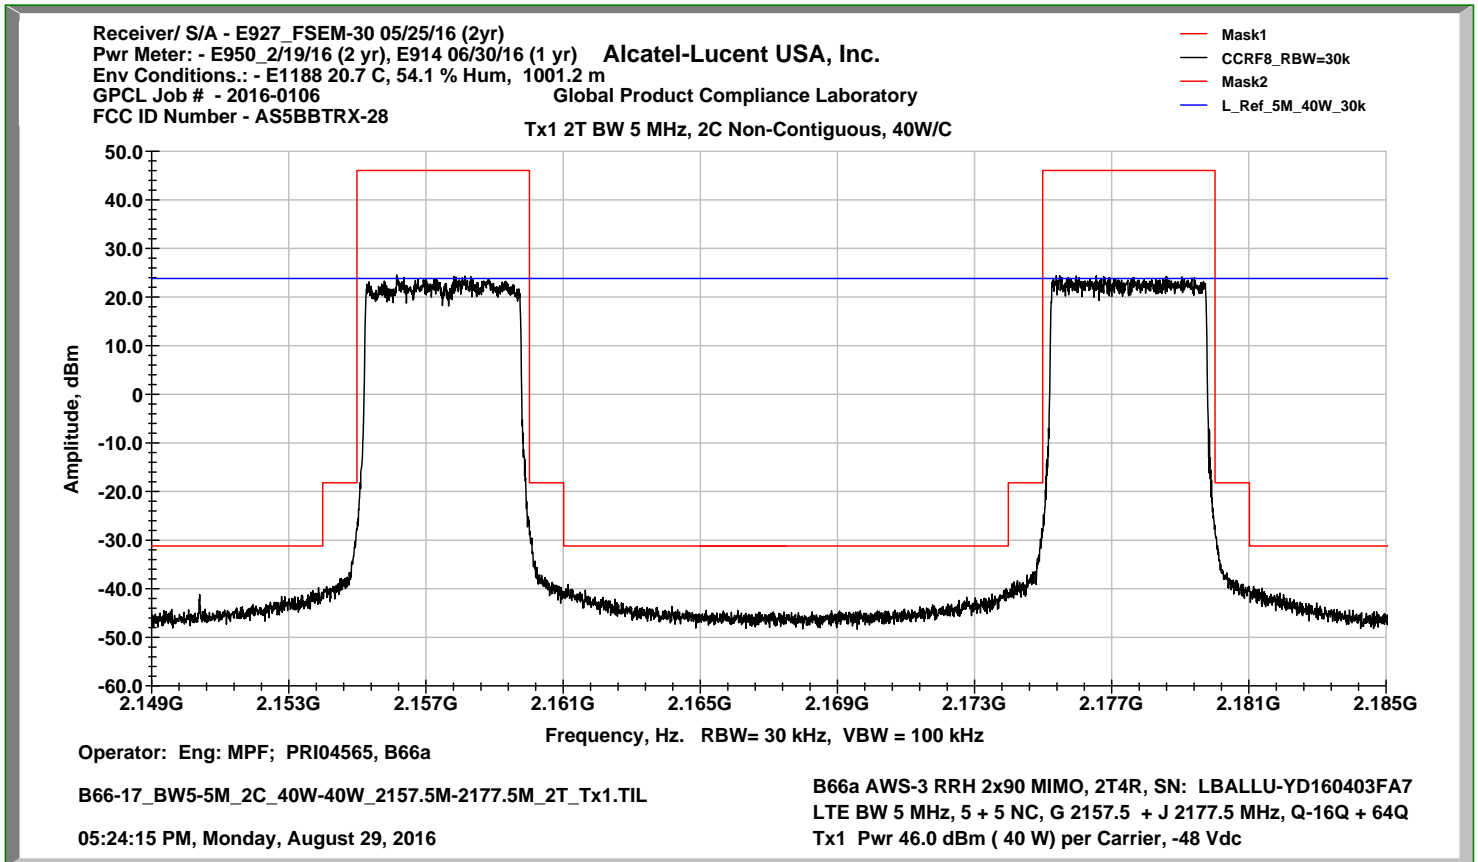

18 Tx1	G-J	5 + 10 MHz	2157.5 + 2175 MHz	40 + 50 W	90 W	QPSK+16QAM	64QAM
--------	-----	------------	-------------------	-----------	------	------------	-------

Receiver/ S/A - E927_FSEM-30 05/25/16 (2yr)
Pwr Meter: - E950_2/19/16 (2 yr), E914 06/30/16 (1 yr) Alcatel-Lucent USA, Inc.
Env Conditions.: - E1188 22.7 C, 67.2 % Hum, 1003.96 m
GPCL Job # - 2016-0106 Global Product Compliance Laboratory
FCC ID Number - AS5BBTRX-28
Tx1 2T BW 5 MHz, 2C Non-Contiguous, 40W/C

Mask1
CCRF8_RBW=30k
Mask2
L_Ref_5M_40W_30k
L_Ref_10M_50W
CCRF10_RBW = 100k

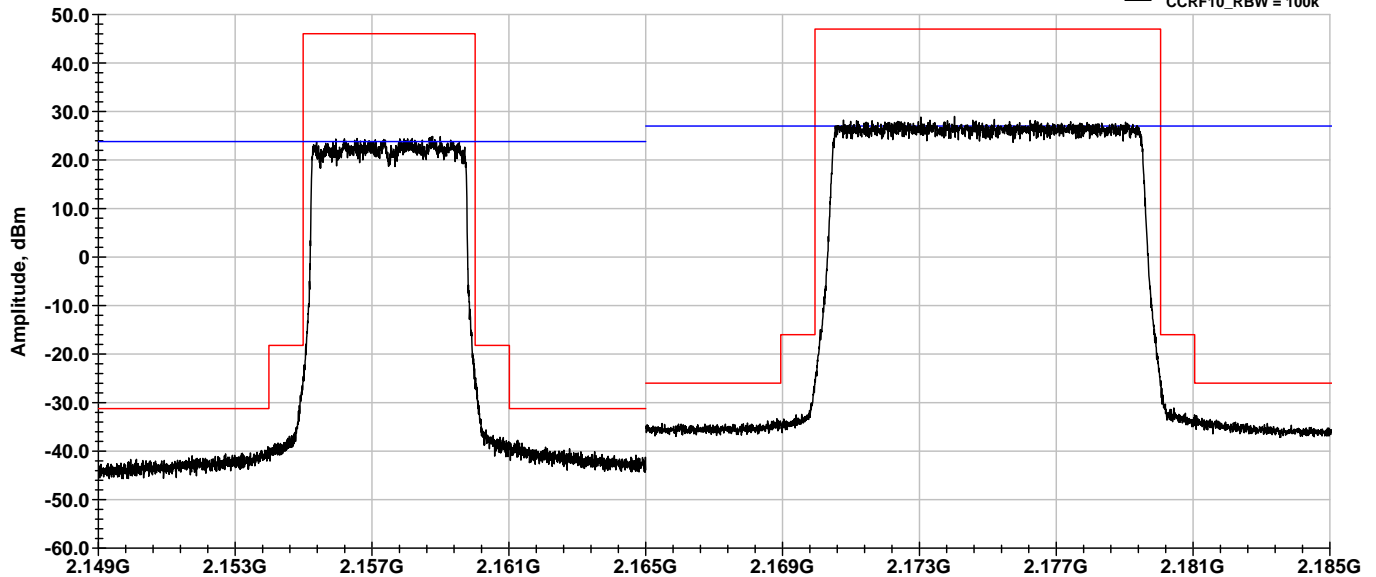


Operator: Eng: MPF; PRI04565, B66a Frequency, Hz. RBW/ VBW = 30 kHz/100 kHz & 100 kHz/300 kHz

B66-18_BW5-10M_2C_40W-50W_2157.5M-2175M_2T_Tx1.TIL


01:21:55 PM, Tuesday, August 30, 2016

B66a AWS-3 RRH 2x90 MIMO, 2T4R, SN: LBALLU-YD160403FA7
LTE BW 5 + 10 MHz, G 2157.5 + J 2175 MHz, Q-16Q + 64Q
Tx1 Pwr 40 W + 50W, -48 Vdc


19 Tx1	G-IJ	5 + 15 MHz	2157.5 + 2172.5 MHz	40 + 50 W	90 W	QPSK+16QAM	64QAM
--------	------	------------	---------------------	-----------	------	------------	-------

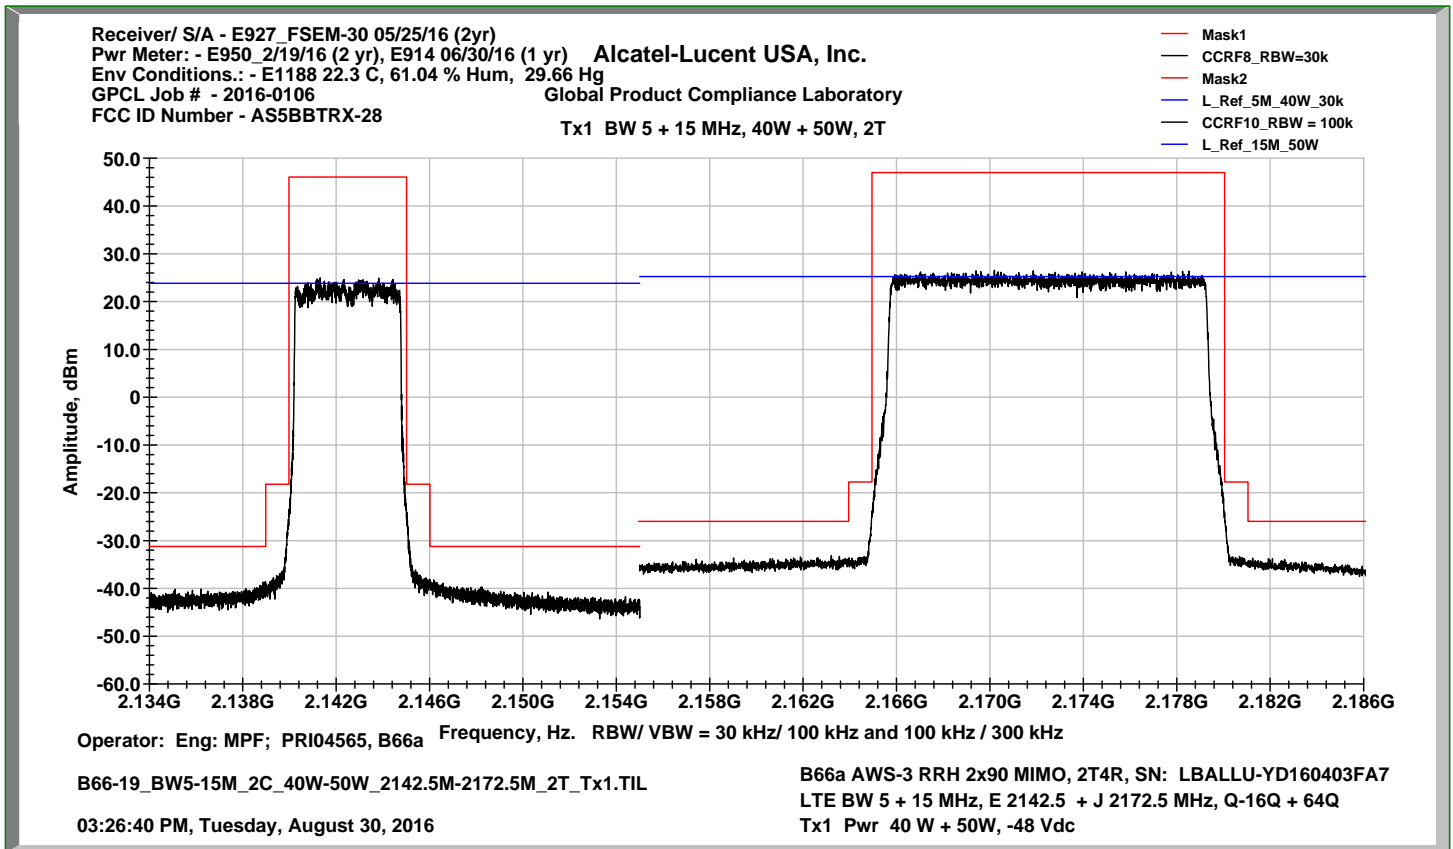


20 Tx1 Mixed Mode	E-HIJ	5 + 20 MHz	2142.5 + 2170 MHz	40 + 50 W	90 W	QPSK+16QAM	64QAM
-------------------	-------	------------	-------------------	-----------	------	------------	-------

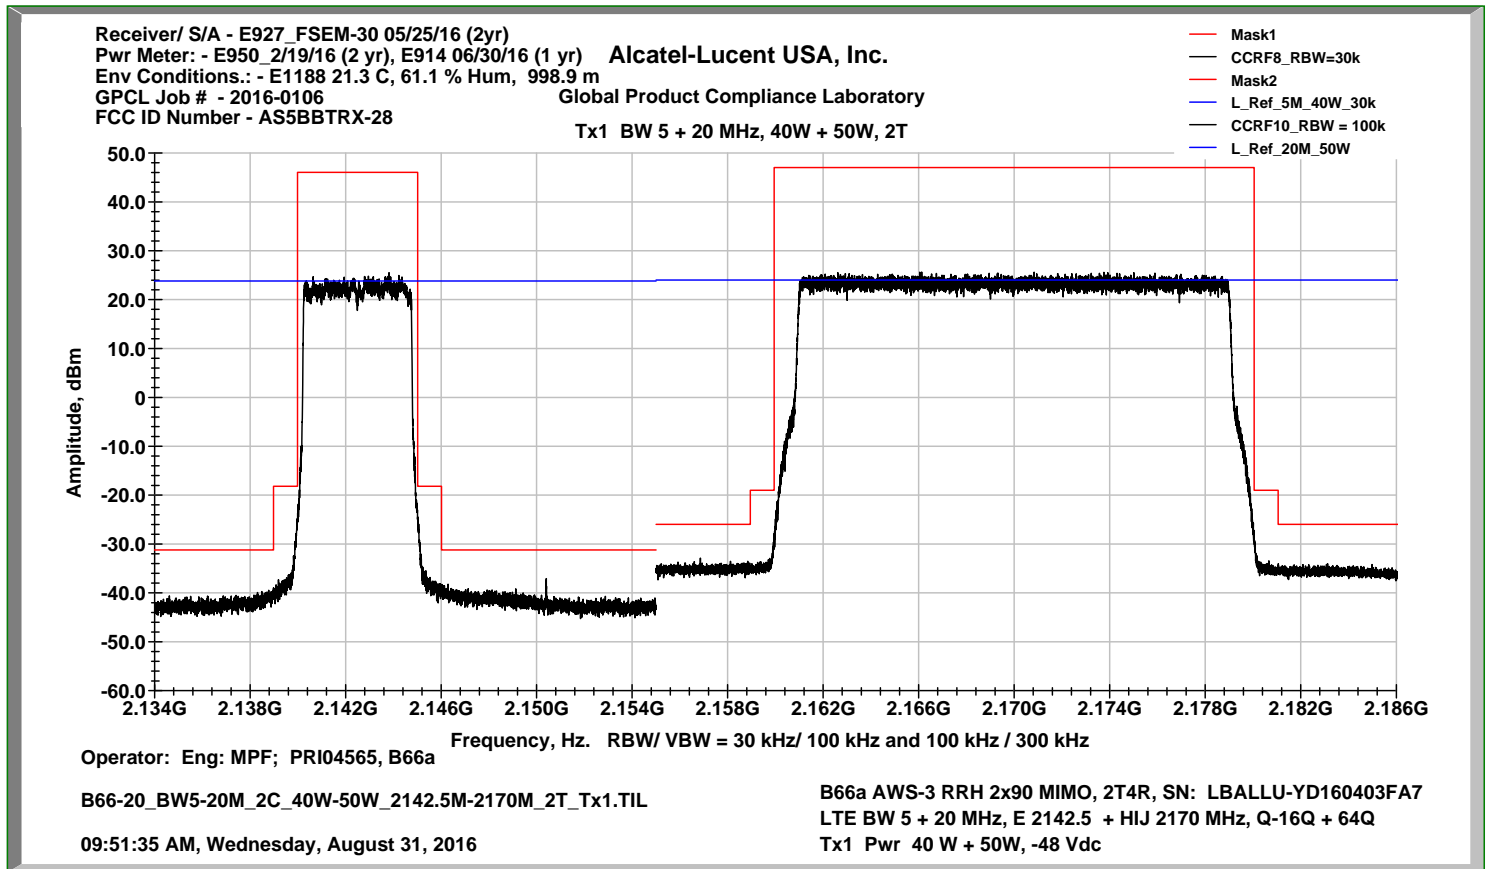


21 Tx2 Mixed Mode	DE-IJ	10 + 15 MHz	2140 + 2172.5 MHz	45 + 45 W	90 W	QPSK+16QAM	64QAM
-------------------	-------	-------------	-------------------	-----------	------	------------	-------

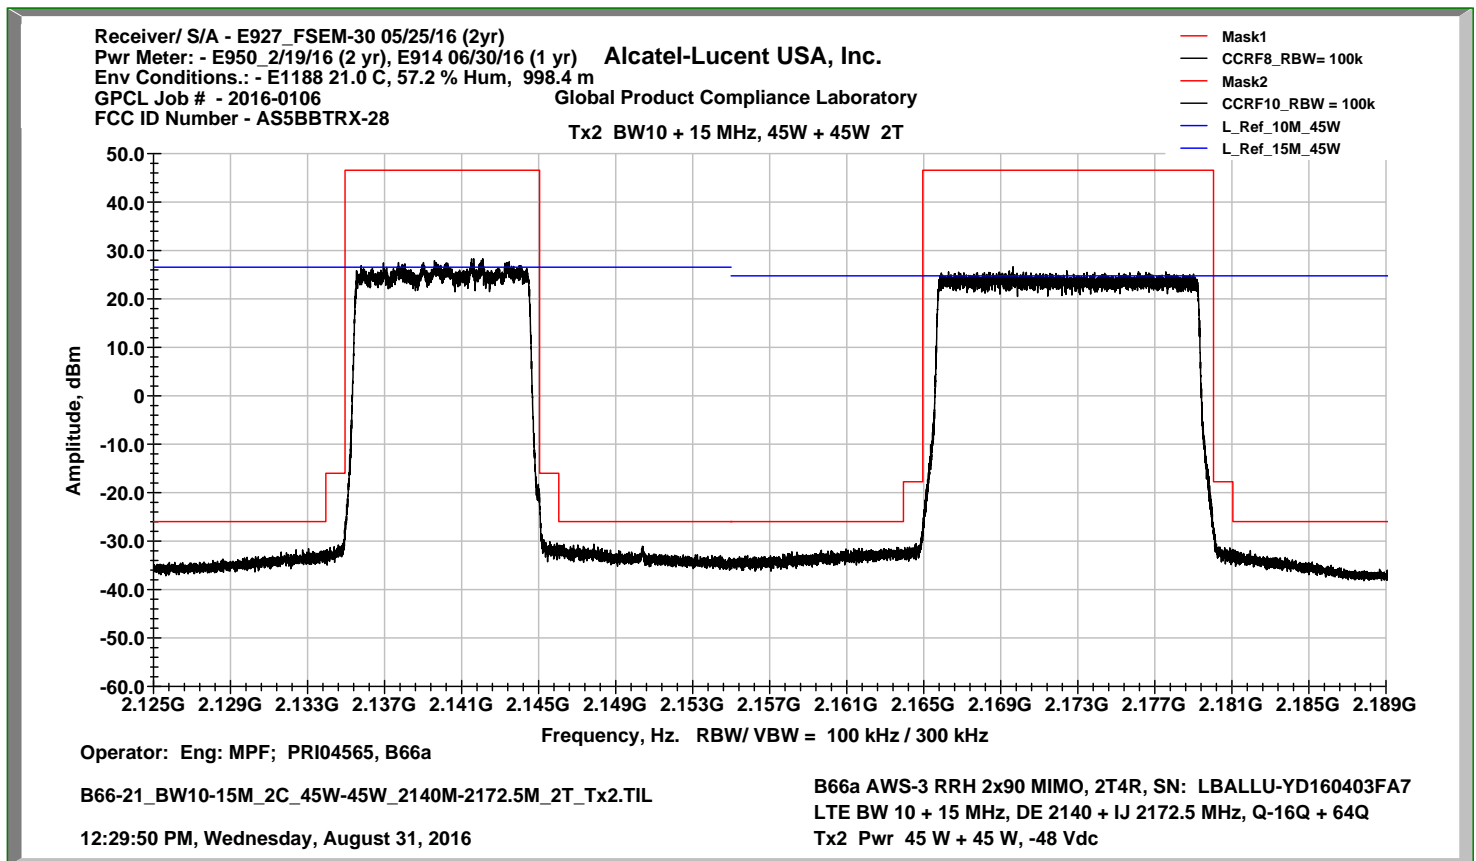


22 Tx2 Mixed Mode	DE-HIJ	10 + 20 MHz	2140 + 2170 MHz	45 + 45 W	90 W	QPSK+16QAM	64QAM
-------------------	--------	-------------	-----------------	-----------	------	------------	-------

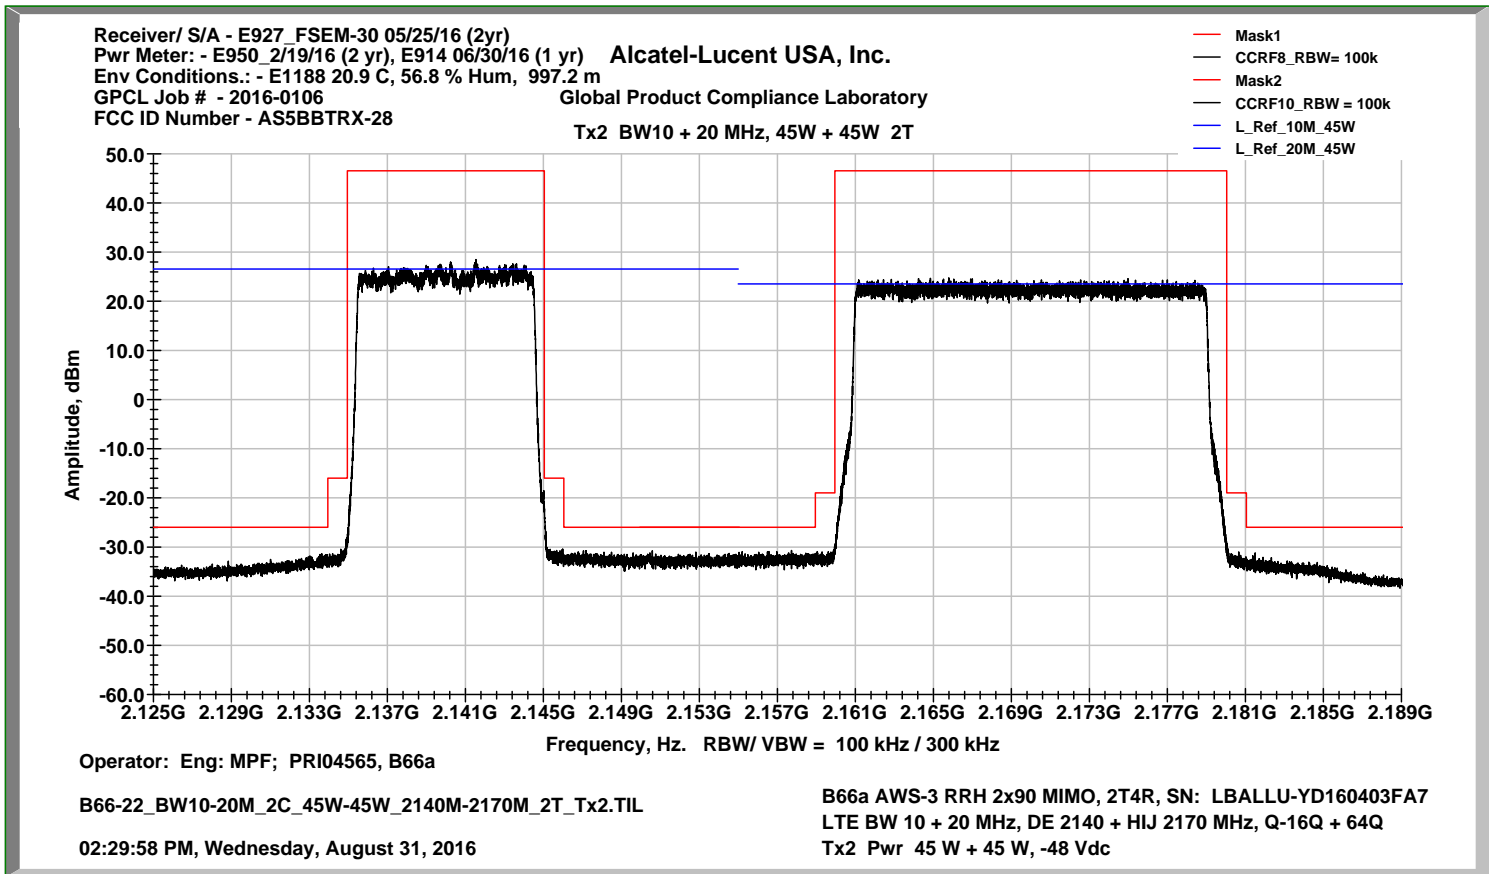

23 Tx2 Mixed Mode	EF-HIJ	15 + 20 MHz	2147.5 + 2170 MHz	45 + 45 W	90 W	QPSK+16QAM	64QAM
-------------------	--------	-------------	-------------------	-----------	------	------------	-------

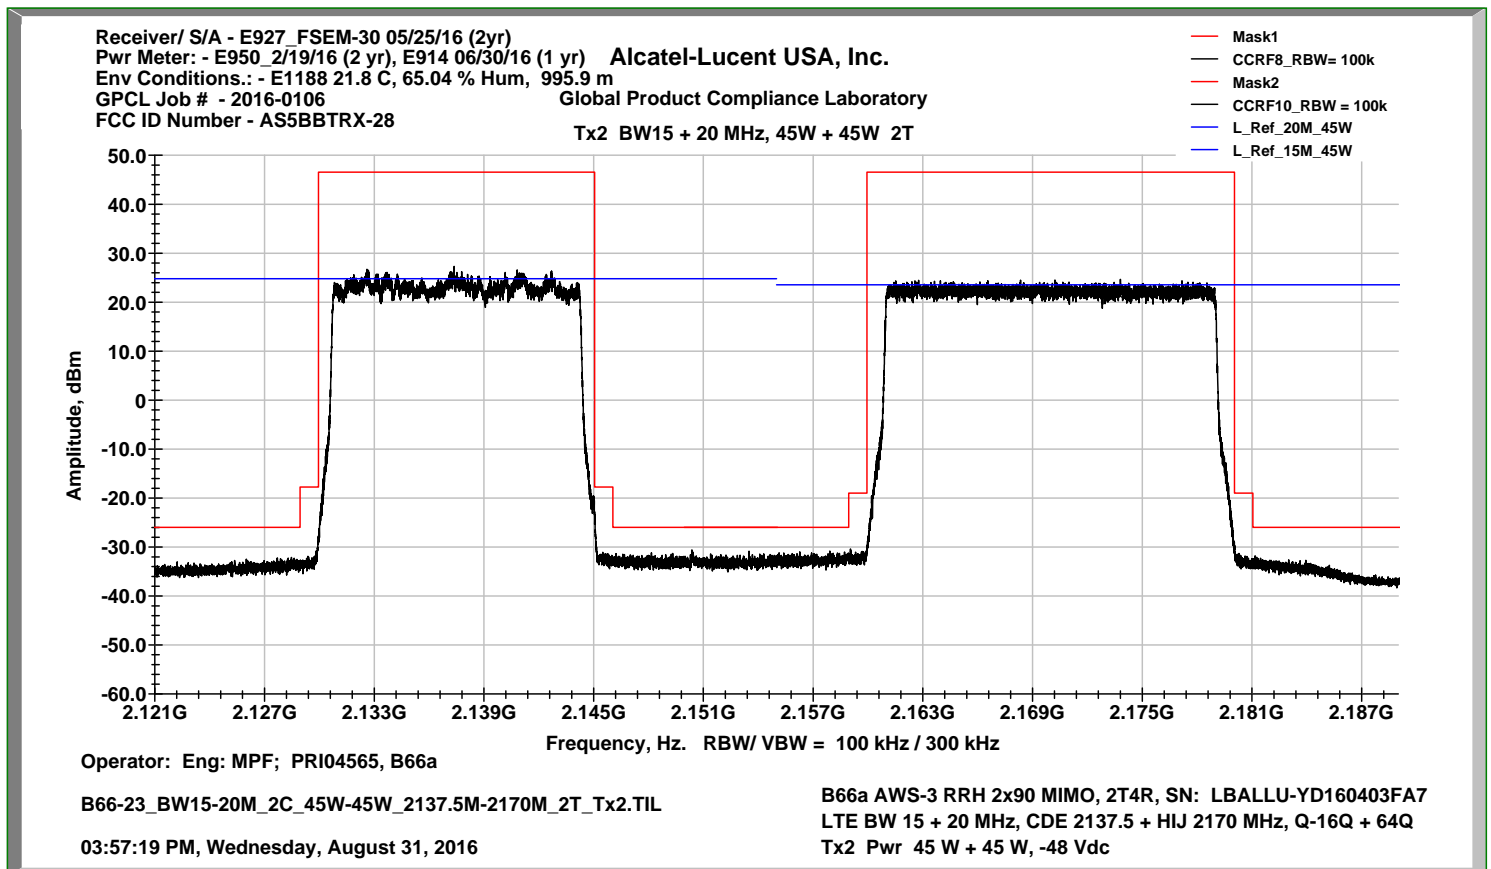

24 Tx2	GH-J	10 + 10 MHz	2160 + 2175 MHz	45 + 45 W	90 W	QPSK+16QAM	64QAM
--------	------	-------------	-----------------	-----------	------	------------	-------

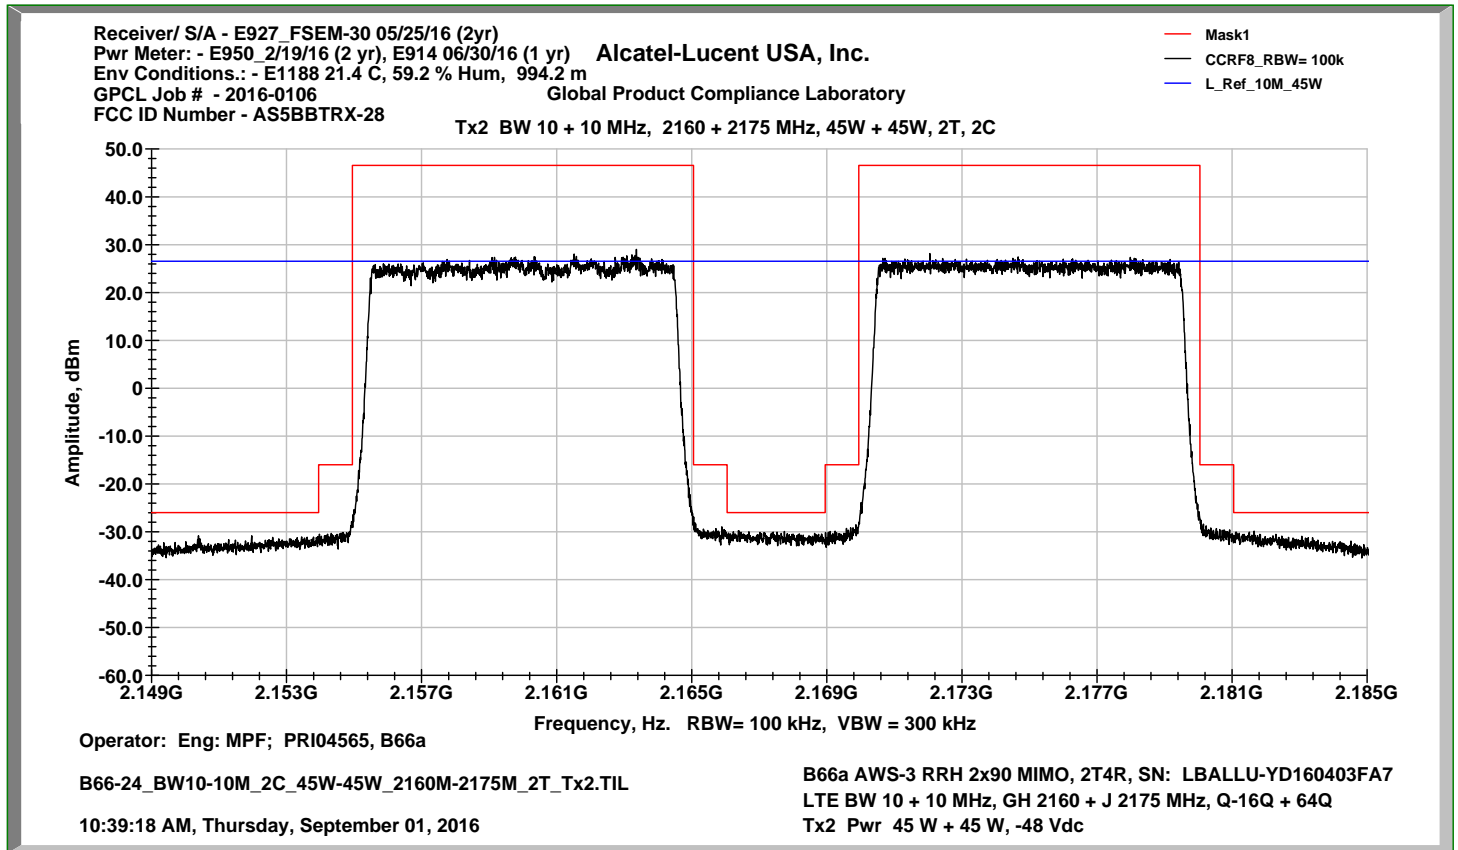

4.4 Section 2.1051 MEASUREMENT REQUIRED: SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

This test measures the emissions of spurious signals which may come from harmonic, parasitic, intermodulation and frequency conversion products and are outside the necessary bandwidth but exclude out-of-band emissions. The out-of-block spurious emissions at the antenna transmitting terminal were investigated from 10 MHz to the 10th harmonic of the carrier, per Section 2.1057(a)(1). The emission limit is as previously stated in Part 27.53(h), as :

For greater than 1 MHz from the upper and lower edge of the measurement block/band:

$$P \text{ dBm} - [43 + 10 \log P \text{ W}] - 10 \log (\text{Meas RBW}/1 \text{ MHz}) - 10 \log N$$

Where, Meas RBW = 1 MHz and N = 2 for 2T4R and 4 for 4T4R

The measurement configurations and carrier setup were same as in Section 4.3. The out-of-band emissions were measured using Total Integrated Laboratory Environment (TILE) EMI test software, by ETS-Lindgren.

The emission limits and the setting of measurement equipment for the unwanted emissions measurement were given in Table 4.3.3 and provided in Table 4.4.1, where per FCC CFR 47, Sections 2.1051 and 2.1057(c), **the spurious emissions attenuated more than 20 dB below the permissible value need not be reported.**

Table 4.4.1 Conducted Spurious Emissions Limit

Frequency of Emission (MHz)	MIMO Configuration	Required Limit (dBm)	Reportable Limit (dBm)	Detector/RBW
10-22,000	2x90 MIMO	-16	-36	Average/1MHz
10-22,000	4x45 MIMO	-19		Average/1MHz

The measurements were performed with a spectrum analyzer, which was calibrated in accordance with the ISO 9001 process. The carrier power level at the antenna transmitting terminal was calibrated before the conducted spurious emissions testing for each test. The spectrum analyzer was set to a 1MHz resolution bandwidth. The RMS average detector was used. The measurement met the requirements in ANSI C63.26 which requires in 5.2.4.4.1 and 5.7 that the number of points in the sweep be $> 2 \times \text{Span}/\text{RBW}$.

The spurious emissions in the frequency range measured are well under the required reportable emission limit for all carrier bandwidths with QPSK+16QAM and 64QAM modulations evaluated. **Therefore, there are no reportable emissions.**

4.4.1 Results:

Over the required frequency spectrum investigated for the EUT, no reportable out-of-block spurious emissions were detected. The out-of-block spurious emissions in the entire spectrum investigated are under the required reportable emission limit. The measurement results demonstrate that the subject of the application is in full compliance with the Rules of the Commission. **There are no reportable emissions.**

4.5 Section 2.1055 MEASUREMENT REQUIRED: FREQUENCY STABILITY

This measurement evaluates the frequency difference between the actual transmit carrier frequency and the specified transmit frequency assignment. Only the portion of the transmitter system containing the frequency determining and stabilizing circuitry need be put in an environmental chamber and subjected to the temperature variation test per FCC Section 2.1055. The unit which provides baseband signals, such as BBU (baseband unit), can be located outside the chamber if it is a separated unit.

This Class II Permissive Change was software only. No changes were made to the frequency determining and stabilization circuitry. There is no change from the Original Equipment authorization. **Therefore, it was not necessary to repeat this test.**

4.6 Section 2.1053 MEASUREMENT REQUIRED: FIELD STRENGTH OF SPURIOUS RADIATION

This measurement evaluates the spurious emissions that may be radiated directly from the EUT cabinet, circuits or power leads under normal conditions of installation and operation. The EUT shall be investigated from 30 MHz to the 10th harmonic of the carrier, per Section 2.1057(a)(1).

The EUT was set to transmit in the 2155 - 2180 MHz frequency band with LTE technology and 2x90W MIMO. It was configured as in the normal mode of the installation and operation with the maximum power output per Table 4.6.1. The test model used for configuring the LTE carrier was described in Section 4.3. All carriers were transmitting to non-radiating 50 Ω resistive loads.

Table 4.6.1 EUT Configuration – Dual Carrier – 2x90W MIMO

Config No	No of Carriers/Port	Tx1 (freq)	Tx2 (freq)	Power/c (dBm)	Carrier BW (MHz)	Modulations
1	2	2160 + 2175 MHz	2160 + 2175 MHz	46.53	10 + 10	(QPSK+16QAM) + 64QAM

The emission limits and the setting of measurement equipment for the spurious emissions measurement were given in Section 4.3. FCC sections 2.1051 and 2.1057(c) specify that the spurious emissions attenuated more than 20 dB below the permissible value need not be reported. By using the relation between the electric field strength of an ideal dipole and its excitation power given in Reference Data for Radio Engineers, page 676, 4th edition, ITT Corp., the emission limit calculated for electric field strength and its reportable limit equal.

The equipment under test (EUT) was configured as recommended for *floor standing equipment*, following the guidelines of ANSI C63.4-2009. The EUT was installed and operated as in the *normal mode of operation*. Field strength measurements of radiated spurious emissions were evaluated in a 3m semi-anechoic chamber, using an EUT-to-Antenna separation of 3-meters. Test software was Vasona by EMIsoft.

Measurements were made using both horizontally and vertically polarized broadband antennas. Per FCC regulations, the comparison of out of band spurious emissions directly to the limit is appropriately made using the substitution method. However, *when the emissions are more than 20 dB below the specification limit*, the use of field strength measurements for compliance determination is acceptable and those emissions are considered *not reportable* (Section 2.1057 and the FCC Interpretive database for 2.1053).

For this case the evaluation of acceptable radiated field strength is as follows. The calculated emission levels were found by:

$$\begin{aligned} &P_{\text{meas}} (\text{dBm}) + \text{Cable Loss}(\text{dB}) + \text{Antenna Factor}(\text{dB}) + 107 (\text{dB}\mu\text{V}/\text{dBm}) - \text{Amplifier Gain} (\text{dB}) \\ &= \text{Field Strength} (\text{dB}\mu\text{V}/\text{m}) \end{aligned}$$

Section 27.53 and 2.1053 contains the requirements for the levels of spurious radiation as a function of the EIRP of the unmodulated carrier. The reference level for the unmodulated carrier is calculated as the field produced by an isotropic radiator excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 27-7, 6th edition, IT&T Corp.

$$E = (120\pi P)^{1/2} = [(30 * P)^{1/2}] / R$$

$$20 \log (E \cdot 10^6) - (43 + 10 \log P) = 82.23 \text{ dB } \mu\text{V/meter}$$

Where: E = Field Intensity in Volts/ meter R = Distance in meters = 3 m
P = Transmitted Power in watts = 180 W (2x90w MIMO)

Table 4.6.2 Calculated Radiated Spurious Emission Limit in Electrical Field Strength

Frequency Range (MHz)	Measurement Distance (m)	Required E Limit (2x2 MIMO) (dBμV/m)	Reportable E Limit (dBμV/m)	Detector/RBW
10-22,000	3	82.23	62.23	Average/1MHz

The field strength of radiated spurious emissions measured was determined by


$$E(\text{dB}\mu\text{V}/\text{m}) = V_{\text{meas}}(\text{dB}\mu\text{V}) + \text{Cable Loss (dB)} + \text{Antenna Factor (dBi/m)}$$

Field strength measurements of radiated spurious emissions were made in a semi-anechoic room of Global Product Compliance Laboratories of Alcatel-Lucent Murray Hill which was detailed in Section 6. The recommendations of ANSI C63.4 and ANSI C63.26 were followed for EUT testing setup, cabling, and measurement approach and procedures. All the measurement equipment used, including antennas, was calibrated in accordance with ISO 9001 process. The EUT setup diagram is given in the Figure 4.6.1. **The minimum margin measured per Table 4.6.2 is more than 20dB below the required limit.**

4.6.1 Field Strength of Radiated Emissions Results:

Over the frequency spectrum investigated no reportable radiated spurious emissions were detected. The smallest passing margin was 382.999 MHz at 27.97 dB μ V/meter, which is 54 dB below the limit, **and is not reportable**. The measurement results of the EUT, subject of this application, demonstrate the full compliance with the Rules of the Commission.

Figure 4.6.1 Test Set-Up for Measurement of Radiated Spurious Emissions

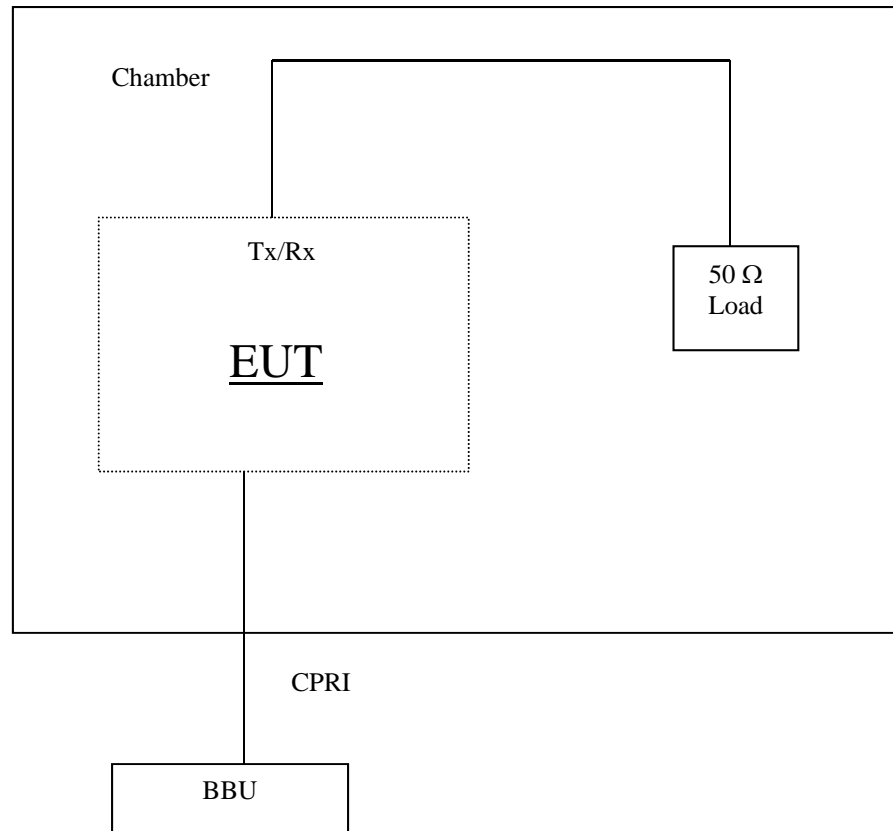

4.7 LIST OF TEST EQUIPMENT

Table 5.1 List of Test Equipment Used
Test Equipment and Attenuator List; Antenna Port Measurements, Project 2016-0106

Manufacturer	Model	Serial Number	Type	Description	GPCL ID	Last Cal	Interval	Status
Agilent Technologies	N1921A	MY45101984	Power Meter	P-Series	E950	2/19/2016	24	Active
Agilent Technologies	N1921A	US44510270	Power Sensor	-35 - +20 dBm 50 MHz -18 GHz	E914	6/30/2016	24	Active
TDK	GEN-60-25	14H9764AA	Power Supply	DC Power Supply 60 Volts 25 Amps	E1203	NCR	NCR	Active
Agilent Technologies	N9020A	MY48011791	MXA Signal Analyzer	20Hz-26.5GHz	E831	2/23/2016	24	Active
Rohde & Schwarz	FSEM30	835533/002	Spectrum Analyzer	20 Hz - 26.5 GHz	E927	5/25/2016	24	Active
Trilithic	10LC1790-3-AA	PCS-LPF-10	Low Pass Filter	PCS	E979	NCR		Active
Trilithic	5HC2850/18050-1.8-KK	PCS-HPF-10	High Pass Filter	PCS	e1132	NCR		Active
Hewlett Packard	8495B	MY41110681	Attenuator	Step DC-4GHz 0-100dB	E1045	NCR	12	Active
Hewlett Packard	8494B	MY42140030	Attenuator	Step DC-18GHz 0-11dB	E1046	NCR	12	Active
Agilent Technologies	772D	MY29586115	Directional Coupler	Dual 2-18 GHz	E1003	NCR	12	Active
Weinschel	6530-6-34-LIM	BN3219	Attenuator (Incident)	6 dB DC-18GHz 25W	E1004	NCR	12	Active
Weinschel	7003	CC0647	DC Block	9kHz - 18.6 GHz	E1101	NCR	24	Active
Weinschel	66-30-34	BH6644	Input Attenuator	30dB, 150W, DC-18GHz	---	NCR	NCR	Active
Weinschel	46-10-34	BH8103	Test Port 1/3	10dB, 25W, DC-18GHz	---	NCR	NCR	Active
MCE/Weinschel	6530-6-34-LIM	BN3217	Test Port 2/3	6dB, 25W, DC-18GHz	E1021	NCR	NCR	Active
MCE/Weinschel	6530-6-34-LIM	BN3225	Test Port 32/3	6dB, 25W, DC-18GHz	---	NCR	NCR	Active
Agilent Technologies	N5230C	MY49000897	PNA-L Network Analyzer	10 MHz – 40 GHz	E896	8/15/14	24 + 3 Extension	Active
TxRx1 – 1/3 Aeroflex/Weinschel	49-30-43	QZ222	Attenuator	30dB, 150W	---	NCR	NCR	Active
TxRx1 – 2/3 MCE/Weinschel	46-20-34-LIM	BN3134	Attenuator	20dB, 25W, DC-18GHz	---	NCR	NCR	Active
TxRx1 – 3/3 MCA	401-1F3	---	Termination	---	---	NCR	NCR	Active
TxRx3 – 1/3 Weinschel Corp	49-20-33	LY101	Attenuator	20dB, 150W	---	NCR	NCR	Active
TxRx3 – 2/3 Weinschel Corp	24-30-43	BC8948	Attenuator	30dB, 50W, DC-8.5GHz	---	NCR	NCR	Active
TxRx3 – 3/3 MECA	400-1	---	Termination		---	NCR	NCR	Active
TxRx4 – 1/3 Weinschel Corp	49-30-53	LV821	Attenuator	30dB, 150W	---	NCR	NCR	Active
TxRx4 – 2/3 Weinschel Corp	46-20-34	BJ2719	Attenuator	20dB, 25W, DC-18GHz	---	NCR	NCR	Active
TxRx4 – 3/3 TFE	20-3-NJ-Z	11091962	Termination	20W, DC-3GHz	---	NCR	NCR	Active
TxRx2 – 1/2 Weinschel Corp	49-40-43	LC235	Attenuator	40dB, 150W	---	NCR	NCR	Active
TxRx2 – 2/2 Weinschel Corp	M1426	BB8528	Termination	50W, DC-8GHz	---	NCR	NCR	Active

List of Cables

Function	Manufacturer	Model	SN	Comcode
TxRx1	Lucent	KS-25467L7110	G00009	848610259
TxRx3	Lucent	KS-25467L7140	---	848610358
TxRx4	Lucent	KS-25467L7160	03TK22161153	848610416
TxRx2	Lucent	KS-25467L7110	G00680	848610259
BBU GPS	---	---	11TK46275965	849132956
BBU Optic 1	Optical Fiber	---	---	849122238
BBU Port 1	Type CM 20AWG/4PRS	E188601	---	CC84201 Cat 6 Cable
BBU Alarms	CCM	3JR22028ACAA	---	RUC/ALARM

Customer Supplied Support Equipment Baseband Unit (BBU)

Module	Serial Number	Part Number
9926 BBU V2	ZJ1242000WD	3JR37526AAAC
bCEM2	YP15300782C	3JR50506AF01
bCEM-U	ZJ132500A89	3BK28961CAAE03
eCCM2	ZJ14370047H	3JR20120ABAJ01
CCM (ALARMS) / eAM(INT)	YP130405334	3JR37517AE01
Chassis SANMINA (SUZHOU)	HDZZA ED 01	3BK28764AAAA

Test Equipment List for Radiated Emissions Testing

Manufacturer	Model	Serial Number	Type	Description	GPCL ID	Last Cal	Interval	Status
A.H. Systems Inc.	SAS-521-2	458	Biological Antenna	25 - 2000 MHz	E758	4/13/2015	24	Active
Weinschel	2/6	CD2545	Attenuator	6dB	E1130	2/27/2015	24	Active
Agilent Technologies	E7405A	MY44210223	Spectrum Analyzer	EM 100Hz - 26.5GHz	E692	5/29/2014	24	Active
Sonoma Instrument Co.	310N	185785	Amplifier	9 kHz-1GHz	E494	12/3/2015	24	Active
Sunol Sciences Corp	SC99V	32802-1	System Controller		E588		0	Active
Hewlett Packard	8449B	3008A01384	Pre-Amplifier	Preamplifier 1- 26.5 GHz	E447	12/17/2015	24	Active
ETS Lindgren	3117	00135194	Horn Antenna	Double-Ridged Waveguide Horn 1-18 GHz	E1074	11/25/2015	24	Active
Rohde & Schwarz	ESIB40	100101	Test Receiver	EMI (20Hz to 40 GHz)-150 +30dBm	E907	9/22/2015	24	Active
Trilithic	5HC2850/18050-1.8-KK	PCS-HPF-5	High Pass Filter	PCS	E986		12	Active
EMC Test Systems	3116	2539	Horn Antenna	Double Ridged Horn 18-40 GHz	E513	3/19/2015	24	Active

4.8 FACILITIES AND ACCREDITATION

All measurement facilities at Alcatel-Lucent Global Product Compliance Laboratory (GPCL) used to collect the measurement data in the test report are located at 600-700 Mountain Avenue, Murray Hill, New Jersey 07974-0636 USA.

The field strength measurements of radiated spurious emissions are made in a FCC and IC registered three meter semi-anechoic chamber AR4 (FCC Site Registration Number: 647637, IC Filing Number: 6933F-7) which is maintained by Alcatel-Lucent in Murray Hill, New Jersey. The sites were constructed and are continuously in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

Alcatel-Lucent Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.

<p>United States Department of Commerce National Institute of Standards and Technology</p> <p>NVLAP[®]</p> <hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/> <p>NVLAP LAB CODE: 100275-0</p> <p>Nokia, Global Product Compliance Lab Murray Hill, NJ</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p>Electromagnetic Compatibility & Telecommunications</p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <table><tr><td><p>2015-09-14 through 2016-09-30</p><hr/><p>Effective Dates</p></td><td><div><div><hr/><p>For the National Voluntary Laboratory Accreditation Program</p></div></div></td></tr></table>		<p>2015-09-14 through 2016-09-30</p> <hr/> <p>Effective Dates</p>	<div><div><hr/><p>For the National Voluntary Laboratory Accreditation Program</p></div></div>
<p>2015-09-14 through 2016-09-30</p> <hr/> <p>Effective Dates</p>	<div><div><hr/><p>For the National Voluntary Laboratory Accreditation Program</p></div></div>		