
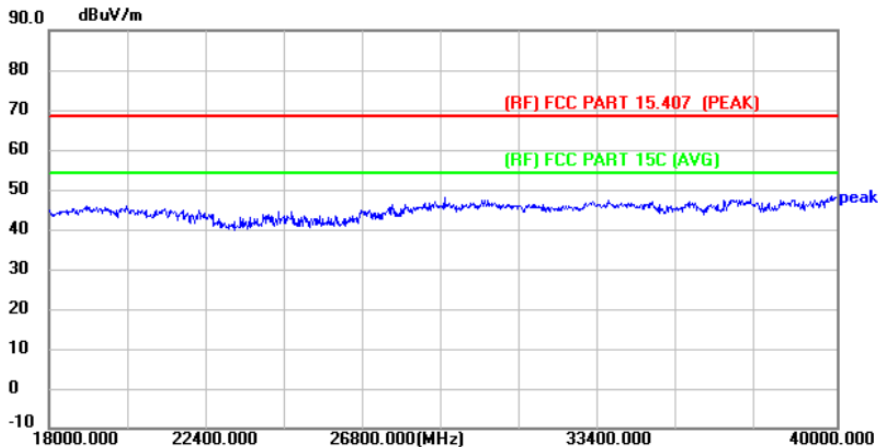


|               |                                 |                    |     |
|---------------|---------------------------------|--------------------|-----|
| Temperature:  | 24.4°C                          | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                          |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795MHz |                    |     |

**Horizontal**

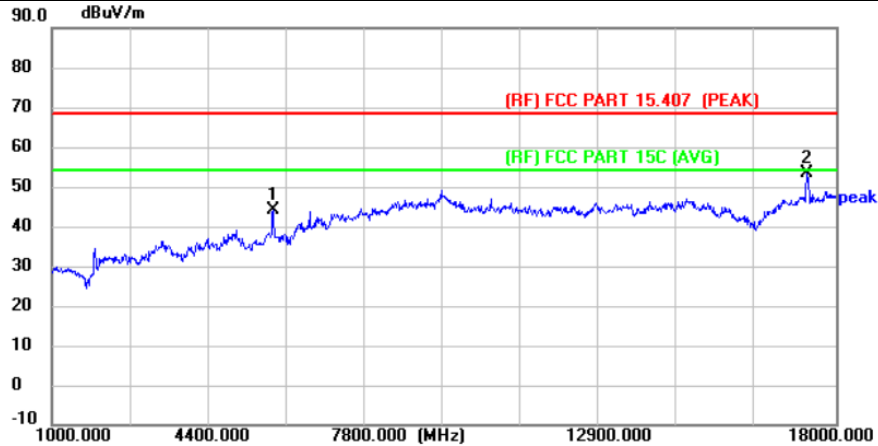

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5794.000        | 54.26          | -10.31        | 43.95          | 68.30          | -24.35      | peak     | P   |
| 2 * | 17371.000       | 47.08          | 6.16          | 53.24          | 68.30          | -15.06      | peak     | P   |



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.



|               |                                 |                    |     |
|---------------|---------------------------------|--------------------|-----|
| Temperature:  | 24.4°C                          | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                          |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795MHz |                    |     |

**Vertical**

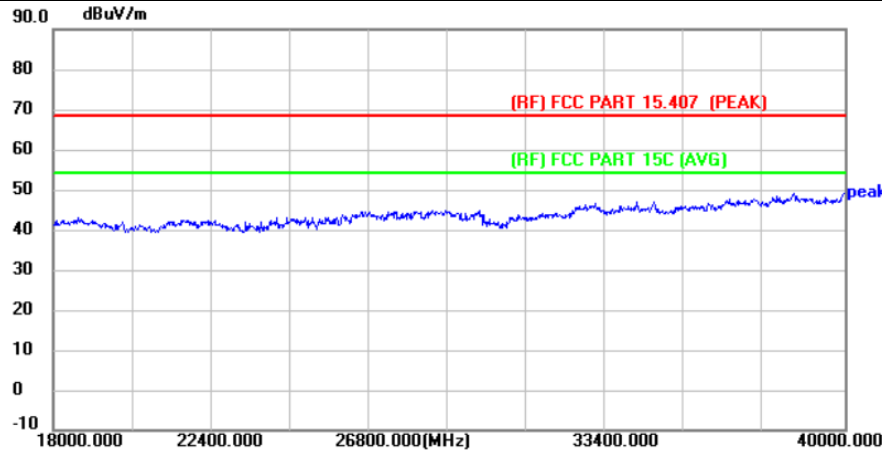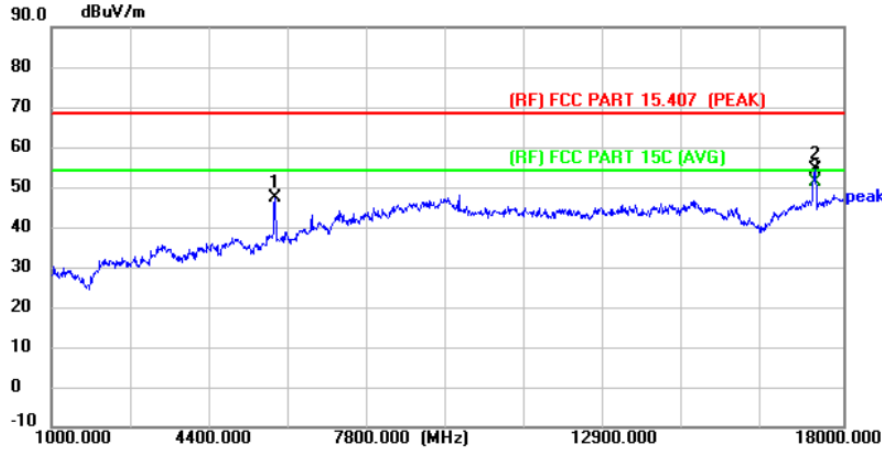

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5794.000        | 57.73          | -10.31        | 47.42          | 68.30          | -20.88      | peak     | P   |
| 2   | 17388.000       | 48.39          | 6.16          | 54.55          | 68.30          | -13.75      | peak     | P   |
| 3 * | 17388.000       | 45.07          | 6.16          | 51.23          | 54.00          | -2.77       | AVG      | P   |

**Remark:**



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.





|               |                                 |                    |     |
|---------------|---------------------------------|--------------------|-----|
| Temperature:  | 24.4°C                          | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                          |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775MHz |                    |     |

**Horizontal**

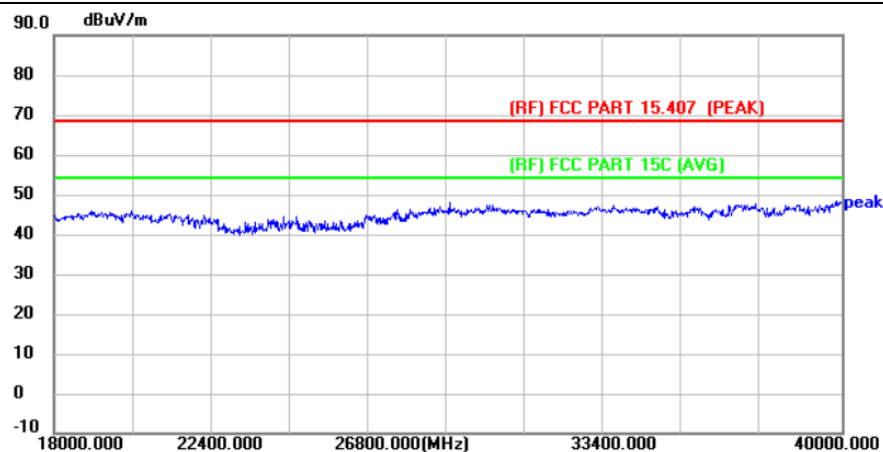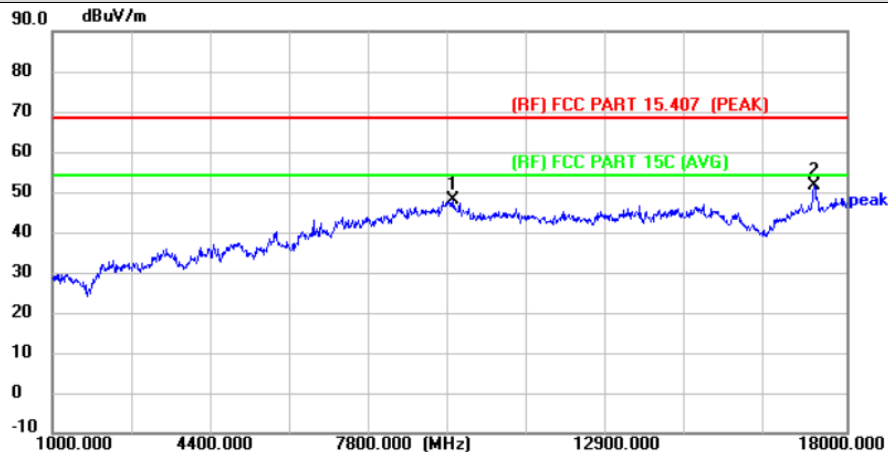

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 9568.000        | 47.68          | 0.21          | 47.89          | 68.30          | -20.41      | peak     | P   |
| 2 * | 17303.000       | 45.32          | 6.15          | 51.47          | 68.30          | -16.83      | peak     | P   |



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



|               |                                 |                    |     |
|---------------|---------------------------------|--------------------|-----|
| Temperature:  | 24.4°C                          | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                          |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775MHz |                    |     |

**Vertical**

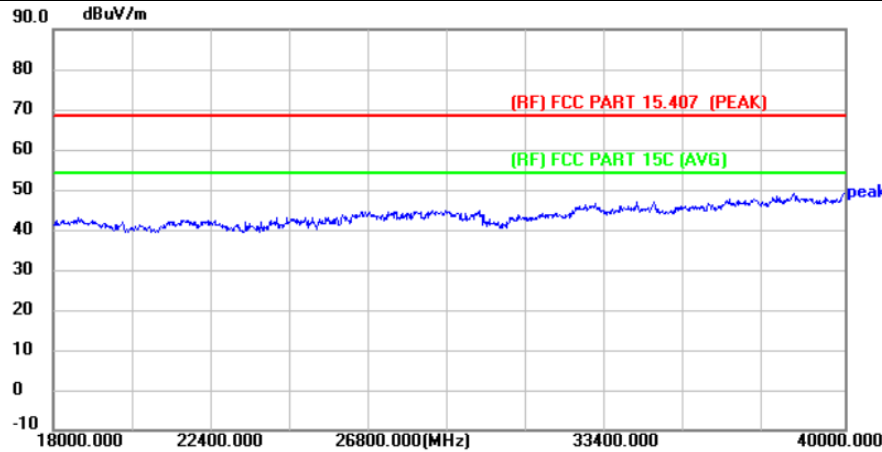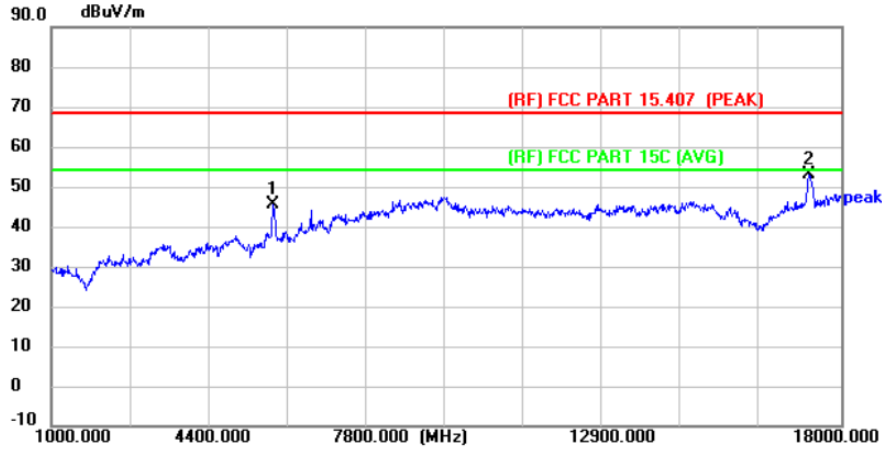

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5777.000        | 56.14          | -10.44        | 45.70          | 68.30          | -22.60      | peak     | P   |
| 2 * | 17303.000       | 46.94          | 6.15          | 53.09          | 68.30          | -15.21      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.






## Attachment C-- Restricted Bands Requirement Test Data

### Radiation Test

|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1) Ant.1-SISO |                    |     |
| Remark:       |                                               |                    |     |

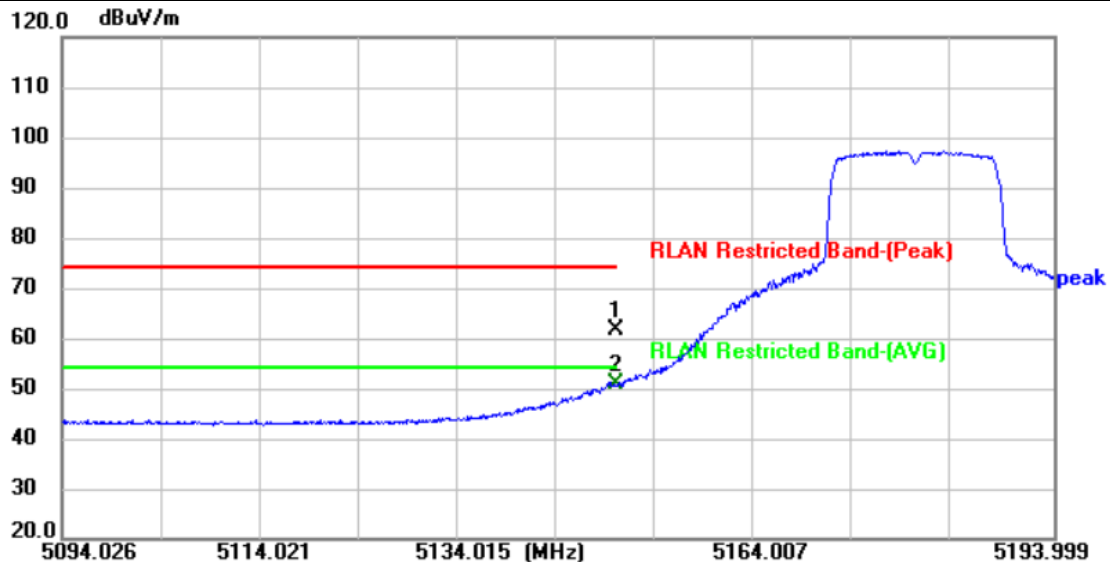


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 51.91          | 9.66          | 61.57          | 74.00          | -12.43      | peak     | P   |
| 2 * | 5150.000        | 41.20          | 9.66          | 50.86          | 54.00          | -3.14       | AVG      | P   |

#### Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1) Ant.1-SISO |                    |     |
| Remark:       |                                               |                    |     |

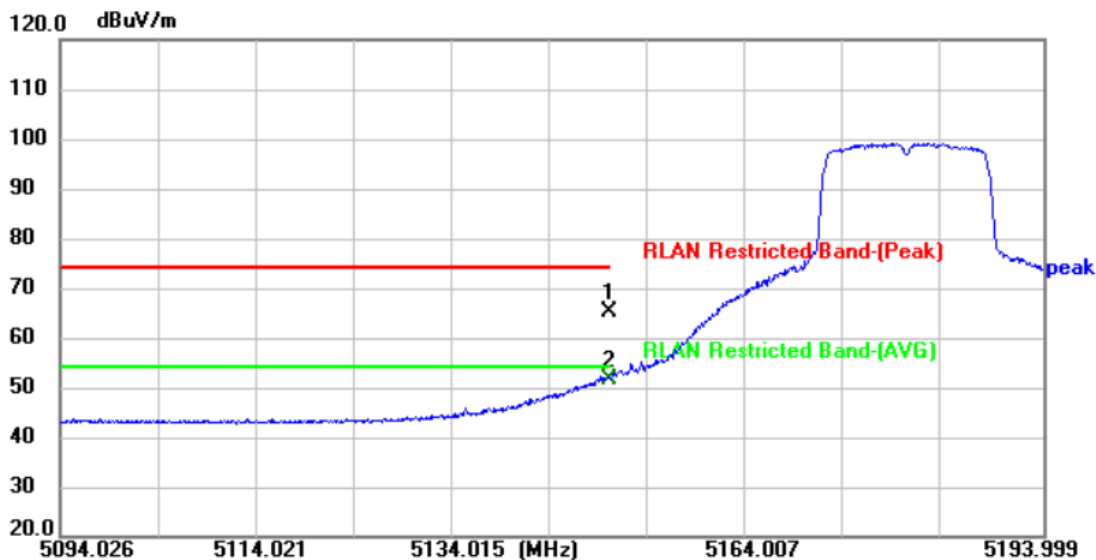

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 55.48          | 9.66          | 65.14          | 74.00          | -8.86       | peak     | P   |
| 2 * | 5150.000        | 41.92          | 9.66          | 51.58          | 54.00          | -2.42       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1) Ant.2-SISO |                    |     |
| Remark:       |                                               |                    |     |

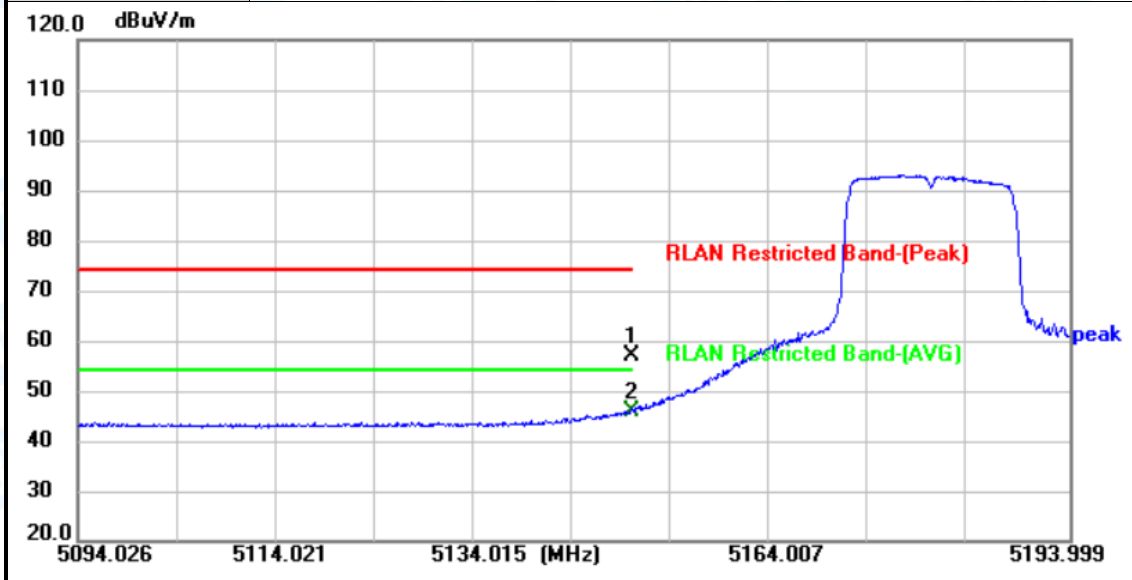


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 47.47          | 9.66          | 57.13          | 74.00          | -16.87      | peak     | P   |
| 2 * | 5150.000        | 36.29          | 9.66          | 45.95          | 54.00          | -8.05       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11a Mode 5180 MHz (U-NII-1) Ant.2-SISO |                    |     |
| Remark:       |                                               |                    |     |

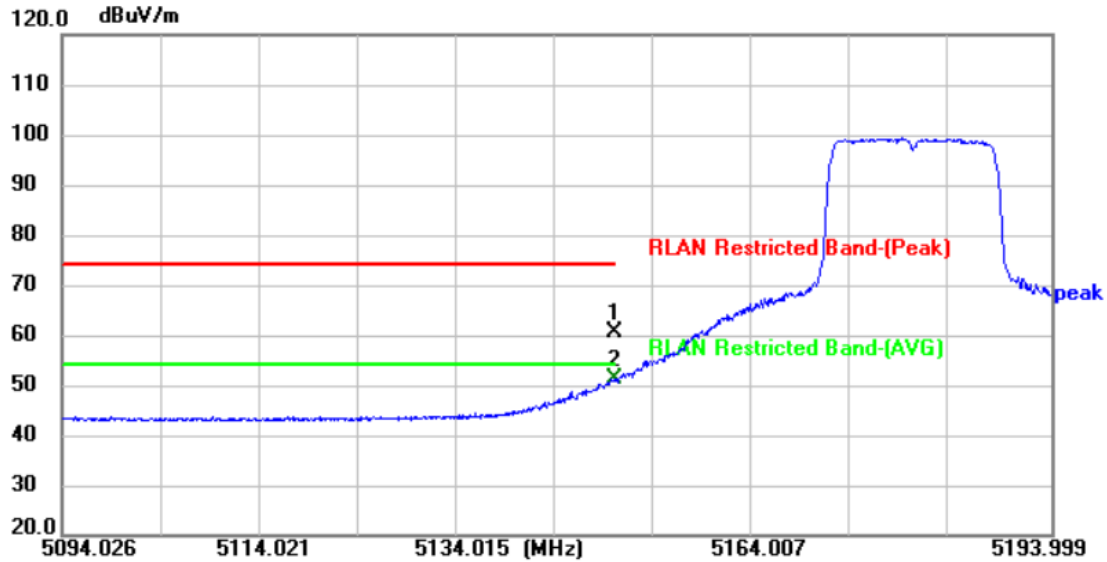

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 50.91          | 9.66          | 60.57          | 74.00          | -13.43      | peak     | P   |
| 2 * | 5150.000        | 41.43          | 9.66          | 51.09          | 54.00          | -2.91       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) |                    |     |
| Remark:       |                                          |                    |     |

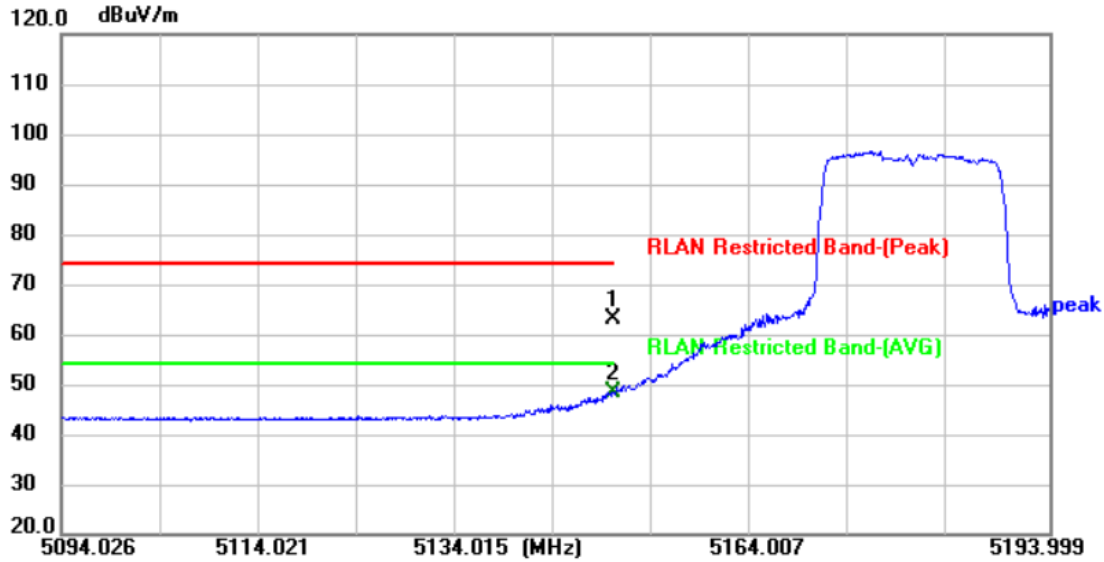


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 53.23          | 9.66          | 62.89          | 74.00          | -11.11      | peak     | P   |
| 2 * | 5150.000        | 38.80          | 9.66          | 48.46          | 54.00          | -5.54       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) |                    |     |
| Remark:       |                                          |                    |     |

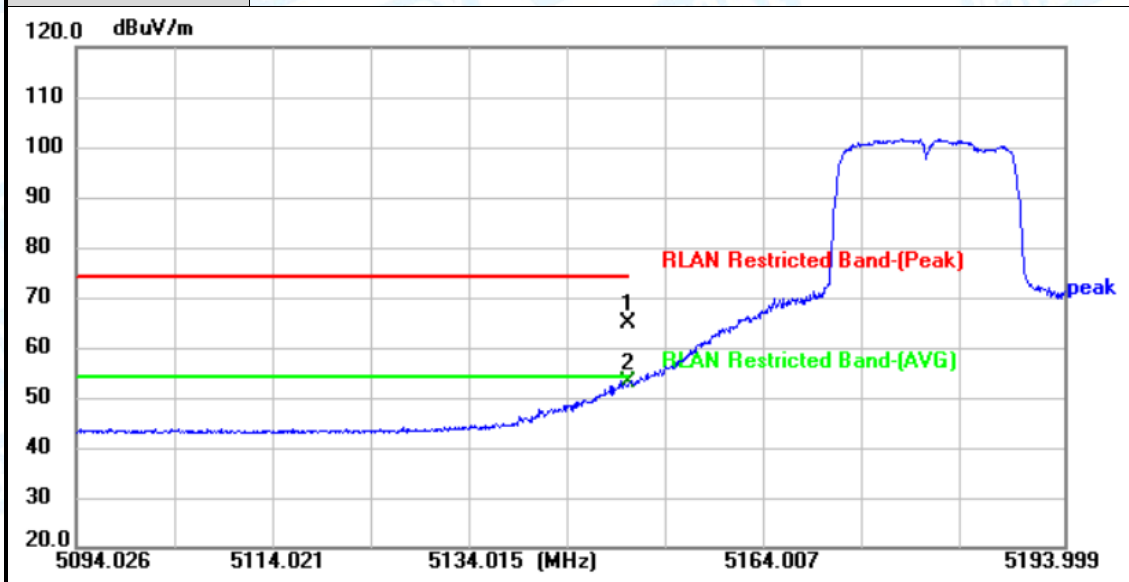

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 55.23          | 9.66          | 64.89          | 74.00          | -9.11       | peak     | P   |
| 2 * | 5150.000        | 43.20          | 9.66          | 52.86          | 54.00          | -1.14       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

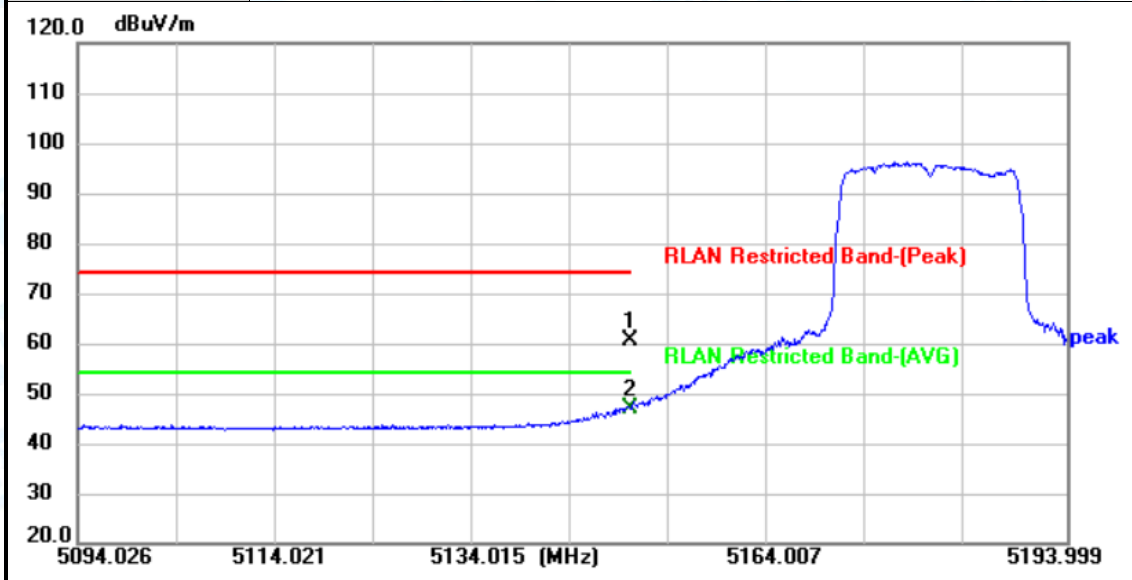


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 50.86          | 9.66          | 60.52          | 74.00          | -13.48      | peak     | P   |
| 2 * | 5150.000        | 37.37          | 9.66          | 47.03          | 54.00          | -6.97       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

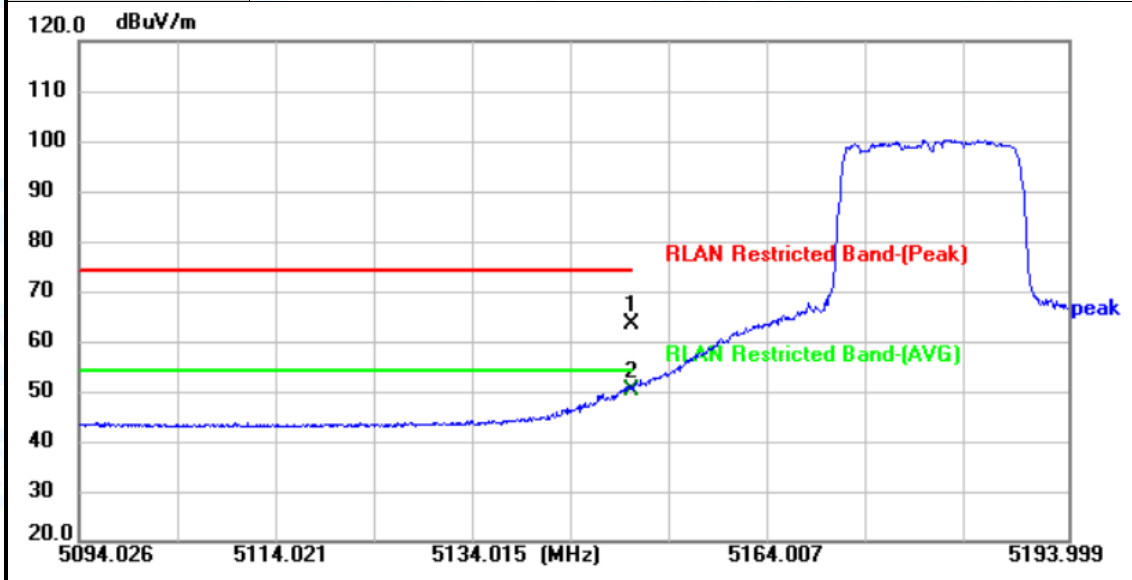

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 53.88          | 9.66          | 63.54          | 74.00          | -10.46      | peak     | P   |
| 2 * | 5150.000        | 40.53          | 9.66          | 50.19          | 54.00          | -3.81       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                          |                    |     |

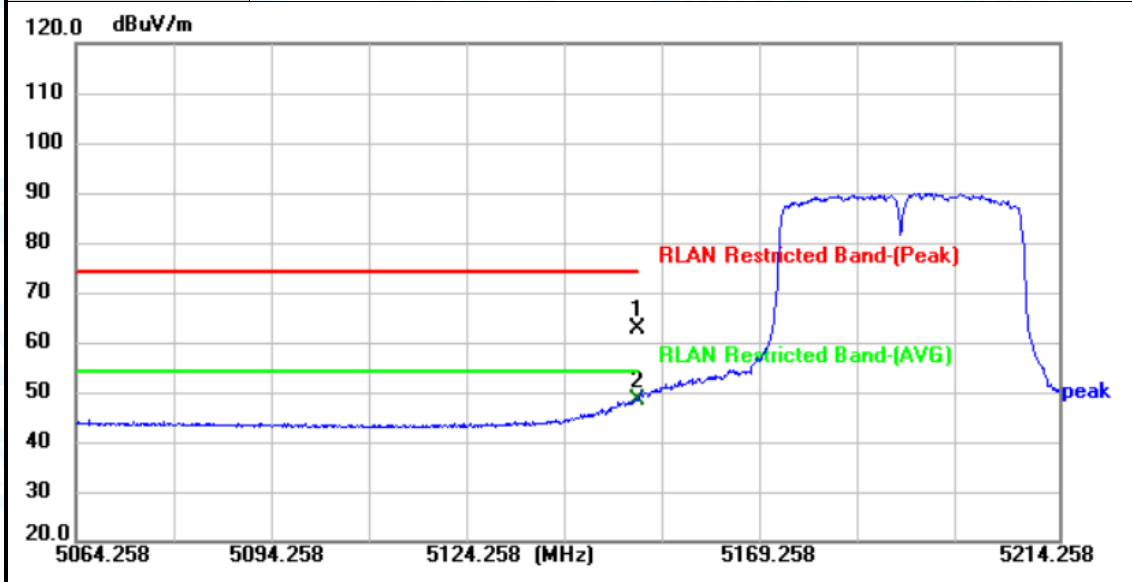


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 53.12          | 9.66          | 62.78          | 74.00          | -11.22      | peak     | P   |
| 2 * | 5150.000        | 38.86          | 9.66          | 48.52          | 54.00          | -5.48       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                          |                    |     |

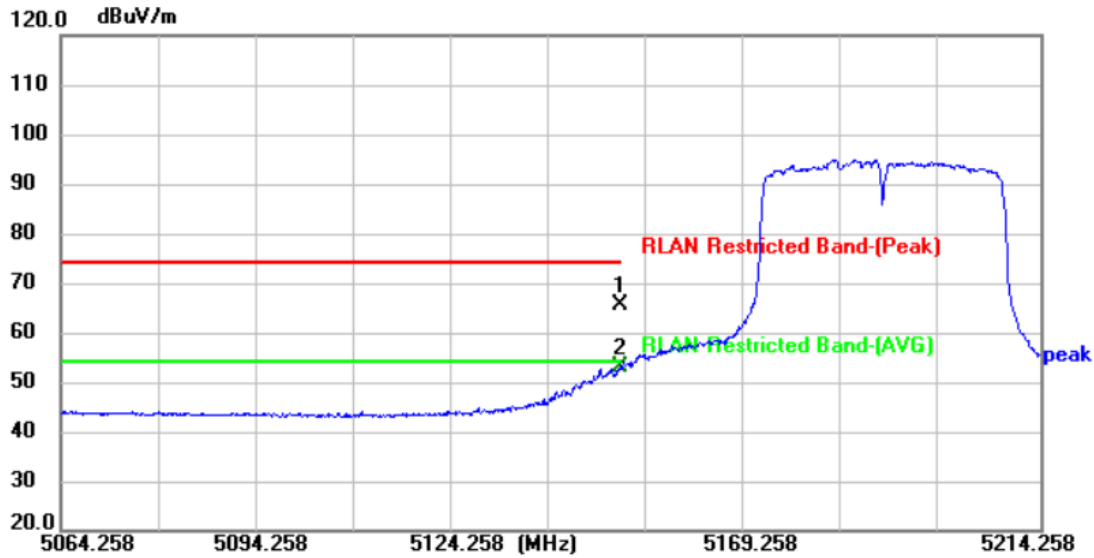

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 55.82          | 9.66          | 65.48          | 74.00          | -8.52       | peak     | P   |
| 2 * | 5150.000        | 43.23          | 9.66          | 52.89          | 54.00          | -1.11       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz Ant.1-SISO (U-NII-2A) |                    |     |
| Remark:       |                                                |                    |     |

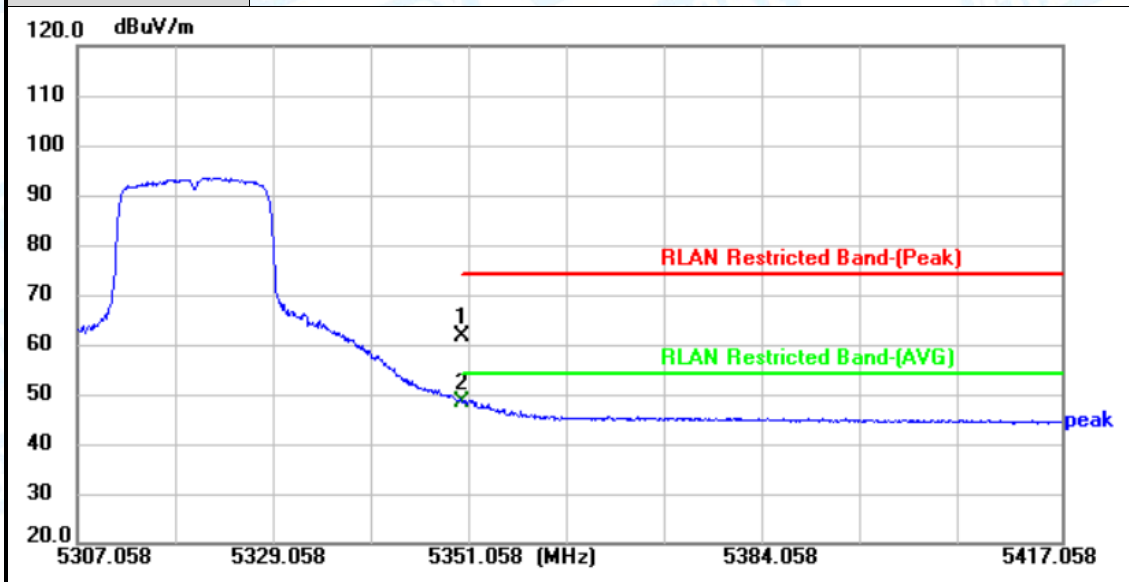


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 51.52          | 10.07         | 61.59          | 74.00          | -12.41      | peak     | P   |
| 2 * | 5350.000        | 38.46          | 10.07         | 48.53          | 54.00          | -5.47       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz Ant.1-SISO (U-NII-2A) |                    |     |
| Remark:       |                                                |                    |     |

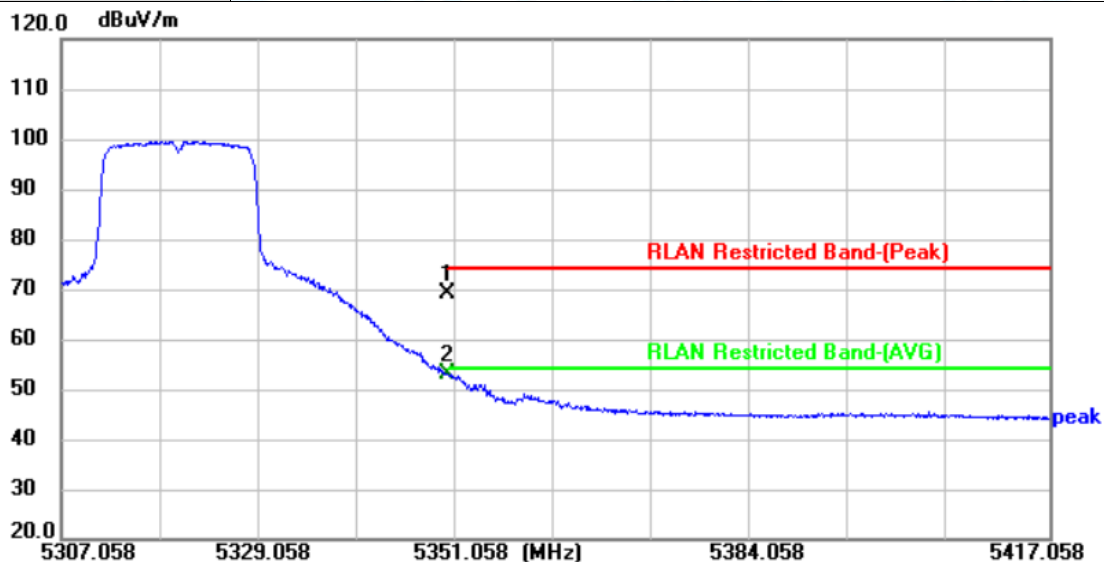

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 58.88          | 10.07         | 68.95          | 74.00          | -5.05       | peak     | P   |
| 2 * | 5350.000        | 42.88          | 10.07         | 52.95          | 54.00          | -1.05       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz Ant.2-SISO (U-NII-2A) |                    |     |
| Remark:       |                                                |                    |     |

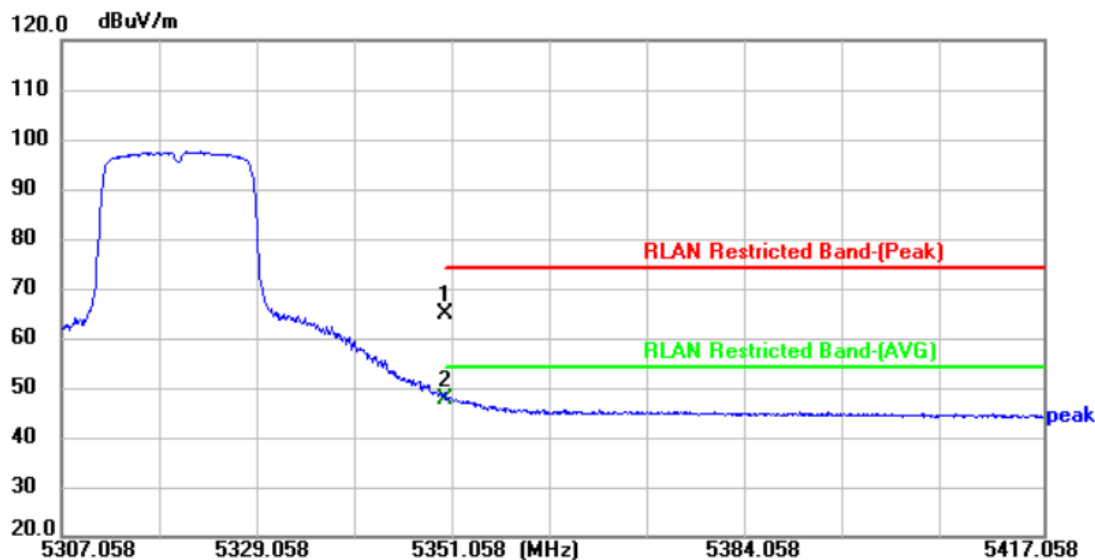


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 54.82          | 10.07         | 64.89          | 74.00          | -9.11       | peak     | P   |
| 2 * | 5350.000        | 37.66          | 10.07         | 47.73          | 54.00          | -6.27       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11a Mode 5320 MHz Ant.2-SISO (U-NII-2A) |                    |     |
| Remark:       |                                                |                    |     |

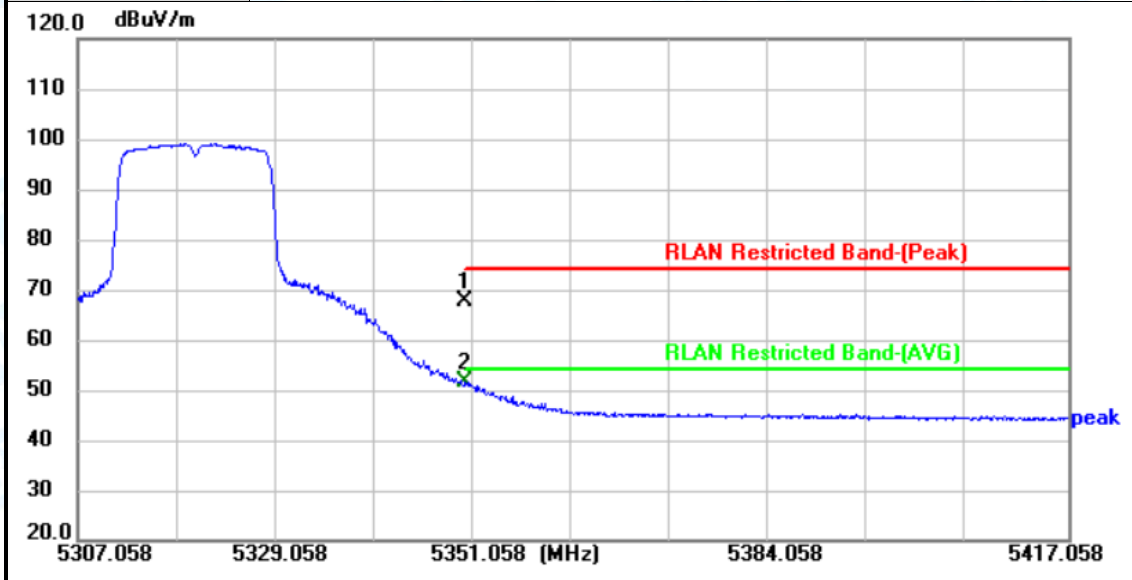

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 57.52          | 10.07         | 67.59          | 74.00          | -6.41       | peak     | P   |
| 2 * | 5350.000        | 41.39          | 10.07         | 51.46          | 54.00          | -2.54       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) |                    |     |
| Remark:       |                                           |                    |     |

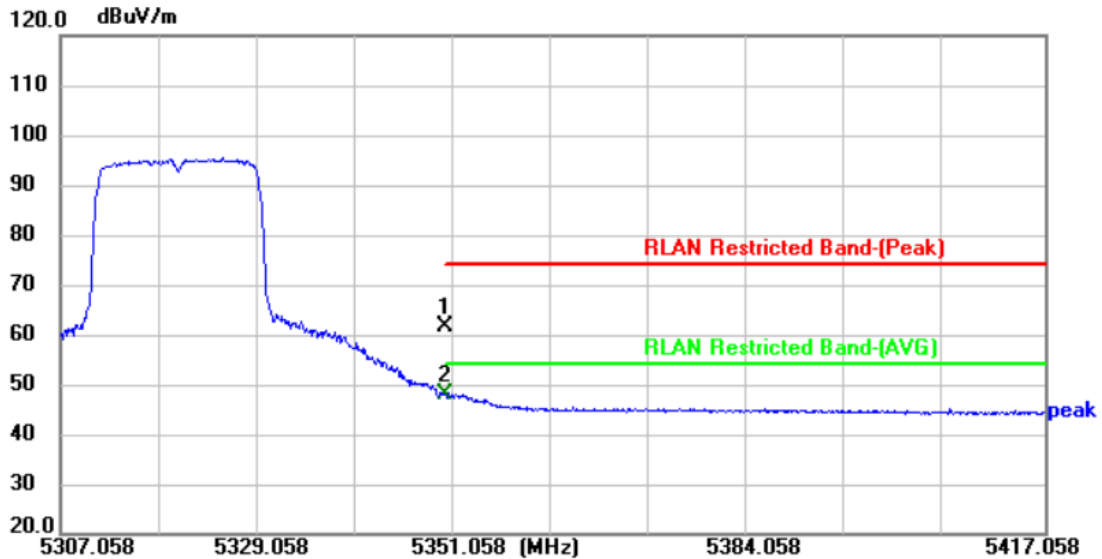


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 51.39          | 10.07         | 61.46          | 74.00          | -12.54      | peak     | P   |
| 2 * | 5350.000        | 37.81          | 10.07         | 47.88          | 54.00          | -6.12       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) |                    |     |
| Remark:       |                                           |                    |     |

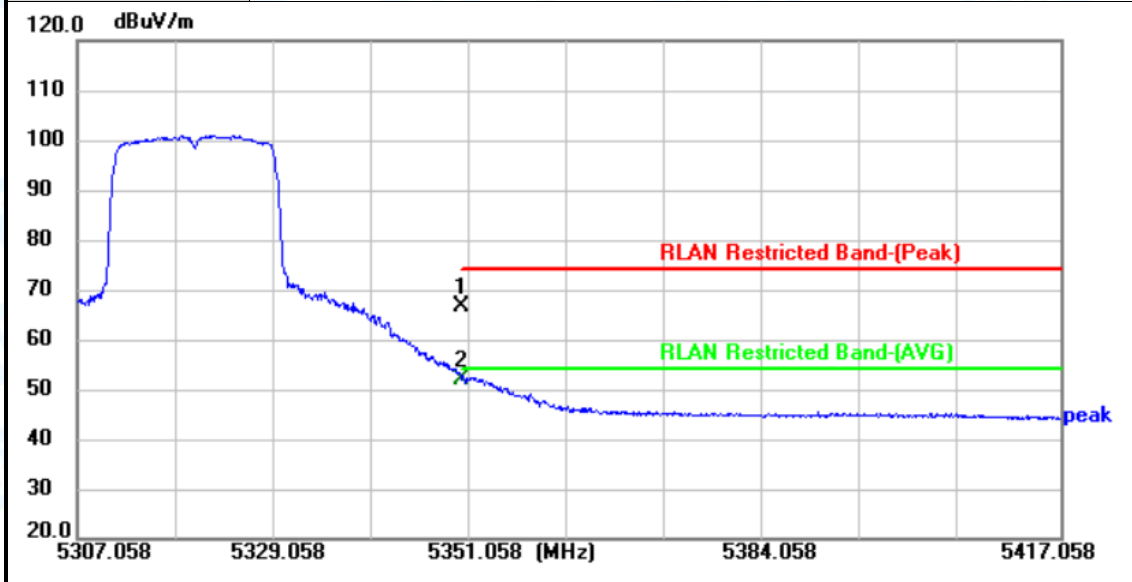

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 56.41          | 10.07         | 66.48          | 74.00          | -7.52       | peak     | P   |
| 2 * | 5350.000        | 41.87          | 10.07         | 51.94          | 54.00          | -2.06       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                           |                    |     |

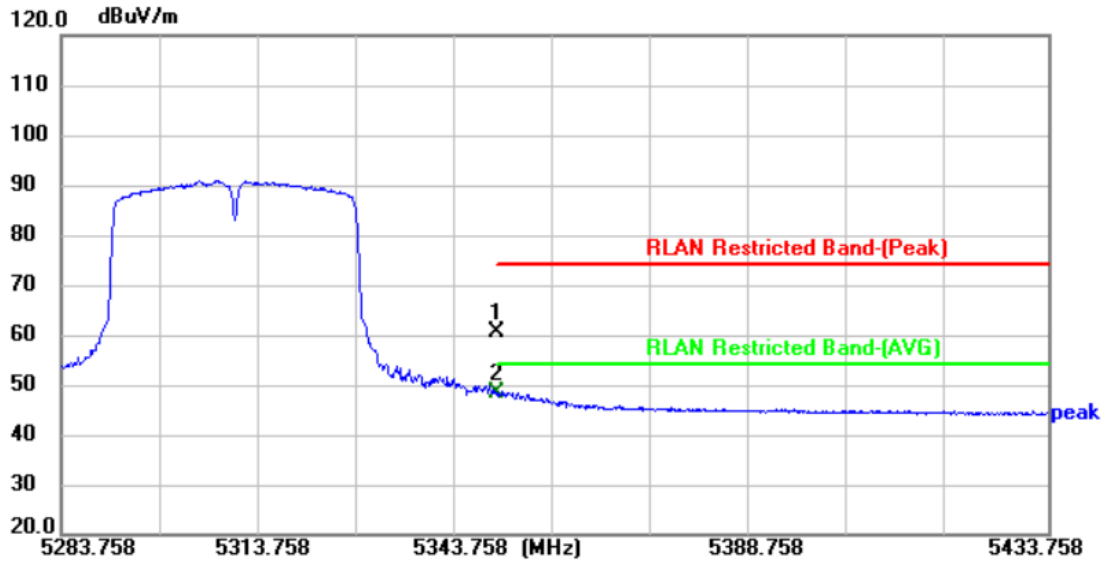


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 50.41          | 10.07         | 60.48          | 74.00          | -13.52      | peak     | P   |
| 2 * | 5350.000        | 38.32          | 10.07         | 48.39          | 54.00          | -5.61       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                           |                    |     |

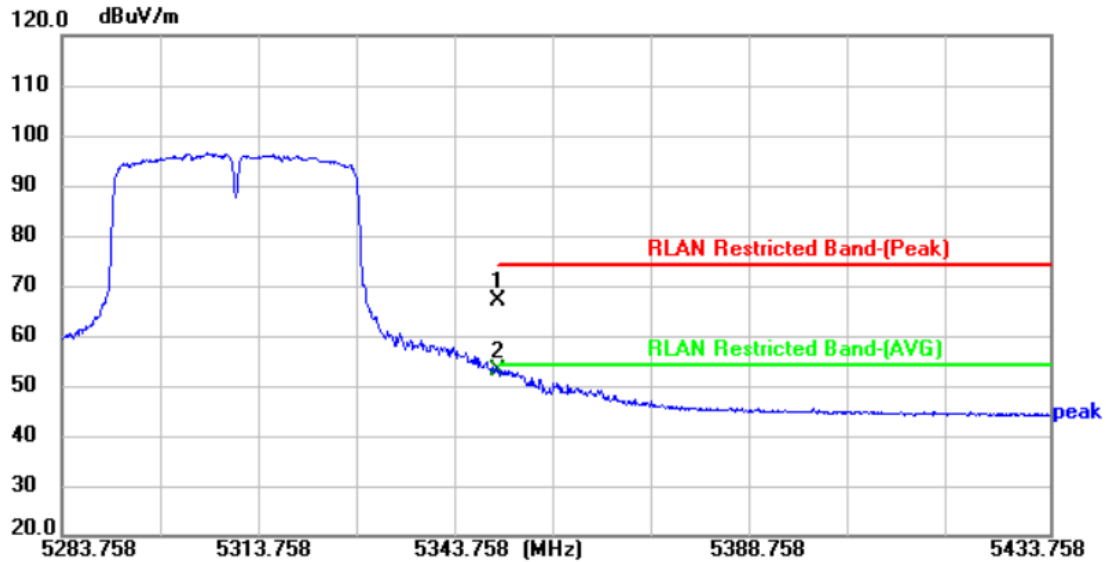

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 56.88          | 10.07         | 66.95          | 74.00          | -7.05       | peak     | P   |
| 2 * | 5350.000        | 42.79          | 10.07         | 52.86          | 54.00          | -1.14       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

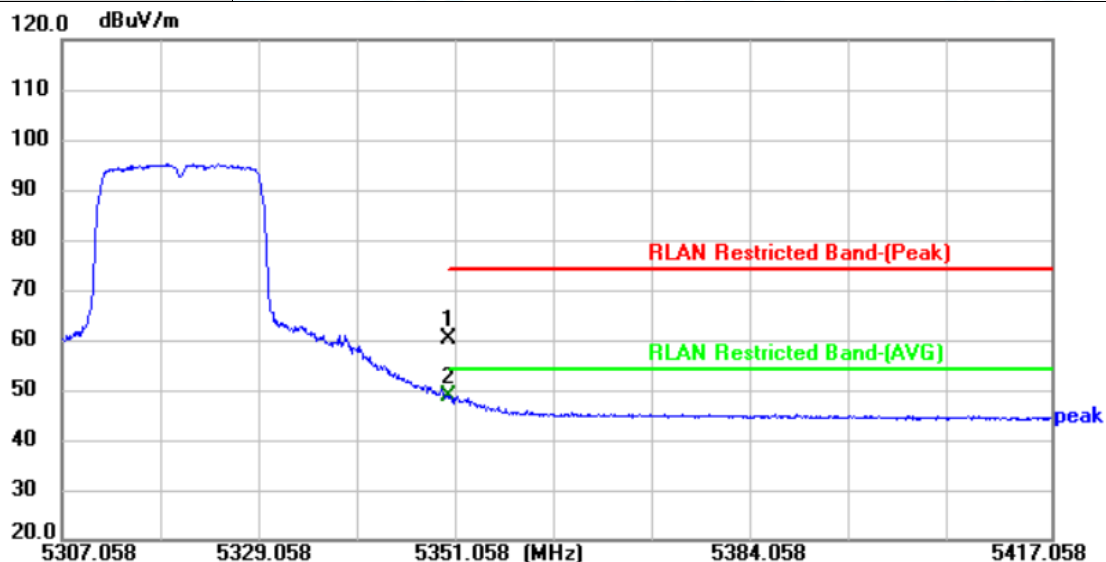


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 50.06          | 10.07         | 60.13          | 74.00          | -13.87      | peak     | P   |
| 2 * | 5350.000        | 38.60          | 10.07         | 48.67          | 54.00          | -5.33       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

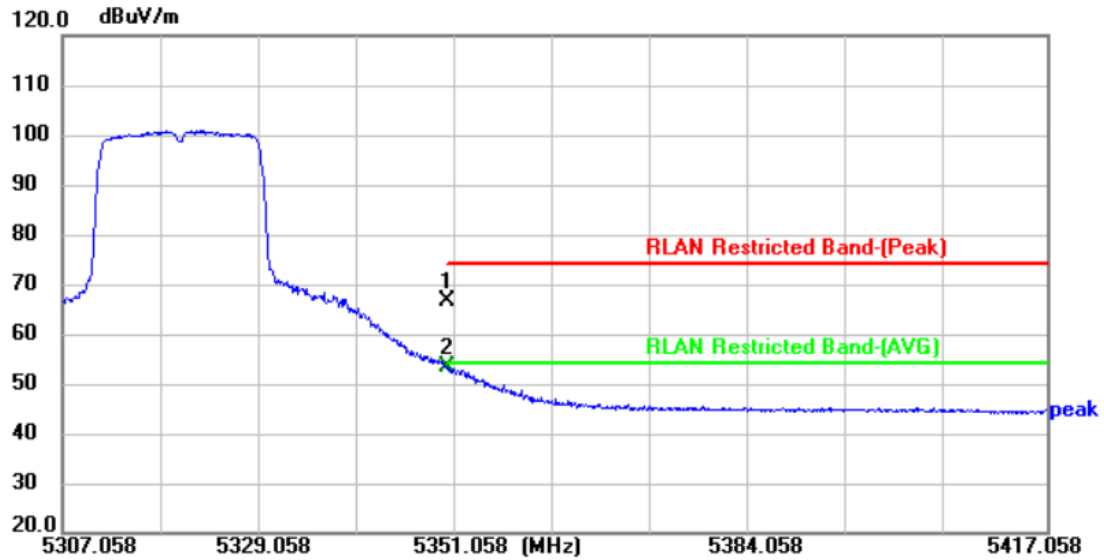

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 56.41          | 10.07         | 66.48          | 74.00          | -7.52       | peak     | P   |
| 2 * | 5350.000        | 43.30          | 10.07         | 53.37          | 54.00          | -0.63       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG(dBuV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

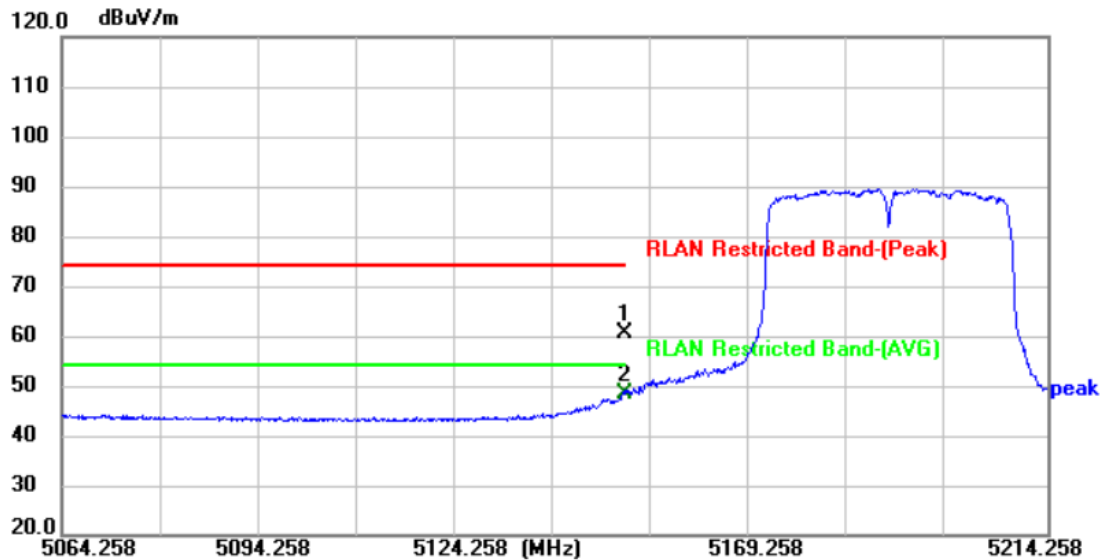


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 50.85          | 9.66          | 60.51          | 74.00          | -13.49      | peak     | P   |
| 2 * | 5150.000        | 38.82          | 9.66          | 48.48          | 54.00          | -5.52       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

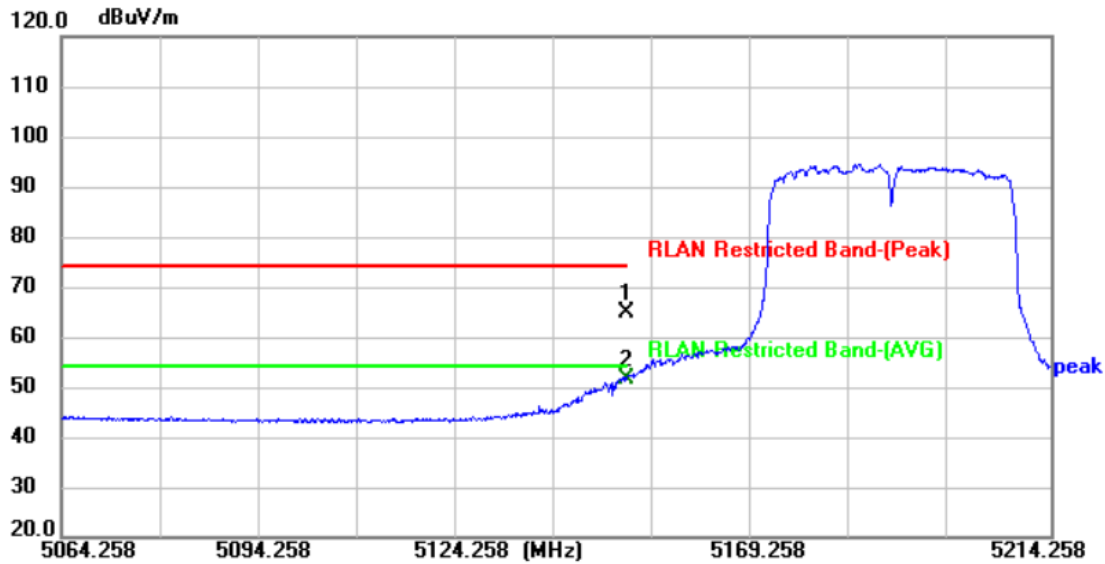

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 55.16          | 9.66          | 64.82          | 74.00          | -9.18       | peak     | P   |
| 2 * | 5150.000        | 41.82          | 9.66          | 51.48          | 54.00          | -2.52       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                             |                    |     |

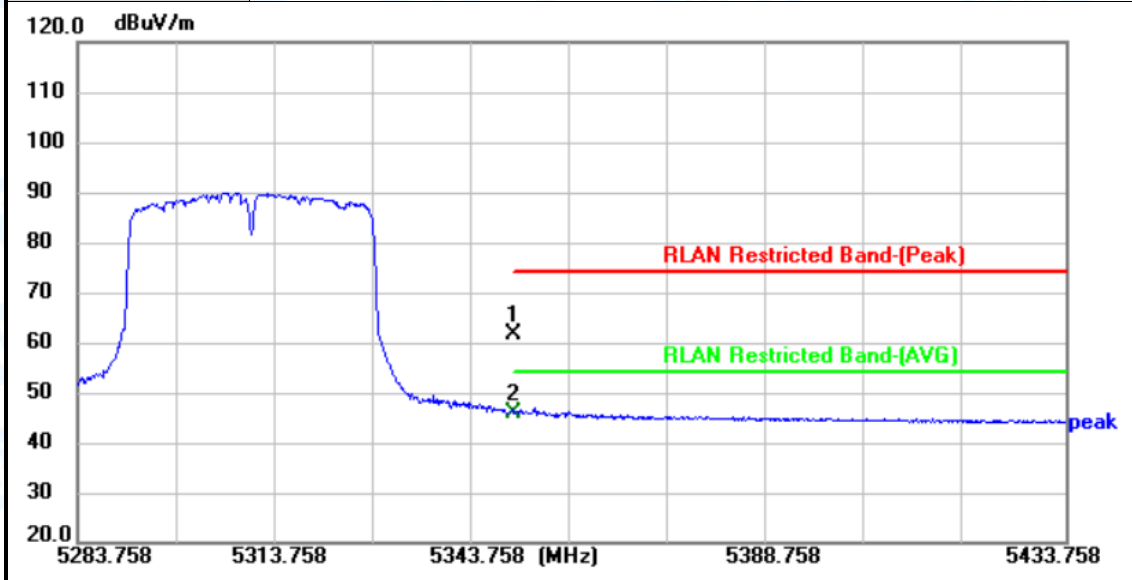


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 51.65          | 10.07         | 61.72          | 74.00          | -12.28      | peak     | P   |
| 2 * | 5350.000        | 35.78          | 10.07         | 45.85          | 54.00          | -8.15       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                             |                    |     |

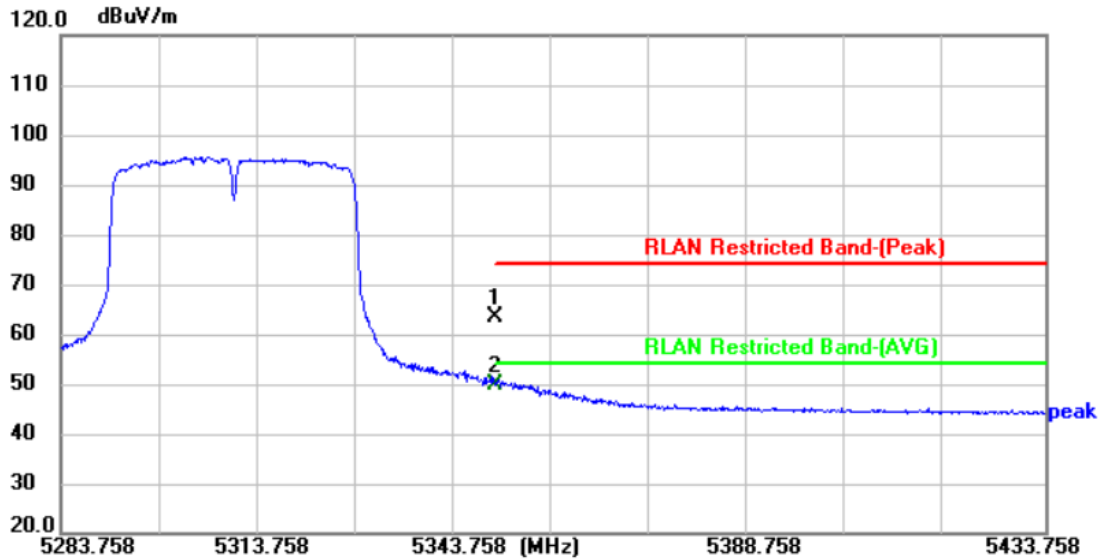

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 53.42          | 10.07         | 63.49          | 74.00          | -10.51      | peak     | P   |
| 2 * | 5350.000        | 39.58          | 10.07         | 49.65          | 54.00          | -4.35       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

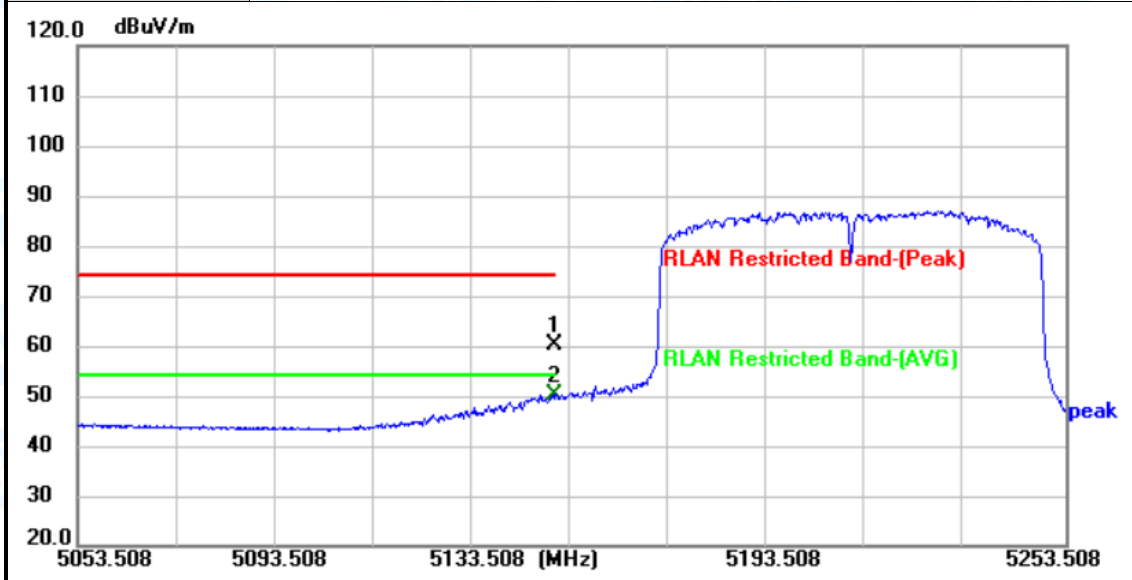


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 50.61          | 9.66          | 60.27          | 74.00          | -13.73      | peak     | P   |
| 2 * | 5150.000        | 40.50          | 9.66          | 50.16          | 54.00          | -3.84       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

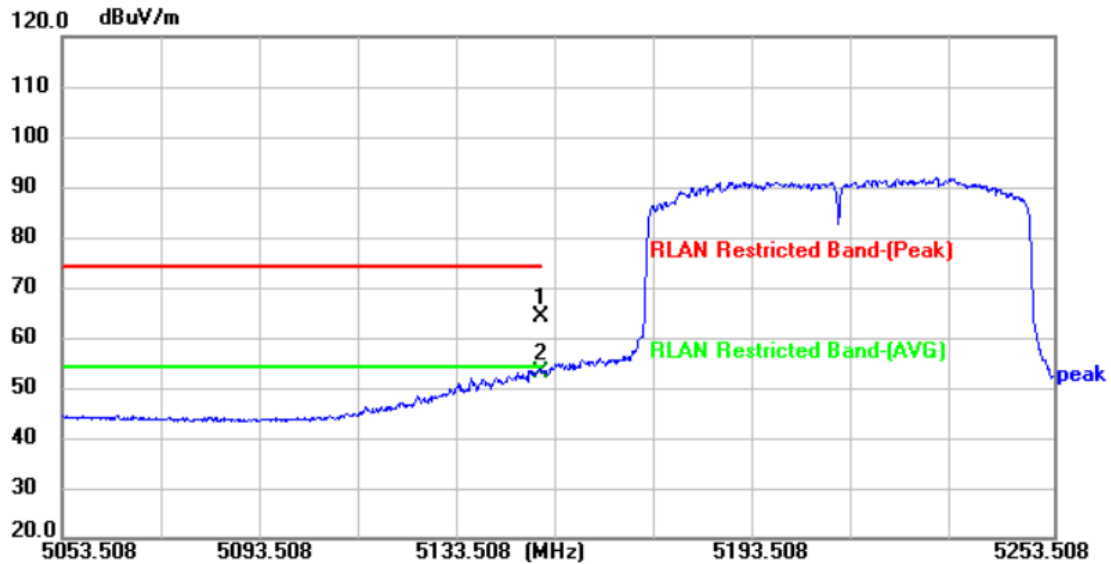

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 54.49          | 9.66          | 64.15          | 74.00          | -9.85       | peak     | P   |
| 2 * | 5150.000        | 43.42          | 9.66          | 53.08          | 54.00          | -0.92       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) |                    |     |
| Remark:       |                                             |                    |     |

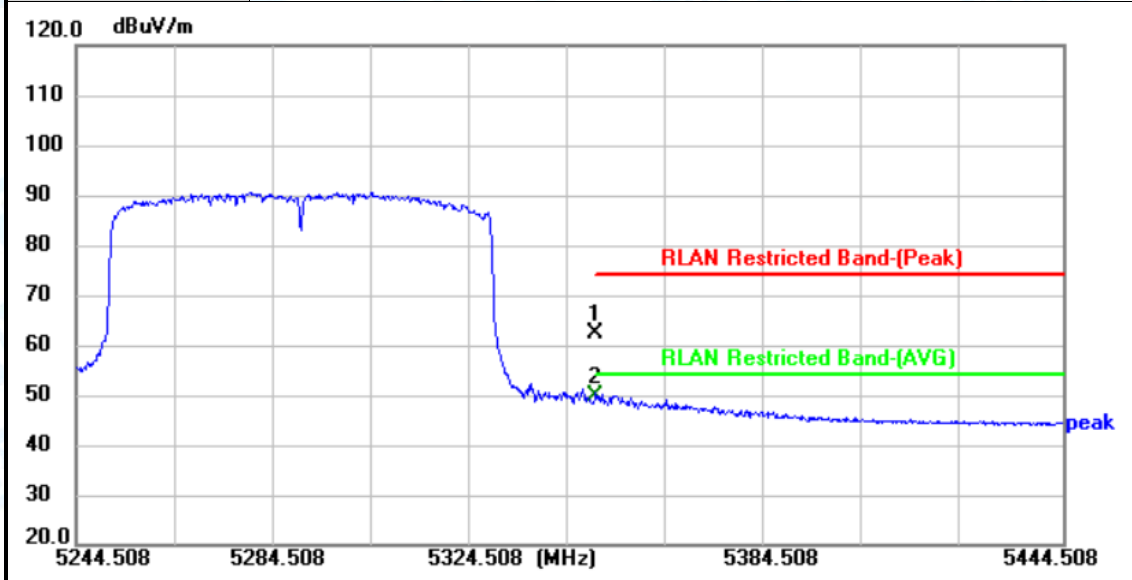


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 52.40          | 10.07         | 62.47          | 74.00          | -11.53      | peak     | P   |
| 2 * | 5350.000        | 39.68          | 10.07         | 49.75          | 54.00          | -4.25       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) |                    |     |
| Remark:       |                                             |                    |     |

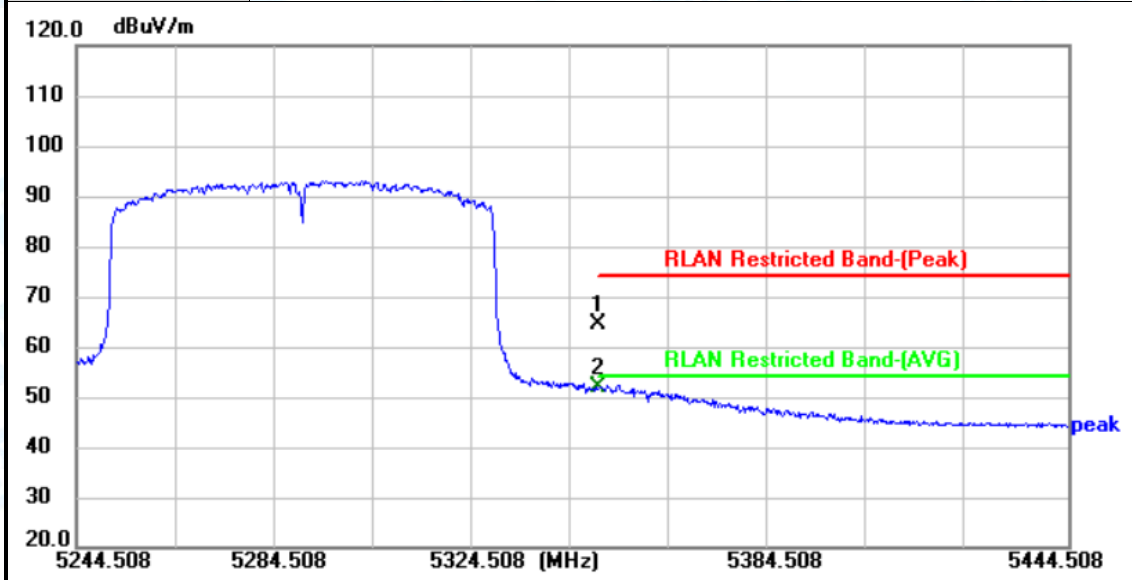

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 54.22          | 10.07         | 64.29          | 74.00          | -9.71       | peak     | P   |
| 2 * | 5350.000        | 42.03          | 10.07         | 52.10          | 54.00          | -1.90       | AVG      | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11a Mode 5500 MHz Ant.1-SISO (U-NII-2C) |                    |     |
| Remark:       |                                                |                    |     |

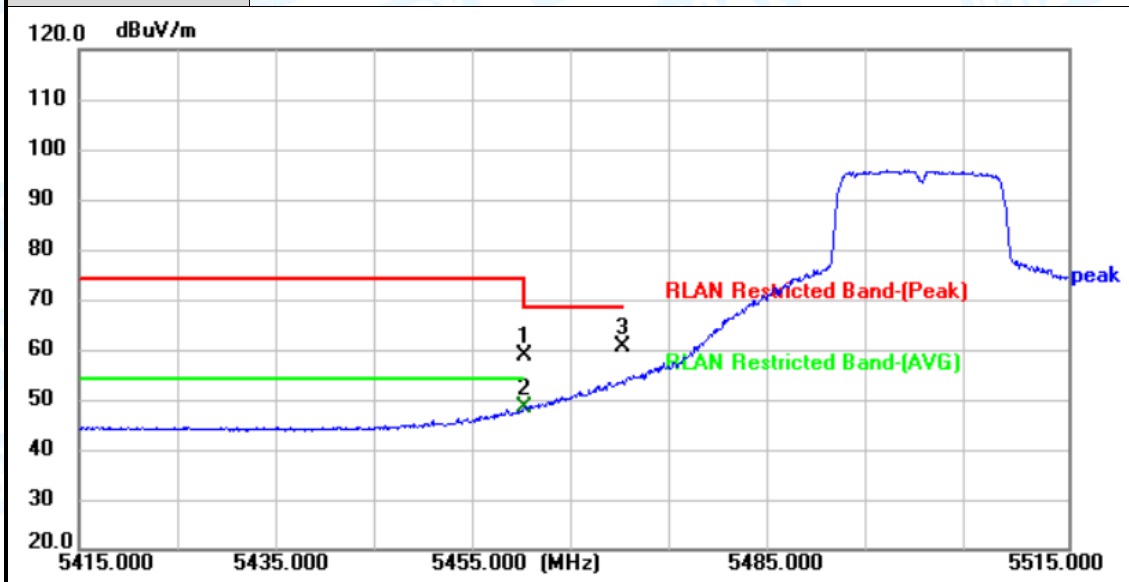


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 48.52          | 10.12         | 58.64          | 68.30          | -9.66       | peak     | P   |
| 2 * | 5460.000        | 38.15          | 10.12         | 48.27          | 54.00          | -5.73       | AVG      | P   |
| 3   | 5470.000        | 50.42          | 10.07         | 60.49          | 68.30          | -7.81       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11a Mode 5500 MHz Ant.1-SISO (U-NII-2C) |                    |     |
| Remark:       |                                                |                    |     |

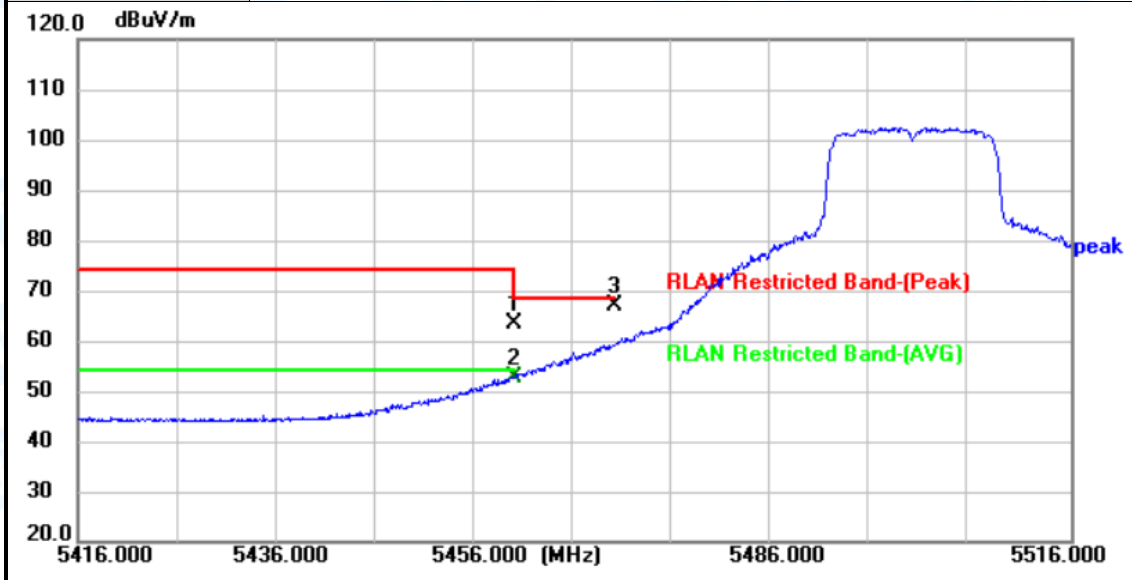

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 53.37          | 10.12         | 63.49          | 68.30          | -4.81       | peak     | P   |
| 2 * | 5460.000        | 42.54          | 10.12         | 52.66          | 54.00          | -1.34       | AVG      | P   |
| 3   | 5470.000        | 56.82          | 10.07         | 66.89          | 68.30          | -1.41       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11a Mode 5500 MHz Ant.2-SISO (U-NII-2C) |                    |     |
| Remark:       |                                                |                    |     |

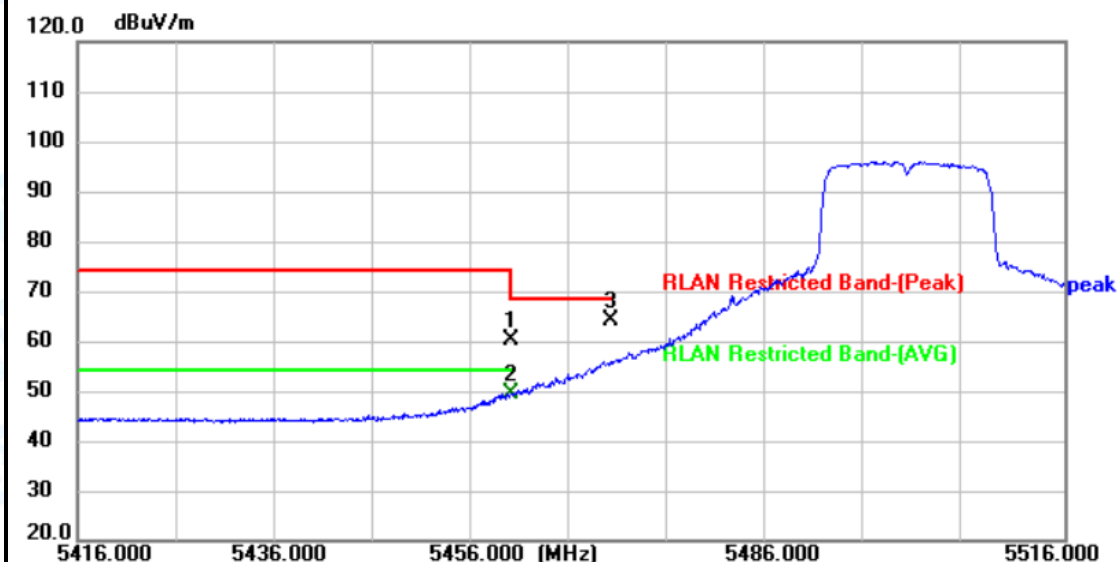


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 50.06          | 10.12         | 60.18          | 68.30          | -8.12       | peak     | P   |
| 2   | 5460.000        | 39.39          | 10.12         | 49.51          | 54.00          | -4.49       | AVG      | P   |
| 3 * | 5470.000        | 54.18          | 10.07         | 64.25          | 68.30          | -4.05       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                         | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                         |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11a Mode 5500 MHz Ant.2-SISO (U-NII-2C) |                    |     |
| Remark:       |                                                |                    |     |

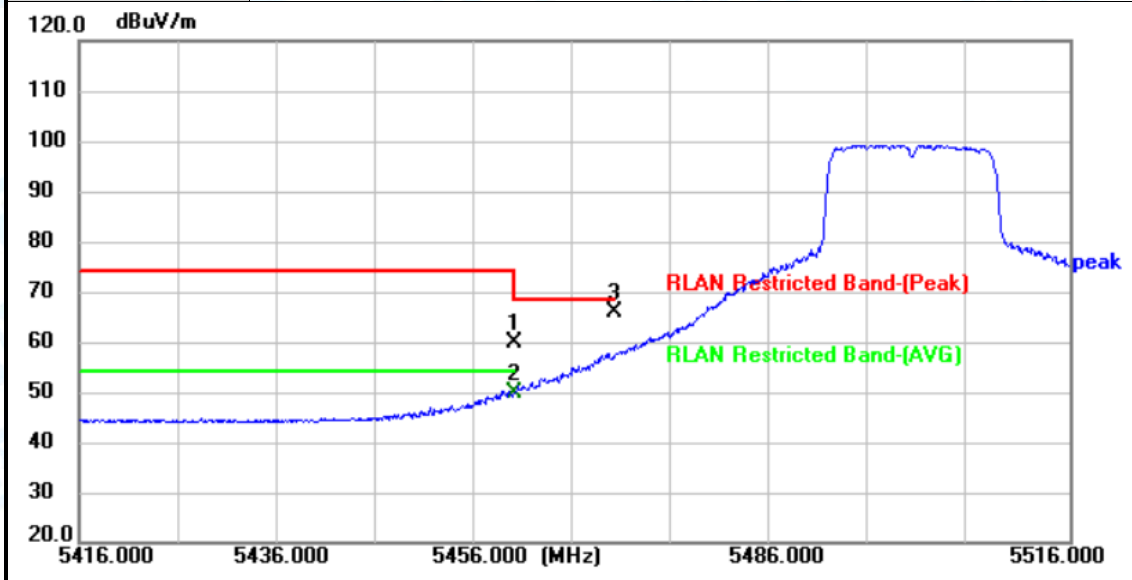

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 49.72          | 10.12         | 59.84          | 68.30          | -8.46       | peak     | P   |
| 2   | 5460.000        | 39.72          | 10.12         | 49.84          | 54.00          | -4.16       | AVG      | P   |
| 3 * | 5470.000        | 55.71          | 10.07         | 65.78          | 68.30          | -2.52       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

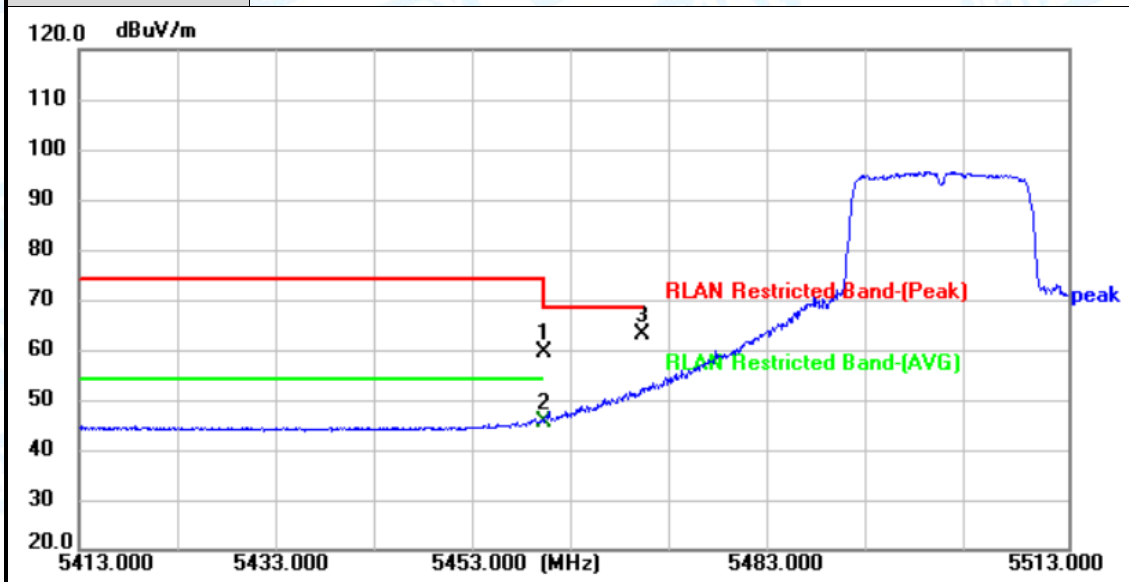


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 49.46          | 10.12         | 59.58          | 68.30          | -8.72       | peak     | P   |
| 2   | 5460.000        | 35.44          | 10.12         | 45.56          | 54.00          | -8.44       | AVG      | P   |
| 3 * | 5470.000        | 52.82          | 10.07         | 62.89          | 68.30          | -5.41       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

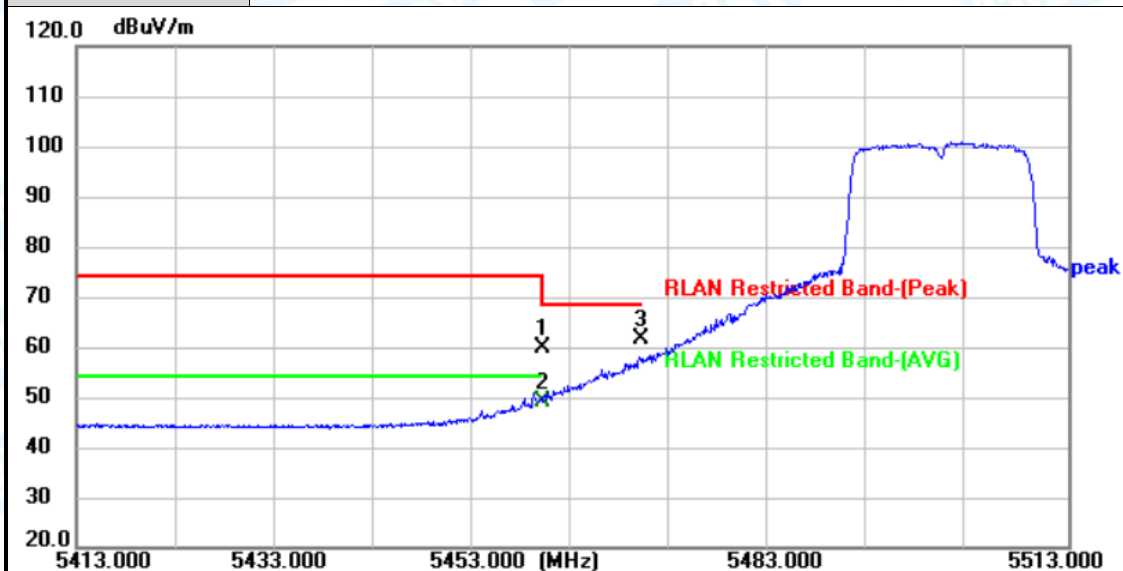

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 49.62          | 10.12         | 59.74          | 68.30          | -8.56       | peak     | P   |
| 2 * | 5460.000        | 38.89          | 10.12         | 49.01          | 54.00          | -4.99       | AVG      | P   |
| 3   | 5470.000        | 51.50          | 10.07         | 61.57          | 68.30          | -6.73       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

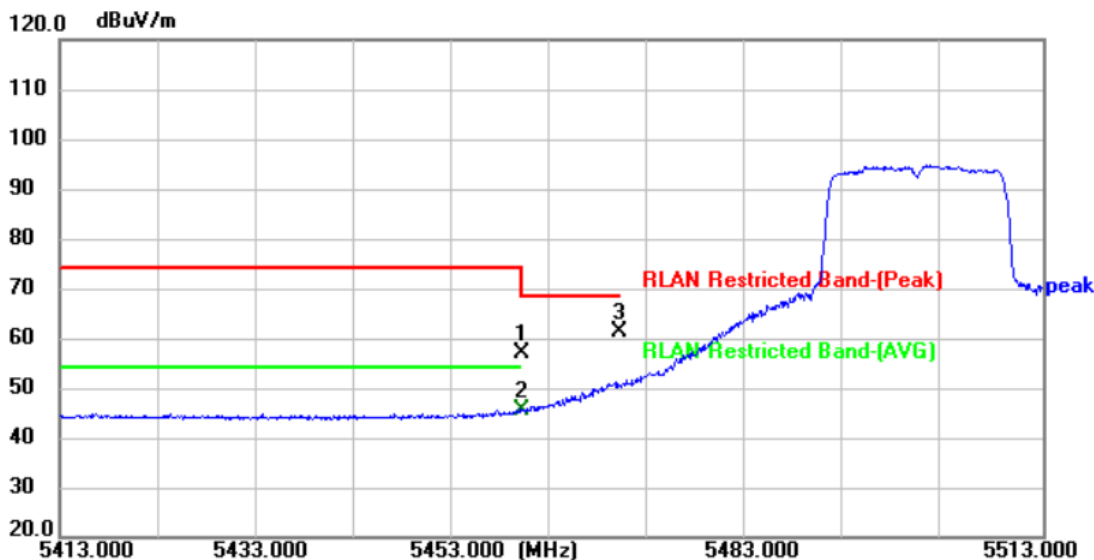


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 46.98          | 10.12         | 57.10          | 68.30          | -11.20      | peak     | P   |
| 2   | 5460.000        | 35.43          | 10.12         | 45.55          | 54.00          | -8.45       | AVG      | P   |
| 3 * | 5470.000        | 51.01          | 10.07         | 61.08          | 68.30          | -7.22       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

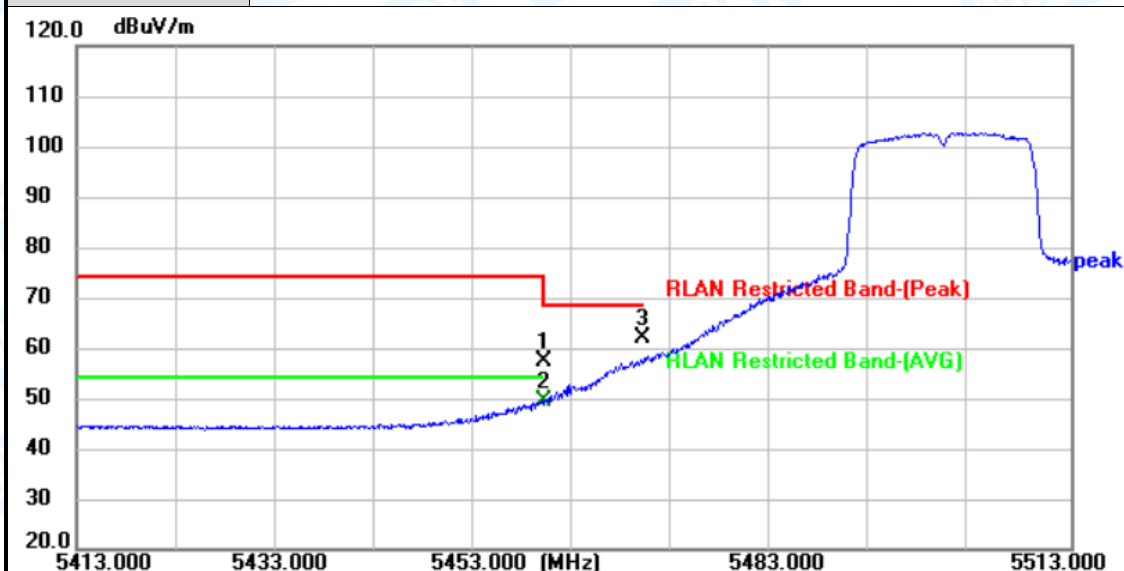

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 47.37          | 10.12         | 57.49          | 68.30          | -10.81      | peak     | P   |
| 2 * | 5460.000        | 39.26          | 10.12         | 49.38          | 54.00          | -4.62       | AVG      | P   |
| 3   | 5470.000        | 51.91          | 10.07         | 61.98          | 68.30          | -6.32       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

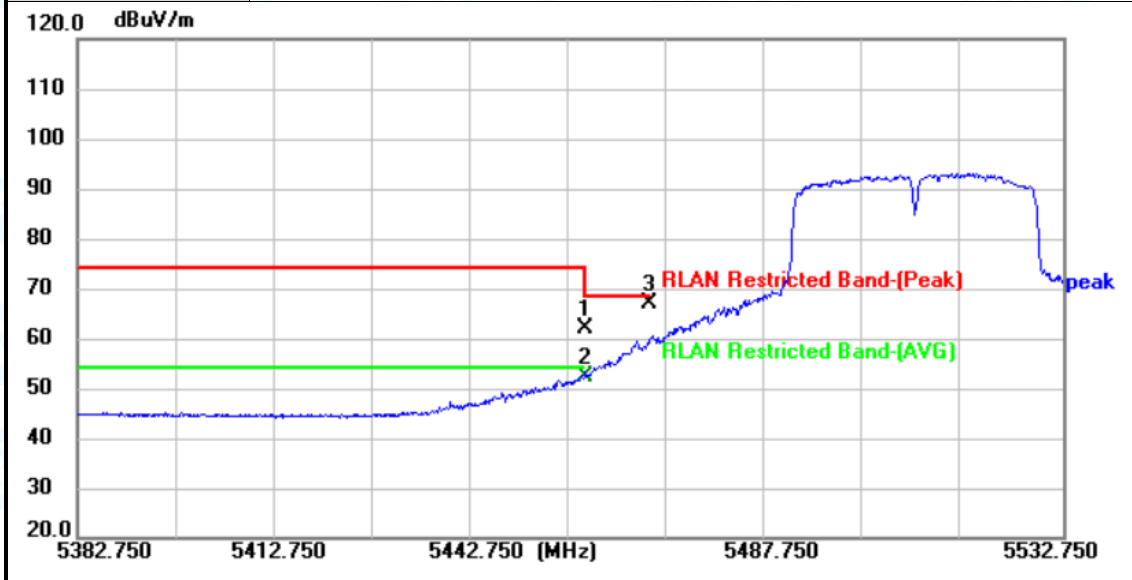


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 51.98          | 10.12         | 62.10          | 68.30          | -6.20       | peak     | P   |
| 2   | 5460.000        | 42.22          | 10.12         | 52.34          | 54.00          | -1.66       | AVG      | P   |
| 3 * | 5470.000        | 56.97          | 10.07         | 67.04          | 68.30          | -1.26       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                    |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

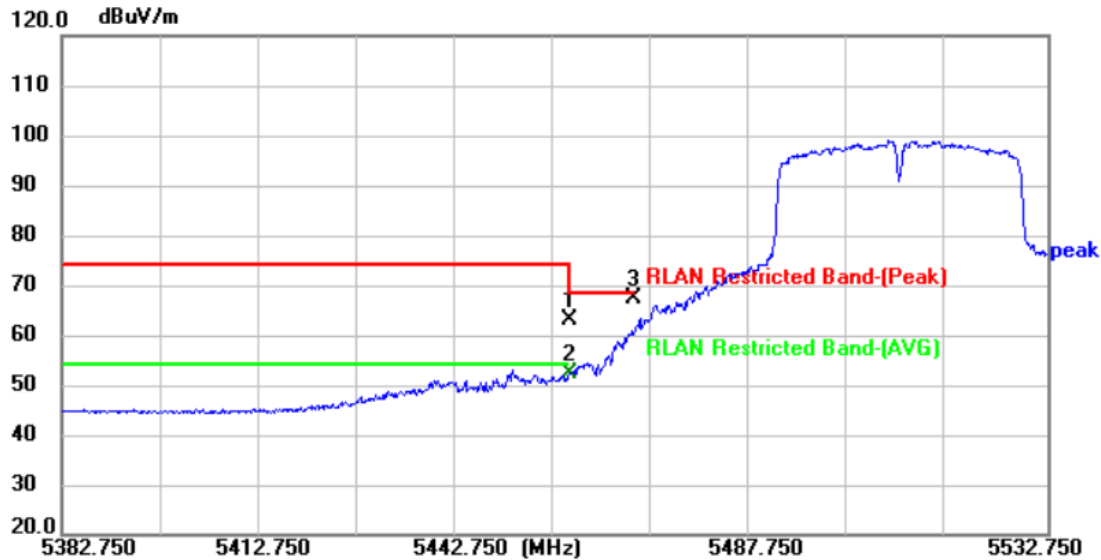

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 52.77          | 10.12         | 62.89          | 68.30          | -5.41       | peak     | P   |
| 2   | 5460.000        | 42.33          | 10.12         | 52.45          | 54.00          | -1.55       | AVG      | P   |
| 3 * | 5470.000        | 57.42          | 10.07         | 67.49          | 68.30          | -0.81       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

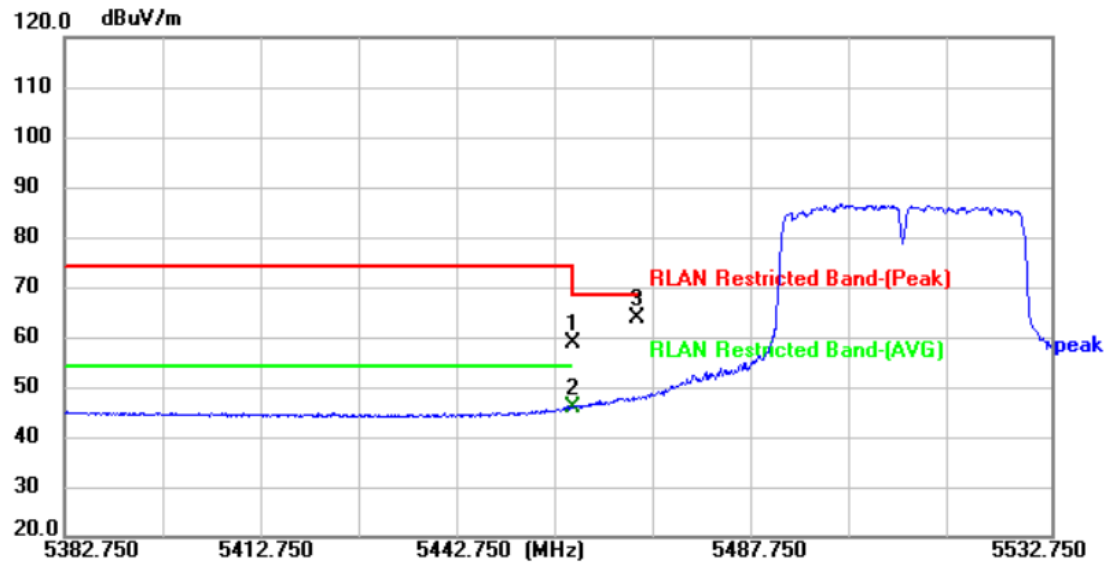


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 48.47          | 10.12         | 58.59          | 68.30          | -9.71       | peak     | P   |
| 2   | 5460.000        | 35.62          | 10.12         | 45.74          | 54.00          | -8.26       | AVG      | P   |
| 3 * | 5470.000        | 53.51          | 10.07         | 63.58          | 68.30          | -4.72       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

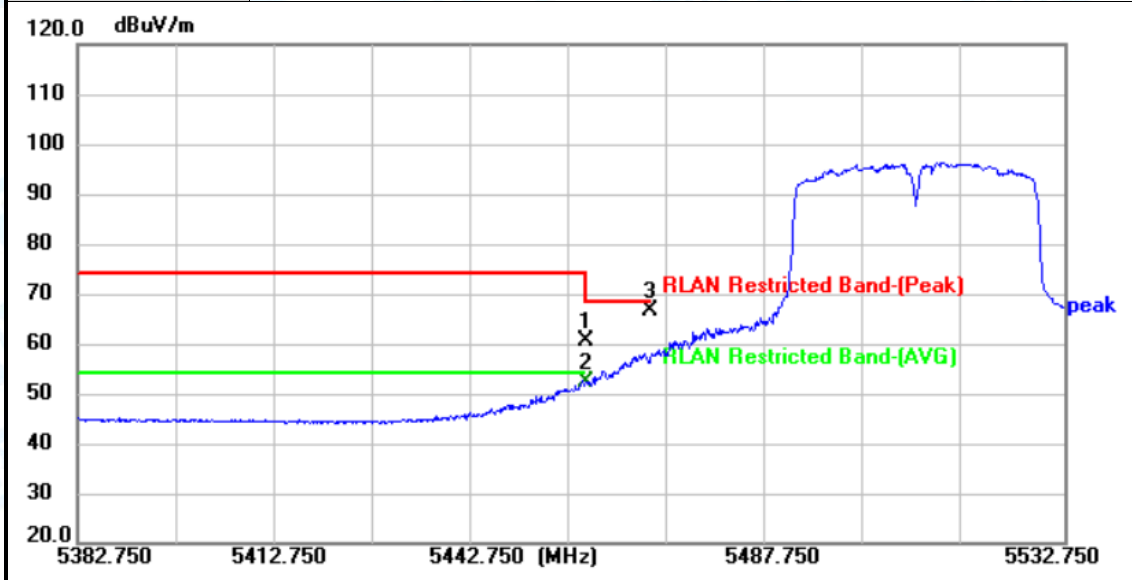

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 50.36          | 10.12         | 60.48          | 68.30          | -7.82       | peak     | P   |
| 2 * | 5460.000        | 42.30          | 10.12         | 52.42          | 54.00          | -1.58       | AVG      | P   |
| 3   | 5470.000        | 56.38          | 10.07         | 66.45          | 68.30          | -1.85       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

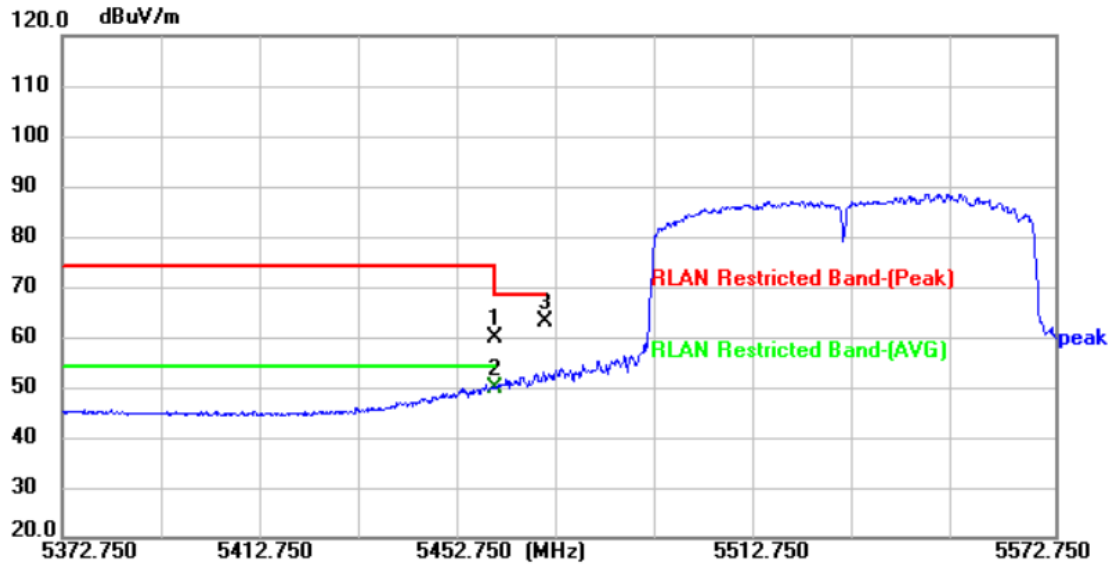


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 49.63          | 10.12         | 59.75          | 68.30          | -8.55       | peak     | P   |
| 2 * | 5460.000        | 39.82          | 10.12         | 49.94          | 54.00          | -4.06       | AVG      | P   |
| 3   | 5470.000        | 53.04          | 10.07         | 63.11          | 68.30          | -5.19       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

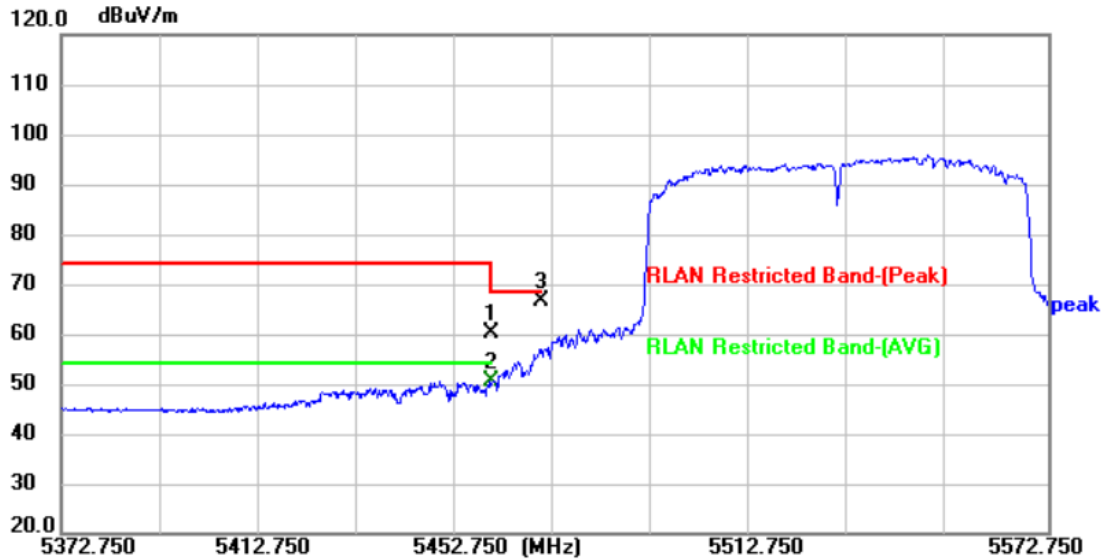

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 50.06          | 10.12         | 60.18          | 68.30          | -8.12       | peak     | P   |
| 2   | 5460.000        | 40.45          | 10.12         | 50.57          | 54.00          | -3.43       | AVG      | P   |
| 3 * | 5470.000        | 56.41          | 10.07         | 66.48          | 68.30          | -1.82       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

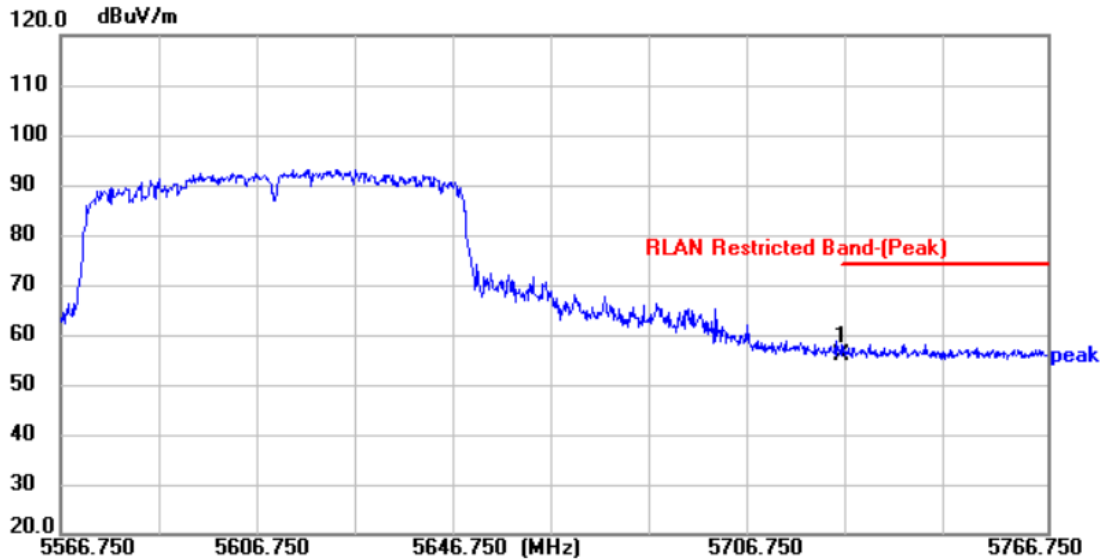


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 44.14          | 11.59         | 55.73          | 74.00          | -18.27      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                      |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

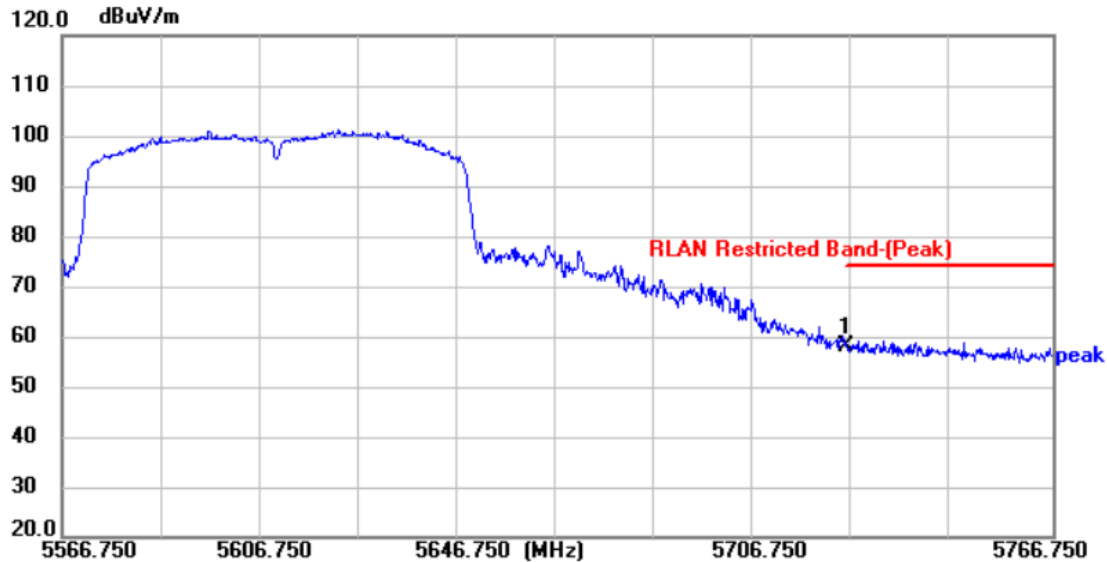

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 46.41          | 11.59         | 58.00          | 74.00          | -16.00      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)





|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz Ant.1-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

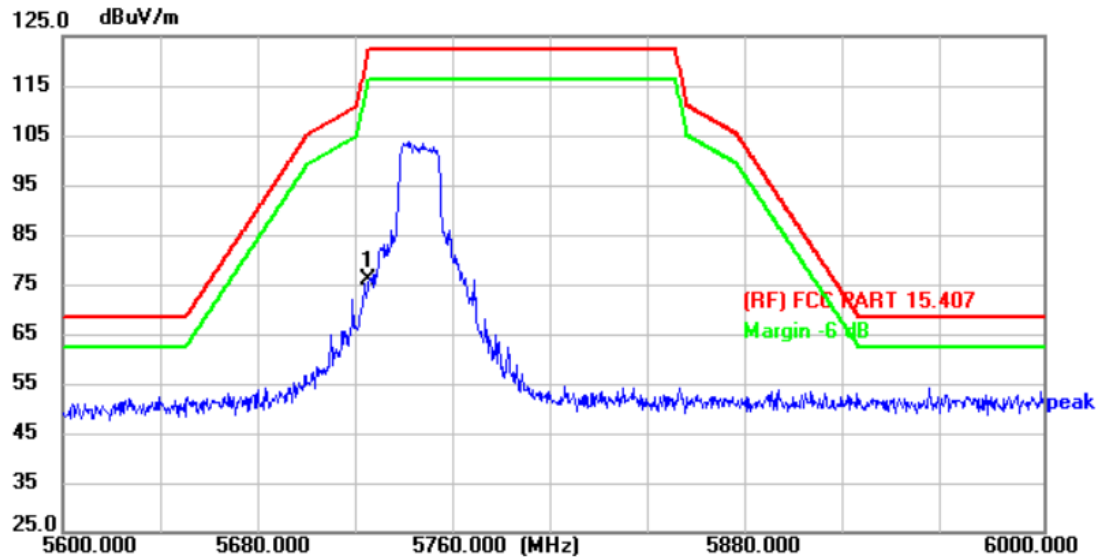


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 64.22          | 11.59         | 75.81          | 122.30         | -46.49      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz Ant.1-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

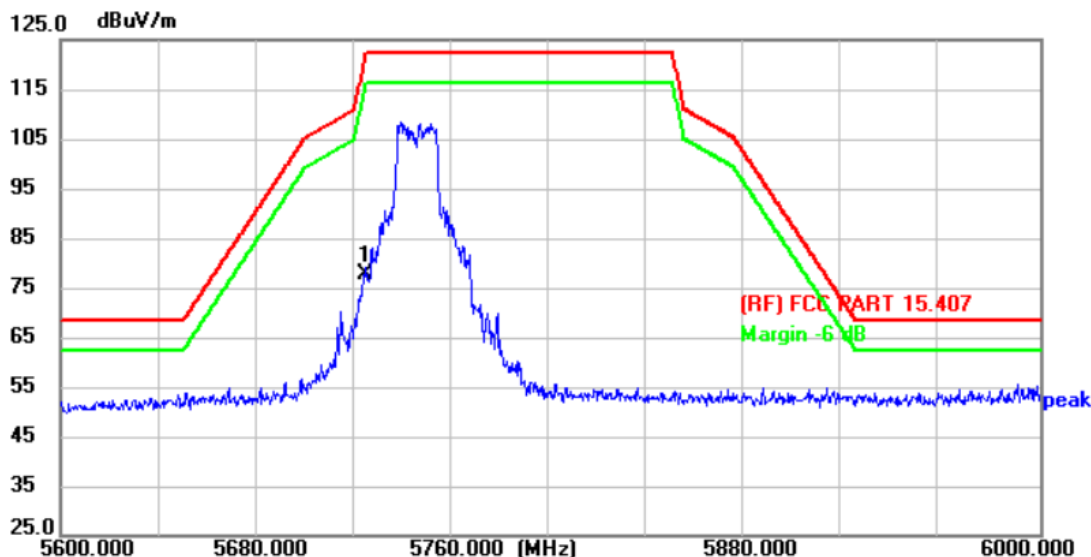

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 65.92          | 11.59         | 77.51          | 122.30         | -44.79      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz Ant.1-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

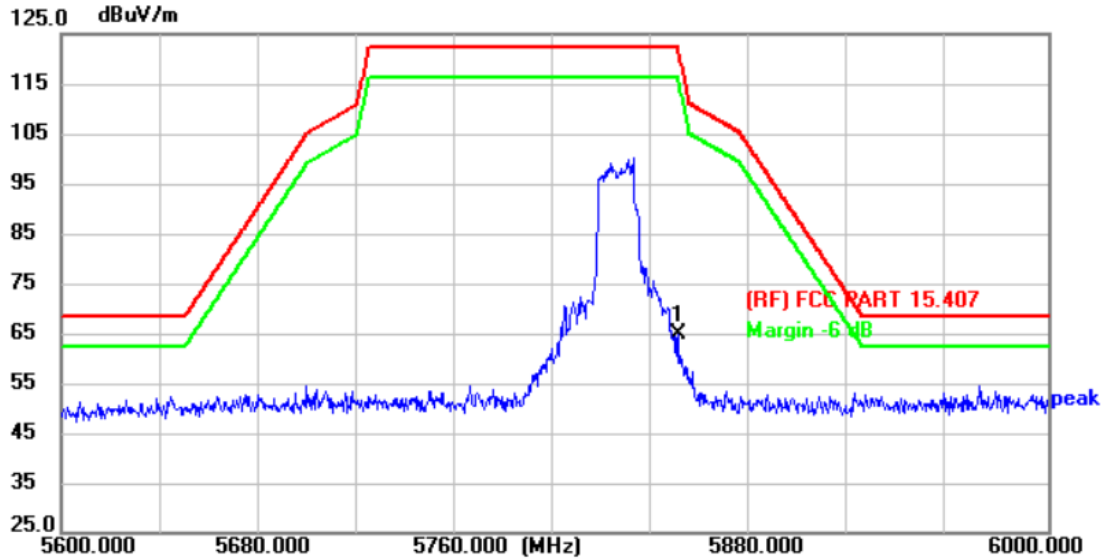


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 53.02          | 11.90         | 64.92          | 122.30         | -57.38      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz Ant.1-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

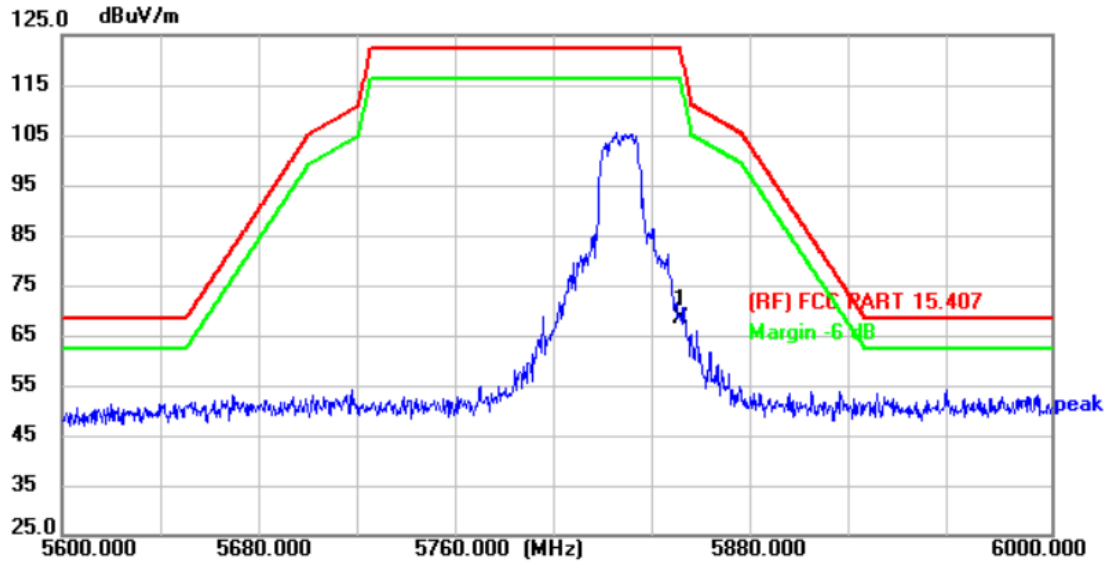

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 56.40          | 11.90         | 68.30          | 122.30         | -54.00      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz Ant.2-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

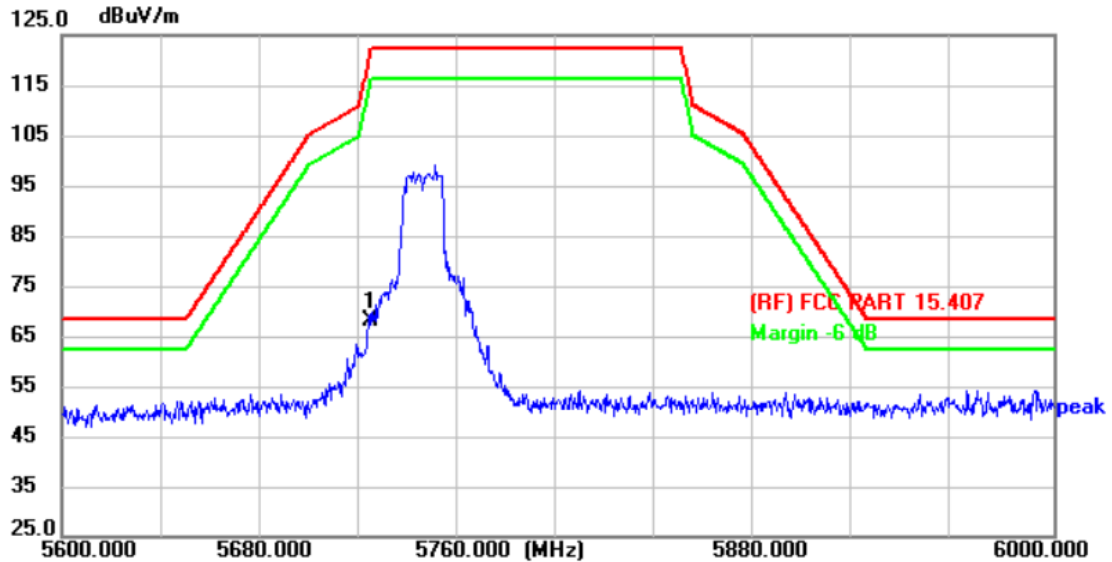


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 56.34          | 11.59         | 67.93          | 122.30         | -54.37      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz Ant.2-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

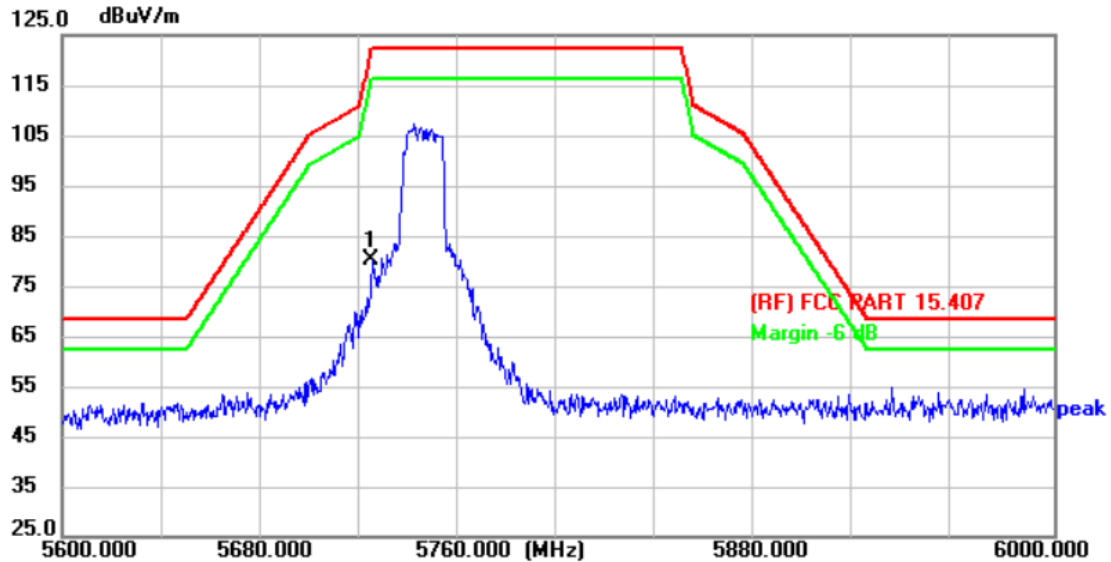

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 68.60          | 11.59         | 80.19          | 122.30         | -42.11      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz Ant.2-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

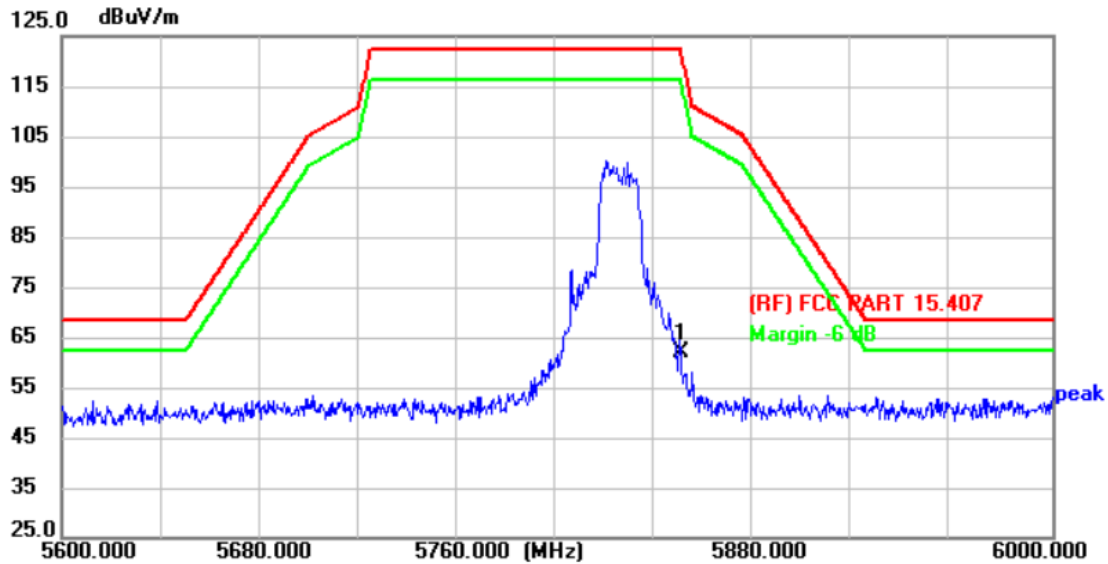


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 50.09          | 11.90         | 61.99          | 122.30         | -60.31      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                        | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                        |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz Ant.2-SISO (U-NII-3) |                    |     |
| Remark:       |                                               |                    |     |

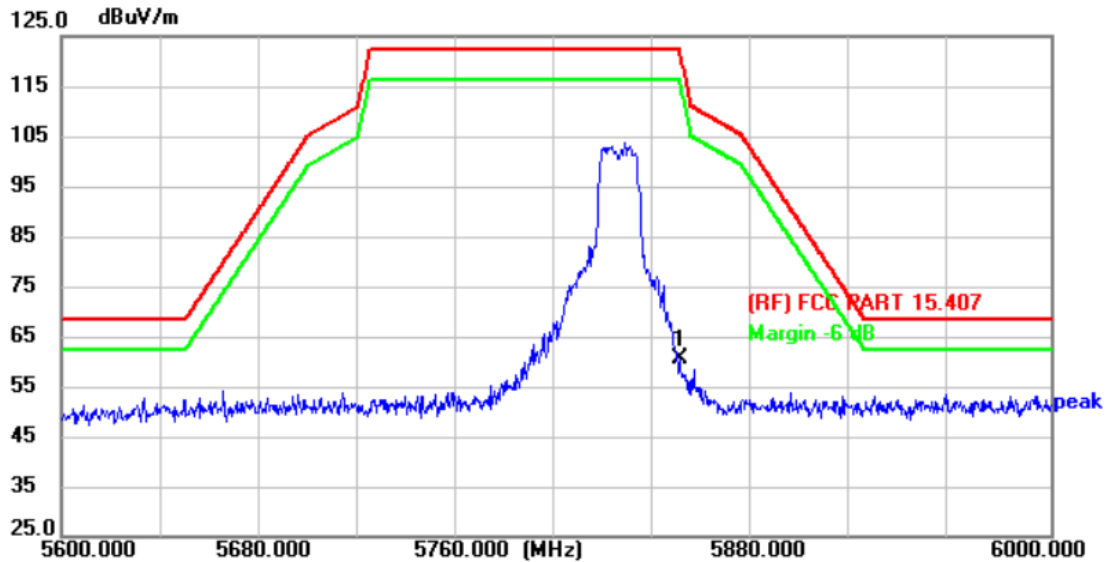


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

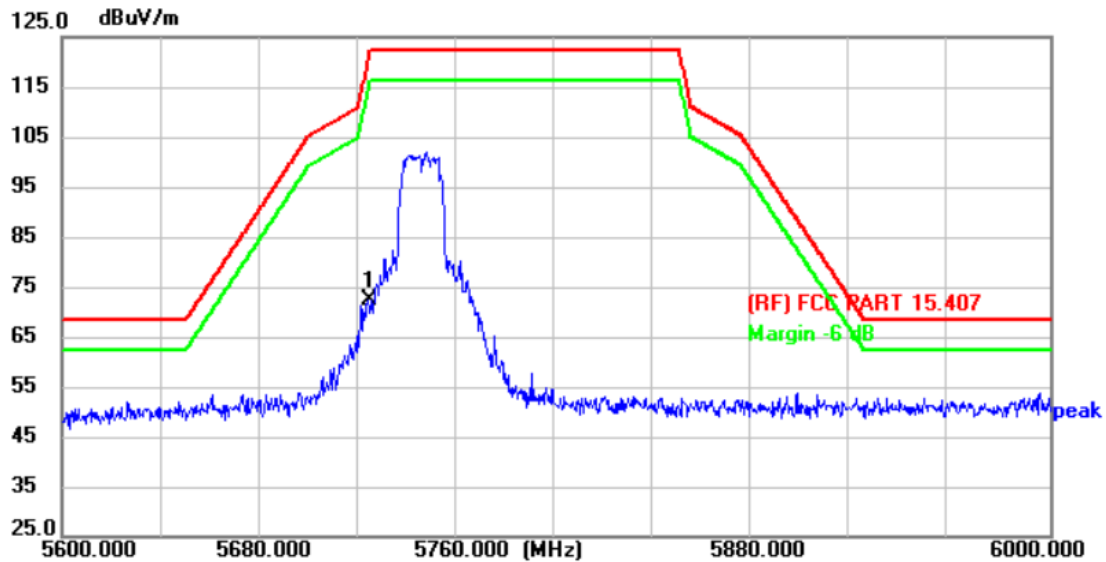


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 60.80          | 11.59         | 72.39          | 122.30         | -49.91      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

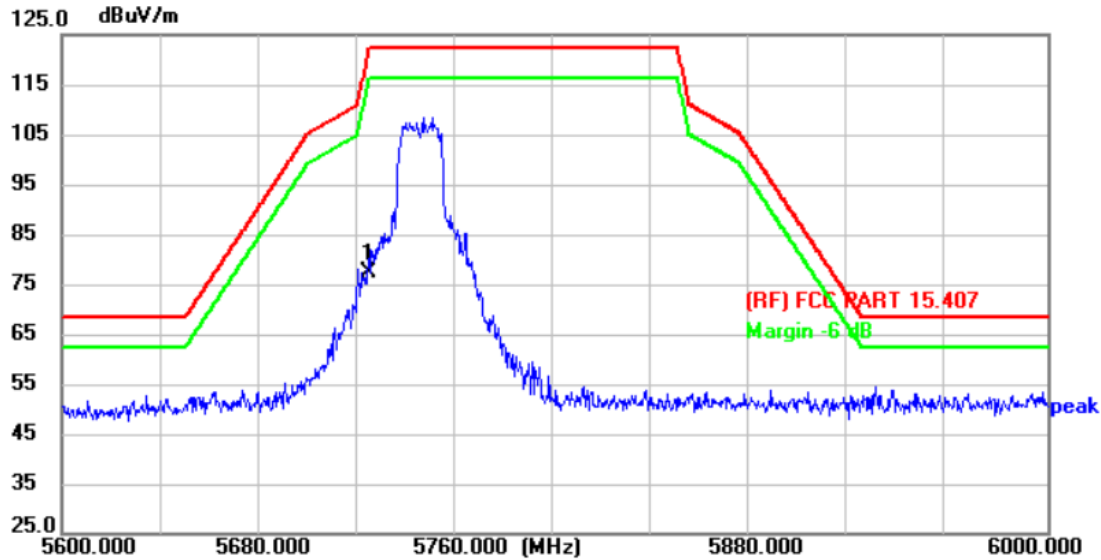

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 65.73          | 11.59         | 77.32          | 122.30         | -44.98      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

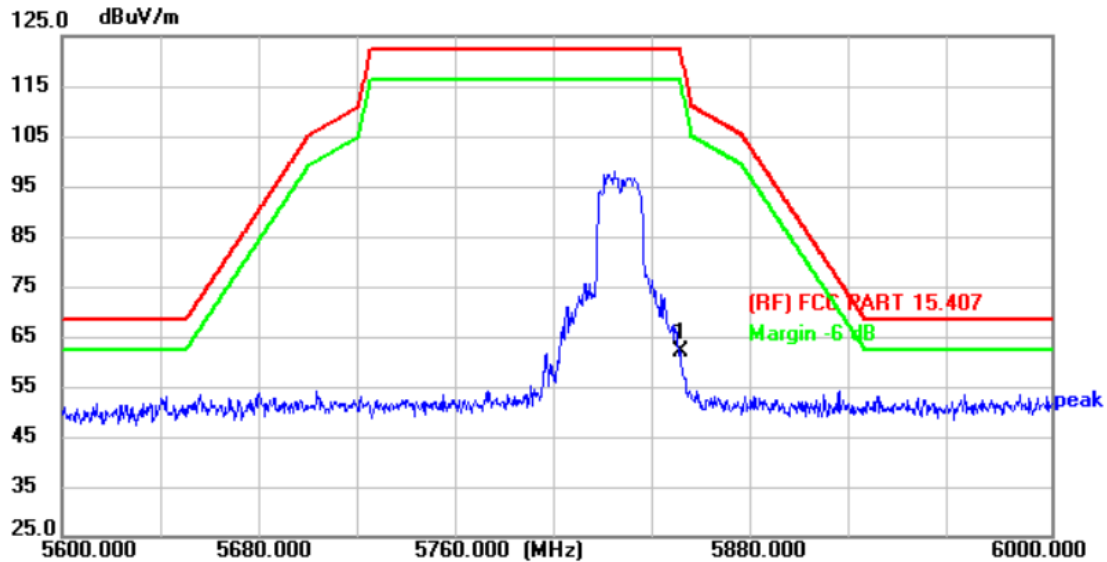


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 50.20          | 11.90         | 62.10          | 122.30         | -60.20      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

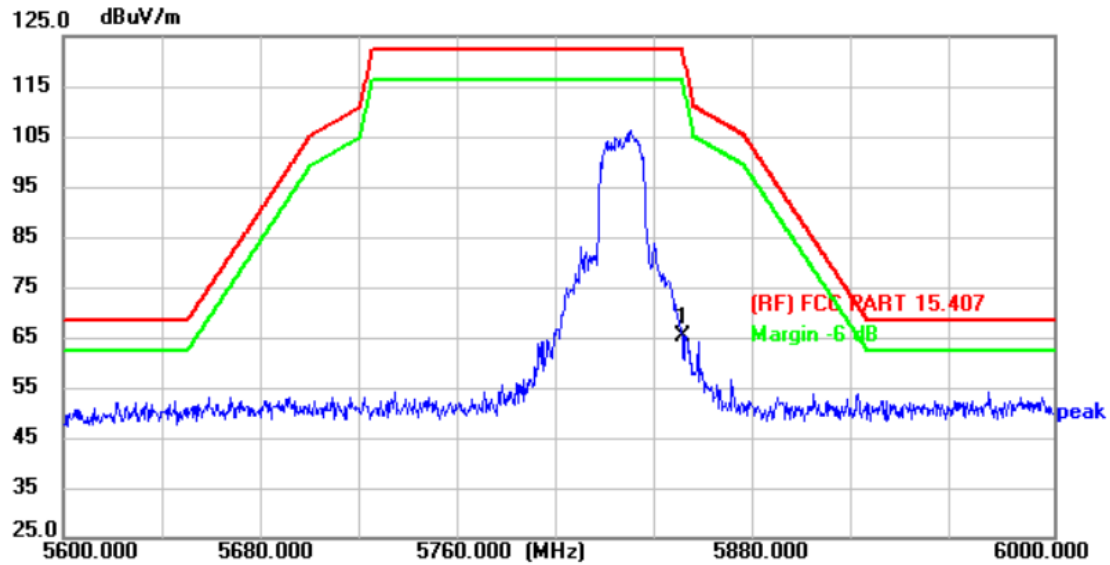

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 53.30          | 11.90         | 65.20          | 122.30         | -57.10      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

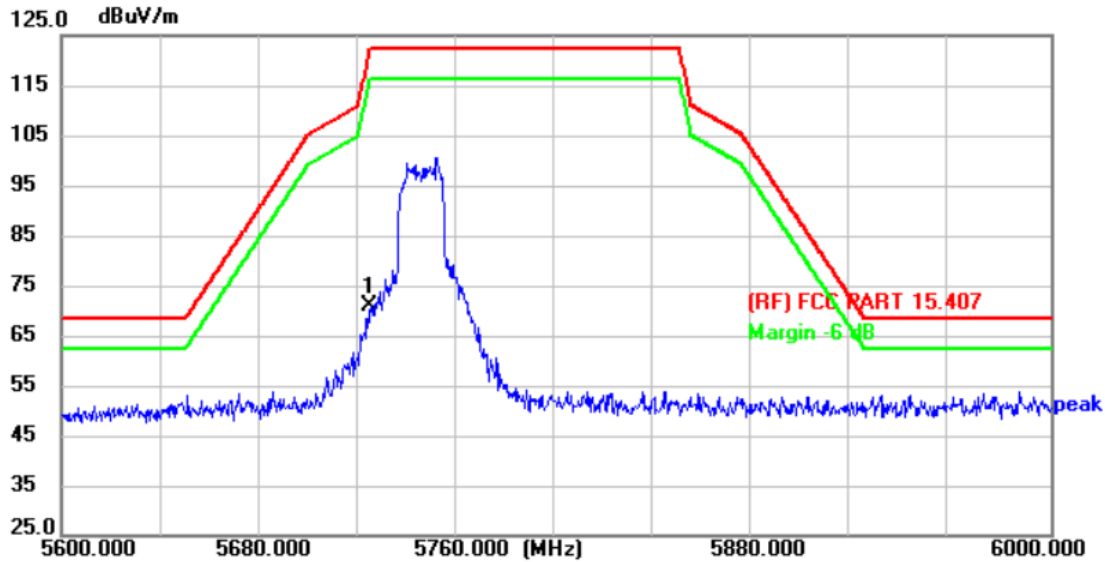


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 59.33          | 11.59         | 70.92          | 122.30         | -51.38      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

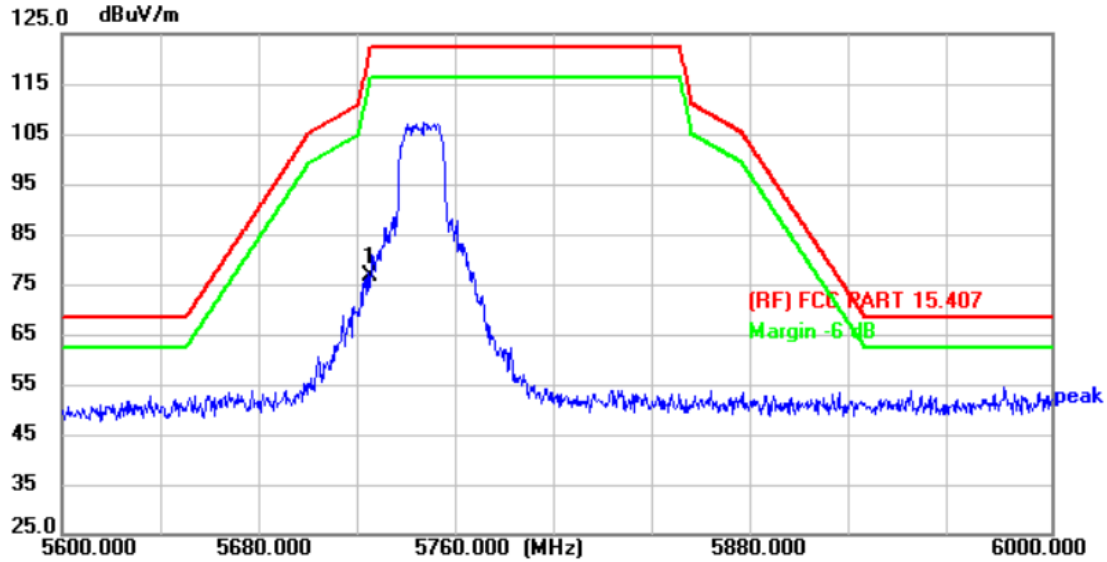

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 64.99          | 11.59         | 76.58          | 122.30         | -45.72      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

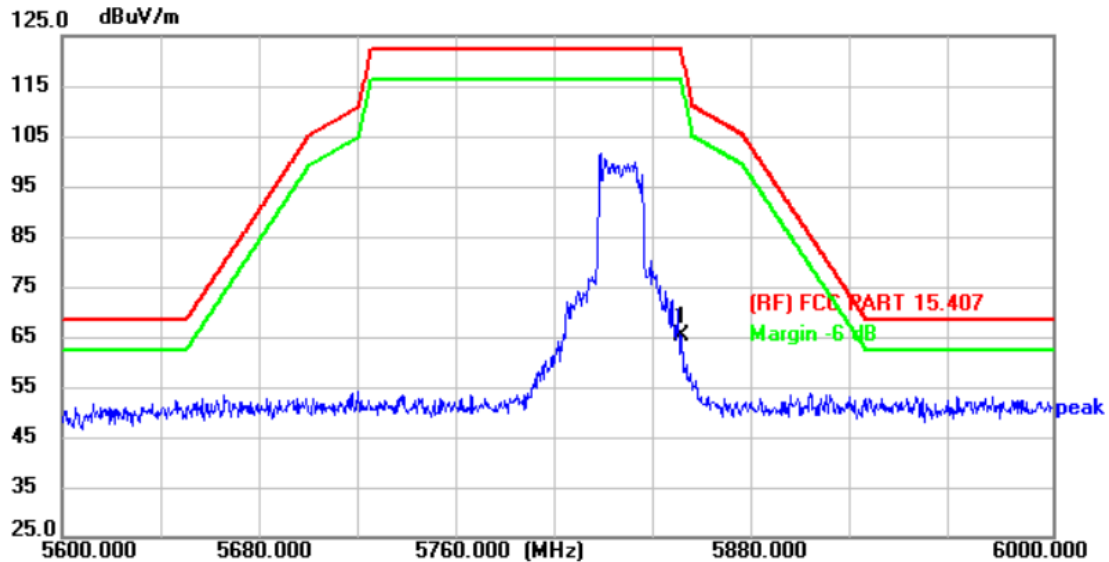


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 53.24          | 11.90         | 65.14          | 122.30         | -57.16      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

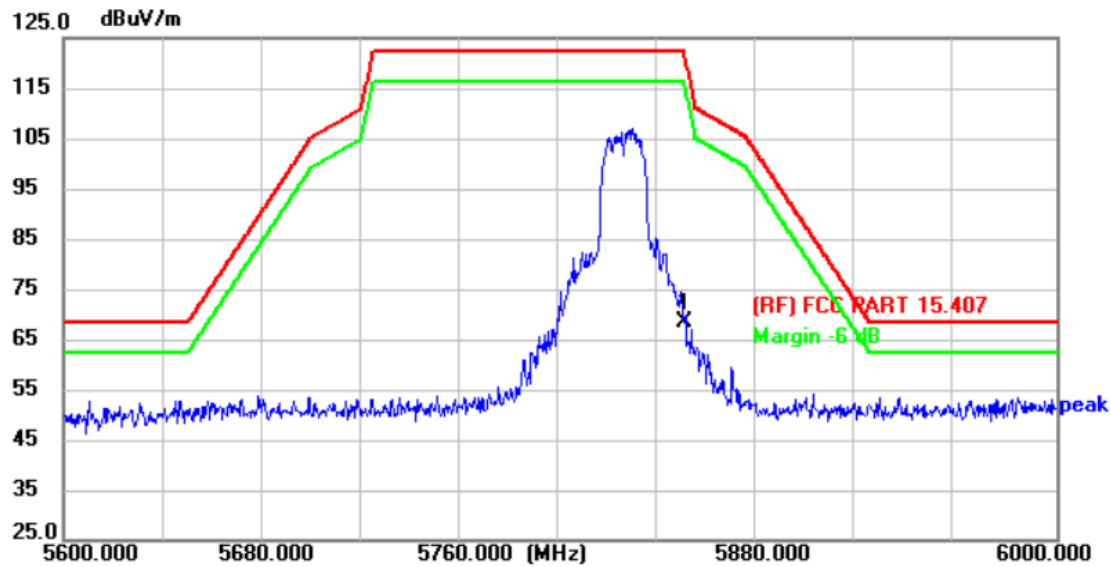

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 56.60          | 11.90         | 68.50          | 122.30         | -53.80      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

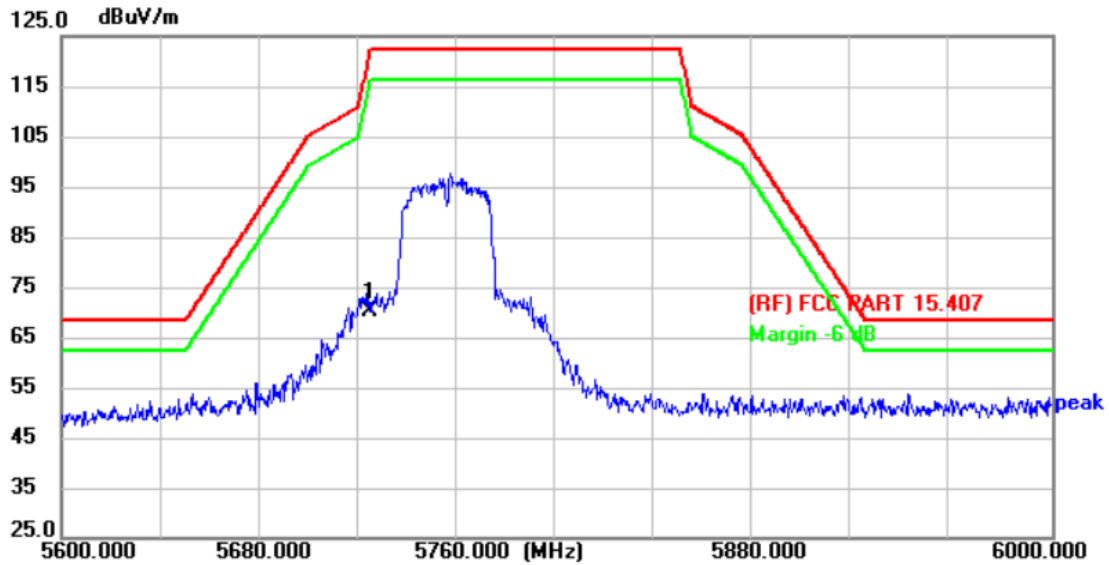


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 58.75          | 11.59         | 70.34          | 122.30         | -51.96      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

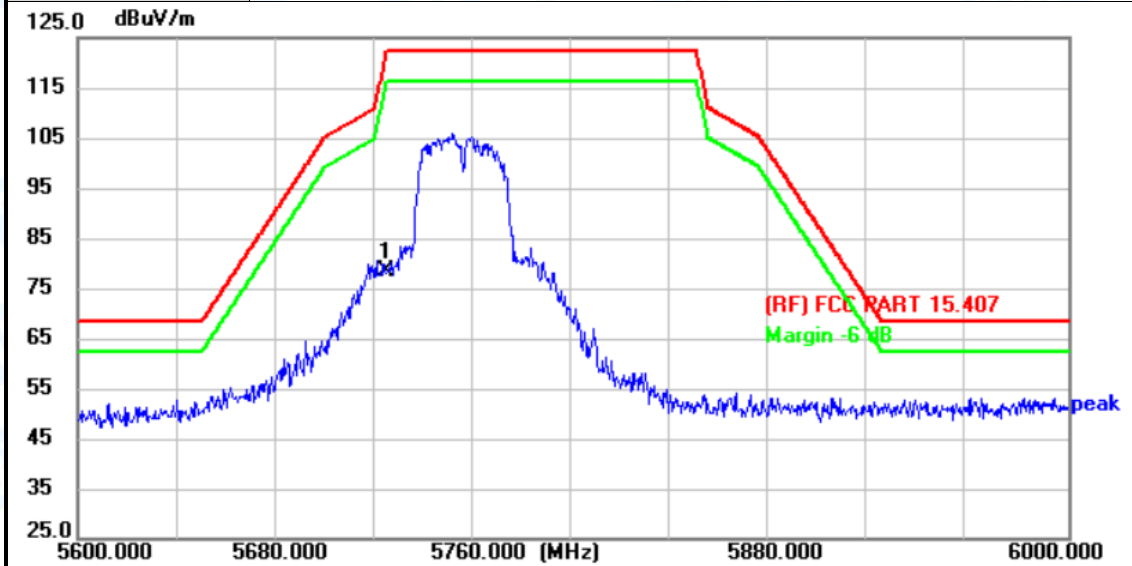

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 66.85          | 11.59         | 78.44          | 122.30         | -43.86      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

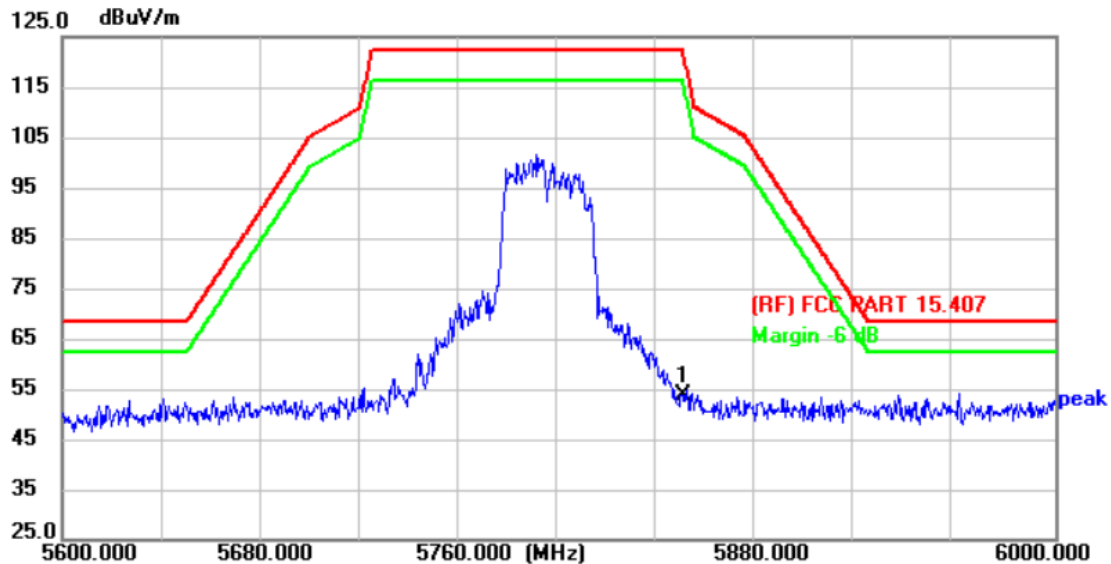


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.01          | 11.90         | 53.91          | 122.30         | -68.39      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                   |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

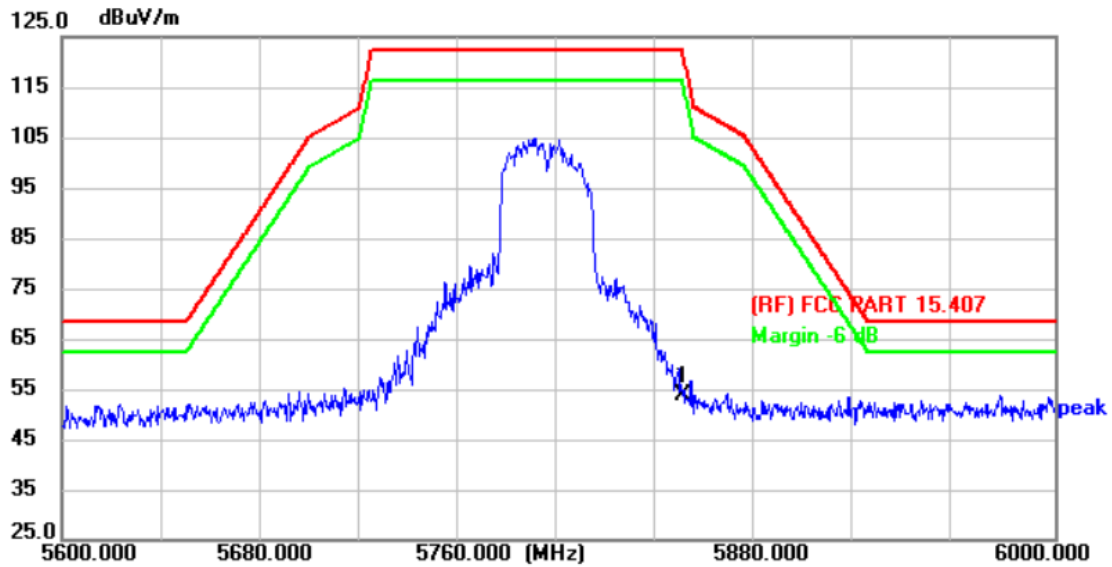

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 41.74          | 11.90         | 53.64          | 122.30         | -68.66      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

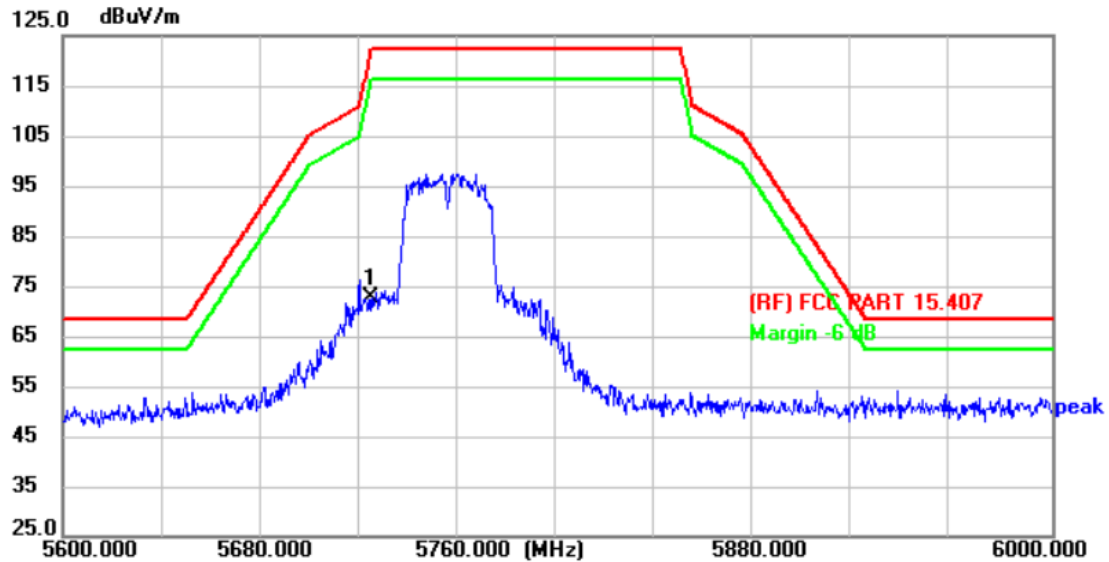


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 61.22          | 11.59         | 72.81          | 122.30         | -49.49      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

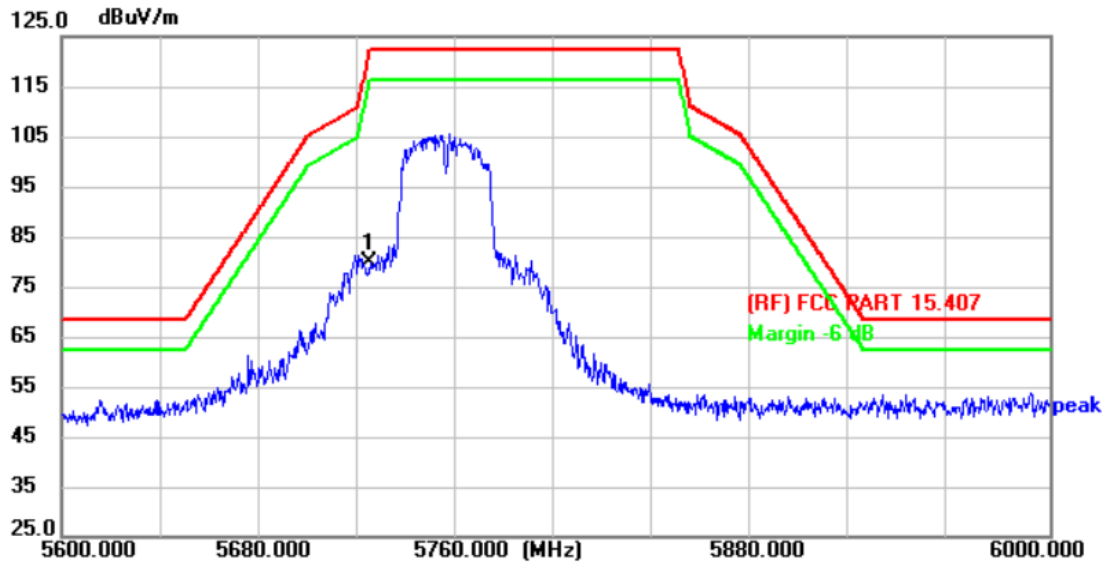

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 68.12          | 11.59         | 79.71          | 122.30         | -42.59      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

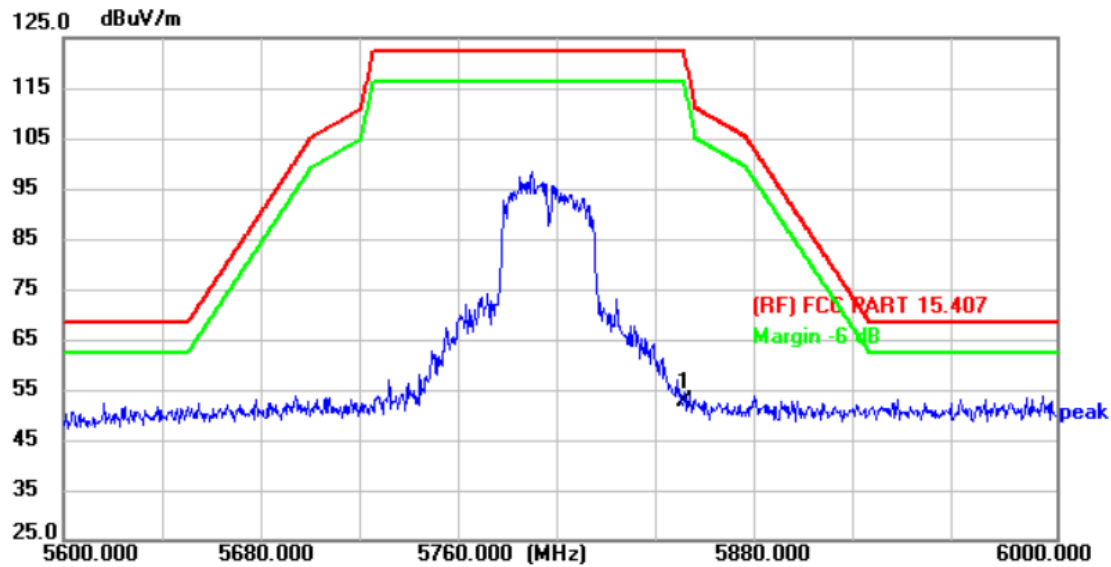


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 40.87          | 11.90         | 52.77          | 122.30         | -69.53      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

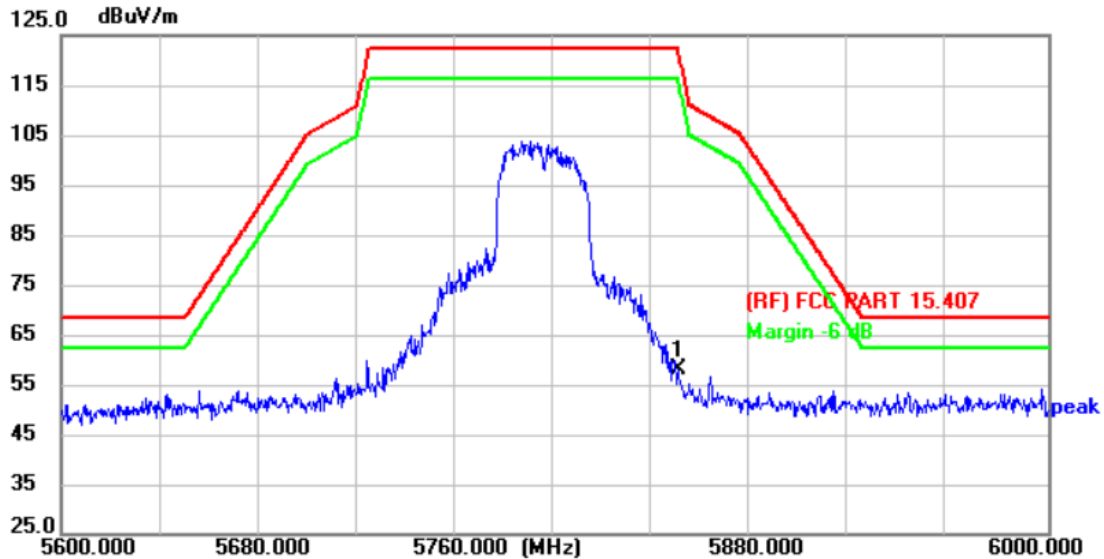

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 46.22          | 11.90         | 58.12          | 122.30         | -64.18      | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

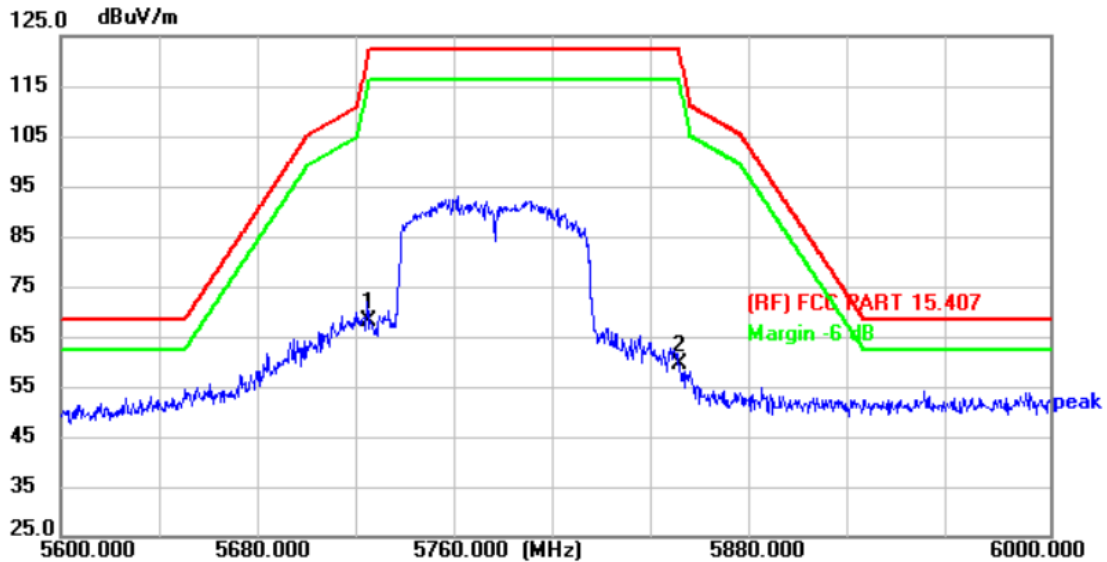


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 56.61          | 11.59         | 68.20          | 122.30         | -54.10      | peak     | P   |
| 2   | 5850.000        | 47.44          | 11.90         | 59.34          | 122.30         | -62.96      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                     | Relative Humidity: | 48% |
| Test Voltage: | DC 12V                                     |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

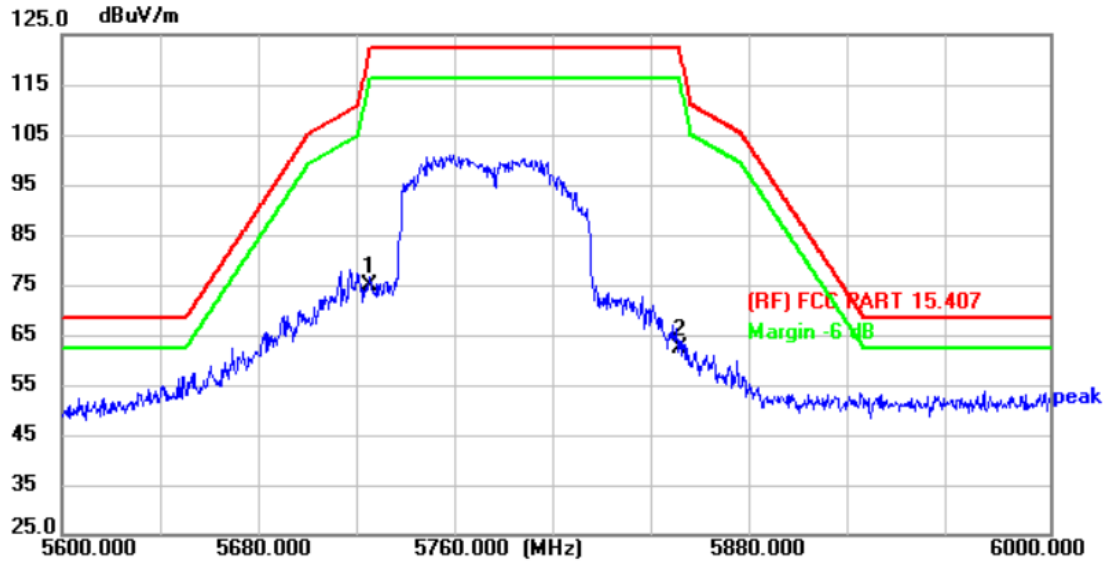

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 63.37          | 11.59         | 74.96          | 122.30         | -47.34      | peak     | P   |
| 2   | 5850.000        | 50.36          | 11.90         | 62.26          | 122.30         | -60.04      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

-----END OF THE REPORT-----

