

FCC Test Report

Report No.: RF150729E01-1

FCC ID: Q87-RE6400

Test Model: RE6400

Received Date: July 29, 2015

Test Date: July 31 to Sep. 07, 2015

Issued Date: Sep. 11, 2015

Applicant: Linksys LLC

Address: 121 Theory Drive Irvine California 92617 United State

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (3): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standard	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedure	18
4.1.4 Deviation from Test Standard	18
4.1.5 Test Setup	19
4.1.6 EUT Operating Condition	19
4.1.7 Test Results (Mode 2)	20
4.1.8 Test Results (Mode 3)	39
4.2 Conducted Emission Measurement	57
4.2.1 Limits of Conducted Emission Measurement	57
4.2.2 Test Instruments	57
4.2.3 Test Procedure	58
4.2.4 Deviation from Test Standard	58
4.2.5 Test Setup	58
4.2.6 EUT Operating Condition	58
4.2.7 Test Results (Mode 1)	59
4.2.8 Test Results (Mode 2)	61
4.3 Transmit Power Measurement	63
4.3.1 Limits of Transmit Power Measurement	63
4.3.2 Test Setup	63
4.3.3 Test Instruments	63
4.3.4 Test Procedure	63
4.3.5 Deviation from Test Standard	63
4.3.6 EUT Operating Condition	64
4.3.7 Test Result	65
4.4 Peak Power Spectral Density Measurement	67
4.4.1 Limits of Peak Power Spectral Density Measurement	67
4.4.2 Test Setup	67
4.4.3 Test Instruments	67
4.4.4 Test Procedure	68
4.4.5 Deviation from Test Standard	68
4.4.6 EUT Operating Condition	68
4.4.7 Test Results	69
4.5 Frequency Stability Measurement	74
4.5.1 Limits of Frequency Stability Measurement	74
4.5.2 Test Setup	74
4.5.3 Test Instruments	74
4.5.4 Test Procedure	74

4.5.5	Deviation from Test Standard	74
4.5.6	EUT Operating Condition	74
4.5.7	Test Results	75
4.6	6dB Bandwidth Measurment.....	76
4.6.1	Limits of 6dB Bandwidth Measurement.....	76
4.6.2	Test Setup.....	76
4.6.3	Test Instruments	76
4.6.4	Test Procedure	76
4.6.5	Deviation from Test Standard	76
4.6.6	EUT Operating Condition	76
4.6.7	Test Results	77
5	Pictures of Test Arrangements.....	79
	Appendix – Information on the Testing Laboratories	80



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150729E01-1	Original release.	Sep. 11, 2015



A D T

1 Certificate of Conformity

Product: Wireless Extender

Brand: Linksys

Test Model: RE6400

Sample Status: ENGINEERING SAMPLE

Applicant: Linksys LLC

Test Date: July 31 to Sep. 07, 2015

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Date:

Sep. 11, 2015

Midoli Peng / Specialist

Approved by :

Date:

Sep. 11, 2015

May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -8.21dB at 0.68906MHz.
15.407(b)(1/2/3/4/6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.3dB at 5705.00MHz.
15.407(b)(1/2/3/4)	Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.1dB at 5725.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

NOTE: The EUT was operating in 2400 ~ 2483.5MHz, 5150~5250MHz and 5725~5850MHz frequencies band. This report was recorded the RF parameters including 5150~5250MHz and 5725~5850MHz. For the 2400 ~ 2483.5MHz RF parameters was recorded in another test report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.65 dB
	6GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Extender
Brand	Linksys
Test Model	RE6400
Status of EUT	ENGINEERING SAMPLE
Driver version	1.1.00.001
Power Supply Rating	Refer to Note
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20 and VHT40 mode of 2.4GHz Band.
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	For 15.407 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
	For 15.247 2.412 ~ 2.462GHz
Number of Channel	For 15.407 9 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 4 for 802.11n (HT40), 802.11ac (VHT40) 2 for 802.11ac (VHT80)
	For 15.247 11 for 802.11b, 802.11g, 802.11n (HT20), VHT20 7 for 802.11n (HT40), VHT40
Output Power	For 15.407(5.18 ~ 5.24GHz) CDD Mode 802.11a: 111.245mW Beamforming Mode 802.11ac (VHT20): 120.11mW 802.11ac (VHT40): 187.351mW 802.11ac (VHT80): 30.771mW
	For 15.407(5.745 ~ 5.825GHz) CDD Mode 802.11a: 220.008mW Beamforming Mode 802.11ac (VHT20): 191.049mW 802.11ac (VHT40): 104.343mW 802.11ac (VHT80): 19.114mW
	For 15.247 802.11b: 698.11mW 802.11g: 750.59mW 802.11n(HT20): 746.18mW 802.11n(HT40): 592.23mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. According to the applicant's requirement two test samples were tested for radiated (above 1GHz) emission only.
2. The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Gain (dBi)	Frequency Range (GHz to GHz)	Antenna Type	Connector Type	Cable Length (mm)
Chain (0)	3.97	2.4~2.4835	Dipole	i-pex(MHF)	160
	5.97	5.15~5.85			
Chain (1)	3.97	2.4~2.4835	Dipole	i-pex(MHF)	160
	5.97	5.15~5.85			

3. 2.4GHz and 5GHz technology can transmit at same time.

4. The EUT uses following internal power supply and following two different model names could be chosen:

No.	Brand	Model No.	Spec.
1	Amigo-PSU	AMS151-1201500F	Input: 100-240V, 0.8A, 47~63Hz Output: 12V, 1.5A
2	HON-KWANG	HK-XX18-A12	Input: 100-240V, 0.8A, 47~63Hz Output: 12V, 1.5A

Note: From the above modes, the worst radiated test was found in **internal power supply 2**. Therefore only the test data of the modes were recorded in this report.

5. The EUT incorporates a MIMO function with beamforming.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
VHT40	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss= 1	2TX	2RX
	MCS0~8 Nss= 2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss= 1	2TX	2RX
	MCS0~9 Nss= 2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss= 1	2TX	2RX
	MCS0~9 Nss= 2	2TX	2RX

Note: 1. For 2.4GHz band and 5GHz band (802.11a), the EUT doesn't support beamforming mode.
2.The modulation and bandwidth are similar for 802.11n mode for 20MHz / 40MHz and 802.11ac mode for 20MHz / 40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
1	-	-	√	-	Sample 1 + internal power supply 1
2	√	√	√	√	Sample 1 + internal power supply 2
3	√	-	-	-	Sample 2 + internal power supply 2

Where **RE≥1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note: 1. “-” means no effect.

2. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on Y-plane.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

CDD Mode						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
Beamforming Mode						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5180-5240 5745-5825	36 to 48 149 to 165	157	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5180-5240 5745-5825	36 to 48 149 to 165	157	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
Beamforming Mode						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	27deg. C, 61%RH	120Vac, 60Hz	Tim Ho
RE<1G	24deg. C, 70%RH	120Vac, 60Hz	Robert Cheng
PLC	26deg. C, 60%RH 27deg. C, 65%RH	120Vac, 60Hz	Barry Lee Wythe Lin
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.


802.11a: Duty cycle = $1.439 \text{ ms} / 1.45 \text{ ms} = 0.992$

802.11ac (VHT20): Duty cycle = $1.36 \text{ ms} / 1.372 \text{ ms} = 0.991$


802.11ac (VHT40): Duty cycle = $0.674 \text{ ms} / 0.686 \text{ ms} = 0.983$

802.11ac (VHT80): Duty cycle = $0.336 \text{ ms} / 0.345 \text{ ms} = 0.974$, Duty factor = $10 * \log(1/0.974) = 0.11$


802.11a

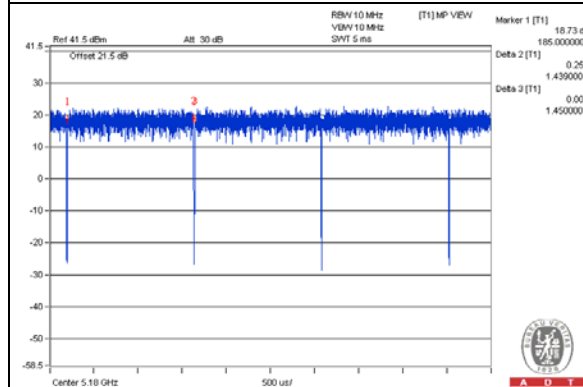


802.11ac (VHT20)

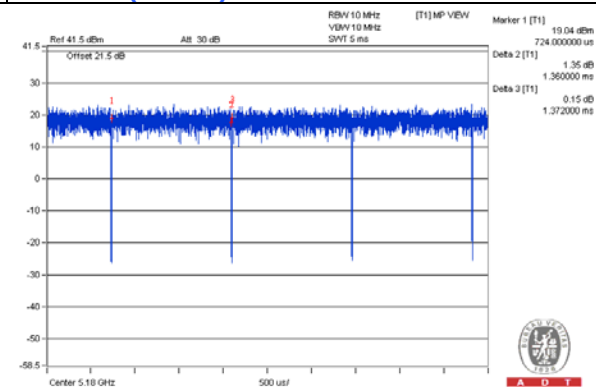

802.11ac (VHT40)

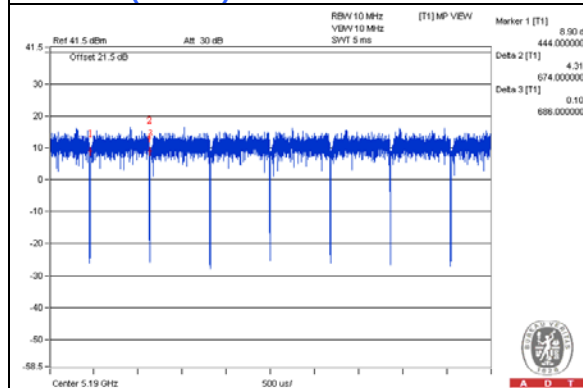

802.11ac (VHT80)

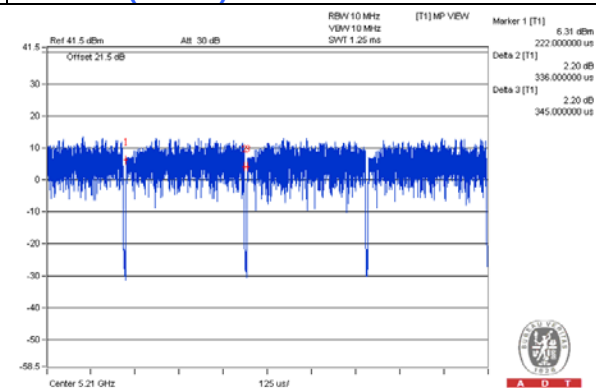

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	NOTEBOOK COMPUTER	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
B.	Extension Cord	NA	NA	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45	1	10	No	0	Provided by Lab
2.	AC	1	1.8	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

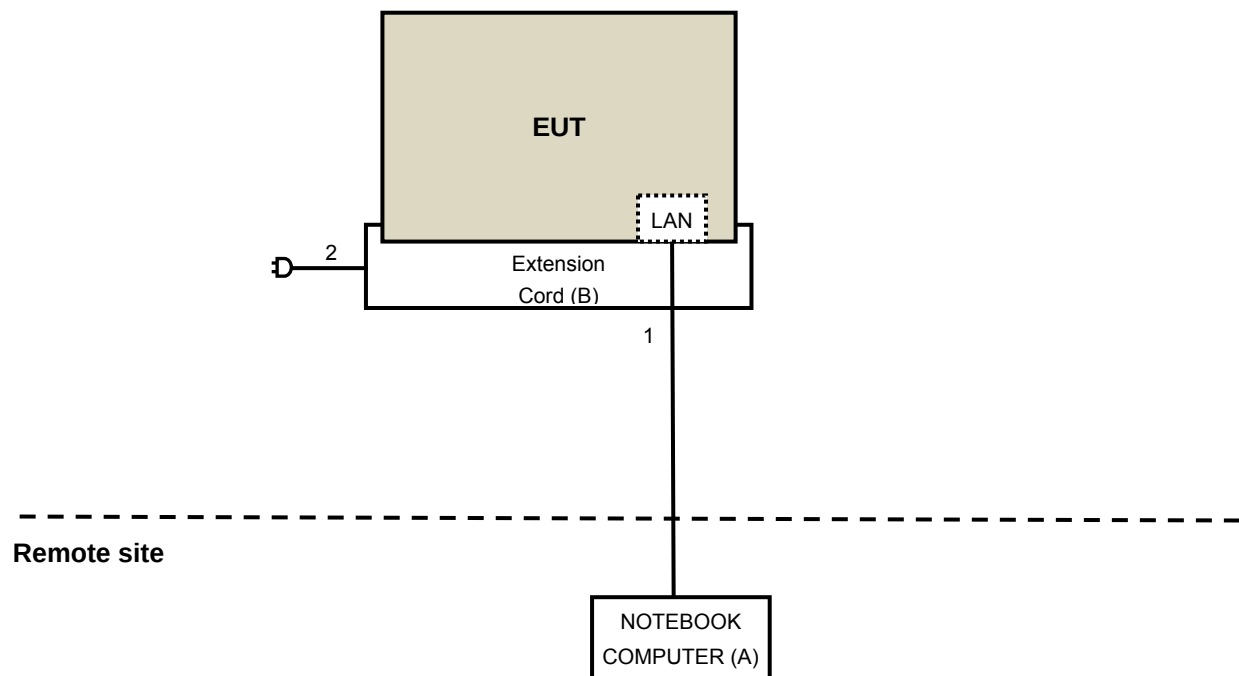

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedure New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013 2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedure New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBuV/m) ^{*1} PK:78.2 (dBuV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 24, 2015	July 23, 2016
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 06, 2015	Feb. 05, 2016
RF Cable	8D-FB	CHGCAB-001-1 CHGCAB-001-2	Oct. 04, 2014	Oct. 03, 2015
	RF-141	CHGCAB-004	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Feb. 09, 2015	Feb. 08, 2016
Pre-Amplifier Agilent	8449B	3008A02578	June 23, 2015	June 22, 2016
RF Cable	NA	131205 131216 131217 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	June 26, 2015	June 25, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Feb. 05, 2015	Feb. 04, 2016
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
Power Meter Anritsu	ML2495A	1014008	Apr. 28, 2015	Apr. 27, 2016
Power Sensor Anritsu	MA2411B	0917122	Apr. 28, 2015	Apr. 27, 2016
Spectrum Analyzer R&S	FSP 40	100060	May 08, 2015	May 07, 2016
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-008	Jan. 12, 2015	Jan. 11, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The VCCI Site Registration No. is G-137.
5. The CANADA Site Registration No. is IC 7450H-2.
6. Tested Date: Aug. 27 to Sep. 07, 2015

4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

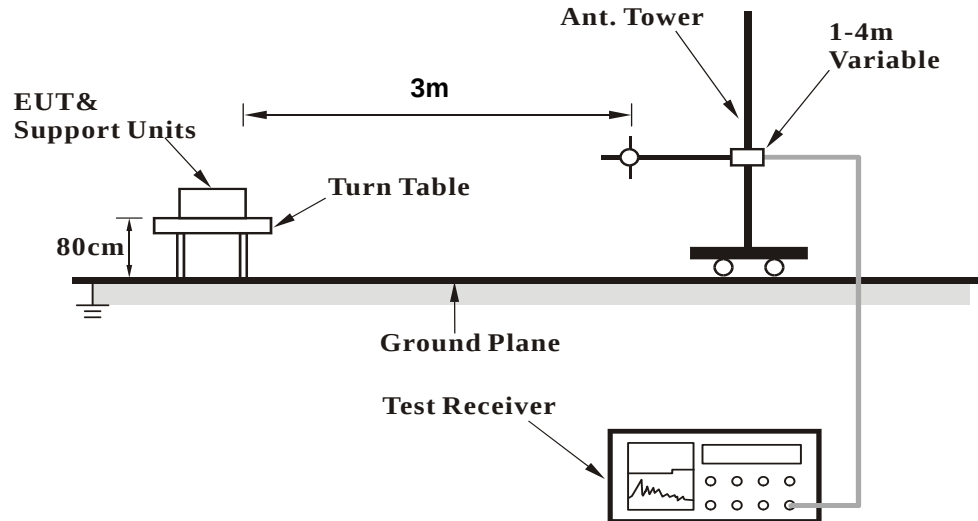

<Frequency Range above 1GHz>

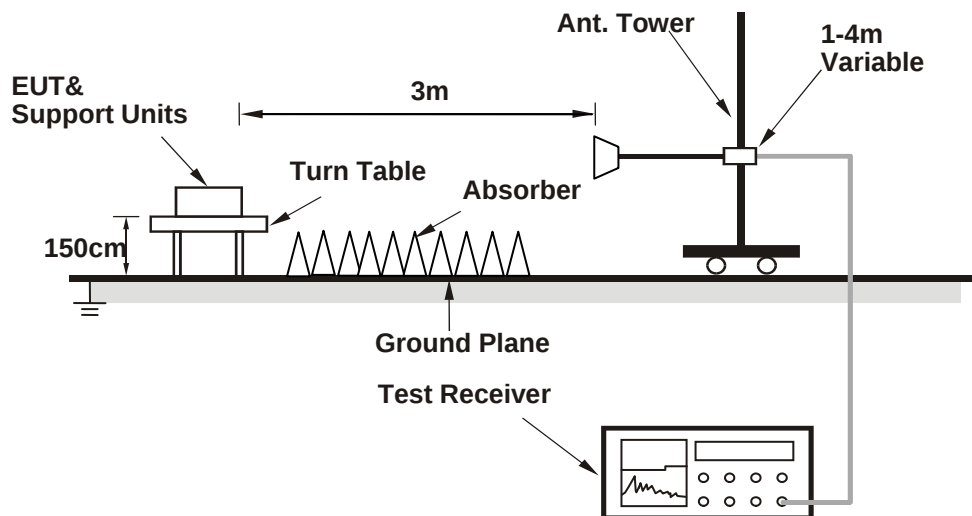

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

1. Connect the EUT with the support unit A (Notebook Computer) which is placed on remote site.
2. Controlling software (MT76xxE_AP.exe V1.0.3.1) has been activated to set the EUT on specific status.

4.1.7 Test Results (Mode 2)

Above 1GHz Data

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.3 PK	74.0	-13.7	2.08 H	291	50.17	10.13
2	5150.00	44.8 AV	54.0	-9.2	2.08 H	291	34.67	10.13
3	*5180.00	104.3 PK			2.08 H	291	94.00	10.30
4	*5180.00	94.7 AV			2.08 H	291	84.40	10.30
5	#10360.00	51.7 PK	74.0	-22.3	2.34 H	67	35.00	16.70
6	#10360.00	39.3 AV	54.0	-14.7	2.34 H	67	22.60	16.70
7	15540.00	59.3 PK	74.0	-14.7	2.33 H	33	37.74	21.56
8	15540.00	48.2 AV	54.0	-5.8	2.33 H	33	26.64	21.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	1.80 V	169	57.37	10.13
2	5150.00	52.3 AV	54.0	-1.7	1.80 V	169	42.17	10.13
3	*5180.00	114.3 PK			1.80 V	169	104.00	10.30
4	*5180.00	104.6 AV			1.80 V	169	94.30	10.30
5	#10360.00	54.1 PK	74.0	-19.9	2.46 V	117	37.40	16.70
6	#10360.00	41.0 AV	54.0	-13.0	2.46 V	117	24.30	16.70
7	15540.00	57.9 PK	74.0	-16.1	1.86 V	304	36.34	21.56
8	15540.00	46.3 AV	54.0	-7.7	1.86 V	304	24.74	21.56

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.6 PK			2.12 H	284	95.20	10.40
2	*5200.00	95.9 AV			2.12 H	284	85.50	10.40
3	#10400.00	51.2 PK	74.0	-22.8	2.29 H	69	34.29	16.91
4	#10400.00	38.9 AV	54.0	-15.1	2.29 H	69	21.99	16.91
5	15600.00	59.6 PK	74.0	-14.4	2.27 H	35	37.86	21.74
6	15600.00	48.7 AV	54.0	-5.3	2.27 H	35	26.96	21.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.4 PK			1.71 V	169	105.00	10.40
2	*5200.00	105.4 AV			1.71 V	169	95.00	10.40
3	#10400.00	54.4 PK	74.0	-19.6	2.56 V	148	37.49	16.91
4	#10400.00	41.1 AV	54.0	-12.9	2.56 V	148	24.19	16.91
5	15600.00	58.3 PK	74.0	-15.7	1.58 V	336	36.56	21.74
6	15600.00	46.5 AV	54.0	-7.5	1.58 V	336	24.76	21.74

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	105.9 PK			1.81 H	111	95.41	10.49
2	*5240.00	95.6 AV			1.81 H	111	85.11	10.49
3	5350.00	51.1 PK	74.0	-22.9	1.81 H	111	40.33	10.77
4	5350.00	40.1 AV	54.0	-13.9	1.81 H	111	29.33	10.77
5	#10480.00	47.1 PK	74.0	-26.9	1.03 H	222	30.61	16.49
6	#10480.00	35.7 AV	54.0	-18.3	1.03 H	222	19.21	16.49
7	15720.00	62.4 PK	74.0	-11.6	1.90 H	8	40.24	22.16
8	15720.00	49.8 AV	54.0	-4.2	1.90 H	8	27.64	22.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.8 PK			1.88 V	151	105.31	10.49
2	*5240.00	105.8 AV			1.88 V	151	95.31	10.49
3	5350.00	54.5 PK	74.0	-19.5	1.88 V	151	43.73	10.77
4	5350.00	43.8 AV	54.0	-10.2	1.88 V	151	33.03	10.77
5	#10480.00	50.9 PK	74.0	-23.1	1.29 V	118	34.41	16.49
6	#10480.00	38.9 AV	54.0	-15.1	1.29 V	118	22.41	16.49
7	15720.00	59.5 PK	74.0	-14.5	1.43 V	308	37.34	22.16
8	15720.00	47.5 AV	54.0	-6.5	1.43 V	308	25.34	22.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	60.3 PK	74.0	-13.7	1.70 H	54	48.84	11.46
2	#5715.00	45.6 AV	54.0	-8.4	1.70 H	54	34.14	11.46
3	#5725.00	73.2 PK	78.2	-5.0	1.63 H	57	61.71	11.49
4	*5745.00	105.8 PK			1.62 H	55	94.25	11.55
5	*5745.00	95.9 AV			1.62 H	55	84.35	11.55
6	11490.00	47.9 PK	74.0	-26.1	1.00 H	215	30.66	17.24
7	11490.00	36.2 AV	54.0	-17.8	1.00 H	215	18.96	17.24
8	#17235.00	62.5 PK	74.0	-11.5	1.91 H	6	35.95	26.55
9	#17235.00	50.1 AV	54.0	-3.9	1.91 H	6	23.55	26.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.6 PK	74.0	-14.4	1.86 V	340	48.14	11.46
2	#5715.00	45.6 AV	54.0	-8.4	1.86 V	340	34.14	11.46
3	#5725.00	77.1 PK	78.2	-1.1	1.86 V	340	65.61	11.49
4	*5745.00	115.4 PK			1.82 V	311	103.85	11.55
5	*5745.00	104.6 AV			1.82 V	311	93.05	11.55
6	11490.00	54.8 PK	74.0	-19.2	1.98 V	157	37.56	17.24
7	11490.00	42.0 AV	54.0	-12.0	1.98 V	157	24.76	17.24
8	#17235.00	59.8 PK	74.0	-14.2	2.13 V	90	33.25	26.55
9	#17235.00	47.5 AV	54.0	-6.5	2.13 V	90	20.95	26.55

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	106.8 PK			1.65 H	67	95.12	11.68
2	*5785.00	96.9 AV			1.65 H	67	85.22	11.68
3	11570.00	48.2 PK	74.0	-25.8	1.02 H	227	30.53	17.67
4	11570.00	36.3 AV	54.0	-17.7	1.02 H	227	18.63	17.67
5	#17355.00	62.1 PK	74.0	-11.9	1.86 H	11	35.37	26.73
6	#17355.00	49.6 AV	54.0	-4.4	1.86 H	11	22.87	26.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5705.00	60.2 PK	74.0	-13.8	1.65 V	173	48.78	11.42
2	#5705.00	50.7 AV	54.0	-3.3	1.65 V	173	39.28	11.42
3	#5725.00	59.2 PK	78.2	-19.0	1.65 V	173	47.71	11.49
4	*5785.00	115.1 PK			1.65 V	173	103.42	11.68
5	*5785.00	105.0 AV			1.65 V	173	93.32	11.68
6	#5850.00	59.0 PK	78.2	-19.2	1.65 V	173	47.27	11.73
7	#5860.00	59.3 PK	74.0	-14.7	1.65 V	173	47.57	11.73
8	#5860.00	48.2 AV	54.0	-5.8	1.65 V	173	36.47	11.73
9	11570.00	55.3 PK	74.0	-18.7	1.96 V	167	37.63	17.67
10	11570.00	42.3 AV	54.0	-11.7	1.96 V	167	24.63	17.67
11	#17355.00	59.2 PK	74.0	-14.8	2.16 V	83	32.47	26.73
12	#17355.00	47.5 AV	54.0	-6.5	2.16 V	83	20.77	26.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.8 PK			1.62 H	98	94.06	11.74
2	*5825.00	96.6 AV			1.62 H	98	84.86	11.74
3	#5850.00	71.4 PK	78.2	-6.8	1.67 H	109	59.67	11.73
4	#5860.00	62.0 PK	74.0	-12.0	1.67 H	112	50.27	11.73
5	#5860.00	46.7 AV	54.0	-7.3	1.67 H	112	34.97	11.73
6	11650.00	56.5 PK	74.0	-17.5	1.69 H	244	38.66	17.84
7	11650.00	44.5 AV	54.0	-9.5	1.69 H	244	26.66	17.84
8	#17475.00	63.3 PK	74.0	-10.7	1.84 H	11	35.99	27.31
9	#17475.00	49.5 AV	54.0	-4.5	1.84 H	11	22.19	27.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	115.7 PK			1.83 V	42	103.96	11.74
2	*5825.00	105.4 AV			1.83 V	42	93.66	11.74
3	#5850.00	76.3 PK	78.2	-1.9	1.80 V	33	64.57	11.73
4	#5860.00	66.5 PK	74.0	-7.5	1.85 V	41	54.77	11.73
5	#5860.00	50.9 AV	54.0	-3.1	1.85 V	41	39.17	11.73
6	11650.00	56.6 PK	74.0	-17.4	1.88 V	95	38.76	17.84
7	11650.00	44.0 AV	54.0	-10.0	1.88 V	95	26.16	17.84
8	#17475.00	60.5 PK	74.0	-13.5	1.62 V	307	33.19	27.31
9	#17475.00	48.2 AV	54.0	-5.8	1.62 V	307	20.89	27.31

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.0 PK	74.0	-12.0	1.60 H	71	51.87	10.13
2	5150.00	46.4 AV	54.0	-7.6	1.60 H	71	36.27	10.13
3	*5180.00	107.4 PK			1.59 H	61	97.10	10.30
4	*5180.00	97.2 AV			1.59 H	61	86.90	10.30
5	#10360.00	57.9 PK	74.0	-16.1	1.03 H	290	41.20	16.70
6	#10360.00	46.2 AV	54.0	-7.8	1.03 H	290	29.50	16.70
7	15540.00	64.6 PK	74.0	-9.4	1.56 H	325	43.04	21.56
8	15540.00	49.8 AV	54.0	-4.2	1.56 H	325	28.24	21.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.0 PK	74.0	-2.0	1.58 V	185	61.87	10.13
2	5150.00	51.8 AV	54.0	-2.2	1.58 V	185	41.67	10.13
3	*5180.00	117.0 PK			1.79 V	166	106.70	10.30
4	*5180.00	106.7 AV			1.79 V	166	96.40	10.30
5	#10360.00	56.0 PK	74.0	-18.0	1.04 V	219	39.30	16.70
6	#10360.00	44.0 AV	54.0	-10.0	1.04 V	219	27.30	16.70
7	15540.00	61.6 PK	74.0	-12.4	1.56 V	274	40.04	21.56
8	15540.00	47.9 AV	54.0	-6.1	1.56 V	274	26.34	21.56

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	106.8 PK			1.67 H	88	96.40	10.40
2	*5200.00	97.5 AV			1.67 H	88	87.10	10.40
3	#10400.00	56.9 PK	74.0	-17.1	1.04 H	306	39.99	16.91
4	#10400.00	45.6 AV	54.0	-8.4	1.04 H	306	28.69	16.91
5	15600.00	63.4 PK	74.0	-10.6	1.53 H	320	41.66	21.74
6	15600.00	49.1 AV	54.0	-4.9	1.53 H	320	27.36	21.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.3 PK			1.75 V	175	104.90	10.40
2	*5200.00	105.0 AV			1.75 V	175	94.60	10.40
3	#10400.00	55.8 PK	74.0	-18.2	1.00 V	214	38.89	16.91
4	#10400.00	43.8 AV	54.0	-10.2	1.00 V	214	26.89	16.91
5	15600.00	60.8 PK	74.0	-13.2	1.56 V	286	39.06	21.74
6	15600.00	47.0 AV	54.0	-7.0	1.56 V	286	25.26	21.74

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	107.2 PK			1.74 H	93	96.71	10.49
2	*5240.00	97.5 AV			1.74 H	93	87.01	10.49
3	5350.00	53.1 PK	74.0	-20.9	1.73 H	102	42.33	10.77
4	5350.00	42.3 AV	54.0	-11.7	1.73 H	102	31.53	10.77
5	#10480.00	57.3 PK	74.0	-16.7	1.02 H	264	40.81	16.49
6	#10480.00	45.4 AV	54.0	-8.6	1.02 H	264	28.91	16.49
7	15720.00	63.5 PK	74.0	-10.5	1.60 H	329	41.34	22.16
8	15720.00	49.1 AV	54.0	-4.9	1.60 H	329	26.94	22.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.9 PK			1.62 V	161	105.41	10.49
2	*5240.00	105.5 AV			1.62 V	161	95.01	10.49
3	5350.00	56.8 PK	74.0	-17.2	1.56 V	165	46.03	10.77
4	5350.00	45.1 AV	54.0	-8.9	1.56 V	165	34.33	10.77
5	#10480.00	56.3 PK	74.0	-17.7	1.00 V	223	39.81	16.49
6	#10480.00	44.0 AV	54.0	-10.0	1.00 V	223	27.51	16.49
7	15720.00	61.9 PK	74.0	-12.1	1.54 V	277	39.74	22.16
8	15720.00	47.9 AV	54.0	-6.1	1.54 V	277	25.74	22.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	60.5 PK	74.0	-13.5	1.64 H	109	49.04	11.46
2	#5715.00	44.8 AV	54.0	-9.2	1.64 H	109	33.34	11.46
3	#5725.00	73.2 PK	78.2	-5.0	1.75 H	86	61.71	11.49
4	*5745.00	104.7 PK			1.75 H	92	93.15	11.55
5	*5745.00	94.4 AV			1.75 H	92	82.85	11.55
6	11490.00	57.3 PK	74.0	-16.7	1.67 H	242	40.06	17.24
7	11490.00	45.2 AV	54.0	-8.8	1.67 H	242	27.96	17.24
8	#17235.00	60.0 PK	74.0	-14.0	1.66 H	0	33.45	26.55
9	#17235.00	48.4 AV	54.0	-5.6	1.66 H	0	21.85	26.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	70.2 PK	74.0	-3.8	1.59 V	343	58.74	11.46
2	#5715.00	50.4 AV	54.0	-3.6	1.59 V	343	38.94	11.46
3	#5725.00	77.0 PK	78.2	-1.2	1.74 V	343	65.51	11.49
4	*5745.00	112.6 PK			1.76 V	43	101.05	11.55
5	*5745.00	102.6 AV			1.76 V	43	91.05	11.55
6	11490.00	57.0 PK	74.0	-17.0	1.81 V	69	39.76	17.24
7	11490.00	44.1 AV	54.0	-9.9	1.81 V	69	26.86	17.24
8	#17235.00	59.8 PK	74.0	-14.2	1.54 V	311	33.25	26.55
9	#17235.00	48.1 AV	54.0	-5.9	1.54 V	311	21.55	26.55

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	107.7 PK			1.77 H	94	96.02	11.68
2	*5785.00	97.6 AV			1.77 H	94	85.92	11.68
3	11570.00	57.0 PK	74.0	-17.0	1.76 H	231	39.33	17.67
4	11570.00	45.0 AV	54.0	-9.0	1.76 H	231	27.33	17.67
5	#17355.00	61.6 PK	74.0	-12.4	1.50 H	53	34.87	26.73
6	#17355.00	49.7 AV	54.0	-4.3	1.50 H	53	22.97	26.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.0 PK	74.0	-15.0	1.84 V	34	47.54	11.46
2	#5715.00	49.6 AV	54.0	-4.4	1.84 V	34	38.14	11.46
3	#5725.00	64.2 PK	78.2	-14.0	1.85 V	49	52.71	11.49
4	*5785.00	117.7 PK			1.85 V	11	106.02	11.68
5	*5785.00	106.4 AV			1.85 V	11	94.72	11.68
6	#5850.00	60.3 PK	78.2	-17.9	1.92 V	40	48.57	11.73
7	#5860.00	60.9 PK	74.0	-13.1	1.89 V	57	49.17	11.73
8	#5860.00	48.1 AV	54.0	-5.9	1.89 V	57	36.37	11.73
9	11570.00	56.2 PK	74.0	-17.8	1.80 V	99	38.53	17.67
10	11570.00	43.5 AV	54.0	-10.5	1.80 V	99	25.83	17.67
11	#17355.00	59.9 PK	74.0	-14.1	1.57 V	306	33.17	26.73
12	#17355.00	48.1 AV	54.0	-5.9	1.57 V	306	21.37	26.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.5 PK			1.71 H	95	94.76	11.74
2	*5825.00	97.0 AV			1.71 H	95	85.26	11.74
3	#5850.00	70.0 PK	78.2	-8.2	1.68 H	82	58.27	11.73
4	#5860.00	59.8 PK	74.0	-14.2	1.69 H	89	48.07	11.73
5	#5860.00	45.0 AV	54.0	-9.0	1.69 H	89	33.27	11.73
6	11650.00	57.3 PK	74.0	-16.7	1.69 H	257	39.46	17.84
7	11650.00	45.5 AV	54.0	-8.5	1.69 H	257	27.66	17.84
8	#17475.00	61.3 PK	74.0	-12.7	1.50 H	68	33.99	27.31
9	#17475.00	49.1 AV	54.0	-4.9	1.50 H	68	21.79	27.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.6 PK			1.69 V	42	100.86	11.74
2	*5825.00	105.2 AV			1.69 V	42	93.46	11.74
3	#5850.00	74.4 PK	78.2	-3.8	1.66 V	59	62.67	11.73
4	#5860.00	65.6 PK	74.0	-8.4	1.88 V	38	53.87	11.73
5	#5860.00	50.6 AV	54.0	-3.4	1.88 V	38	38.87	11.73
6	11650.00	58.1 PK	74.0	-15.9	1.86 V	110	40.26	17.84
7	11650.00	45.0 AV	54.0	-9.0	1.86 V	110	27.16	17.84
8	#17475.00	60.8 PK	74.0	-13.2	1.63 V	312	33.49	27.31
9	#17475.00	48.5 AV	54.0	-5.5	1.63 V	312	21.19	27.31

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.8 PK	74.0	-12.2	1.79 H	57	51.67	10.13
2	5150.00	47.4 AV	54.0	-6.6	1.79 H	57	37.27	10.13
3	*5190.00	98.6 PK			1.69 H	78	88.25	10.35
4	*5190.00	90.1 AV			1.69 H	78	79.75	10.35
5	#10380.00	56.6 PK	74.0	-17.4	1.04 H	280	39.79	16.81
6	#10380.00	45.3 AV	54.0	-8.7	1.04 H	280	28.49	16.81
7	15570.00	59.2 PK	74.0	-14.8	1.74 H	22	37.55	21.65
8	15570.00	48.3 AV	54.0	-5.7	1.74 H	22	26.65	21.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	1.77 V	23	56.37	10.13
2	5150.00	52.0 AV	54.0	-2.0	1.77 V	23	41.87	10.13
3	*5190.00	105.0 PK			1.45 V	45	94.65	10.35
4	*5190.00	97.0 AV			1.45 V	45	86.65	10.35
5	#10380.00	54.7 PK	74.0	-19.3	1.03 V	226	37.89	16.81
6	#10380.00	42.0 AV	54.0	-12.0	1.03 V	226	25.19	16.81
7	15570.00	61.3 PK	74.0	-12.7	1.61 V	270	39.65	21.65
8	15570.00	47.7 AV	54.0	-6.3	1.61 V	270	26.05	21.65

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	103.7 PK			1.71 H	95	93.23	10.47
2	*5230.00	96.1 AV			1.71 H	95	85.63	10.47
3	5350.00	52.2 PK	74.0	-21.8	1.79 H	108	41.43	10.77
4	5350.00	42.3 AV	54.0	-11.7	1.79 H	108	31.53	10.77
5	#10460.00	56.6 PK	74.0	-17.4	1.03 H	301	40.00	16.60
6	#10460.00	44.8 AV	54.0	-9.2	1.03 H	301	28.20	16.60
7	15690.00	61.9 PK	74.0	-12.1	1.49 H	360	39.84	22.06
8	15690.00	49.1 AV	54.0	-4.9	1.49 H	360	27.04	22.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	1.43 V	186	58.77	10.13
2	5150.00	50.6 AV	54.0	-3.4	1.43 V	186	40.47	10.13
3	*5230.00	111.9 PK			1.28 V	18	101.43	10.47
4	*5230.00	103.2 AV			1.28 V	18	92.73	10.47
5	5350.00	55.0 PK	74.0	-19.0	1.36 V	23	44.23	10.77
6	5350.00	43.5 AV	54.0	-10.5	1.36 V	23	32.73	10.77
7	#10460.00	55.9 PK	74.0	-18.1	1.00 V	224	39.30	16.60
8	#10460.00	43.5 AV	54.0	-10.5	1.00 V	224	26.90	16.60
9	15690.00	60.9 PK	74.0	-13.1	1.67 V	257	38.84	22.06
10	15690.00	47.4 AV	54.0	-6.6	1.67 V	257	25.34	22.06

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	58.5 PK	74.0	-15.5	1.72 H	89	47.04	11.46
2	#5715.00	46.5 AV	54.0	-7.5	1.72 H	89	35.04	11.46
3	#5725.00	63.3 PK	78.2	-14.9	1.78 H	79	51.81	11.49
4	*5755.00	95.7 PK			1.80 H	96	84.11	11.59
5	*5755.00	86.7 AV			1.80 H	96	75.11	11.59
6	11510.00	55.7 PK	74.0	-18.3	1.73 H	237	38.45	17.25
7	11510.00	44.1 AV	54.0	-9.9	1.73 H	237	26.85	17.25
8	#17265.00	61.3 PK	74.0	-12.7	1.60 H	8	34.82	26.48
9	#17265.00	49.9 AV	54.0	-4.1	1.60 H	8	23.42	26.48
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	62.6 PK	74.0	-11.4	1.60 V	175	51.14	11.46
2	#5715.00	52.0 AV	54.0	-2.0	1.60 V	175	40.54	11.46
3	#5725.00	68.9 PK	78.2	-9.3	1.52 V	193	57.41	11.49
4	*5755.00	102.0 PK			1.59 V	165	90.41	11.59
5	*5755.00	94.4 AV			1.59 V	165	82.81	11.59
6	11510.00	56.7 PK	74.0	-17.3	1.74 V	80	39.45	17.25
7	11510.00	44.1 AV	54.0	-9.9	1.74 V	80	26.85	17.25
8	#17265.00	59.9 PK	74.0	-14.1	1.56 V	327	33.42	26.48
9	#17265.00	48.1 AV	54.0	-5.9	1.56 V	327	21.62	26.48

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	101.4 PK			1.74 H	71	89.68	11.72
2	*5795.00	94.2 AV			1.74 H	71	82.48	11.72
3	#5850.00	63.6 PK	78.2	-14.6	1.73 H	60	51.87	11.73
4	#5860.00	58.8 PK	74.0	-15.2	1.72 H	65	47.07	11.73
5	#5860.00	47.5 AV	54.0	-6.5	1.72 H	65	35.77	11.73
6	11590.00	56.7 PK	74.0	-17.3	1.78 H	241	38.90	17.80
7	11590.00	44.6 AV	54.0	-9.4	1.78 H	241	26.80	17.80
8	#17385.00	61.1 PK	74.0	-12.9	1.41 H	360	34.18	26.92
9	#17385.00	49.8 AV	54.0	-4.2	1.41 H	360	22.88	26.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	110.1 PK			1.75 V	55	98.38	11.72
2	*5795.00	102.5 AV			1.75 V	55	90.78	11.72
3	#5850.00	70.1 PK	78.2	-8.1	1.82 V	52	58.37	11.73
4	#5860.00	63.0 PK	74.0	-11.0	1.82 V	57	51.27	11.73
5	#5860.00	52.2 AV	54.0	-1.8	1.82 V	57	40.47	11.73
6	11590.00	56.6 PK	74.0	-17.4	1.82 V	108	38.80	17.80
7	11590.00	44.0 AV	54.0	-10.0	1.82 V	108	26.20	17.80
8	#17385.00	59.8 PK	74.0	-14.2	1.55 V	304	32.88	26.92
9	#17385.00	48.1 AV	54.0	-5.9	1.55 V	304	21.18	26.92

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.72 H	77	49.97	10.13
2	5150.00	46.6 AV	54.0	-7.4	1.72 H	77	36.47	10.13
3	*5210.00	94.3 PK			1.65 H	101	83.88	10.42
4	*5210.00	85.1 AV			1.65 H	101	74.68	10.42
5	5350.00	52.3 PK	74.0	-21.7	1.70 H	78	41.53	10.77
6	5350.00	42.1 AV	54.0	-11.9	1.70 H	78	31.33	10.77
7	#10420.00	56.7 PK	74.0	-17.3	1.00 H	281	39.89	16.81
8	#10420.00	45.1 AV	54.0	-8.9	1.00 H	281	28.29	16.81
9	15630.00	60.3 PK	74.0	-13.7	1.68 H	0	38.45	21.85
10	15630.00	48.7 AV	54.0	-5.3	1.68 H	0	26.85	21.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5141.00	65.9 PK	74.0	-8.1	1.33 V	41	55.81	10.09
2	5141.00	52.6 AV	54.0	-1.4	1.33 V	41	42.51	10.09
3	*5210.00	102.5 PK			1.25 V	16	92.08	10.42
4	*5210.00	93.7 AV			1.25 V	16	83.28	10.42
5	5350.00	53.8 PK	74.0	-20.2	1.34 V	31	43.03	10.77
6	5350.00	43.7 AV	54.0	-10.3	1.34 V	31	32.93	10.77
7	#10420.00	56.3 PK	74.0	-17.7	1.04 V	224	39.49	16.81
8	#10420.00	44.1 AV	54.0	-9.9	1.04 V	224	27.29	16.81
9	15630.00	60.5 PK	74.0	-13.5	1.59 V	253	38.65	21.85
10	15630.00	47.0 AV	54.0	-7.0	1.59 V	253	25.15	21.85

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	61.3 PK	74.0	-12.7	1.76 H	79	49.84	11.46
2	#5715.00	48.0 AV	54.0	-6.0	1.76 H	79	36.54	11.46
3	#5725.00	63.9 PK	78.2	-14.3	1.73 H	87	52.41	11.49
4	*5775.00	92.5 PK			1.73 H	84	80.84	11.66
5	*5775.00	83.4 AV			1.73 H	84	71.74	11.66
6	#5850.00	58.3 PK	78.2	-19.9	1.65 H	76	46.57	11.73
7	#5860.00	55.9 PK	74.0	-18.1	1.72 H	76	44.17	11.73
8	#5860.00	44.3 AV	54.0	-9.7	1.72 H	76	32.57	11.73
9	11550.00	55.8 PK	74.0	-18.2	1.82 H	259	38.27	17.53
10	11550.00	43.7 AV	54.0	-10.3	1.82 H	259	26.17	17.53
11	#17325.00	59.7 PK	74.0	-14.3	1.67 H	21	33.16	26.54
12	#17325.00	47.9 AV	54.0	-6.1	1.67 H	21	21.36	26.54

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	66.2 PK	74.0	-7.8	1.42 V	39	54.74	11.46
2	#5715.00	52.8 AV	54.0	-1.2	1.42 V	39	41.34	11.46
3	#5725.00	67.5 PK	78.2	-10.7	1.44 V	21	56.01	11.49
4	*5775.00	100.4 PK			1.51 V	20	88.74	11.66
5	*5775.00	91.8 AV			1.51 V	20	80.14	11.66
6	#5850.00	62.9 PK	78.2	-15.3	1.51 V	13	51.17	11.73
7	#5860.00	59.4 PK	74.0	-14.6	1.44 V	13	47.67	11.73
8	#5860.00	45.7 AV	54.0	-8.3	1.44 V	13	33.97	11.73
9	11550.00	55.4 PK	74.0	-18.6	1.93 V	99	37.87	17.53
10	11550.00	43.1 AV	54.0	-10.9	1.93 V	99	25.57	17.53
11	#17325.00	60.3 PK	74.0	-13.7	1.55 V	313	33.76	26.54
12	#17325.00	48.6 AV	54.0	-5.4	1.55 V	313	22.06	26.54

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data

802.11a

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	163.24	30.7 QP	43.5	-12.8	1.34 H	241	43.75	-13.04
2	374.25	32.5 QP	46.0	-13.5	1.24 H	174	42.50	-9.99
3	500.21	35.9 QP	46.0	-10.1	1.44 H	304	42.73	-6.82
4	749.67	31.9 QP	46.0	-14.1	1.24 H	241	33.14	-1.22
5	874.77	36.2 QP	46.0	-9.8	1.64 H	304	35.99	0.25
6	999.67	47.7 QP	54.0	-6.3	1.54 H	164	45.67	2.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.11	32.2 QP	40.0	-7.8	1.64 V	77	45.71	-13.49
2	348.11	27.1 QP	46.0	-18.9	1.64 V	301	37.95	-10.84
3	374.71	29.3 QP	46.0	-16.7	1.60 V	88	39.32	-9.98
4	500.22	35.7 QP	46.0	-10.3	1.64 V	46	42.56	-6.82
5	966.41	42.8 QP	54.0	-11.2	1.44 V	77	41.08	1.73
6	999.10	43.0 QP	54.0	-11.0	1.45 V	41	40.97	2.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.8 Test Results (Mode 3)

Above 1GHz Data

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	2.08 H	284	50.07	10.13
2	5150.00	44.7 AV	54.0	-9.3	2.08 H	284	34.57	10.13
3	*5180.00	103.8 PK			2.12 H	286	93.50	10.30
4	*5180.00	94.4 AV			2.12 H	286	84.10	10.30
5	#10360.00	52.0 PK	74.0	-22.0	2.28 H	61	35.30	16.70
6	#10360.00	39.3 AV	54.0	-14.7	2.28 H	61	22.60	16.70
7	15540.00	58.8 PK	74.0	-15.2	2.27 H	20	37.24	21.56
8	15540.00	48.0 AV	54.0	-6.0	2.27 H	20	26.44	21.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	1.78 V	165	57.47	10.13
2	5150.00	52.3 AV	54.0	-1.7	1.78 V	165	42.17	10.13
3	*5180.00	113.8 PK			1.80 V	165	103.50	10.30
4	*5180.00	104.1 AV			1.80 V	165	93.80	10.30
5	#10360.00	54.5 PK	74.0	-19.5	2.41 V	114	37.80	16.70
6	#10360.00	41.3 AV	54.0	-12.7	2.41 V	114	24.60	16.70
7	15540.00	57.9 PK	74.0	-16.1	1.85 V	312	36.34	21.56
8	15540.00	46.1 AV	54.0	-7.9	1.85 V	312	24.54	21.56

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.7 PK			2.10 H	270	95.30	10.40
2	*5200.00	95.7 AV			2.10 H	270	85.30	10.40
3	#10400.00	50.7 PK	74.0	-23.3	2.29 H	54	33.79	16.91
4	#10400.00	38.6 AV	54.0	-15.4	2.29 H	54	21.69	16.91
5	15600.00	59.5 PK	74.0	-14.5	2.30 H	28	37.76	21.74
6	15600.00	48.5 AV	54.0	-5.5	2.30 H	28	26.76	21.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	114.9 PK			1.69 V	168	104.50	10.40
2	*5200.00	105.0 AV			1.69 V	168	94.60	10.40
3	#10400.00	54.9 PK	74.0	-19.1	2.61 V	146	37.99	16.91
4	#10400.00	41.5 AV	54.0	-12.5	2.61 V	146	24.59	16.91
5	15600.00	58.0 PK	74.0	-16.0	1.63 V	329	36.26	21.74
6	15600.00	46.2 AV	54.0	-7.8	1.63 V	329	24.46	21.74

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	105.4 PK			1.81 H	123	94.91	10.49
2	*5240.00	95.2 AV			1.81 H	123	84.71	10.49
3	5350.00	51.5 PK	74.0	-22.5	1.86 H	125	40.73	10.77
4	5350.00	40.3 AV	54.0	-13.7	1.86 H	125	29.53	10.77
5	#10480.00	47.0 PK	74.0	-27.0	1.05 H	225	30.51	16.49
6	#10480.00	35.7 AV	54.0	-18.3	1.05 H	225	19.21	16.49
7	15720.00	62.7 PK	74.0	-11.3	1.94 H	0	40.54	22.16
8	15720.00	50.0 AV	54.0	-4.0	1.94 H	0	27.84	22.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.8 PK			1.84 V	142	105.31	10.49
2	*5240.00	105.5 AV			1.84 V	142	95.01	10.49
3	5350.00	54.4 PK	74.0	-19.6	1.87 V	142	43.63	10.77
4	5350.00	43.4 AV	54.0	-10.6	1.87 V	142	32.63	10.77
5	#10480.00	51.2 PK	74.0	-22.8	1.23 V	125	34.71	16.49
6	#10480.00	39.4 AV	54.0	-14.6	1.23 V	125	22.91	16.49
7	15720.00	59.8 PK	74.0	-14.2	1.38 V	308	37.64	22.16
8	15720.00	47.7 AV	54.0	-6.3	1.38 V	308	25.54	22.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	60.3 PK	74.0	-13.7	1.65 H	66	48.84	11.46
2	#5715.00	45.3 AV	54.0	-8.7	1.65 H	66	33.84	11.46
3	#5725.00	72.9 PK	78.2	-5.3	1.65 H	50	61.41	11.49
4	*5745.00	105.8 PK			1.63 H	56	94.25	11.55
5	*5745.00	95.9 AV			1.63 H	56	84.35	11.55
6	11490.00	47.6 PK	74.0	-26.4	1.01 H	210	30.36	17.24
7	11490.00	36.2 AV	54.0	-17.8	1.01 H	210	18.96	17.24
8	#17235.00	62.8 PK	74.0	-11.2	1.93 H	0	36.25	26.55
9	#17235.00	50.3 AV	54.0	-3.7	1.93 H	0	23.75	26.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.6 PK	74.0	-14.4	1.89 V	327	48.14	11.46
2	#5715.00	45.7 AV	54.0	-8.3	1.89 V	327	34.24	11.46
3	#5725.00	76.6 PK	78.2	-1.6	1.89 V	344	65.11	11.49
4	*5745.00	115.5 PK			1.78 V	324	103.95	11.55
5	*5745.00	104.9 AV			1.78 V	324	93.35	11.55
6	11490.00	54.8 PK	74.0	-19.2	1.95 V	143	37.56	17.24
7	11490.00	42.2 AV	54.0	-11.8	1.95 V	143	24.96	17.24
8	#17235.00	60.2 PK	74.0	-13.8	2.13 V	92	33.65	26.55
9	#17235.00	47.8 AV	54.0	-6.2	2.13 V	92	21.25	26.55

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	106.7 PK			1.71 H	55	95.02	11.68
2	*5785.00	96.8 AV			1.71 H	55	85.12	11.68
3	11570.00	48.4 PK	74.0	-25.6	1.00 H	231	30.73	17.67
4	11570.00	36.6 AV	54.0	-17.4	1.00 H	231	18.93	17.67
5	#17355.00	62.2 PK	74.0	-11.8	1.84 H	21	35.47	26.73
6	#17355.00	49.7 AV	54.0	-4.3	1.84 H	21	22.97	26.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5705.00	60.0 PK	74.0	-14.0	1.60 V	159	48.58	11.42
2	#5705.00	50.5 AV	54.0	-3.5	1.60 V	159	39.08	11.42
3	#5725.00	59.7 PK	78.2	-18.5	1.63 V	183	48.21	11.49
4	*5785.00	115.3 PK			1.61 V	162	103.62	11.68
5	*5785.00	105.2 AV			1.61 V	162	93.52	11.68
6	#5850.00	59.0 PK	78.2	-19.2	1.61 V	175	47.27	11.73
7	#5860.00	59.1 PK	74.0	-14.9	1.69 V	187	47.37	11.73
8	#5860.00	48.1 AV	54.0	-5.9	1.69 V	187	36.37	11.73
9	11570.00	54.6 PK	74.0	-19.4	1.90 V	163	36.93	17.67
10	11570.00	41.8 AV	54.0	-12.2	1.90 V	163	24.13	17.67
11	#17355.00	59.2 PK	74.0	-14.8	2.15 V	92	32.47	26.73
12	#17355.00	47.4 AV	54.0	-6.6	2.15 V	92	20.67	26.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.5 PK			1.57 H	109	94.76	11.74
2	*5825.00	97.1 AV			1.57 H	109	85.36	11.74
3	#5850.00	71.7 PK	78.2	-6.5	1.67 H	107	59.97	11.73
4	#5860.00	62.3 PK	74.0	-11.7	1.71 H	119	50.57	11.73
5	#5860.00	46.9 AV	54.0	-7.1	1.71 H	119	35.17	11.73
6	11650.00	57.2 PK	74.0	-16.8	1.72 H	257	39.36	17.84
7	11650.00	44.9 AV	54.0	-9.1	1.72 H	257	27.06	17.84
8	#17475.00	63.8 PK	74.0	-10.2	1.81 H	14	36.49	27.31
9	#17475.00	49.7 AV	54.0	-4.3	1.81 H	14	22.39	27.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	115.2 PK			1.87 V	48	103.46	11.74
2	*5825.00	105.1 AV			1.87 V	48	93.36	11.74
3	#5850.00	75.9 PK	78.2	-2.3	1.77 V	48	64.17	11.73
4	#5860.00	66.5 PK	74.0	-7.5	1.82 V	38	54.77	11.73
5	#5860.00	50.7 AV	54.0	-3.3	1.82 V	38	38.97	11.73
6	11650.00	56.1 PK	74.0	-17.9	1.93 V	94	38.26	17.84
7	11650.00	43.5 AV	54.0	-10.5	1.93 V	94	25.66	17.84
8	#17475.00	60.7 PK	74.0	-13.3	1.61 V	321	33.39	27.31
9	#17475.00	48.6 AV	54.0	-5.4	1.61 V	321	21.29	27.31

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.5 PK	74.0	-11.5	1.61 H	59	52.37	10.13
2	5150.00	46.8 AV	54.0	-7.2	1.61 H	59	36.67	10.13
3	*5180.00	106.9 PK			1.61 H	55	96.60	10.30
4	*5180.00	96.8 AV			1.61 H	55	86.50	10.30
5	#10360.00	57.8 PK	74.0	-16.2	1.01 H	301	41.10	16.70
6	#10360.00	46.2 AV	54.0	-7.8	1.01 H	301	29.50	16.70
7	15540.00	64.3 PK	74.0	-9.7	1.53 H	336	42.74	21.56
8	15540.00	49.5 AV	54.0	-4.5	1.53 H	336	27.94	21.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.8 PK	74.0	-2.2	1.62 V	193	61.67	10.13
2	5150.00	51.7 AV	54.0	-2.3	1.62 V	193	41.57	10.13
3	*5180.00	116.3 PK			1.74 V	176	106.00	10.30
4	*5180.00	106.3 AV			1.74 V	176	96.00	10.30
5	#10360.00	56.0 PK	74.0	-18.0	1.00 V	207	39.30	16.70
6	#10360.00	44.2 AV	54.0	-9.8	1.00 V	207	27.50	16.70
7	15540.00	61.5 PK	74.0	-12.5	1.50 V	269	39.94	21.56
8	15540.00	48.0 AV	54.0	-6.0	1.50 V	269	26.44	21.56

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	106.3 PK			1.67 H	99	95.90	10.40
2	*5200.00	97.2 AV			1.67 H	99	86.80	10.40
3	#10400.00	56.9 PK	74.0	-17.1	1.00 H	295	39.99	16.91
4	#10400.00	45.3 AV	54.0	-8.7	1.00 H	295	28.39	16.91
5	15600.00	63.3 PK	74.0	-10.7	1.56 H	317	41.56	21.74
6	15600.00	48.9 AV	54.0	-5.1	1.56 H	317	27.16	21.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.1 PK			1.69 V	167	104.70	10.40
2	*5200.00	104.9 AV			1.69 V	167	94.50	10.40
3	#10400.00	55.8 PK	74.0	-18.2	1.00 V	227	38.89	16.91
4	#10400.00	44.0 AV	54.0	-10.0	1.00 V	227	27.09	16.91
5	15600.00	60.8 PK	74.0	-13.2	1.54 V	280	39.06	21.74
6	15600.00	46.7 AV	54.0	-7.3	1.54 V	280	24.96	21.74

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	107.2 PK			1.76 H	102	96.71	10.49
2	*5240.00	97.3 AV			1.76 H	102	86.81	10.49
3	5350.00	52.7 PK	74.0	-21.3	1.74 H	106	41.93	10.77
4	5350.00	42.2 AV	54.0	-11.8	1.74 H	106	31.43	10.77
5	#10480.00	57.7 PK	74.0	-16.3	1.00 H	278	41.21	16.49
6	#10480.00	45.7 AV	54.0	-8.3	1.00 H	278	29.21	16.49
7	15720.00	63.5 PK	74.0	-10.5	1.64 H	326	41.34	22.16
8	15720.00	48.8 AV	54.0	-5.2	1.64 H	326	26.64	22.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.3 PK			1.59 V	152	104.81	10.49
2	*5240.00	105.1 AV			1.59 V	152	94.61	10.49
3	5350.00	56.8 PK	74.0	-17.2	1.61 V	180	46.03	10.77
4	5350.00	45.2 AV	54.0	-8.8	1.61 V	180	34.43	10.77
5	#10480.00	56.0 PK	74.0	-18.0	1.00 V	226	39.51	16.49
6	#10480.00	43.6 AV	54.0	-10.4	1.00 V	226	27.11	16.49
7	15720.00	62.0 PK	74.0	-12.0	1.56 V	276	39.84	22.16
8	15720.00	47.8 AV	54.0	-6.2	1.56 V	276	25.64	22.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	60.3 PK	74.0	-13.7	1.63 H	117	48.84	11.46
2	#5715.00	44.5 AV	54.0	-9.5	1.63 H	117	33.04	11.46
3	#5725.00	72.7 PK	78.2	-5.5	1.73 H	83	61.21	11.49
4	*5745.00	105.3 PK			1.79 H	83	93.75	11.55
5	*5745.00	94.7 AV			1.79 H	83	83.15	11.55
6	11490.00	57.7 PK	74.0	-16.3	1.69 H	226	40.46	17.24
7	11490.00	45.7 AV	54.0	-8.3	1.69 H	226	28.46	17.24
8	#17235.00	60.7 PK	74.0	-13.3	1.66 H	0	34.15	26.55
9	#17235.00	48.8 AV	54.0	-5.2	1.66 H	0	22.25	26.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	69.7 PK	74.0	-4.3	1.60 V	348	58.24	11.46
2	#5715.00	50.0 AV	54.0	-4.0	1.60 V	348	38.54	11.46
3	#5725.00	76.7 PK	78.2	-1.5	1.74 V	346	65.21	11.49
4	*5745.00	112.8 PK			1.73 V	31	101.25	11.55
5	*5745.00	102.9 AV			1.73 V	31	91.35	11.55
6	11490.00	56.9 PK	74.0	-17.1	1.75 V	79	39.66	17.24
7	11490.00	44.2 AV	54.0	-9.8	1.75 V	79	26.96	17.24
8	#17235.00	60.0 PK	74.0	-14.0	1.60 V	298	33.45	26.55
9	#17235.00	48.1 AV	54.0	-5.9	1.60 V	298	21.55	26.55

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	108.2 PK			1.77 H	80	96.52	11.68
2	*5785.00	97.8 AV			1.77 H	80	86.12	11.68
3	11570.00	57.2 PK	74.0	-16.8	1.77 H	239	39.53	17.67
4	11570.00	45.1 AV	54.0	-8.9	1.77 H	239	27.43	17.67
5	#17355.00	61.8 PK	74.0	-12.2	1.52 H	43	35.07	26.73
6	#17355.00	49.8 AV	54.0	-4.2	1.52 H	43	23.07	26.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	59.2 PK	74.0	-14.8	1.85 V	42	47.74	11.46
2	#5715.00	49.9 AV	54.0	-4.1	1.85 V	42	38.44	11.46
3	#5725.00	64.7 PK	78.2	-13.5	1.81 V	49	53.21	11.49
4	*5785.00	117.4 PK			1.81 V	27	105.72	11.68
5	*5785.00	105.9 AV			1.81 V	27	94.22	11.68
6	#5850.00	60.1 PK	78.2	-18.1	1.93 V	35	48.37	11.73
7	#5860.00	60.5 PK	74.0	-13.5	1.86 V	43	48.77	11.73
8	#5860.00	47.7 AV	54.0	-6.3	1.86 V	43	35.97	11.73
9	11570.00	55.7 PK	74.0	-18.3	1.83 V	114	38.03	17.67
10	11570.00	43.0 AV	54.0	-11.0	1.83 V	114	25.33	17.67
11	#17355.00	60.2 PK	74.0	-13.8	1.52 V	297	33.47	26.73
12	#17355.00	48.5 AV	54.0	-5.5	1.52 V	297	21.77	26.73

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.9 PK			1.71 H	94	94.16	11.74
2	*5825.00	96.7 AV			1.71 H	94	84.96	11.74
3	#5850.00	70.4 PK	78.2	-7.8	1.71 H	86	58.67	11.73
4	#5860.00	59.8 PK	74.0	-14.2	1.74 H	80	48.07	11.73
5	#5860.00	45.1 AV	54.0	-8.9	1.74 H	80	33.37	11.73
6	11650.00	57.0 PK	74.0	-17.0	1.66 H	246	39.16	17.84
7	11650.00	45.1 AV	54.0	-8.9	1.66 H	246	27.26	17.84
8	#17475.00	61.1 PK	74.0	-12.9	1.55 H	58	33.79	27.31
9	#17475.00	49.1 AV	54.0	-4.9	1.55 H	58	21.79	27.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.2 PK			1.66 V	26	101.46	11.74
2	*5825.00	105.6 AV			1.66 V	26	93.86	11.74
3	#5850.00	74.3 PK	78.2	-3.9	1.71 V	71	62.57	11.73
4	#5860.00	65.4 PK	74.0	-8.6	1.83 V	46	53.67	11.73
5	#5860.00	50.7 AV	54.0	-3.3	1.83 V	46	38.97	11.73
6	11650.00	57.8 PK	74.0	-16.2	1.82 V	121	39.96	17.84
7	11650.00	44.7 AV	54.0	-9.3	1.82 V	121	26.86	17.84
8	#17475.00	60.7 PK	74.0	-13.3	1.60 V	308	33.39	27.31
9	#17475.00	48.2 AV	54.0	-5.8	1.60 V	308	20.89	27.31

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.8 PK	74.0	-12.2	1.82 H	67	51.67	10.13
2	5150.00	47.3 AV	54.0	-6.7	1.82 H	67	37.17	10.13
3	*5190.00	98.5 PK			1.74 H	64	88.15	10.35
4	*5190.00	89.9 AV			1.74 H	64	79.55	10.35
5	#10380.00	56.2 PK	74.0	-17.8	1.08 H	281	39.39	16.81
6	#10380.00	45.0 AV	54.0	-9.0	1.08 H	281	28.19	16.81
7	15570.00	59.7 PK	74.0	-14.3	1.77 H	26	38.05	21.65
8	15570.00	48.5 AV	54.0	-5.5	1.77 H	26	26.85	21.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	1.80 V	7	56.17	10.13
2	5150.00	51.6 AV	54.0	-2.4	1.80 V	7	41.47	10.13
3	*5190.00	104.8 PK			1.49 V	42	94.45	10.35
4	*5190.00	96.9 AV			1.49 V	42	86.55	10.35
5	#10380.00	55.0 PK	74.0	-19.0	1.06 V	233	38.19	16.81
6	#10380.00	42.2 AV	54.0	-11.8	1.06 V	233	25.39	16.81
7	15570.00	60.6 PK	74.0	-13.4	1.64 V	261	38.95	21.65
8	15570.00	47.2 AV	54.0	-6.8	1.64 V	261	25.55	21.65

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	103.7 PK			1.69 H	102	93.23	10.47
2	*5230.00	96.1 AV			1.69 H	102	85.63	10.47
3	5350.00	52.3 PK	74.0	-21.7	1.76 H	116	41.53	10.77
4	5350.00	42.7 AV	54.0	-11.3	1.76 H	116	31.93	10.77
5	#10460.00	56.5 PK	74.0	-17.5	1.06 H	303	39.90	16.60
6	#10460.00	44.8 AV	54.0	-9.2	1.06 H	303	28.20	16.60
7	15690.00	61.5 PK	74.0	-12.5	1.51 H	360	39.44	22.06
8	15690.00	48.8 AV	54.0	-5.2	1.51 H	360	26.74	22.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.0 PK	74.0	-5.0	1.47 V	179	58.87	10.13
2	5150.00	51.0 AV	54.0	-3.0	1.47 V	179	40.87	10.13
3	*5230.00	112.4 PK			1.31 V	5	101.93	10.47
4	*5230.00	103.6 AV			1.31 V	5	93.13	10.47
5	5350.00	55.3 PK	74.0	-18.7	1.38 V	34	44.53	10.77
6	5350.00	43.6 AV	54.0	-10.4	1.38 V	34	32.83	10.77
7	#10460.00	55.8 PK	74.0	-18.2	1.00 V	211	39.20	16.60
8	#10460.00	43.7 AV	54.0	-10.3	1.00 V	211	27.10	16.60
9	15690.00	60.7 PK	74.0	-13.3	1.64 V	250	38.64	22.06
10	15690.00	47.1 AV	54.0	-6.9	1.64 V	250	25.04	22.06

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	58.6 PK	74.0	-15.4	1.68 H	79	47.14	11.46
2	#5715.00	46.9 AV	54.0	-7.1	1.68 H	79	35.44	11.46
3	#5725.00	63.7 PK	78.2	-14.5	1.72 H	68	52.21	11.49
4	*5755.00	95.3 PK			1.76 H	105	83.71	11.59
5	*5755.00	86.3 AV			1.76 H	105	74.71	11.59
6	11510.00	55.4 PK	74.0	-18.6	1.76 H	222	38.15	17.25
7	11510.00	43.6 AV	54.0	-10.4	1.76 H	222	26.35	17.25
8	#17265.00	61.1 PK	74.0	-12.9	1.65 H	3	34.62	26.48
9	#17265.00	49.9 AV	54.0	-4.1	1.65 H	3	23.42	26.48
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	62.5 PK	74.0	-11.5	1.64 V	177	51.04	11.46
2	#5715.00	51.7 AV	54.0	-2.3	1.64 V	177	40.24	11.46
3	#5725.00	69.1 PK	78.2	-9.1	1.58 V	189	57.61	11.49
4	*5755.00	101.9 PK			1.60 V	172	90.31	11.59
5	*5755.00	94.4 AV			1.60 V	172	82.81	11.59
6	11510.00	56.1 PK	74.0	-17.9	1.70 V	76	38.85	17.25
7	11510.00	43.7 AV	54.0	-10.3	1.70 V	76	26.45	17.25
8	#17265.00	60.5 PK	74.0	-13.5	1.52 V	317	34.02	26.48
9	#17265.00	48.5 AV	54.0	-5.5	1.52 V	317	22.02	26.48

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	101.8 PK			1.74 H	63	90.08	11.72
2	*5795.00	94.5 AV			1.74 H	63	82.78	11.72
3	#5850.00	63.7 PK	78.2	-14.5	1.68 H	66	51.97	11.73
4	#5860.00	58.9 PK	74.0	-15.1	1.66 H	81	47.17	11.73
5	#5860.00	47.4 AV	54.0	-6.6	1.66 H	81	35.67	11.73
6	11590.00	56.7 PK	74.0	-17.3	1.82 H	243	38.90	17.80
7	11590.00	44.6 AV	54.0	-9.4	1.82 H	243	26.80	17.80
8	#17385.00	60.9 PK	74.0	-13.1	1.38 H	360	33.98	26.92
9	#17385.00	49.6 AV	54.0	-4.4	1.38 H	360	22.68	26.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	110.7 PK			1.70 V	57	98.98	11.72
2	*5795.00	102.9 AV			1.70 V	57	91.18	11.72
3	#5850.00	70.3 PK	78.2	-7.9	1.79 V	62	58.57	11.73
4	#5860.00	63.3 PK	74.0	-10.7	1.80 V	73	51.57	11.73
5	#5860.00	52.2 AV	54.0	-1.8	1.80 V	73	40.47	11.73
6	11590.00	56.6 PK	74.0	-17.4	1.88 V	94	38.80	17.80
7	11590.00	43.9 AV	54.0	-10.1	1.88 V	94	26.10	17.80
8	#17385.00	59.1 PK	74.0	-14.9	1.58 V	306	32.18	26.92
9	#17385.00	47.6 AV	54.0	-6.4	1.58 V	306	20.68	26.92

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	1.77 H	78	49.67	10.13
2	5150.00	46.2 AV	54.0	-7.8	1.77 H	78	36.07	10.13
3	*5210.00	94.2 PK			1.65 H	113	83.78	10.42
4	*5210.00	85.2 AV			1.65 H	113	74.78	10.42
5	5350.00	52.2 PK	74.0	-21.8	1.76 H	66	41.43	10.77
6	5350.00	42.2 AV	54.0	-11.8	1.76 H	66	31.43	10.77
7	#10420.00	56.0 PK	74.0	-18.0	1.00 H	280	39.19	16.81
8	#10420.00	44.7 AV	54.0	-9.3	1.00 H	280	27.89	16.81
9	15630.00	59.8 PK	74.0	-14.2	1.63 H	0	37.95	21.85
10	15630.00	48.4 AV	54.0	-5.6	1.63 H	0	26.55	21.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	1.27 V	29	56.17	10.13
2	5150.00	52.9 AV	54.0	-1.1	1.27 V	29	42.77	10.13
3	*5210.00	102.9 PK			1.25 V	22	92.48	10.42
4	*5210.00	93.9 AV			1.25 V	22	83.48	10.42
5	5350.00	53.7 PK	74.0	-20.3	1.32 V	27	42.93	10.77
6	5350.00	43.4 AV	54.0	-10.6	1.32 V	27	32.63	10.77
7	#10420.00	56.2 PK	74.0	-17.8	1.05 V	226	39.39	16.81
8	#10420.00	44.1 AV	54.0	-9.9	1.05 V	226	27.29	16.81
9	15630.00	60.8 PK	74.0	-13.2	1.64 V	253	38.95	21.85
10	15630.00	47.3 AV	54.0	-6.7	1.64 V	253	25.45	21.85

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	61.0 PK	74.0	-13.0	1.81 H	92	49.54	11.46
2	#5715.00	47.7 AV	54.0	-6.3	1.81 H	92	36.24	11.46
3	#5725.00	63.7 PK	78.2	-14.5	1.68 H	88	52.21	11.49
4	*5775.00	92.6 PK			1.75 H	73	80.94	11.66
5	*5775.00	83.7 AV			1.75 H	73	72.04	11.66
6	#5850.00	58.5 PK	78.2	-19.7	1.62 H	67	46.77	11.73
7	#5860.00	56.5 PK	74.0	-17.5	1.72 H	86	44.77	11.73
8	#5860.00	44.6 AV	54.0	-9.4	1.72 H	86	32.87	11.73
9	11550.00	55.5 PK	74.0	-18.5	1.81 H	257	37.97	17.53
10	11550.00	43.6 AV	54.0	-10.4	1.81 H	257	26.07	17.53
11	#17325.00	59.9 PK	74.0	-14.1	1.62 H	10	33.36	26.54
12	#17325.00	47.8 AV	54.0	-6.2	1.62 H	10	21.26	26.54

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	65.4 PK	74.0	-8.6	1.36 V	39	53.94	11.46
2	#5715.00	52.2 AV	54.0	-1.8	1.36 V	39	40.74	11.46
3	#5725.00	67.0 PK	78.2	-11.2	1.42 V	12	55.51	11.49
4	*5775.00	100.5 PK			1.52 V	27	88.84	11.66
5	*5775.00	92.0 AV			1.52 V	27	80.34	11.66
6	#5850.00	63.5 PK	78.2	-14.7	1.52 V	18	51.77	11.73
7	#5860.00	59.6 PK	74.0	-14.4	1.39 V	14	47.87	11.73
8	#5860.00	45.6 AV	54.0	-8.4	1.39 V	14	33.87	11.73
9	11550.00	55.2 PK	74.0	-18.8	1.94 V	99	37.67	17.53
10	11550.00	43.2 AV	54.0	-10.8	1.94 V	99	25.67	17.53
11	#17325.00	60.7 PK	74.0	-13.3	1.59 V	317	34.16	26.54
12	#17325.00	49.0 AV	54.0	-5.0	1.59 V	317	22.46	26.54

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100287	Apr. 17, 2015	Apr. 16, 2016
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-523	Sep. 29, 2014	Sep. 28, 2015
RF Cable	5D-FB	COACAB-001	May 25, 2015	May 24, 2016
50 ohms Terminator	50	3	Oct. 17, 2014	Oct. 16, 2015
50 ohms Terminator	N/A	EMC-04	Oct. 21, 2014	Oct. 20, 2015
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100071	Nov. 10, 2014	Nov. 09, 2015

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
- 3 The VCCI Con A Registration No. is C-817.
4. Tested Date: July 31 to Aug. 07, 2015

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

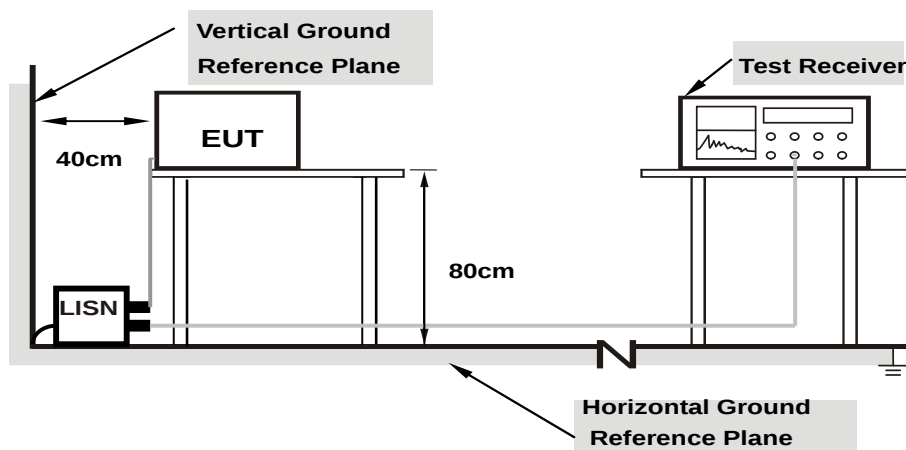

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.10	45.18	28.04	45.28	28.14	65.58	55.58	-20.30	-27.44
2	0.22422	0.11	39.28	24.48	39.39	24.59	62.66	52.66	-23.27	-28.07
3	0.27109	0.12	36.08	22.58	36.20	22.70	61.08	51.08	-24.88	-28.38
4	0.40391	0.16	31.62	23.68	31.78	23.84	57.77	47.77	-25.99	-23.93
5	0.86875	0.21	33.74	32.80	33.95	33.01	56.00	46.00	-22.05	-12.99
6	0.92734	0.22	32.18	31.02	32.40	31.24	56.00	46.00	-23.60	-14.76

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

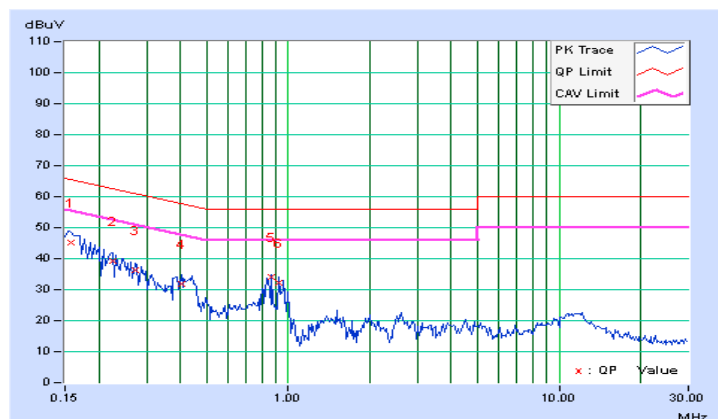


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.09	45.10	26.10	45.19	26.19	65.38	55.38	-20.19	-29.19
2	0.19297	0.10	41.40	22.98	41.50	23.08	63.91	53.91	-22.41	-30.83
3	0.26719	0.12	36.32	24.36	36.44	24.48	61.20	51.20	-24.77	-26.73
4	0.41953	0.15	29.60	22.20	29.75	22.35	57.46	47.46	-27.71	-25.11
5	0.86875	0.20	32.46	32.10	32.66	32.30	56.00	46.00	-23.34	-13.70
6	0.92734	0.20	31.38	30.78	31.58	30.98	56.00	46.00	-24.42	-15.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

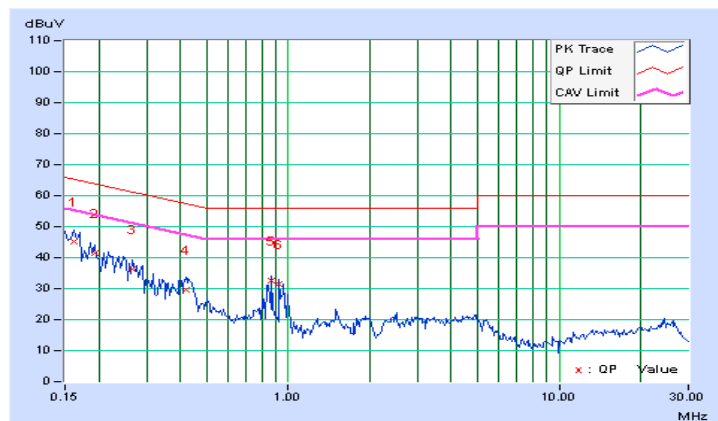


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.56797	0.18	33.02	24.66	33.20	24.84	56.00	46.00	-22.80	-21.16
2	0.68906	0.19	45.76	37.60	45.95	37.79	56.00	46.00	-10.05	-8.21
3	0.86875	0.21	39.06	37.44	39.27	37.65	56.00	46.00	-16.73	-8.35
4	0.92734	0.22	39.46	37.52	39.68	37.74	56.00	46.00	-16.32	-8.26
5	0.95859	0.23	39.36	36.86	39.59	37.09	56.00	46.00	-16.41	-8.91
6	1.09375	0.23	31.74	24.10	31.97	24.33	56.00	46.00	-24.03	-21.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

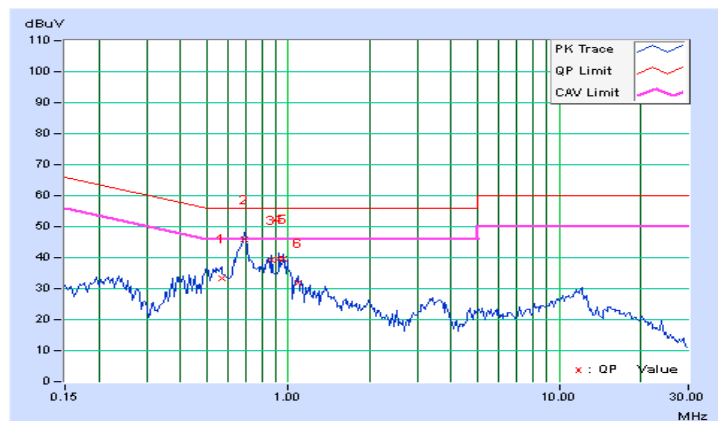


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.49766	0.16	31.22	20.92	31.38	21.08	56.04	46.04	-24.66	-24.96
2	0.68906	0.18	39.62	29.26	39.80	29.44	56.00	46.00	-16.20	-16.56
3	0.86875	0.20	36.90	36.24	37.10	36.44	56.00	46.00	-18.90	-9.56
4	0.93125	0.20	37.40	36.74	37.60	36.94	56.00	46.00	-18.40	-9.06
5	0.96200	0.21	36.24	35.32	36.45	35.53	56.00	46.00	-19.55	-10.47
6	12.07813	0.56	26.80	21.90	27.36	22.46	60.00	50.00	-32.64	-27.54

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

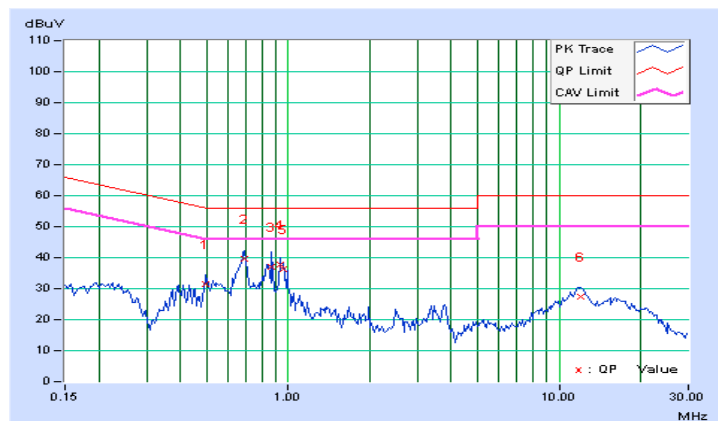

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

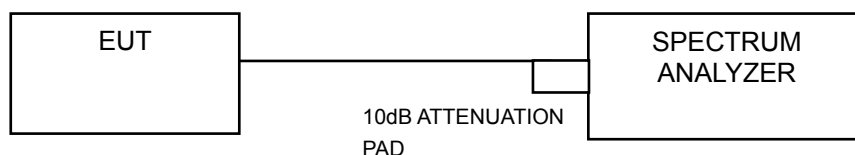

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

POWER OUTPUT

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		CHAIN 0	CHAIN 1				
36	5180	17.77	17.11	111.245	20.46	30	Pass
40	5200	16.71	16.23	88.857	19.49	30	Pass
48	5240	17.21	17.39	107.43	20.31	30	Pass
149	5745	13.74	14.84	54.138	17.34	30	Pass
157	5785	20.05	20.75	220.008	23.42	30	Pass
165	5825	17.49	18.53	127.39	21.05	30	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		CHAIN 0	CHAIN 1				
36	5180	17.72	17.85	120.11	20.80	27.02	Pass
40	5200	17.55	17.89	118.403	20.73	27.02	Pass
48	5240	17.09	17.34	105.368	20.23	27.02	Pass
149	5745	12.25	13.18	37.585	15.75	27.02	Pass
157	5785	19.70	19.90	191.049	22.81	27.02	Pass
165	5825	19.53	19.88	187.018	22.72	27.02	Pass

Note: Directional gain = 5.97dBi + 10log(2) = 8.98dBi > 6dBi , so the power limit shall be reduced to 30-(8.98-6) = 27.02dBm.

802.11ac (VHT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		CHAIN 0	CHAIN 1				
38	5190	14.02	14.22	51.659	17.13	27.02	Pass
46	5230	19.82	19.61	187.351	22.73	27.02	Pass
151	5755	10.23	11.53	24.767	13.94	27.02	Pass
159	5795	16.69	17.61	104.343	20.18	27.02	Pass

Note: Directional gain = 5.97dBi + 10log(2) = 8.98dBi > 6dBi , so the power limit shall be reduced to 30-(8.98-6) = 27.02dBm.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		CHAIN 0	CHAIN 1				
42	5210	11.48	12.23	30.771	14.88	27.02	Pass
155	5775	9.33	10.23	19.114	12.81	27.02	Pass


Note: Directional gain = 5.97dBi + 10log(2) = 8.98dBi > 6dBi , so the power limit shall be reduced to 30-(8.98-6) = 27.02dBm.

4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

802.11a, 802.11ac (VH20) & 802.11ac (VHT40)

For U-NII-1 band:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3 band:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

& 802.11ac (VHT80)

For U-NII-1 band:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

Same as Item 4.3.6.

4.4.7 Test Results

For U-NII-1 Band

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	4.10	4.19	7.16	14.02	Pass
40	5200	3.20	3.22	6.22	14.02	Pass
48	5240	4.04	4.11	7.09	14.02	Pass

Note: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. Directional gain = $5.97\text{dBi} + 10\log(2) = 8.98\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.98-6) = 14.02\text{dBm}$.

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	3.77	3.72	6.76	14.02	Pass
40	5200	3.68	4.23	6.97	14.02	Pass
48	5240	3.75	3.84	6.81	14.02	Pass

Note: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. Directional gain = $5.97\text{dBi} + 10\log(2) = 8.98\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.98-6) = 14.02\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
38	5190	-3.38	-3.18	-0.27	14.02	Pass
46	5230	2.97	3.10	6.05	14.02	Pass

- Note: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.97\text{dBi} + 10\log(2) = 8.98\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.98-6) = 14.02\text{dBm}$.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor(dBm)		Duty Factor	Total PSD With Duty Factor (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-6.48	-6.50	0.11	-3.36	14.02	Pass


- Note: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.97\text{dBi} + 10\log(2) = 8.98\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.98-6) = 14.02\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

SPECTRUM PLOT OF WORST VALUE


802.11a – Chain 1: CH 36

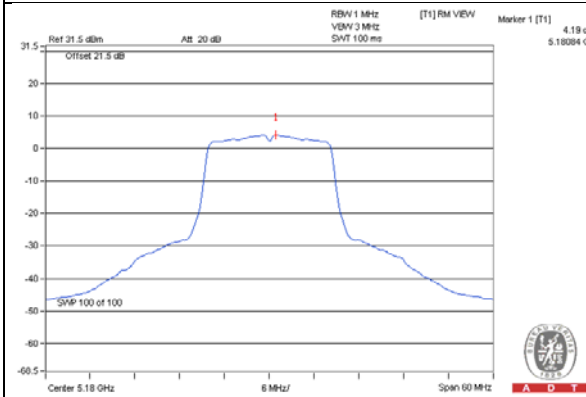


802.11ac (VHT20) – Chain 1: CH 40

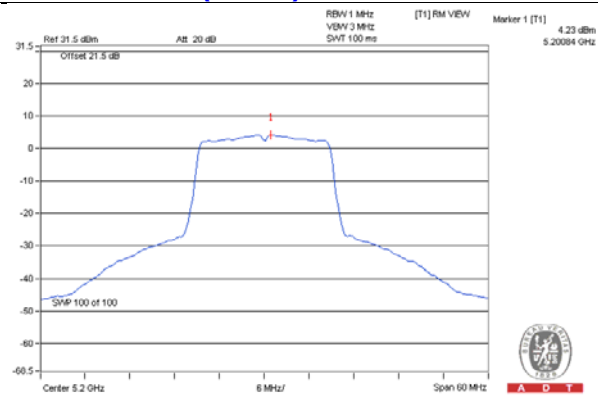

802.11ac (VHT40) – Chain 1: CH 46

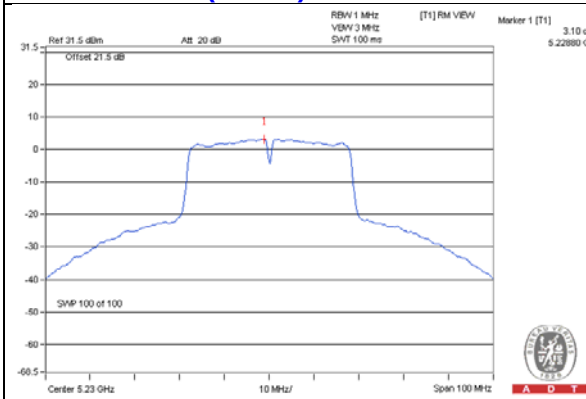

802.11ac (VHT80) – Chain 0: CH 42

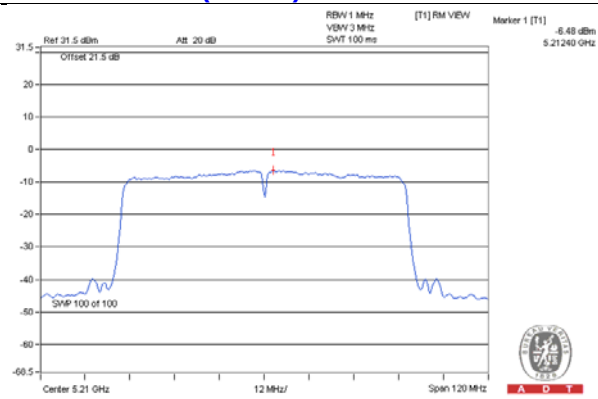

For U-NII-3 Band

CDD Mode

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	-4.36	-2.14	3.01	0.87	27.02	Pass
	157	5785	-0.47	1.75	3.01	4.76	27.02	Pass
	165	5825	-0.28	1.94	3.01	4.95	27.02	Pass
1	149	5745	-4.08	-1.86	3.01	1.15	27.02	Pass
	157	5785	-0.37	1.85	3.01	4.86	27.02	Pass
	165	5825	-0.08	2.14	3.01	5.15	27.02	Pass

Note: 1. Directional gain = 5.97dBi + 10log(2) = 8.98dBi > 6dBi , so the power density limit shall be reduced to 30-(8.98-6) = 27.02dBm.

Beamforming Mode

802.11ac (VHT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	-6.45	-4.23	3.01	-1.22	27.02	Pass
	157	5785	-0.56	1.66	3.01	4.67	27.02	Pass
	165	5825	-0.66	1.56	3.01	4.57	27.02	Pass
1	149	5745	-4.43	-2.21	3.01	0.80	27.02	Pass
	157	5785	-0.80	1.42	3.01	4.43	27.02	Pass
	165	5825	-0.73	1.49	3.01	4.50	27.02	Pass

Note: 1. Directional gain = 5.97dBi + 10log(2) = 8.98dBi > 6dBi , so the power density limit shall be reduced to 30-(8.98-6) = 27.02dBm.

802.11ac (VHT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	151	5755	-11.90	-9.68	3.01	-6.67	27.02	Pass
	159	5795	-10.11	-7.89	3.01	-4.88	27.02	Pass
1	151	5755	-12.18	-9.96	3.01	-6.95	27.02	Pass
	159	5795	-10.18	-7.96	3.01	-4.95	27.02	Pass

Note: 1. Directional gain = 5.97dBi + 10log(2) = 8.98dBi > 6dBi , so the power density limit shall be reduced to 30-(8.98-6) = 27.02dBm.

802.11ac (VHT80)


TX chain	Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-16.25	-14.03	3.01	0.11	-10.91	27.02	Pass
1	155	5775	-15.64	-13.42	3.01	0.11	-10.30	27.02	Pass

Note: 1. Directional gain = 5.97dBi + 10log(2) = 8.98dBi > 6dBi , so the power density limit shall be reduced to 30-(8.98-6) = 27.02dBm.


2. Refer to section 3.3 for duty cycle spectrum plot.

SPECTRUM PLOT OF WORST VALUE


802.11a – Chain 1: CH 165

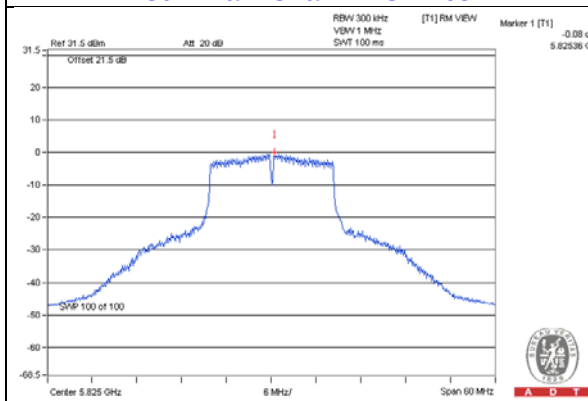


802.11ac (VHT20) – Chain 0: CH 157

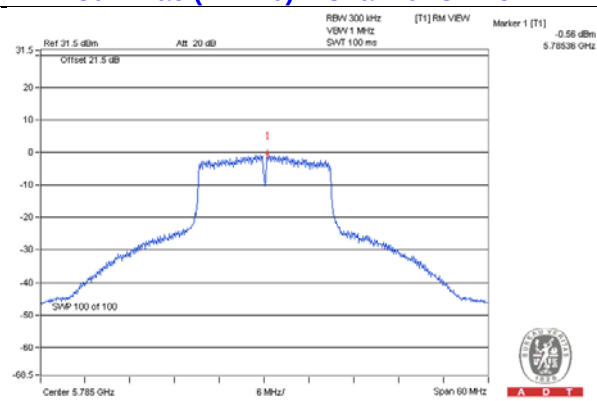

802.11ac (VHT40) – Chain 0: CH 159

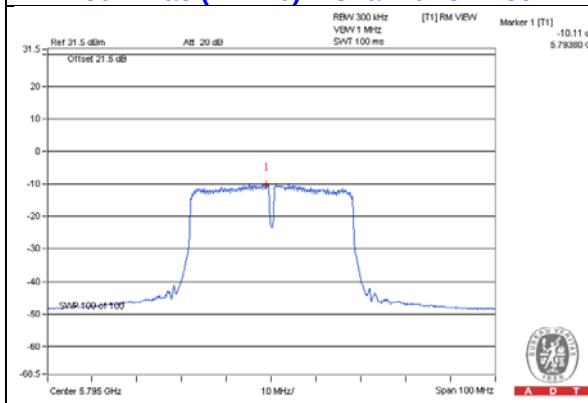

802.11ac (VHT80) – Chain 1: CH 155

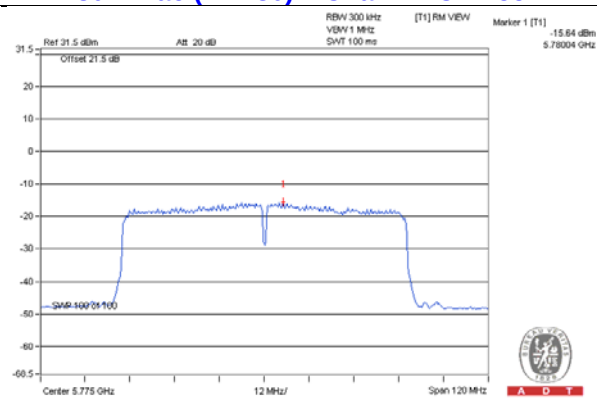


4.5 Frequency Stability Measurement

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

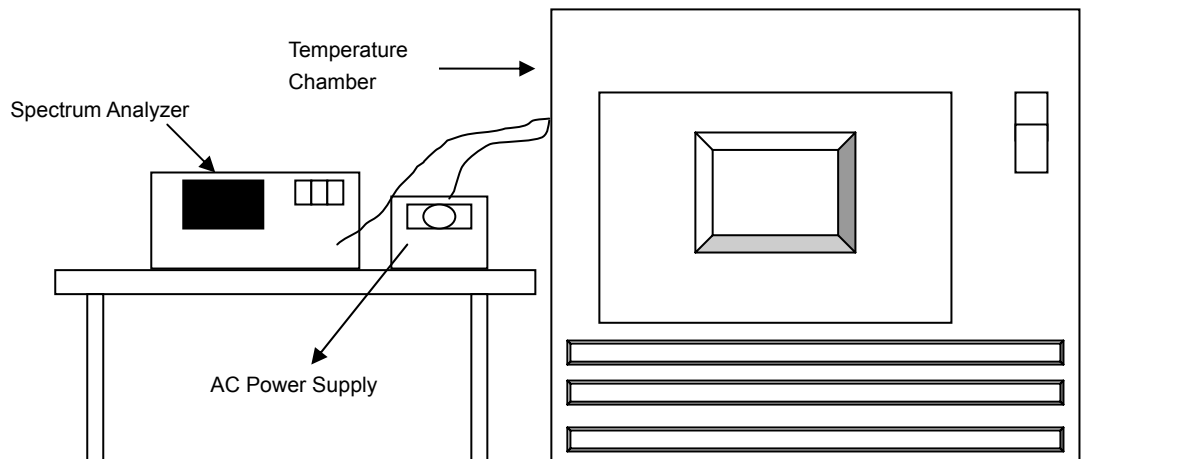

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5179.9911	-0.00017	5179.9894	-0.00020	5179.9872	-0.00025	5179.9881	-0.00023
40	120	5180.0232	0.00045	5180.0258	0.00050	5180.0235	0.00045	5180.0242	0.00047
30	120	5180.0164	0.00032	5180.0137	0.00026	5180.0167	0.00032	5180.0135	0.00026
20	120	5179.9808	-0.00037	5179.9791	-0.00040	5179.9798	-0.00039	5179.977	-0.00044
10	120	5180.0197	0.00038	5180.0178	0.00034	5180.0189	0.00036	5180.0169	0.00033
0	120	5180.0093	0.00018	5180.0107	0.00021	5180.0088	0.00017	5180.0124	0.00024
-10	120	5179.9772	-0.00044	5179.9733	-0.00052	5179.9769	-0.00045	5179.9757	-0.00047
-20	120	5179.9758	-0.00047	5179.9739	-0.00050	5179.9738	-0.00051	5179.9732	-0.00052
-30	120	5180.008	0.00015	5180.0078	0.00015	5180.0091	0.00018	5180.0068	0.00013


FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5179.9806	-0.00037	5179.9798	-0.00039	5179.9796	-0.00039	5179.9771	-0.00044
	120	5179.9808	-0.00037	5179.9791	-0.00040	5179.9798	-0.00039	5179.977	-0.00044
	102	5179.9817	-0.00035	5179.9792	-0.00040	5179.979	-0.00041	5179.9762	-0.00046

4.6 6dB Bandwidth Measurement

4.6.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

CDD Mode

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.30	16.36	0.5	Pass
157	5785	16.31	15.55	0.5	Pass
165	5825	16.07	16.06	0.5	Pass

Beamforming Mode

802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.06	16.83	0.5	Pass
157	5785	16.57	16.60	0.5	Pass
165	5825	16.34	16.38	0.5	Pass

802.11ac (VHT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.24	35.31	0.5	Pass
159	5795	35.33	35.29	0.5	Pass



802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	75.46	75.47	0.5	Pass

SPECTRUM PLOT OF WORST VALUE



802.11a – Chain 1: CH 157

802.11ac (VHT20) – Chain 0: CH 165

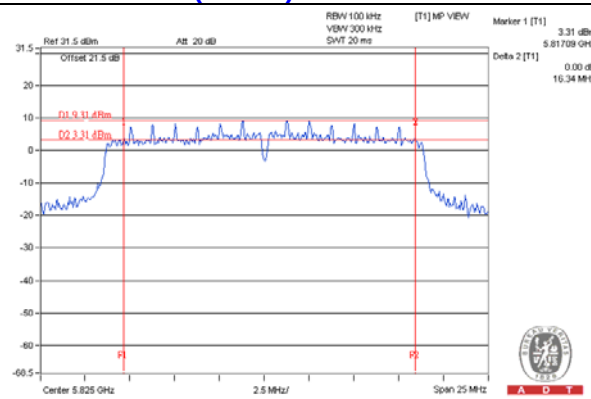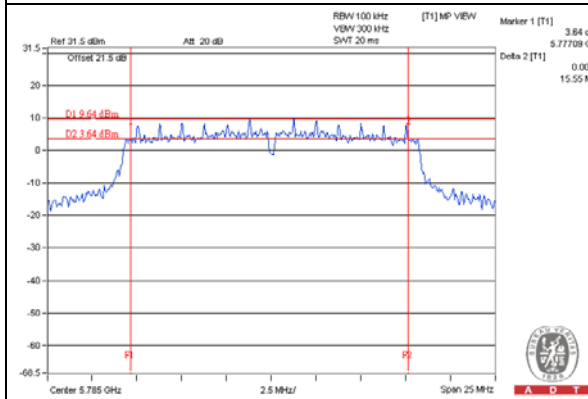

802.11ac (VHT40) – Chain 0: CH 151

802.11ac (VHT80) – Chain 0: CH 155

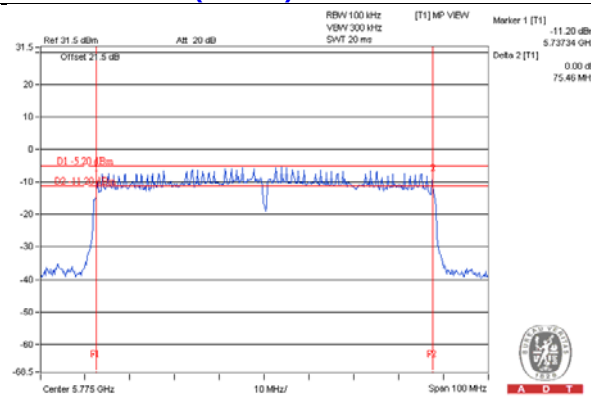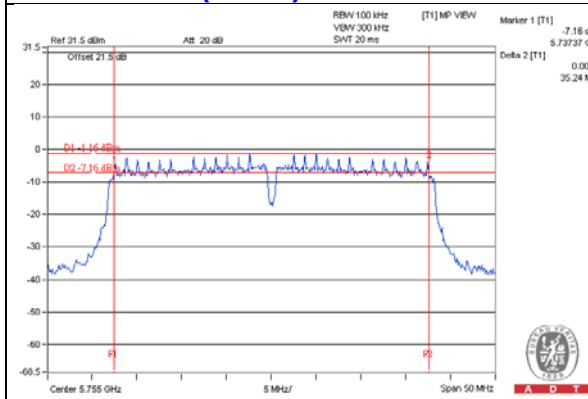

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---