


Out of band emission, Band Edge

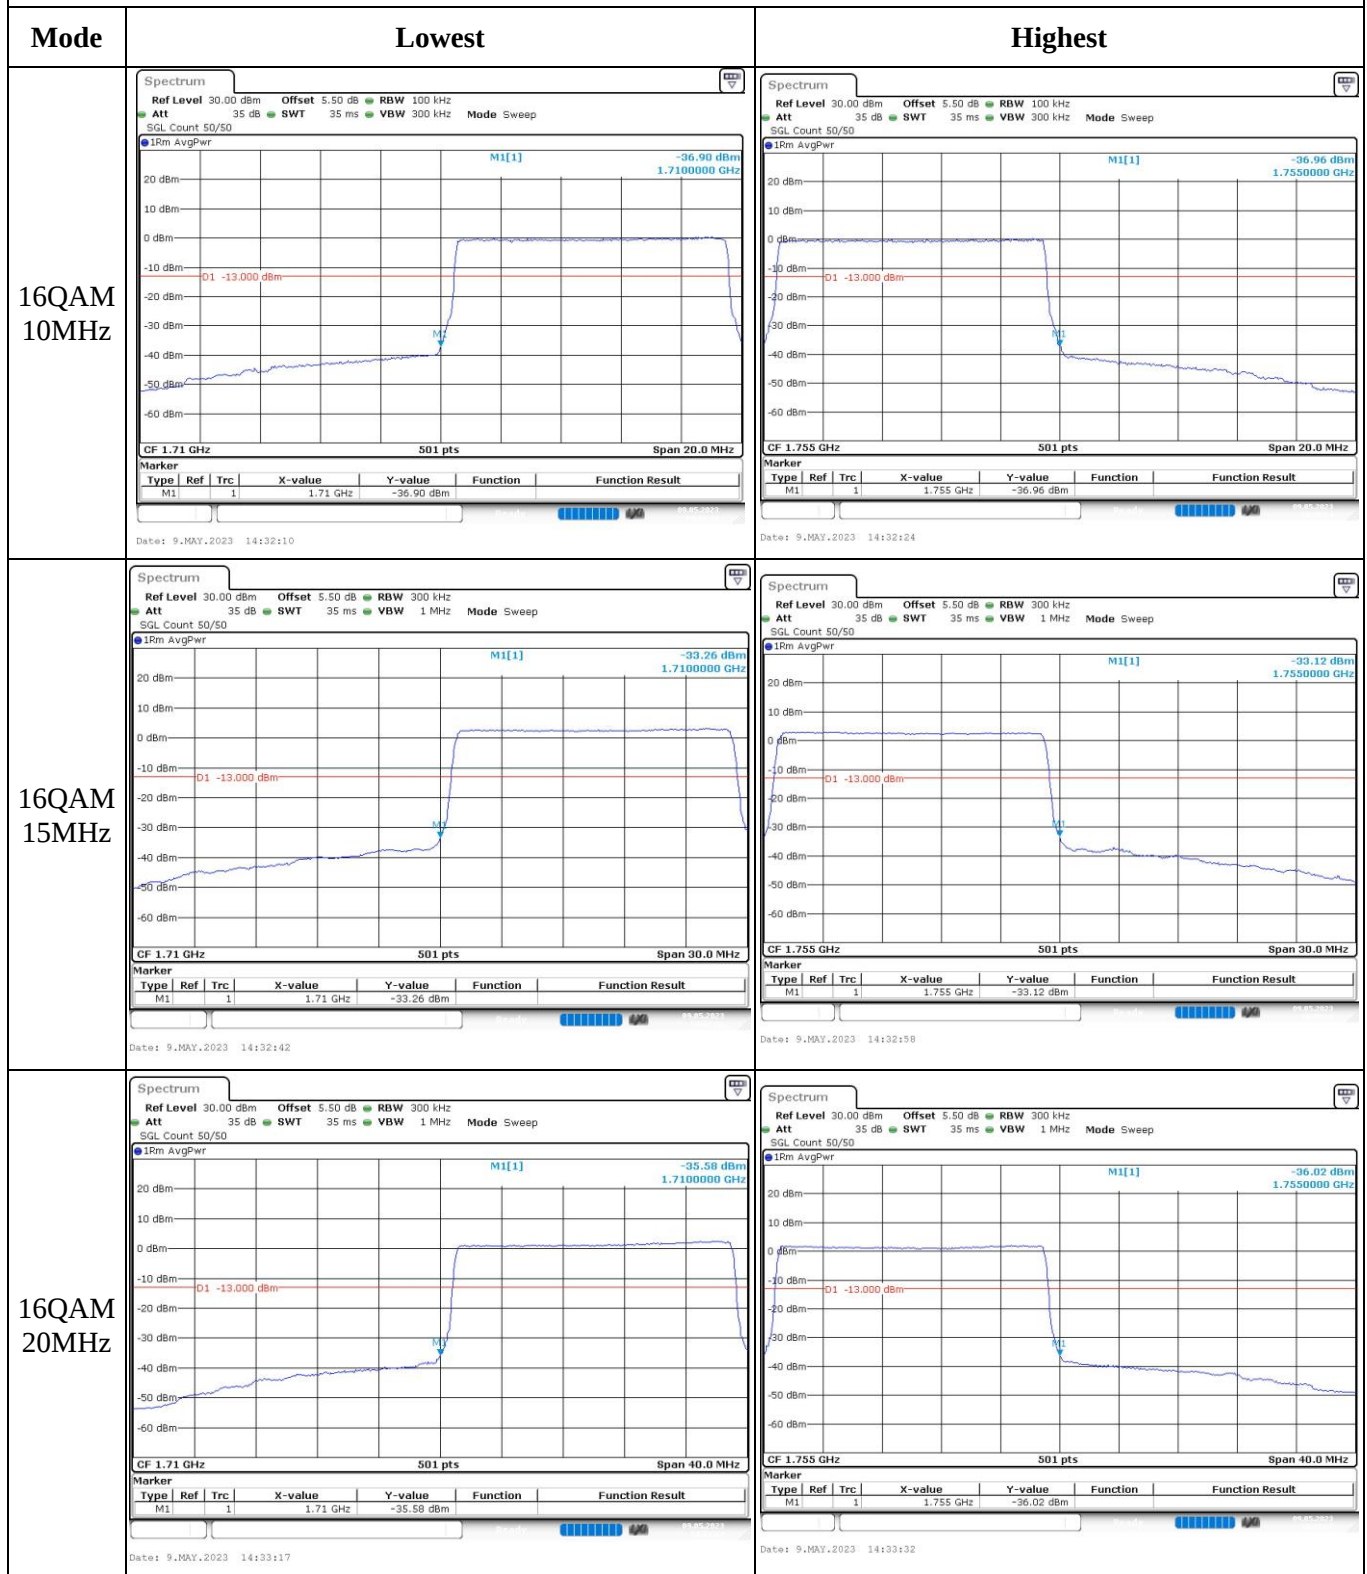

4.8 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	25LX_4	Test Date:	2023/05/09~2023/05/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.6~25.9	Relative Humidity: (%)	41~55	ATM Pressure: (kPa)	100.6~102.1
-------------------	-----------	------------------------	-------	---------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:**FCC §2.1046; § 22.913 (a)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	21.61	21.62	21.31	18.6	38.45
	RB1#3	21.59	21.63	21.22		
	RB1#5	21.52	21.61	21.24		
	RB3#0	21.63	21.66	21.25		
	RB3#3	21.66	21.65	21.13		
	RB6#0	20.62	20.75	20.1		
1.4MHz 16QAM	RB1#0	21.21	21.24	20.35	18.4	38.45
	RB1#3	21.14	21.39	20.06		
	RB1#5	21.14	21.46	20.02		
	RB3#0	20.79	20.61	20.29		
	RB3#3	20.84	20.65	20.25		
	RB6#0	19.87	19.56	19.84		
3MHz QPSK	RB1#0	21.61	21.62	21.26	18.59	38.45
	RB1#8	21.63	21.65	21.24		
	RB1#14	21.5	21.65	21.2		
	RB6#0	20.7	20.58	20.21		
	RB6#9	20.59	20.76	20.23		
	RB15#0	20.76	20.8	20.25		
3MHz 16QAM	RB1#0	21.42	20.31	20.51	18.36	38.45
	RB1#8	21.36	20.35	20.52		
	RB1#14	21.25	20.35	20.44		
	RB6#0	19.7	20.4	19.7		
	RB6#9	20.01	19.89	19.77		
	RB15#0	19.6	19.72	19.68		
5MHz QPSK	RB1#0	21.77	21.67	21.33	18.71	38.45
	RB1#13	21.57	21.66	21.29		
	RB1#24	21.71	21.56	21.19		
	RB15#0	20.71	20.69	20.36		
	RB15#10	20.52	20.75	20.18		
	RB25#0	20.58	20.81	20.23		
5MHz 16QAM	RB1#0	20.75	20.26	19.38	17.69	38.45
	RB1#13	20.56	20.43	19.43		
	RB1#24	20.5	20.2	19.35		
	RB15#0	19.56	20.12	19.86		
	RB15#10	19.8	19.77	19.72		
	RB25#0	19.92	19.71	19.77		
10MHz QPSK	RB1#0	21.75	21.68	21.55	18.69	38.45
	RB1#25	21.64	21.68	21.33		
	RB1#49	21.64	21.43	21.08		

	RB25#0	20.6	20.64	20.85		
	RB25#25	20.72	20.54	20.26		
	RB50#0	20.65	20.79	20.5		
10MHz 16QAM	RB1#0	21.34	20.15	20.65	18.28	38.45
	RB1#25	21.3	20.3	20.58		
	RB1#49	21.27	20.42	20.37		
	RB25#0	19.96	20.3	19.84		
	RB25#25	19.81	19.8	19.7		
	RB50#0	19.74	19.76	19.36		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15

Result: Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	5.25	4.49	5.28	13
	RB50#0	5.07	5.19	5.16	13
10MHz 16QAM	RB1#0	5.97	5.51	6.26	13
	RB50#0	5.97	6.03	6.06	13
Result:					Pass

FCC §2.1049, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.102	1.096	1.26	1.254	1.254
1.4MHz 16QAM	1.09	1.102	1.102	1.254	1.254	1.266
3MHz QPSK	2.695	2.683	2.695	3	3.012	2.988
3MHz 16QAM	2.683	2.683	2.695	2.988	3.024	3
5MHz QPSK	4.511	4.511	4.511	5.02	5	5
5MHz 16QAM	4.531	4.531	4.511	5.02	5.02	4.98
10MHz QPSK	8.942	8.982	8.942	9.72	9.76	9.76
10MHz 16QAM	8.982	8.982	8.942	9.76	9.92	9.76

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
---------	---

FCC §2.1051, §22.917(a):Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
---------	--

FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	4.81	0.006	2.5
	-20	3.85	-9.97	-0.012	2.5
	-10	3.85	-6.13	-0.007	2.5
	0	3.85	6.17	0.007	2.5
	10	3.85	7.92	0.009	2.5
	20	3.85	6.46	0.008	2.5
	30	3.85	-6.52	-0.008	2.5
	40	3.85	7.18	0.009	2.5
	50	3.85	-9.7	-0.012	2.5
Frequency Stability vs. Voltage	20	3.6	-8.17	-0.010	2.5
	20	4.4	-7.05	-0.008	2.5
				Result:	Pass

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature(°C)	Voltage(V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	-30	-0.036	2.5
	-20	3.85	-6.68	-0.008	2.5
	-10	3.85	9.77	0.012	2.5
	0	3.85	-7.62	-0.009	2.5
	10	3.85	-9.91	-0.012	2.5
	20	3.85	-9.82	-0.012	2.5
	30	3.85	-6.68	-0.008	2.5
	40	3.85	-8.86	-0.011	2.5
	50	3.85	5.67	0.007	2.5
Frequency Stability vs. Voltage	20	3.6	6.05	0.007	2.5
	20	4.4	7.52	0.009	2.5
				Result:	Pass

Test Plots(Note: The 5.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

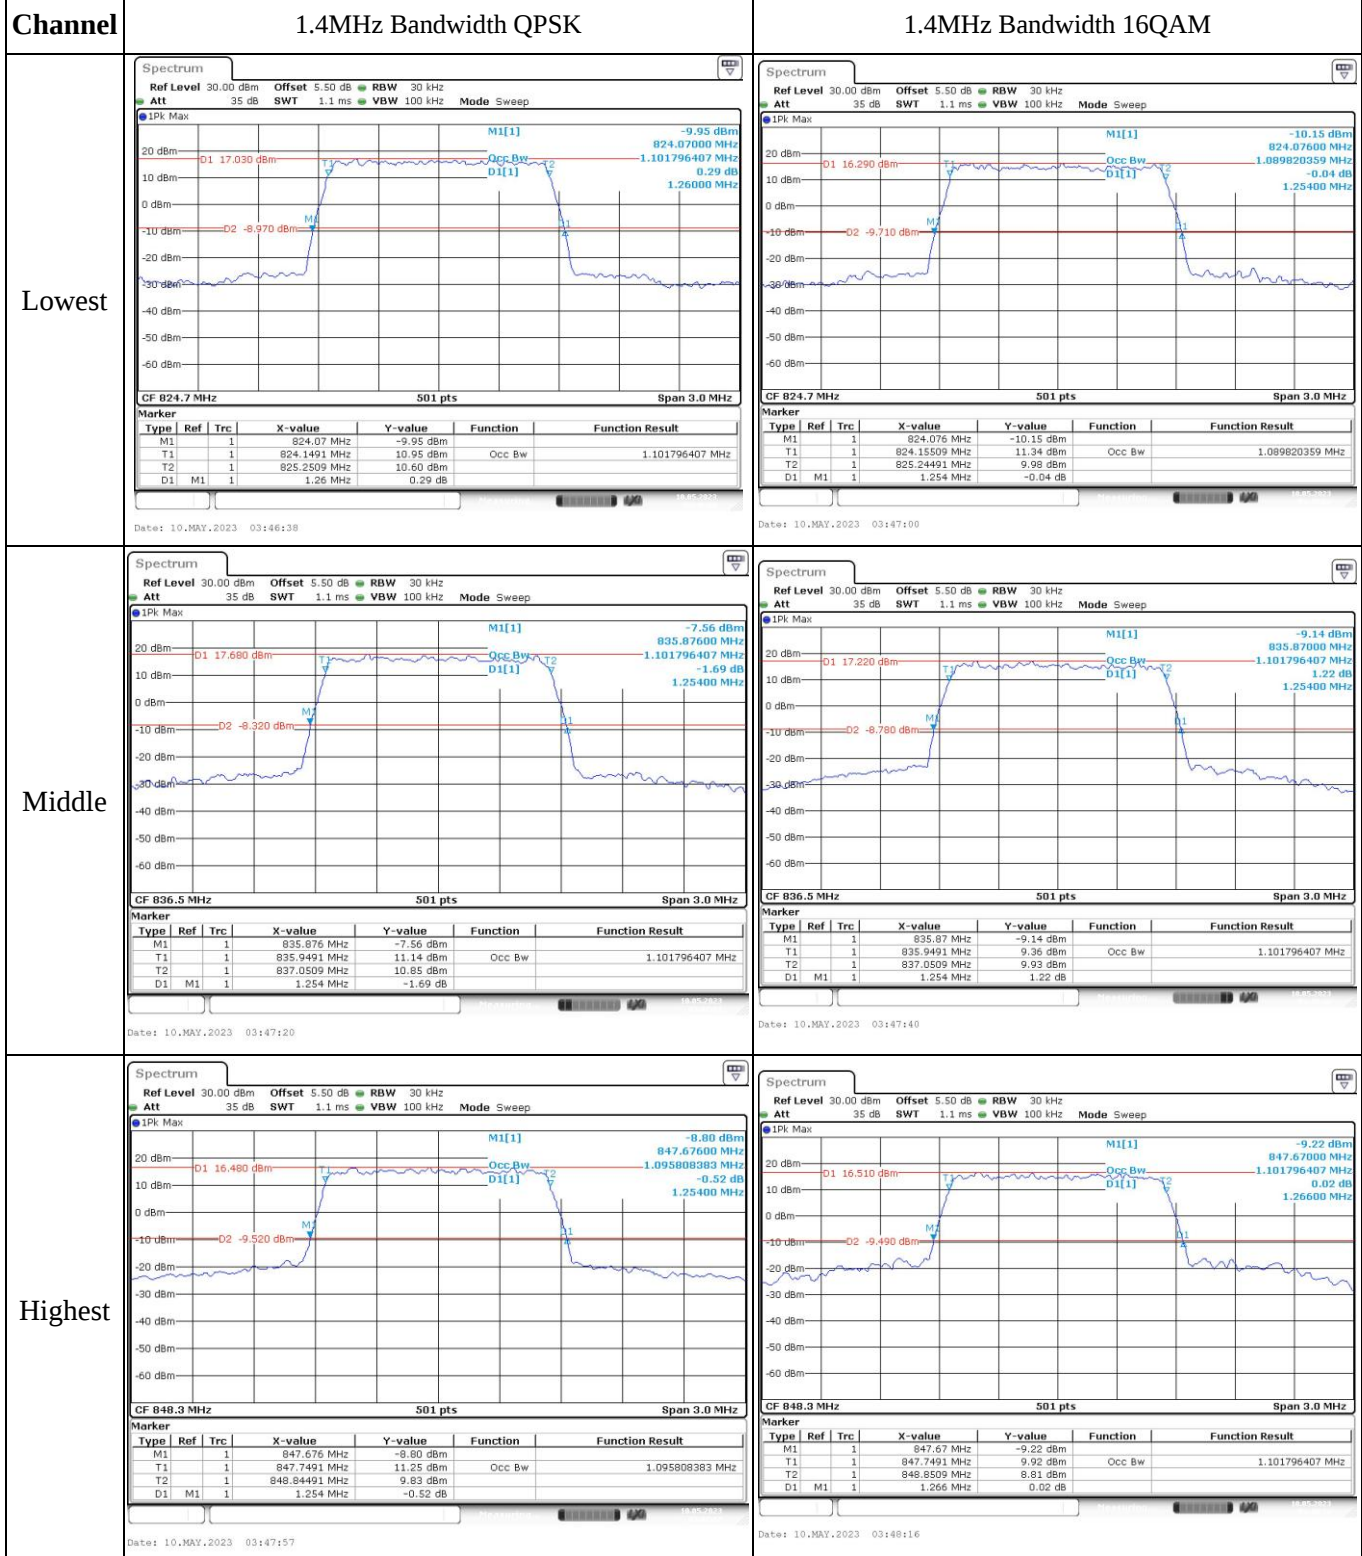



Occupied Bandwidth

Channel



3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM



Lowest

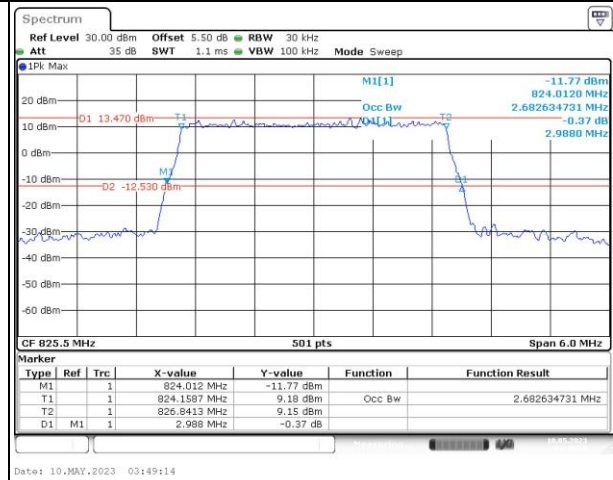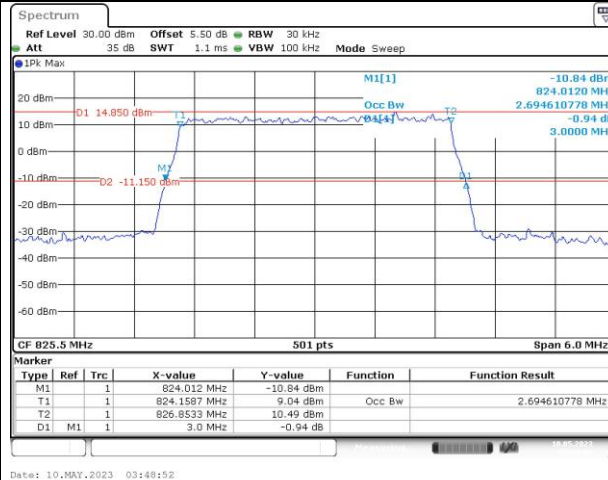

Middle

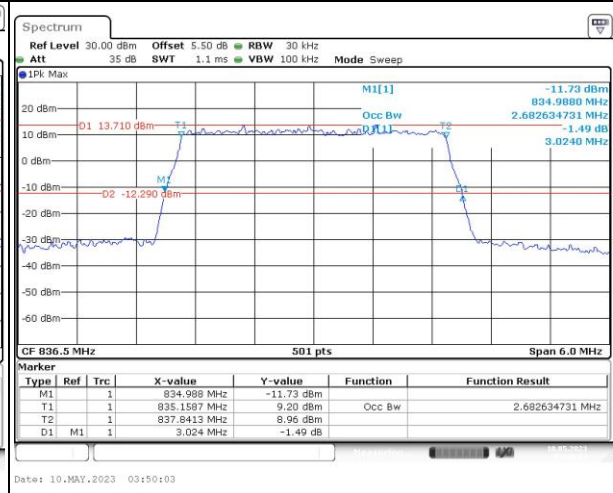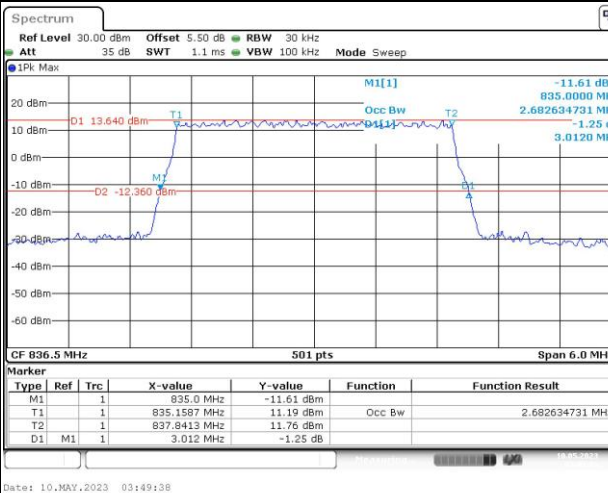

Highest

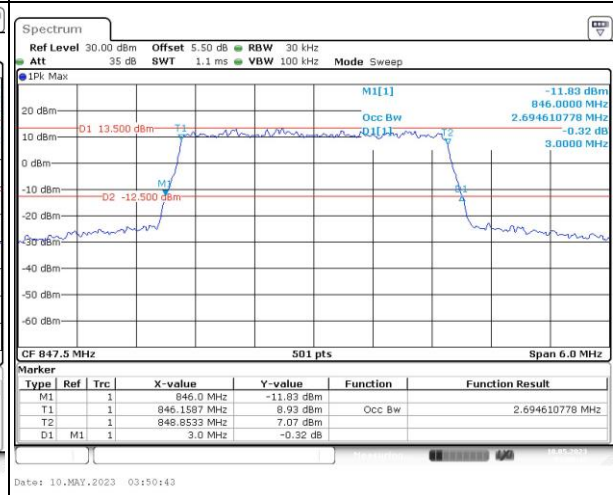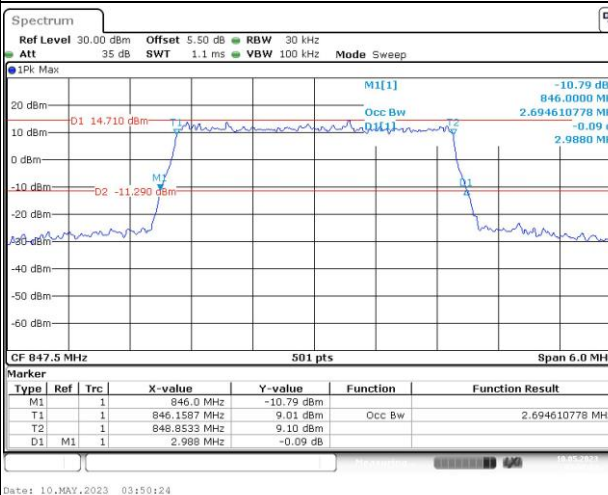



Occupied Bandwidth

Channel



5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM



Lowest

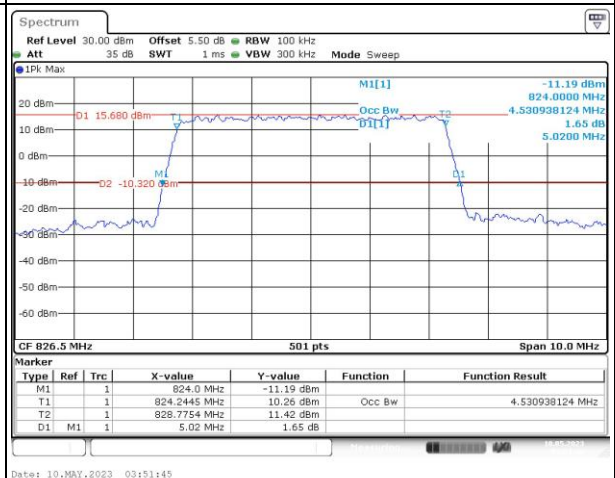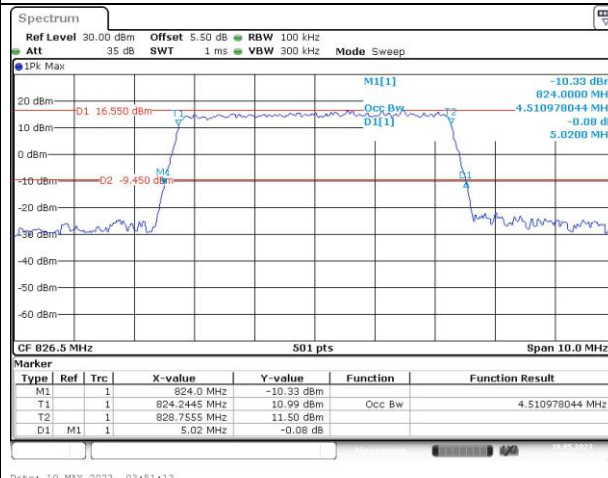

Middle

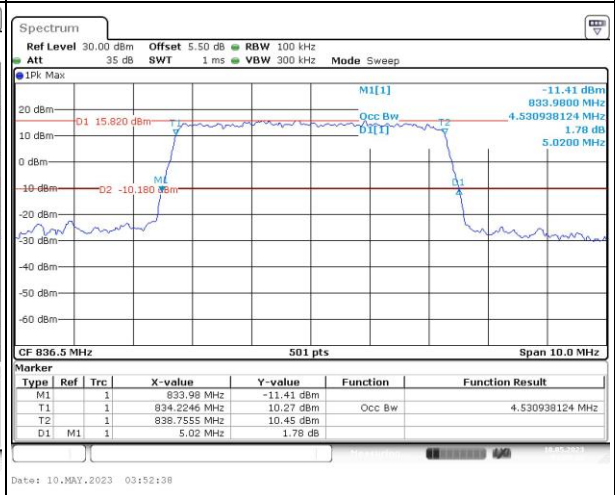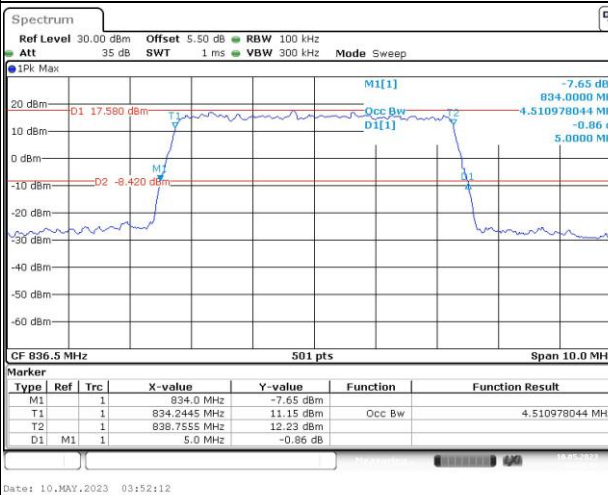

Highest

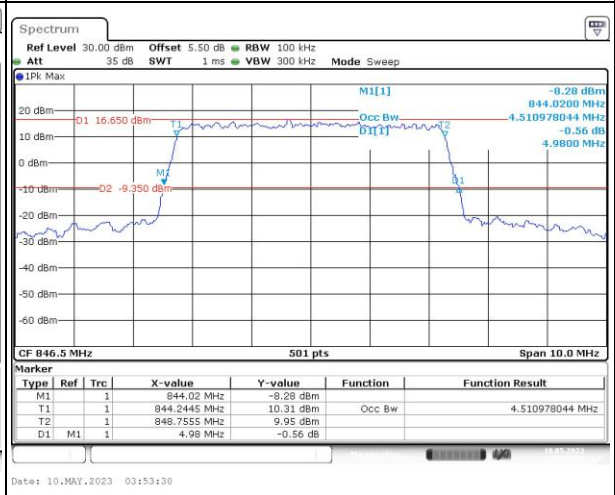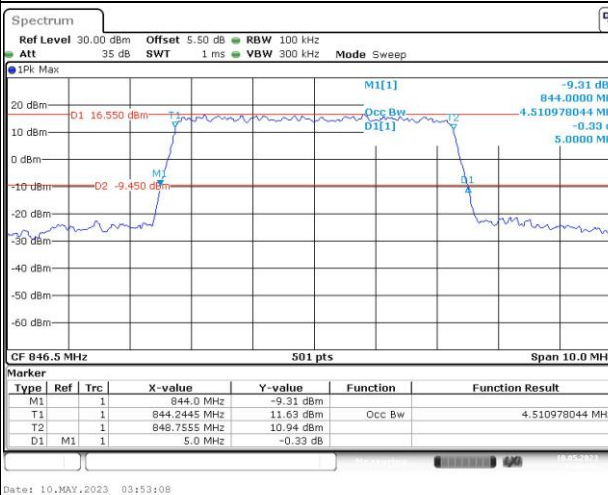



Occupied Bandwidth

Channel



10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM



Lowest

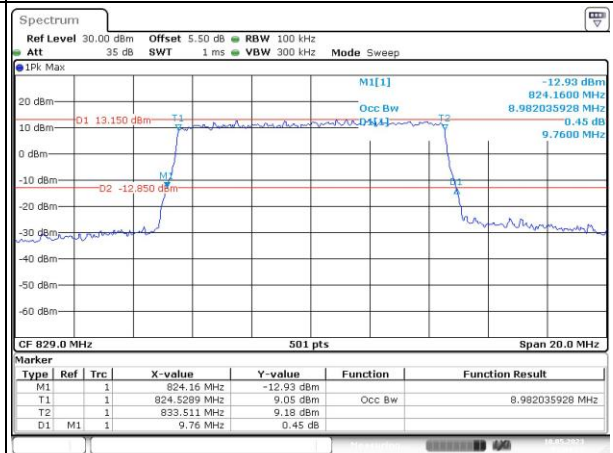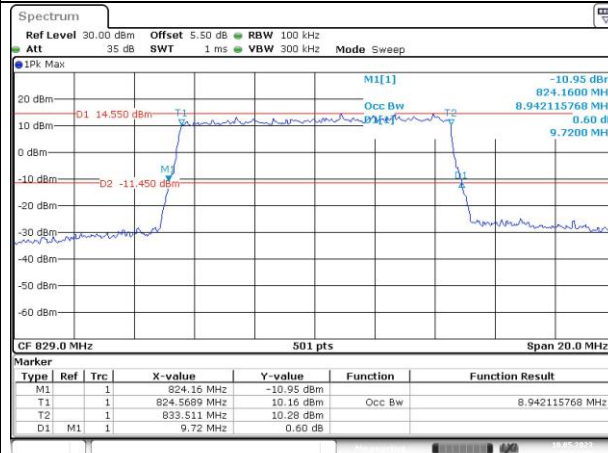

Middle

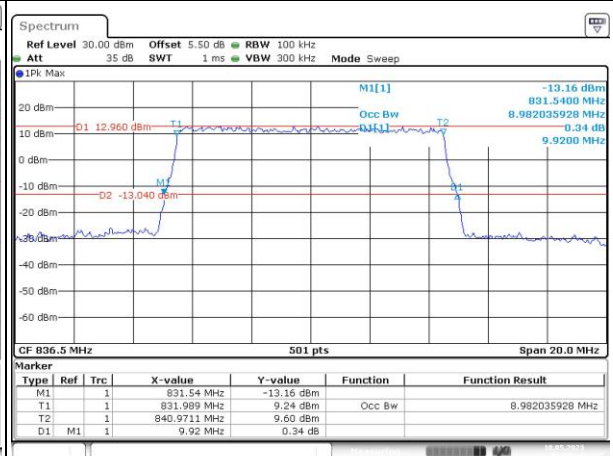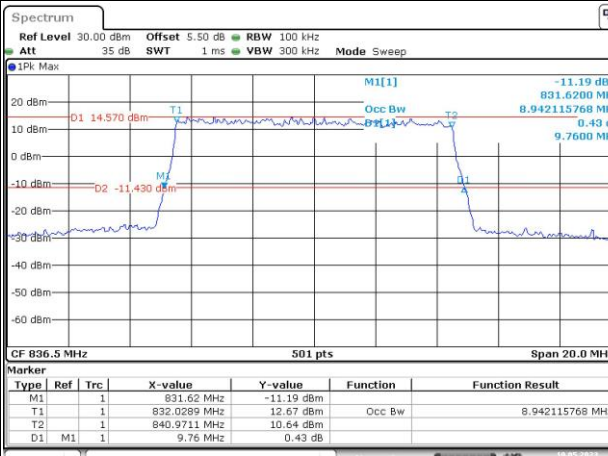

Highest

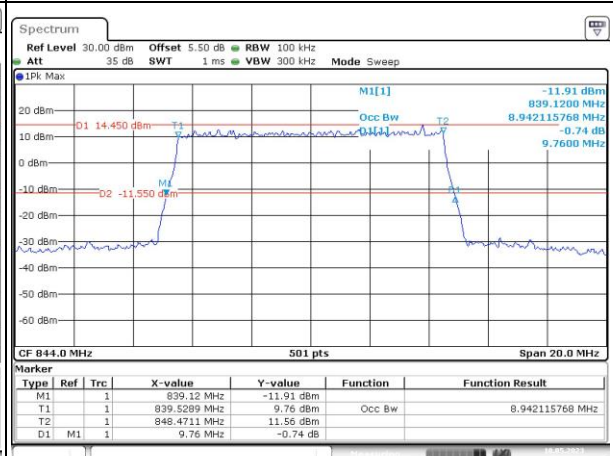
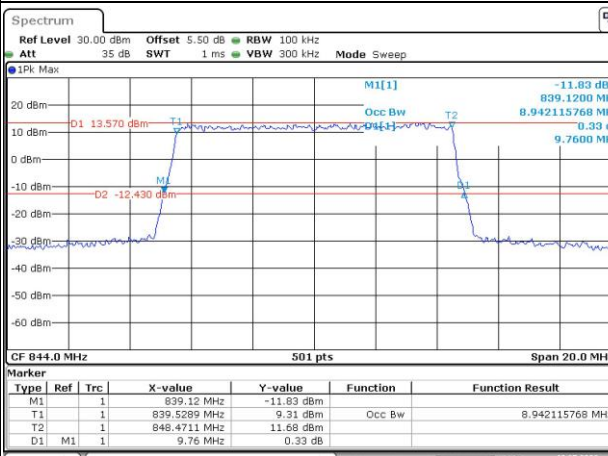


Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

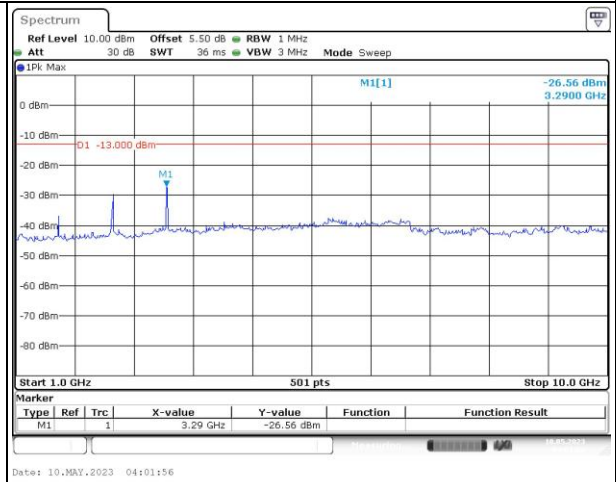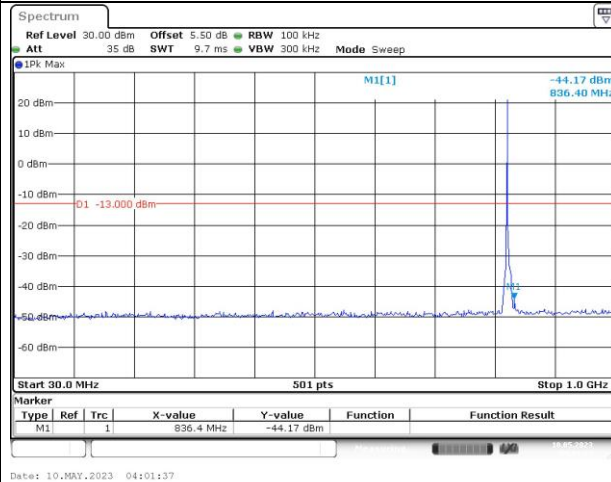

Middle

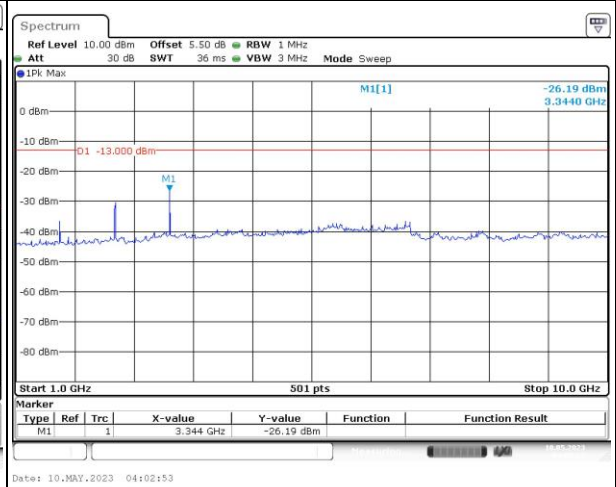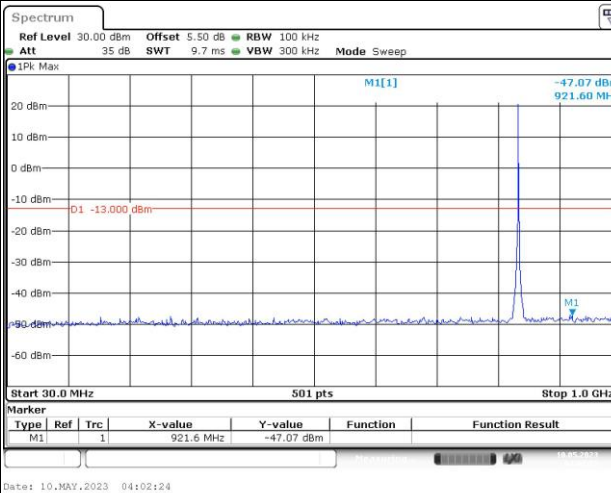

Highest

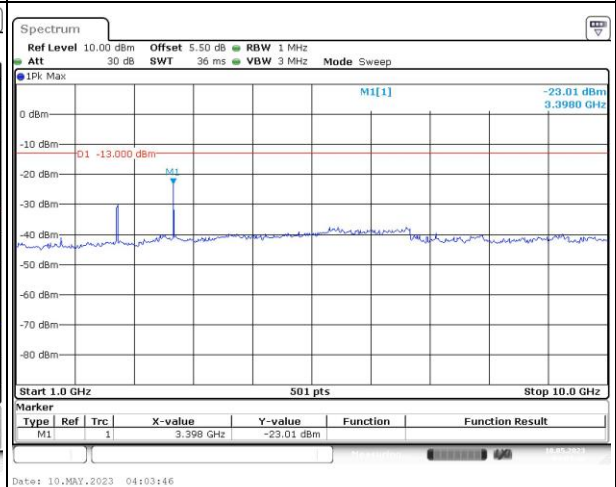
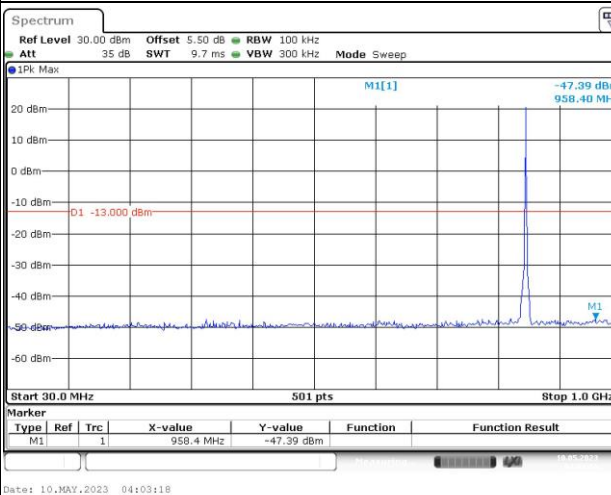


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

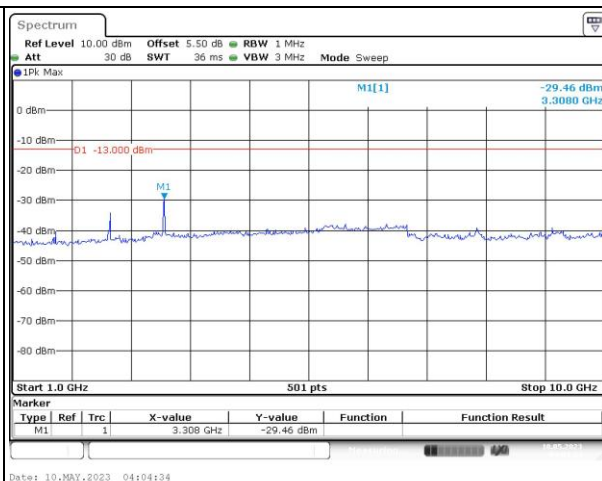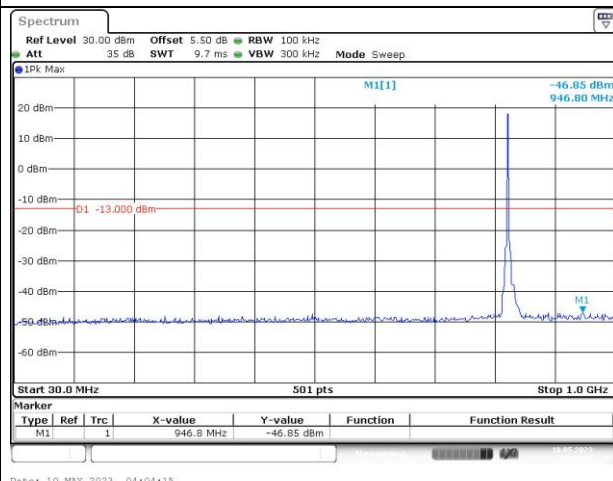

Middle

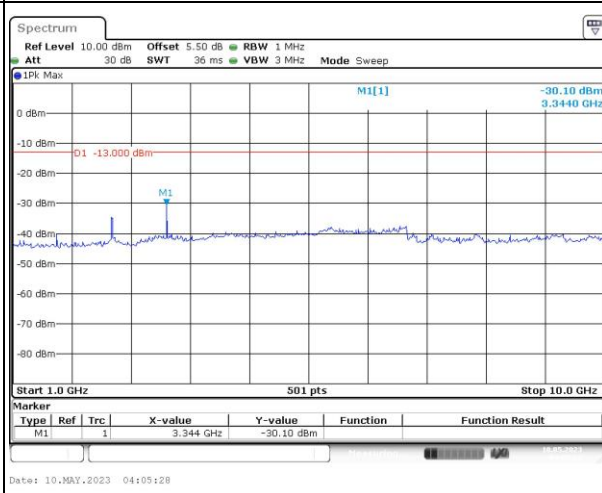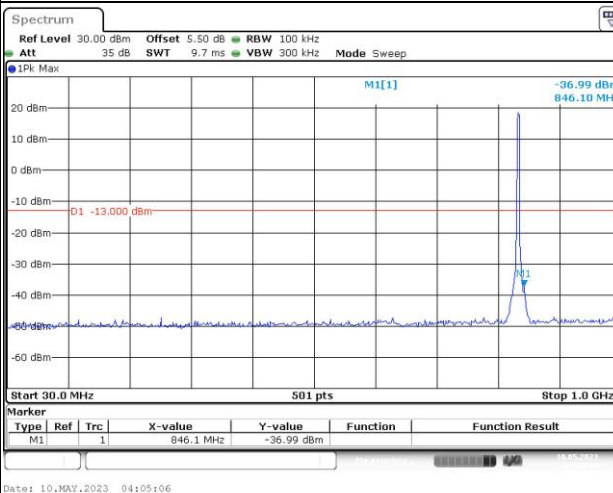

Highest

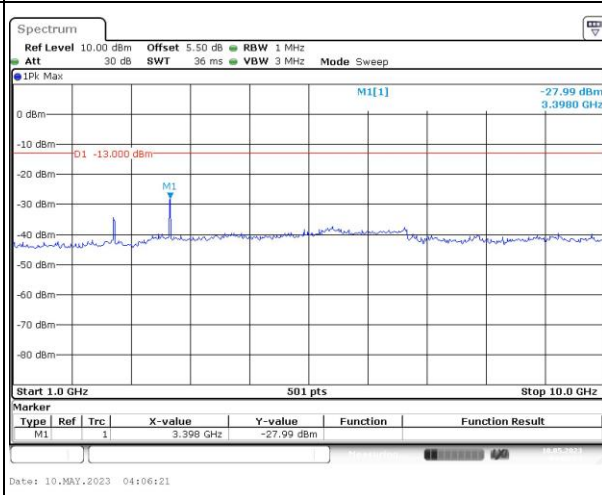
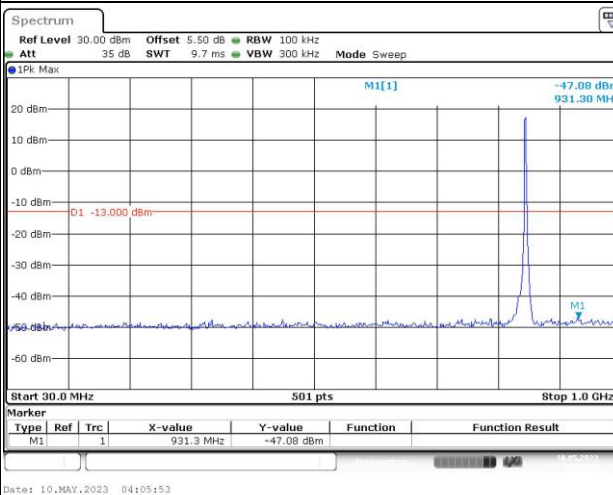


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

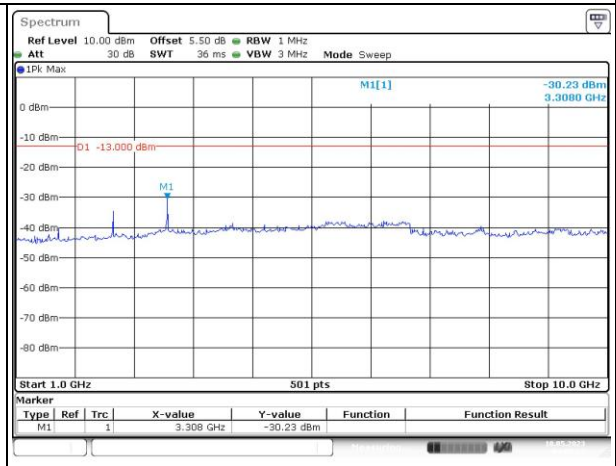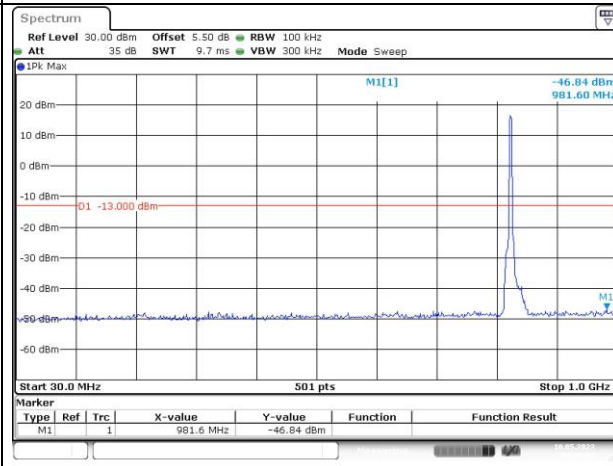

Middle

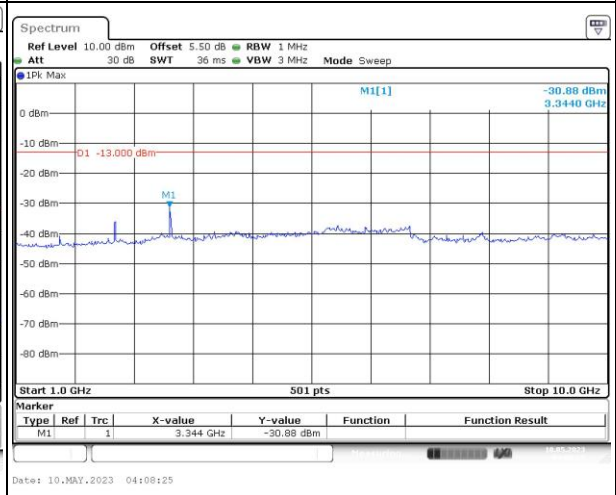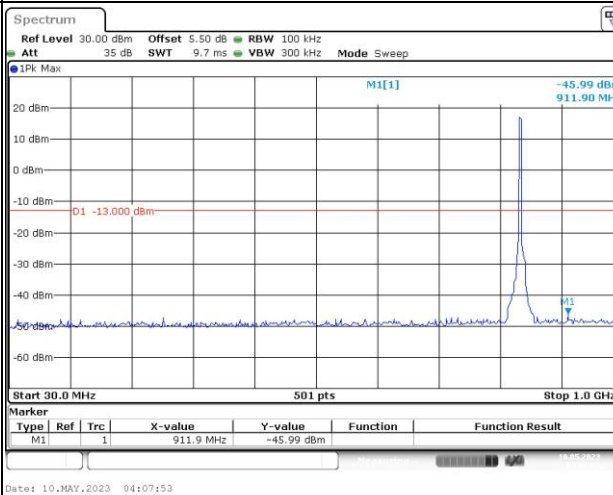

Highest

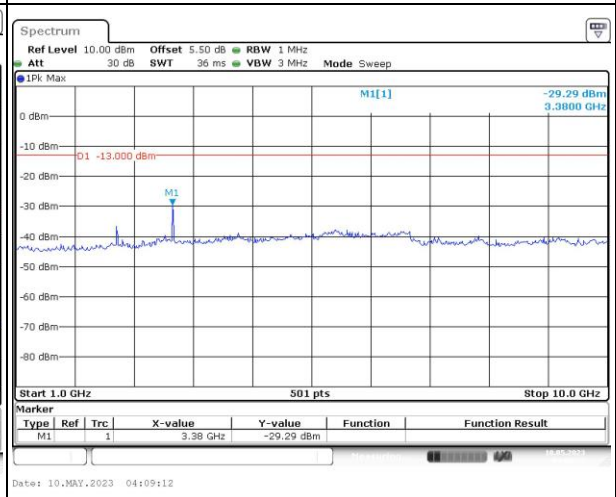
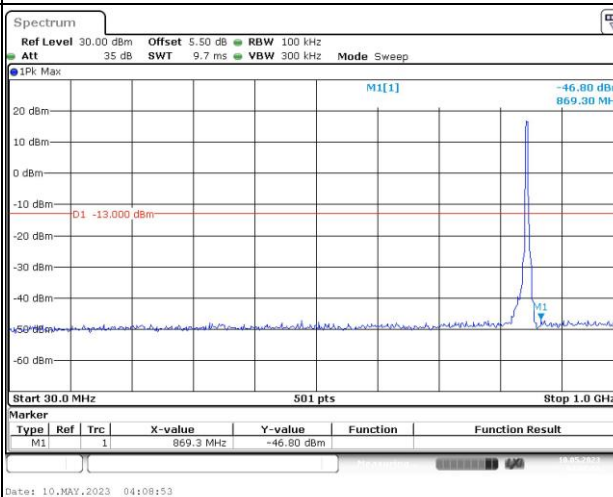


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

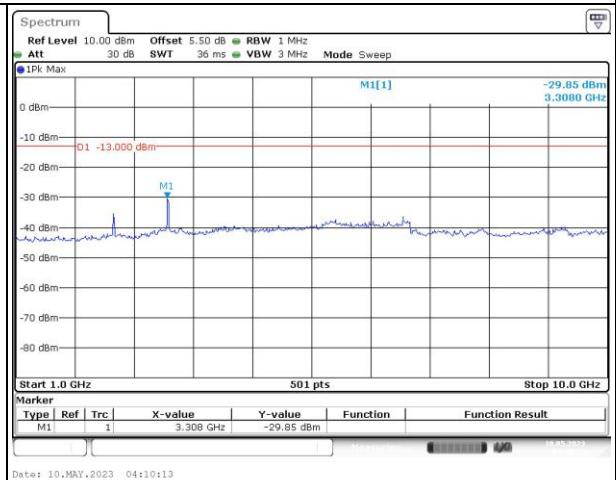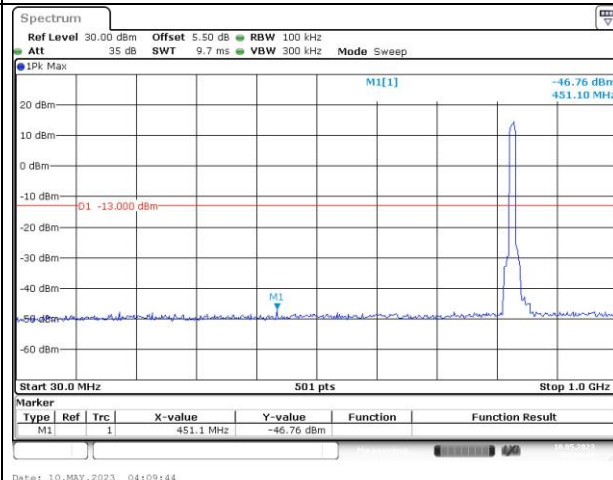


Middle

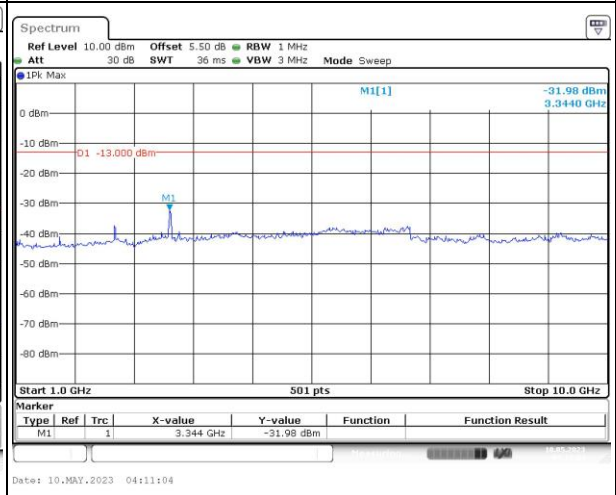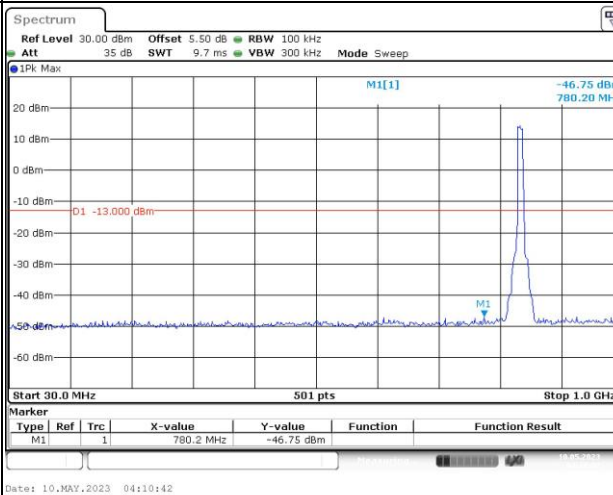


Highest

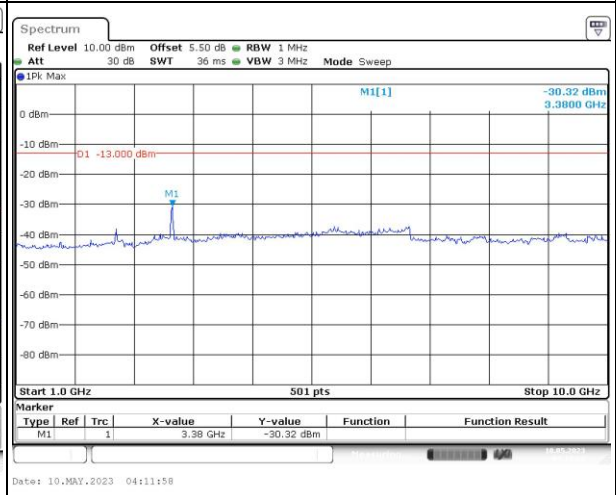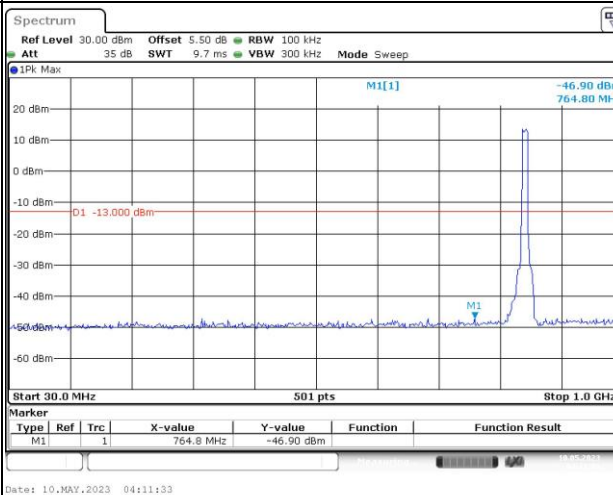


Out of band emission, Band Edge

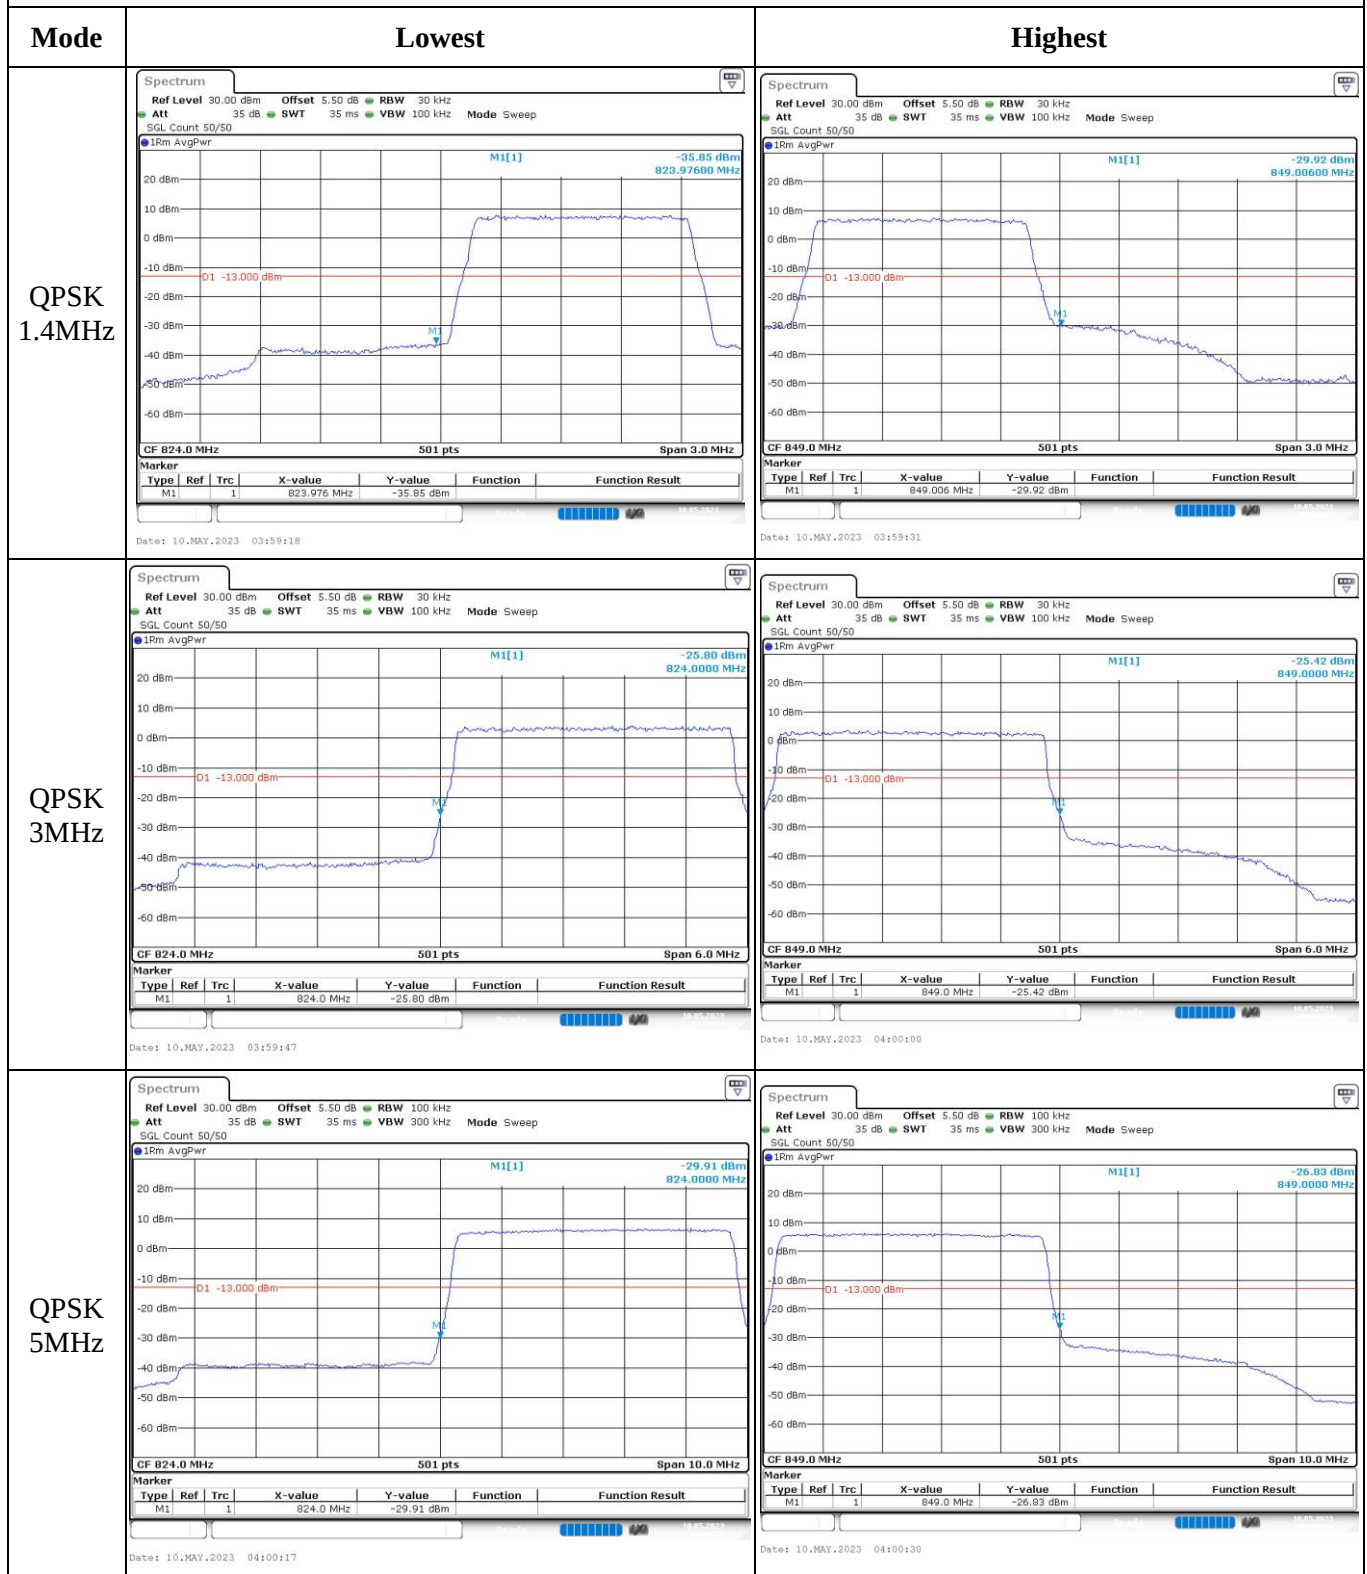


Out of band emission, Band Edge

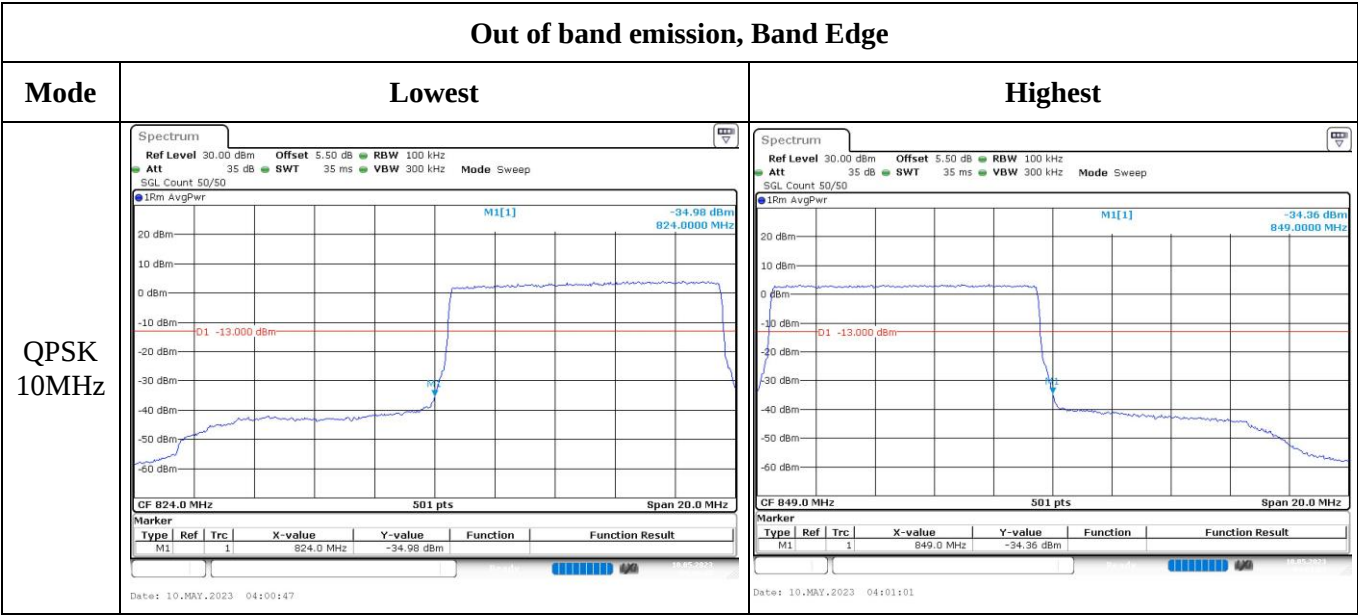

Out of band emission, Band Edge

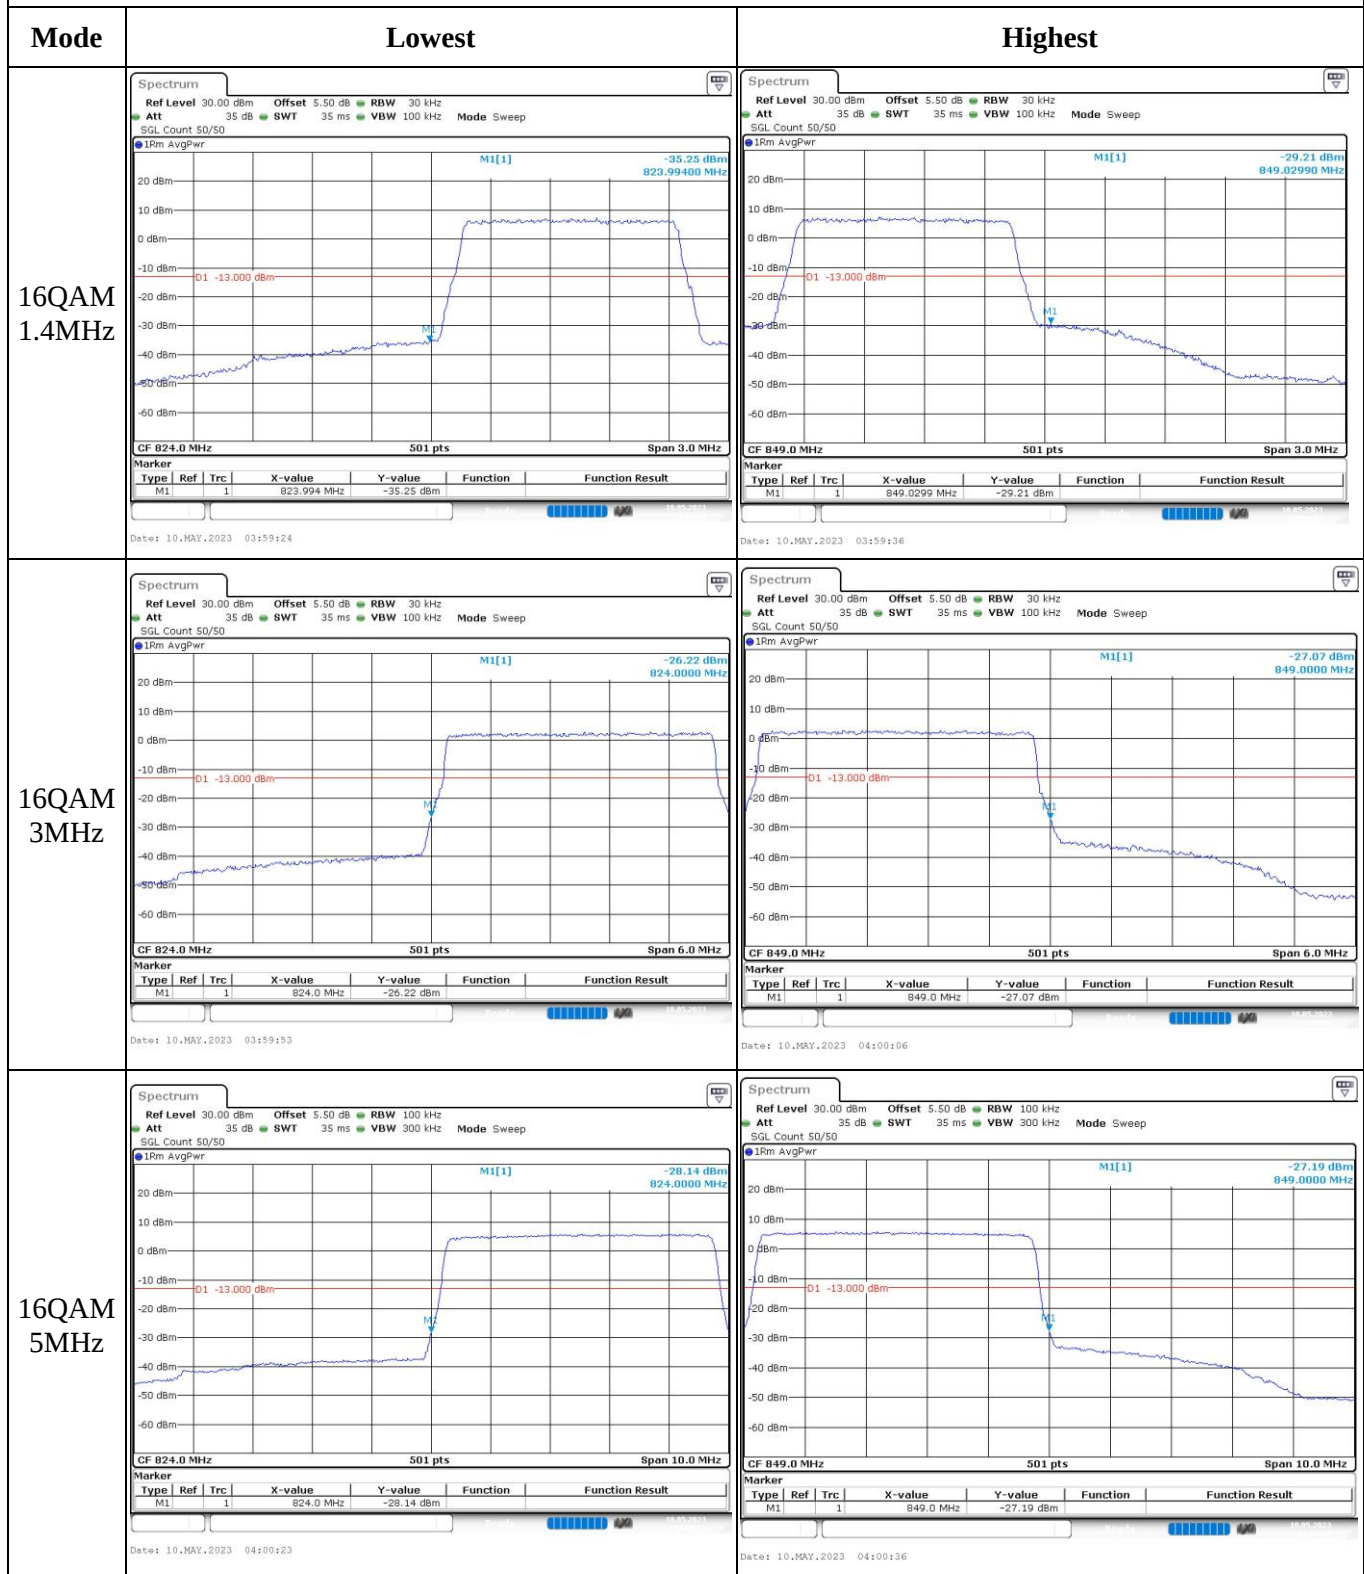

Out of band emission, Band Edge

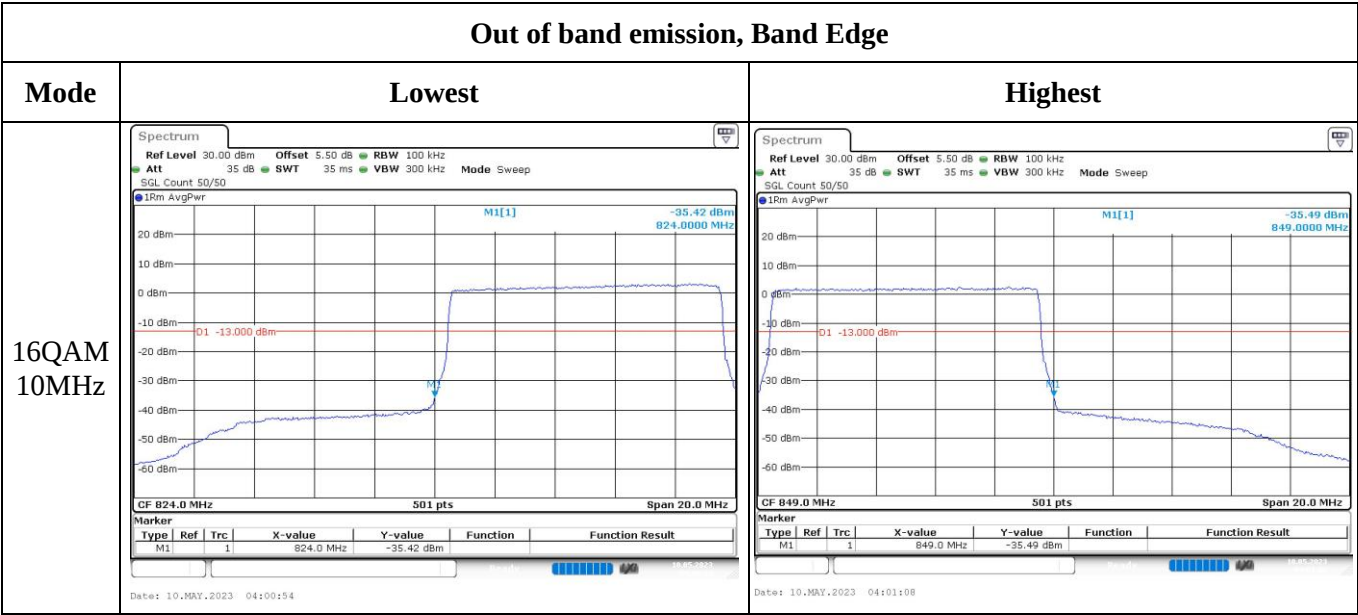

4.9 Antenna Port Test Data and Results for LTE Band 7

Serial Number:	25LX_4	Test Date:	2023/05/09~2023/05/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.6~25.9	Relative Humidity: (%)	41~55	ATM Pressure: (kPa)	100.6~102.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2502.5	2535	2567.5
10MHz	2505	2535	2565
15MHz	2507.5	2535	2562.5
20MHz	2510	2535	2560

Test Data:**FCC §2.1046; § 27.50(h)(2)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.34	22.28	22.23	23.52	33
	RB1#13	22.29	22.38	22.24		
	RB1#24	22.4	22.39	22.17		
	RB15#0	21.3	21.37	21.31		
	RB15#10	21.3	21.32	21.32		
	RB25#0	21.26	21.32	21.27		
5MHz 16QAM	RB1#0	21.03	20.95	20.6	22.27	33
	RB1#13	21.09	20.95	20.51		
	RB1#24	21.15	20.99	20.65		
	RB15#0	20.2	20.53	20.45		
	RB15#10	20.21	20.48	20.42		
	RB25#0	20.34	20.33	20.44		
10MHz QPSK	RB1#0	22.31	22.34	22.2	23.55	33
	RB1#25	22.35	22.31	22.16		
	RB1#49	22.43	22.35	22.2		
	RB25#0	21.3	21.41	21.34		
	RB25#25	21.26	21.36	21.15		
	RB50#0	21.39	21.33	21.26		
10MHz 16QAM	RB1#0	21.31	21.22	21.42	22.62	33
	RB1#25	21.37	21.19	21.48		
	RB1#49	21.5	21.17	21.43		
	RB25#0	20.44	20.65	20.48		
	RB25#25	20.44	20.65	20.38		
	RB50#0	20.52	20.5	20.5		
15MHz QPSK	RB1#0	22.4	22.38	22.31	23.6	33
	RB1#38	22.47	22.43	22.2		
	RB1#74	22.46	22.48	22.26		
	RB36#0	21.33	21.41	21.46		
	RB36#39	21.29	21.41	21.28		
	RB75#0	21.39	21.5	21.41		
15MHz 16QAM	RB1#0	22.21	21.82	21.58	23.39	33
	RB1#38	22.15	21.86	21.5		
	RB1#74	22.27	21.88	21.56		
	RB36#0	20.51	20.58	20.6		
	RB36#39	20.49	20.58	20.57		
	RB75#0	20.51	20.58	20.52		
20MHz QPSK	RB1#0	22.53	22.34	22.38	23.72	33
	RB1#50	22.55	22.37	22.42		
	RB1#99	22.6	22.37	22.38		

20MHz 16QAM	RB50#0	21.38	21.48	21.47	23.44	33
	RB50#50	21.43	21.42	21.36		
	RB100#0	21.33	21.38	21.34		
	RB1#0	21.55	22.26	21.36		
	RB1#50	21.66	22.3	21.4		
	RB1#99	21.65	22.32	21.42		
	RB50#0	20.42	20.51	20.62		
	RB50#50	20.6	20.59	20.56		
	RB100#0	20.48	20.56	20.52		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gt(dBi)

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	4.99	4.52	5.1	13
	RB100#0	4.32	3.88	4.17	13
20MHz 16QAM	RB1#0	5.91	5.33	5.86	13
	RB100#0	5.83	5.54	5.74	13
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.511	4.511	4.531	5.02	4.98	5
5MHz 16QAM	4.531	4.551	4.491	5.02	5.02	5
10MHz QPSK	8.942	8.942	8.982	9.76	9.36	9.76
10MHz 16QAM	8.942	8.942	8.942	9.28	9.88	9.76
15MHz QPSK	13.473	13.533	13.533	15	15.18	15.12
15MHz 16QAM	13.593	13.413	13.593	15.12	14.34	15.06
20MHz QPSK	18.044	18.044	17.964	19.68	19.84	19.68
20MHz 16QAM	18.044	17.964	18.044	19.84	19.76	19.84

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §27.53:Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2501.036	2500.00	2569.098	2570
	-20	3.85	2501.099	2500.00	2569.011	2570
	-10	3.85	2501.013	2500.00	2569.041	2570
	0	3.85	2501.008	2500.00	2569.042	2570
	10	3.85	2501.078	2500.00	2569.074	2570
	20	3.85	2501.058	2500.00	2569.022	2570
	30	3.85	2501.063	2500.00	2569.027	2570
	40	3.85	2501.048	2500.00	2569.064	2570
	50	3.85	2501.038	2500.00	2569.098	2570
Frequency Stability vs. Voltage	20	3.6	2501.071	2500.00	2569.078	2570
	20	4.4	2501.053	2500.00	2569.059	2570
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2500.943	2500.00	2569.077	2570
	-20	3.85	2500.902	2500.00	2569.120	2570
	-10	3.85	2500.953	2500.00	2569.093	2570
	0	3.85	2500.930	2500.00	2569.109	2570
	10	3.85	2500.954	2500.00	2569.120	2570
	20	3.85	2500.978	2500.00	2569.102	2570
	30	3.85	2500.963	2500.00	2569.152	2570
	40	3.85	2500.957	2500.00	2569.076	2570
	50	3.85	2500.929	2500.00	2569.122	2570
Frequency Stability vs. Voltage	20	3.6	2500.907	2500.00	2569.095	2570
	20	4.4	2500.959	2500.00	2569.137	2570
					Result:	Pass

Test Plots(Note: The 5.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

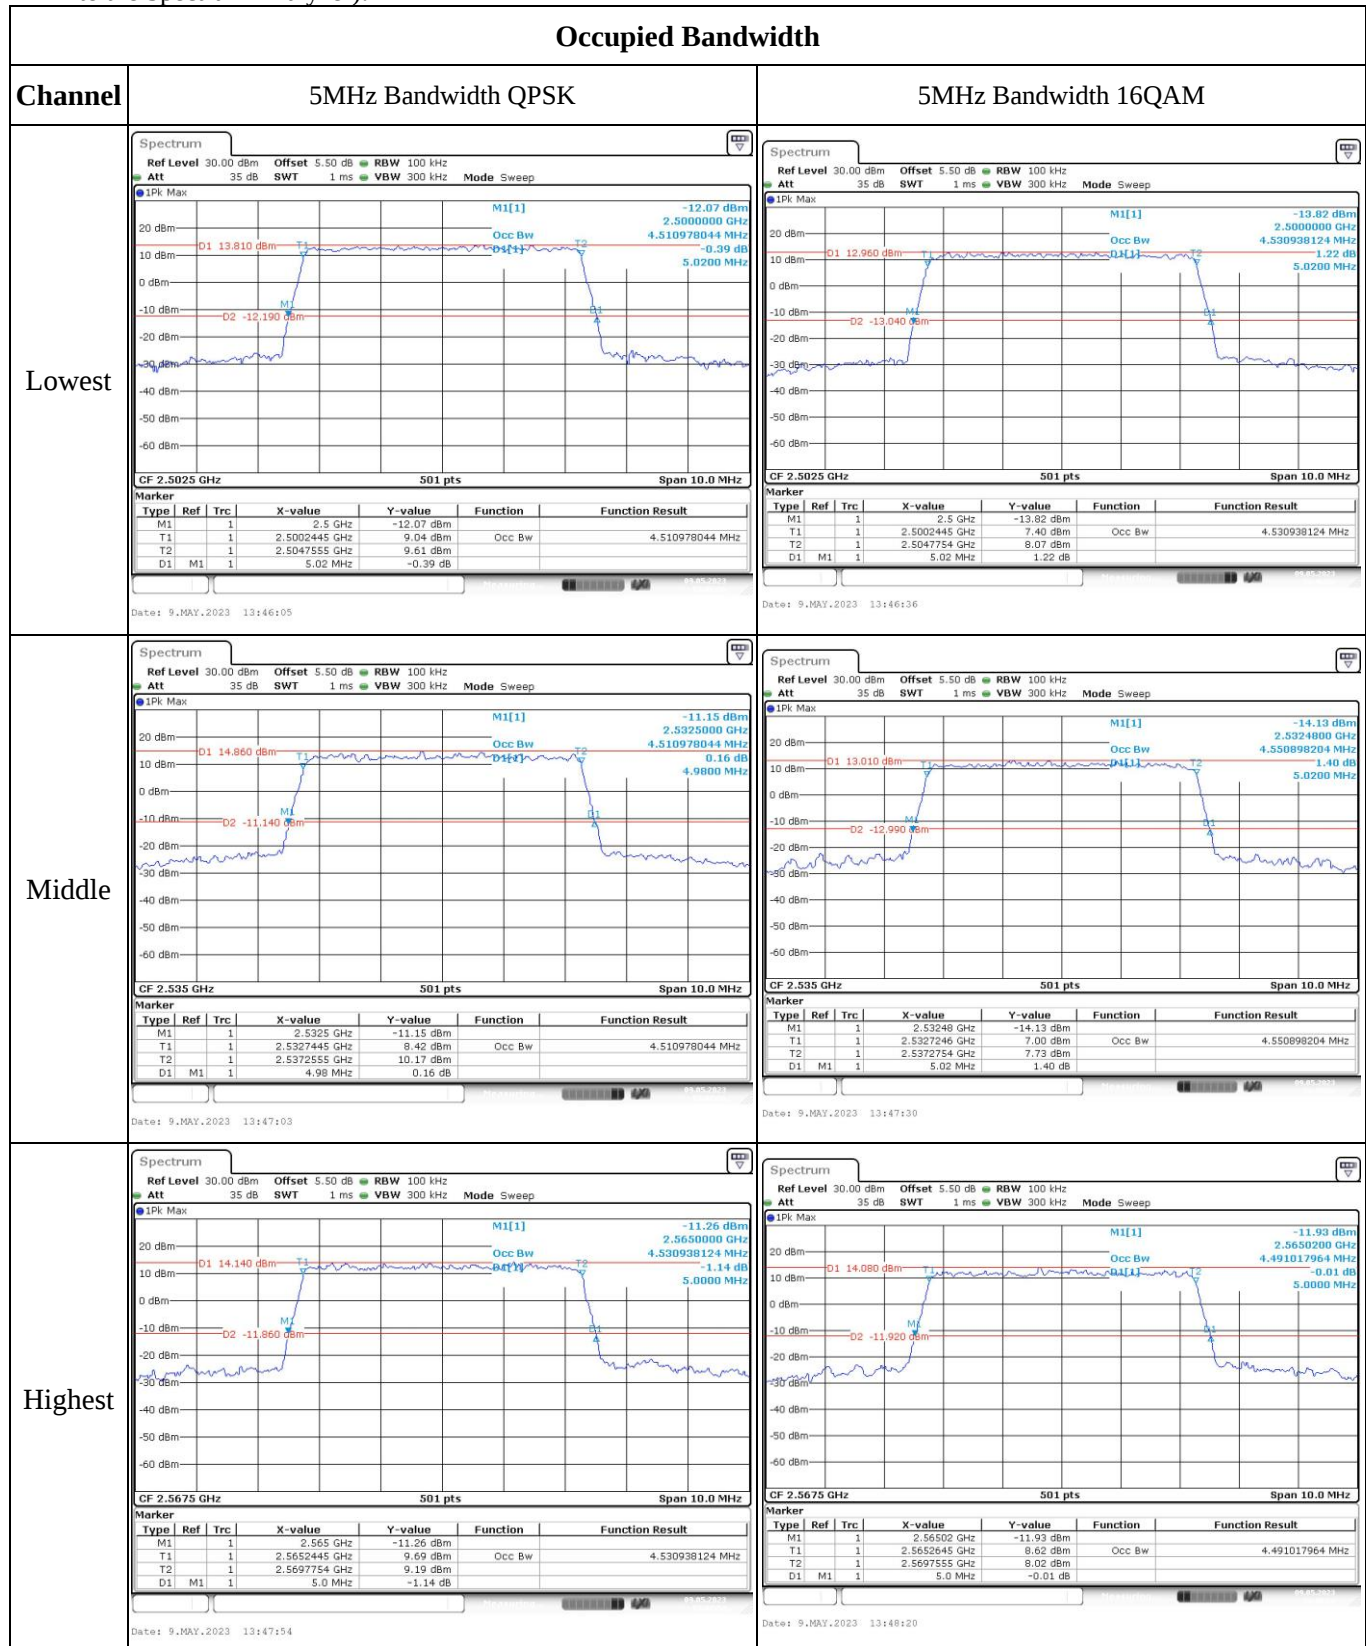



Occupied Bandwidth

Channel



10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM



Lowest

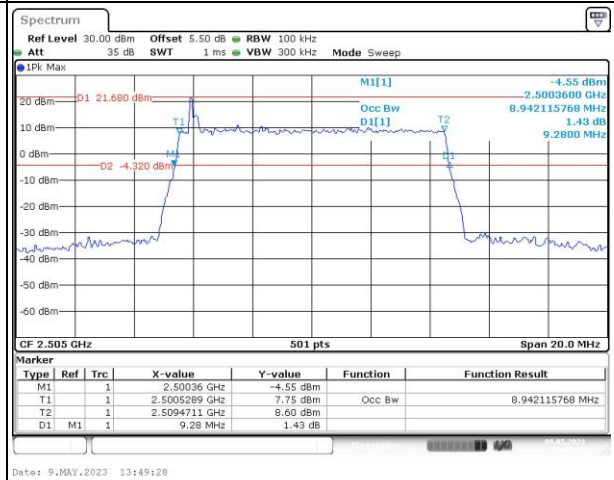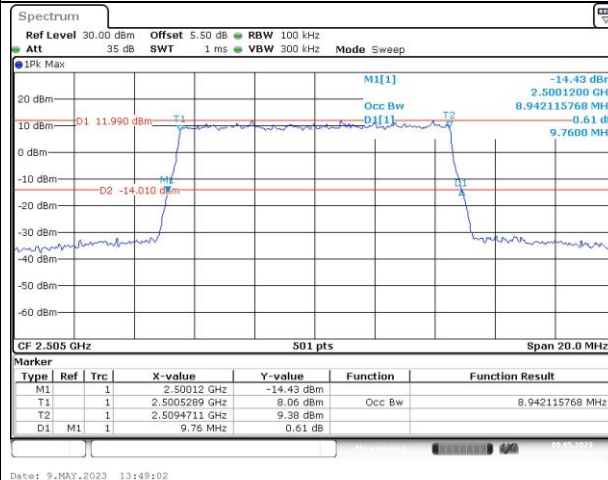

Middle

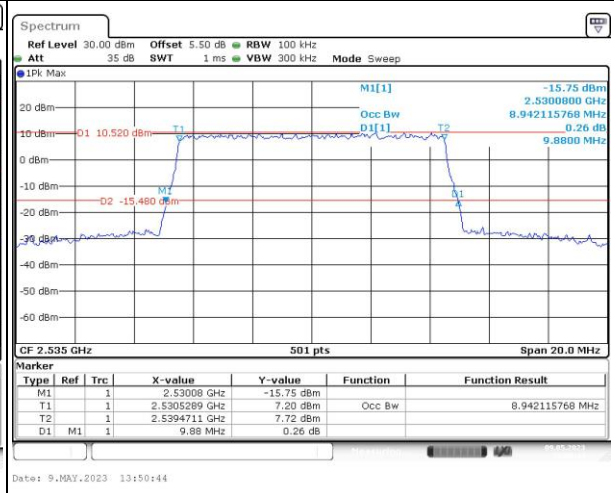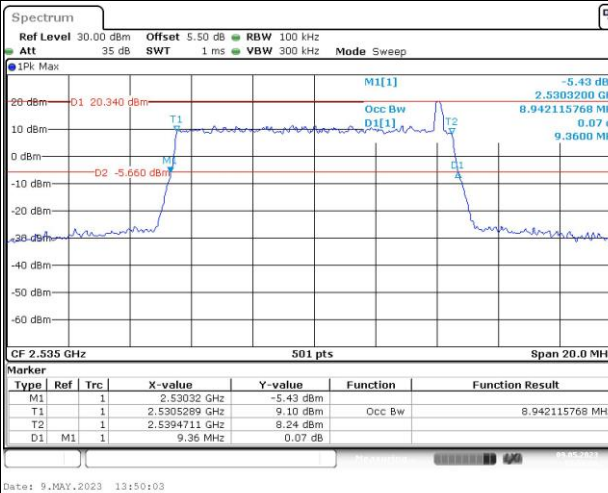

Highest

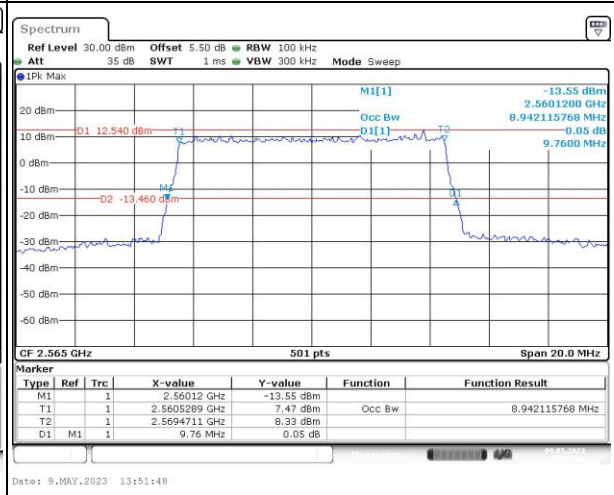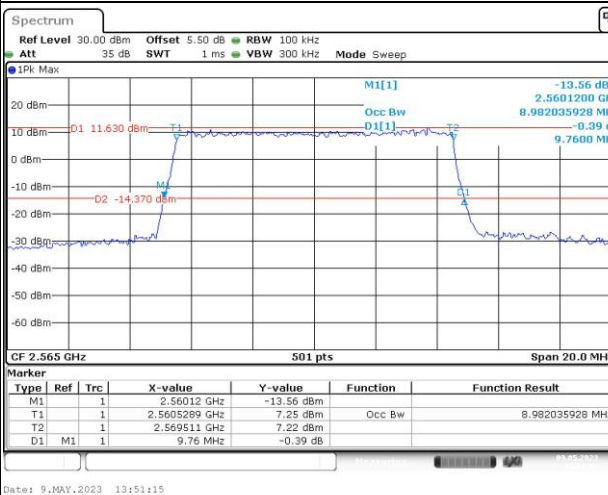



Occupied Bandwidth

Channel



15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM

Lowest

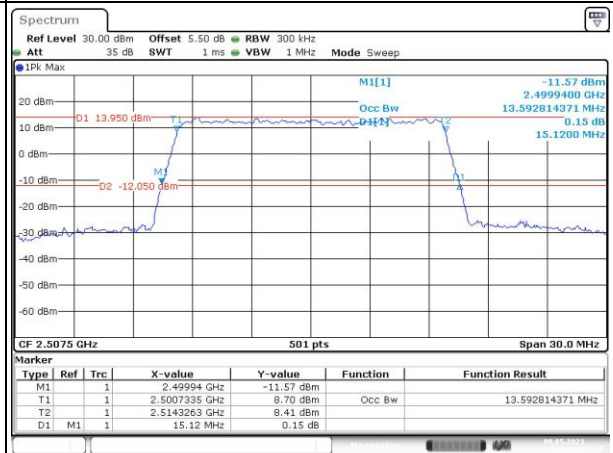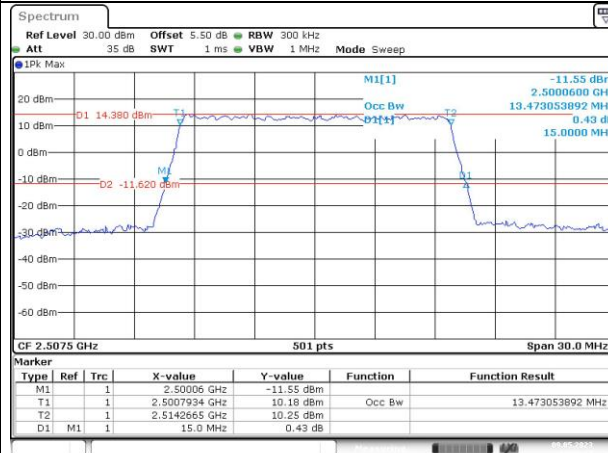

Middle

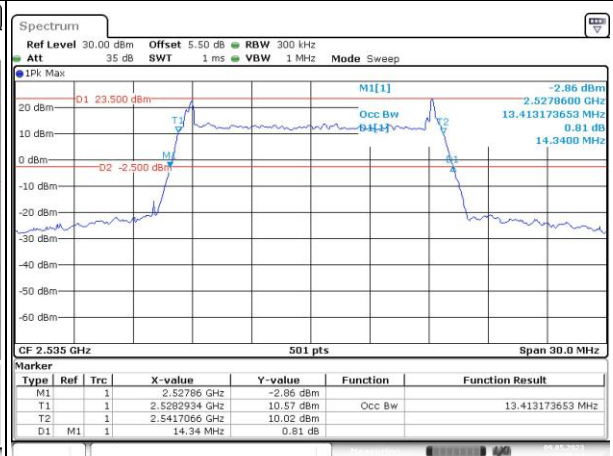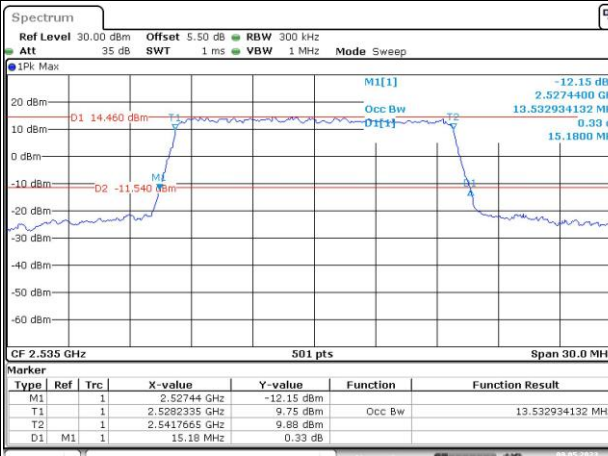

Highest

