



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	PEGATRON CORPORATION
Applicant Address	5F., NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY 112 Taiwan
FCC ID	VUICLG8202-NA
Manufacturer's company	MAINTEK COMPUTER
Manufacturer Address	233 Jinfeng Rd., Suzhou, Jiangsu, PRC

Product Name	Wireless Home Automation and Security
Brand Name	CISCO
Model Name	CLG-8202 NA; CLG-8202-WW NA
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 21, 2014
Final Test Date	Sep. 02, 2014
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02 and KDB 662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Multiple Listing.....	8
3.8. Table for Supporting Units	9
3.9. Table for Parameters of Test Software Setting	9
3.10. EUT Operation during Test	9
3.11. Duty Cycle	10
3.12. Test Configurations	11
4. TEST RESULT	13
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Power Spectral Density Measurement	20
4.4. 6dB Spectrum Bandwidth Measurement	27
4.5. Radiated Emissions Measurement	32
4.6. Emissions Measurement	51
4.7. Antenna Requirements	69
5. LIST OF MEASURING EQUIPMENTS	70
6. MEASUREMENT UNCERTAINTY.....	72
APPENDIX A. TEST PHOTOS	A1 ~ A5


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR472942AA	Rev. 01	Initial issue of report	Sep. 18, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Home Automation and Security
Brand Name : CISCO
Model No. : CLG-8202 NA; CLG-8202-WW NA
Applicant : PEGATRON CORPORATION
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 21, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

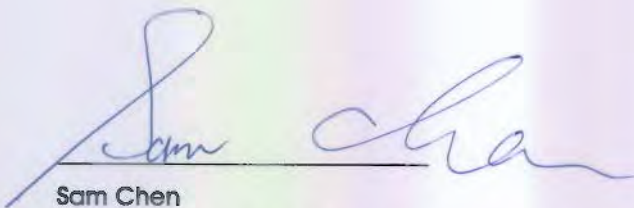

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.08 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	11.27 dB
4.3	15.247(e)	Power Spectral Density	Complies	15.27 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.13 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.30 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	IEEE 802.11n 20MHz: WLAN (2TX, 2RX) IEEE 802.11n 40MHz: WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter and button cell
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (HT20): 17.60 MHz ; MCS0 (HT40): 35.84 MHz
Maximum Conducted Output Power	MCS8 (HT20): 18.73 dBm ; MCS0 (HT40): 12.57 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter and button cell
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 14.56 MHz ; 11g: 17.84 MHz
Maximum Conducted Output Power	11b: 16.42 dBm ; 11g: 16.72 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	☐ With beamforming	☒ Without beamforming

Antenna and Band width

Antenna	Single (TX)		Two (TX)
Band width Mode	20 MHz	40 MHz	20 MHz
IEEE 802.11b	V	X	X
IEEE 802.11g	V	X	X
IEEE 802.11n	X	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 8-15
802.11n (HT40)	1	MCS 0-7

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20(2TX) and HT40(1TX).

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

Power	Brand	Model	Rating
Adapter	APD	WA-23A15FU	INPUT: 100-240V ~, 50-60Hz, 0.8A Max. OUTPUT: 15V, 1.5A
Others			
Cradle*1			

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	HL	-	Printed Antenna	Murata	3.62
2	HL	-	Printed Antenna	Murata	2.32

<For WLAN Function>


For IEEE 802.11b/g/n 40MHz mode (1TX/1RX)

Only Ant. 1 can be used as transmitting/receiving antenna.

For IEEE 802.11n 20MHz mode (2TX/2RX)

Ant. 1 and Ant. 2 can be used as transmitting/receiving antenna.

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

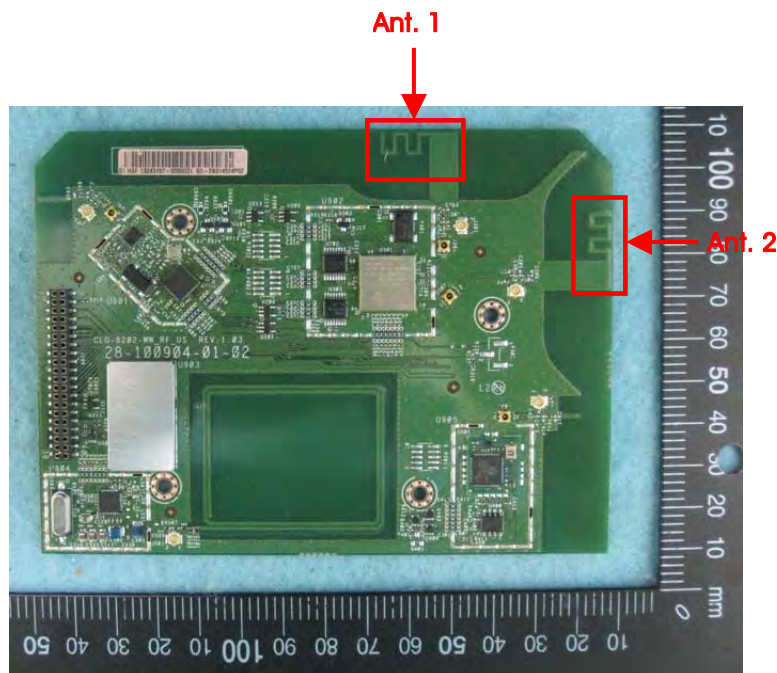

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	802.11n HT20	MCS8	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Power Spectral Density	802.11n HT20	MCS8	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
6dB Spectrum Bandwidth	802.11n HT20	MCS8	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	802.11n HT20	MCS8	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	802.11n HT20	MCS8	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT Standing-CTX

For Radiated Emission test:

Mode 1. EUT Standing-CTX

For Co-location MPE:

There are two Simultaneous Transmission Configurations as following:

Mode 1: WiFi+Z-wave+Zigbee+NFC

Mode 2: Bluetooth+Z-wave+Zigbee+NFC

The Co-location Maximum Permissible Exposure, please refer to sporton test report: FA472942.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO02-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Brand Name	Model Name	Description
CISCO	CLG-8202 NA	All the models are identical, the difference model for difference brand served as marketing strategy.
	CLG-8202-WW NA	

Note: Assessed as above, there is only model: CLG-8202 NA selected to test and recorded in the report as a result.

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM

For Test Site No: CO02-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS8 HT20	16	22	16
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	17	22	18

Power Parameters of IEEE 802.11b/g

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	18	18	19
IEEE 802.11g	17	22	17

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11n MCS8 HT20	0.668	0.914	73.09%	1.36	1.50
802.11n MCS0 HT40	0.63	0.873	72.16%	1.42	1.59
802.11b	8.430	8.620	97.80%	0.10	0.12
802.11g	1.390	1.632	85.17%	0.70	0.72


3.12. Test Configurations

3.12.1. AC Power Line Conduction Emissions Test Configuration

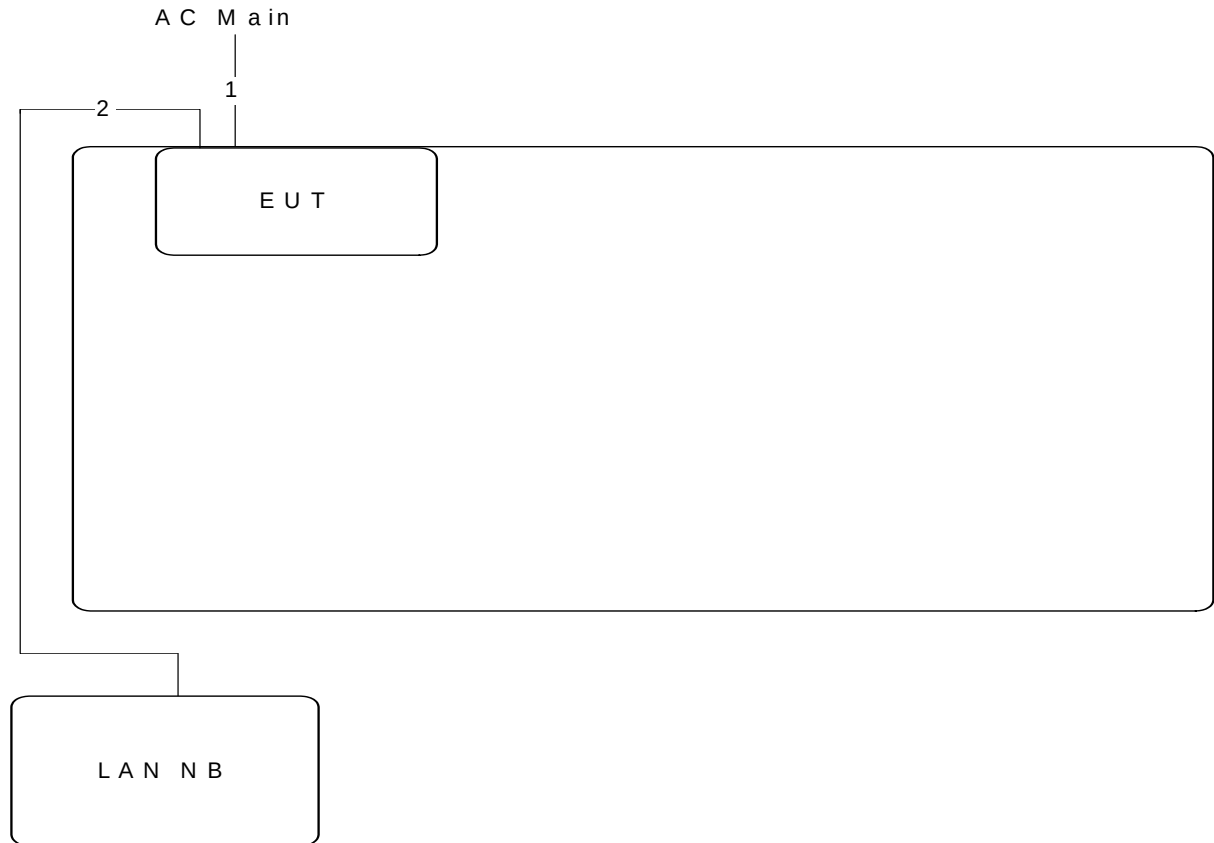

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

3.12.2. Radiation Emissions Test Configuration

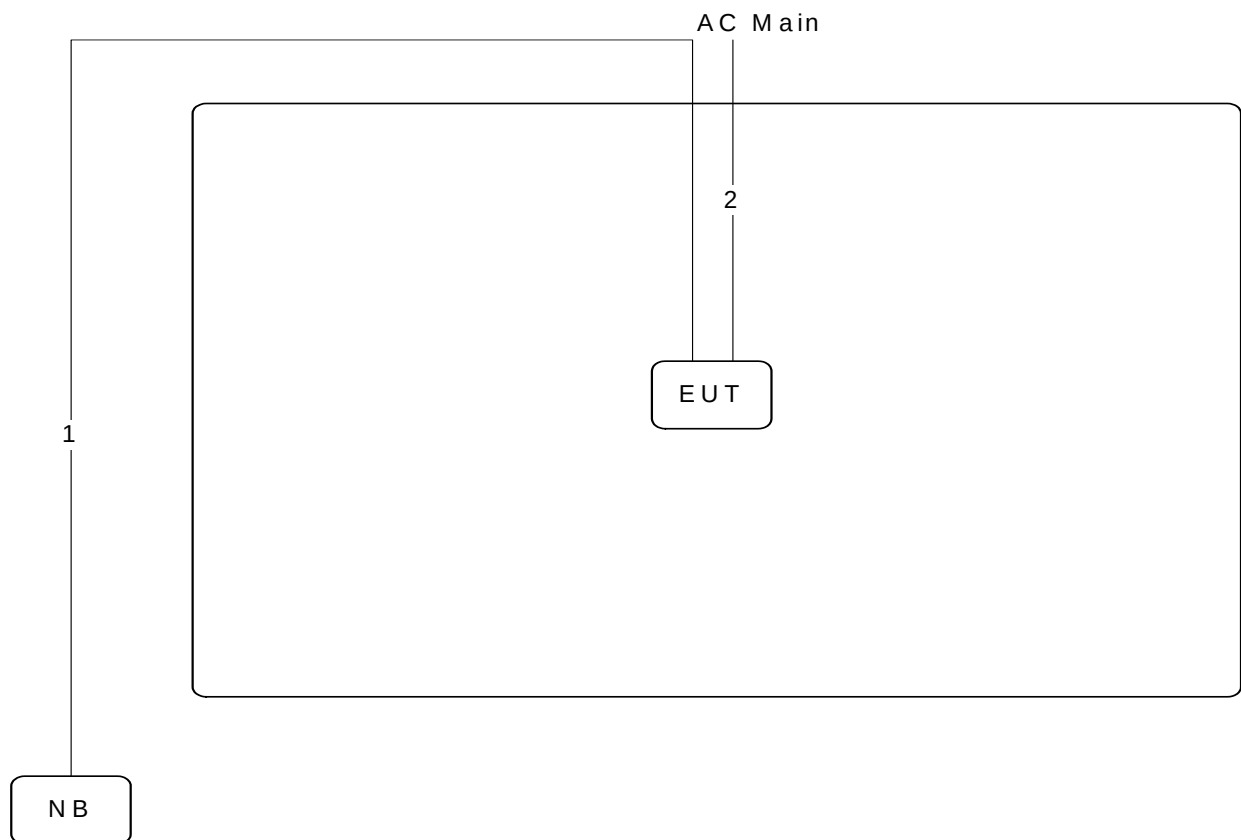

Item	Connection	Shielded	Length(m)
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

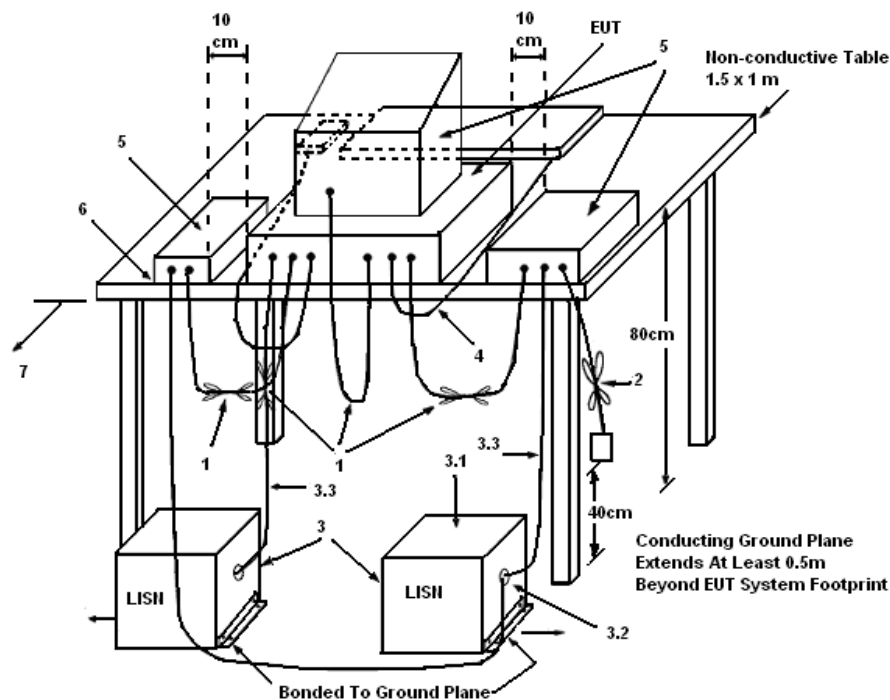

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	47%
Test Engineer	Ryo Fan	Phase	Line
Configuration	CTX		

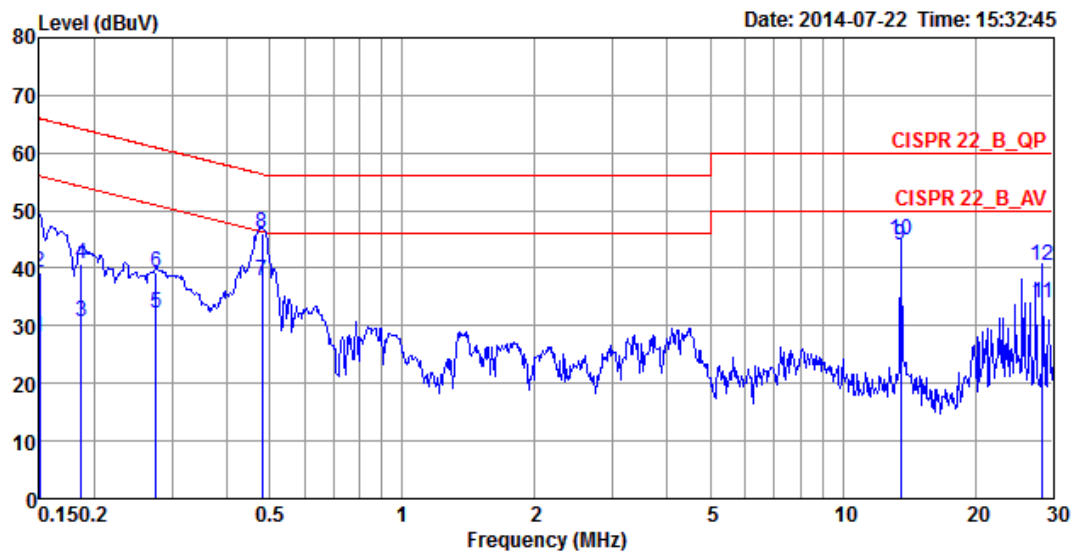

	Freq	Level	Over	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Factor	Level	Loss		
			dB	dBuV	dB	dBuV	dB		
1	0.1500	27.99	-28.01	56.00	0.22	27.59	0.18	LINE	Average
2	0.1500	39.12	-26.88	66.00	0.22	38.72	0.18	LINE	QP
3	0.1864	30.70	-23.50	54.20	0.21	30.29	0.20	LINE	Average
4	0.1864	40.74	-23.46	64.20	0.21	40.33	0.20	LINE	QP
5	0.2759	32.06	-18.88	50.94	0.21	31.65	0.20	LINE	Average
6	0.2759	39.18	-21.76	60.94	0.21	38.77	0.20	LINE	QP
7	0.4812	37.75	-8.57	46.32	0.22	37.33	0.20	LINE	Average
8 q	0.4812	45.95	-10.37	56.32	0.22	45.53	0.20	LINE	QP
9 a	13.5599	43.92	-6.08	50.00	0.56	42.97	0.39	LINE	Average
10	13.5599	44.77	-15.23	60.00	0.56	43.82	0.39	LINE	QP
11	28.3744	33.81	-16.19	50.00	0.96	32.25	0.60	LINE	Average
12	28.3744	40.44	-19.56	60.00	0.96	38.88	0.60	LINE	QP

Temperature	21°C	Humidity	61%
Test Engineer	Peter Wu	Phase	Neutral
Configuration	CTX		

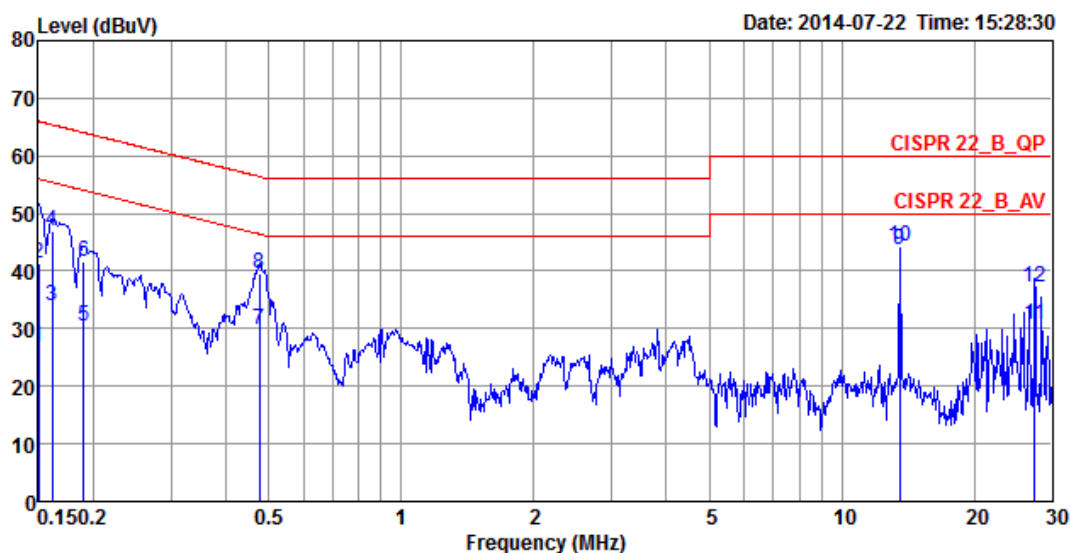

	Freq	Level	Over	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Factor	Level	Loss		
			dB	dBuV	dB	dBuV	dB		
1	0.1500	26.99	-29.01	56.00	0.09	26.72	0.18	NEUTRAL	Average
2	0.1500	41.34	-24.66	66.00	0.09	41.07	0.18	NEUTRAL	QP
3	0.1616	34.04	-21.34	55.38	0.08	33.77	0.19	NEUTRAL	Average
4	0.1616	46.88	-18.50	65.38	0.08	46.61	0.19	NEUTRAL	QP
5	0.1904	30.33	-23.69	54.02	0.07	30.06	0.20	NEUTRAL	Average
6	0.1904	41.67	-22.35	64.02	0.07	41.40	0.20	NEUTRAL	QP
7	0.4761	29.95	-16.46	46.41	0.08	29.67	0.20	NEUTRAL	Average
8	0.4761	39.51	-16.90	56.41	0.08	39.23	0.20	NEUTRAL	QP
9 a	13.5599	43.58	-6.42	50.00	0.38	42.81	0.39	NEUTRAL	Average
10 q	13.5599	44.41	-15.59	60.00	0.38	43.64	0.39	NEUTRAL	QP
11	27.4320	30.60	-19.40	50.00	0.71	29.30	0.59	NEUTRAL	Average
12	27.4320	37.32	-22.68	60.00	0.71	36.02	0.59	NEUTRAL	QP

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

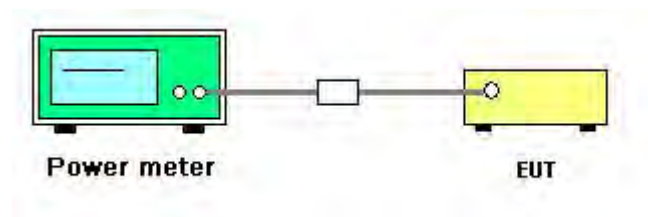

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n
Test Date	Sep. 02, 2014		

Configuration IEEE 802.11n MCS8 HT20 / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	12.83	13.19	16.02	30.00	Complies
6	2437 MHz	15.28	16.12	18.73	30.00	Complies
11	2462 MHz	12.41	13.36	15.92	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	10.01	30.00	Complies
6	2437 MHz	12.57	30.00	Complies
9	2452 MHz	11.19	30.00	Complies

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b/g
Test Date	Sep. 02, 2014		

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.45	30.00	Complies
6	2437 MHz	15.52	30.00	Complies
11	2462 MHz	16.42	30.00	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.29	30.00	Complies
6	2437 MHz	16.72	30.00	Complies
11	2462 MHz	14.12	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

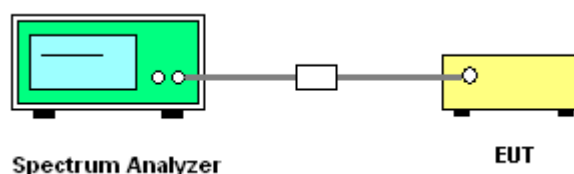

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS8 HT20 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	-13.75	-14.15	-10.94	7.97	Complies
6	2437 MHz	-10.34	-10.28	-7.30	7.97	Complies
11	2462 MHz	-12.46	-13.36	-9.88	7.97	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 6.03\text{dBi} > 6\text{dBi}$, So Power Density Limit = $8 - (6.03 - 6) = 7.97\text{dBm/3KHz}$

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
3	2422 MHz	-19.20	8.00	Complies
6	2437 MHz	-16.25	8.00	Complies
9	2452 MHz	-17.92	8.00	Complies

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-9.25	8.00	Complies
6	2437 MHz	-8.71	8.00	Complies
11	2462 MHz	-8.07	8.00	Complies


Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-10.47	8.00	Complies
6	2437 MHz	-8.42	8.00	Complies
11	2462 MHz	-11.74	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS8 HT20 / 2437 MHz / Ant. 1

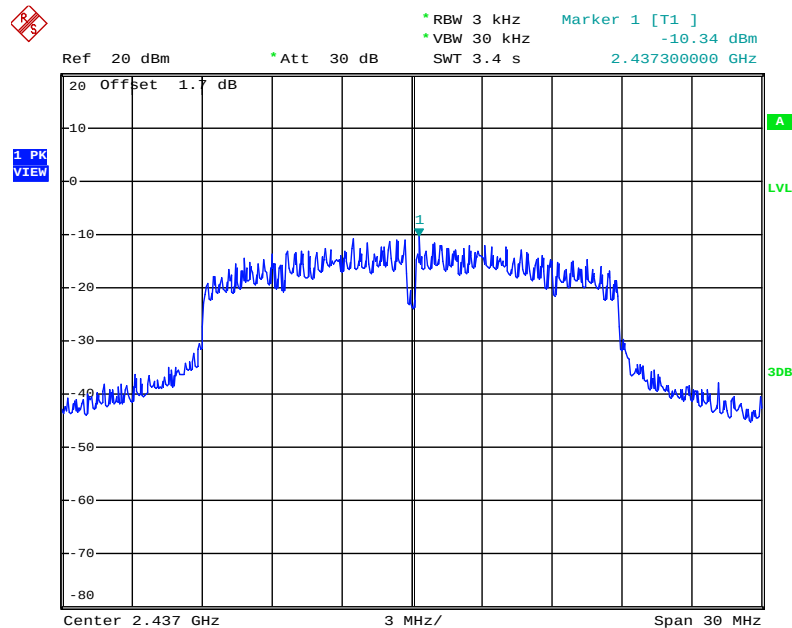


Date: 2.SEP.2014 12:48:22

Power Density Plot on Configuration IEEE 802.11n MCS8 HT20 / 2437 MHz / Ant. 2

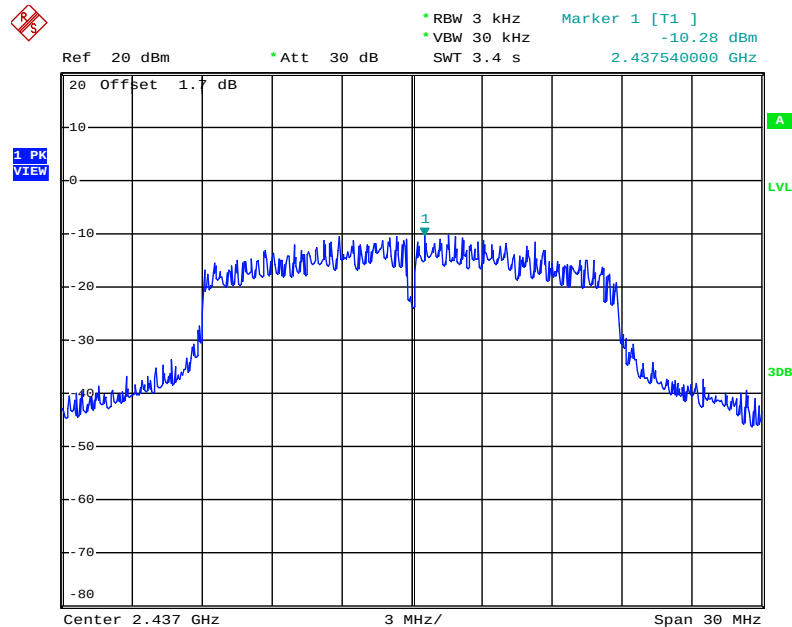


Date: 2.SEP.2014 12:47:18

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1

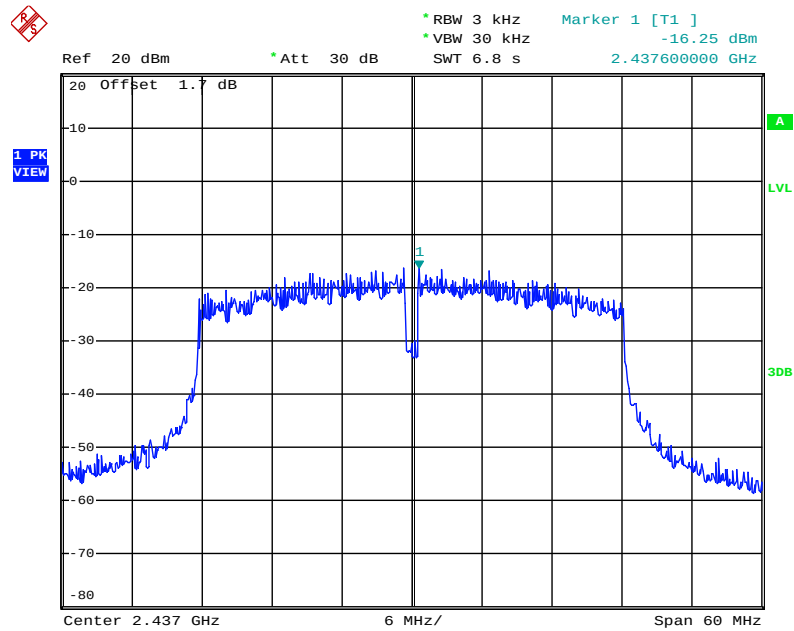


Date: 2.SEP.2014 12:56:21

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Ant. 1

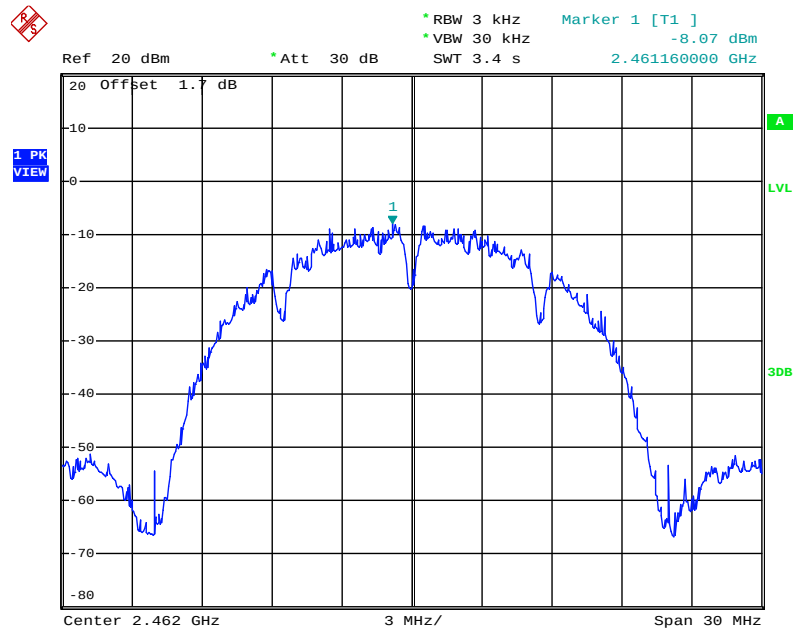

Date: 2.SEP.2014 12:39:35

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1

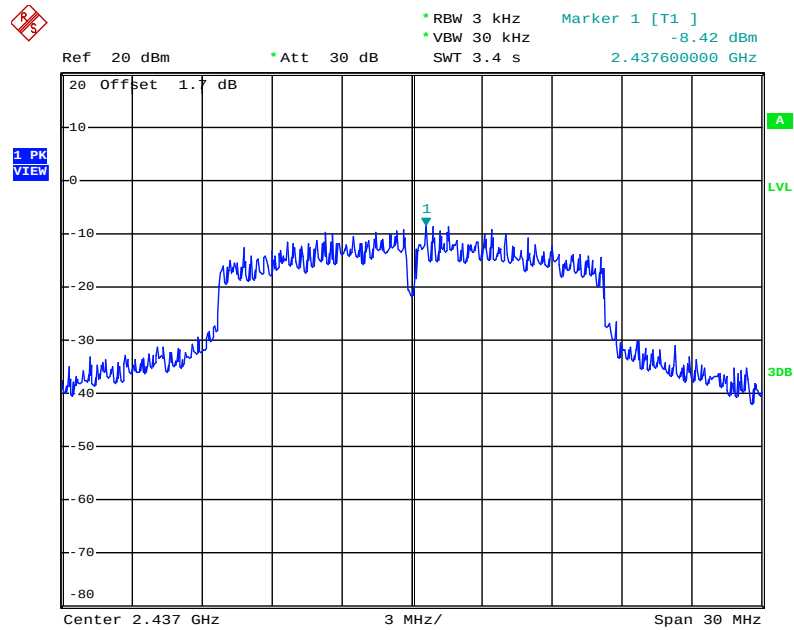

Date: 2.SEP.2014 12:41:25

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= $\geq$ 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS8 HT20 / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.76	17.60	500	Complies
6	2437 MHz	15.12	17.60	500	Complies
11	2462 MHz	15.04	17.52	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	33.92	35.84	500	Complies
6	2437 MHz	33.92	35.84	500	Complies
9	2452 MHz	33.92	35.68	500	Complies

Temperature	20°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.64	14.48	500	Complies
6	2437 MHz	9.04	14.40	500	Complies
11	2462 MHz	10.08	14.56	500	Complies


Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.04	16.48	500	Complies
6	2437 MHz	15.04	17.84	500	Complies
11	2462 MHz	15.44	16.48	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 HT20 / 2462 MHz / Ant. 1 + Ant. 2

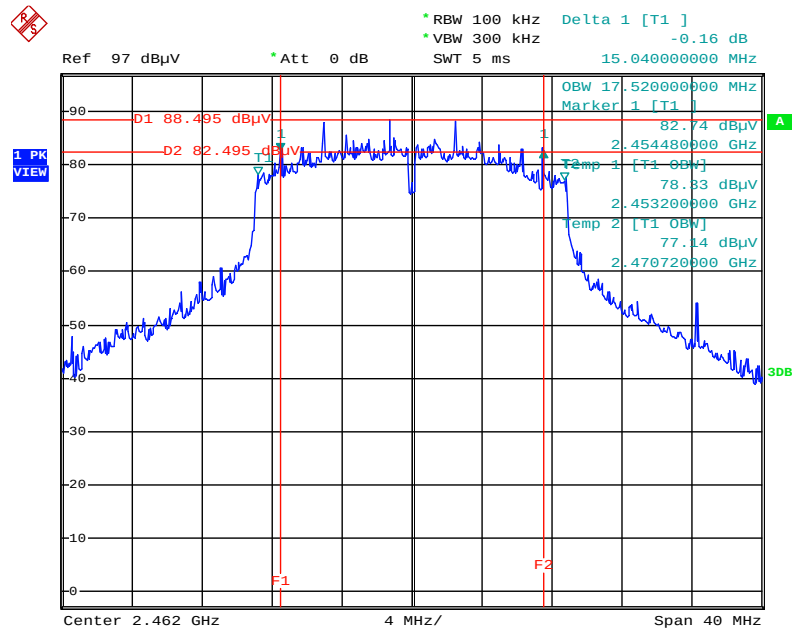


Date: 2.SEP.2014 13:20:01

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Ant. 1

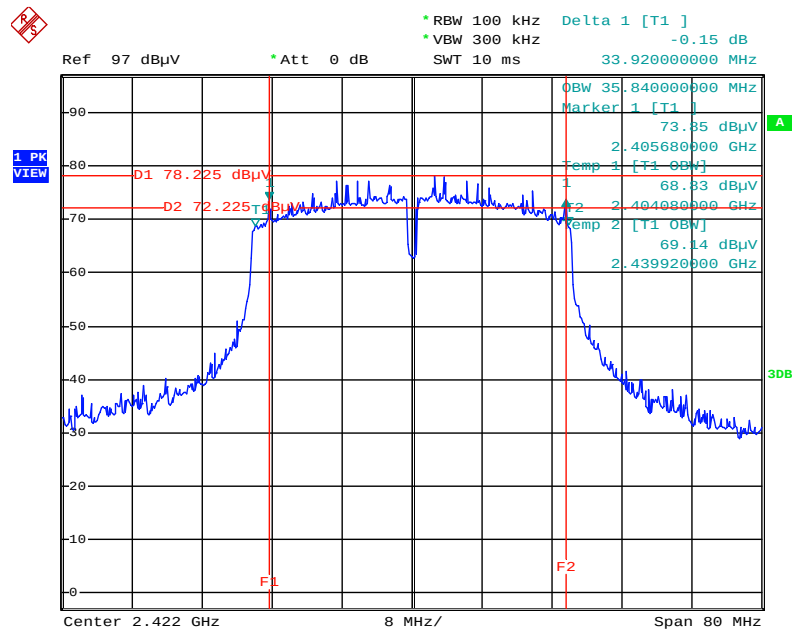


Date: 2.SEP.2014 13:21:14

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 1

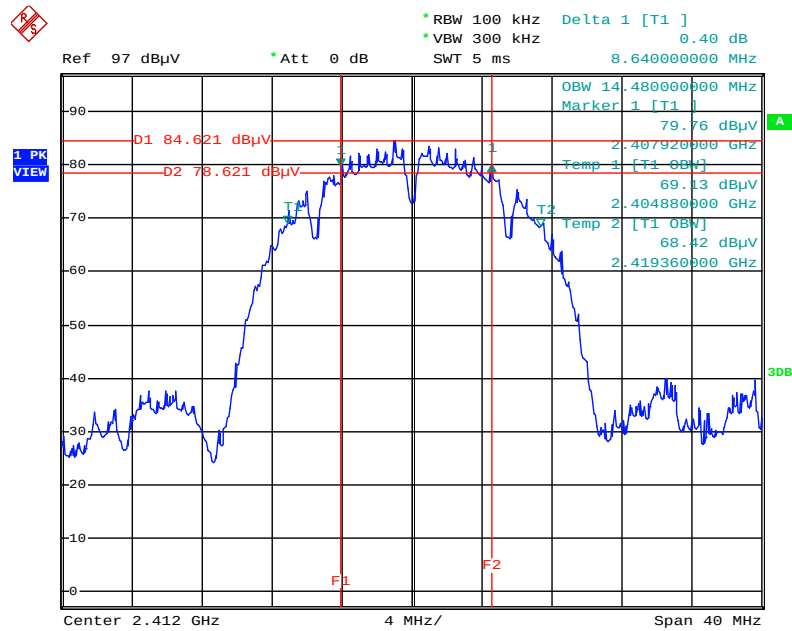

Date: 2.SEP.2014 13:10:50

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1

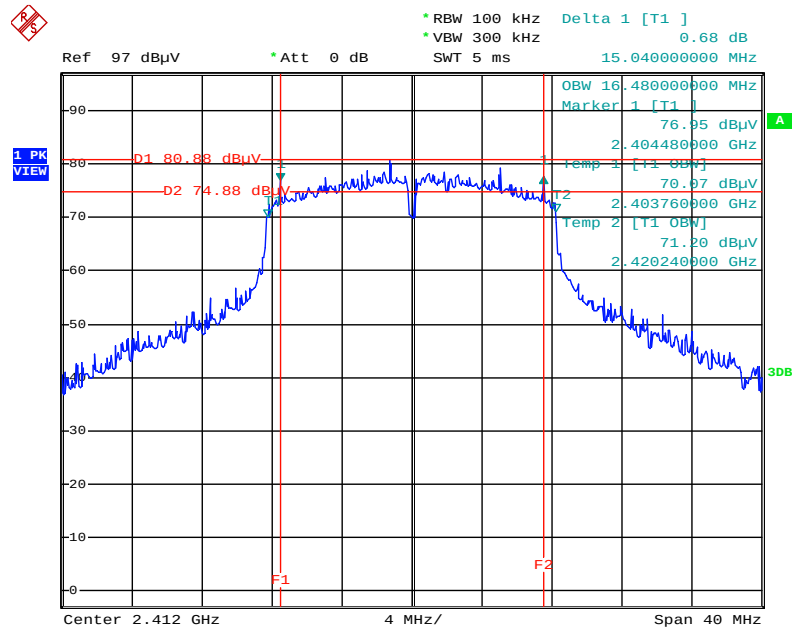

Date: 2.SEP.2014 13:13:24

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

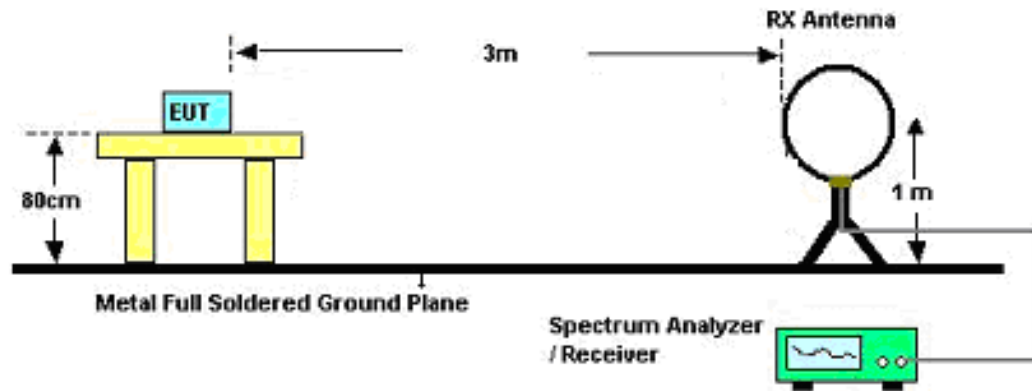

For Radiated Emissions: 30MHz~1GHz

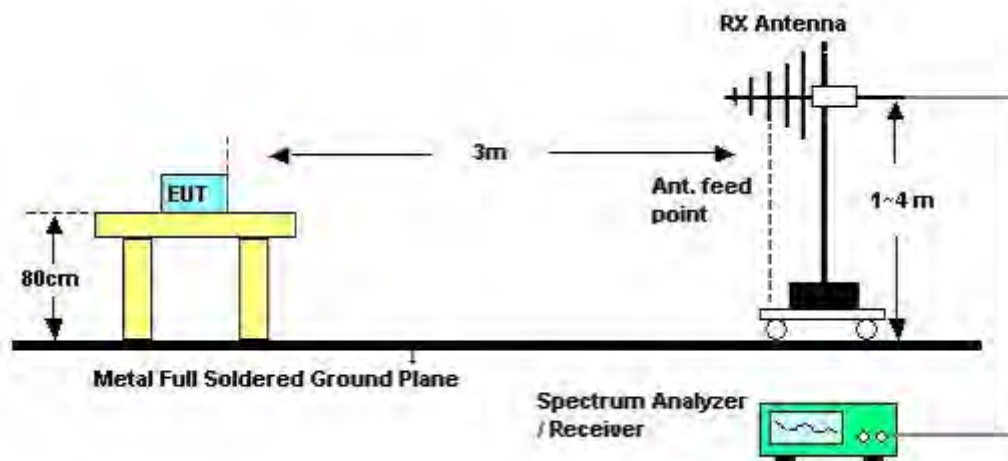

For Radiated Emissions: Above 1GHz

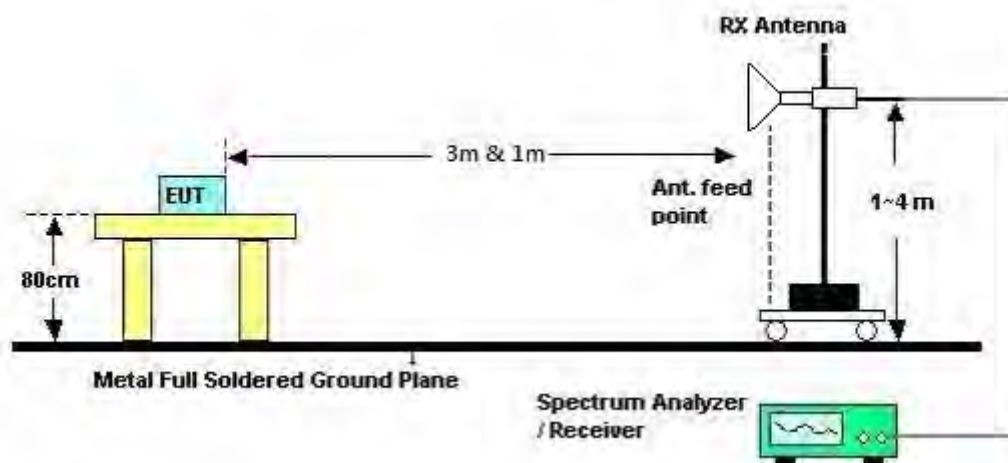

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	CTX
Test Date	Aug. 26, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	CTX

Horizontal

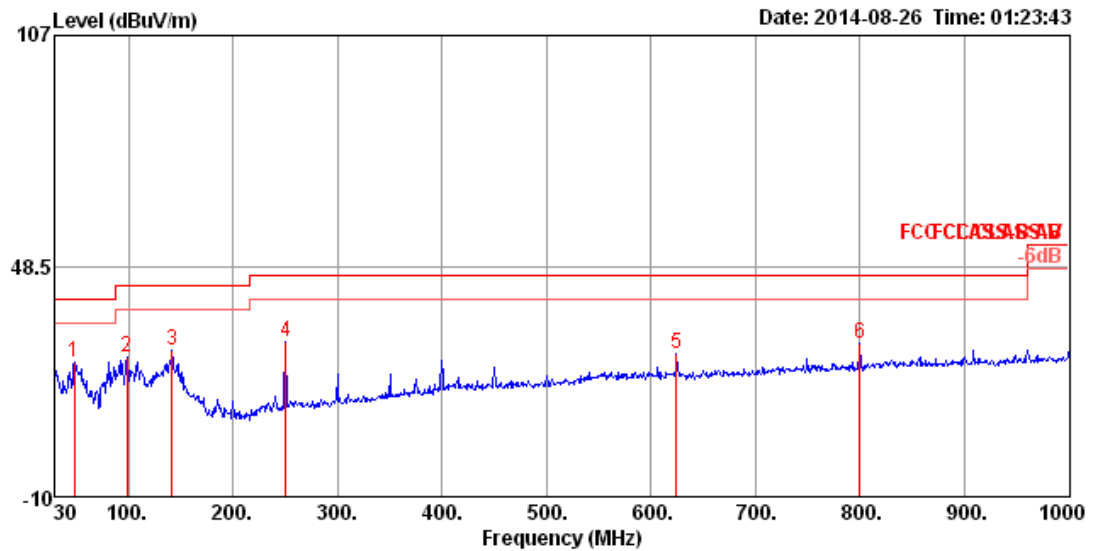

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	48.43	24.05	40.00	-15.95	46.70	0.83	8.32	31.80	400	258	HORIZONTAL	Peak
2	98.87	25.58	43.50	-17.92	45.84	1.17	10.17	31.60	400	267	HORIZONTAL	Peak
3	141.55	26.93	43.50	-16.57	46.31	1.41	10.74	31.53	200	259	HORIZONTAL	Peak
4	250.19	29.42	46.00	-16.58	47.10	1.90	11.91	31.49	125	261	HORIZONTAL	Peak
5	624.61	26.37	46.00	-19.63	35.98	3.18	18.61	31.40	125	232	HORIZONTAL	Peak
6	800.18	28.85	46.00	-17.15	36.69	3.67	19.76	31.27	100	200	HORIZONTAL	Peak

Vertical

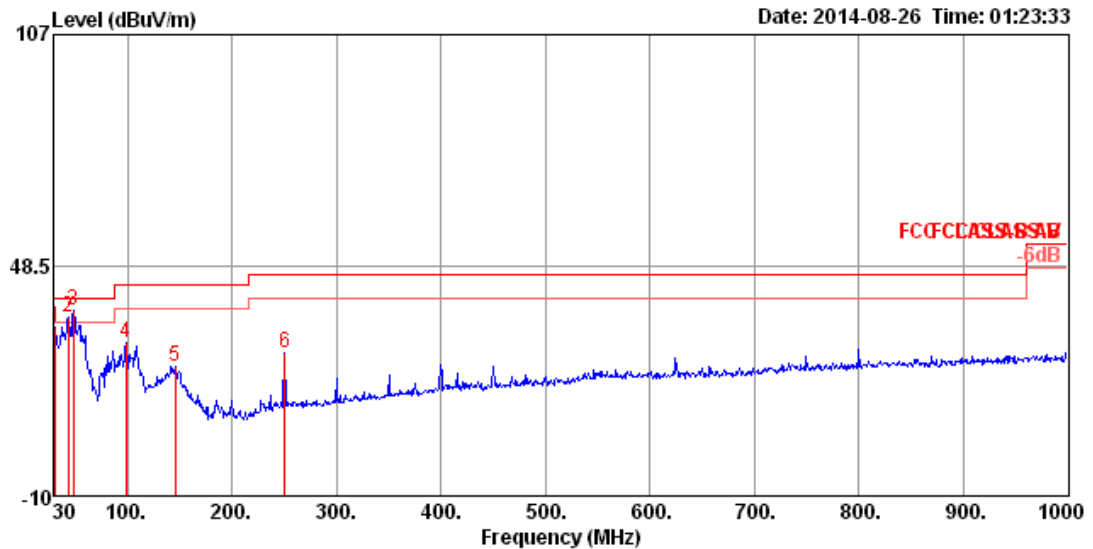

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	30.97	32.63	40.00	-7.37	46.36	0.65	17.44	31.82	100	232	VERTICAL	Peak
2	43.58	35.21	40.00	-4.79	56.02	0.78	10.25	31.84	125	258	VERTICAL	Peak
3	48.43	37.00	40.00	-3.00	59.65	0.83	8.32	31.80	100	279	VERTICAL	Peak
4	98.87	29.05	43.50	-14.45	49.31	1.17	10.17	31.60	100	31	VERTICAL	Peak
5	145.43	22.94	43.50	-20.56	42.61	1.44	10.43	31.54	100	142	VERTICAL	Peak
6	250.19	26.14	46.00	-19.86	43.82	1.90	11.91	31.49	200	168	VERTICAL	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS8 HT20 CH 1 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4824.12	36.00	54.00	-18.00	31.94	5.87	33.39	35.20	Average	214	182	HORIZONTAL
2	4824.84	48.62	74.00	-25.38	44.56	5.87	33.39	35.20	Peak	214	182	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4823.94	52.46	74.00	-21.54	48.40	5.87	33.39	35.20	Peak	195	184	VERTICAL
2	4824.04	39.76	54.00	-14.24	35.70	5.87	33.39	35.20	Average	195	184	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS8 HT20 CH 6 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.00	39.22	54.00	-14.78	35.02	5.92	33.48	35.20 Average	182	188	HORIZONTAL
2	4874.36	52.37	74.00	-21.63	48.17	5.92	33.48	35.20 Peak	182	188	HORIZONTAL
3	7307.12	52.84	74.00	-21.16	44.66	7.13	36.48	35.43 Peak	183	151	HORIZONTAL
4	7311.84	39.42	54.00	-14.58	31.21	7.13	36.51	35.43 Average	183	151	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.84	42.19	54.00	-11.81	37.99	5.92	33.48	35.20 Average	180	180	VERTICAL
2	4874.32	56.05	74.00	-17.95	51.85	5.92	33.48	35.20 Peak	180	180	VERTICAL
3	7306.68	51.71	74.00	-22.29	43.52	7.13	36.48	35.42 Peak	184	236	VERTICAL
4	7308.44	39.85	54.00	-14.15	31.64	7.13	36.51	35.43 Average	184	236	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS8 HT20 CH 11 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4919.58	48.49	74.00	-25.51	44.18	5.97	33.54	35.20	Peak	194	85	HORIZONTAL
2	4923.88	36.33	54.00	-17.67	31.98	5.97	33.58	35.20	Average	194	85	HORIZONTAL
3	7378.68	38.64	54.00	-15.36	30.32	7.16	36.61	35.45	Average	192	272	HORIZONTAL
4	7380.64	50.81	74.00	-23.19	42.49	7.16	36.61	35.45	Peak	192	272	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.96	54.22	74.00	-19.78	49.87	5.97	33.58	35.20	Peak	176	175	VERTICAL
2	4924.04	41.34	54.00	-12.66	36.99	5.97	33.58	35.20	Average	176	175	VERTICAL
3	7382.36	38.88	54.00	-15.12	30.56	7.16	36.61	35.45	Average	183	92	VERTICAL
4	7392.72	51.36	74.00	-22.64	43.01	7.17	36.64	35.46	Peak	183	92	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant. 1
Test Date	Aug. 12, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	4836.20	44.97	74.00	-29.03	42.75	4.21	32.59	34.58	Peak	37	100	HORIZONTAL
2	4845.60	32.76	54.00	-21.24	30.54	4.21	32.59	34.58	Average	37	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	4844.00	34.39	54.00	-19.61	32.17	4.21	32.59	34.58	Average	294	100	VERTICAL
2	4848.20	45.43	74.00	-28.57	43.21	4.21	32.59	34.58	Peak	294	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant. 1
Test Date	Aug. 12, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4869.60	33.53	54.00	-20.47	31.22	4.22	32.66	34.57	Average	109	100	HORIZONTAL
2	4888.00	45.68	74.00	-28.32	43.34	4.22	32.69	34.57	Peak	109	100	HORIZONTAL
3	7314.48	51.26	74.00	-22.74	43.68	5.34	37.07	34.83	Peak	301	100	HORIZONTAL
4	7318.28	38.61	54.00	-15.39	31.00	5.35	37.09	34.83	Average	301	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.32	35.75	54.00	-18.25	33.44	4.22	32.66	34.57	Average	204	100	VERTICAL
2	4874.96	47.82	74.00	-26.18	45.51	4.22	32.66	34.57	Peak	204	100	VERTICAL
3	7306.88	51.70	74.00	-22.30	44.11	5.34	37.07	34.82	Peak	92	100	VERTICAL
4	7315.52	38.69	54.00	-15.31	31.08	5.35	37.09	34.83	Average	92	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant. 1
Test Date	Aug. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	4890.90	44.86	74.00	-29.14	42.51	4.22	32.69	34.56	Peak	277	100	HORIZONTAL
2	4891.40	32.51	54.00	-21.49	30.16	4.22	32.69	34.56	Average	277	100	HORIZONTAL
3	7337.30	51.86	74.00	-22.14	44.23	5.35	37.11	34.83	Peak	162	100	HORIZONTAL
4	7377.80	38.88	54.00	-15.12	31.20	5.36	37.16	34.84	Average	162	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	4885.40	32.66	54.00	-21.34	30.32	4.22	32.69	34.57	Average	240	100	VERTICAL
2	4886.00	45.04	74.00	-28.96	42.70	4.22	32.69	34.57	Peak	240	100	VERTICAL
3	7367.70	51.08	74.00	-22.92	43.40	5.36	37.16	34.84	Peak	323	100	VERTICAL
4	7380.20	38.70	54.00	-15.30	31.02	5.36	37.16	34.84	Average	323	100	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11b CH 1 / Ant. 1
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.73	53.82	74.00	-20.18	50.67	5.69	32.76	35.30	128	200	HORIZONTAL	Peak
2	4823.97	48.89	54.00	-5.11	45.74	5.69	32.76	35.30	128	200	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.95	53.27	54.00	-0.73	50.12	5.69	32.76	35.30	100	185	VERTICAL	Average
2	4823.98	56.39	74.00	-17.61	53.24	5.69	32.76	35.30	100	185	VERTICAL	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11b CH 6 / Ant. 1
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.84	53.57	74.00	-20.43	50.33	5.75	32.80	35.31	162	194	HORIZONTAL Peak
2	4873.98	49.92	54.00	-4.08	46.68	5.75	32.80	35.31	162	194	HORIZONTAL Average
3	7311.76	41.97	54.00	-12.03	33.15	7.06	37.12	35.36	138	148	HORIZONTAL Average
4	7312.62	53.53	74.00	-20.47	44.71	7.06	37.12	35.36	138	148	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4873.96	52.78	54.00	-1.22	49.54	5.75	32.80	35.31	182	189	VERTICAL Average
2	4874.04	55.40	74.00	-18.60	52.16	5.75	32.80	35.31	182	189	VERTICAL Peak
3	7311.82	41.65	54.00	-12.35	32.83	7.06	37.12	35.36	135	220	VERTICAL Average
4	7312.44	52.60	74.00	-21.40	43.78	7.06	37.12	35.36	135	220	VERTICAL Peak

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11b CH 11 / Ant. 1
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.94	52.18	54.00	-1.82	48.86	5.81	32.84	35.33	173	197	HORIZONTAL	Average
2	4924.05	55.27	74.00	-18.73	51.95	5.81	32.84	35.33	173	197	HORIZONTAL	Peak
3	7381.60	53.04	74.00	-20.96	44.12	7.08	37.16	35.32	100	112	HORIZONTAL	Peak
4	7386.88	41.79	54.00	-12.21	32.86	7.09	37.16	35.32	100	112	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.96	53.87	54.00	-0.13	50.55	5.81	32.84	35.33	130	195	VERTICAL	Average
2	4924.00	56.52	74.00	-17.48	53.20	5.81	32.84	35.33	130	195	VERTICAL	Peak
3	7384.90	42.01	54.00	-11.99	33.08	7.09	37.16	35.32	110	197	VERTICAL	Average
4	7385.24	53.52	74.00	-20.48	44.59	7.09	37.16	35.32	110	197	VERTICAL	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11g CH 1 / Ant. 1
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4822.92	37.70	54.00	-16.30	34.56	5.68	32.76	35.30	174	198	HORIZONTAL	Average
2	4826.80	50.30	74.00	-23.70	47.14	5.69	32.77	35.30	174	198	HORIZONTAL	Peak
3	7233.50	53.57	74.00	-20.43	44.84	7.03	37.10	35.40	166	158	HORIZONTAL	Peak
4	7242.38	40.87	54.00	-13.13	32.14	7.03	37.10	35.40	166	158	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4820.36	53.63	74.00	-20.37	50.49	5.68	32.76	35.30	166	185	VERTICAL	Peak
2	4824.14	40.42	54.00	-13.58	37.27	5.69	32.76	35.30	166	185	VERTICAL	Average
3	7234.28	40.83	54.00	-13.17	32.10	7.03	37.10	35.40	143	210	VERTICAL	Average
4	7240.44	53.62	74.00	-20.38	44.89	7.03	37.10	35.40	143	210	VERTICAL	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11g CH 6 / Ant. 1
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	38.78	54.00	-15.22	35.54	5.75	32.80	35.31	161	182	HORIZONTAL	Average
2	4879.10	51.30	74.00	-22.70	48.07	5.75	32.80	35.32	161	182	HORIZONTAL	Peak
3	7311.62	42.60	54.00	-11.40	33.78	7.06	37.12	35.36	153	164	HORIZONTAL	Average
4	7312.76	55.57	74.00	-18.43	46.75	7.06	37.12	35.36	153	164	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.86	42.14	54.00	-11.86	38.90	5.75	32.80	35.31	100	166	VERTICAL	Average
2	4875.10	54.69	74.00	-19.31	51.46	5.75	32.80	35.32	100	166	VERTICAL	Peak
3	7304.96	55.55	74.00	-18.45	46.74	7.06	37.12	35.36	103	231	VERTICAL	Peak
4	7314.94	43.00	54.00	-11.00	34.18	7.06	37.12	35.36	103	231	VERTICAL	Average

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11g CH 11 / Ant. 1
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.34	36.92	54.00	-17.08	33.60	5.81	32.84	35.33	100	172	HORIZONTAL	Average
2	4932.12	50.06	74.00	-23.94	46.74	5.82	32.84	35.34	100	172	HORIZONTAL	Peak
3	7376.06	40.74	54.00	-13.26	31.83	7.08	37.15	35.32	113	162	HORIZONTAL	Average
4	7388.70	52.48	74.00	-21.52	43.54	7.09	37.16	35.31	113	162	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.50	40.41	54.00	-13.59	37.09	5.81	32.84	35.33	122	182	VERTICAL	Average
2	4924.76	52.79	74.00	-21.21	49.47	5.81	32.84	35.33	122	182	VERTICAL	Peak
3	7376.10	40.99	54.00	-13.01	32.08	7.08	37.15	35.32	171	209	VERTICAL	Average
4	7380.20	54.48	74.00	-19.52	45.56	7.08	37.16	35.32	171	209	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.
- The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS8 HT20 CH 1, 6, 11 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.71	54.00	-1.29	20.57	4.09	28.05	0.00	Average	206	171	HORIZONTAL
2	2390.00	70.36	74.00	-3.64	38.22	4.09	28.05	0.00	Peak	206	171	HORIZONTAL
3	2411.60	109.31			77.11	4.11	28.09	0.00	Peak	206	171	HORIZONTAL
4	2413.20	98.94			66.74	4.11	28.09	0.00	Average	206	171	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.80	61.61	74.00	-12.39	29.47	4.09	28.05	0.00	Peak	204	234	VERTICAL
2	2390.00	47.48	54.00	-6.52	15.34	4.09	28.05	0.00	Average	204	234	VERTICAL
3	2437.80	99.64			67.33	4.13	28.18	0.00	Average	204	234	VERTICAL
4	2438.20	111.54			79.23	4.13	28.18	0.00	Peak	204	234	VERTICAL
5	2483.50	47.47	54.00	-6.53	15.05	4.16	28.26	0.00	Average	204	234	VERTICAL
6	2484.70	57.94	74.00	-16.06	25.52	4.16	28.26	0.00	Peak	204	234	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2461.00	98.09			65.73	4.14	28.22	0.00	Average	198	162	HORIZONTAL
2	2464.60	108.00			75.64	4.14	28.22	0.00	Peak	198	162	HORIZONTAL
3	2483.50	52.31	54.00	-1.69	19.89	4.16	28.26	0.00	Average	198	162	HORIZONTAL
4	2483.90	70.25	74.00	-3.75	37.83	4.16	28.26	0.00	Peak	198	162	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant. 1
Test Date	Aug. 12, 2014		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	2388.80	72.82	74.00	-1.18	41.99	2.91	27.92	0.00	Peak	176	248	HORIZONTAL
2	2390.00	53.53	54.00	-0.47	22.70	2.91	27.92	0.00	Average	176	248	HORIZONTAL
3	2426.80	92.70			61.89	2.93	27.88	0.00	Average	176	248	HORIZONTAL
4	2428.00	103.55			72.74	2.93	27.88	0.00	Peak	176	248	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	2389.20	65.21	74.00	-8.79	34.38	2.91	27.92	0.00	Peak	175	263	HORIZONTAL
2	2390.00	48.43	54.00	-5.57	17.60	2.91	27.92	0.00	Average	175	263	HORIZONTAL
3	2429.00	103.83			73.02	2.93	27.88	0.00	Peak	175	263	HORIZONTAL
4	2435.40	93.65			62.84	2.93	27.88	0.00	Average	175	263	HORIZONTAL
5	2483.50	47.15	54.00	-6.85	16.37	2.96	27.82	0.00	Average	175	263	HORIZONTAL
6	2484.70	61.09	74.00	-12.91	30.31	2.96	27.82	0.00	Peak	175	263	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	2448.40	101.80			71.00	2.94	27.86	0.00	Peak	174	225	HORIZONTAL
2	2448.40	92.46			61.66	2.94	27.86	0.00	Average	174	225	HORIZONTAL
3	2483.90	53.70	54.00	-0.30	22.92	2.96	27.82	0.00	Average	174	225	HORIZONTAL
4	2487.50	70.44	74.00	-3.56	39.67	2.97	27.80	0.00	Peak	174	225	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant. 1
Test Date	Aug. 09, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2386.30	58.20	74.00	-15.80	26.62	3.68	27.90	0.00	238	196	HORIZONTAL Peak
2	2386.50	42.77	54.00	-11.23	11.19	3.68	27.90	0.00	238	196	HORIZONTAL Average
3	2411.10	102.61			71.02	3.69	27.90	0.00	238	196	HORIZONTAL Peak
4	2411.20	100.53			68.94	3.69	27.90	0.00	238	196	HORIZONTAL Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2383.80	42.36	54.00	-11.64	10.78	3.68	27.90	0.00	206	181	HORIZONTAL Average
2	2385.40	57.85	74.00	-16.15	26.27	3.68	27.90	0.00	206	181	HORIZONTAL Peak
3	2436.20	101.68			70.07	3.71	27.90	0.00	206	181	HORIZONTAL Average
4	2436.20	104.15			72.54	3.71	27.90	0.00	206	181	HORIZONTAL Peak
5	2485.50	42.00	54.00	-12.00	10.37	3.73	27.90	0.00	206	181	HORIZONTAL Average
6	2486.30	57.21	74.00	-16.79	25.58	3.73	27.90	0.00	206	181	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2461.10	104.94			73.32	3.72	27.90	0.00	188	178	HORIZONTAL Peak
2	2461.30	102.59			70.97	3.72	27.90	0.00	188	178	HORIZONTAL Average
3	2487.60	59.53	74.00	-14.47	27.90	3.73	27.90	0.00	188	178	HORIZONTAL Peak
4	2488.80	49.19	54.00	-4.81	17.56	3.73	27.90	0.00	188	178	HORIZONTAL Average

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Mars Lin / Satoshi Yang	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1
Test Date	Aug. 09, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2389.80	72.88	74.00	-1.12	41.30	3.68	27.90	0.00	185	175	HORIZONTAL Peak
2	2390.00	52.42	54.00	-1.58	20.84	3.68	27.90	0.00	185	175	HORIZONTAL Average
3	2413.70	97.50			65.91	3.69	27.90	0.00	185	175	HORIZONTAL Average
4	2415.30	107.37			75.78	3.69	27.90	0.00	185	175	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2389.60	60.71	74.00	-13.29	29.13	3.68	27.90	0.00	207	176	HORIZONTAL Peak
2	2390.00	45.38	54.00	-8.62	13.80	3.68	27.90	0.00	207	176	HORIZONTAL Average
3	2435.00	109.41			77.81	3.70	27.90	0.00	207	176	HORIZONTAL Peak
4	2436.20	100.18			68.57	3.71	27.90	0.00	207	176	HORIZONTAL Average
5	2483.50	44.13	54.00	-9.87	12.50	3.73	27.90	0.00	207	176	HORIZONTAL Average
6	2483.90	59.53	74.00	-14.47	27.90	3.73	27.90	0.00	207	176	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	2463.10	97.31			65.69	3.72	27.90	0.00	220	175	HORIZONTAL Average
2	2465.10	106.87			75.25	3.72	27.90	0.00	220	175	HORIZONTAL Peak
3	2483.50	51.57	54.00	-2.43	19.94	3.73	27.90	0.00	220	175	HORIZONTAL Average
4	2483.60	72.20	74.00	-1.80	40.57	3.73	27.90	0.00	220	175	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS8 HT20 / Reference Level

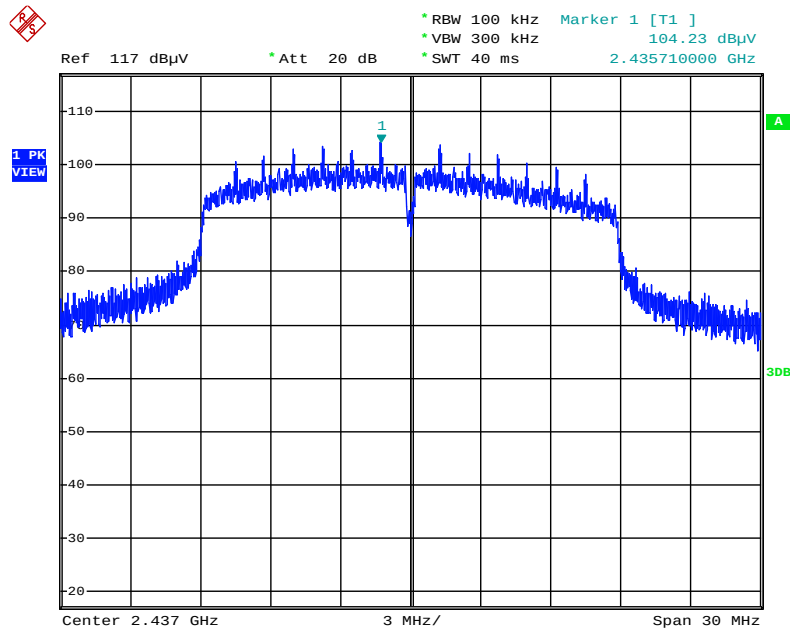


Date: 12.AUG.2014 16:44:29

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

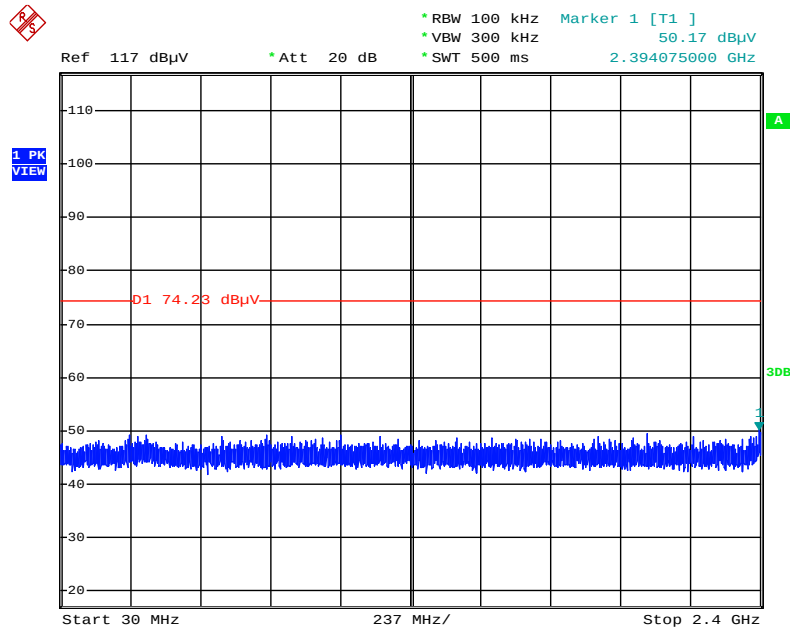


Date: 12.AUG.2014 16:45:10

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

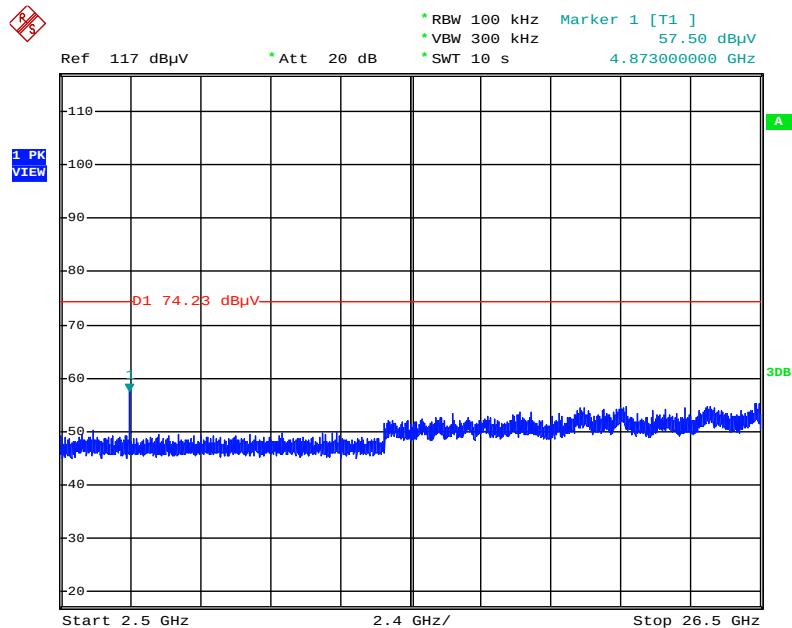


Date: 12.AUG.2014 16:46:32

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

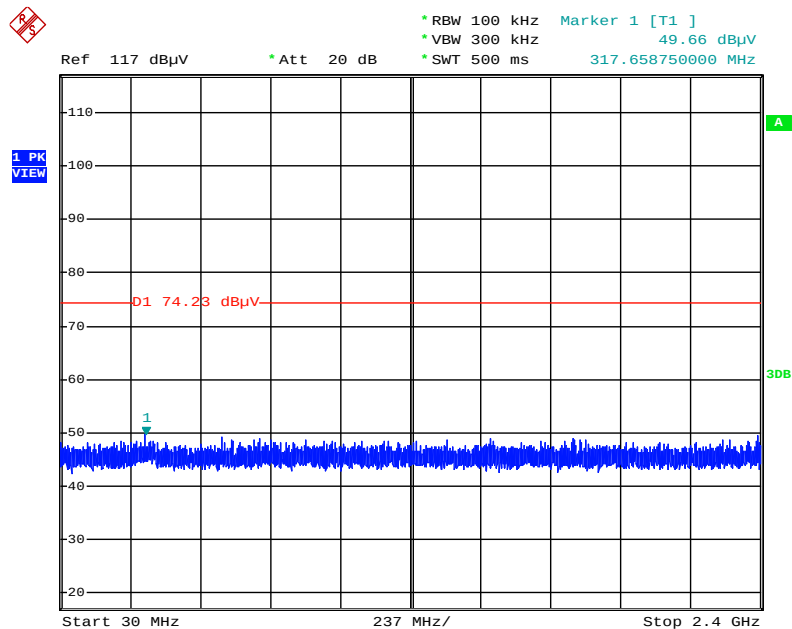


Date: 12.AUG.2014 16:48:57

Plot on Configuration IEEE 802.11n MCS8 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

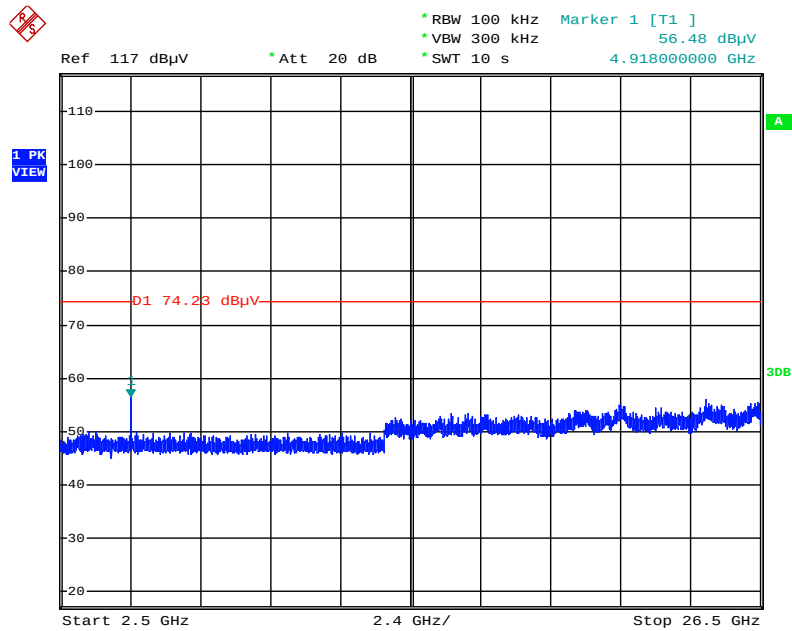


Date: 12.AUG.2014 16:48:32

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

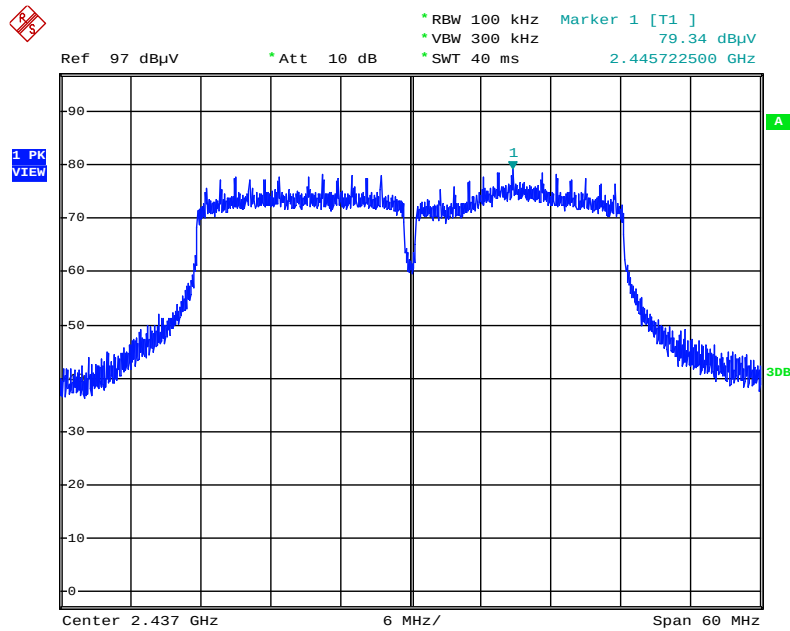


Date: 12.AUG.2014 16:32:45

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

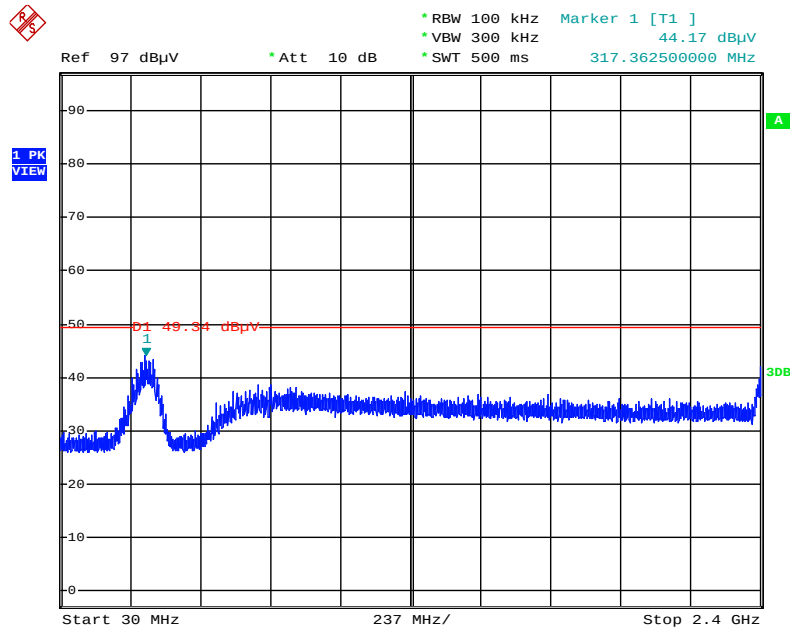


Date: 12.AUG.2014 16:38:44

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

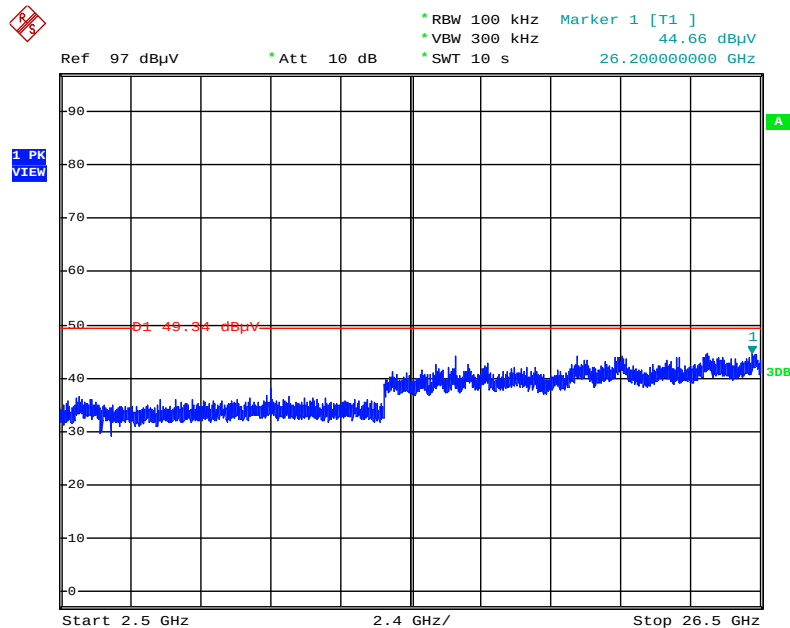


Date: 12.AUG.2014 16:37:13

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

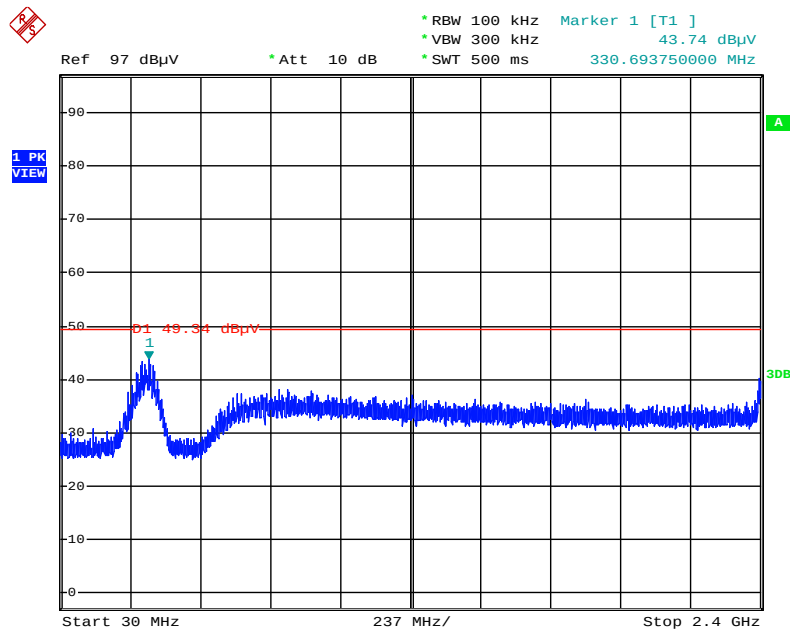


Date: 12.AUG.2014 16:33:40

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

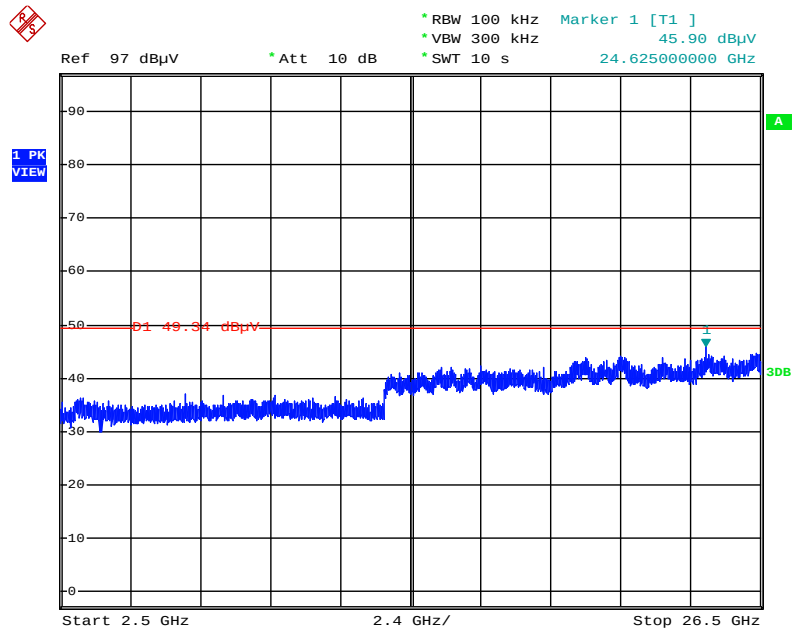


Date: 12.AUG.2014 16:35:11

Plot on Configuration IEEE 802.11b / Reference Level

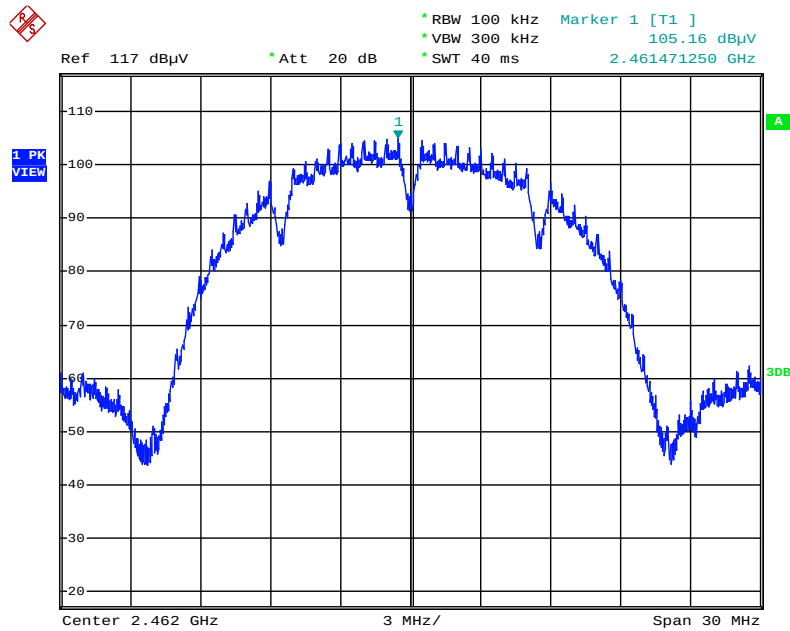


Date: 12.AUG.2014 16:57:58

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

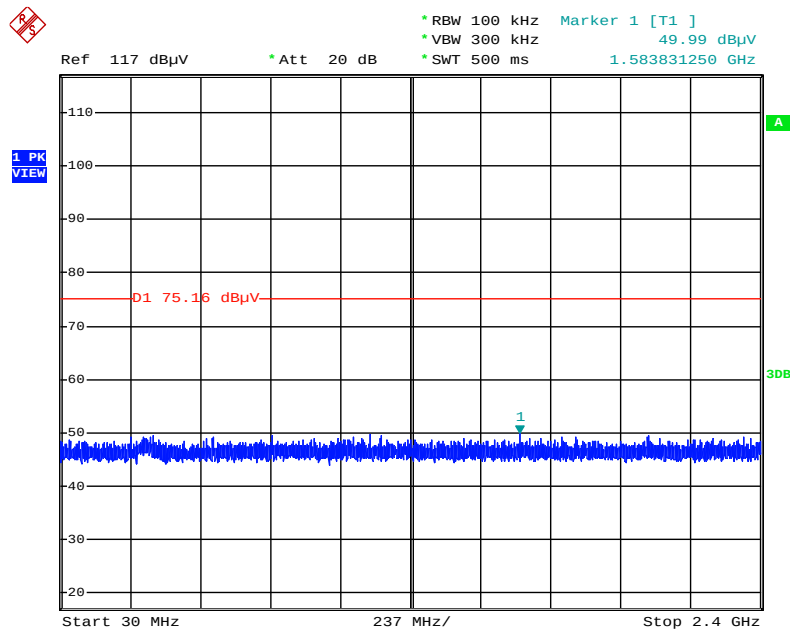


Date: 12.AUG.2014 17:04:16

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

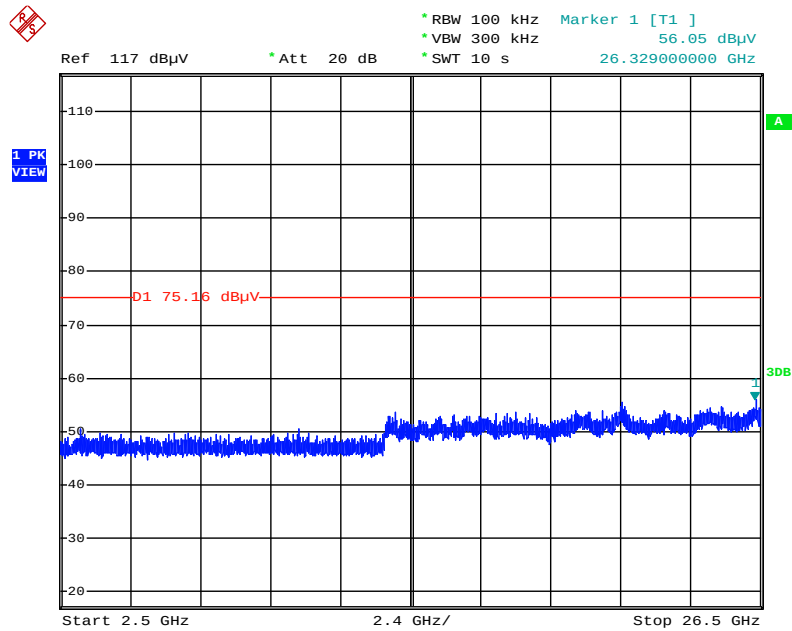


Date: 12.AUG.2014 17:03:24

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

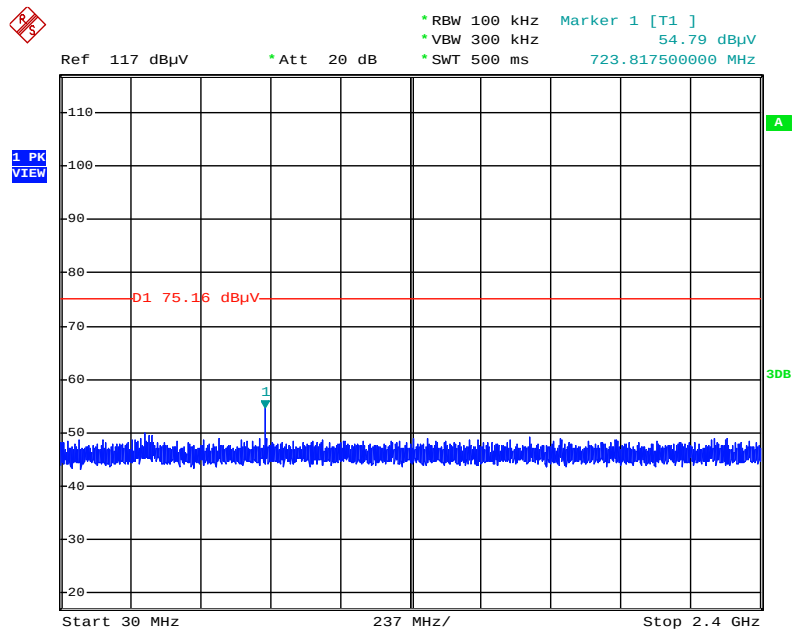


Date: 12.AUG.2014 16:58:37

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

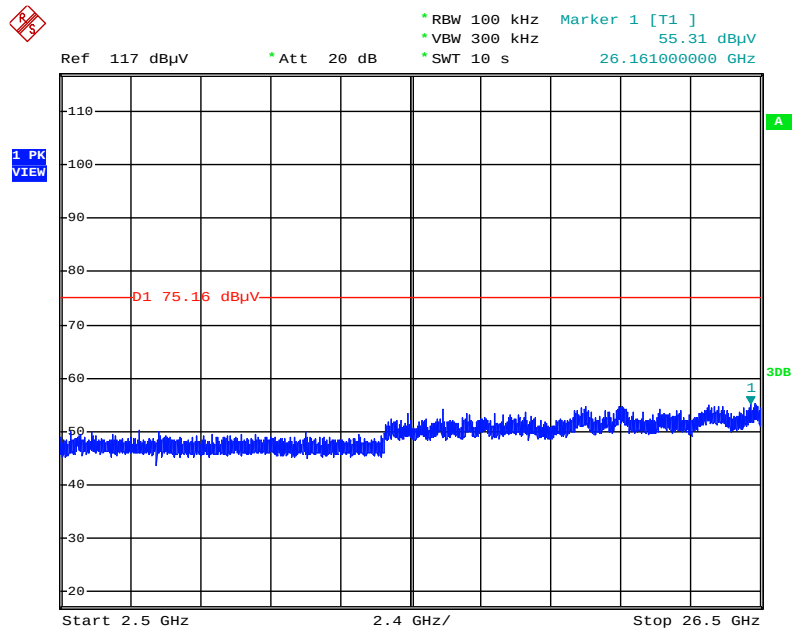


Date: 12.AUG.2014 17:00:52

Plot on Configuration IEEE 802.11g / Reference Level

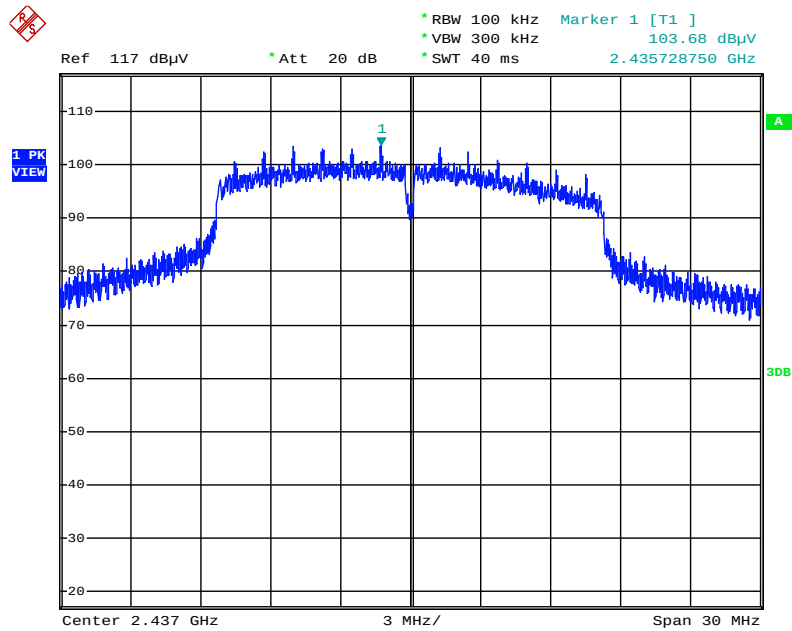


Date: 12.AUG.2014 16:51:23

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

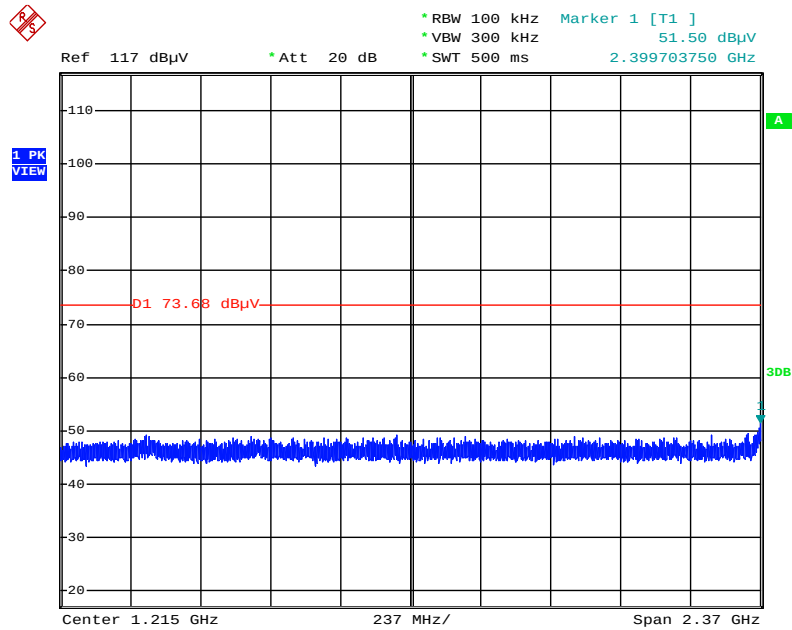


Date: 12.AUG.2014 16:52:02

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

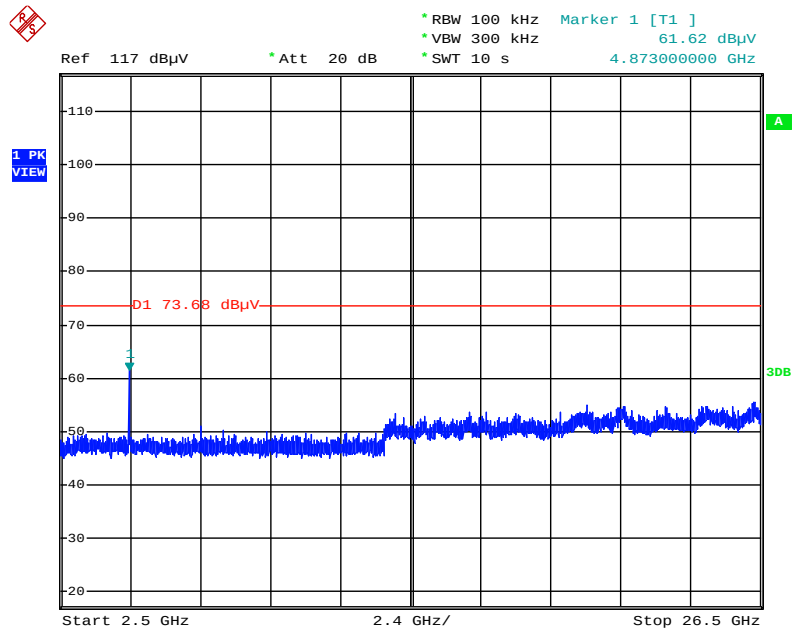


Date: 12.AUG.2014 16:52:53

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

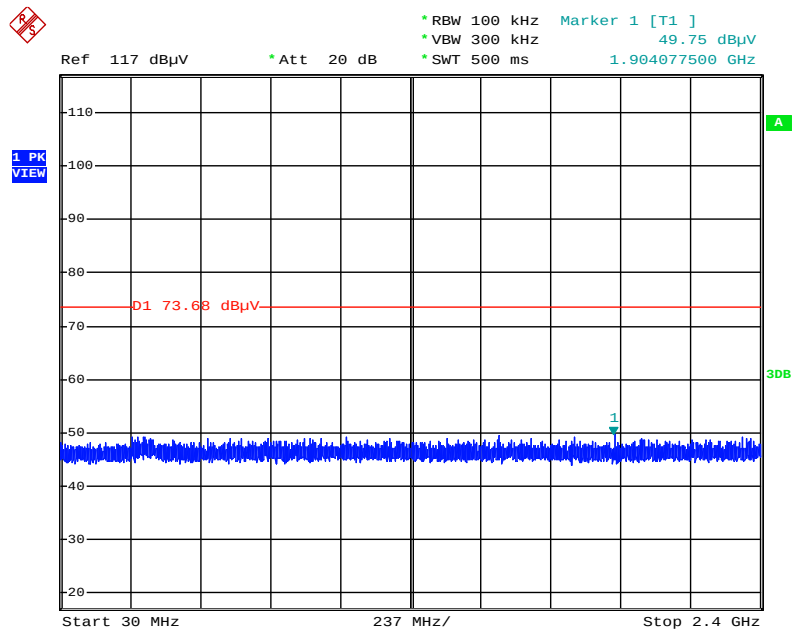

Date: 12.AUG.2014 16:55:45

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

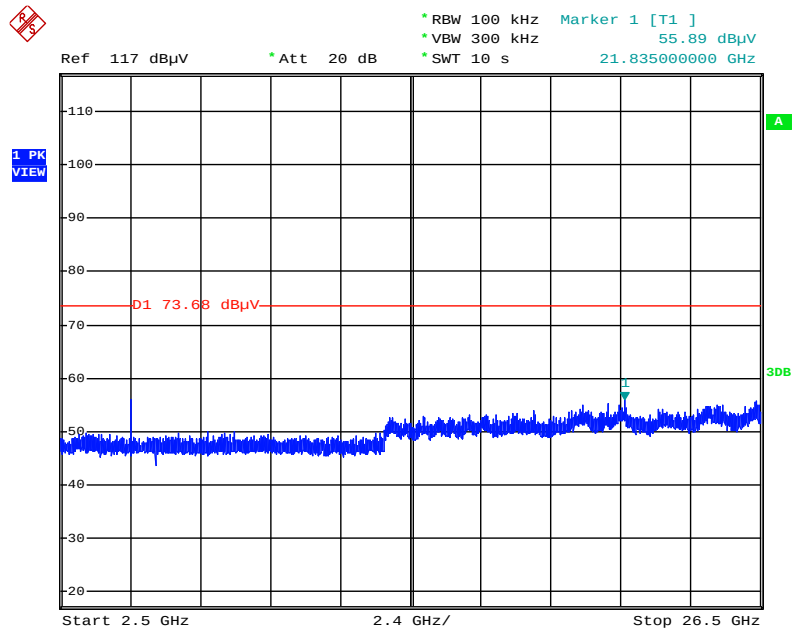

Date: 12.AUG.2014 16:55:03

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO02-CB)
MXE EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 30MHz	Jan. 22, 2014	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2013	Conduction (CO02-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%