

# **TEST REPORT**

**Applicant:** Quectel Wireless Solutions Co., Ltd.

**EUT Description:** Wi-Fi HaLow Module

**Model:** FGH100M-H, FMH100M-H

**Brand:** Quectel

**FCC ID:** XMR2024FGH100MH

**Standards:** FCC 47 CFR Part 15 Subpart C


**Date of Receipt:** 2024/12/24

**Date of Test:** 2024/12/24 to 2025/03/31

**Date of Issue:** 2025/03/31

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



**Huang Kun**  
**Approved By:**



**Chen Chengfu**  
**Reviewed By:**

## Revision History

Rev.	Issue Date	Description	Revised by
01	2025/03/31	Original	Chen Chengfu

## Product Differentiation Statement

FMH100M-H is M.2 packaged type. FMH100M-H and FGH100M-H are all WiFi Halow modules. They have the same frequency and use the same chipset and share the same software & hardware design.

Module	Frequency bands
FMH100M-H / FGH100M-H	ISM 902~928MHz

M.2 is made up with FGH100M-H LGA module and M.2 carrier board. There is no any other internal changes in FGH100M-H module. They are identical in interior structure and components, and just connector interface is different for the marketing requirement.

Only the test data for Model No.(FGH100M-H) was presented in the report.

## Summary of Test Results

FCC Part	Test Items	Result
§15.203/15.247(b)	Antenna Requirement	PASS
§15.207	AC Power Line Conducted Emission	N/A
§15.247 (b)(3)	Output Power	PASS
§15.247 (a)(2)	Occupied Bandwidth	Reporting purposes only
§15.247 (e)	Power Spectral Density	PASS
§15.247(d)	Band Edge for Conducted Emissions	PASS
§15.247(d)	Spurious RF Conducted Emissions	PASS
§15.205 §15.209	Radiated Spurious emissions and Band Edge	PASS

Test Method: ANSI C63.10:2020, KDB 558074 D01 15.247 Mesa Guidance v05r02.

Remark:

1. Pass is EUT meets standard requirements.
2. The EUT is DC power supply, "N/A" denotes "not applicable".

# Table of Contents

<b>1</b>	<b>General Description .....</b>	<b>6</b>
1.1	Lab Information.....	6
1.1.1	Testing Location .....	6
1.1.2	Test Facility / Accreditations .....	6
1.2	Client Information .....	6
1.2.1	Applicant.....	6
1.2.2	Manufacturer.....	6
1.3	Product Information.....	7
<b>2</b>	<b>Test Configuration .....</b>	<b>8</b>
2.1	Test Channel .....	8
2.2	Worst-case configuration and Mode .....	10
2.3	Support Unit used in test .....	10
2.4	Test Environment.....	10
2.5	Test RF Cable.....	10
2.6	Modifications.....	10
2.7	Test Setup Diagram .....	11
2.7.1	Conducted Configuration .....	11
2.7.2	Radiated Configuration .....	12
<b>3</b>	<b>Equipment and Measurement Uncertainty.....</b>	<b>13</b>
3.1	Test Equipment List.....	13
3.2	Measurement Uncertainty .....	14
<b>4</b>	<b>Test Results.....</b>	<b>15</b>
4.1	Antenna Requirement.....	15
4.2	Output Power .....	16
4.3	Occupied Bandwidth .....	17
4.4	Power Spectral Density .....	18
4.5	Conducted Emissions .....	19
4.6	Spurious RF Conducted Emissions .....	20
4.7	Radiated Spurious Emissions and Band Edge .....	21
<b>5</b>	<b>Test Setup Photos.....</b>	<b>23</b>
	Appendix.....	24

## 1 General Description

### 1.1 Lab Information

#### 1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014

Tel.: +86-755-27212361

Contact Email: info@towewireless.com

#### 1.1.2 Test Facility / Accreditations

##### A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

##### FCC Designation No.: CN1353

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1353.

##### ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0152

Company Number: 31000

### 1.2 Client Information

#### 1.2.1 Applicant

Applicant:	Quectel Wireless Solutions Co., Ltd.
Address:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China, 200233

#### 1.2.2 Manufacturer

Manufacturer:	Quectel Wireless Solutions Co., Ltd.
Address:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China, 200233

### 1.3 Product Information

EUT Description:	Wi-Fi HaLow Module
Model No.:	FGH100M-H, FMH100M-H
Brand:	Quectel
Hardware Version:	R1.0
Software Version:	NA
SN:	E1M24KA0H000111
Modulation Type:	OFDM-BPSK, QPSK, 16QAM, 64QAM
Frequency Range:	902~ 928MHz
Rate Type:	1MHz, 2MHz, 4MHz, 8MHz
Antenna Type:	<input checked="" type="checkbox"/> External, <input type="checkbox"/> Integrated
Antenna Gain:	Ant (dBi)
	2.5
Remark: The above EUT's information was declared by applicant, please refer to the specifications or user's manual for more detailed description.	

## 2 Test Configuration

### 2.1 Test Channel

1MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	903.5	17	910.5	29	916.5	41	922.5
05	904.5	19	911.5	31	917.5	43	923.5
07	905.5	21	912.5	33	918.5	45	924.5
09	906.5	23	913.5	35	919.5	47	925.5
11	907.5	25	914.5	37	920.5	49	926.5
13	908.5	27	915.5	39	921.5	/	
Remark: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:							
Test Channel				Test Frequency			
The Lowest channel(CH03)				903.5MHz			
The Middle channel(CH27)				915.5MHz			
The Highest channel(CH49)				926.5MHz			

2MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
06	905.0	18	911.0	30	917.0	42	923.0
10	907.0	22	913.0	34	919.0	46	925.0
14	909.0	26	915.0	38	921.0	/	
Remark: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:							
Test Channel				Test Frequency			
The Lowest channel(CH06)				905.0MHz			
The Middle channel(CH26)				915.0MHz			
The Highest channel(CH46)				925.0MHz			



4MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
08	906.0	24	914.0	40	922	/	
16	910.0	32	918.0	48	926		
Remark: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:							
Test Channel				Test Frequency			
The Lowest channel(CH08)				906.0MHz			
The Lowest adjacent channel(CH16)*				910.0MHz			
The Middle channel(CH24)				914.0MHz			
The Highest adjacent channel(CH40)*				922.0MHz			
The Highest channel(CH48)				926.0MHz			
Note *: Channels 8 and 48 in general require reduced output power to satisfy bandedge radiated field strength requirements at limit. The adjacent channel with the highest maximum output power specified for the production unit should be tested (Channels 16 and 40).							

8MHz					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
12	908.0	28	916.0	44	924.0
Custom	920.0	Custom	922.0		
Remark: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:					
Test Channel			Test Frequency		
The Lowest channel(CH12)			908.0MHz		
The Middle channel(CH28)			916.0MHz		
The Custom channel			920.0MHz		
The Custom channel			922.0MHz		
The Highest channel(CH44)			924.0MHz		

## 2.2 Worst-case configuration and Mode

Modulation Type	1MHz	2MHz	4MHz	8MHz
Transmitting mode	Keep the EUT was programmed to be in continuously transmitting mode			
Normal Link	Keep the EUT operation to normal function.			

## 2.3 Support Unit used in test

Description	Manufacturer	Model	Serial Number
Laptop	Lenovo	Thinkbook 14 G4+IAP	YX05AZ13
Computer	Lenovo	M4000q-06IAB	YLN0S2523W03
Development Board *	Quectel	FGH100M-RF-LR-SOCKET-EVB_V2.1	/
Remark: * the information of table are provided by client.			

## 2.4 Test Environment

Temperature:	Normal: 15°C ~ 35°C
Relative Humidity	45 ~ 56 % RH Ambient
Voltage:	DC 3.3V
Remark: The testing environment is within the scope of the EUT user manual and meets the requirements of the standard testing environment.	

## 2.5 Test RF Cable

**For all conducted test items:** The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.


Offset = RF cable loss + attenuator factor.

## 2.6 Modifications


No modifications were made during testing.

## 2.7 Test Setup Diagram

### 2.7.1 Conducted Configuration

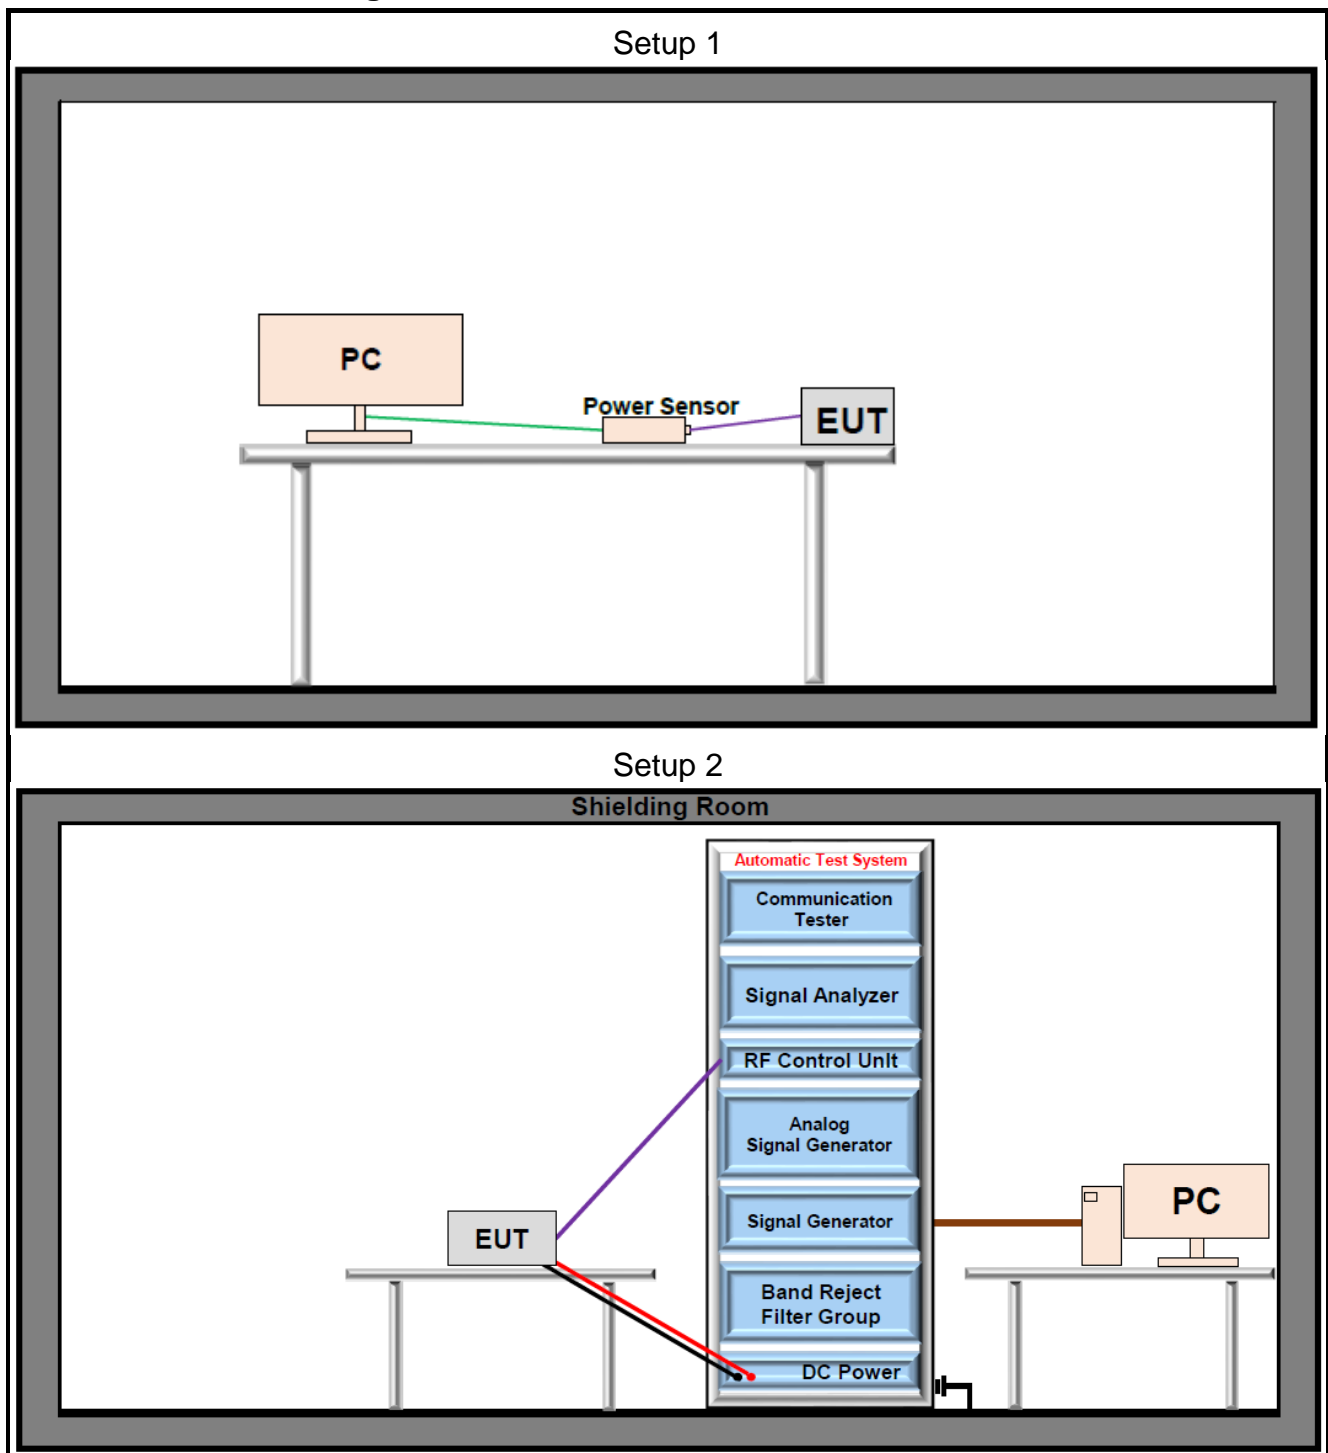

## 2.7.2 Radiated Configuration

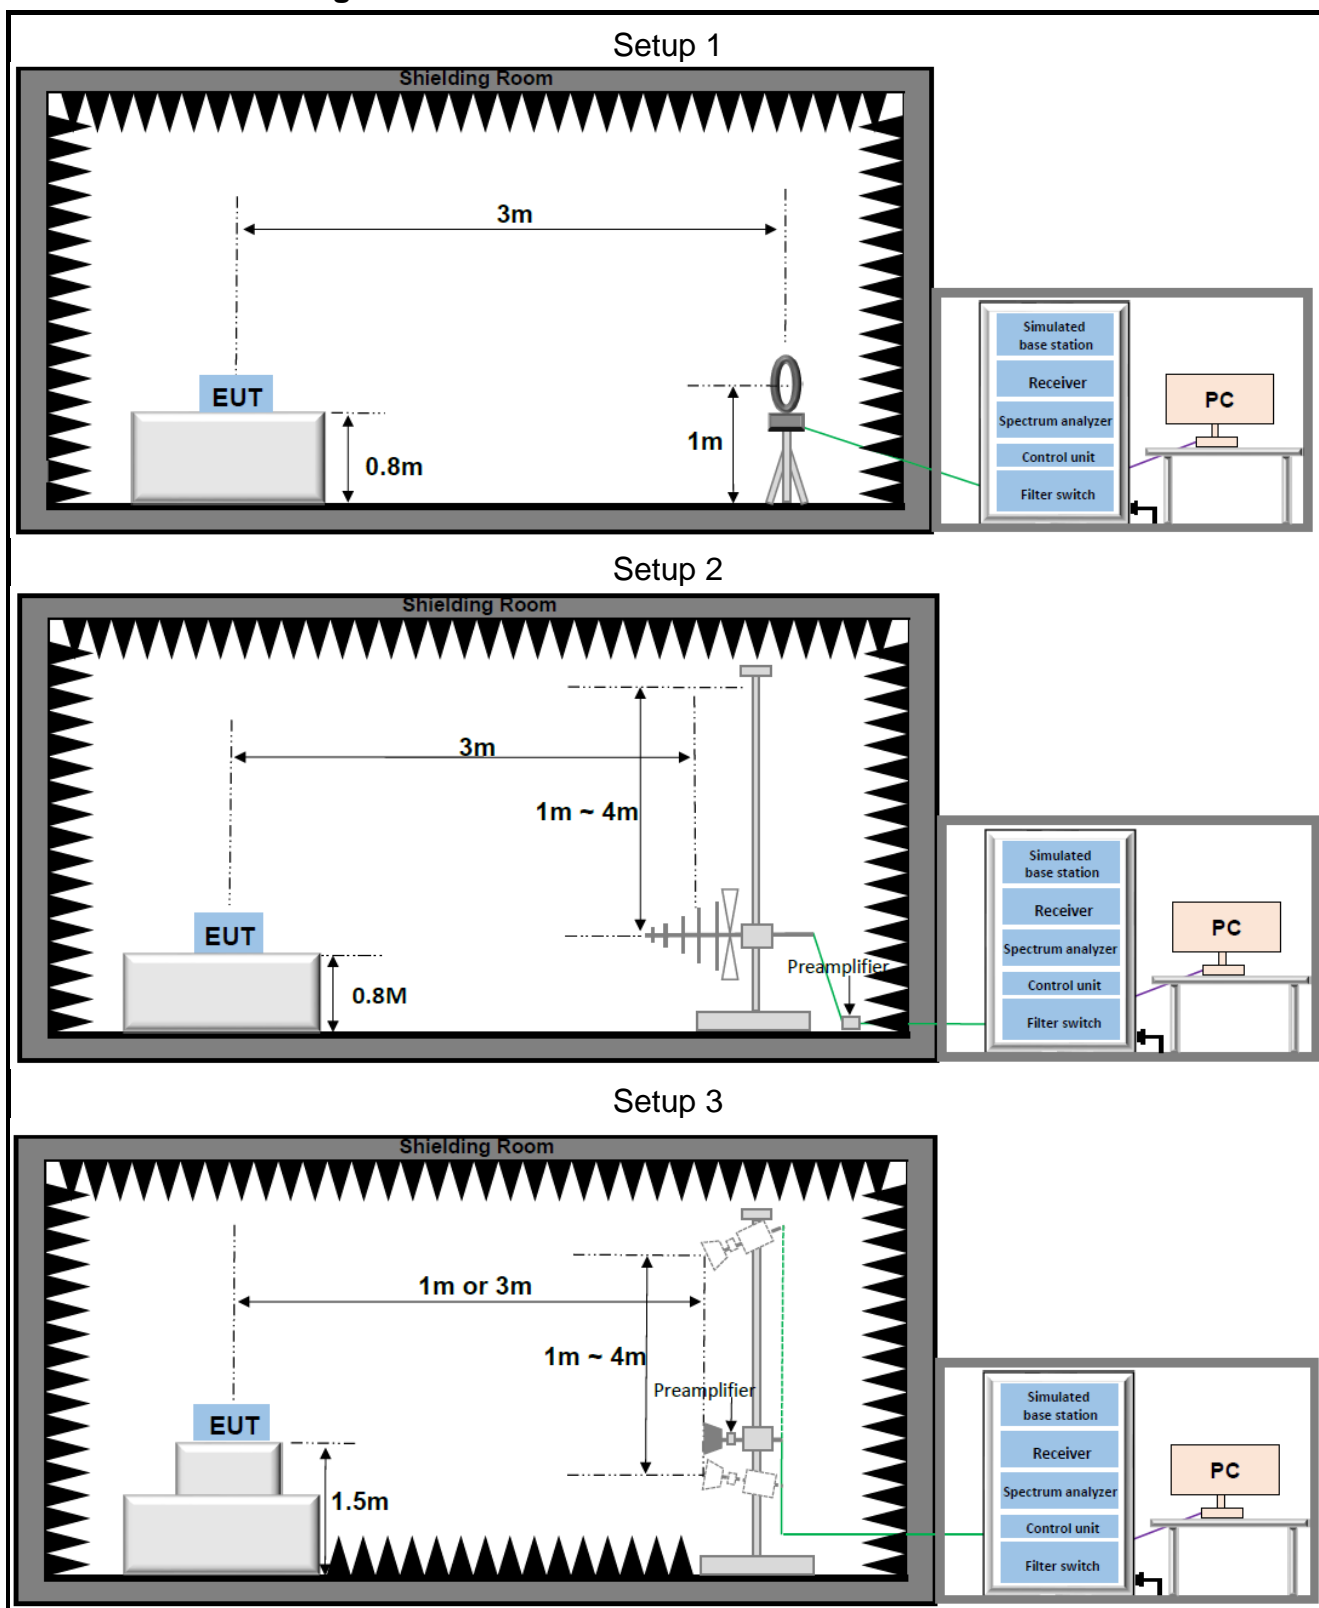

### 3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable to recognized national standards.

#### 3.1 Test Equipment List

RF					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Signal Analyzer	Keysight	N9020A	US46470429	2024/03/25	2025/03/24
				2025/03/14	2026/03/13
Signal Generator	R&S	SMR20	101027	2024/03/25	2025/03/24
				2025/03/11	2026/03/10
Vector Signal Generator	R&S	SMM100A	549353	2024/05/30	2025/05/29
Power Sensor	Anritsu	MA24408A	12520	2024/05/30	2025/05/29
RF Control Unit	Tonscend	JS0806-2	23C80620671	2024/05/30	2025/05/29
Cable Loss	Tonscend	N/A	N/A	2024/05/30	2025/05/29
Attenuator	Yinsaige	30dB	N/A	2024/05/30	2025/05/29
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2024/05/30	2025/05/29
Measurement Software	Tonscend	TS1120-3	10659	N/A	N/A

Radiated Emission					
Description	Manufacturer	Model	SN	Last Due	Cal Due
Biconic Logarithmic Periodic Antennas	Schwarzbeck	VULB9163	1643	2023/06/25	2025/06/24
Double-Ridged Horn Antennas	Schwarzbeck	BBHA 9120D	2809	2023/06/25	2025/06/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	1290	2023/06/25	2025/06/24
Signal Analyzer	Keysight	N9020A	MY49100252	2024/03/25	2025/03/24
				2025/03/11	2026/03/10
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2024/05/30	2025/05/29
Wideband Radio Communication Tester	R&S	CMW500	150645	2024/03/25	2025/03/24
				2025/03/11	2026/03/10
Low Noise Amplifier	Tonscend	TAP9K3G40	AP23A8060273	2023/04/08	2025/04/07
				2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP01018050	AP22G806258	2023/04/08	2025/04/07
				2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP18040048	AP22G806247	2023/04/08	2025/04/07
				2025/03/11	2027/03/10
Hygrometer	BINGYU	HTC-1	N/A	2023/06/01	2025/05/31
Band Reject Filter Group	Townshend	JS0806-F	23A806F0652	N/A	N/A
Test Software	Tonscend	TS+	Version: 5.0.0	N/A	N/A

### 3.2 Measurement Uncertainty

Parameter	U <sub>lab</sub>
Frequency Error	679.98Hz
Output Power	0.76dB
Conducted Spurious Emissions	2.22dB
Radiated Emissions(30MHz~1000MHz)	4.66dB
Radiated Emissions(1GHz~18GHz)	5.42dB

Uncertainty figures are valid to a confidence level of 95%

## 4 Test Results

### 4.1 Antenna Requirement

<b>Standard Applicable:</b>	47 CFR Part 15C Section 15.203 /247(b)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<p>The antenna gain and type as provided by the manufacturer are as follows: The antenna Type is External. With maximum gain is 2.5dBi. Antenna Anti-Replacement Construction: An embedded-in antenna design is used.</p>	

## 4.2 Output Power

### Limits

If With directional antenna gains less than 6 dBi, the limit is 30dBm.

### Test Procedure

ANSI C63.10:2020 Section 11.9.1.2(PKPM1) or 11.9.2.3.2(AVGPM-G)

### Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. The power output was measured on the EUT antenna port using RF Cable with attenuator connected to a power meter via wideband power sensor. Peak output power was read directly from power meter.
3. Measure and record the results in the test report.

### Test Setup

Refer to section 2.7.1- Setup 1 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.



## 4.3 Occupied Bandwidth

### Limits

DTSBW: The minimum 6 dB bandwidth shall be at least 500 kHz.

99%BW: None, for reporting purposes only.

### Test Procedure

ANSI C63.10:2020 Section 11.8.2 and 6.9.3

### Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. The transmitter output is connected to a spectrum analyzer:
3. RBW = 100kHz(DTS)
4. RBW = 1% - 5%(99%BW)
5. VBW = 3 times the RBW
6. Sweep = Auto
7. Detector = Peak
8. Trace = Max hold
9. The trace was allowed to stabilize
10. Measure and record the results in the test report.

### Test Notes

DTS: The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X= 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

### Test Setup

Refer to section 2.7.1- Setup 2 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.

## 4.4 Power Spectral Density

### Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Test Procedure

ANSI C63.10:2020 Section 11.10.2(PKPSD)

### Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously
2. The transmitter output is connected to a spectrum analyzer
3.  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$   
(If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.)
4.  $\text{VBW} \geq 3 \text{ times RBW}$
5. Span = 1.5 times the DTS bandwidth
6. Sweep = Auto
7. Detector = Peak
8. Trace = Max hold
9. The trace was allowed to stabilize
10. Measure and record the results in the test report.

### Test Notes

Limit = 8dBm/3kHz, But the actual measurement is dBm/100kHz, and the conversion formula for limit is as follows:

Limit = 8dBm -  $\text{Log}_{10}(3\text{kHz}/100\text{kHz}) * 10 = 23.23\text{dBm}/100\text{kHz}$

### Test Setup

Refer to section 2.7.1- Setup 2 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.

## 4.5 Conducted Emissions

### Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph 15.247(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### Test Procedure

ANSI C63.10:2020 Section 11.11.3

### Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously
2. The transmitter output is connected to a spectrum analyzer
3. RBW = 100kHz
4. VBW = 300kHz
5. Point  $\geq 2 \times \text{span/RBW}$
6. Sweep = Auto
7. Detector = Peak
8. Trace = Max hold
9. The trace was allowed to stabilize
10. Measure and record the results in the test report

### Test Setup

Refer to section 2.7.1- Setup 2 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.

## 4.6 Spurious RF Conducted Emissions

### Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph 15.247(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### Test Procedure

ANSI C63.10:2020 Section 11.11.3

### Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. Activate frequency hopping function if necessary.
3. The transmitter output is connected to a spectrum analyzer
4. The spectrum from 30MHz - 26.5GHz
5. RBW = 100kHz
6. VBW = 300kHz
7. Sweep = Auto
8. Detector = Peak
9. Trace = Max hold
10. The trace was allowed to stabilize
11. Measure and record the results in the test report

### Test Setup

Refer to section 2.7.1- Setup 2 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.

## 4.7 Radiated Spurious Emissions and Band Edge

### Limits

Spurious emissions are permitted in an of the frequency bands:

MHz	MHz	MHz	MHz	GHz	GHz
0.090 - 0.110	12.29 - 12.293	149.9 - 150.05	1660 - 1710	4.5 - 5.15	14.47 - 14.5
0.495 - 0.505	12.51975 - 12.52025	156.52475 - 156.52525	1718.8 - 1722.2	5.35 - 5.46	15.35 - 16.2
2.1735 - 2.1905	12.5767 - 12.57725	156.7 - 156.9	2200 - 2300	7.25 - 7.75	17.7 - 21.4
4.125 - 128	13.36 - 13.41	162.0125 - 167.17	2310 - 2390	8.025 - 8.5	22.01 - 23.12
4.17725 - 4.17775	16.42 - 16.423	167.72 - 173.2	2483.5 - 2500	9.0 - 9.2	23.6 - 24.0
4.20725 - 4.20775	16.69475 - 16.69525	240 - 285	2655 - 2900	9.3 - 9.5	31.2 - 31.8
6.215 - 6.218	1680425 - 1680475	322 - 335.4	3260 - 3267	10.6 - 12.7	36.43 - 36.5
6.26775 - 6.26825	25.5 - 25.67	399.9 - 410	3332 - 3339	13.25 - 13.4	
6.31175 - 6.31225	37.5 - 38.25	608 - 614	3345.8 - 3358		
8.291 - 8.294	73 - 74.6	960 - 1240	3600 - 4400		
8.362 - 8.366	74.8 - 75.2	1300 - 1427			
8.37625 - 8.38675	108 - 121.94	1435 - 1626.5			
8.41425 - 8.41475	123 - 138	1645.5 - 1646.5			

Radiated disturbance of an intentional radiator:

Frequency	Field strength ( $\mu\text{V}/\text{m}$ )	Limit (dB $\mu\text{V}/\text{m}$ )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	74.0	Peak	3
		54.0	Average	

### Test Procedure

ANSI C63.10:2020 Section 6.4 & 6.5 & 6.6

### Test Settings

- For radiated emissions measurements performed at frequencies less than or equal to 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80cm above the reference ground plane.
- For radiated emissions measurements performed at frequencies above 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80cm above the ground plane.
- Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1m to 4m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e, field strength or received power), when orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25cm.
- For each suspected emission, the EUT was ranged its worst case and then tune the antenna tower(from 1~4m) and turntable(from 0~360°) find the maximum reading. Preamplifier and a high pass filter are used for the test in order get better signal level comply with the guidelines.
- Set to the maximum power setting and enable the EUT transmit continuously.
- The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- spectrum analyzer setting:  
Measurements Below 1000MHz: RBW = 120 kHz; VBW  $\geq$  300 kHz; Detector = Peak  
Measurements Above 1000MHz: RBW = 1 MHz; VBW  $\geq$  3 MHz; Detector = Peak

Average Measurements Above 1000MHz:

RBW = 1 MHz, VBW  $\geq$  1/T, with peak detector for average measurements.

8. The field strength is calculated by adding the Antenna Factor, Cable Factor. The basic equation with a sample calculation is as follows:

Level = Reading(dB $\mu$ V) + AF(dB/m) + Factor(dB):

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit(dB $\mu$ V/m) – Level(dB $\mu$ V/m)

9. Repeat above procedures until all frequencies measured was complete.
10. Measure and record the results in the test report.

### **Test Notes**

1. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
2. Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. the disturbance between 9kHz to 30MHz, 30MHz-1GHz and 18GHz to 40GHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded, so only the harmonics had been displayed.
3. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

### **Test Setup**

Refer to section 2.7.2 for details.

### **Measuring Instruments**

The measuring equipment is listed in the section 3.1 of this test report.

### **Test Result**

The detailed test data see: **Appendix**.

## 5 Test Setup Photos

The detailed test data see: **Appendix A - 802.11 ah Setup Photos**


# Appendix


## DTS Bandwidth Test Result


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
1MHz	Ant1	903.5	0.828	903.084	903.912	0.5	PASS
1MHz	Ant1	915.5	0.826	915.080	915.906	0.5	PASS
1MHz	Ant1	926.5	0.812	926.096	926.908	0.5	PASS
2MHz	Ant1	905	1.720	904.136	905.856	0.5	PASS
2MHz	Ant1	925	1.684	924.176	925.860	0.5	PASS
4MHz	Ant1	906	3.584	904.208	907.792	0.5	PASS
4MHz	Ant1	910	3.504	908.240	911.744	0.5	PASS
4MHz	Ant1	914	3.600	912.216	915.816	0.5	PASS
4MHz	Ant1	922	3.592	920.192	923.784	0.5	PASS
4MHz	Ant1	926	3.584	924.208	927.792	0.5	PASS
8MHz	Ant1	908	7.440	904.288	911.728	0.5	PASS
8MHz	Ant1	916	7.536	912.224	919.760	0.5	PASS
8MHz	Ant1	920	7.520	916.240	923.760	0.5	PASS
8MHz	Ant1	922	7.520	918.240	925.760	0.5	PASS
8MHz	Ant1	924	7.440	920.256	927.696	0.5	PASS



## Test Graphs

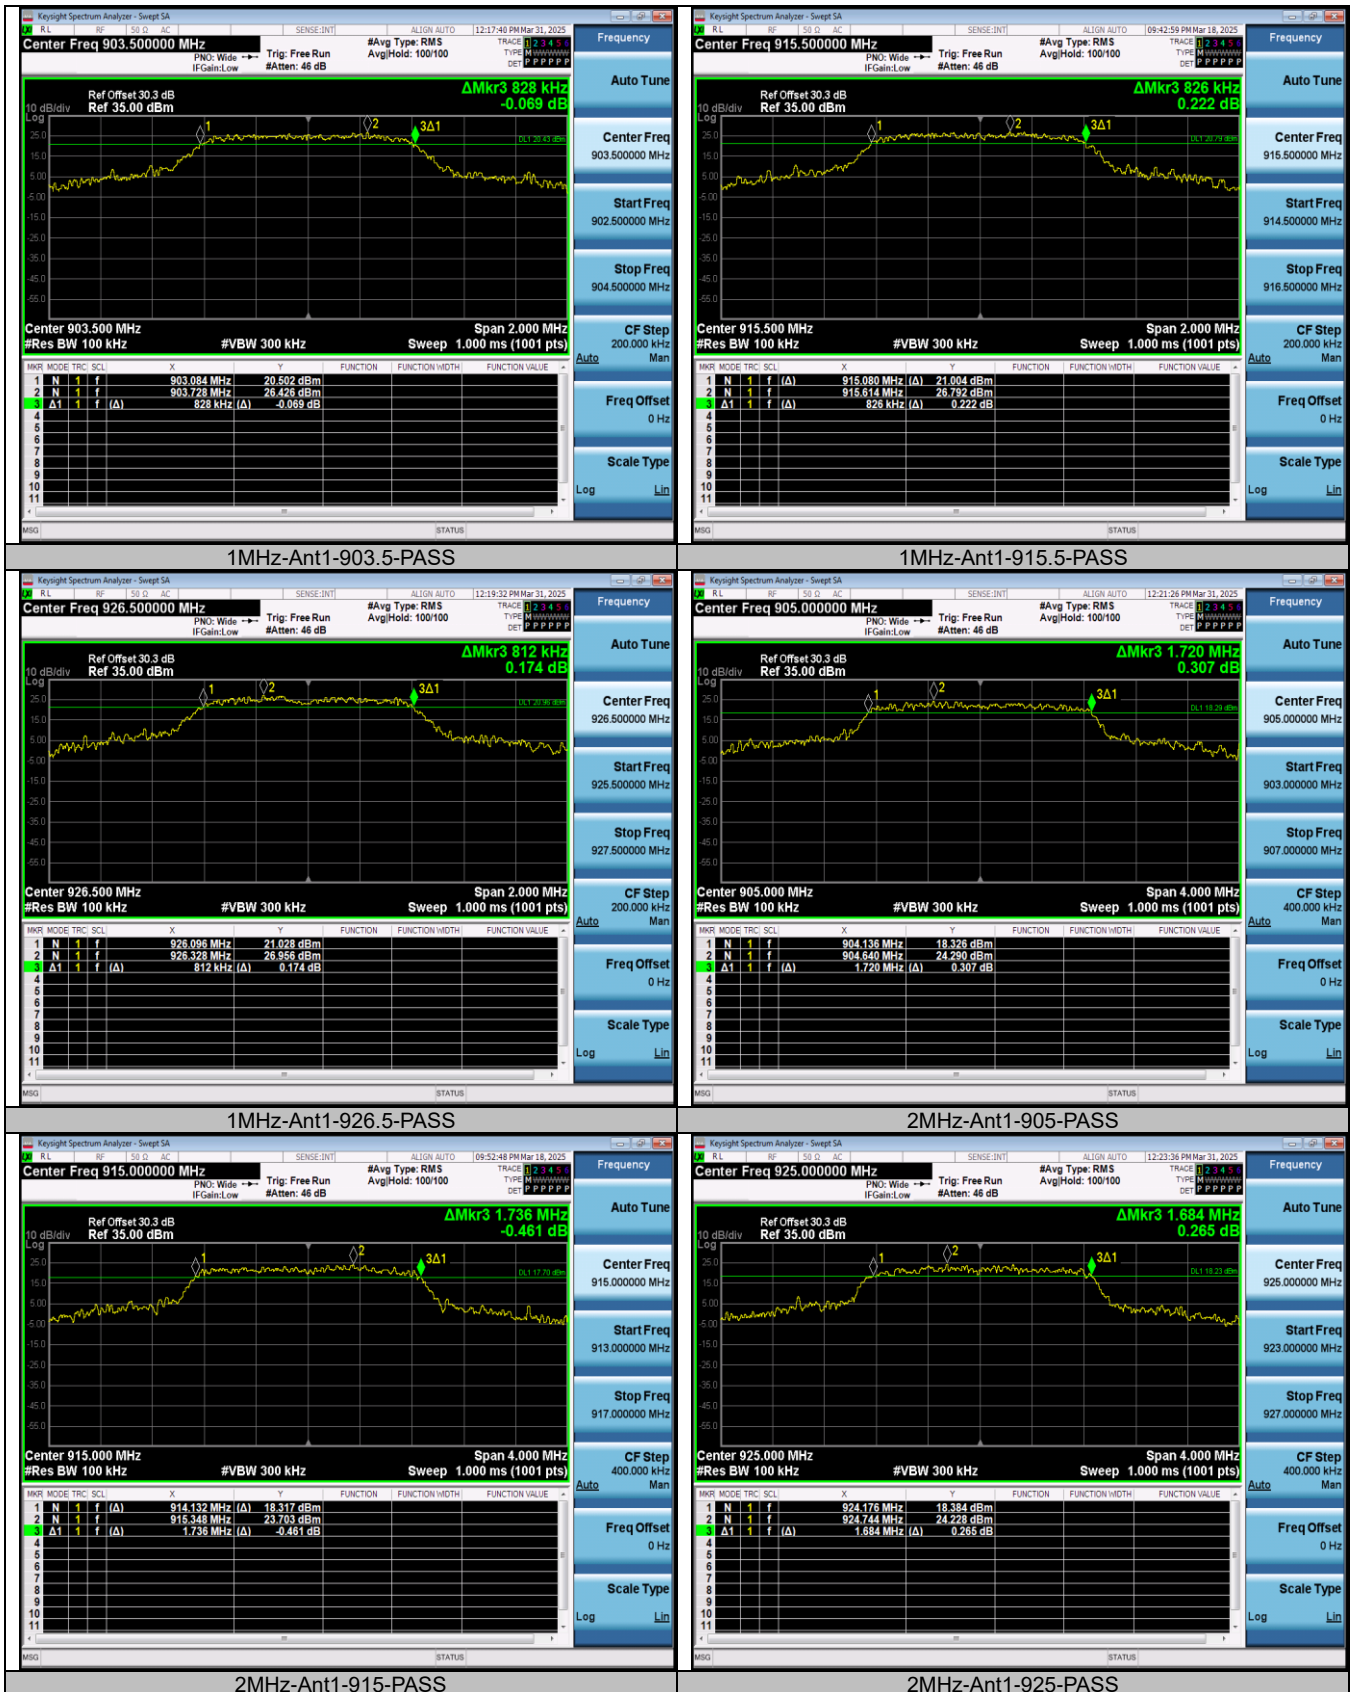

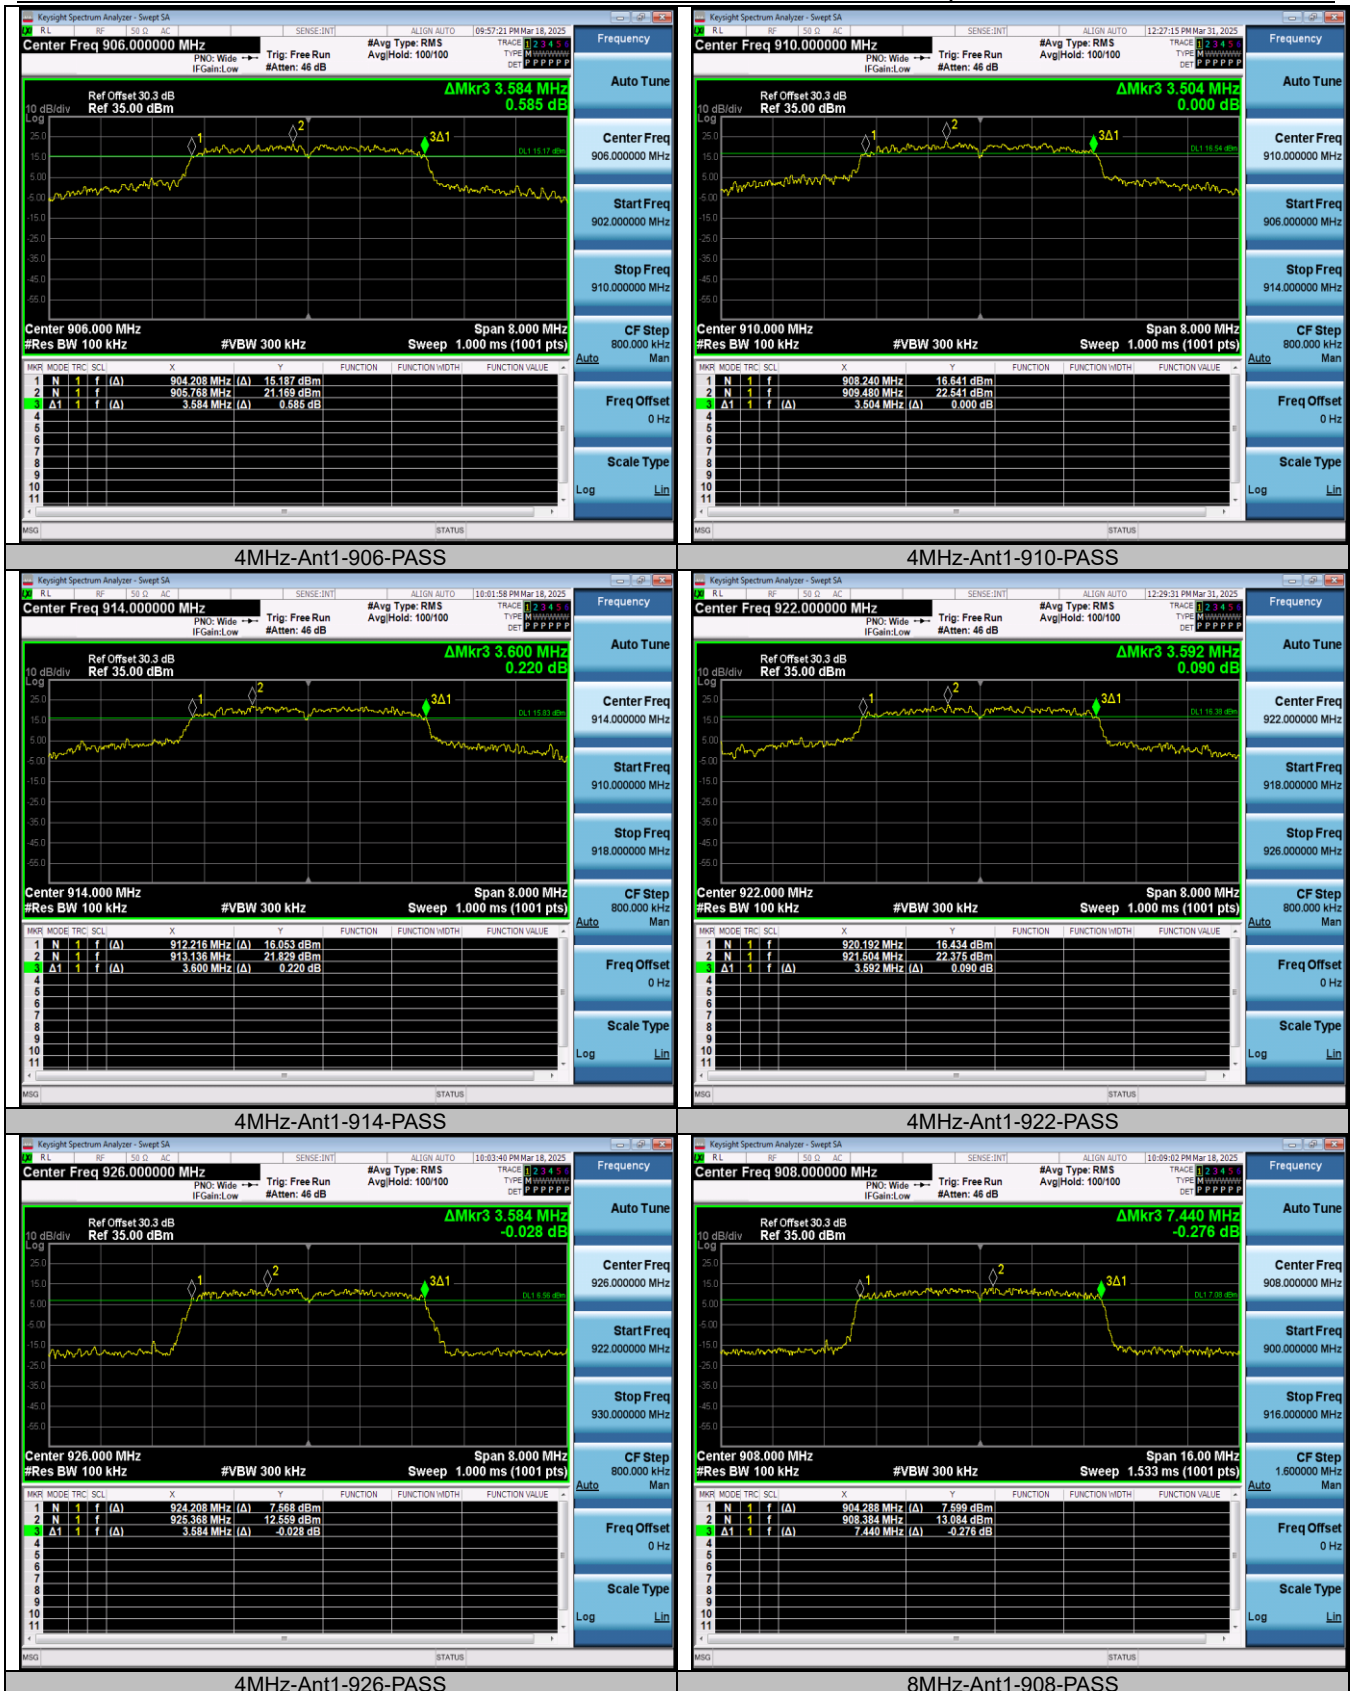


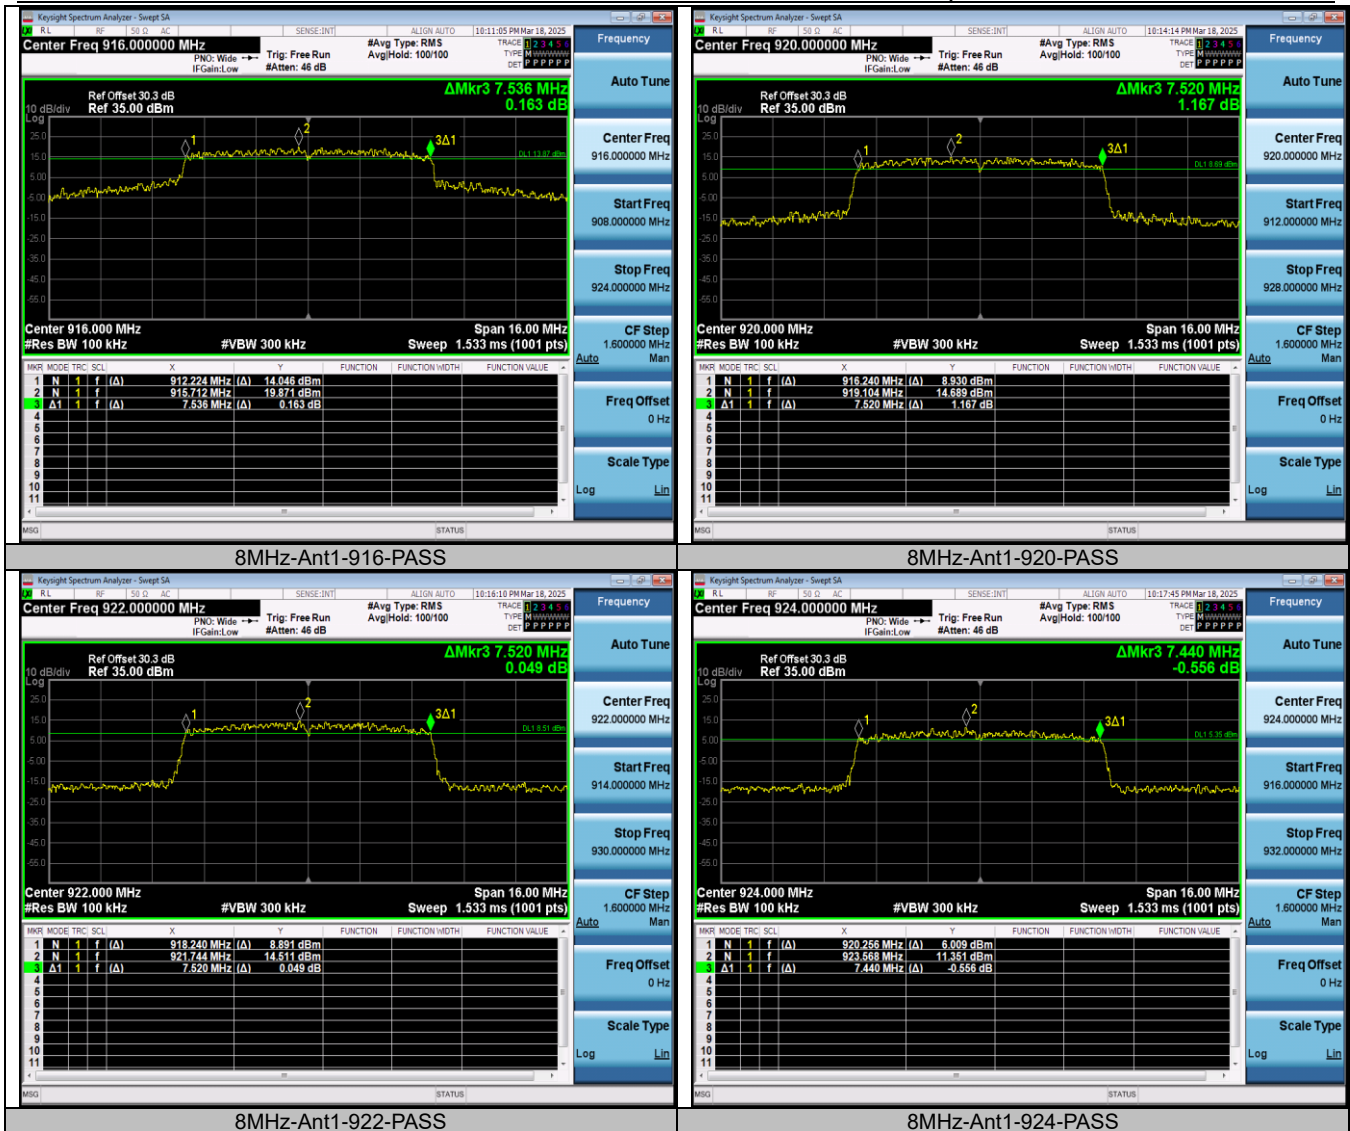



**Occupied Channel Bandwidth  
Test Result**

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
1MHz	Ant1	903.5	1.0439	902.9763	904.0202	---	---
1MHz	Ant1	915.5	1.0836	914.9466	916.0302	---	---
1MHz	Ant1	926.5	1.0424	925.9708	927.0132	---	---
2MHz	Ant1	905	2.6231	903.6360	906.2591	---	---
2MHz	Ant1	915	2.2645	913.8414	916.1059	---	---
2MHz	Ant1	925	2.3300	923.7596	926.0896	---	---
4MHz	Ant1	906	4.5448	903.6023	908.1471	---	---
4MHz	Ant1	910	5.4037	907.1851	912.5888	---	---
4MHz	Ant1	914	5.1193	911.3217	916.4410	---	---
4MHz	Ant1	922	5.2762	919.2036	924.4798	---	---
4MHz	Ant1	926	3.6414	924.1810	927.8224	---	---
8MHz	Ant1	908	7.5381	904.2323	911.7704	---	---
8MHz	Ant1	916	10.045	910.8053	920.8503	---	---
8MHz	Ant1	920	7.5583	916.2211	923.7794	---	---
8MHz	Ant1	922	7.5252	918.2414	925.7666	---	---
8MHz	Ant1	924	7.5619	920.2292	927.7911	---	---

## Test Graphs

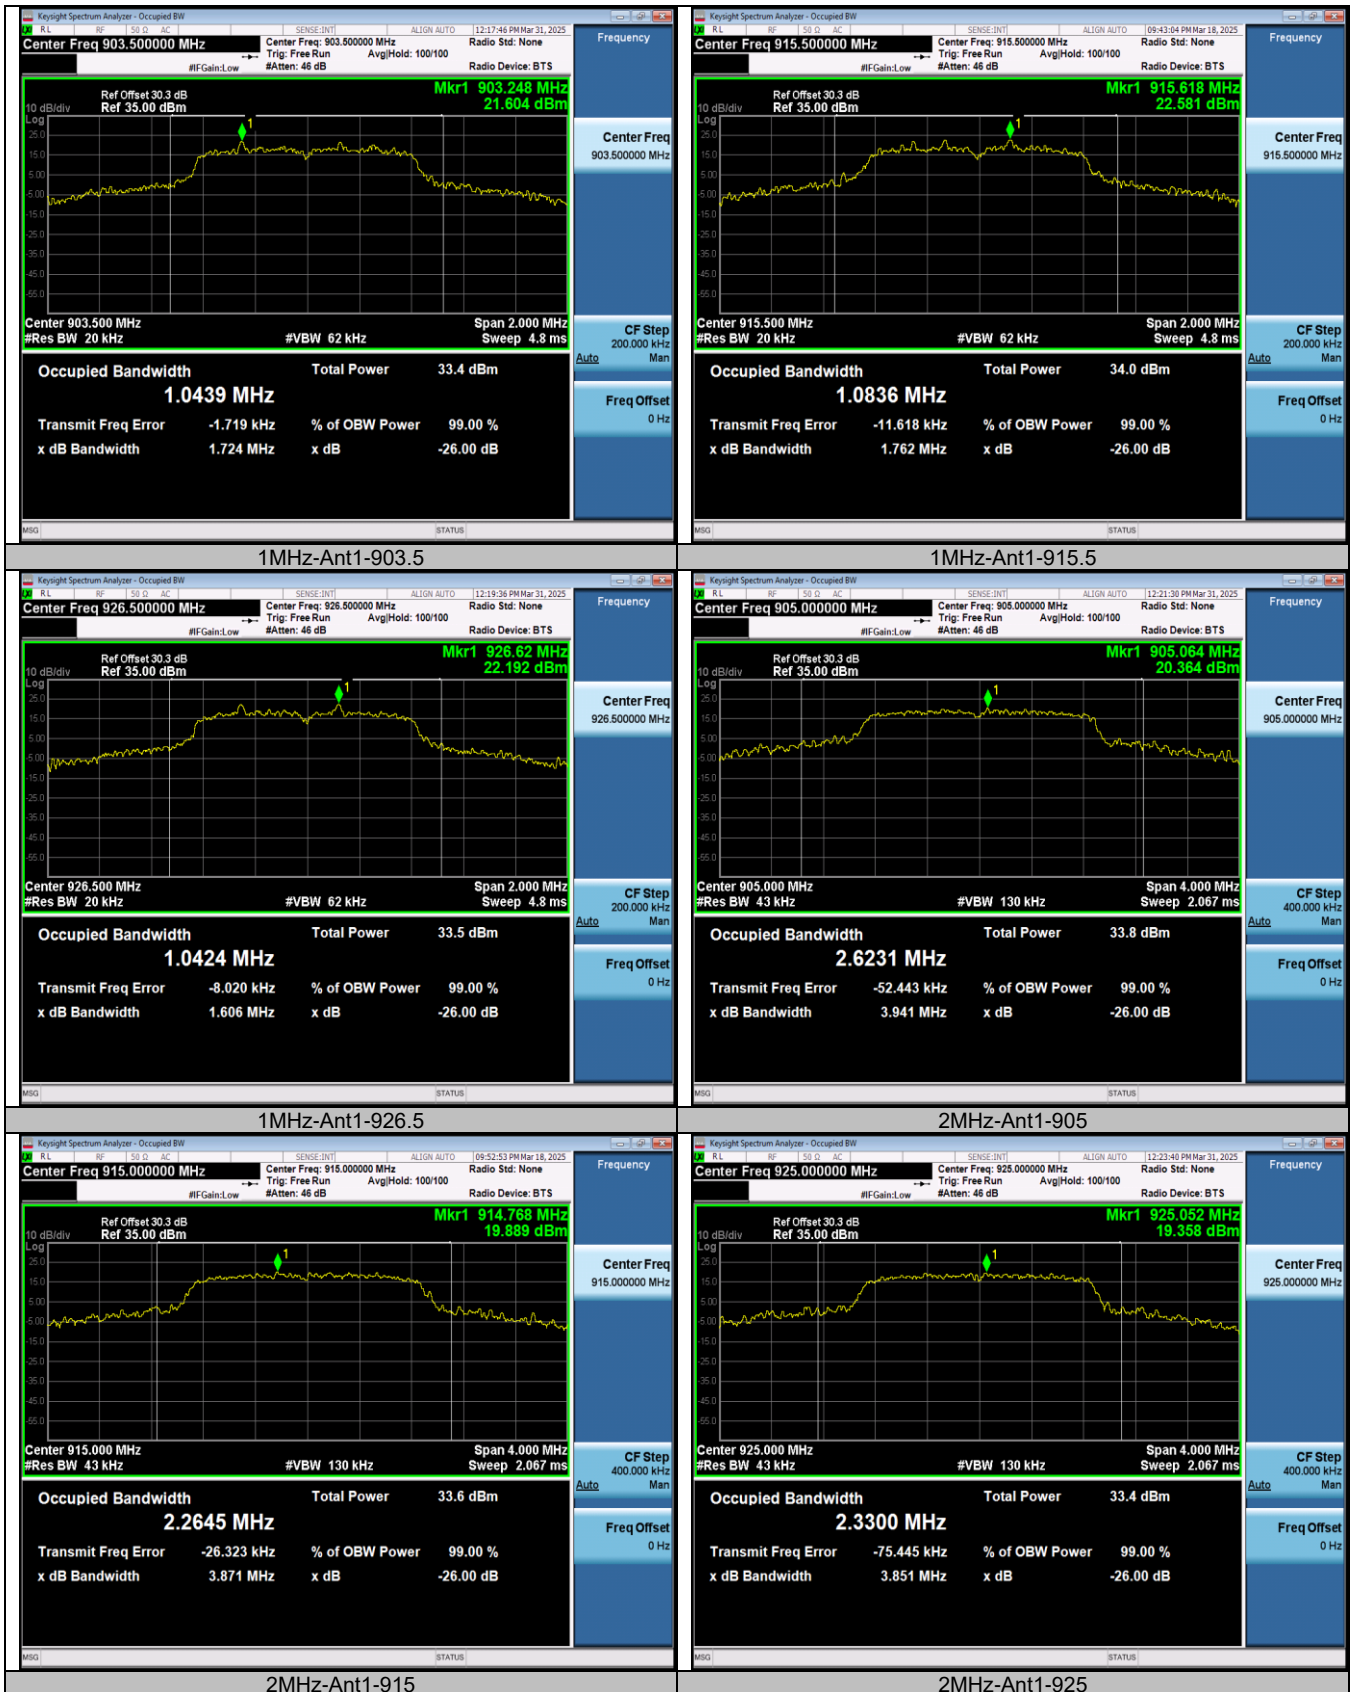

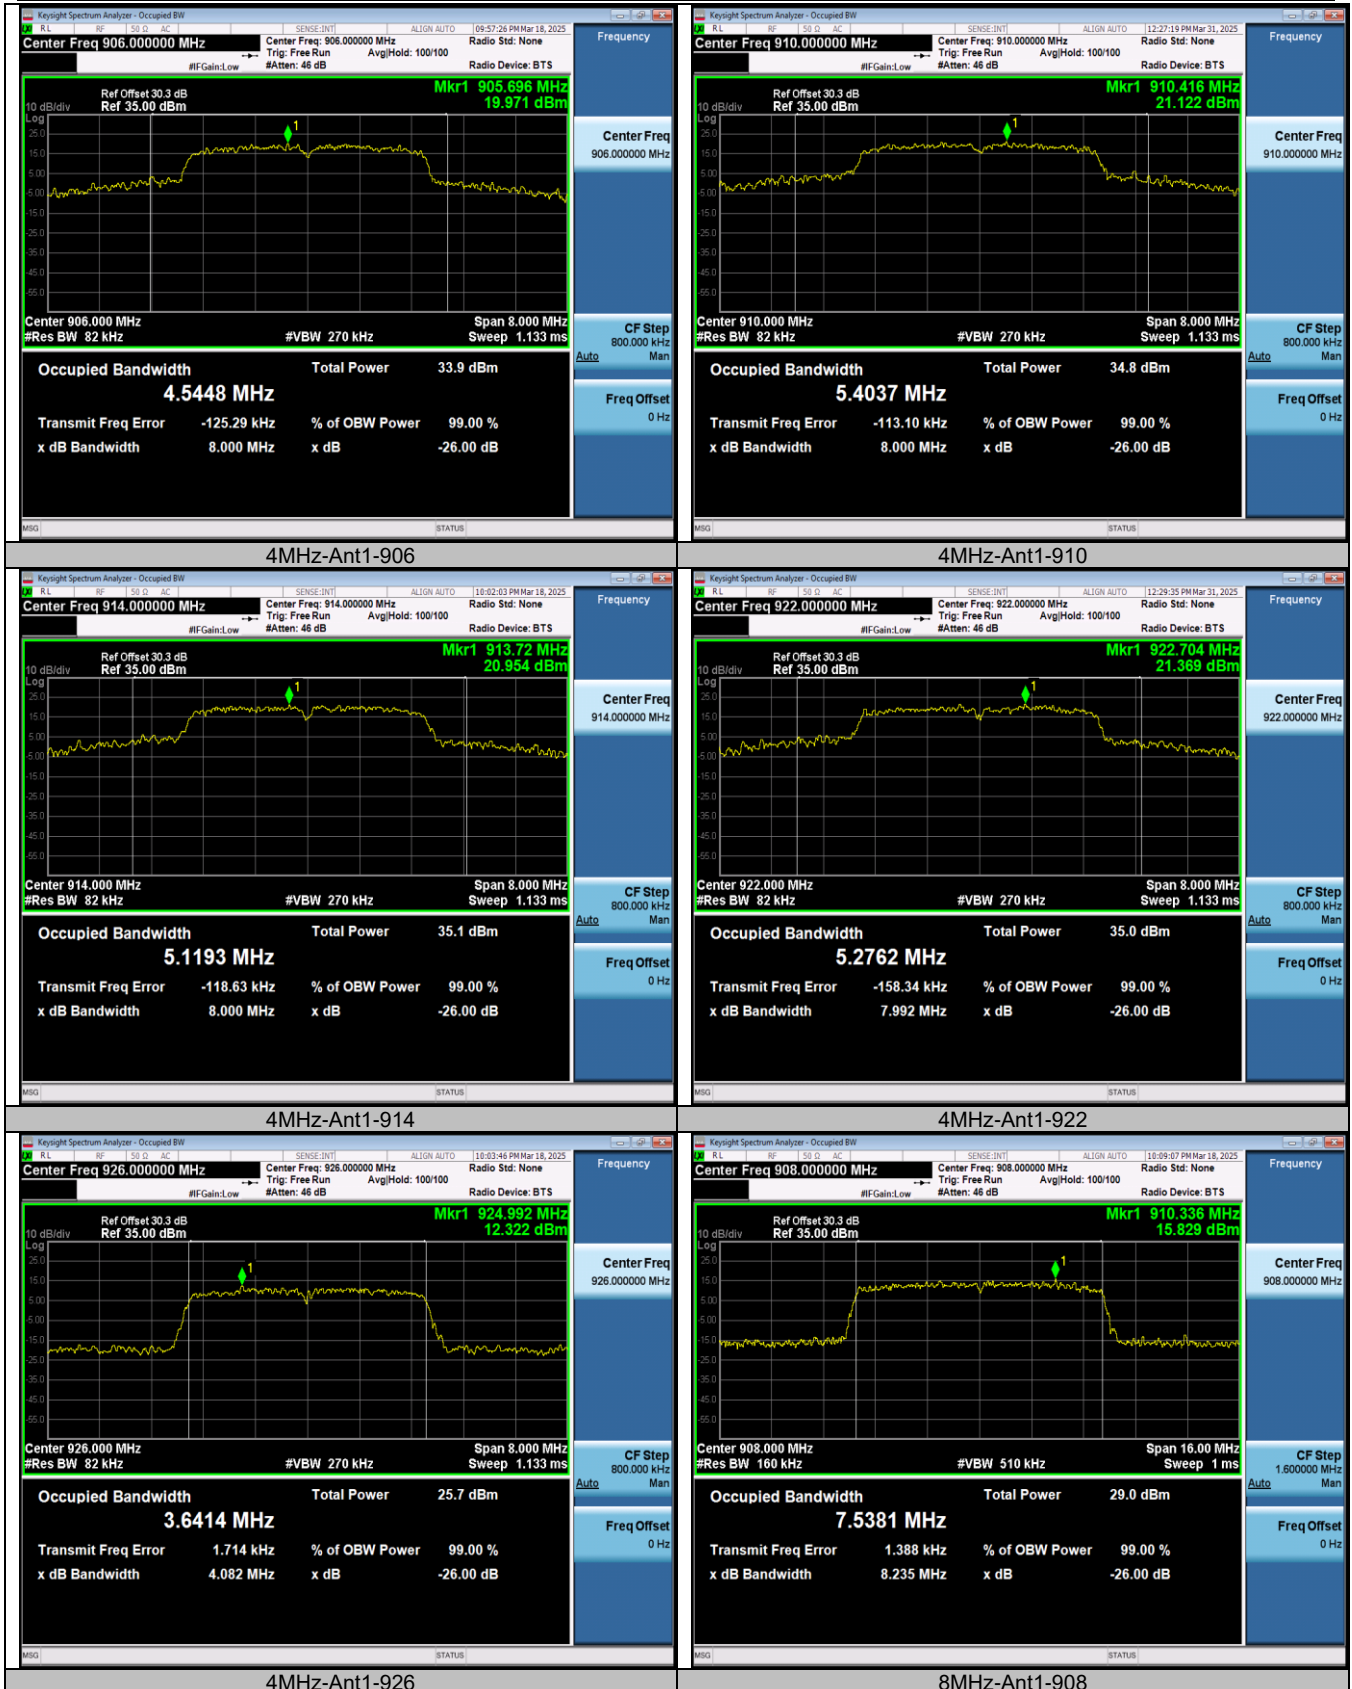

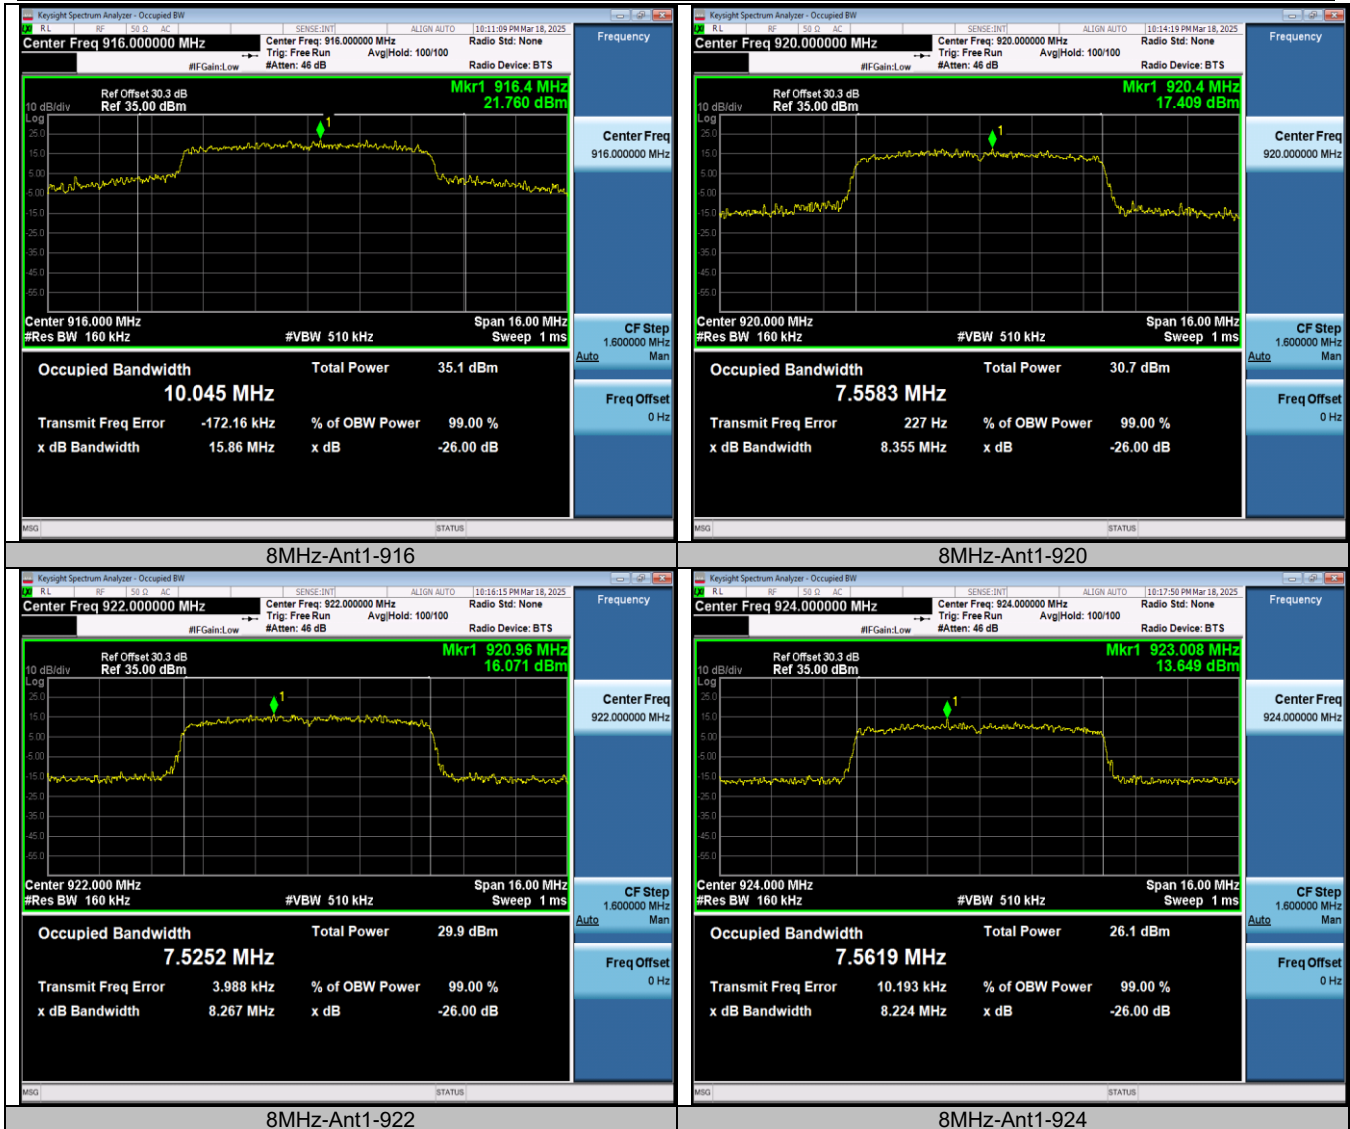



**Maximum conducted output power  
Test Result**

TestMode	Antenna	Frequency[MHz]	Power setting	Result[dBm] Avg.	Limit[dBm]	Verdict
1MHz	Ant1	903.5	0	27.197	≤30	PASS
1MHz	Ant1	915.5	0	27.452	≤30	PASS
1MHz	Ant1	926.5	0	27.284	≤30	PASS
2MHz	Ant1	905	1	27.565	≤30	PASS
2MHz	Ant1	915	0	27.449	≤30	PASS
2MHz	Ant1	925	0	27.263	≤30	PASS
4MHz	Ant1	906	0	27.323	≤30	PASS
4MHz	Ant1	910	2	28.065	≤30	PASS
4MHz	Ant1	914	2	28.335	≤30	PASS
4MHz	Ant1	922	2	28.172	≤30	PASS
4MHz	Ant1	926	-10	18.853	≤30	PASS
8MHz	Ant1	908	-7	22.033	≤30	PASS
8MHz	Ant1	916	2	28.444	≤30	PASS
8MHz	Ant1	920	-5	24.037	≤30	PASS
8MHz	Ant1	922	-6	23.113	≤30	PASS
8MHz	Ant1	924	-10	19.137	≤30	PASS



**Maximum power spectral density  
Test Result**

TestMode	Antenna	Frequency[MHz]	Result[dBm/100kHz]	Limit[dBm/100kHz]	Verdict
1MHz	Ant1	903.5	19.94	≤23.23	PASS
1MHz	Ant1	915.5	20.28	≤23.23	PASS
1MHz	Ant1	926.5	20.00	≤23.23	PASS
2MHz	Ant1	905	16.93	≤23.23	PASS
2MHz	Ant1	915	16.31	≤23.23	PASS
2MHz	Ant1	925	16.60	≤23.23	PASS
4MHz	Ant1	906	13.97	≤23.23	PASS
4MHz	Ant1	910	14.19	≤23.23	PASS
4MHz	Ant1	914	14.51	≤23.23	PASS
4MHz	Ant1	922	14.64	≤23.23	PASS
4MHz	Ant1	926	5.44	≤23.23	PASS
8MHz	Ant1	908	5.29	≤23.23	PASS
8MHz	Ant1	916	11.84	≤23.23	PASS
8MHz	Ant1	920	7.57	≤23.23	PASS
8MHz	Ant1	922	6.57	≤23.23	PASS
8MHz	Ant1	924	2.90	≤23.23	PASS

## Test Graphs

