




No.: BCTC/RF-EMC-005 Page: 55 of 83 / / / / Edition: B,2






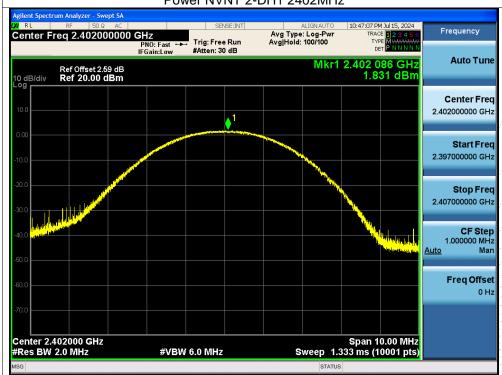

No.: BCTC/RF-EMC-005 Page: 56 of 83 / / / Edition: B,2



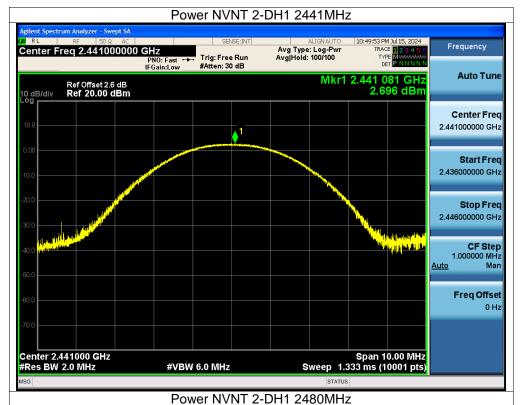




No.: BCTC/RF-EMC-005 Page: 57 of 83 / / / Edition: B,2


,TC

**5**C






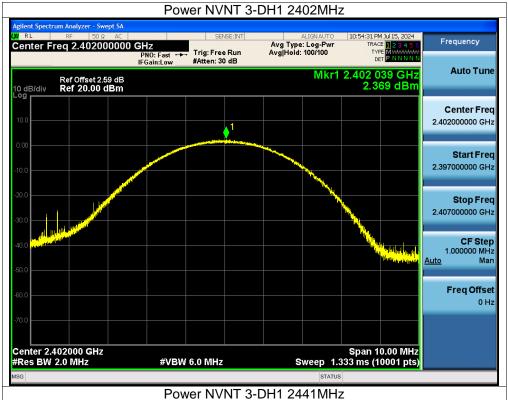

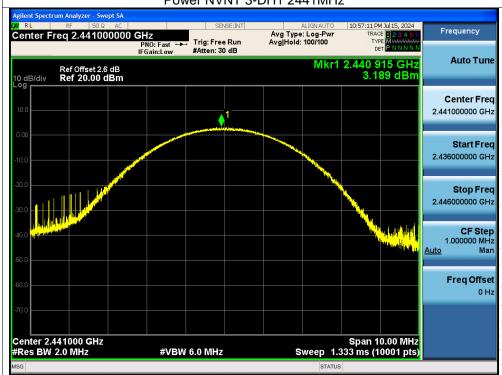

No.: BCTC/RF-EMC-005 Page: 58 of 83 / / / Edition: B.2



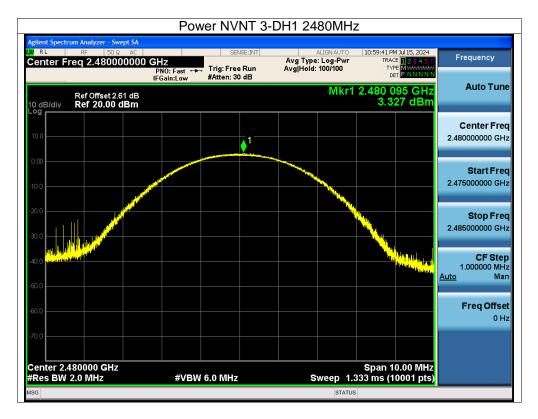





# 12. Hopping Channel Separation

## 12.1 Block Diagram Of Test Setup



#### 12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

## 12.3 Test procedure


- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

## 12.4 Test Result

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2401.85	2402.85	1	0.581	Pass
NVNT	1-DH1	2440.85	2441.85	1	0.589	Pass
NVNT	1-DH1	2478.85	2479.848	0.998	0.573	Pass
NVNT	2-DH1	2401.85	2402.848	0.998	0.817	Pass
NVNT	2-DH1	2440.848	2441.85	1.002	0.825	Pass
NVNT	2-DH1	2478.85	2479.85	1	0.841	Pass
NVNT	3-DH1	2401.996	2402.998	1.002	0.827	Pass
NVNT	3-DH1	2440.998	2441.996	0.998	0.832	Pass
NVNT	3-DH1	2478.996	2479.998	1.002	0.813	Pass


No.: BCTC/RF-EMC-005 Page: 60 of 83' / / / / Edition: B,2



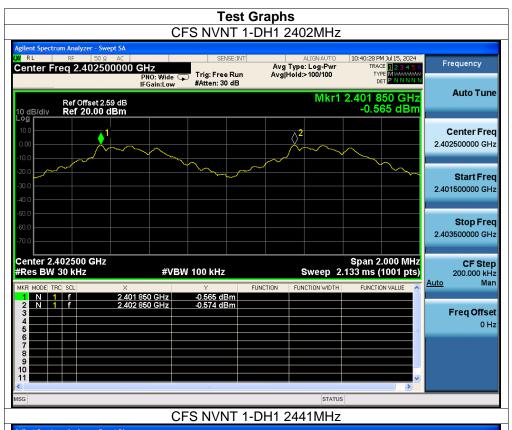






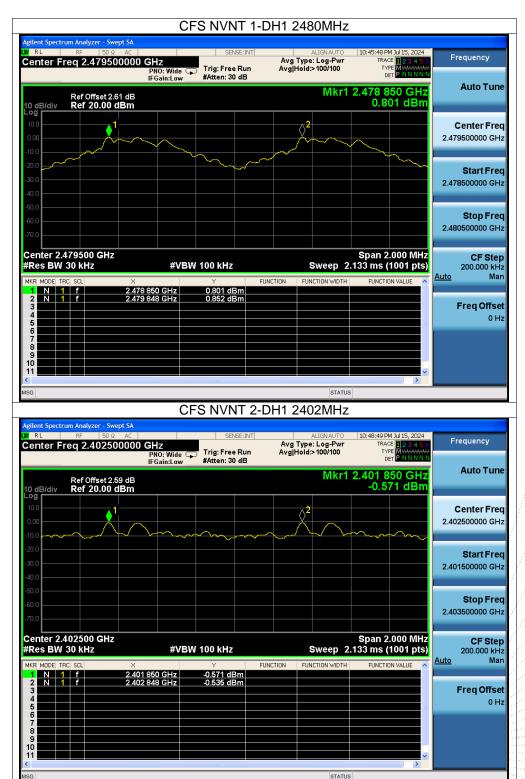

No.: BCTC/RF-EMC-005 Page: 62 of 83 / / / / Edition: B,2




epor

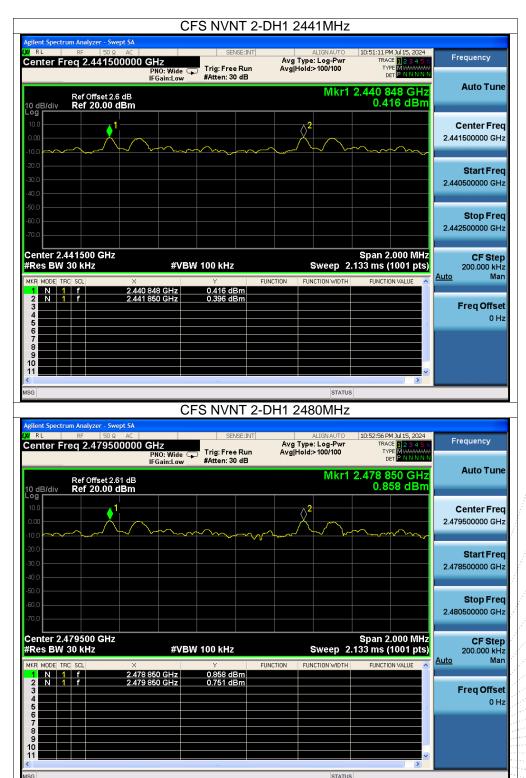

No.: BCTC/RF-EMC-005 Page: 63 of 83 / / / / Edition: B<sub>2</sub>2




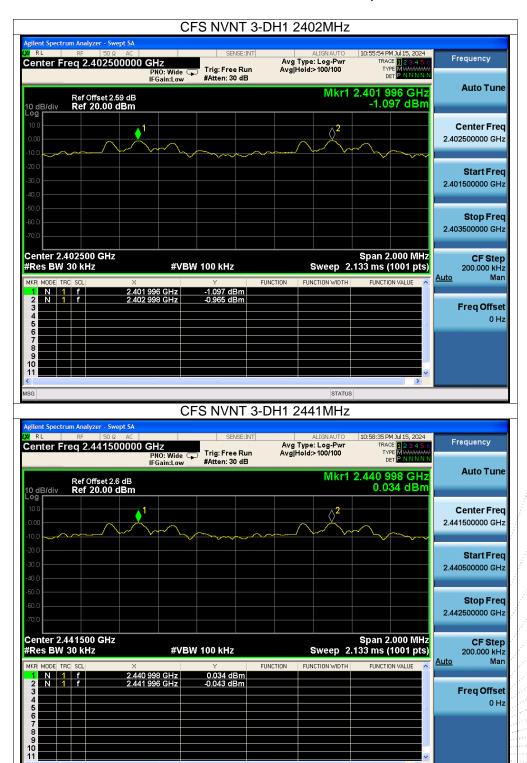

No.: BCTC/RF-EMC-005 Page: 64 of 83 / / / / Edition: B,2

STATUS



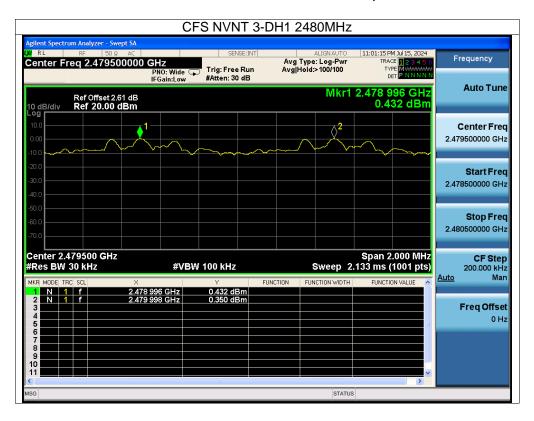





# 13. Number Of Hopping Frequency

# 13.1 Block Diagram Of Test Setup



# 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

# 13.3 Test procedure


- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 13.4 Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

No.: BCTC/RF-EMC-005 Page: 66 of 83 / / / Edition: B,2



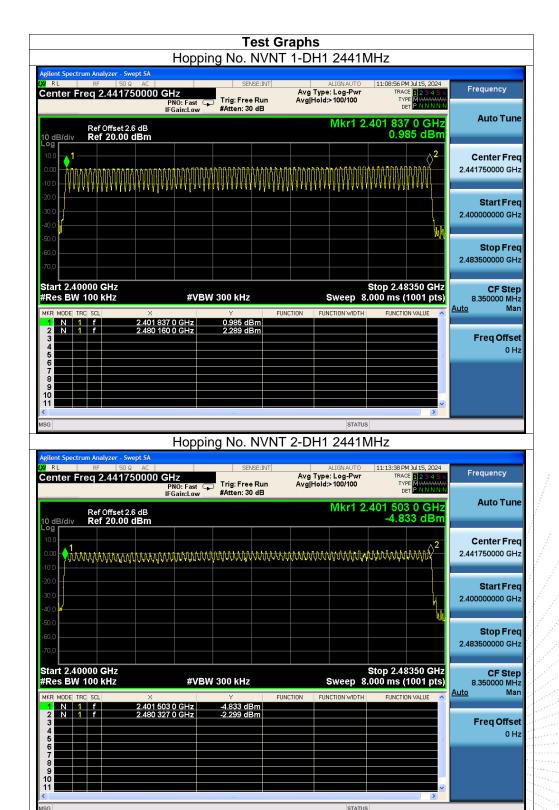



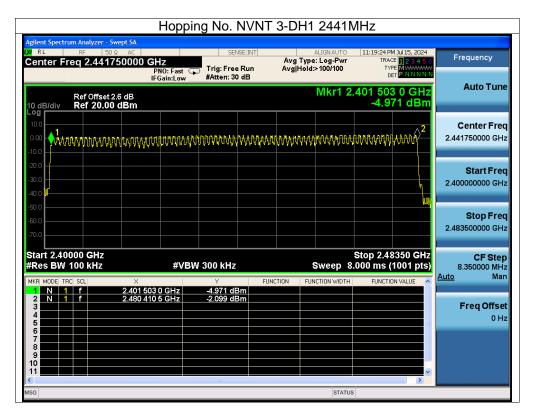





### 14. Dwell Time

## 14.1 Block Diagram Of Test Setup

EUT	SPECTRUM
	ANALYZER

14.2 Limit

≤0.4 Second

## 14.3 Test procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set spectrum analyzer span = 0. Centred on a hopping channel;
- 3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- 4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

## 14.4 Test Result


Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	0.383	122.177	319	31600	400	Pass
NVNT	1-DH3	2441	1.639	257.323	157	31600	400	Pass
NVNT	1-DH5	2441	2.887	291.587	101	31600	400	Pass
NVNT	2-DH1	2441	0.391	123.947	317	31600	400	Pass
NVNT	2-DH3	2441	1.644	263.04	160	31600	400	Pass
NVNT	2-DH5	2441	2.886	311.688	108	31600	400	Pass
NVNT	3-DH1	2441	0.39	124.02	318	31600	400	Pass
NVNT	3-DH3	2441	1.642	262.72	160	31600	400	Pass
NVNT	3-DH5	2441	2.893	329.802	114	31600	400	Pass


Note: Total Dwell Time (ms) = Pulse Time (ms)\*Burst Count

No.: BCTC/RF-EMC-005 Page: 69 of 83' / / / / | Edition : B,2

,TC




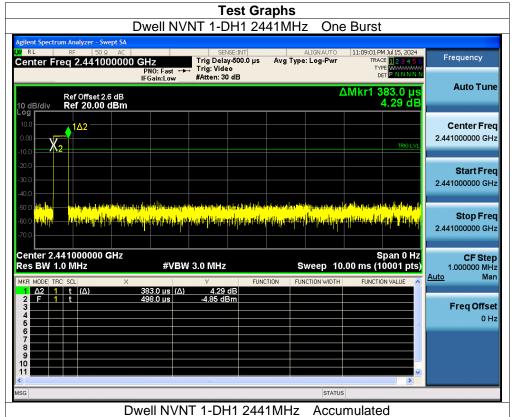


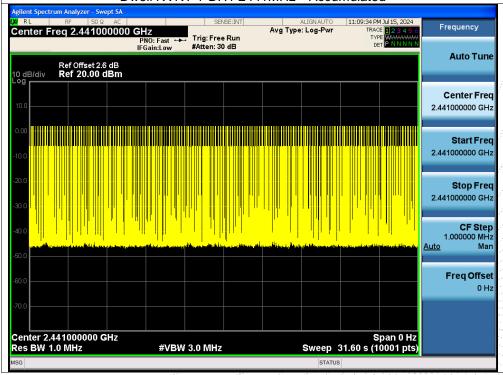

No.: BCTC/RF-EMC-005 Page: 70 of 83 / / / / Edition.: B.2




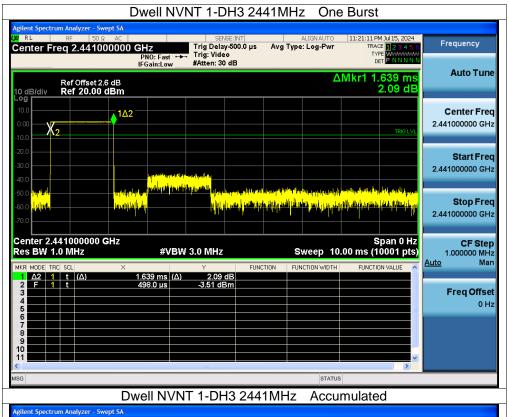

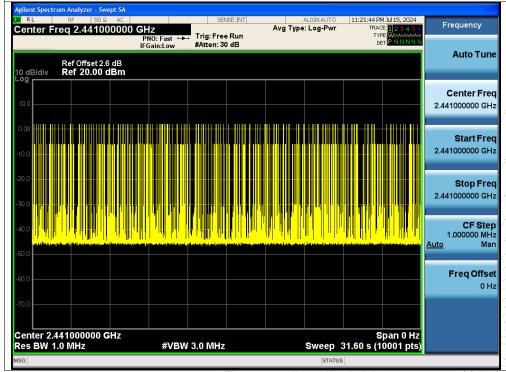


No.: BCTC/RF-EMC-005 Page: 71 of 83 / / / / Edition: B,2



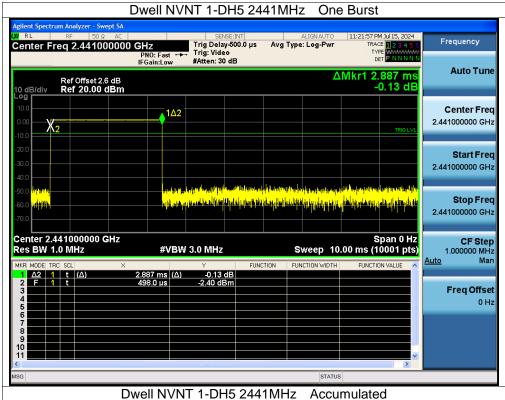



**BCTC** 

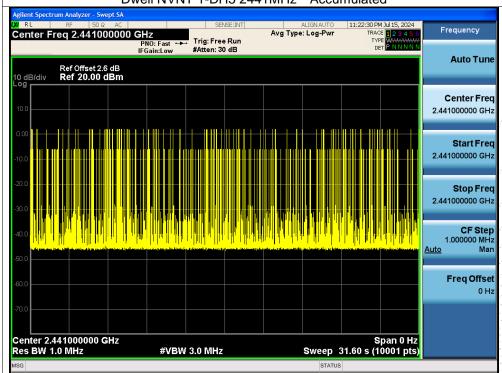

No.: BCTC/RF-EMC-005 Page: 72 of 83 / / / Edition: B,2




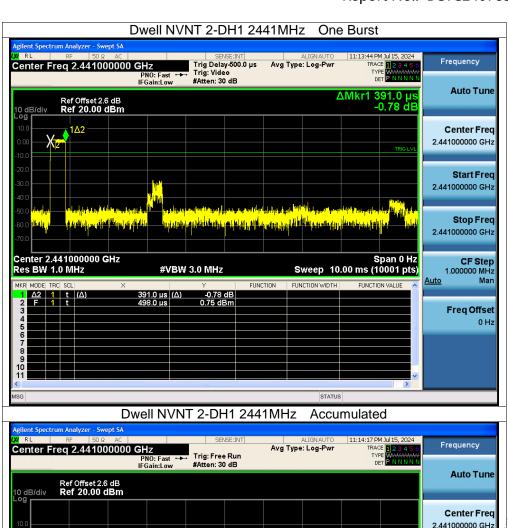


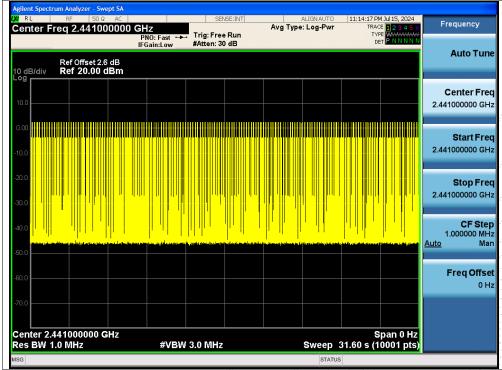

No.: BCTC/RF-EMC-005 Page: 73 of 83 / / / / Edition: B,2



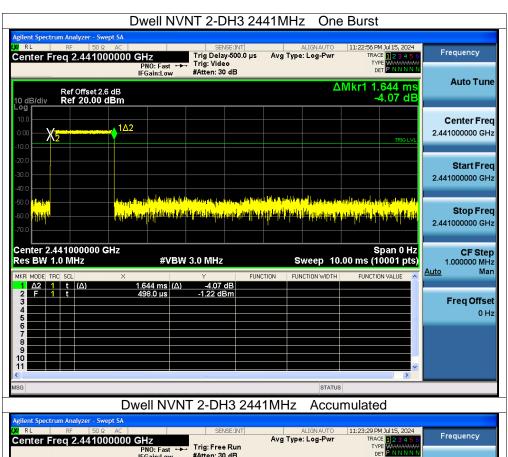


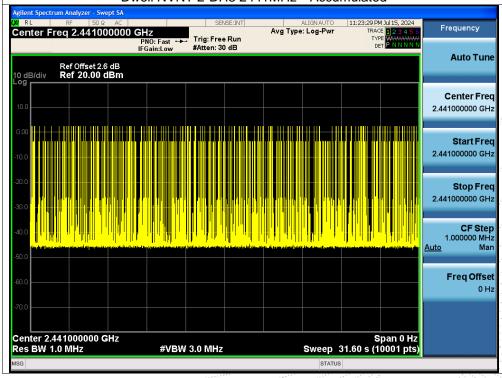

No.: BCTC/RF-EMC-005 Page: 74 of 83 / / / / Edition: B,2



epor

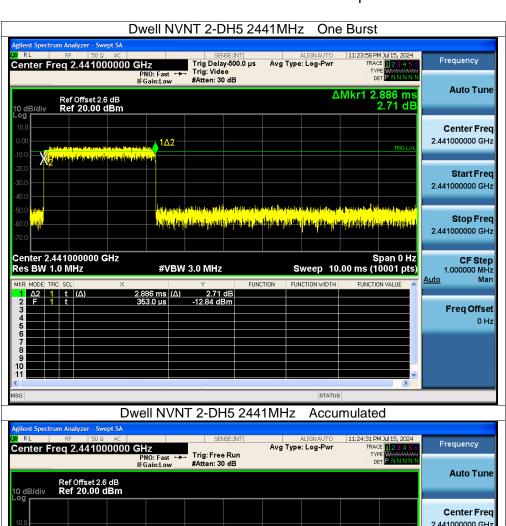

No.: BCTC/RF-EMC-005 Page: 75 of 83 / / / Edition: B,2



Center 2.441000000 GHz Res BW 1.0 MHz Report No.: BCTC2407856859-1E


**Stop Freq** 2.441000000 GHz

CF Step 1.000000 MHz Man

Freq Offset

Auto


Span 0 Hz Sweep 31.60 s (10001 pts)

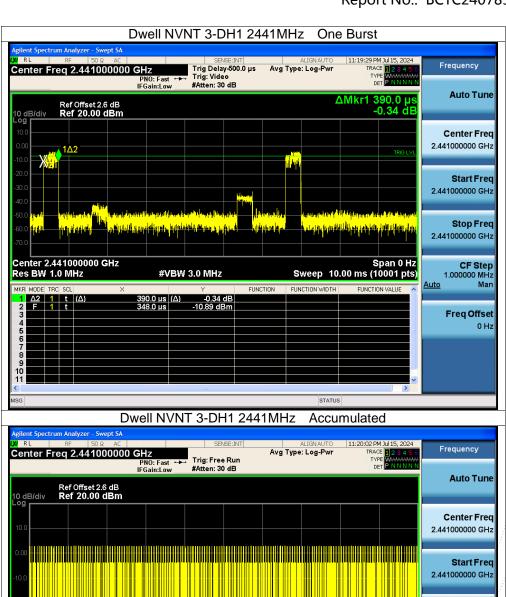


No.: BCTC/RF-EMC-005 Page: 76 of 83 / / / Edition: B,2

#VBW 3.0 MHz




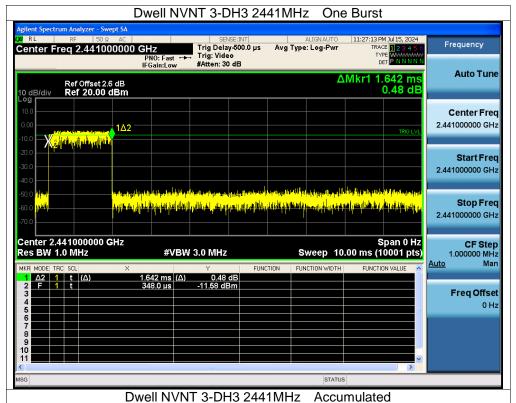

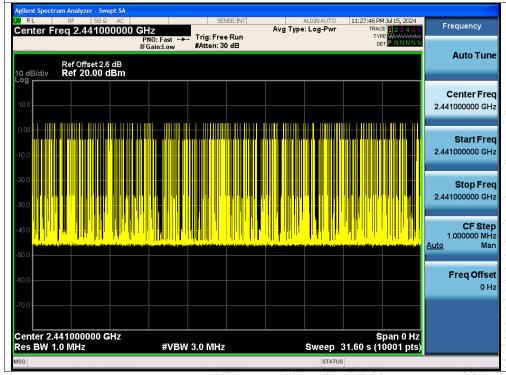


No.: BCTC/RF-EMC-005 Page: 77 of 83 / / / / Edition: B,2



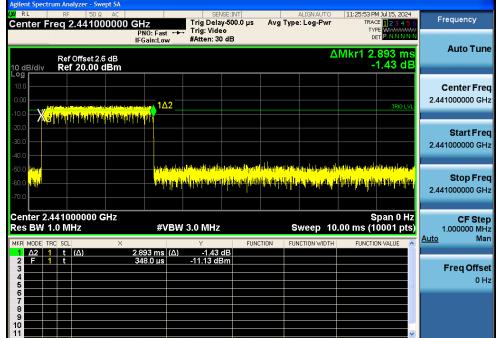

Dwell NVNT 3-DH5 2441MHz One Burst

**BCTC** 

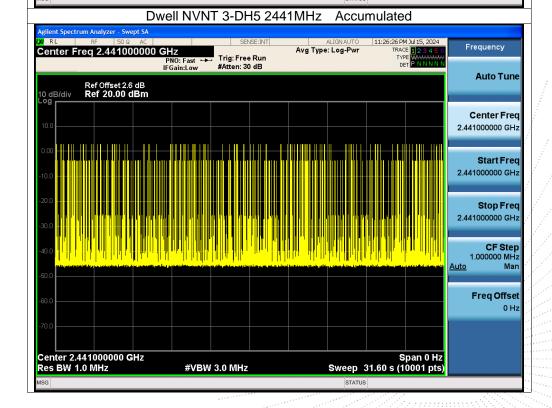

Page: 78 of 83 No.: BCTC/RF-EMC-005 Edition: B,2




# 15. Antenna Requirement

### 15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

# 15.2 Test Result

The EUT antenna is Internal antenna, fulfill the requirement of this section.

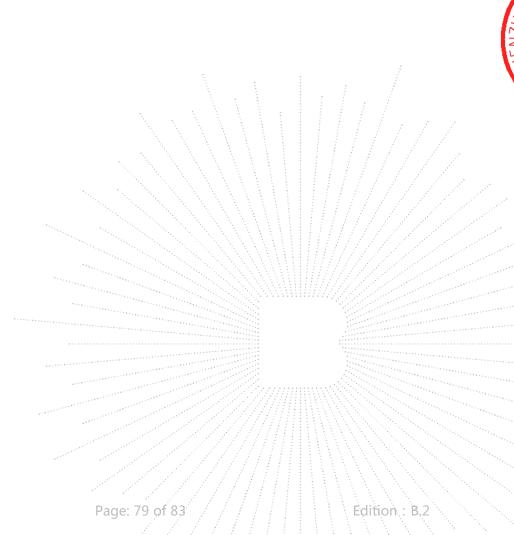

No.: BCTC/RF-EMC-005



# 16. EUT Photographs

### **EUT Photo 1**



NOTE: Appendix-Photographs Of EUT Constructional Details.



No.: BCTC/RF-EMC-005 Page: 80 of 83' / / / Edition: B.




# 17. EUT Test Setup Photographs

# **Conducted Measurement Photo**



### **Radiated Measurement Photos**

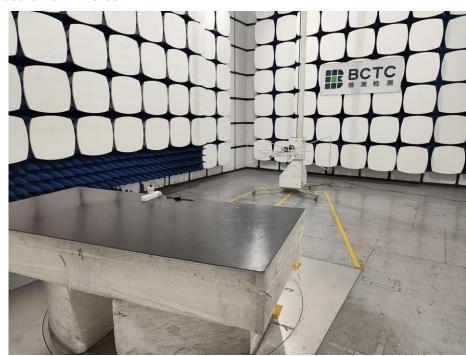


No.: BCTC/RF-EMC-005 Page: 81 of 83 / / / / Edition: B<sub>2</sub>2

C 7

ort





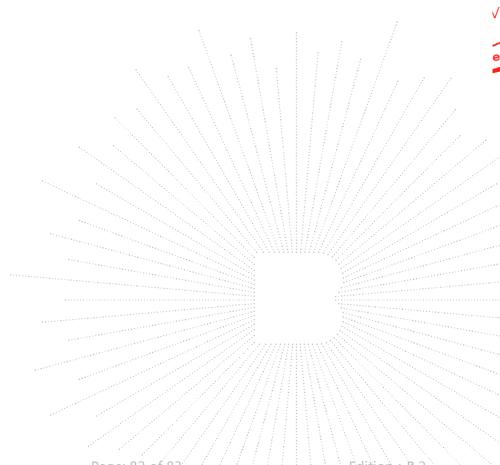

No.: BCTC/RF-EMC-005

Page: 82 of 83 / / / Edit



#### **STATEMENT**

- 1. The equipment lists are traceable to the national reference standards.
- 2. The test report can not be partially copied unless prior written approval is issued from our lab.
- 3. The test report is invalid without the "special seal for inspection and testing".
- 4. The test report is invalid without the signature of the approver.
- 5. The test process and test result is only related to the Unit Under Test.
- 6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
- 7. The quality system of our laboratory is in accordance with ISO/IEC17025.
- 8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

### Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

Consultation E-mail: bctc@bctc-lab.com.cn..

Complaint/Advice E-mail: advice@bctc-lab.com.cn

\*\*\*\* END \*\*\*\*

No.: BCTC/RF-EMC-005 Page: 83 of 83 / / / Edition: B,2

