

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2363-2, XT2363-1
FCC ID : IHDT56AQ1
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**

Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
3. Guidance Applied	6
4. Equipment Under Test (EUT) Information	7
4.1 General Information.....	7
4.2 General LTE SAR Test and Reporting Considerations	9
4.3 General 5G NR SAR Test and Reporting Considerations	13
5. Smart Transmit feature for RF Exposure compliance.....	15
6. Proximity Sensor Triggering Test.....	17
7. RF Exposure Limits.....	19
7.1 Uncontrolled Environment.....	19
7.2 Controlled Environment.....	19
8. Specific Absorption Rate (SAR).....	20
8.1 Introduction	20
8.2 SAR Definition	20
9. System Description and Setup.....	21
9.1 E-Field Probe	22
9.2 Data Acquisition Electronics (DAE)	22
9.3 Phantom.....	23
9.4 Device Holder.....	24
10. Measurement Procedures.....	25
10.1 Spatial Peak SAR Evaluation	25
10.2 Power Reference Measurement.....	26
10.3 Area Scan.....	26
10.4 Zoom Scan.....	27
10.5 Volume Scan Procedures.....	27
10.6 Power Drift Monitoring.....	27
11. Test Equipment List	28
12. System Verification	29
12.1 Tissue Simulating Liquids.....	29
12.2 Tissue Verification	29
12.3 System Performance Check Results.....	31
13. RF Exposure Positions	33
13.1 Ear and handset reference point	33
13.2 Definition of the cheek position	34
13.3 Definition of the tilt position	35
13.4 Body Worn Accessory	36
13.5 Product Specific 10g SAR Exposure.....	37
13.6 Wireless Router.....	37
14. Conducted RF Output Power (Unit: dBm).....	38
15. Antenna Location	54
16. SAR Test Results	55
16.1 Head SAR	58
16.2 Hotspot SAR	66
16.3 Body Worn Accessory SAR.....	73
16.4 Product specific 10g SAR.....	80
16.5 Repeated SAR Measurement	88
17. Simultaneous Transmission Analysis	89
17.1 5G NR + LTE + WLAN + BT Sim-Tx analysis.....	90
17.2 Head Exposure Conditions.....	91
17.3 Hotspot Exposure Conditions.....	94
17.4 Body-Worn Accessory Exposure Conditions.....	98
17.5 Product specific 10g SAR Exposure Conditions.....	101
17.6 SPLSR Evaluation and Analysis.....	103
18. Uncertainty Assessment.....	112
19. References.....	113
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	
Appendix F. Power reduction mechanism verification	

**Sporton International Inc. (Kunshan)**

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2363-2, XT2363-1**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.49	1.31	1.31	1.59
		GSM1900	0.20	1.37	1.30	
	WCDMA	WCDMA II	0.15	1.28	1.27	
		WCDMA IV	0.15	1.29	1.29	
		WCDMA V	0.46	1.23	1.23	
	LTE	LTE Band 7	0.91	1.28	1.28	
		LTE Band 12/17	0.13	0.62	0.62	
		LTE Band 13	0.28	0.54	0.54	
		LTE Band 25/2	0.92	1.27	1.29	
		LTE Band 26/5	0.93	1.06	1.06	
		LTE Band 66/4	0.93	1.29	1.27	
		LTE Band 41/38	0.94	1.28	1.28	
		LTE Band 42	0.93	0.62	0.93	
	5G NR	FR1 n2	0.91	1.29	1.29	
		FR1 n7	0.93	1.28	1.28	
		FR1 n26/n5	0.89	0.75	0.75	
		FR1 n66	0.91	1.28	1.27	
		FR1 n41/n38	0.92	0.62	0.95	
		FR1 n78	0.91	1.06	1.06	
DTS	WLAN	2.4GHz WLAN	1.30	0.73	1.39	1.52
NII		5GHz WLAN	1.13	0.74	1.18	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.43	0.39	0.39	1.59

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	3.20	3.93
		GSM1900	3.21	
	WCDMA	WCDMA II	3.21	
		WCDMA IV	3.15	
		WCDMA V	2.28	
	LTE	LTE Band 7	3.16	
		LTE Band 25/2	3.21	
		LTE Band 66/4	3.15	
		LTE Band 41/38	3.20	
		LTE Band 42	2.49	
	5G NR	FR1 n2	3.17	
		FR1 n7	3.18	
		FR1 n66	3.17	
		FR1 n41/38	2.48	
		FR1 n78	2.49	
DTS	WLAN	2.4GHz WLAN	1.80	3.88
NII		5GHz WLAN	3.18	3.93
Date of Testing:			2023/10/6 ~ 2023/10/25	

Remark:

1. This device supports LTE B2 / B4 / B5 / B17 / B38 and B25 / B66 / B26 / B12 / B41. Since the supported frequency span for LTE B2 / B4 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B66 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26 / B12 / B41.
2. This device supports 5GNR n38/n5 and n41/n26. Since the supported frequency span for 5GNR n38/n5 falls completely within the supports frequency span for n41/n26, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for n41/n26.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR07-KS	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2363-2, XT2363-1
FCC ID	IHDT56AQ1
IMEI Code	Sample 1: IMEI 1: 350735340018339 IMEI 2: 350735340018347 Sample 2: IMEI 1: 356977530015113 IMEI 2: 356977530015121 Sample 2: IMEI 1: 357231700057672 IMEI 2: 357231700057680 Sample 3: IMEI 1: 350735340031498 IMEI 2: 350735340031506
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n78: 3450 MHz ~ 3550 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA HSPA+(16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM

	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	DVT2
SW Version	UUG34.30
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype

Remark:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
5. For dual SIM card mobile has single SIM slots + eSIM (electronic SIM) and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active).
6. There are two different types of EUT. They are single SIM card mobile and dual SIM card mobile (PSIM+ eSIM). The others are the same including circuit design, PCB board, structure and all components. After pre-scan two types of EUT, we found test result of the sample that dual SIM was the worst, so we chose dual SIM card mobile to perform all tests.
7. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
8. For WLAN/BT when transmit simultaneous with WWAN, power reduction will be activated to head. For WLAN/BT when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and Handheld.
9. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
10. There are three samples, the different between them refer to the XT2363-2, XT2363-1_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, we choose sample 1 to perform full SAR testing and sample 2/3 to verify the worst case of sample 1.
11. This device has NFC function and the NFC SAR report will be separately submitted.
12. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
SA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40
	n26	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																							
FCC ID	IHDT56AQ1																																																																						
Equipment Name	Mobile Cellular Phone																																																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~3550 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																																						
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 42: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																						
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																																						
LTE Voice / Data requirements	Voice and Data																																																																						
LTE Release Version	R15, Cat18																																																																						
CA Support	Supported, Uplink and Downlink																																																																						
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																							
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																
256 QAM	≥ 1						≤ 5																																																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 14.																																																																						
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 14.																																																																						
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink.																																																																						

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20475	830.5	20500	832
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20575	842.5	20550	840
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20875	2512.5	20900	2515
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21325	2557.5	21300	2555
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23085	707	23110	710
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23105	708	23080	705
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5	
M	23230		782		23255		784.5		23280		787	
H	23255		784.5		23280		787		23305		790	
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23805		712	
M	23790		710		23790		710		23790		710	
H	23825		713.5		23800		711		23775		707	

LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26965	841.5
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 42												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	42115	3452.5	42140	3455	42165	3457.5	42190	3460	42190	3460	42190	3460
M	42590	3500	42590	3500	42590	3500	42590	3500	42590	3500	42590	3500
H	43065	3547.5	43040	3545	43015	3542.5	42990	3540	42990	3540	42990	3540

<For LTE Overlap Bands Description>
1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 2	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 25	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 17			Yes	Yes		
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
LTE Band 12	Ant 0	24	24	24	24	24	24
LTE Band 17	Ant 0	24	24	24	24	24	24
LTE Band 4	Ant 0	24	17.3	17	20.1	24	24
LTE Band 66	Ant 0	24	17.3	17	20.1	24	24
LTE Band 4 other PA	Ant 0	24	17.3	17	20.1	24	24
LTE Band 66 other PA	Ant 0	24	17.3	17	20.1	24	24
LTE Band 5	Ant 0	24	24	24	24	24	24
LTE Band 26	Ant 0	24	24	24	24	24	24
LTE Band 2	Ant 0	24	20.5	17.7	21.1	24	24
LTE Band 2 other PA	Ant 0	24	20.5	17.7	21.1	24	24
LTE Band 25	Ant 0	24	20.5	17.7	21.1	24	24

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
LTE Band 38	Ant 1	24	20.7	20.7	22.6	24	24
LTE Band 41	Ant 1	24	20.7	20.7	22.6	24	24

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
LTE Band 38	Ant 4	21.3	18.7	16	22.3	24	24
LTE Band 41	Ant 4	21.3	18.7	16	22.3	24	24
LTE Band 4	Ant 4	20.6	19.8	17.7	20.3	22.5	22.5
LTE Band 66	Ant 4	20.6	19.8	17.7	20.3	22.5	22.5
LTE Band 4 other PA	Ant 4	20.6	19.8	17.7	20.3	24	24
LTE Band 66 other PA	Ant 4	20.6	19.8	17.7	20.3	24	24
LTE Band 5	Ant 4	23.4	24	22.7	24	24	24
LTE Band 26	Ant 4	23	23	23	23	23	23
LTE Band 2	Ant 4	17.6	16.3	14.1	19.5	22.5	22.5
LTE Band 25	Ant 4	17.6	16.3	14.1	19.5	22.5	22.5

Note: For some bands/antennas at some exposure conditions which cannot be covered were fully tested for RF exposure compliance.

4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information													
Operating Frequency Range of each 5G NR transmission band				5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n78: 3450 MHz ~ 3550 MHz									
Channel Bandwidth				The detail please refers to section 4.1 5G NR FR1 bands table.									
SCS				FDD: SCS15KHz, TDD: SCS30KHz									
uplink modulations used				DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM									
A-MPR (Additional MPR) disabled for SAR Testing?				Yes									
LTE Anchor Bands for n2				LTE B4/5/7/66									
LTE Anchor Bands for n5				LTE B2									
LTE Anchor Bands for n7				LTE B2/4/5/66									
LTE Anchor Bands for n38				LTE B2/4/66									
LTE Anchor Bands for n41				LTE B2/4/26/66									
LTE Anchor Bands for n66				LTE B2/5/7									
LTE Anchor Bands for n78				LTE B2/4/5/7/38/41/26/66									

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band														
NR Band 2														
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz				
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)			
L	370500	1852.5		371000	1855		371500	1857.5		372000	1860			
M	376000	1880		376000	1880		376000	1880		376000	1880			
H	381500	1907.5		381000	1905		380500	1902.5		380000	1900			
NR Band 5														
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz				
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)			
L	165300	826.5		165800	829		166300	831.5		166800	834			
M	167300	836.5		167300	836.5		167300	836.5		167300	836.5			
H	169300	846.5		168800	844		168300	841.5		167800	839			
NR Band 7														
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550
NR Band 26														
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz				
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)			
L	163300	816.5		163800	819		164300	821.5		164800	824			
M	166300	831.5		166300	831.5		166300	831.5		166300	831.5			
H	169300	846.5		168800	844		168300	841.5		167800	839			
NR Band 66														
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	346000	1730		
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745		
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352000	1760		

NR Band 38						
	Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	516000	2580	517002	2585.01	518004	2590.02
M	519000	2595	519000	2595	519000	2595
H	522000	2610	520998	2604.99	519996	2599.98

NR Band 41																		
	Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	506202	2531.01	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	531000	2655	529998	2649.99	528996	2644.98	528000	2640

NR Band 78																		
	Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H	636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

<For NR Overlap Bands Description>

1) NR Bands BW

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	N5	FDD	15	5,10,15,20
	N38	TDD	30	20,30,40
	N41	TDD	30	20,30,40,50,60,70,80,90,100
SA	N5	FDD	15	5,10,15,20
	N26	FDD	15	5,10,15,20
	N38	TDD	30	20,30,40
	N41	TDD	30	20,30,40,50,60,70,80,90,100

2) NR Bands Tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI 4 Tune-up Limit	Default Tune-up Limit
5G NR n5	Ant 0	24	24	24	24	24	24
5G NR n26	Ant 0	24	24	24	24	24	24

Band	Antenna	Head DSI 2 Tune-up Limit	Body Worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI 4 Tune-up Limit	Default Tune-up Limit
5G NR n5	Ant 4	23	23	22.3	23	23	23
5G NR n26	Ant 4	23	23	23	23	23	23
5G NR n38	Ant 4	17.9	16.1	13.7	20.1	24	24
5G NR n41	Ant 4	17.9	16.1	13.7	20.1	24	24

5. Smart Transmit feature for RF Exposure compliance

The RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with RF exposure limit over a defined time window, for SAR (transmit frequency ≤ 6 GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

Note that WLAN/BT operations are not enabled with Smart Transmit.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	P _{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6$ GHz.

<SAR design target and uncertainty>

Item	Uncertainty dB (k=2)
Total uncertainty	1.5

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max}, when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit}. Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Antenna	Head DSI 2	Body-Worn DSI 3	Hotspot DSI 7	Extremity DSI 6	Sensor off DSI 4	P _{max} *
GSM850	Ant 0	25.7	24.5	24.5	24.6	24.5	24.5
GSM1900	Ant 0	30.2	17.1	15.8	18.5	21.5	21.5
WCDMA II	Ant 0	32.8	18.7	16.3	20.1	23.0	23.0
WCDMA IV	Ant 0	32.5	17.2	15.7	19.3	23.0	23.0
WCDMA V	Ant 0	28.8	24.2	24.2	26.1	23.0	23.0
LTE Band 25(2)	Ant 0	33.9	19.5	16.7	20.1	23.0	23.0
LTE Band 2 Other PA	Ant 0	33.9	19.5	16.7	20.1	23.0	23.0
LTE Band 25(2)	Ant 4	16.6	15.3	13.1	18.5	21.5	21.5
LTE Band 66(4)	Ant 0	33.7	16.3	16.0	19.1	23.0	23.0
LTE Band 66(4) Other PA	Ant 0	33.7	16.3	16.0	19.1	23.0	23.0
LTE Band 66(4)	Ant 4	19.6	18.8	16.7	19.3	21.5	21.5
LTE Band 66(4) Other PA	Ant 4	19.6	18.8	16.7	19.3	23.0	23.0
LTE Band 26(5)	Ant 0	30	26.9	26.9	23.0	23.0	23.0
LTE Band 5	Ant 4	22.4	23.3	21.7	25.1	23.0	23.0
LTE Band 26	Ant 4	24.8	24.3	22.6	23.0	22.0	22.0
LTE Band 7	Ant 1	24.3	17.7	17.7	20.4	23.0	23.0
LTE Band 7	Ant 4	17.5	15.9	13.7	19.2	23.0	23.0
LTE Band 12(17)	Ant 0	32.8	28.4	28.4	23.0	23.0	23.0
LTE Band 13	Ant 0	29.6	26.8	26.8	23.0	23.0	23.0
LTE Band 41(38)	Ant 1	27.5	17.7	17.7	19.6	21.0	21.0
LTE Band 41(38)	Ant 4	18.3	15.7	13.0	19.3	21.0	21.0
LTE Band 42	Ant 5	13.8	16.5	14.8	19.7	21.0	21.0
FR1 n2	Ant 0	36	19.4	17.6	20.6	23.0	23.0
FR1 n2	Ant 4	16.2	16.5	14.6	18.6	22.0	22.0
FR1 n2 Other PA	Ant 4	16.2	16.5	14.6	18.6	22.0	22.0
FR1 n26(5)	Ant 0	31.2	26.0	26.0	23.0	23.0	23.0
FR1 n5	Ant 4	25	25.1	21.3	22.0	22.0	22.0
FR1 n26	Ant 4	24.6	24.4	22.7	22.0	22.0	22.0
FR1 n7	Ant 1	27.9	16.9	16.9	20.0	23.0	23.0
FR1 n7	Ant 4	17.1	13.7	12.4	18.9	23.0	23.0
FR1 n66	Ant 0	35	17.6	16.7	21.1	23.0	23.0
FR1 n66	Ant 4	19.4	20.0	16.6	20.0	22.0	22.0
FR1 n66 Other PA	Ant 4	19.4	20.0	16.6	20.0	22.0	22.0
FR1 n41(38)	Ant 4	16.9	15.1	12.7	19.1	23.0	23.0
FR1 n78 Part27Q	Ant 5	16.6	17.4	13.7	19.8	23.0	23.0
FR1 n78 Part27Q	Ant 1	30.1	29.8	29.8	19.5	19.5	19.5
FR1 n78 Part27Q	Ant 2	29.2	18.6	16.9	21.5	21.5	21.5
FR1 n78 Part27Q	Ant 8	29.9	26.2	17.3	18.5	18.5	18.5

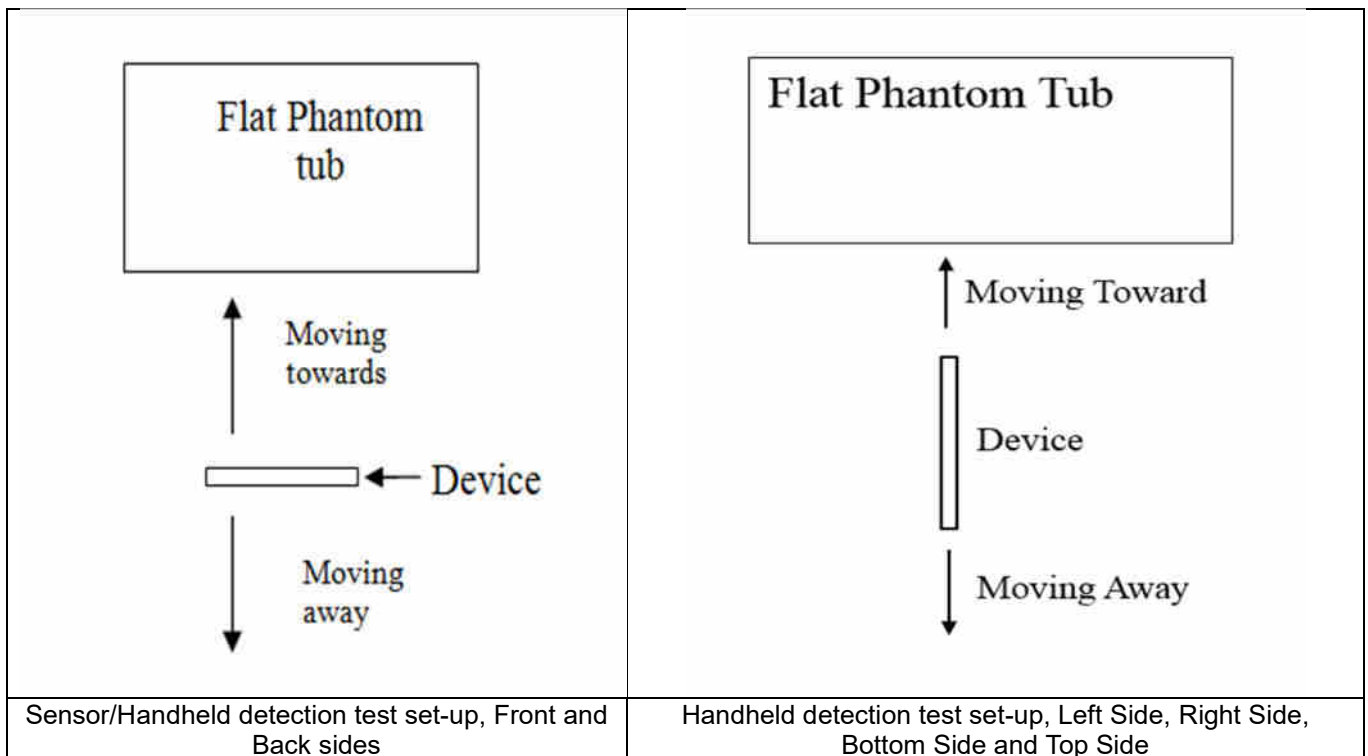
Note:

- 1) *P_{max} is used for RF tune up procedure. The maximum allowed output power is equal to P_{max} + 1.0 dB device uncertainty.
- 2) All P_{limit} power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).
- 3) The max allowed output power is the P_{limit} + 1.0 dB device uncertainty, and if P_{limit} is higher than P_{max}, the device output power will be P_{max} instead.

6. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5850MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/top/bottom/left/right sides of the device. When front/back/top/bottom/left/right sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:



<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	12	17	18	23

<Handheld for ANT0>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	10	15	19	24	3	8	22	26

<Handheld for ANT 1>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	12	14	20	8	14	13	18

<Handheld for ANT 4>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	9	14	13	18	7	12	16	21

<Handheld for ANT 5>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	4	9	10	15	11	17

<Handheld for ANT 6>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	11	14	19	8	14	14	19

7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

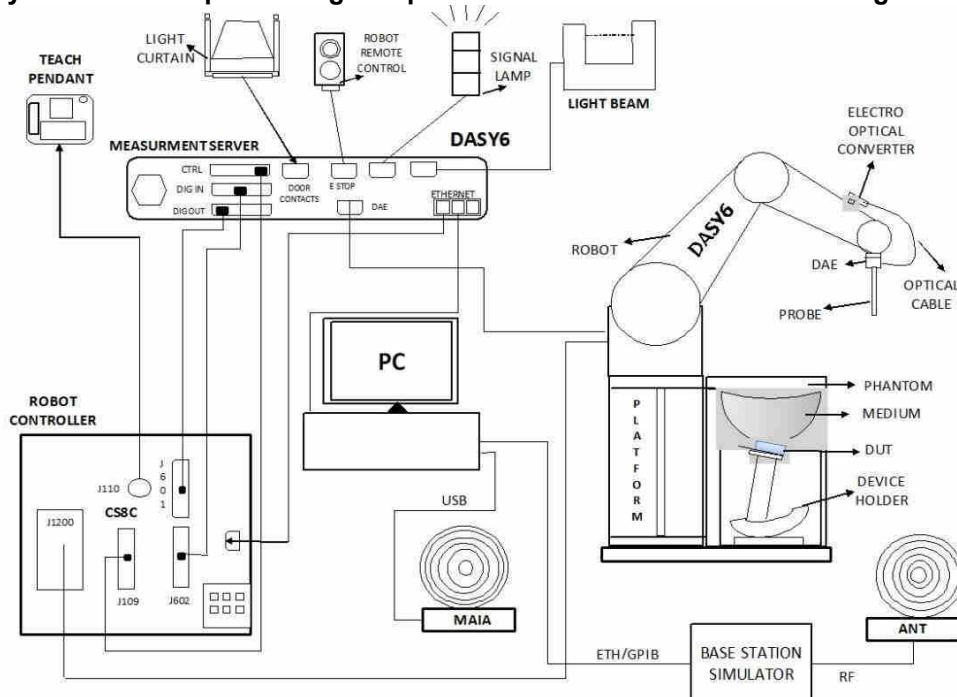The DASY5 system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

9.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

9.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

11. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2022/2/24	2025/2/23
SPEAG	835MHz System Validation Kit	D835V2	4d091	2022/8/19	2025/8/18
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2022/2/24	2025/2/23
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2022/3/30	2025/3/29
SPEAG	2450MHz System Validation Kit	D2450V2	1040	2023/4/25	2026/4/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2023/11/24
SPEAG	3500MHz System Validation Kit	D3500V2	1037	2020/11/25	2023/11/23
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2022/9/23	2025/9/22
SPEAG	Data Acquisition Electronics	DAE4	1303	2022/11/24	2023/11/23
SPEAG	Dosimetric E-Field Probe	EX3DV4	7706	2023/1/26	2024/1/25
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	SAM Twin Phantom	SAM Twin	TP-2024	NCR	NCR
CHIGO	Thermo-Hygrometer	HTC-1	55011	2023/1/8	2024/1/7
Anritsu	Radio Communication Analyzer	MT8821C	6262306175	2023/7/5	2024/7/4
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2023/7/5	2024/7/4
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2023/2/20	2024/2/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2023/1/5	2024/1/4
Rohde & Schwarz	Power Meter	NRVD	102081	2023/7/5	2024/7/4
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2023/7/5	2024/7/4
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2023/7/5	2024/7/4
R&S	BLUETOOTH TESTER	CBT	101246	2023/5/15	2024/5/14
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2022/10/12	2023/10/11
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2023/10/11	2024/10/10
TES	DIGITAC THERMOMETER	1310	220305411	2023/1/8	2024/1/7
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

12. System Verification

12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.



Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.6	0.905	42.7	0.89	41.90	1.69	1.91	±5	2023/10/6
835	Head	22.9	0.936	43.1	0.90	41.50	4.00	3.86	±5	2023/10/7
1750	Head	22.8	1.39	38.6	1.37	40.10	1.46	-3.74	±5	2023/10/8
1900	Head	22.7	1.46	38.3	1.40	40.00	4.29	-4.25	±5	2023/10/9
2450	Head	22.6	1.84	37.6	1.80	39.20	2.22	-4.08	±5	2023/10/10
2600	Head	22.9	1.94	37.4	1.96	39.00	-1.02	-4.10	±5	2023/10/11
3500	Head	22.8	2.79	39.6	2.91	37.90	-4.12	4.49	±5	2023/10/12
5250	Head	22.7	4.68	36.7	4.71	35.90	-0.64	2.23	±5	2023/10/13
5600	Head	22.9	5.08	36.0	5.07	35.50	0.20	1.41	±5	2023/10/14
5750	Head	22.8	5.26	35.8	5.22	35.40	0.77	1.13	±5	2023/10/15
750	Head	22.9	0.913	43.5	0.89	41.90	2.58	3.82	±5	2023/10/16
835	Head	22.7	0.932	43.3	0.90	41.50	3.56	4.34	±5	2023/10/17
1750	Head	22.6	1.36	40.9	1.37	40.10	-0.73	2.00	±5	2023/10/18
1900	Head	22.9	1.45	40.7	1.40	40.00	3.57	1.75	±5	2023/10/19
2450	Head	22.8	1.82	39.2	1.80	39.20	1.11	0.00	±5	2023/10/20
2600	Head	22.7	1.93	39.0	1.96	39.00	-1.53	0.00	±5	2023/10/21
3500	Head	22.6	2.78	39.1	2.91	37.90	-4.47	3.17	±5	2023/10/22
5250	Head	22.8	4.57	35.9	4.71	35.90	-2.97	0.00	±5	2023/10/23
5600	Head	22.7	4.97	35.4	5.07	35.50	-1.97	-0.28	±5	2023/10/24
5750	Head	22.9	5.14	35.2	5.22	35.40	-1.53	-0.56	±5	2023/10/25

12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2023/10/6	750	Head	50	1087	7706	1303	0.413	8.58	8.26	-3.73
2023/10/7	835	Head	50	4d091	7706	1303	0.465	9.45	9.3	-1.59
2023/10/8	1750	Head	50	1090	7706	1303	1.88	37.00	37.6	1.62
2023/10/9	1900	Head	50	5d118	7706	1303	2.06	39.30	41.2	4.83
2023/10/10	2450	Head	50	1040	7706	1303	2.53	52.70	50.6	-3.98
2023/10/11	2600	Head	50	1061	7706	1303	2.64	56.60	52.8	-6.71
2023/10/12	3500	Head	50	1037	7706	1303	3.19	68.00	63.8	-6.18
2023/10/13	5250	Head	50	1113	7706	1303	3.82	81.50	76.4	-6.26
2023/10/14	5600	Head	50	1113	7706	1303	3.87	82.60	77.4	-6.30
2023/10/15	5750	Head	50	1113	7706	1303	3.81	80.80	76.2	-5.69
2023/10/16	750	Head	50	1087	7706	1303	0.402	8.58	8.04	-6.29
2023/10/17	835	Head	50	4d091	7706	1303	0.472	9.45	9.44	-0.11
2023/10/18	1750	Head	50	1090	7706	1303	1.84	37.00	36.8	-0.54
2023/10/19	1900	Head	50	5d118	7706	1303	2.03	39.30	40.6	3.31
2023/10/20	2450	Head	50	1040	7706	1303	2.55	52.70	51	-3.23
2023/10/21	2600	Head	50	1061	7706	1303	2.67	56.60	53.4	-5.65
2023/10/22	3500	Head	50	1037	7706	1303	3.21	68.00	64.2	-5.59
2023/10/23	5250	Head	50	1113	7706	1303	3.87	81.50	77.4	-5.03
2023/10/24	5600	Head	50	1113	7706	1303	3.88	82.60	77.6	-6.05
2023/10/25	5750	Head	50	1113	7706	1303	3.79	80.80	75.8	-6.19

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2023/10/6	750	Head	50	1087	7706	1303	0.270	5.65	5.4	-4.42
2023/10/7	835	Head	50	4d091	7706	1303	0.301	6.22	6.02	-3.22
2023/10/8	1750	Head	50	1090	7706	1303	0.989	19.50	19.78	1.44
2023/10/9	1900	Head	50	5d118	7706	1303	1.06	20.40	21.2	3.92
2023/10/10	2450	Head	50	1040	7706	1303	1.18	24.60	23.6	-4.07
2023/10/11	2600	Head	50	1061	7706	1303	1.19	25.10	23.8	-5.18
2023/10/12	3500	Head	50	1037	7706	1303	1.20	25.40	24	-5.51
2023/10/13	5250	Head	50	1113	7706	1303	1.09	23.30	21.8	-6.44
2023/10/14	5600	Head	50	1113	7706	1303	1.11	23.70	22.2	-6.33
2023/10/15	5750	Head	50	1113	7706	1303	1.09	23.00	21.8	-5.22
2023/10/16	750	Head	50	1087	7706	1303	0.263	5.65	5.26	-6.90
2023/10/17	835	Head	50	4d091	7706	1303	0.305	6.22	6.1	-1.93
2023/10/18	1750	Head	50	1090	7706	1303	0.968	19.50	19.36	-0.72
2023/10/19	1900	Head	50	5d118	7706	1303	1.04	20.40	20.8	1.96
2023/10/20	2450	Head	50	1040	7706	1303	1.19	24.60	23.8	-3.25
2023/10/21	2600	Head	50	1061	7706	1303	1.20	25.10	24	-4.38
2023/10/22	3500	Head	50	1037	7706	1303	1.23	25.40	24.6	-3.15
2023/10/23	5250	Head	50	1113	7706	1303	1.09	23.30	21.8	-6.44
2023/10/24	5600	Head	50	1113	7706	1303	1.11	23.70	22.2	-6.33
2023/10/25	5750	Head	50	1113	7706	1303	1.08	23.00	21.6	-6.09

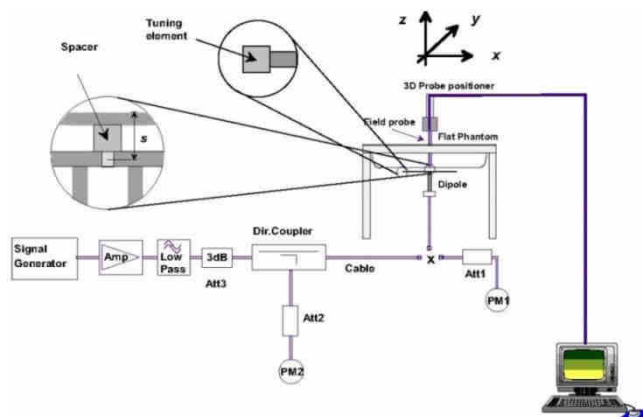

Fig 11.3.1 System Performance Check Setup

Fig 11.3.2 Setup Photo

13. RF Exposure Positions

13.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

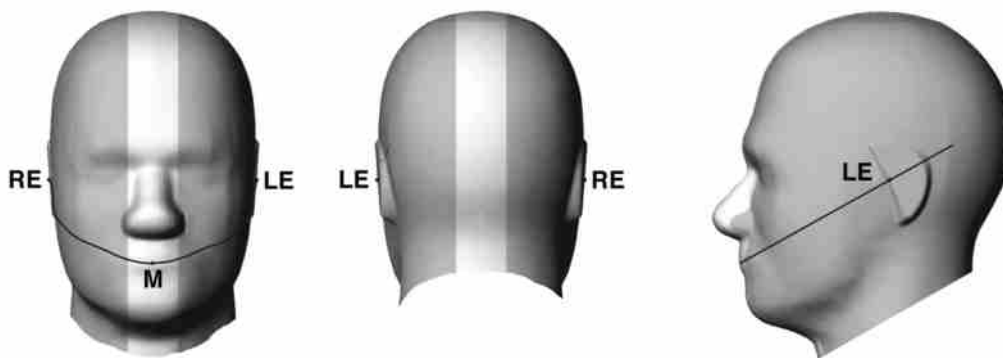


Fig 12.1.1 Front, back, and side views of SAM twin phantom

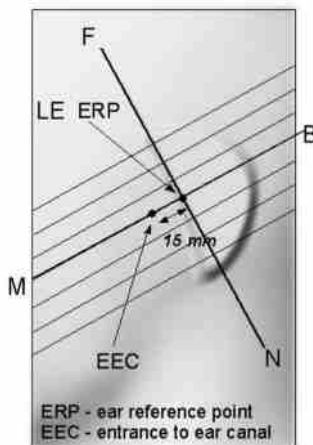


Fig 12.1.2 Close-up side view of phantom showing the ear region.

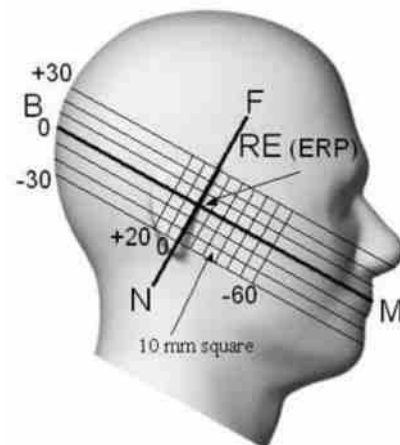


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

13.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

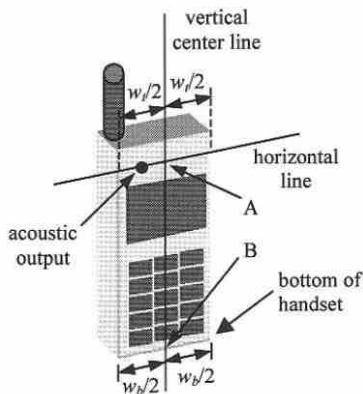


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

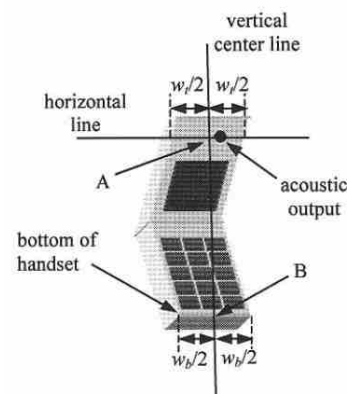


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

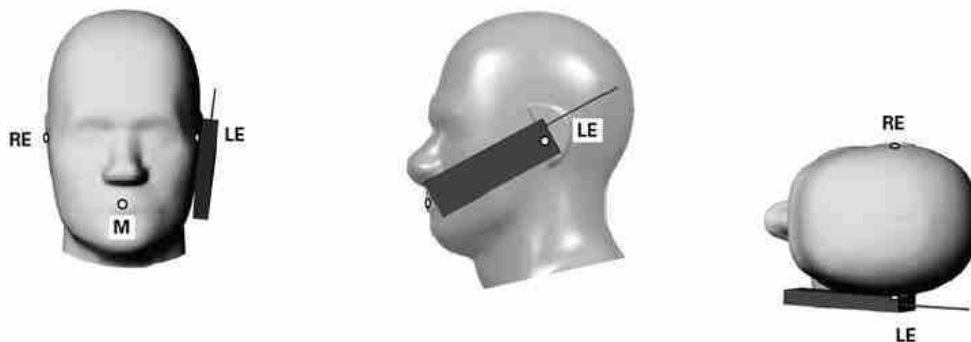


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

13.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

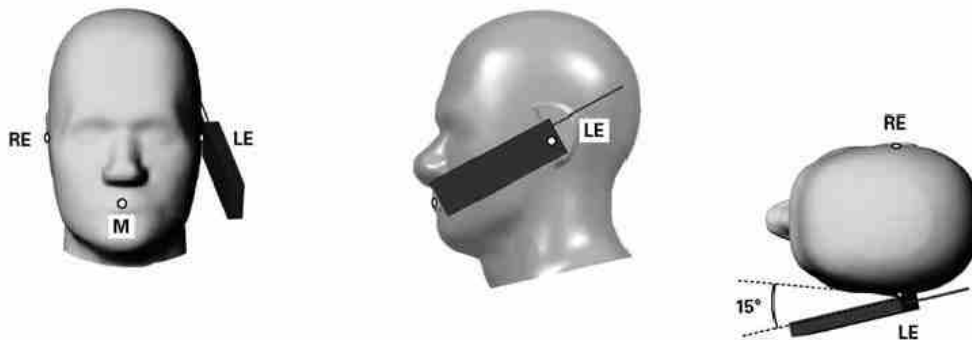


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

13.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

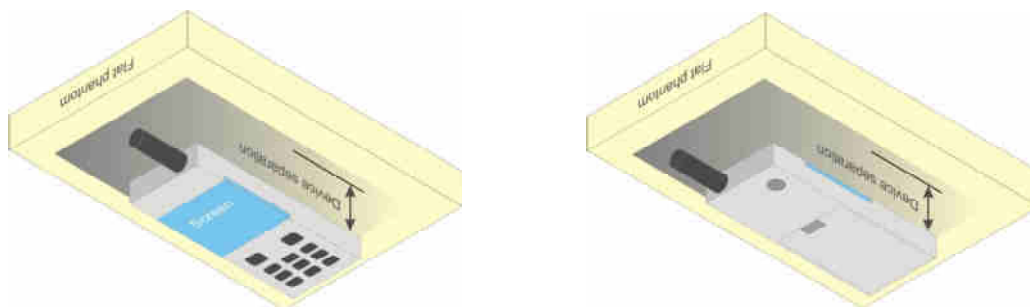


Fig 12.4 Body Worn Position

13.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

13.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

14. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CDI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CDI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power = 21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration

<WCDMA Conducted Power>

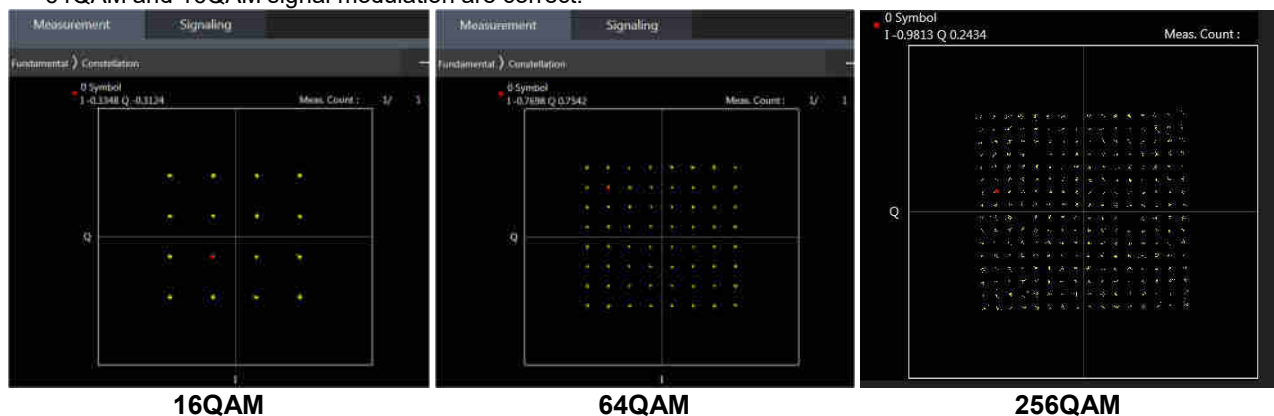
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.



<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

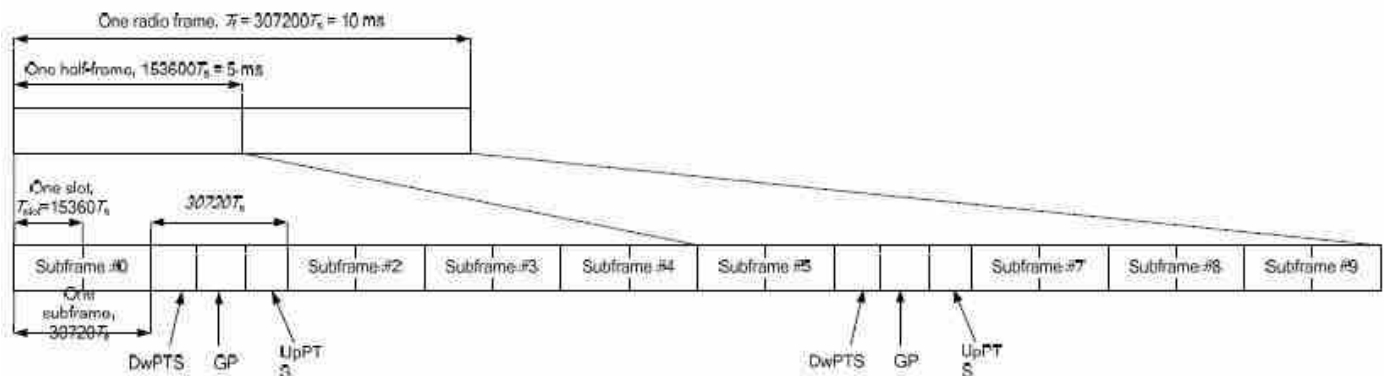


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation			4CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset
1	CA_26A-41A		1	CA_2A-4A-5A		1	CA_2A-4A-7C	
2	CA_2A-26A		2	CA_2A-4A-7A		2	CA_2A-7A-66A-66A	
3	CA_2A-2A		3	CA_2A-5A-7A				
4	CA_2A-4A	3CC-2	4	CA_2A-66A-66A	4CC-2			
5	CA_2A-5A	3CC-3	5	CA_2A-7A-66A	4CC-2			
6	CA_2A-66A	3CC-4	6	CA_2A-7A-7A				
7	CA_2A-7A	3CC-5	7	CA_2A-7C	4CC-1			
8	CA_2C		8	CA_4A-7A-7A				
9	CA_38C		9	CA_4A-7C	4CC-1			
10	CA_41A-42A		10	CA_5A-66A-66A				
11	CA_41C		11	CA_5A-66C				
12	CA_42A-42A		12	CA_5A-7A-66A				
13	CA_42C		14	CA_5A-7C				
14	CA_4A-4A		15	CA_7A-26A-66A				
15	CA_4A-5A	3CC-1	16	CA_7A-66A-66A	4CC-2			
16	CA_4A-7A	3CC-2	17	CA_7C-66A				
17	CA_5A-38A							
18	CA_5A-66A	3CC-10						
19	CA_5A-7A	3CC-12						
20	CA_66A-66A	3CC-16						
21	CA_66B							
22	CA_66C	3CC-11						
23	CA_7A-26A	3CC-15						
24	CA_7A-42A							
25	CA_7A-66A	3CC-12						
26	CA_7A-7A	3CC-8						
27	CA_7B							
28	CA_7C	3CC-14						

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink four carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Band 2/4/7/42/66 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 2/4/7/42/66

LTE Carrier Aggregation Conducted Power (Uplink)

LTE Uplink CA	2CC Uplink Carrier Aggregation
Intra-band	Antenna Tx
CA_66B	Ant 0
CA_66C	Ant 0
CA_7C	Ant 1
CA_38C	Ant 4

<Intra-band>
General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B7/66/38 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.
- v. LTE CA_66B test was covered by CA_66C; therefore, SAR was only assessed for CA_66C.

<Inter-band uplink carrier aggregation consideration>

LTE Uplink CA	2CC Uplink Carrier Aggregation
Inter-band	Antenna Tx
CA_2A-4A	Ant 4 + Ant 0
CA_2A-66A	Ant 0 + Ant 4
CA_2A-7A	Ant 0 + Ant 4
CA_4A-5A	Ant 0 + Ant 4
CA_4A-7A	Ant 0 + Ant 4
CA_5A-66A-66A*	Ant 0 + Ant 4

Remark: * For inter-band CA_5A-66A-66A combination with uplink assigned to LTE band B5 and one band of LTE band b66 only.

General Note:

1. The single carrier of inter band CA uplink power level is the same as Non-CA standalone LTE power level.
2. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency $\leq 6\text{GHz}$). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.
3. For LTE inter-band CA mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure between two LTE bands. Smart Transmit algorithm controls the total RF exposure base on LTE inter CA bands to not exceed FCC limit. In Part 1 Report, simultaneous transmission compliance was evaluated with other Radios (WLAN or BT) using standalone LTE SAR mode.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n2/n5/n7/n26/n66/n38/n41/n78 is SA mode.
2. 5G NR n2/n5/n7/n66/n38/n41/n78 is NSA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. For 5G NR bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
5. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
6. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
7. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
8. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	PI/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with PI/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with PI/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	PI/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

<EN-DC combination>

ENDC	Main Antenna Tx	
	LTE TX	NR TX
DC_26A_n41A	Ant 0	Ant 4
DC_26A_n78A	Ant 0	Ant 5
DC_2A_n38A	Ant 0	Ant 4
DC_2A_n41A	Ant 0	Ant 4
DC_2A_n5A	Ant 0	Ant 4
DC_2A_n66A	Ant 0	Ant 4
DC_2A_n78A	Ant 0	Ant 5
DC_2A_n7A	Ant 0	Ant 4
DC_38A_n78A	Ant 1	Ant 5
DC_41A_n78A	Ant 1	Ant 5
DC_4A_n2A	Ant 0	Ant 4
DC_4A_n38A	Ant 0	Ant 4
DC_4A_n41A	Ant 0	Ant 4
DC_4A_n78A	Ant 0	Ant 5
DC_4A_n7A	Ant 0	Ant 4
DC_5A_n2A	ANT4	ANT0
DC_5A_n78	ANT0	ANT5
DC_5A_n66A	ANT4	ANT0
DC_5A_n7A	ANT0	ANT4
DC_66A_n2A	ANT0	ANT4
DC_66A_n38A	ANT0	ANT4
DC_66A_n41A	ANT0	ANT4
DC_66A_n78A	ANT0	ANT5
DC_66A_n7A	ANT0	ANT4
DC_7A_n2A	ANT1	ANT4
DC_7A_n66A	ANT1	ANT4
DC_7A_n78A	ANT1	ANT5

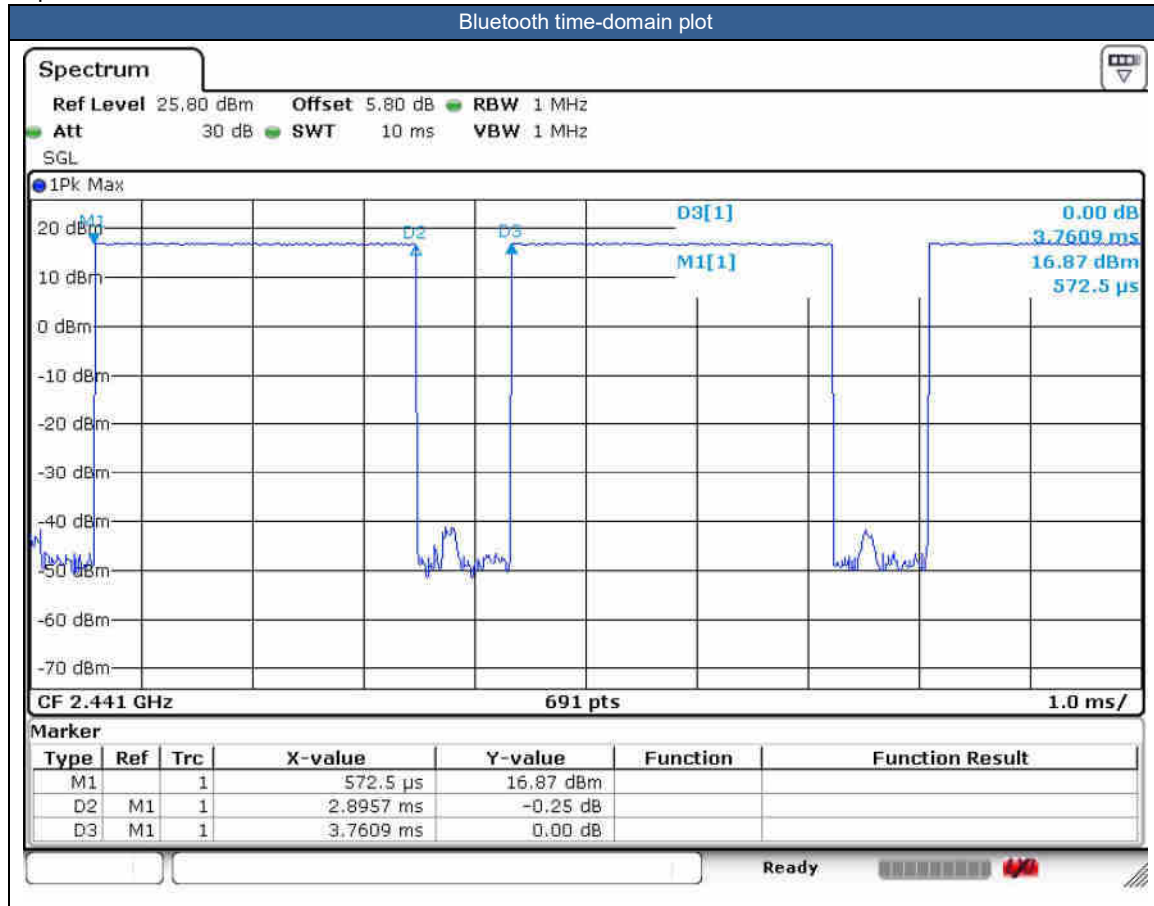
<WLAN Conducted Power>**General Note:**

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 76.99% as following figure, for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to 83.3% for Bluetooth reported SAR calculation





15. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
5. For WLAN/BT when transmit simultaneous with WWAN, power reduction will be activated to head. For WLAN/BT when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and Handheld.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/7/25/66/38/41/42, 5GNR n2/n7/n66/n38/n41/n78, WLAN2.4/5.2/5.8GHz, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
7. Although the headset SAR is greater than 0.8 W/kg, the headset SAR verified the worst of the non-headset SAR and less than non-headset SAR, so there is no need to be tested other channels.
8. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is <1.2 W/kg, UL CA 1gSAR is not required for all required test channels (PCC based).

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5 /n7/n26/n66/n38/n41/n78 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



16.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
01	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	23.05	24.00	1.245	-	-	0.08	0.108	0.134
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	22.10	23.00	1.230	-	-	0.03	0.061	0.075
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	23.05	24.00	1.245	-	-	0.02	0.058	0.072
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	22.10	23.00	1.230	-	-	0.01	0.042	0.052
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	23.05	24.00	1.245	-	-	-0.02	0.092	0.114
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	1	22.10	23.00	1.230	-	-	0.01	0.051	0.063
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	23.05	24.00	1.245	-	-	0.03	0.048	0.060
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	1	22.10	23.00	1.230	-	-	0.05	0.036	0.044
02	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	1	22.87	24.00	1.297	-	-	0.09	0.218	0.283
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	1	21.90	23.00	1.288	-	-	0.06	0.120	0.155
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	1	22.87	24.00	1.297	-	-	0.02	0.140	0.182
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	1	21.90	23.00	1.288	-	-	0.03	0.076	0.098
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	1	22.87	24.00	1.297	-	-	-0.01	0.201	0.261
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	1	21.90	23.00	1.288	-	-	0.03	0.110	0.142
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	1	22.87	24.00	1.297	-	-	0.01	0.129	0.167
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	1	21.90	23.00	1.288	-	-	0.06	0.071	0.091
835MHz																					
03	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	189	836.4	1	30.38	31.50	1.294	-	-	-0.06	0.379	0.491
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	128	824.2	1	30.27	31.50	1.327	-	-	0.02	0.341	0.453
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	251	848.8	1	30.38	31.50	1.294	-	-	0.03	0.373	0.483
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	189	836.4	1	30.38	31.50	1.294	-	-	0.01	0.208	0.269
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	189	836.4	1	30.38	31.50	1.294	-	-	0.02	0.357	0.462
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	128	824.2	1	30.27	31.50	1.327	-	-	0.03	0.344	0.457
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	251	848.8	1	30.38	31.50	1.294	-	-	-0.06	0.350	0.453
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	189	836.4	1	30.38	31.50	1.294	-	-	0.02	0.196	0.254
04	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	4182	836.4	1	23.16	24.00	1.213	-	-	-0.14	0.379	0.460
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	4182	836.4	1	23.16	24.00	1.213	-	-	0.02	0.223	0.271
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	1	23.16	24.00	1.213	-	-	0.03	0.342	0.415
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	4182	836.4	1	23.16	24.00	1.213	-	-	0.01	0.196	0.238
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	23.25	24.00	1.189	-	-	0.06	0.214	0.254
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	22.32	23.00	1.169	-	-	0.01	0.139	0.163
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	23.25	24.00	1.189	-	-	0.06	0.121	0.144
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	22.32	23.00	1.169	-	-	0.02	0.078	0.091
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	23.25	24.00	1.189	-	-	0.03	0.197	0.234
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	22.32	23.00	1.169	-	-	-0.01	0.123	0.144
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	23.25	24.00	1.189	-	-	0.06	0.114	0.135
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	22.32	23.00	1.169	-	-	0.01	0.071	0.083
05	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	26865	831.5	1	21.86	23.00	1.300	-	-	-0.01	0.569	0.740
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 4	DSI 2	26865	831.5	1	20.92	22.00	1.282	-	-	0.02	0.364	0.467
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	26865	831.5	1	21.86	23.00	1.300	-	-	0.03	0.467	0.607
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 4	DSI 2	26865	831.5	1	20.92	22.00	1.282	-	-	0.04	0.301	0.386
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 2	26865	831.5	1	21.86	23.00	1.300	-	-	0.02	0.427	0.555
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 4	DSI 2	26865	831.5	1	20.92	22.00	1.282	-	-	0.06	0.273	0.350
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 2	26865	831.5	1	21.86	23.00	1.300	-	-	0.03	0.389	0.506
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 4	DSI 2	26865	831.5	1	20.92	22.00	1.282	-	-	0.04	0.244	0.313
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	166300	831.5	1	23.55	24.00	1.109	-	-	0.03	0.173	0.192
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	166300	831.5	1	23.42	24.00	1.143	-	-	0.01	0.192	0.219
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	166300	831.5	1	23.55	24.00	1.109	-	-	0.06	0.099	0.110
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	166300	831.5	1	23.42	24.00	1.143	-	-	0.02	0.109	0.125
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	166300	831.5	1	23.55	24.00	1.109	-	-	-0.01	0.165	0.183



FCC SAR Test Report

Report No. : FA392114

	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	166300	831.5	1	23.42	24.00	1.143	-	-	0.03	0.176	0.201
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	166300	831.5	1	23.55	24.00	1.109	-	-	0.05	0.102	0.113
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	166300	831.5	1	23.42	24.00	1.143	-	-	0.09	0.113	0.129
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	166300	831.5	1	22.01	23.00	1.256	-	-	0.03	0.517	0.649
06	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	166300	831.5	1	21.95	23.00	1.274	-	-	0.05	0.597	0.760
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	166300	831.5	1	22.01	23.00	1.256	-	-	0.01	0.426	0.535
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	166300	831.5	1	21.95	23.00	1.274	-	-	0.02	0.496	0.632
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	166300	831.5	1	22.01	23.00	1.256	-	-	0.06	0.346	0.435
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	166300	831.5	1	21.95	23.00	1.274	-	-	0.08	0.424	0.540
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	166300	831.5	1	22.01	23.00	1.256	-	-	0.02	0.310	0.389
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	166300	831.5	1	21.95	23.00	1.274	-	-	0.03	0.389	0.495
07	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	20525	836.5	1	22.32	23.40	1.282	-	-	-0.02	0.724	0.928
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	20525	836.5	2	22.32	23.40	1.282	-	-	0.14	0.697	0.894
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	20525	836.5	3	22.32	23.40	1.282	-	-	0.11	0.712	0.913
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 2	20525	836.5	1	22.26	23.00	1.186	-	-	0.02	0.639	0.758
	LTE Band 5	10M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	20525	836.5	1	22.20	23.00	1.202	-	-	0.06	0.624	0.750
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	20525	836.5	1	22.32	23.40	1.282	-	-	0.06	0.583	0.748
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 4	DSI 2	20525	836.5	1	22.26	23.00	1.186	-	-	0.03	0.452	0.536
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 2	20525	836.5	1	22.32	23.40	1.282	-	-	0.05	0.525	0.673
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 4	DSI 2	20525	836.5	1	22.26	23.00	1.186	-	-	0.02	0.376	0.446
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 2	20525	836.5	1	22.32	23.40	1.282	-	-	-0.01	0.492	0.631
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 4	DSI 2	20525	836.5	1	22.26	23.00	1.186	-	-	0.03	0.395	0.468
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	167300	836.5	1	22.11	23.00	1.227	-	-	0.03	0.645	0.792
08	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	167300	836.5	1	22.05	23.00	1.245	-	-	0.08	0.716	0.891
	FR1 n5	20M	QPSK	100	0	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	167300	836.5	1	21.17	22.00	1.211	-	-	0.04	0.601	0.728
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	167300	836.5	1	22.11	23.00	1.227	-	-	0.02	0.522	0.641
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	167300	836.5	1	22.05	23.00	1.245	-	-	0.03	0.631	0.785
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	167300	836.5	1	22.11	23.00	1.227	-	-	0.04	0.465	0.571
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	167300	836.5	1	22.05	23.00	1.245	-	-	0.02	0.555	0.691
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	167300	836.5	1	22.11	23.00	1.227	-	-	-0.01	0.433	0.531
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	167300	836.5	1	22.05	23.00	1.245	-	-	0.06	0.502	0.625
1750MHz																					
09	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1413	1732.6	1	23.25	24.00	1.189	-	-	0.05	0.122	0.145
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	1413	1732.6	1	23.25	24.00	1.189	-	-	0.02	0.073	0.087
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	1413	1732.6	1	23.25	24.00	1.189	-	-	0.03	0.073	0.087
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	1413	1732.6	1	23.25	24.00	1.189	-	-	-0.01	0.063	0.075
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	1	22.91	24.00	1.285	-	-	0.02	0.100	0.129
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	1	21.95	23.00	1.274	-	-	0.06	0.068	0.087
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	1	22.91	24.00	1.285	-	-	0.08	0.058	0.075
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	1	21.95	23.00	1.274	-	-	-0.01	0.038	0.048
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	1	22.91	24.00	1.285	-	-	0.03	0.071	0.091
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	1	21.95	23.00	1.274	-	-	0.05	0.054	0.069
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	1	22.91	24.00	1.285	-	-	0.09	0.054	0.069
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	1	21.95	23.00	1.274	-	-	0.02	0.038	0.048
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	1	22.91	24.00	1.285	-	-	0.07	0.094	0.121
	LTE Band 66C	20M	QPSK	1	99	-	Right Cheek	0mm	Ant 0	DSI 2	132322+ 132520	1745+ 1764.8	1	21.58	23.00	1.387	-	-	0.05	0.045	0.062
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	132322	1745	1	19.72	20.60	1.225	-	-	0.01	0.426	0.522
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	132322	1745	1	19.59	20.60	1.262	-	-	0.06	0.346	0.437
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	132322	1745	1	19.72	20.60	1.225	-	-	0.03	0.748	0.916
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	132072	1720	1	19.66	20.60	1.242	-	-	0.01	0.715	0.888
10	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	132572	1770	1	19.69	20.60	1.233	-	-	0.05	0.751	0.926
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	132322	1745	1	19.59	20.60	1.262	-	-	0.02	0.684	0.863
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	132072	1720	1	19.58	20.60	1.265	-	-	0.03	0.664	0.840
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	132572	1770	1	19.51	20.60	1.285	-	-	-0.11	0.697	0.896
	LTE Band 66	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 2	132322	1745	1	19.56	20.60	1.271	-	-	-0.02	0.681	0.865



FCC SAR Test Report

Report No. : FA392114

	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 2	132322	1745	1	19.72	20.60	1.225	-	-	0.09	0.319	0.391
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 2	132322	1745	1	19.59	20.60	1.262	-	-	0.08	0.251	0.317
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 2	132322	1745	1	19.72	20.60	1.225	-	-	0.03	0.409	0.501
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 2	132322	1745	1	19.59	20.60	1.262	-	-	0.03	0.324	0.409
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	132572	1770	1	19.56	20.60	1.271	-	-	0.1	0.709	0.901
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	349000	1745	1	23.62	24.00	1.091	-	-	-0.01	0.074	0.081
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	349000	1745	1	23.51	24.00	1.119	-	-	0.06	0.071	0.079
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	349000	1745	1	23.62	24.00	1.091	-	-	0.02	0.040	0.044
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	349000	1745	1	23.51	24.00	1.119	-	-	0.06	0.026	0.029
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	349000	1745	1	23.62	24.00	1.091	-	-	0.08	0.042	0.046
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	349000	1745	1	23.51	24.00	1.119	-	-	-0.01	0.045	0.050
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	349000	1745	1	23.62	24.00	1.091	-	-	0.03	0.030	0.033
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	349000	1745	1	23.51	24.00	1.119	-	-	0.05	0.022	0.025
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	349000	1745	1	19.60	20.40	1.202	-	-	0.02	0.379	0.456
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	349000	1745	1	19.56	20.40	1.213	-	-	0.01	0.441	0.535
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	349000	1745	1	19.60	20.40	1.202	-	-	0.03	0.668	0.803
11	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	349000	1745	1	19.56	20.40	1.213	-	-	-0.11	0.751	0.911
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	349000	1745	1	19.50	20.40	1.230	-	-	-0.02	0.723	0.889
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	349000	1745	1	19.60	20.40	1.202	-	-	0.09	0.259	0.311
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	349000	1745	1	19.56	20.40	1.213	-	-	0.03	0.463	0.562
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	349000	1745	1	19.60	20.40	1.202	-	-	0.07	0.338	0.406
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	349000	1745	1	19.56	20.40	1.213	-	-	0.08	0.558	0.677
	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	349000	1745	1	19.56	20.40	1.213	-	-	0.03	0.748	0.908
1900MHz																					
12	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	661	1880	1	24.25	25.50	1.334	-	-	0.06	0.148	0.197
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	661	1880	1	24.25	25.50	1.334	-	-	0.02	0.105	0.140
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	661	1880	1	24.25	25.50	1.334	-	-	0.01	0.110	0.147
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	661	1880	1	24.25	25.50	1.334	-	-	0.03	0.106	0.141
13	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9400	1880	1	23.17	24.00	1.211	-	-	-0.12	0.122	0.148
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	9400	1880	1	23.17	24.00	1.211	-	-	0.02	0.093	0.113
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	9400	1880	1	23.17	24.00	1.211	-	-	0.03	0.093	0.113
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	9400	1880	1	23.17	24.00	1.211	-	-	0.04	0.096	0.116
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	26340	1880	1	22.85	24.00	1.303	-	-	-0.11	0.084	0.109
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	26340	1880	1	21.91	23.00	1.285	-	-	-0.02	0.072	0.093
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	26340	1880	1	22.85	24.00	1.303	-	-	0.09	0.079	0.103
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	26340	1880	1	21.91	23.00	1.285	-	-	0.03	0.062	0.080
	LTE Band 25	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26340	1880	1	22.85	24.00	1.303	-	-	0.05	0.076	0.099
	LTE Band 25	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	26340	1880	1	21.91	23.00	1.285	-	-	0.08	0.056	0.072
	LTE Band 25	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	26340	1880	1	22.85	24.00	1.303	-	-	-0.01	0.073	0.095
	LTE Band 25	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	26340	1880	1	21.91	23.00	1.285	-	-	0.03	0.054	0.069
	LTE Band 2 Other PA	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	18900	1880	1	22.79	24.00	1.321	-	-	0.01	0.076	0.100
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	26340	1880	1	16.78	17.60	1.208	-	-	0.03	0.687	0.830
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	26140	1860	1	16.70	17.60	1.230	-	-	0.01	0.670	0.824
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	26590	1905	1	16.69	17.60	1.233	-	-	0.02	0.659	0.813
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	26340	1880	1	16.72	17.60	1.225	-	-	0.04	0.662	0.811
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	26140	1860	1	16.66	17.60	1.242	-	-	-0.02	0.650	0.807
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	26590	1905	1	16.51	17.60	1.285	-	-	0.03	0.629	0.808
	LTE Band 25	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI 2	26340	1880	1	16.70	17.60	1.230	-	-	0.04	0.649	0.798
14	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	26340	1880	1	16.78	17.60	1.208	-	-	-0.04	0.765	0.924
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	26340	1880	2	16.78	17.60	1.208	-	-	0.05	0.601	0.726
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	26340	1880	3	16.78	17.60	1.208	-	-	0.03	0.723	0.873
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	26140	1860	1	16.70	17.60	1.230	-	-	0.02	0.736	0.905
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	26590	1905	1	16.69	17.60	1.233	-	-	0.03	0.739	0.911
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	26340	1880	1	16.72	17.60	1.225	-	-	-0.11	0.700	0.857
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	26140	1860	1	16.66	17.60	1.242	-	-	-0.02	0.695	0.863



FCC SAR Test Report

Report No. : FA392114

	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	26590	1905	1	16.51	17.60	1.285	-	-	0.09	0.683	0.878
	LTE Band 25	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 2	26340	1880	1	16.70	17.60	1.230	-	-	0.03	0.703	0.865
	LTE Band 25	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 2	26340	1880	1	16.78	17.60	1.208	-	-	0.05	0.411	0.496
	LTE Band 25	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 2	26340	1880	1	16.72	17.60	1.225	-	-	0.01	0.277	0.339
	LTE Band 25	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 2	26340	1880	1	16.78	17.60	1.208	-	-	0.02	0.515	0.622
	LTE Band 25	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 2	26340	1880	1	16.72	17.60	1.225	-	-	-0.06	0.334	0.409
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	376000	1880	1	23.63	24.00	1.089	-	-	0.06	0.079	0.086
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	376000	1880	1	23.51	24.00	1.119	-	-	0.08	0.067	0.075
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	376000	1880	1	23.63	24.00	1.089	-	-	-0.01	0.060	0.065
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	376000	1880	1	23.51	24.00	1.119	-	-	0.03	0.059	0.066
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	376000	1880	1	23.63	24.00	1.089	-	-	0.05	0.060	0.065
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	376000	1880	1	23.51	24.00	1.119	-	-	-0.02	0.058	0.065
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	376000	1880	1	23.63	24.00	1.089	-	-	0.09	0.059	0.064
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	376000	1880	1	23.51	24.00	1.119	-	-	0.03	0.058	0.065
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	376000	1880	1	16.35	17.20	1.216	-	-	0.02	0.696	0.846
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	372000	1860	1	16.30	17.20	1.230	-	-	0.01	0.665	0.818
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	380000	1900	1	16.28	17.20	1.236	-	-	-0.11	0.671	0.829
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	376000	1880	1	16.33	17.20	1.222	-	-	-0.02	0.683	0.834
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	372000	1860	1	16.28	17.20	1.236	-	-	0.09	0.699	0.864
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	380000	1900	1	16.25	17.20	1.245	-	-	0.03	0.665	0.828
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	376000	1880	1	16.28	17.20	1.236	-	-	0.05	0.635	0.785
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	376000	1880	1	16.35	17.20	1.216	-	-	-0.03	0.741	0.901
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	372000	1860	1	16.30	17.20	1.230	-	-	0.02	0.729	0.897
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	380000	1900	1	16.28	17.20	1.236	-	-	0.01	0.732	0.905
15	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	376000	1880	1	16.33	17.20	1.222	-	-	-0.02	0.747	0.913
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	372000	1860	1	16.28	17.20	1.236	-	-	-0.02	0.731	0.903
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	380000	1900	1	16.25	17.20	1.245	-	-	0.09	0.726	0.904
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	376000	1880	1	16.28	17.20	1.236	-	-	0.03	0.705	0.871
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	376000	1880	1	16.35	17.20	1.216	-	-	0.05	0.402	0.489
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	376000	1880	1	16.33	17.20	1.222	-	-	-0.06	0.408	0.498
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	376000	1880	1	16.35	17.20	1.216	-	-	0.03	0.508	0.618
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	376000	1880	1	16.33	17.20	1.222	-	-	0.04	0.514	0.628
	FR1 n2 Other PA	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	376000	1880	1	16.33	17.20	1.222	-	-	-0.03	0.737	0.900
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	1	23.13	24.00	1.222	-	-	0.03	0.397	0.485
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	1	22.10	23.00	1.230	-	-	-0.02	0.249	0.306
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	1	23.13	24.00	1.222	-	-	-0.06	0.228	0.279
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	1	22.10	23.00	1.230	-	-	0.01	0.148	0.182
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	1	23.13	24.00	1.222	-	-	0.02	0.669	0.817
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	20850	2510	1	23.08	24.00	1.236	-	-	0.09	0.601	0.743
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	21350	2560	1	23.10	24.00	1.230	-	-	0.01	0.635	0.781
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	1	22.10	23.00	1.230	-	-	0.06	0.433	0.533
	LTE Band 7	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	1	22.07	23.00	1.239	-	-	0.04	0.421	0.522
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	1	23.13	24.00	1.222	-	-	0.03	0.212	0.259
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	1	22.10	23.00	1.230	-	-	-0.02	0.143	0.176
	LTE Band 7C	20M	QPSK	1	99	-	Left Cheek	0mm	Ant 1	DSI 2	21100+21298	2535+2554.8	1	21.45	23.00	1.429	-	-	0.09	0.504	0.720
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	21100	2535	1	17.35	18.50	1.303	-	-	0.03	0.577	0.752
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	21100	2535	1	17.24	18.50	1.337	-	-	0.01	0.413	0.552
16	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	21100	2535	1	17.35	18.50	1.303	-	-	0.16	0.701	0.914
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	20850	2510	1	17.29	18.50	1.321	-	-	0.02	0.685	0.905
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	21350	2560	1	17.31	18.50	1.315	-	-	0.04	0.690	0.908
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	21100	2535	1	17.24	18.50	1.337	-	-	0.02	0.675	0.902
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	20850	2510	1	17.18	18.50	1.355	-	-	0.03	0.666	0.903
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	21350	2560	1	17.17	18.50	1.358	-	-	0.02	0.653	0.887
	LTE Band 7	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 2	21100	2535	1	17.20	18.50	1.349	-	-	0.01	0.642	0.866
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 2	21100	2535	1	17.35	18.50	1.303	-	-	0.06	0.205	0.267



FCC SAR Test Report

Report No. : FA392114

	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 2	21100	2535	1	17.24	18.50	1.337	-	-	0.02	0.145	0.194
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 2	21100	2535	1	17.35	18.50	1.303	-	-	0.09	0.267	0.348
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 2	21100	2535	1	17.24	18.50	1.337	-	-	0.03	0.192	0.257
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	40620	2593	1	22.93	24.00	1.279	62.9	1.006	0.03	0.341	0.439
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	40620	2593	1	21.91	23.00	1.285	62.9	1.006	0.1	0.234	0.303
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	40620	2593	1	22.93	24.00	1.279	62.9	1.006	0.03	0.267	0.344
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	40620	2593	1	21.91	23.00	1.285	62.9	1.006	-0.02	0.186	0.240
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	40620	2593	1	22.93	24.00	1.279	62.9	1.006	0.03	0.577	0.743
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	39750	2506	1	22.87	24.00	1.297	62.9	1.006	0.06	0.543	0.709
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	40185	2549.5	1	22.85	24.00	1.303	62.9	1.006	0.01	0.526	0.690
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	41055	2636.5	1	22.84	24.00	1.306	62.9	1.006	0.06	0.530	0.696
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	41490	2680	1	22.79	24.00	1.321	62.9	1.006	0.01	0.515	0.685
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	40620	2593	1	21.91	23.00	1.285	62.9	1.006	-0.02	0.394	0.509
	LTE Band 41	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 1	DSI 2	40620	2593	1	21.85	23.00	1.303	62.9	1.006	0.03	0.376	0.493
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	40620	2593	1	22.93	24.00	1.279	62.9	1.006	-0.06	0.155	0.199
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	40620	2593	1	21.91	23.00	1.285	62.9	1.006	0.01	0.102	0.132
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	40620	2593	1	20.28	21.30	1.265	62.9	1.006	0.16	0.522	0.664
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	39750	2506	1	20.22	21.30	1.282	62.9	1.006	0.02	0.596	0.769
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	40185	2549.5	1	20.20	21.30	1.288	62.9	1.006	0.06	0.569	0.737
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	41055	2636.5	1	20.25	21.30	1.274	62.9	1.006	0.02	0.578	0.741
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	41490	2680	1	20.24	21.30	1.276	62.9	1.006	0.09	0.523	0.672
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	40620	2593	1	20.20	21.30	1.288	62.9	1.006	0.05	0.566	0.734
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	39750	2506	1	20.12	21.30	1.312	62.9	1.006	0.04	0.527	0.696
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	40185	2549.5	1	20.10	21.30	1.318	62.9	1.006	0.06	0.513	0.680
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	41055	2636.5	1	20.11	21.30	1.315	62.9	1.006	-0.02	0.536	0.709
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	41490	2680	1	20.15	21.30	1.303	62.9	1.006	0.03	0.501	0.657
	LTE Band 41	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI 2	40620	2593	1	20.17	21.30	1.297	62.9	1.006	-0.02	0.563	0.735
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	40620	2593	1	20.28	21.30	1.265	62.9	1.006	-0.06	0.686	0.873
17	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	39750	2506	1	20.22	21.30	1.282	62.9	1.006	-0.08	0.725	0.935
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	40185	2549.5	1	20.20	21.30	1.288	62.9	1.006	0.08	0.678	0.879
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	41055	2636.5	1	20.25	21.30	1.274	62.9	1.006	0.03	0.671	0.860
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	41490	2680	1	20.24	21.30	1.276	62.9	1.006	0.02	0.676	0.868
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	40620	2593	1	20.20	21.30	1.288	62.9	1.006	0.05	0.667	0.864
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	39750	2506	1	20.12	21.30	1.312	62.9	1.006	-0.03	0.612	0.808
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	40185	2549.5	1	20.10	21.30	1.318	62.9	1.006	0.01	0.674	0.894
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	41055	2636.5	1	20.11	21.30	1.315	62.9	1.006	-0.01	0.630	0.834
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	41490	2680	1	20.15	21.30	1.303	62.9	1.006	0.04	0.668	0.876
	LTE Band 41	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 2	40620	2593	1	20.17	21.30	1.297	62.9	1.006	0.02	0.637	0.831
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 2	40620	2593	1	20.28	21.30	1.265	62.9	1.006	0.01	0.192	0.244
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 2	40620	2593	1	20.20	21.30	1.288	62.9	1.006	0.05	0.129	0.167
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 2	40620	2593	1	20.28	21.30	1.265	62.9	1.006	0.03	0.210	0.267
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 2	40620	2593	1	20.20	21.30	1.288	62.9	1.006	0.01	0.146	0.189
	LTE Band 38C	20M	QPSK	1	99	-	Right Tilted	0mm	Ant 4	DSI 2	37850+38048	2580+2599.8	1	19.92	21.30	1.374	62.9	1.006	0.07	0.661	0.914
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	507000	2535	1	23.38	24.00	1.153	-	-	0.01	0.366	0.422
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	507000	2535	1	23.27	24.00	1.183	-	-	0.02	0.349	0.413
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	507000	2535	1	23.38	24.00	1.153	-	-	0.03	0.256	0.295
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	507000	2535	1	23.27	24.00	1.183	-	-	-0.02	0.273	0.323
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	507000	2535	1	23.38	24.00	1.153	-	-	-0.06	0.617	0.712
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	507000	2535	1	23.27	24.00	1.183	-	-	0.01	0.596	0.705
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	507000	2535	1	23.38	24.00	1.153	-	-	0.05	0.239	0.276
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	507000	2535	1	23.27	24.00	1.183	-	-	0.03	0.198	0.234
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	507000	2535	1	17.13	18.10	1.250	-	-	0.03	0.632	0.790
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Right Cheek	0mm	Ant 4	DSI 2	507000	2535	1	17.10	18.10	1.259	-	-	0.01	0.633	0.797
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	507000	2535	1	17.13	18.10	1.250	-	-	0.03	0.725	0.906
18	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	507000	2535	1	17.10	18.10	1.259	-	-	0.01	0.740	0.932
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Right Tilted	0mm	Ant 4	DSI 2	507000	2535	1	17.03	18.10	1.279	-	-	0.05	0.669	0.856



FCC SAR Test Report

Report No. : FA392114

	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	507000	2535	1	17.13	18.10	1.250	-	-	0.04	0.225	0.281
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Cheek	0mm	Ant 4	DSI 2	507000	2535	1	17.10	18.10	1.259	-	-	0.06	0.226	0.285
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	507000	2535	1	17.13	18.10	1.250	-	-	0.09	0.299	0.374
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Tilted	0mm	Ant 4	DSI 2	507000	2535	1	17.10	18.10	1.259	-	-	0.02	0.287	0.361
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 2	518598	2592.99	1	16.95	17.90	1.245	-	-	0.02	0.653	0.813
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 2	518598	2592.99	1	16.91	17.90	1.256	-	-	0.01	0.646	0.811
	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 2	518598	2592.99	1	16.89	17.90	1.262	-	-	0.03	0.628	0.792
19	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 2	518598	2592.99	1	16.95	17.90	1.245	-	-	-0.03	0.735	0.915
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 2	518598	2592.99	1	16.91	17.90	1.256	-	-	0.05	0.699	0.878
	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 2	518598	2592.99	1	16.89	17.90	1.262	-	-	-0.03	0.669	0.844
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 2	518598	2592.99	1	16.95	17.90	1.245	-	-	0.01	0.246	0.306
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 2	518598	2592.99	1	16.91	17.90	1.256	-	-	-0.01	0.237	0.298
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 2	518598	2592.99	1	16.95	17.90	1.245	-	-	0.06	0.255	0.317
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 2	518598	2592.99	1	16.91	17.90	1.256	-	-	0.07	0.260	0.327
3500MHz																					
	LTE Band 42	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 5	DSI 2	42590	3500	1	15.80	16.80	1.259	62.9	1.006	0.09	0.395	0.500
	LTE Band 42	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 5	DSI 2	42590	3500	1	15.77	16.80	1.268	62.9	1.006	0.02	0.354	0.451
	LTE Band 42	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 5	DSI 2	42590	3500	1	15.80	16.80	1.259	62.9	1.006	0.02	0.488	0.618
	LTE Band 42	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 5	DSI 2	42590	3500	1	15.77	16.80	1.268	62.9	1.006	0.01	0.408	0.520
	LTE Band 42	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 5	DSI 2	42590	3500	1	15.80	16.80	1.259	62.9	1.006	0.01	0.643	0.814
	LTE Band 42	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 5	DSI 2	42190	3460	1	15.78	16.80	1.265	62.9	1.006	0.08	0.655	0.833
	LTE Band 42	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 5	DSI 2	42990	3540	1	15.75	16.80	1.274	62.9	1.006	0.03	0.632	0.810
	LTE Band 42	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 5	DSI 2	42590	3500	1	15.77	16.80	1.268	62.9	1.006	0.02	0.632	0.806
	LTE Band 42	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 5	DSI 2	42190	3460	1	15.68	16.80	1.294	62.9	1.006	0.05	0.628	0.818
	LTE Band 42	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 5	DSI 2	42990	3540	1	15.70	16.80	1.288	62.9	1.006	0.04	0.617	0.800
	LTE Band 42	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 5	DSI 2	42590	3500	1	15.75	16.80	1.274	62.9	1.006	0.02	0.601	0.770
	LTE Band 42	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 5	DSI 2	42590	3500	1	15.80	16.80	1.259	62.9	1.006	0.01	0.661	0.837
20	LTE Band 42	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 5	DSI 2	42190	3460	1	15.78	16.80	1.265	62.9	1.006	0.06	0.732	0.931
	LTE Band 42	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 5	DSI 2	42190	3460	2	15.78	16.80	1.265	62.9	1.006	-0.08	0.650	0.827
	LTE Band 42	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 5	DSI 2	42190	3460	3	15.78	16.80	1.265	62.9	1.006	-0.04	0.690	0.878
	LTE Band 42	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 5	DSI 2	42990	3540	1	15.75	16.80	1.274	62.9	1.006	0.08	0.640	0.820
	LTE Band 42	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 5	DSI 2	42590	3500	1	15.77	16.80	1.268	62.9	1.006	0.03	0.635	0.810
	LTE Band 42	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 5	DSI 2	42190	3460	1	15.68	16.80	1.294	62.9	1.006	0.02	0.658	0.857
	LTE Band 42	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 5	DSI 2	42990	3540	1	15.70	16.80	1.288	62.9	1.006	0.05	0.637	0.826
	LTE Band 42	20M	QPSK	100	0	-	Left Tilted	0mm	Ant 5	DSI 2	42590	3500	1	15.75	16.80	1.274	62.9	1.006	-0.03	0.610	0.781
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI 2	633332	3499.98	1	16.23	17.60	1.371	-	-	0.06	0.420	0.576
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI 2	633332	3499.98	1	16.19	17.60	1.384	-	-	0.01	0.422	0.584
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI 2	633332	3499.98	1	16.23	17.60	1.371	-	-	0.06	0.480	0.658
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI 2	633332	3499.98	1	16.19	17.60	1.384	-	-	0.09	0.490	0.678
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 2	633332	3499.98	1	16.23	17.60	1.371	-	-	0.04	0.595	0.816
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 2	633332	3499.98	1	16.19	17.60	1.384	-	-	0.02	0.619	0.856
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 2	633332	3499.98	1	16.18	17.60	1.387	-	-	0.01	0.552	0.765
21	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 2	633332	3499.98	1	16.23	17.60	1.371	-	-	0.08	0.666	0.913
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 2	633332	3499.98	1	16.19	17.60	1.384	-	-	0.03	0.650	0.899
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 2	633332	3499.98	1	16.18	17.60	1.387	-	-	0.05	0.588	0.815
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 2	633332	3499.98	1	19.19	20.50	1.352	-	-	0.03	0.052	0.070
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 2	633332	3499.98	1	19.17	20.50	1.358	-	-	0.06	0.038	0.052
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 2	633332	3499.98	1	19.19	20.50	1.352	-	-	0.09	0.054	0.073
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 2	633332	3499.98	1	19.17	20.50	1.358	-	-	0.05	0.058	0.079
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 2	633332	3499.98	1	19.19	20.50	1.352	-	-	0.08	0.082	0.111
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 2	633332	3499.98	1	19.17	20.50	1.358	-	-	0.03	0.081	0.110
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 2	633332	3499.98	1	19.19	20.50	1.352	-	-	0.05	0.032	0.043
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 2	633332	3499.98	1	19.17	20.50	1.358	-	-	0.02	0.020	0.027
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	633332	3499.98	1	21.15	22.50	1.365	-	-	0.09	0.115	0.157
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	633332	3499.98	1	21.08	22.50	1.387	-	-	0.05	0.111	0.154
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 2	633332	3499.98	1	21.15	22.50	1.365	-	-	0.08	0.084	0.115



FCC SAR Test Report

Report No. : FA392114

FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 2	633332	3499.98	1	21.08	22.50	1.387	-	-	0.03	0.071	0.098
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 2	633332	3499.98	1	21.15	22.50	1.365	-	-	0.06	0.053	0.072
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 2	633332	3499.98	1	21.08	22.50	1.387	-	-	0.09	0.069	0.096
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 2	633332	3499.98	1	21.15	22.50	1.365	-	-	0.05	0.059	0.081
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 2	633332	3499.98	1	21.08	22.50	1.387	-	-	0.04	0.047	0.065
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	633332	3499.98	1	18.10	19.50	1.380	-	-	0.01	0.028	0.039
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	633332	3499.98	1	18.08	19.50	1.387	-	-	0.03	0.018	0.025
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	633332	3499.98	1	18.10	19.50	1.380	-	-	0.02	0.048	0.066
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	633332	3499.98	1	18.08	19.50	1.387	-	-	0.05	0.025	0.035
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 2	633332	3499.98	1	18.10	19.50	1.380	-	-	-0.03	0.030	0.041
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 2	633332	3499.98	1	18.08	19.50	1.387	-	-	0.01	0.022	0.031
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 2	633332	3499.98	1	18.10	19.50	1.380	-	-	-0.01	0.010	0.014
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 2	633332	3499.98	1	18.08	19.50	1.387	-	-	0.05	0.006	0.008

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN/BT																	
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 6	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.02	0.358	0.480
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 6	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.03	0.309	0.414
22	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.02	0.968	1.297
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	1	2412	2	18.79	20.00	1.321	98.6	1.014	0.18	0.887	1.188
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	1	2412	3	18.79	20.00	1.321	98.6	1.014	-0.04	0.843	1.129
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	6	2437	1	18.51	20.00	1.409	98.6	1.014	0.01	0.856	1.223
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	11	2462	1	18.39	20.00	1.449	98.6	1.014	0.01	0.856	1.258
	WLAN2.4GHz	802.11g 6Mbps	Left Cheek	0mm	Ant 6	Standalone	6	2437	1	18.39	20.00	1.449	98.25	1.018	0.02	0.801	1.181
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.02	0.690	0.924
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6	Standalone	6	2437	1	18.51	20.00	1.409	98.6	1.014	0.02	0.642	0.917
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 6	Simultaneous	1	2412	1	13.29	14.50	1.321	98.6	1.014	0.03	0.134	0.180
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 6	Simultaneous	1	2412	1	13.29	14.50	1.321	98.6	1.014	0.02	0.102	0.137
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Simultaneous	1	2412	1	13.29	14.50	1.321	98.6	1.014	0.01	0.289	0.387
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6	Simultaneous	1	2412	1	13.29	14.50	1.321	98.6	1.014	0.05	0.235	0.315
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.01	0.125	0.176
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.06	0.108	0.152
23	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.08	0.308	0.433
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Full power	39	2441	2	16.86	18.00	1.300	76.99	1.082	-0.03	0.273	0.384
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Full power	39	2441	3	16.86	18.00	1.300	76.99	1.082	-0.03	0.301	0.423
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.02	0.241	0.339
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 6	Simultaneous	39	2441	1	12.85	14.00	1.303	76.99	1.082	0.09	0.041	0.058
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 6	Simultaneous	39	2441	1	12.85	14.00	1.303	76.99	1.082	0.01	0.036	0.051
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Simultaneous	39	2441	1	12.85	14.00	1.303	76.99	1.082	0.02	0.102	0.144
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 6	Simultaneous	39	2441	1	12.85	14.00	1.303	76.99	1.082	0.03	0.080	0.113
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 6	Standalone	62	5310	1	14.40	16.00	1.445	96.24	1.039	0.03	0.441	0.662
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 6	Standalone	62	5310	1	14.40	16.00	1.445	96.24	1.039	0.06	0.558	0.838
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 6	Standalone	54	5270	1	14.31	16.00	1.476	96.24	1.039	0.01	0.526	0.806
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 6	Standalone	62	5310	1	14.40	16.00	1.445	96.24	1.039	-0.02	0.544	0.817
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 6	Standalone	54	5270	1	14.31	16.00	1.476	96.24	1.039	0.06	0.531	0.814
24	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 6	Standalone	62	5310	1	14.40	16.00	1.445	96.24	1.039	0.01	0.743	1.116
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 6	Standalone	54	5270	1	14.31	16.00	1.476	96.24	1.039	0.09	0.716	1.098
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Simultaneous	58	5290	1	10.18	11.00	1.208	92.92	1.076	0.02	0.151	0.196
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Simultaneous	58	5290	1	10.18	11.00	1.208	92.92	1.076	0.03	0.191	0.248
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Simultaneous	58	5290	1	10.18	11.00	1.208	92.92	1.076	0.01	0.213	0.277
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Simultaneous	58	5290	1	10.18	11.00	1.208	92.92	1.076	0.05	0.279	0.363
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Standalone	138	5690	1	13.30	14.50	1.318	92.92	1.076	0.03	0.516	0.732
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Standalone	138	5690	1	13.30	14.50	1.318	92.92	1.076	0.06	0.625	0.887
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Standalone	122	5610	1	12.96	14.50	1.426	92.92	1.076	0.02	0.606	0.930



FCC SAR Test Report

Report No. : FA392114

	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Standalone	138	5690	1	13.30	14.50	1.318	92.92	1.076	-0.03	0.660	0.936
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Standalone	122	5610	1	12.96	14.50	1.426	92.92	1.076	0.04	0.675	1.035
25	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Standalone	138	5690	1	13.30	14.50	1.318	92.92	1.076	0.01	0.788	1.118
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Standalone	122	5610	1	12.96	14.50	1.426	92.92	1.076	0.05	0.721	1.106
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Simultaneous	138	5690	1	8.43	9.50	1.279	92.92	1.076	0.03	0.130	0.179
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Simultaneous	138	5690	1	8.43	9.50	1.279	92.92	1.076	0.02	0.160	0.220
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Simultaneous	138	5690	1	8.43	9.50	1.279	92.92	1.076	-0.01	0.188	0.259
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Simultaneous	138	5690	1	8.43	9.50	1.279	92.92	1.076	0.02	0.263	0.362
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	0.02	0.545	0.789
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	0.03	0.649	0.940
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	-0.01	0.654	0.947
26	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	0.04	0.782	1.132
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Simultaneous	155	5775	1	8.41	9.50	1.285	92.92	1.076	-0.03	0.170	0.235
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Simultaneous	155	5775	1	8.41	9.50	1.285	92.92	1.076	0.04	0.208	0.288
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Simultaneous	155	5775	1	8.41	9.50	1.285	92.92	1.076	0.01	0.230	0.318
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Simultaneous	155	5775	1	8.41	9.50	1.285	92.92	1.076	0.05	0.268	0.371



16.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
27	LTE Band 12	10M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	23095	707.5	1	23.05	24.00	1.245	-	-	0.02	0.215	0.268
	LTE Band 12	10M	QPSK	25	0	-	Front	5mm	Ant 0	DSI 7	23095	707.5	1	22.10	23.00	1.230	-	-	0.01	0.119	0.146
	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	23095	707.5	1	23.05	24.00	1.245	-	-	-0.06	0.494	0.615
	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	23095	707.5	2	23.05	24.00	1.245	-	-	0.02	0.431	0.536
	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	23095	707.5	3	23.05	24.00	1.245	-	-	0.03	0.457	0.569
	LTE Band 12	10M	QPSK	25	0	-	Back	5mm	Ant 0	DSI 7	23095	707.5	1	22.10	23.00	1.230	-	-	0.03	0.286	0.352
	LTE Band 12	10M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 7	23095	707.5	1	23.05	24.00	1.245	-	-	0.02	0.366	0.455
	LTE Band 12	10M	QPSK	25	0	-	Right Side	5mm	Ant 0	DSI 7	23095	707.5	1	22.10	23.00	1.230	-	-	0.06	0.200	0.246
	LTE Band 12	10M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	23095	707.5	1	23.05	24.00	1.245	-	-	-0.02	0.418	0.520
	LTE Band 12	10M	QPSK	25	0	-	Bottom Side	5mm	Ant 0	DSI 7	23095	707.5	1	22.10	23.00	1.230	-	-	0.03	0.232	0.285
28	LTE Band 13	10M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	23230	782	1	22.87	24.00	1.297	-	-	0.02	0.207	0.269
	LTE Band 13	10M	QPSK	25	0	-	Front	5mm	Ant 0	DSI 7	23230	782	1	21.90	23.00	1.288	-	-	0.01	0.116	0.149
	LTE Band 13	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	23230	782	1	22.87	24.00	1.297	-	-	0.09	0.416	0.540
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 0	DSI 7	23230	782	1	21.90	23.00	1.288	-	-	0.03	0.223	0.287
	LTE Band 13	10M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 7	23230	782	1	22.87	24.00	1.297	-	-	0.01	0.258	0.335
	LTE Band 13	10M	QPSK	25	0	-	Right Side	5mm	Ant 0	DSI 7	23230	782	1	21.90	23.00	1.288	-	-	-0.01	0.138	0.178
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	23230	782	1	22.87	24.00	1.297	-	-	0.02	0.393	0.510
	LTE Band 13	10M	QPSK	25	0	-	Bottom Side	5mm	Ant 0	DSI 7	23230	782	1	21.90	23.00	1.288	-	-	0.06	0.205	0.264
835MHz																					
29	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	DSI 7	189	836.4	1	30.38	31.50	1.294	-	-	0.02	0.538	0.696
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	189	836.4	1	30.38	31.50	1.294	-	-	-0.02	1.010	1.307
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	189	836.4	2	30.38	31.50	1.294	-	-	0.02	0.930	1.204
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	189	836.4	3	30.38	31.50	1.294	-	-	0.01	0.905	1.171
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	128	824.2	1	30.27	31.50	1.327	-	-	0.05	0.944	1.253
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	251	848.8	1	30.38	31.50	1.294	-	-	0.04	0.881	1.140
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Side	5mm	Ant 0	DSI 7	189	836.4	1	30.38	31.50	1.294	-	-	-0.18	0.464	0.601
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	189	836.4	1	30.38	31.50	1.294	-	-	0.08	0.870	1.126
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	128	824.2	1	30.27	31.50	1.327	-	-	-0.17	0.911	1.209
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	251	848.8	1	30.38	31.50	1.294	-	-	-0.03	0.944	1.222
30	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	4182	836.4	1	23.16	24.00	1.213	-	-	0.03	0.513	0.622
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4182	836.4	1	23.16	24.00	1.213	-	-	-0.01	1.010	1.226
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4132	826.4	1	23.12	24.00	1.225	-	-	0.01	0.982	1.203
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4233	846.6	1	23.15	24.00	1.216	-	-	0.05	0.932	1.133
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	4182	836.4	1	23.16	24.00	1.213	-	-	0.03	0.429	0.521
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	4182	836.4	1	23.16	24.00	1.213	-	-	0.02	0.946	1.148
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	4132	826.4	1	23.12	24.00	1.225	-	-	0.06	0.939	1.150
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	4233	846.6	1	23.15	24.00	1.216	-	-	0.01	0.908	1.104
31	LTE Band 26	15M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	26865	831.5	1	23.25	24.00	1.189	-	-	0.01	0.499	0.593
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 0	DSI 7	26865	831.5	1	22.32	23.00	1.169	-	-	-0.02	0.319	0.373
	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	26865	831.5	1	23.25	24.00	1.189	-	-	0.01	0.891	1.059
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 0	DSI 7	26865	831.5	1	22.32	23.00	1.169	-	-	0.05	0.719	0.841
	LTE Band 26	15M	QPSK	75	0	-	Back	5mm	Ant 0	DSI 7	26865	831.5	1	22.20	23.00	1.202	-	-	0.03	0.701	0.843
	LTE Band 26	15M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 7	26865	831.5	1	23.25	24.00	1.189	-	-	0.02	0.414	0.492
	LTE Band 26	15M	QPSK	36	0	-	Right Side	5mm	Ant 0	DSI 7	26865	831.5	1	22.32	23.00	1.169	-	-	-0.08	0.271	0.317
	LTE Band 26	15M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	26865	831.5	1	23.25	24.00	1.189	-	-	0.1	0.818	0.972
	LTE Band 26	15M	QPSK	36	0	-	Bottom Side	5mm	Ant 0	DSI 7	26865	831.5	1	22.32	23.00	1.169	-	-	0.05	0.534	0.625
	LTE Band 26	15M	QPSK	75	0	-	Bottom Side	5mm	Ant 0	DSI 7	26865	831.5	1	22.20	23.00	1.202	-	-	0.03	0.520	0.625
	LTE Band 26	15M	QPSK	1	0	-	Front	5mm	Ant 4	DSI 7	26865	831.5	1	21.86	23.00	1.300	-	-	0.02	0.190	0.247
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 4	DSI 7	26865	831.5	1	20.92	22.00	1.282	-	-	0.01	0.123	0.158
	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	26865	831.5	1	21.86	23.00	1.300	-	-	0.04	0.539	0.701



FCC SAR Test Report

Report No. : FA392114

	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 4	DSI 7	26865	831.5	1	20.92	22.00	1.282	-	-	0.03	0.293	0.376
	LTE Band 26	15M	QPSK	1	0	-	Left Side	5mm	Ant 4	DSI 7	26865	831.5	1	21.86	23.00	1.300	-	-	0.06	0.082	0.107
	LTE Band 26	15M	QPSK	36	0	-	Left Side	5mm	Ant 4	DSI 7	26865	831.5	1	20.92	22.00	1.282	-	-	-0.02	0.049	0.063
	LTE Band 26	15M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI 7	26865	831.5	1	21.86	23.00	1.300	-	-	0.03	0.413	0.537
	LTE Band 26	15M	QPSK	36	0	-	Top Side	5mm	Ant 4	DSI 7	26865	831.5	1	20.92	22.00	1.282	-	-	0.04	0.270	0.346
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 7	166300	831.5	1	23.55	24.00	1.109	-	-	0.08	0.331	0.367
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 7	166300	831.5	1	23.42	24.00	1.143	-	-	0.01	0.364	0.416
32	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	166300	831.5	1	23.55	24.00	1.109	-	-	-0.02	0.674	0.748
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	166300	831.5	1	23.42	24.00	1.143	-	-	0.03	0.611	0.698
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 7	166300	831.5	1	23.55	24.00	1.109	-	-	-0.08	0.271	0.301
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 7	166300	831.5	1	23.42	24.00	1.143	-	-	0.1	0.274	0.313
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	166300	831.5	1	23.55	24.00	1.109	-	-	-0.18	0.469	0.520
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	166300	831.5	1	23.42	24.00	1.143	-	-	0.1	0.487	0.557
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	166300	831.5	1	22.01	23.00	1.256	-	-	0.12	0.124	0.156
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	166300	831.5	1	21.95	23.00	1.274	-	-	0.08	0.166	0.211
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	166300	831.5	1	22.01	23.00	1.256	-	-	-0.17	0.363	0.456
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	166300	831.5	1	21.95	23.00	1.274	-	-	0.14	0.415	0.529
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	166300	831.5	1	22.01	23.00	1.256	-	-	-0.03	0.064	0.080
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	166300	831.5	1	21.95	23.00	1.274	-	-	0.14	0.092	0.117
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	166300	831.5	1	22.01	23.00	1.256	-	-	0.11	0.254	0.319
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	166300	831.5	1	21.95	23.00	1.274	-	-	-0.05	0.309	0.394
	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 4	DSI 7	20525	836.5	1	21.35	22.70	1.365	-	-	0.02	0.165	0.225
	LTE Band 5	10M	QPSK	25	0	-	Front	5mm	Ant 4	DSI 7	20525	836.5	1	21.27	22.70	1.390	-	-	0.06	0.154	0.214
33	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	20525	836.5	1	21.35	22.70	1.365	-	-	0.01	0.455	0.621
	LTE Band 5	10M	QPSK	25	0	-	Back	5mm	Ant 4	DSI 7	20525	836.5	1	21.27	22.70	1.390	-	-	-0.02	0.357	0.496
	LTE Band 5	10M	QPSK	1	0	-	Left Side	5mm	Ant 4	DSI 7	20525	836.5	1	21.35	22.70	1.365	-	-	0.06	0.080	0.109
	LTE Band 5	10M	QPSK	25	0	-	Left Side	5mm	Ant 4	DSI 7	20525	836.5	1	21.27	22.70	1.390	-	-	0.03	0.051	0.071
	LTE Band 5	10M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI 7	20525	836.5	1	21.35	22.70	1.365	-	-	0.02	0.302	0.412
	LTE Band 5	10M	QPSK	25	0	-	Top Side	5mm	Ant 4	DSI 7	20525	836.5	1	21.27	22.70	1.390	-	-	0.07	0.174	0.242
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	167300	836.5	1	21.17	22.30	1.297	-	-	0.02	0.156	0.202
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	167300	836.5	1	21.04	22.30	1.337	-	-	0.06	0.188	0.251
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	167300	836.5	1	21.17	22.30	1.297	-	-	0.09	0.406	0.527
34	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	167300	836.5	1	21.04	22.30	1.337	-	-	-0.04	0.461	0.616
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	167300	836.5	1	21.17	22.30	1.297	-	-	0.02	0.069	0.090
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	167300	836.5	1	21.04	22.30	1.337	-	-	0.06	0.110	0.147
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	167300	836.5	1	21.17	22.30	1.297	-	-	0.01	0.259	0.336
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	167300	836.5	1	21.04	22.30	1.337	-	-	0.03	0.350	0.468
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	1413	1732.6	1	15.50	16.70	1.318	-	-	-0.01	0.277	0.365
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1413	1732.6	1	15.50	16.70	1.318	-	-	0.06	0.777	1.024
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1312	1712.4	1	15.44	16.70	1.337	-	-	-0.09	0.749	1.001
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1513	1752.6	1	15.46	16.70	1.330	-	-	-0.08	0.762	1.014
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	1413	1732.6	1	15.50	16.70	1.318	-	-	0.13	0.038	0.050
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1413	1732.6	1	15.50	16.70	1.318	-	-	0.12	0.920	1.213
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1312	1712.4	1	15.44	16.70	1.337	-	-	0.03	0.934	1.248
35	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1513	1752.6	1	15.46	16.70	1.330	-	-	-0.03	0.967	1.287
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	132322	1745	1	15.75	17.00	1.334	-	-	0.19	0.255	0.340
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	DSI 7	132322	1745	1	15.68	17.00	1.355	-	-	0.03	0.195	0.264
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	132322	1745	1	15.75	17.00	1.334	-	-	-0.08	0.728	0.971
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	132072	1720	1	15.69	17.00	1.352	-	-	-0.17	0.725	0.980
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	132572	1770	1	15.70	17.00	1.349	-	-	-0.08	0.709	0.956
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	132322	1745	1	15.68	17.00	1.355	-	-	-0.04	0.671	0.909
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	132072	1720	1	15.66	17.00	1.361	-	-	-0.08	0.670	0.912
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	132572	1770	1	15.66	17.00	1.361	-	-	0.17	0.659	0.897
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 0	DSI 7	132322	1745	1	15.63	17.00	1.371	-	-	0.18	0.668	0.916
	LTE Band 66	20M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 7	132322	1745	1	15.75	17.00	1.334	-	-	-0.04	0.041	0.055



FCC SAR Test Report

Report No. : FA392114

	LTE Band 66	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	DSI 7	132322	1745	1	15.68	17.00	1.355	-	-	-0.08	0.027	0.037
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132322	1745	1	15.75	17.00	1.334	-	-	-0.13	0.919	1.226
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132072	1720	1	15.69	17.00	1.352	-	-	-0.13	0.882	1.193
36	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132572	1770	1	15.70	17.00	1.349	-	-	-0.01	0.954	1.287
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	132322	1745	1	15.68	17.00	1.355	-	-	0.06	0.899	1.218
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	132072	1720	1	15.66	17.00	1.361	-	-	-0.03	0.883	1.202
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	132572	1770	1	15.66	17.00	1.361	-	-	-0.03	0.913	1.243
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	DSI 7	132322	1745	1	15.63	17.00	1.371	-	-	0.08	0.900	1.234
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132572	1770	1	15.70	17.00	1.349	-	-	-0.01	0.499	0.673
	LTE Band 66C	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	132572+ 132374	1770+ 1750.2	1	15.60	17.00	1.380	-	-	0.06	0.863	1.191
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 4	DSI 7	132322	1745	1	16.40	17.70	1.349	-	-	0.16	0.113	0.152
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 4	DSI 7	132322	1745	1	16.37	17.70	1.358	-	-	0.13	0.097	0.132
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	132322	1745	1	16.40	17.70	1.349	-	-	-0.18	0.267	0.360
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 4	DSI 7	132322	1745	1	16.37	17.70	1.358	-	-	-0.03	0.211	0.287
	LTE Band 66	20M	QPSK	1	0	-	Left Side	5mm	Ant 4	DSI 7	132322	1745	1	16.40	17.70	1.349	-	-	-0.01	0.021	0.028
	LTE Band 66	20M	QPSK	50	0	-	Left Side	5mm	Ant 4	DSI 7	132322	1745	1	16.37	17.70	1.358	-	-	-0.06	0.018	0.024
	LTE Band 66	20M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI 7	132322	1745	1	16.40	17.70	1.349	-	-	0.05	0.455	0.614
	LTE Band 66	20M	QPSK	50	0	-	Top Side	5mm	Ant 4	DSI 7	132322	1745	1	16.37	17.70	1.358	-	-	-0.17	0.372	0.505
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI 7	132322	1745	1	16.33	17.70	1.371	-	-	0.03	0.438	0.600
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 7	349000	1745	1	16.31	17.70	1.377	-	-	0.06	0.307	0.423
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 7	349000	1745	1	16.28	17.70	1.387	-	-	0.01	0.252	0.349
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	349000	1745	1	16.31	17.70	1.377	-	-	0.02	0.802	1.105
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	349000	1745	1	16.28	17.70	1.387	-	-	0.04	0.733	1.016
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	349000	1745	1	16.24	17.70	1.400	-	-	0.05	0.749	1.048
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 7	349000	1745	1	16.31	17.70	1.377	-	-	-0.06	0.045	0.062
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 7	349000	1745	1	16.28	17.70	1.387	-	-	0.02	0.037	0.051
37	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	349000	1745	1	16.31	17.70	1.377	-	-	-0.04	0.930	1.281
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	349000	1745	1	16.28	17.70	1.387	-	-	0.01	0.899	1.247
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	349000	1745	1	16.24	17.70	1.400	-	-	0.03	0.845	1.183
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	349000	1745	1	16.20	17.60	1.380	-	-	0.01	0.161	0.222
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	349000	1745	1	16.15	17.60	1.396	-	-	0.03	0.173	0.242
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	349000	1745	1	16.20	17.60	1.380	-	-	0.14	0.327	0.451
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	349000	1745	1	16.15	17.60	1.396	-	-	-0.17	0.340	0.475
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	349000	1745	1	16.20	17.60	1.380	-	-	0.02	0.022	0.030
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	349000	1745	1	16.15	17.60	1.396	-	-	0.04	0.037	0.052
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	349000	1745	1	16.20	17.60	1.380	-	-	0.05	0.386	0.533
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	349000	1745	1	16.15	17.60	1.396	-	-	0.04	0.443	0.619
	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	349000	1745	1	16.15	17.60	1.396	-	-	0.07	0.440	0.614
1900MHz																					
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	DSI 7	661	1880	1	18.52	19.80	1.343	-	-	0.11	0.237	0.318
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 7	661	1880	1	18.52	19.80	1.343	-	-	0.04	0.488	0.655
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Side	5mm	Ant 0	DSI 7	661	1880	1	18.52	19.80	1.343	-	-	-0.11	0.032	0.043
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	661	1880	1	18.52	19.80	1.343	-	-	-0.16	0.861	1.156
38	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	512	1850.2	1	18.25	19.80	1.429	-	-	-0.06	0.958	1.369
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	512	1850.2	2	18.25	19.80	1.429	-	-	0.02	0.744	1.063
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	512	1850.2	3	18.25	19.80	1.429	-	-	0.06	0.710	1.015
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 7	810	1909.8	1	18.41	19.80	1.377	-	-	-0.15	0.847	1.166
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	9400	1880	1	16.25	17.30	1.274	-	-	-0.16	0.219	0.279
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9400	1880	1	16.25	17.30	1.274	-	-	-0.02	0.774	0.986
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9262	1852.4	1	16.23	17.30	1.279	-	-	-0.05	0.754	0.965
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9538	1907.6	1	16.20	17.30	1.288	-	-	-0.13	0.732	0.943
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	9400	1880	1	16.25	17.30	1.274	-	-	0.08	0.035	0.045
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9400	1880	1	16.25	17.30	1.274	-	-	0.16	0.973	1.239
39	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9262	1852.4	1	16.23	17.30	1.279	-	-	0.01	0.997	1.276
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9538	1907.6	1	16.20	17.30	1.288	-	-	0.01	0.948	1.221



FCC SAR Test Report

Report No. : FA392114

	LTE Band 25	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	26340	1880	1	16.50	17.70	1.318	-	-	0.08	0.217	0.286
	LTE Band 25	20M	QPSK	50	0	-	Front	5mm	Ant 0	DSI 7	26340	1880	1	16.41	17.70	1.346	-	-	-0.08	0.149	0.201
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	26340	1880	1	16.50	17.70	1.318	-	-	0.1	0.548	0.722
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 7	26340	1880	1	16.41	17.70	1.346	-	-	-0.17	0.494	0.665
	LTE Band 25	20M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 7	26340	1880	1	16.50	17.70	1.318	-	-	-0.05	0.033	0.044
	LTE Band 25	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	DSI 7	26340	1880	1	16.41	17.70	1.346	-	-	0.18	0.023	0.031
	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	26340	1880	1	16.50	17.70	1.318	-	-	0.14	0.910	1.200
40	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	26140	1860	1	16.45	17.70	1.334	-	-	0.01	0.954	1.272
	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	26590	1905	1	16.42	17.70	1.343	-	-	-0.17	0.842	1.131
	LTE Band 25	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	26340	1880	1	16.41	17.70	1.346	-	-	0.17	0.802	1.079
	LTE Band 25	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	26140	1860	1	16.37	17.70	1.358	-	-	-0.05	0.834	1.133
	LTE Band 25	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 7	26590	1905	1	16.28	17.70	1.387	-	-	0.01	0.852	1.182
	LTE Band 25	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	DSI 7	26340	1880	1	16.36	17.70	1.361	-	-	0.1	0.760	1.035
	LTE Band 2 Other PA	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	18700	1860	1	16.45	17.70	1.334	-	-	-0.06	0.937	1.250
	LTE Band 25	20M	QPSK	1	0	-	Front	5mm	Ant 4	DSI 7	26340	1880	1	13.34	14.10	1.191	-	-	0.18	0.257	0.306
	LTE Band 25	20M	QPSK	50	0	-	Front	5mm	Ant 4	DSI 7	26340	1880	1	13.30	14.10	1.202	-	-	-0.15	0.170	0.204
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	26340	1880	1	13.34	14.10	1.191	-	-	0.03	0.516	0.615
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 4	DSI 7	26340	1880	1	13.30	14.10	1.202	-	-	0.11	0.342	0.411
	LTE Band 25	20M	QPSK	1	0	-	Left Side	5mm	Ant 4	DSI 7	26340	1880	1	13.34	14.10	1.191	-	-	-0.04	0.056	0.067
	LTE Band 25	20M	QPSK	50	0	-	Left Side	5mm	Ant 4	DSI 7	26340	1880	1	13.30	14.10	1.202	-	-	-0.08	0.035	0.042
	LTE Band 25	20M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI 7	26340	1880	1	13.34	14.10	1.191	-	-	-0.01	0.519	0.618
	LTE Band 25	20M	QPSK	50	0	-	Top Side	5mm	Ant 4	DSI 7	26340	1880	1	13.30	14.10	1.202	-	-	-0.04	0.353	0.424
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 7	376000	1880	1	17.42	18.60	1.312	-	-	0.05	0.273	0.358
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 7	376000	1880	1	17.40	18.60	1.318	-	-	0.03	0.270	0.356
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	376000	1880	1	17.42	18.60	1.312	-	-	0.05	0.603	0.791
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	376000	1880	1	17.40	18.60	1.318	-	-	0.07	0.598	0.788
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 7	376000	1880	1	17.42	18.60	1.312	-	-	-0.02	0.040	0.052
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 7	376000	1880	1	17.40	18.60	1.318	-	-	0.03	0.038	0.050
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	376000	1880	1	17.42	18.60	1.312	-	-	0.04	0.953	1.251
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	372000	1860	1	17.38	18.60	1.324	-	-	0.06	0.840	1.112
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	380000	1900	1	17.36	18.60	1.330	-	-	0.05	0.945	1.257
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	376000	1880	1	17.40	18.60	1.318	-	-	0.02	0.935	1.233
41	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	372000	1860	1	17.35	18.60	1.334	-	-	0.01	0.970	1.294
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	380000	1900	1	17.32	18.60	1.343	-	-	0.03	0.898	1.206
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 7	376000	1880	1	17.37	18.60	1.327	-	-	0.04	0.753	1.000
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	376000	1880	1	14.35	15.60	1.334	-	-	-0.15	0.182	0.243
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	376000	1880	1	14.28	15.60	1.355	-	-	0.16	0.174	0.236
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	376000	1880	1	14.35	15.60	1.334	-	-	0.06	0.462	0.616
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	376000	1880	1	14.28	15.60	1.355	-	-	0.07	0.429	0.581
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	376000	1880	1	14.35	15.60	1.334	-	-	-0.06	0.042	0.056
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	376000	1880	1	14.28	15.60	1.355	-	-	-0.04	0.041	0.056
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	376000	1880	1	14.35	15.60	1.334	-	-	-0.09	0.456	0.608
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	376000	1880	1	14.28	15.60	1.355	-	-	0.18	0.442	0.599
	FR1 n2 Other PA	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	376000	1880	1	14.35	15.60	1.334	-	-	0.02	0.457	0.609
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	21100	2535	1	17.72	18.70	1.253	-	-	0.09	0.510	0.639
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	21100	2535	1	17.65	18.70	1.274	-	-	0.04	0.492	0.627
42	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	17.72	18.70	1.253	-	-	0.12	1.020	1.278
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	20850	2510	1	17.68	18.70	1.265	-	-	0.17	0.975	1.233
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	21350	2560	1	17.66	18.70	1.271	-	-	0.09	0.984	1.250
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	17.65	18.70	1.274	-	-	0.05	0.958	1.220
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	20850	2510	1	17.55	18.70	1.303	-	-	-0.08	0.952	1.241
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	21350	2560	1	17.57	18.70	1.297	-	-	0.01	0.955	1.239
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	17.64	18.70	1.276	-	-	0.03	0.961	1.227
	LTE Band 7	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	21100	2535	1	17.72	18.70	1.253	-	-	-0.02	0.543	0.680
	LTE Band 7	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	21100	2535	1	17.65	18.70	1.274	-	-	0.13	0.450	0.573



FCC SAR Test Report

Report No. : FA392114

	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	21100	2535	1	17.72	18.70	1.253	-	-	-0.15	0.462	0.579
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	21100	2535	1	17.65	18.70	1.274	-	-	-0.19	0.401	0.511
	LTE Band 7C	20M	QPSK	1	99	-	Back	5mm	Ant 1	DSI 7	21100+21298	2535+2554.8	1	17.16	18.70	1.426	-	-	0.06	0.825	1.176
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 4	DSI 7	21100	2535	1	13.30	14.70	1.380	-	-	0.07	0.105	0.145
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 4	DSI 7	21100	2535	1	13.25	14.70	1.396	-	-	-0.18	0.086	0.120
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	21100	2535	1	13.30	14.70	1.380	-	-	0.01	0.445	0.614
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 4	DSI 7	21100	2535	1	13.25	14.70	1.396	-	-	-0.09	0.317	0.443
	LTE Band 7	20M	QPSK	1	0	-	Left Side	5mm	Ant 4	DSI 7	21100	2535	1	13.30	14.70	1.380	-	-	-0.11	0.127	0.175
	LTE Band 7	20M	QPSK	50	0	-	Left Side	5mm	Ant 4	DSI 7	21100	2535	1	13.25	14.70	1.396	-	-	0.1	0.108	0.151
	LTE Band 7	20M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI 7	21100	2535	1	13.30	14.70	1.380	-	-	-0.16	0.404	0.558
	LTE Band 7	20M	QPSK	50	0	-	Top Side	5mm	Ant 4	DSI 7	21100	2535	1	13.25	14.70	1.396	-	-	0.17	0.291	0.406
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	19.40	20.70	1.349	62.9	1.006	-0.02	0.523	0.710
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	39750	2506	1	19.32	20.70	1.374	62.9	1.006	0.01	0.473	0.654
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	40185	2549.5	1	19.34	20.70	1.368	62.9	1.006	0.05	0.526	0.724
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	41055	2636.5	1	19.38	20.70	1.355	62.9	1.006	0.03	0.511	0.697
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	41490	2680	1	19.35	20.70	1.365	62.9	1.006	0.09	0.505	0.693
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	19.37	20.70	1.358	62.9	1.006	0.05	0.494	0.675
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	39750	2506	1	19.21	20.70	1.409	62.9	1.006	-0.08	0.463	0.656
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	40185	2549.5	1	19.24	20.70	1.400	62.9	1.006	0.04	0.465	0.655
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	41055	2636.5	1	19.35	20.70	1.365	62.9	1.006	0.09	0.459	0.630
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	41490	2680	1	19.25	20.70	1.396	62.9	1.006	0.02	0.447	0.628
	LTE Band 41	20M	QPSK	100	0	-	Front	5mm	Ant 1	DSI 7	40620	2593	1	19.32	20.70	1.374	62.9	1.006	0.06	0.449	0.621
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	40620	2593	1	19.40	20.70	1.349	62.9	1.006	0.03	0.835	1.133
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	39750	2506	1	19.32	20.70	1.374	62.9	1.006	0.04	0.752	1.039
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	40185	2549.5	1	19.34	20.70	1.368	62.9	1.006	0.02	0.780	1.073
43	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	41055	2636.5	1	19.38	20.70	1.355	62.9	1.006	-0.1	0.940	1.282
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	41490	2680	1	19.35	20.70	1.365	62.9	1.006	0.02	0.929	1.275
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	40620	2593	1	19.37	20.70	1.358	62.9	1.006	0.04	0.836	1.142
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	39750	2506	1	19.21	20.70	1.409	62.9	1.006	0.01	0.886	1.256
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	40185	2549.5	1	19.24	20.70	1.400	62.9	1.006	0.06	0.841	1.184
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	41055	2636.5	1	19.35	20.70	1.365	62.9	1.006	-0.02	0.814	1.117
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	41490	2680	1	19.25	20.70	1.396	62.9	1.006	0.03	0.891	1.252
	LTE Band 41	20M	QPSK	100	0	-	Back	5mm	Ant 1	DSI 7	40620	2593	1	19.32	20.70	1.374	62.9	1.006	-0.04	0.875	1.210
	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	40620	2593	1	19.40	20.70	1.349	62.9	1.006	0.01	0.530	0.719
	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	39750	2506	1	19.32	20.70	1.374	62.9	1.006	0.06	0.471	0.651
	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	40185	2549.5	1	19.34	20.70	1.368	62.9	1.006	-0.02	0.542	0.746
	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	41055	2636.5	1	19.38	20.70	1.355	62.9	1.006	0.04	0.530	0.723
	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	41490	2680	1	19.35	20.70	1.365	62.9	1.006	0.06	0.528	0.725
	LTE Band 41	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	40620	2593	1	19.37	20.70	1.358	62.9	1.006	0.02	0.484	0.661
	LTE Band 41	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	39750	2506	1	19.21	20.70	1.409	62.9	1.006	0.03	0.439	0.622
	LTE Band 41	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	40185	2549.5	1	19.24	20.70	1.400	62.9	1.006	-0.04	0.484	0.681
	LTE Band 41	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	41055	2636.5	1	19.35	20.70	1.365	62.9	1.006	0.01	0.458	0.629
	LTE Band 41	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	41490	2680	1	19.25	20.70	1.396	62.9	1.006	0.02	0.436	0.612
	LTE Band 41	20M	QPSK	100	0	-	Left Side	5mm	Ant 1	DSI 7	40620	2593	1	19.32	20.70	1.374	62.9	1.006	0.06	0.474	0.655
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 1	DSI 7	40620	2593	1	19.40	20.70	1.349	62.9	1.006	0.01	0.389	0.528
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 1	DSI 7	40620	2593	1	19.37	20.70	1.358	62.9	1.006	0.06	0.311	0.425
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 4	DSI 7	40620	2593	1	14.90	16.00	1.288	62.9	1.006	-0.04	0.117	0.152
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 4	DSI 7	40620	2593	1	14.85	16.00	1.303	62.9	1.006	0.19	0.080	0.105
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	40620	2593	1	14.90	16.00	1.288	62.9	1.006	-0.03	0.469	0.608
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	39750	2506	1	14.85	16.00	1.303	62.9	1.006	0.03	0.478	0.627
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	40185	2549.5	1	14.82	16.00	1.312	62.9	1.006	0.02	0.408	0.539
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	41055	2636.5	1	14.84	16.00	1.306	62.9	1.006	0.12	0.435	0.572
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI 7	41490	2680	1	14.86	16.00	1.300	62.9	1.006	0.02	0.389	0.509
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 4	DSI 7	40620	2593	1	14.85	16.00	1.303	62.9	1.006	-0.03	0.419	0.549
	LTE Band 41	20M	QPSK	100	0	-	Back	5mm	Ant 4	DSI 7	40620	2593	1	14.83	16.00	1.309	62.9	1.006	0.07	0.394	0.519
	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 4	DSI 7	40620	2593	1	14.90	16.00	1.288	62.9	1.006	0.15	0.131	0.170



FCC SAR Test Report

Report No. : FA392114

	LTE Band 41	20M	QPSK	50	0	-	Left Side	5mm	Ant 4	DSI 7	40620	2593	1	14.85	16.00	1.303	62.9	1.006	0.01	0.102	0.134
	LTE Band 41	20M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI 7	40620	2593	1	14.90	16.00	1.288	62.9	1.006	-0.12	0.423	0.548
	LTE Band 41	20M	QPSK	50	0	-	Top Side	5mm	Ant 4	DSI 7	40620	2593	1	14.85	16.00	1.303	62.9	1.006	-0.13	0.292	0.383
	LTE Band 38C	20M	QPSK	1	99	-	Back	5mm	Ant 4	DSI 7	37850+38048	2580+2599.8	1	14.75	16.00	1.334	62.9	1.006	0.03	0.455	0.610
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 7	507000	2535	1	16.75	17.90	1.303	-	-	0.03	0.570	0.743
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 7	507000	2535	1	16.72	17.90	1.312	-	-	0.02	0.570	0.748
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	507000	2535	1	16.75	17.90	1.303	-	-	0.01	0.927	1.208
44	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	507000	2535	1	16.72	17.90	1.312	-	-	-0.15	0.977	1.282
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	507000	2535	2	16.72	17.90	1.312	-	-	0.02	0.923	1.211
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	507000	2535	3	16.72	17.90	1.312	-	-	0.04	0.946	1.241
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	507000	2535	1	16.68	17.90	1.324	-	-	-0.02	0.908	1.203
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 7	507000	2535	1	16.75	17.90	1.303	-	-	0.03	0.582	0.758
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 7	507000	2535	1	16.72	17.90	1.312	-	-	0.04	0.573	0.752
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 1	DSI 7	507000	2535	1	16.75	17.90	1.303	-	-	0.06	0.514	0.670
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	5mm	Ant 1	DSI 7	507000	2535	1	16.72	17.90	1.312	-	-	-0.02	0.470	0.617
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	507000	2535	1	12.55	13.40	1.216	-	-	-0.06	0.147	0.179
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 4	DSI 7	507000	2535	1	12.51	13.40	1.227	-	-	-0.13	0.151	0.185
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	507000	2535	1	12.55	13.40	1.216	-	-	0.08	0.515	0.626
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 4	DSI 7	507000	2535	1	12.51	13.40	1.227	-	-	-0.11	0.501	0.615
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	507000	2535	1	12.55	13.40	1.216	-	-	-0.14	0.174	0.212
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	5mm	Ant 4	DSI 7	507000	2535	1	12.51	13.40	1.227	-	-	-0.18	0.166	0.204
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	507000	2535	1	12.55	13.40	1.216	-	-	0.02	0.483	0.587
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	5mm	Ant 4	DSI 7	507000	2535	1	12.51	13.40	1.227	-	-	0.16	0.492	0.604
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 4	DSI 7	518598	2592.99	1	12.49	13.70	1.321	-	-	-0.05	0.122	0.161
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 4	DSI 7	518598	2592.99	1	12.42	13.70	1.343	-	-	-0.03	0.118	0.158
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI 7	518598	2592.99	1	12.49	13.70	1.321	-	-	-0.14	0.455	0.601
45	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI 7	518598	2592.99	1	12.42	13.70	1.343	-	-	-0.03	0.463	0.622
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 4	DSI 7	518598	2592.99	1	12.49	13.70	1.321	-	-	-0.06	0.157	0.207
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 4	DSI 7	518598	2592.99	1	12.42	13.70	1.343	-	-	-0.15	0.166	0.223
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI 7	518598	2592.99	1	12.49	13.70	1.321	-	-	-0.16	0.418	0.552
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI 7	518598	2592.99	1	12.42	13.70	1.343	-	-	-0.03	0.390	0.524
3500MHz																					
	LTE Band 42	20M	QPSK	1	0	-	Front	5mm	Ant 5	DSI 7	42590	3500	1	16.75	17.80	1.274	62.9	1.006	0.02	0.261	0.334
	LTE Band 42	20M	QPSK	50	0	-	Front	5mm	Ant 5	DSI 7	42590	3500	1	16.70	17.80	1.288	62.9	1.006	-0.11	0.232	0.301
	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	DSI 7	42590	3500	1	16.75	17.80	1.274	62.9	1.006	0.02	0.422	0.541
	LTE Band 42	20M	QPSK	50	0	-	Back	5mm	Ant 5	DSI 7	42590	3500	1	16.70	17.80	1.288	62.9	1.006	0.18	0.369	0.478
	LTE Band 42	20M	QPSK	1	0	-	Left Side	5mm	Ant 5	DSI 7	42590	3500	1	16.75	17.80	1.274	62.9	1.006	-0.02	0.057	0.073
	LTE Band 42	20M	QPSK	50	0	-	Left Side	5mm	Ant 5	DSI 7	42590	3500	1	16.70	17.80	1.288	62.9	1.006	0.07	0.036	0.047
	LTE Band 42	20M	QPSK	1	0	-	Right Side	5mm	Ant 5	DSI 7	42590	3500	1	16.75	17.80	1.274	62.9	1.006	-0.17	0.148	0.190
	LTE Band 42	20M	QPSK	50	0	-	Right Side	5mm	Ant 5	DSI 7	42590	3500	1	16.70	17.80	1.288	62.9	1.006	0.03	0.122	0.158
46	LTE Band 42	20M	QPSK	1	0	-	Top Side	5mm	Ant 5	DSI 7	42590	3500	1	16.75	17.80	1.274	62.9	1.006	0.03	0.487	0.624
	LTE Band 42	20M	QPSK	50	0	-	Top Side	5mm	Ant 5	DSI 7	42590	3500	1	16.70	17.80	1.288	62.9	1.006	0.11	0.391	0.507
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 5	DSI 7	633332	3499.98	1	13.62	14.70	1.282	-	-	0.03	0.231	0.296
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 5	DSI 7	633332	3499.98	1	13.58	14.70	1.294	-	-	0.1	0.254	0.329
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 5	DSI 7	633332	3499.98	1	13.62	14.70	1.282	-	-	0.06	0.329	0.422
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 5	DSI 7	633332	3499.98	1	13.58	14.70	1.294	-	-	-0.02	0.420	0.544
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 5	DSI 7	633332	3499.98	1	13.62	14.70	1.282	-	-	0.06	0.055	0.071
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 5	DSI 7	633332	3499.98	1	13.58	14.70	1.294	-	-	0.02	0.062	0.080
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 5	DSI 7	633332	3499.98	1	13.62	14.70	1.282	-	-	0.03	0.136	0.174
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 5	DSI 7	633332	3499.98	1	13.58	14.70	1.294	-	-	0.04	0.160	0.207
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 5	DSI 7	633332	3499.98	1	13.62	14.70	1.282	-	-	0.07	0.489	0.627
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 5	DSI 7	633332	3499.98	1	13.58	14.70	1.294	-	-	0.02	0.448	0.580
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 1	DSI 7	633332	3499.98	1	19.19	20.50	1.352	-	-	0.02	0.478	0.646
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 1	DSI 7	633332	3499.98	1	19.17	20.50	1.358	-	-	0.01	0.416	0.565
47	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI 7	633332	3499.98	1	19.19	20.50	1.352	-	-	-0.07	0.787	1.064
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI 7	633332	3499.98	2	19.19	20.50	1.352	-	-	0.03	0.655	0.886



FCC SAR Test Report

Report No. : FA392114

FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI 7	633332	3499.98	3	19.19	20.50	1.352	-	-	0.01	0.721	0.975
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI 7	633332	3499.98	1	19.17	20.50	1.358	-	-	0.02	0.734	0.997
FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI 7	633332	3499.98	1	18.12	19.50	1.374	-	-	0.08	0.701	0.963
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 1	DSI 7	633332	3499.98	1	19.19	20.50	1.352	-	-	-0.03	0.398	0.538
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 1	DSI 7	633332	3499.98	1	19.17	20.50	1.358	-	-	0.01	0.398	0.541
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI 7	633332	3499.98	1	19.19	20.50	1.352	-	-	0.06	0.407	0.550
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI 7	633332	3499.98	1	19.17	20.50	1.358	-	-	0.02	0.389	0.528
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	DSI 7	633332	3499.98	1	16.71	17.90	1.315	-	-	0.01	0.209	0.275
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	DSI 7	633332	3499.98	1	16.65	17.90	1.334	-	-	0.03	0.191	0.255
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 7	633332	3499.98	1	16.71	17.90	1.315	-	-	0.01	0.470	0.618
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 7	633332	3499.98	1	16.65	17.90	1.334	-	-	0.02	0.440	0.587
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DSI 7	633332	3499.98	1	16.71	17.90	1.315	-	-	0.01	0.161	0.212
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DSI 7	633332	3499.98	1	16.65	17.90	1.334	-	-	-0.02	0.159	0.212
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DSI 7	633332	3499.98	1	16.71	17.90	1.315	-	-	0.03	0.029	0.038
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DSI 7	633332	3499.98	1	16.65	17.90	1.334	-	-	0.05	0.029	0.039
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 7	633332	3499.98	1	17.08	18.30	1.324	-	-	0.02	0.347	0.460
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 7	633332	3499.98	1	17.01	18.30	1.346	-	-	0.01	0.383	0.515
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 7	633332	3499.98	1	17.08	18.30	1.324	-	-	-0.16	0.466	0.617
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 7	633332	3499.98	1	17.01	18.30	1.346	-	-	0.03	0.442	0.595
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 7	633332	3499.98	1	17.08	18.30	1.324	-	-	0.06	0.062	0.082
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 7	633332	3499.98	1	17.01	18.30	1.346	-	-	0.05	0.070	0.094
FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 8	DSI 7	633332	3499.98	1	17.08	18.30	1.324	-	-	0.04	0.029	0.038
FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 8	DSI 7	633332	3499.98	1	17.01	18.30	1.346	-	-	0.03	0.037	0.050

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN/BT																	
48	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 6	Hotspot	1	2412	1	15.91	17.00	1.285	98.6	1.014	0.02	0.307	0.400
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	Hotspot	1	2412	1	15.91	17.00	1.285	98.6	1.014	-0.05	0.558	0.727
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	Ant 6	Hotspot	1	2412	1	15.91	17.00	1.285	98.6	1.014	0.01	0.393	0.512
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 6	Hotspot	1	2412	1	15.91	17.00	1.285	98.6	1.014	-0.02	0.323	0.421
49	Bluetooth	1Mbps	Front	5mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.01	0.128	0.180
	Bluetooth	1Mbps	Back	5mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	-0.07	0.277	0.390
	Bluetooth	1Mbps	Right Side	5mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.03	0.150	0.211
	Bluetooth	1Mbps	Top Side	5mm	Ant 6	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.05	0.129	0.181
	Bluetooth	1Mbps	Front	5mm	Ant 6	Simultaneous	39	2441	1	12.21	13.50	1.346	76.99	1.082	0.02	0.047	0.068
	Bluetooth	1Mbps	Back	5mm	Ant 6	Simultaneous	39	2441	1	12.21	13.50	1.346	76.99	1.082	-0.08	0.101	0.147
	Bluetooth	1Mbps	Right Side	5mm	Ant 6	Simultaneous	39	2441	1	12.21	13.50	1.346	76.99	1.082	0.03	0.055	0.080
	Bluetooth	1Mbps	Top Side	5mm	Ant 6	Simultaneous	39	2441	1	12.21	13.50	1.346	76.99	1.082	0.01	0.047	0.068
50	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 6	Hotspot	42	5210	1	11.03	12.00	1.250	92.92	1.076	0.1	0.158	0.213
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	Hotspot	42	5210	1	11.03	12.00	1.250	92.92	1.076	0.05	0.390	0.525
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 6	Hotspot	42	5210	1	11.03	12.00	1.250	92.92	1.076	0.01	0.148	0.199
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Hotspot	42	5210	1	11.03	12.00	1.250	92.92	1.076	-0.04	0.529	0.712
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Hotspot	42	5210	2	11.03	12.00	1.250	92.92	1.076	0.03	0.472	0.635
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Hotspot	42	5210	3	11.03	12.00	1.250	92.92	1.076	0.01	0.480	0.646
51	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 6	Hotspot	155	5775	1	9.84	11.00	1.306	92.92	1.076	0.03	0.171	0.240
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	Hotspot	155	5775	1	9.84	11.00	1.306	92.92	1.076	0.01	0.442	0.621
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 6	Hotspot	155	5775	1	9.84	11.00	1.306	92.92	1.076	-0.12	0.172	0.242
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Hotspot	155	5775	1	9.84	11.00	1.306	92.92	1.076	0.03	0.527	0.741



16.3 Body Worn Accessory SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																						
	LTE Band 12	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	23095	707.5	1	23.05	24.00	1.245	-	-	0.02	0.215	0.268
	LTE Band 12	10M	QPSK	25	0	-	Front	5mm	Ant 0	-	DSI 3	23095	707.5	1	22.10	23.00	1.230	-	-	0.01	0.119	0.146
52	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	23095	707.5	1	23.05	24.00	1.245	-	-	-0.06	0.494	0.615
	LTE Band 12	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	DSI 3	23095	707.5	1	22.10	23.00	1.230	-	-	0.03	0.286	0.352
	LTE Band 13	10M	QPSK	1	0	-	Front	5 mm	Ant 0	-	DSI 3	23230	782	1	22.87	24.00	1.297	-	-	0.02	0.207	0.269
	LTE Band 13	10M	QPSK	25	0	-	Front	5 mm	Ant 0	-	DSI 3	23230	782	1	21.90	23.00	1.288	-	-	0.01	0.116	0.149
53	LTE Band 13	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	23230	782	1	22.87	24.00	1.297	-	-	0.09	0.416	0.540
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	DSI 3	23230	782	1	21.90	23.00	1.288	-	-	0.03	0.223	0.287
835MHz																						
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	5mm	Ant 0	-	DSI 3	189	836.4	1	30.38	31.50	1.294	-	-	0.02	0.538	0.696
54	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	189	836.4	1	30.38	31.50	1.294	-	-	-0.02	1.010	1.307
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	128	824.2	1	30.27	31.50	1.327	-	-	0.05	0.944	1.253
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	-	DSI 3	251	848.8	1	30.38	31.50	1.294	-	-	0.04	0.918	1.188
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	Headset	DSI 3	189	836.4	1	30.38	31.50	1.294	-	-	0.02	0.649	0.840
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	4182	836.4	1	23.16	24.00	1.213	-	-	0.03	0.513	0.622
55	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4182	836.4	1	23.16	24.00	1.213	-	-	-0.01	1.010	1.226
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4132	826.4	1	23.12	24.00	1.225	-	-	0.01	0.982	1.203
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4233	846.6	1	23.15	24.00	1.216	-	-	0.05	0.932	1.133
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	4182	836.4	1	23.16	24.00	1.213	-	-	0.06	0.665	0.807
	LTE Band 26	15M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	26865	831.5	1	23.25	24.00	1.189	-	-	0.01	0.499	0.593
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 0	-	DSI 3	26865	831.5	1	22.32	23.00	1.169	-	-	-0.02	0.319	0.373
56	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	26865	831.5	1	23.25	24.00	1.189	-	-	0.01	0.891	1.059
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 0	-	DSI 3	26865	831.5	1	22.32	23.00	1.169	-	-	0.05	0.719	0.841
	LTE Band 26	15M	QPSK	75	0	-	Back	5mm	Ant 0	-	DSI 3	26865	831.5	1	22.20	23.00	1.202	-	-	0.03	0.701	0.843
	LTE Band 26	15M	QPSK	1	0	-	Front	5mm	Ant 4	-	DSI 3	26865	831.5	1	21.86	23.00	1.300	-	-	0.02	0.190	0.247
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 4	-	DSI 3	26865	831.5	1	20.92	22.00	1.282	-	-	0.01	0.123	0.158
	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	26865	831.5	1	21.86	23.00	1.300	-	-	0.04	0.539	0.701
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 4	-	DSI 3	26865	831.5	1	20.92	22.00	1.282	-	-	0.03	0.293	0.376
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	166300	831.5	1	22.01	23.00	1.256	-	-	0.12	0.124	0.156
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	166300	831.5	1	21.95	23.00	1.274	-	-	0.08	0.166	0.211
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	166300	831.5	1	22.01	23.00	1.256	-	-	-0.17	0.363	0.456
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	166300	831.5	1	21.95	23.00	1.274	-	-	0.14	0.415	0.529
	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	166300	831.5	1	23.55	24.00	1.109	-	-	0.08	0.331	0.367
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	166300	831.5	1	23.42	24.00	1.143	-	-	0.01	0.364	0.416
57	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	166300	831.5	1	23.55	24.00	1.109	-	-	-0.02	0.674	0.748
	FR1 n26	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	166300	831.5	1	23.42	24.00	1.143	-	-	0.03	0.611	0.698
	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 4	-	DSI 3	20525	836.5	1	23.30	24.00	1.175	-	-	0.02	0.267	0.314
	LTE Band 5	10M	QPSK	25	0	-	Front	5mm	Ant 4	-	DSI 3	20525	836.5	1	22.26	23.00	1.186	-	-	0.06	0.168	0.199
58	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	20525	836.5	1	23.30	24.00	1.175	-	-	0.01	0.735	0.864
	LTE Band 5	10M	QPSK	25	0	-	Back	5mm	Ant 4	-	DSI 3	20525	836.5	1	22.26	23.00	1.186	-	-	-0.02	0.586	0.695
	LTE Band 5	10M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	20525	836.5	1	22.20	23.00	1.202	-	-	0.01	0.574	0.690
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	167300	836.5	1	22.11	23.00	1.227	-	-	0.02	0.174	0.214
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	167300	836.5	1	22.05	23.00	1.245	-	-	0.06	0.210	0.261
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	167300	836.5	1	22.11	23.00	1.227	-	-	0.09	0.453	0.556
59	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	167300	836.5	1	22.05	23.00	1.245	-	-	0.01	0.515	0.641
1750MHz																						
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	1413	1732.6	1	16.92	18.20	1.343	-	-	0.02	0.343	0.461
60	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1413	1732.6	1	16.92	18.20	1.343	-	-	-0.06	0.962	1.292
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1413	1732.6	2	16.92	18.20	1.343	-	-	0.03	0.783	1.051
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1413	1732.6	3	16.92	18.20	1.343	-	-	0.01	0.850	1.141



FCC SAR Test Report

Report No. : FA392114

	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1312	1712.4	1	16.86	18.20	1.361	-	-	0.02	0.927	1.262
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	1513	1752.6	1	16.88	18.20	1.355	-	-	0.03	0.944	1.279
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	1413	1732.6	1	16.92	18.20	1.343	-	-	0.03	0.589	0.791
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	11mm	Ant 0	-	DSI 4	1413	1732.6	1	23.25	24.00	1.189	-	-	0.06	0.319	0.379
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	17mm	Ant 0	-	DSI 4	1413	1732.6	1	23.25	24.00	1.189	-	-	0.01	0.734	0.872
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	1	16.23	17.30	1.279	-	-	-0.01	0.347	0.444
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	1	16.21	17.30	1.285	-	-	0.01	0.325	0.418
61	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	1	16.23	17.30	1.279	-	-	-0.09	0.991	1.268
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132072	1720	1	16.18	17.30	1.294	-	-	0.02	0.965	1.249
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132572	1770	1	16.20	17.30	1.288	-	-	0.01	0.965	1.243
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	1	16.21	17.30	1.285	-	-	0.06	0.942	1.211
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132072	1720	1	16.13	17.30	1.309	-	-	-0.06	0.940	1.231
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132572	1770	1	16.15	17.30	1.303	-	-	0.02	0.925	1.205
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	1	16.17	17.30	1.297	-	-	0.03	0.908	1.178
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	132322	1745	1	16.23	17.30	1.279	-	-	0.01	0.571	0.731
	LTE Band 66	20M	QPSK	1	0	-	Front	11mm	Ant 0	-	DSI 4	132322	1745	1	22.91	24.00	1.285	-	-	0.05	0.328	0.422
	LTE Band 66	20M	QPSK	1	0	-	Back	17mm	Ant 0	-	DSI 4	132322	1745	1	22.91	24.00	1.285	-	-	0.01	0.688	0.884
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	1	16.23	17.30	1.279	-	-	0.03	0.580	0.742
	LTE Band 66C	20M	QPSK	1	99	-	Back	5mm	Ant 0	-	DSI 3	132322+ 132520	1745+ 1764.8	1	15.95	17.30	1.365	-	-	0.06	0.853	1.164
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 4	-	DSI 3	132322	1745	1	18.80	19.80	1.259	-	-	0.03	0.214	0.269
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 4	-	DSI 3	132322	1745	1	18.75	19.80	1.274	-	-	-0.01	0.182	0.232
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	132322	1745	1	18.80	19.80	1.259	-	-	0.04	0.705	0.888
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	132072	1720	1	18.72	19.80	1.282	-	-	0.02	0.696	0.893
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	132572	1770	1	18.77	19.80	1.268	-	-	0.04	0.719	0.911
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	132322	1745	1	18.75	19.80	1.274	-	-	0.02	0.700	0.891
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	132072	1720	1	18.58	19.80	1.324	-	-	-0.03	0.656	0.869
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	132572	1770	1	18.67	19.80	1.297	-	-	0.04	0.673	0.873
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 4	-	DSI 3	132322	1745	1	18.70	19.80	1.288	-	-	0.03	0.659	0.849
	LTE Band 66	20M	QPSK	1	0	-	Front	11mm	Ant 4	-	DSI 4	132322	1745	1	21.62	22.50	1.225	-	-	0.02	0.195	0.239
	LTE Band 66	20M	QPSK	1	0	-	Back	17mm	Ant 4	-	DSI 4	132572	1770	1	21.59	22.50	1.233	-	-	0.01	0.185	0.228
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	132572	1770	1	18.60	19.80	1.318	-	-	0.05	0.654	0.862
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	349000	1745	1	17.37	18.60	1.327	-	-	0.02	0.366	0.486
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	349000	1745	1	17.32	18.60	1.343	-	-	0.03	0.300	0.403
62	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	349000	1745	1	17.37	18.60	1.327	-	-	0.04	0.956	1.269
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	349000	1745	1	17.32	18.60	1.343	-	-	0.02	0.918	1.233
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	349000	1745	1	17.30	18.60	1.349	-	-	0.06	0.854	1.152
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	Headset	DSI 3	349000	1745	1	17.37	18.60	1.327	-	-	0.04	0.602	0.799
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	11mm	Ant 0	-	DSI 4	349000	1745	1	23.62	24.00	1.091	-	-	0.03	0.323	0.353
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	17mm	Ant 0	-	DSI 4	349000	1745	1	23.62	24.00	1.091	-	-	0.01	0.584	0.637
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	349000	1745	1	20.05	21.00	1.245	-	-	0.01	0.220	0.274
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	349000	1745	1	20.01	21.00	1.256	-	-	0.02	0.281	0.353
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	349000	1745	1	20.05	21.00	1.245	-	-	0.04	0.684	0.851
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	349000	1745	1	20.01	21.00	1.256	-	-	0.03	0.740	0.929
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	349000	1745	2	20.01	21.00	1.256	-	-	0.06	0.731	0.918
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	349000	1745	3	20.01	21.00	1.256	-	-	0.09	0.718	0.902
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	349000	1745	1	19.98	21.00	1.265	-	-	0.05	0.723	0.914
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	11mm	Ant 4	-	DSI 4	349000	1745	1	21.86	23.00	1.300	-	-	0.01	0.202	0.263
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	17mm	Ant 4	-	DSI 4	349000	1745	1	21.86	23.00	1.300	-	-	0.02	0.165	0.215
	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	349000	1745	1	20.01	21.00	1.256	-	-	0.08	0.708	0.889
1900MHz																						
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DSI 3	661	1880	1	19.97	21.10	1.297	-	-	0.02	0.455	0.590
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3	661	1880	1	19.97	21.10	1.297	-	-	0.03	0.914	1.186
63	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3	512	1850.2	1	19.92	21.10	1.312	-	-	-0.07	0.992	1.302
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3	810	1909.8	1	19.75	21.10	1.365	-	-	0.03	0.902	1.231
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	Headset	DSI 3	512	1850.2	1	19.92	21.10	1.312	-	-	0.05	0.632	0.829



FCC SAR Test Report

Report No. : FA392114

	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	11mm	Ant 0	-	DSI 4	661	1880	1	24.25	25.50	1.334	-	-	-0.02	0.414	0.552
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	17mm	Ant 0	-	DSI 4	512	1850.2	1	24.13	25.50	1.371	-	-	0.01	0.639	0.876
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	9400	1880	1	18.80	19.70	1.230	-	-	-0.03	0.451	0.555
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9400	1880	1	18.80	19.70	1.230	-	-	0.01	0.896	1.102
64	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9262	1852.4	1	18.75	19.70	1.245	-	-	-0.07	1.020	1.269
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9538	1907.6	1	18.72	19.70	1.253	-	-	0.02	0.940	1.178
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	9262	1852.4	1	18.75	19.70	1.245	-	-	0.01	0.685	0.852
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	11mm	Ant 0	-	DSI 4	9400	1880	1	23.17	24.00	1.211	-	-	0.03	0.445	0.539
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	17mm	Ant 0	-	DSI 4	9262	1852.4	1	23.12	24.00	1.225	-	-	0.04	0.543	0.665
	LTE Band 25	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	26340	1880	1	19.46	20.50	1.271	-	-	0.03	0.432	0.549
	LTE Band 25	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	26340	1880	1	19.42	20.50	1.282	-	-	0.06	0.391	0.501
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	26340	1880	1	19.46	20.50	1.271	-	-	0.01	0.915	1.163
65	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	26140	1860	1	19.43	20.50	1.279	-	-	-0.04	1.010	1.292
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	26590	1905	1	19.40	20.50	1.288	-	-	0.03	0.962	1.239
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	26340	1880	1	19.42	20.50	1.282	-	-	0.01	0.939	1.204
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	26140	1860	1	19.28	20.50	1.324	-	-	0.02	0.876	1.160
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	26590	1905	1	19.31	20.50	1.315	-	-	0.06	0.863	1.135
	LTE Band 25	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	DSI 3	26340	1880	1	19.34	20.50	1.306	-	-	0.04	0.912	1.191
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	26140	1860	1	19.43	20.50	1.279	-	-	0.03	0.642	0.821
	LTE Band 25	20M	QPSK	1	0	-	Front	11mm	Ant 0	-	DSI 4	26340	1880	1	22.85	24.00	1.303	-	-	0.06	0.414	0.540
	LTE Band 25	20M	QPSK	1	0	-	Back	17mm	Ant 0	-	DSI 4	26140	1860	1	22.80	24.00	1.318	-	-	0.05	0.471	0.621
	LTE Band 2 Other PA	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	18900	1880	1	19.46	20.50	1.271	-	-	0.05	0.962	1.222
	LTE Band 25	20M	QPSK	1	0	-	Front	5mm	Ant 4	-	DSI 3	26340	1880	1	15.30	16.30	1.259	-	-	0.05	0.459	0.578
	LTE Band 25	20M	QPSK	50	0	-	Front	5mm	Ant 4	-	DSI 3	26340	1880	1	15.24	16.30	1.276	-	-	0.09	0.438	0.559
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	26340	1880	1	15.30	16.30	1.259	-	-	0.01	0.721	0.908
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	26140	1860	1	15.25	16.30	1.274	-	-	-0.06	0.670	0.853
	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	26590	1905	1	15.28	16.30	1.265	-	-	-0.15	0.725	0.917
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	26340	1880	1	15.24	16.30	1.276	-	-	0.05	0.677	0.864
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	26140	1860	1	15.16	16.30	1.300	-	-	-0.08	0.637	0.828
	LTE Band 25	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	26590	1905	1	15.24	16.30	1.276	-	-	0.04	0.672	0.858
	LTE Band 25	20M	QPSK	100	0	-	Back	5mm	Ant 4	-	DSI 3	26340	1880	1	15.25	16.30	1.274	-	-	0.01	0.674	0.858
	LTE Band 25	20M	QPSK	1	0	-	Front	11mm	Ant 4	-	DSI 4	26340	1880	1	21.69	22.50	1.205	-	-	0.03	0.456	0.549
	LTE Band 25	20M	QPSK	1	0	-	Back	17mm	Ant 4	-	DSI 4	26590	1905	1	21.61	22.50	1.227	-	-	-0.02	0.485	0.595
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	376000	1880	1	19.35	20.40	1.274	-	-	0.06	0.396	0.504
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	376000	1880	1	19.30	20.40	1.288	-	-	-0.03	0.393	0.506
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	376000	1880	1	19.35	20.40	1.274	-	-	0.03	0.916	1.167
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	372000	1860	1	19.28	20.40	1.294	-	-	0.09	0.923	1.195
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	380000	1900	1	19.31	20.40	1.285	-	-	0.08	0.894	1.149
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	376000	1880	1	19.30	20.40	1.288	-	-	0.07	0.887	1.143
66	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	372000	1860	1	19.27	20.40	1.297	-	-	-0.08	0.996	1.292
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	380000	1900	1	19.25	20.40	1.303	-	-	0.06	0.832	1.084
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	376000	1880	1	19.27	20.40	1.297	-	-	0.01	0.909	1.179
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	Headset	DSI 3	372000	1860	1	19.27	20.40	1.297	-	-	0.05	0.687	0.891
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	11mm	Ant 0	-	DSI 4	376000	1880	1	23.51	24.00	1.119	-	-	0.09	0.386	0.432
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	17mm	Ant 0	-	DSI 4	372000	1860	1	23.33	24.00	1.167	-	-	-0.01	0.387	0.452
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	376000	1880	1	16.48	17.50	1.265	-	-	0.05	0.385	0.487
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	376000	1880	1	16.47	17.50	1.268	-	-	0.06	0.373	0.473
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	376000	1880	1	16.48	17.50	1.265	-	-	-0.06	0.723	0.914
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	372000	1860	1	16.45	17.50	1.274	-	-	0.05	0.675	0.860
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	380000	1900	1	16.42	17.50	1.282	-	-	0.03	0.642	0.823
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	376000	1880	1	16.47	17.50	1.268	-	-	0.09	0.671	0.851
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	372000	1860	1	16.36	17.50	1.300	-	-	0.05	0.690	0.897
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	380000	1900	1	16.36	17.50	1.300	-	-	-0.08	0.682	0.887
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	376000	1880	1	16.39	17.50	1.291	-	-	0.04	0.629	0.812
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	11mm	Ant 4	-	DSI 4	376000	1880	1	21.87	23.00	1.297	-	-	0.02	0.371	0.481
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	17mm	Ant 4	-	DSI 4	376000	1880	1	21.87	23.00	1.297	-	-	0.01	0.400	0.519



FCC SAR Test Report

Report No. : FA392114

	FR1 n2 Other PA	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	376000	1880	1	16.48	17.50	1.265	-	-	0.07	0.586	0.741
2600MHz																						
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	21100	2535	1	17.72	18.70	1.253	-	-	0.09	0.510	0.639
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	21100	2535	1	17.65	18.70	1.274	-	-	0.04	0.492	0.627
67	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	1	17.72	18.70	1.253	-	-	0.12	1.020	1.278
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	20850	2510	1	17.68	18.70	1.265	-	-	0.03	0.975	1.233
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	1	17.66	18.70	1.271	-	-	0.09	0.984	1.250
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	1	17.65	18.70	1.274	-	-	0.05	0.958	1.220
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	20850	2510	1	17.55	18.70	1.303	-	-	-0.08	0.952	1.241
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	1	17.57	18.70	1.297	-	-	0.01	0.955	1.239
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	1	17.64	18.70	1.276	-	-	0.03	0.961	1.227
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	Headset	DSI 3	21100	2535	1	17.72	18.70	1.253	-	-	0.02	0.674	0.845
	LTE Band 7	20M	QPSK	1	0	-	Front	11mm	Ant 1	-	DSI 4	21100	2535	1	23.13	24.00	1.222	-	-	0.05	0.509	0.622
	LTE Band 7	20M	QPSK	1	0	-	Back	17mm	Ant 1	-	DSI 4	21100	2535	1	23.13	24.00	1.222	-	-	0.01	0.529	0.646
	LTE Band 7C	20M	QPSK	1	99	-	Back	5mm	Ant 1	-	DSI 3	21100+21298	2535+2554.8	1	17.16	18.70	1.426	-	-	0.06	0.825	1.176
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 4	-	DSI 3	21100	2535	1	15.90	16.90	1.259	-	-	0.04	0.169	0.213
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 4	-	DSI 3	21100	2535	1	15.83	16.90	1.279	-	-	-0.02	0.139	0.178
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	21100	2535	1	15.90	16.90	1.259	-	-	0.03	0.689	0.867
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	20850	2510	1	15.83	16.90	1.279	-	-	-0.01	0.692	0.885
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	21350	2560	1	15.85	16.90	1.274	-	-	0.01	0.735	0.936
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	21100	2535	1	15.83	16.90	1.279	-	-	0.01	0.709	0.907
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	20850	2510	1	15.72	16.90	1.312	-	-	0.02	0.683	0.896
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	21350	2560	1	15.74	16.90	1.306	-	-	0.06	0.668	0.873
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 4	-	DSI 3	21100	2535	1	15.82	16.90	1.282	-	-	0.03	0.659	0.845
	LTE Band 7	20M	QPSK	1	0	-	Front	11mm	Ant 4	-	DSI 4	21100	2535	1	23.54	24.00	1.112	-	-	0.06	0.560	0.623
	LTE Band 7	20M	QPSK	1	0	-	Back	17mm	Ant 4	-	DSI 4	21350	2560	1	23.50	24.00	1.122	-	-	0.07	0.654	0.734
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	40620	2593	1	19.40	20.70	1.349	62.9	1.006	-0.02	0.523	0.710
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	39750	2506	1	19.32	20.70	1.374	62.9	1.006	0.01	0.537	0.742
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	40185	2549.5	1	19.34	20.70	1.368	62.9	1.006	0.05	0.526	0.724
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	41055	2636.5	1	19.38	20.70	1.355	62.9	1.006	0.03	0.511	0.697
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	41490	2680	1	19.35	20.70	1.365	62.9	1.006	0.09	0.505	0.693
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	40620	2593	1	19.37	20.70	1.358	62.9	1.006	0.05	0.494	0.675
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	39750	2506	1	19.21	20.70	1.409	62.9	1.006	-0.08	0.463	0.656
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	40185	2549.5	1	19.24	20.70	1.400	62.9	1.006	0.04	0.465	0.655
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	41055	2636.5	1	19.35	20.70	1.365	62.9	1.006	0.09	0.459	0.630
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	41490	2680	1	19.25	20.70	1.396	62.9	1.006	0.02	0.447	0.628
	LTE Band 41	20M	QPSK	100	0	-	Front	5mm	Ant 1	-	DSI 3	40620	2593	1	19.32	20.70	1.374	62.9	1.006	0.06	0.449	0.621
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	40620	2593	1	19.40	20.70	1.349	62.9	1.006	0.03	0.835	1.133
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	39750	2506	1	19.32	20.70	1.374	62.9	1.006	0.04	0.852	1.178
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	40185	2549.5	1	19.34	20.70	1.368	62.9	1.006	0.02	0.880	1.211
68	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	41055	2636.5	1	19.38	20.70	1.355	62.9	1.006	-0.1	0.940	1.282
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	41490	2680	1	19.35	20.70	1.365	62.9	1.006	0.02	0.929	1.275
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	40620	2593	1	19.37	20.70	1.358	62.9	1.006	0.04	0.836	1.142
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	39750	2506	1	19.21	20.70	1.409	62.9	1.006	0.01	0.886	1.256
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	40185	2549.5	1	19.24	20.70	1.400	62.9	1.006	0.06	0.841	1.184
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	41055	2636.5	1	19.35	20.70	1.365	62.9	1.006	-0.02	0.814	1.117
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	41490	2680	1	19.25	20.70	1.396	62.9	1.006	0.03	0.891	1.252
	LTE Band 41	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI 3	40620	2593	1	19.32	20.70	1.374	62.9	1.006	-0.04	0.875	1.210
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	Headset	DSI 3	41055	2636.5	1	19.34	20.70	1.368	62.9	1.006	0.02	0.588	0.809
	LTE Band 41	20M	QPSK	1	0	-	Front	11mm	Ant 1	-	DSI 4	39750	2506	1	22.87	24.00	1.297	62.9	1.006	0.06	0.535	0.698
	LTE Band 41	20M	QPSK	1	0	-	Back	17mm	Ant 1	-	DSI 4	41055	2636.5	1	22.84	24.00	1.306	62.9	1.006	0.01	0.496	0.652
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 4	-	DSI 3	40620	2593	1	17.80	18.70	1.230	62.9	1.006	0.01	0.181	0.224
	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 4	-	DSI 3	40620	2593	1	17.74	18.70	1.247	62.9	1.006	0.05	0.123	0.154
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	40620	2593	1	17.80	18.70	1.230	62.9	1.006	0.06	0.686	0.849
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	39750	2506	1	17.77	18.70	1.239	62.9	1.006	-0.02	0.739	0.921
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	40185	2549.5	1	17.75	18.70	1.245	62.9	1.006	0.01	0.703	0.880



FCC SAR Test Report

Report No. : FA392114

	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	41055	2636.5	1	17.72	18.70	1.253	62.9	1.006	0.03	0.688	0.867
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI 3	41490	2680	1	17.73	18.70	1.250	62.9	1.006	0.01	0.647	0.814
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	40620	2593	1	17.74	18.70	1.247	62.9	1.006	0.02	0.709	0.890
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	39750	2506	1	17.74	18.70	1.247	62.9	1.006	0.01	0.666	0.836
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	40185	2549.5	1	17.67	18.70	1.268	62.9	1.006	0.05	0.654	0.834
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	41055	2636.5	1	17.59	18.70	1.291	62.9	1.006	0.05	0.660	0.857
	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DSI 3	41490	2680	1	17.61	18.70	1.285	62.9	1.006	-0.01	0.679	0.878
	LTE Band 41	20M	QPSK	100	0	-	Back	5mm	Ant 4	-	DSI 3	40620	2593	1	17.71	18.70	1.256	62.9	1.006	0.02	0.689	0.871
	LTE Band 41	20M	QPSK	1	0	-	Front	11mm	Ant 4	-	DSI 4	40620	2593	1	22.90	24.00	1.288	62.9	1.006	0.03	0.328	0.425
	LTE Band 41	20M	QPSK	1	0	-	Back	17mm	Ant 4	-	DSI 4	39750	2506	1	22.83	24.00	1.309	62.9	1.006	0.01	0.423	0.557
	LTE Band 38C	20M	QPSK	1	99	-	Back	5mm	Ant 4	-	DSI 3	37850+38048	2580+2599.8	1	17.48	18.70	1.324	62.9	1.006	0.04	0.681	0.907
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3	507000	2535	1	16.75	17.90	1.303	-	-	0.03	0.570	0.743
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3	507000	2535	1	16.72	17.90	1.312	-	-	0.02	0.570	0.748
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	507000	2535	1	16.75	17.90	1.303	-	-	0.01	0.927	1.208
69	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	507000	2535	1	16.72	17.90	1.312	-	-	-0.15	0.977	1.282
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	507000	2535	1	16.68	17.90	1.324	-	-	-0.02	0.908	1.203
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	Headset	DSI 3	507000	2535	1	16.72	17.90	1.312	-	-	0.05	0.615	0.807
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	11mm	Ant 1	-	DSI 4	507000	2535	1	23.27	24.00	1.183	-	-	0.03	0.611	0.723
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	17mm	Ant 1	-	DSI 4	507000	2535	1	23.27	24.00	1.183	-	-	0.02	0.455	0.538
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	507000	2535	1	13.65	14.70	1.274	-	-	0.09	0.207	0.264
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 4	-	DSI 3	507000	2535	1	13.60	14.70	1.288	-	-	0.01	0.212	0.273
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	507000	2535	1	13.65	14.70	1.274	-	-	0.01	0.724	0.922
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	507000	2535	1	13.60	14.70	1.288	-	-	0.04	0.709	0.913
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 4	-	DSI 3	507000	2535	1	13.57	14.70	1.297	-	-	0.07	0.674	0.874
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	11mm	Ant 4	-	DSI 4	507000	2535	1	23.03	24.00	1.250	-	-	0.03	0.432	0.540
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	17mm	Ant 4	-	DSI 4	507000	2535	1	23.09	24.00	1.233	-	-	0.01	0.563	0.694
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 4	-	DSI 3	518598	2592.99	1	15.00	16.10	1.288	-	-	0.08	0.188	0.242
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 4	-	DSI 3	518598	2592.99	1	14.95	16.10	1.303	-	-	0.16	0.181	0.236
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI 3	518598	2592.99	1	15.00	16.10	1.288	-	-	0.03	0.701	0.903
70	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI 3	518598	2592.99	1	14.95	16.10	1.303	-	-	-0.06	0.728	0.949
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI 3	518598	2592.99	2	14.95	16.10	1.303	-	-	0.03	0.643	0.838
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI 3	518598	2592.99	3	14.95	16.10	1.303	-	-	0.01	0.695	0.906
	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI 3	518598	2592.99	1	14.91	16.10	1.315	-	-	0.03	0.680	0.894
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	11mm	Ant 4	-	DSI 4	518598	2592.99	1	22.90	24.00	1.288	-	-	-0.01	0.543	0.700
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	17mm	Ant 4	-	DSI 4	518598	2592.99	1	22.89	24.00	1.291	-	-	0.05	0.577	0.745
3500MHz																						
	LTE Band 42	20M	QPSK	1	0	-	Front	5mm	Ant 5	-	DSI 3	42590	3500	1	18.77	19.50	1.183	62.9	1.006	0.08	0.440	0.524
	LTE Band 42	20M	QPSK	50	0	-	Front	5mm	Ant 5	-	DSI 3	42590	3500	1	18.71	19.50	1.199	62.9	1.006	0.03	0.273	0.329
	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	-	DSI 3	42590	3500	1	18.77	19.50	1.183	62.9	1.006	0.05	0.712	0.847
	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	-	DSI 3	42190	3460	1	18.72	19.50	1.197	62.9	1.006	-0.01	0.726	0.874
71	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	-	DSI 3	42990	3540	1	18.74	19.50	1.191	62.9	1.006	0.01	0.775	0.929
	LTE Band 42	20M	QPSK	50	0	-	Back	5mm	Ant 5	-	DSI 3	42590	3500	1	18.71	19.50	1.199	62.9	1.006	0.06	0.754	0.910
	LTE Band 42	20M	QPSK	50	0	-	Back	5mm	Ant 5	-	DSI 3	42190	3460	1	18.63	19.50	1.222	62.9	1.006	0.02	0.704	0.865
	LTE Band 42	20M	QPSK	50	0	-	Back	5mm	Ant 5	-	DSI 3	42990	3540	1	18.70	19.50	1.202	62.9	1.006	0.03	0.700	0.847
	LTE Band 42	20M	QPSK	100	0	-	Back	5mm	Ant 5	-	DSI 3	42590	3500	1	18.69	19.50	1.205	62.9	1.006	0.04	0.714	0.866
	LTE Band 42	20M	QPSK	1	0	-	Front	11mm	Ant 5	-	DSI 4	42590	3500	1	22.86	24.00	1.300	62.9	1.006	0.06	0.461	0.603
	LTE Band 42	20M	QPSK	1	0	-	Back	17mm	Ant 5	-	DSI 4	42990	3540	1	22.84	24.00	1.306	62.9	1.006	0.01	0.334	0.439
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 5	-	DSI 3	633332	3499.98	1	17.20	18.40	1.318	-	-	0.03	0.380	0.501
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 5	-	DSI 3	633332	3499.98	1	17.15	18.40	1.334	-	-	0.01	0.419	0.559
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 5	-	DSI 3	633332	3499.98	1	17.20	18.40	1.318	-	-	0.01	0.642	0.846
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 5	-	DSI 3	633332	3499.98	1	17.15	18.40	1.334	-	-	0.03	0.693	0.924
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 5	-	DSI 3	633332	3499.98	1	17.10	18.40	1.349	-	-	-0.01	0.612	0.826
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	11mm	Ant 5	-	DSI 4	633332	3499.98	1	23.06	24.00	1.242	-	-	0.05	0.385	0.478
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	17mm	Ant 5	-	DSI 4	633332	3499.98	1	23.06	24.00	1.242	-	-	0.02	0.365	0.453
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 1	-	DSI 3	633332	3499.98	1	19.19	20.50	1.352	-	-	0.02	0.478	0.646
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 1	-	DSI 3	633332	3499.98	1	19.17	20.50	1.358	-	-	0.01	0.416	0.565



FCC SAR Test Report

Report No. : FA392114

72	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 1	-	DSI 3	633332	3499.98	1	19.19	20.50	1.352	-	-	-0.07	0.787	1.064
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 1	-	DSI 3	633332	3499.98	1	19.17	20.50	1.358	-	-	0.02	0.734	0.997
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 1	-	DSI 3	633332	3499.98	1	18.12	19.50	1.374	-	-	0.08	0.701	0.963
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3	633332	3499.98	1	18.25	19.60	1.365	-	-	0.01	0.303	0.413
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3	633332	3499.98	1	18.19	19.60	1.384	-	-	0.04	0.277	0.383
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633332	3499.98	1	18.25	19.60	1.365	-	-	0.03	0.680	0.928
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633332	3499.98	2	18.25	19.60	1.365	-	-	0.03	0.628	0.857
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633332	3499.98	3	18.25	19.60	1.365	-	-	0.01	0.669	0.913
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633332	3499.98	1	18.19	19.60	1.384	-	-	0.02	0.636	0.880
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633332	3499.98	1	18.13	19.60	1.403	-	-	0.09	0.613	0.860
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	11mm	Ant 2	-	DSI 4	633332	3499.98	1	21.51	22.50	1.256	-	-	0.02	0.265	0.333
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	17mm	Ant 2	-	DSI 4	633332	3499.98	1	21.51	22.50	1.256	-	-	0.04	0.452	0.568
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 8	-	DSI 3	633332	3499.98	1	18.10	19.50	1.380	-	-	0.02	0.511	0.705
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	-	DSI 3	633332	3499.98	1	18.08	19.50	1.387	-	-	0.01	0.565	0.784
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI 3	633332	3499.98	1	18.10	19.50	1.380	-	-	-0.16	0.687	0.948
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI 3	633332	3499.98	2	18.10	19.50	1.380	-	-	0.05	0.641	0.885
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI 3	633332	3499.98	3	18.10	19.50	1.380	-	-	0.04	0.677	0.935
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI 3	633332	3499.98	1	18.08	19.50	1.387	-	-	0.03	0.651	0.903
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI 3	633332	3499.98	1	17.14	18.50	1.368	-	-	0.09	0.629	0.860

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN/BT																		
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 6	-	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.02	0.571	0.765
73	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	-	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.08	1.040	1.393
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	-	Standalone	1	2412	2	18.79	20.00	1.321	98.6	1.014	0.01	0.787	1.054
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	-	Standalone	1	2412	3	18.79	20.00	1.321	98.6	1.014	0.05	0.842	1.128
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	-	Standalone	6	2437	1	18.51	20.00	1.409	98.6	1.014	0.02	0.930	1.329
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	-	Standalone	11	2462	1	18.39	20.00	1.449	98.6	1.014	0.08	0.855	1.256
	WLAN2.4GHz	802.11g 6Mbps	Back	5mm	Ant 6	-	Standalone	6	2437	1	18.39	20.00	1.449	98.25	1.018	0.01	0.795	1.173
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	Headset	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.06	0.950	1.273
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 6	-	Simultaneous	1	2412	1	12.90	14.00	1.288	98.6	1.014	0.02	0.128	0.167
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	-	Simultaneous	1	2412	1	12.90	14.00	1.288	98.6	1.014	0.01	0.289	0.378
	WLAN2.4GHz	802.11b 1Mbps	Front	11mm	Ant 6	-	Full power	1	2412	1	19.35	20.50	1.303	98.6	1.014	0.03	0.168	0.222
	WLAN2.4GHz	802.11b 1Mbps	Back	17mm	Ant 6	-	Full power	1	2412	1	19.35	20.50	1.303	98.6	1.014	-0.05	0.112	0.148
	Bluetooth	1Mbps	Front	5mm	Ant 6	-	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.01	0.128	0.180
74	Bluetooth	1Mbps	Back	5mm	Ant 6	-	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	-0.07	0.277	0.390
	Bluetooth	1Mbps	Front	5mm	Ant 6	-	Simultaneous	39	2441	1	12.21	13.50	1.346	76.99	1.082	0.02	0.047	0.068
	Bluetooth	1Mbps	Back	5mm	Ant 6	-	Simultaneous	39	2441	1	12.21	13.50	1.346	76.99	1.082	-0.08	0.101	0.147
	Bluetooth	1Mbps	Front	11mm	Ant 6	-	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.09	0.049	0.069
	Bluetooth	1Mbps	Back	17mm	Ant 6	-	Full power	39	2441	1	16.86	18.00	1.300	76.99	1.082	0.01	0.041	0.058
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	5mm	Ant 6	-	Standalone	62	5310	1	14.40	16.00	1.445	96.24	1.039	0.01	0.259	0.389
75	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	Ant 6	-	Standalone	62	5310	1	14.40	16.00	1.445	96.24	1.039	0.07	0.769	1.155
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	Ant 6	-	Standalone	62	5310	2	14.40	16.00	1.445	96.24	1.039	0.03	0.682	1.024
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	Ant 6	-	Standalone	62	5310	3	14.40	16.00	1.445	96.24	1.039	0.04	0.660	0.991
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	Ant 6	-	Standalone	54	5270	1	14.31	16.00	1.476	96.24	1.039	0.02	0.742	1.138
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 6	-	Simultaneous	58	5290	1	10.18	11.00	1.208	92.92	1.076	0.03	0.130	0.169
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Simultaneous	58	5290	1	10.18	11.00	1.208	92.92	1.076	-0.02	0.286	0.372
	WLAN5.3GHz	802.11a 6Mbps	Front	11mm	Ant 6	-	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.01	0.254	0.353
	WLAN5.3GHz	802.11a 6Mbps	Back	17mm	Ant 6	-	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.06	0.441	0.613
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 6	-	Standalone	138	5690	1	13.63	15.00	1.371	92.92	1.076	0.03	0.250	0.369
76	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Standalone	138	5690	1	13.63	15.00	1.371	92.92	1.076	0.01	0.784	1.156
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Standalone	138	5690	2	13.63	15.00	1.371	92.92	1.076	0.06	0.690	1.018
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Standalone	138	5690	3	13.63	15.00	1.371	92.92	1.076	0.02	0.743	1.096
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Standalone	122	5610	1	13.30	15.00	1.479	92.92	1.076	0.03	0.687	1.093



FCC SAR Test Report

Report No. : FA392114

	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 6	-	Simultaneous	106	5530	1	9.00	10.00	1.259	92.92	1.076	0.02	0.204	0.276
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Simultaneous	106	5530	1	9.00	10.00	1.259	92.92	1.076	-0.03	0.260	0.352
	WLAN5.5GHz	802.11a 6Mbps	Front	11mm	Ant 6	-	Full power	100	5500	1	18.66	20.00	1.361	98.25	1.018	0.04	0.333	0.462
	WLAN5.5GHz	802.11a 6Mbps	Back	17mm	Ant 6	-	Full power	100	5500	1	18.66	20.00	1.361	98.25	1.018	0.05	0.439	0.608
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 6	-	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	0.03	0.291	0.421
77	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	0.05	0.814	1.179
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Standalone	155	5775	2	13.21	14.50	1.346	92.92	1.076	0.03	0.771	1.117
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Standalone	155	5775	3	13.21	14.50	1.346	92.92	1.076	0.04	0.790	1.144
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 6	-	Simultaneous	155	5775	1	9.39	10.50	1.291	92.92	1.076	0.01	0.122	0.170
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	-	Simultaneous	155	5775	1	9.39	10.50	1.291	92.92	1.076	-0.02	0.269	0.374
	WLAN5.8GHz	802.11a 6Mbps	Front	11mm	Ant 6	-	Full power	157	5785	1	18.59	20.00	1.384	98.25	1.018	0.03	0.403	0.568
	WLAN5.8GHz	802.11a 6Mbps	Back	17mm	Ant 6	-	Full power	157	5785	1	18.59	20.00	1.384	98.25	1.018	0.04	0.451	0.635



16.4 Product specific 10g SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
835MHz																					
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Front	0mm	Ant 0	DSI 6	189	836.4	1	30.38	31.50	1.294	-	-	0.14	1.350	1.747
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 6	189	836.4	1	30.38	31.50	1.294	-	-	0.18	1.850	2.394
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 6	128	824.2	1	30.27	31.50	1.327	-	-	0.14	1.670	2.217
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	0mm	Ant 0	DSI 6	251	848.8	1	30.38	31.50	1.294	-	-	-0.17	1.720	2.226
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Side	0mm	Ant 0	DSI 6	189	836.4	1	30.38	31.50	1.294	-	-	0.17	1.130	1.462
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	189	836.4	1	30.38	31.50	1.294	-	-	0.1	2.300	2.977
78	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	128	824.2	1	30.27	31.50	1.327	-	-	0.04	2.410	3.199
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	128	824.2	2	30.27	31.50	1.327	-	-	0.03	1.960	2.602
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	128	824.2	3	30.27	31.50	1.327	-	-	0.02	2.100	2.788
	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	251	848.8	1	30.38	31.50	1.294	-	-	0.01	2.280	2.951
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	4182	836.4	1	23.16	24.00	1.213	-	-	0.06	1.160	1.408
79	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	4182	836.4	1	23.16	24.00	1.213	-	-	0.01	1.880	2.281
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	4132	826.4	1	23.12	24.00	1.225	-	-	0.06	1.750	2.143
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	4233	846.6	1	23.15	24.00	1.216	-	-	0.04	1.820	2.213
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	1413	1732.6	1	19.00	20.30	1.349	-	-	0.18	0.812	1.095
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	1413	1732.6	1	19.00	20.30	1.349	-	-	0.07	1.810	2.442
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	1312	1712.4	1	18.95	20.30	1.365	-	-	0.18	1.960	2.675
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	1513	1752.6	1	18.97	20.30	1.358	-	-	-0.1	1.930	2.622
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1413	1732.6	1	19.00	20.30	1.349	-	-	0.01	2.200	2.968
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1312	1712.4	1	18.95	20.30	1.365	-	-	-0.15	2.160	2.947
80	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	1513	1752.6	1	18.97	20.30	1.358	-	-	-0.01	2.320	3.151
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	9mm	Ant 0	DSI 4	1413	1732.6	1	23.25	24.00	1.189	-	-	0.02	0.642	0.763
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	18mm	Ant 0	DSI 4	1312	1712.4	1	23.19	24.00	1.205	-	-	0.03	0.547	0.659
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	21mm	Ant 0	DSI 4	1513	1752.6	1	23.22	24.00	1.197	-	-	0.04	0.472	0.565
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	1	19.00	20.10	1.288	-	-	-0.07	0.814	1.049
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	1	18.91	20.10	1.315	-	-	-0.12	0.741	0.975
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	1	19.00	20.10	1.288	-	-	-0.16	1.940	2.499
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132072	1720	1	18.92	20.10	1.312	-	-	-0.02	1.940	2.546
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132572	1770	1	18.96	20.10	1.300	-	-	0.15	1.880	2.444
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	1	18.91	20.10	1.315	-	-	-0.09	1.850	2.433
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132072	1720	1	18.81	20.10	1.346	-	-	0.11	1.880	2.530
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132572	1770	1	18.84	20.10	1.337	-	-	-0.05	1.810	2.419
	LTE Band 66	20M	QPSK	100	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	1	18.89	20.10	1.321	-	-	-0.08	1.850	2.444
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	1	19.00	20.10	1.288	-	-	0.16	2.330	3.002
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132072	1720	1	18.92	20.10	1.312	-	-	0.05	2.280	2.992
81	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	1	18.96	20.10	1.300	-	-	0.04	2.420	3.146
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	1	18.91	20.10	1.315	-	-	-0.03	2.320	3.051
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132072	1720	1	18.81	20.10	1.346	-	-	-0.15	2.270	3.055
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	1	18.84	20.10	1.337	-	-	0.02	2.250	3.007
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	1	18.89	20.10	1.321	-	-	0.07	2.200	2.907
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	1	18.96	20.10	1.300	-	-	-0.08	1.220	1.586
	LTE Band 66C	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572+132374	1770+1750.2	1	18.72	20.10	1.374	-	-	0.06	2.130	2.927
	LTE Band 66	20M	QPSK	1	0	-	Front	9mm	Ant 0	DSI 4	132322	1745	1	22.91	24.00	1.285	-	-	0.02	0.477	0.613
	LTE Band 66	20M	QPSK	1	0	-	Back	18mm	Ant 0	DSI 4	132072	1720	1	22.87	24.00	1.297	-	-	0.03	0.400	0.519
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	21mm	Ant 0	DSI 4	132572	1770	1	22.85	24.00	1.303	-	-	-0.01	0.352	0.459
	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	132322	1745	1	19.35	20.30	1.245	-	-	0.02	1.860	2.315
	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	132072	1720	1	19.28	20.30	1.265	-	-	-0.13	1.890	2.390
	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	132572	1770	1	19.30	20.30	1.259	-	-	0.08	1.970	2.480
	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	132572	1770	2	19.30	20.30	1.259	-	-	-0.17	1.750	2.203



FCC SAR Test Report

Report No. : FA392114

	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	132572	1770	3	19.30	20.30	1.259	-	-	0.02	1.680	2.115
	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	132322	1745	1	19.29	20.30	1.262	-	-	0.06	1.880	2.372
	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	132072	1720	1	19.24	20.30	1.276	-	-	0.01	1.860	2.374
	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	132572	1770	1	19.22	20.30	1.282	-	-	-0.04	1.930	2.475
	LTE Band 66	20M	QPSK	100	0	-	Top Side	0mm	Ant 4	DSI 6	132322	1745	1	19.23	20.30	1.279	-	-	-0.15	1.900	2.431
	LTE Band 66 Other PA	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	132572	1770	1	19.23	20.30	1.279	-	-	0.01	1.810	2.316
	LTE Band 66	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 4	132572	1770	1	21.59	22.50	1.233	-	-	0.01	0.169	0.208
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	349000	1745	1	20.67	22.10	1.390	-	-	0.18	0.864	1.201
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	349000	1745	1	20.64	22.10	1.400	-	-	0.14	0.802	1.122
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	349000	1745	1	20.67	22.10	1.390	-	-	0.17	2.070	2.877
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	349000	1745	1	20.64	22.10	1.400	-	-	-0.05	1.900	2.659
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	349000	1745	1	20.61	22.10	1.409	-	-	0.01	1.880	2.649
82	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	1	20.67	22.10	1.390	-	-	-0.13	2.280	3.169
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	2	20.67	22.10	1.390	-	-	-0.01	2.200	3.058
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	3	20.67	22.10	1.390	-	-	-0.06	2.180	3.030
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	1	20.64	22.10	1.400	-	-	0.1	2.150	3.009
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	1	20.61	22.10	1.409	-	-	-0.17	2.180	3.072
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	9mm	Ant 0	DSI 4	349000	1745	1	23.62	24.00	1.091	-	-	0.02	0.358	0.391
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	18mm	Ant 0	DSI 4	349000	1745	1	23.62	24.00	1.091	-	-	0.03	0.290	0.317
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	21mm	Ant 0	DSI 4	349000	1745	1	23.62	24.00	1.091	-	-	0.04	0.245	0.267
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	349000	1745	1	19.66	21.00	1.361	-	-	0.09	0.449	0.611
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	349000	1745	1	19.63	21.00	1.371	-	-	-0.01	0.646	0.886
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	349000	1745	1	19.66	21.00	1.361	-	-	-0.08	1.710	2.328
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	349000	1745	1	19.63	21.00	1.371	-	-	0.01	1.800	2.468
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	349000	1745	1	19.59	21.00	1.384	-	-	0.05	1.740	2.407
	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	349000	1745	1	19.63	21.00	1.371	-	-	0.02	1.770	2.426
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	12mm	Ant 4	DSI 4	349000	1745	1	21.86	23.00	1.300	-	-	0.02	0.204	0.265
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	15mm	Ant 4	DSI 4	349000	1745	1	21.86	23.00	1.300	-	-	0.01	0.159	0.207
1900MHz																					
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	0mm	Ant 0	DSI 6	661	1880	1	21.51	22.50	1.256	-	-	-0.06	0.674	0.847
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	0mm	Ant 0	DSI 6	661	1880	1	21.51	22.50	1.256	-	-	0.01	1.760	2.211
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	0mm	Ant 0	DSI 6	512	1850.2	1	21.38	22.50	1.294	-	-	0.06	1.800	2.330
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	0mm	Ant 0	DSI 6	810	1909.8	1	21.47	22.50	1.268	-	-	0.02	1.750	2.218
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	661	1880	1	21.51	22.50	1.256	-	-	-0.14	2.290	2.876
83	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	512	1850.2	1	21.38	22.50	1.294	-	-	-0.14	2.480	3.210
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	512	1850.2	2	21.38	22.50	1.294	-	-	0.01	2.040	2.640
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	512	1850.2	3	21.38	22.50	1.294	-	-	0.06	1.950	2.524
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	810	1909.8	1	21.47	22.50	1.268	-	-	0.12	2.360	2.992
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	9mm	Ant 0	DSI 4	661	1880	1	24.25	25.50	1.334	-	-	0.09	0.547	0.729
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	18mm	Ant 0	DSI 4	512	1850.2	1	24.13	25.50	1.371	-	-	-0.03	0.358	0.491
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	21mm	Ant 0	DSI 4	512	1850.2	1	24.13	25.50	1.371	-	-	0.06	0.430	0.589
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9400	1880	1	20.00	21.10	1.288	-	-	-0.01	1.700	2.190
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9262	1852.4	1	19.98	21.10	1.294	-	-	0.03	1.750	2.265
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9538	1907.6	1	19.95	21.10	1.303	-	-	-0.11	1.720	2.241
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9400	1880	1	20.00	21.10	1.288	-	-	-0.06	2.420	3.118
84	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9262	1852.4	1	19.98	21.10	1.294	-	-	0.01	2.480	3.210
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9538	1907.6	1	19.95	21.10	1.303	-	-	-0.15	2.330	3.036
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	18mm	Ant 0	DSI 4	9262	1852.4	1	23.12	24.00	1.225	-	-	0.01	0.247	0.302
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	21mm	Ant 0	DSI 4	9262	1852.4	1	23.12	24.00	1.225	-	-	0.06	0.270	0.331
	LTE Band 25	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	26340	1880	1	20.00	21.10	1.288	-	-	-0.01	1.510	1.945
	LTE Band 25	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	26340	1880	1	19.96	21.10	1.300	-	-	0.06	1.410	1.833
	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	26340	1880	1	20.00	21.10	1.288	-	-	0.12	2.360	3.040
85	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	26140	1860	1	19.95	21.10	1.303	-	-	0.04	2.460	3.206
	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	26590	1905	1	19.94	21.10	1.306	-	-	0.03	2.290	2.991
	LTE Band 25	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	26340	1880	1	19.96	21.10	1.300	-	-	0.18	2.180	2.834
	LTE Band 25	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	26140	1860	1	19.84	21.10	1.337	-	-	0.16	2.090	2.793



FCC SAR Test Report

Report No. : FA392114

	LTE Band 25	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	26590	1905	1	19.80	21.10	1.349	-	-	-0.1	2.210	2.981
	LTE Band 25	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	DSI 6	26340	1880	1	19.93	21.10	1.309	-	-	0.07	1.990	2.605
	LTE Band 2 Other PA	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	18700	1860	1	19.95	21.10	1.303	-	-	-0.05	2.300	2.997
	LTE Band 25	20M	QPSK	1	0	-	Back	18mm	Ant 0	DSI 4	26340	1880	1	22.85	24.00	1.303	-	-	0.01	0.232	0.302
	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	21mm	Ant 0	DSI 4	26140	1860	1	22.80	24.00	1.318	-	-	-0.05	2.060	2.716
	LTE Band 25	20M	QPSK	1	0	-	Front	0mm	Ant 4	DSI 6	26340	1880	1	18.35	19.50	1.303	-	-	0.06	1.110	1.447
	LTE Band 25	20M	QPSK	50	0	-	Front	0mm	Ant 4	DSI 6	26340	1880	1	18.29	19.50	1.321	-	-	0.08	1.010	1.335
	LTE Band 25	20M	QPSK	1	0	-	Back	0mm	Ant 4	DSI 6	26340	1880	1	18.35	19.50	1.303	-	-	-0.12	1.370	1.785
	LTE Band 25	20M	QPSK	50	0	-	Back	0mm	Ant 4	DSI 6	26340	1880	1	18.29	19.50	1.321	-	-	-0.02	1.260	1.665
	LTE Band 25	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	26340	1880	1	18.35	19.50	1.303	-	-	-0.05	1.750	2.281
	LTE Band 25	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	26140	1860	1	18.32	19.50	1.312	-	-	0.03	1.890	2.480
	LTE Band 25	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	26590	1905	1	18.29	19.50	1.321	-	-	-0.08	1.650	2.180
	LTE Band 25	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	26340	1880	1	18.29	19.50	1.321	-	-	0.16	1.720	2.273
	LTE Band 25	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	26140	1860	1	18.19	19.50	1.352	-	-	0.05	1.790	2.420
	LTE Band 25	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	26590	1905	1	18.22	19.50	1.343	-	-	0.05	1.680	2.256
	LTE Band 25	20M	QPSK	100	0	-	Top Side	0mm	Ant 4	DSI 6	26340	1880	1	18.22	19.50	1.343	-	-	-0.03	1.590	2.135
	LTE Band 25	20M	QPSK	1	0	-	Front	8mm	Ant 4	DSI 4	26340	1880	1	21.69	22.50	1.205	-	-	0.06	0.462	0.557
	LTE Band 25	20M	QPSK	1	0	-	Back	12mm	Ant 4	DSI 4	26340	1880	1	21.69	22.50	1.205	-	-	0.01	0.455	0.548
	LTE Band 25	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 4	26140	1860	1	21.65	22.50	1.216	-	-	-0.01	0.399	0.485
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	376000	1880	1	20.40	21.60	1.318	-	-	0.02	0.707	0.932
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	376000	1880	1	20.38	21.60	1.324	-	-	0.06	0.712	0.943
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	376000	1880	1	20.40	21.60	1.318	-	-	0.01	1.450	1.911
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	376000	1880	1	20.38	21.60	1.324	-	-	0.04	1.410	1.867
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	376000	1880	1	20.40	21.60	1.318	-	-	0.04	2.330	3.072
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	372000	1860	1	20.32	21.60	1.343	-	-	0.03	2.130	2.860
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	380000	1900	1	20.35	21.60	1.334	-	-	0.02	2.290	3.054
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	376000	1880	1	20.38	21.60	1.324	-	-	0.04	2.330	3.086
86	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	372000	1860	1	20.36	21.60	1.330	-	-	0.01	2.380	3.166
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	380000	1900	1	20.32	21.60	1.343	-	-	-0.01	2.230	2.994
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	376000	1880	1	20.30	21.60	1.349	-	-	0.03	1.990	2.684
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	9mm	Ant 0	DSI 4	376000	1880	1	23.51	24.00	1.119	-	-	0.06	0.266	0.298
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	18mm	Ant 0	DSI 4	372000	1860	1	23.54	24.00	1.112	-	-	0.01	0.186	0.207
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	21mm	Ant 0	DSI 4	372000	1860	1	23.33	24.00	1.167	-	-	0.03	0.217	0.253
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 4	DSI 6	376000	1880	1	18.60	19.60	1.259	-	-	0.05	1.040	1.309
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	0mm	Ant 4	DSI 6	376000	1880	1	18.55	19.60	1.274	-	-	0.05	0.982	1.251
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	376000	1880	1	18.60	19.60	1.259	-	-	0.01	1.810	2.279
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	372000	1860	1	18.52	19.60	1.282	-	-	0.05	1.630	2.090
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	380000	1900	1	18.54	19.60	1.276	-	-	-0.08	1.770	2.259
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	376000	1880	1	18.55	19.60	1.274	-	-	0.04	1.750	2.229
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	372000	1860	1	18.52	19.60	1.282	-	-	0.07	1.720	2.206
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	380000	1900	1	18.50	19.60	1.288	-	-	0.06	1.740	2.242
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	376000	1880	1	18.50	19.60	1.288	-	-	0.09	1.710	2.203
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	376000	1880	1	18.60	19.60	1.259	-	-	0.01	1.920	2.417
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	372000	1860	1	18.52	19.60	1.282	-	-	0.05	1.840	2.359
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	380000	1900	1	18.54	19.60	1.276	-	-	0.03	1.780	2.272
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	376000	1880	1	18.55	19.60	1.274	-	-	0.04	1.930	2.458
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	372000	1860	1	18.52	19.60	1.282	-	-	-0.03	1.940	2.488
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	372000	1860	2	18.52	19.60	1.282	-	-	0.09	1.730	2.218
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	372000	1860	3	18.52	19.60	1.282	-	-	0.01	1.910	2.449
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	380000	1900	1	18.50	19.60	1.288	-	-	0.02	1.860	2.396
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	376000	1880	1	18.50	19.60	1.288	-	-	0.04	1.730	2.229
	FR1 n2 Other PA	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	372000	1860	1	18.52	19.60	1.282	-	-	-0.05	1.910	2.449
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	8mm	Ant 4	DSI 4	376000	1880	1	21.87	23.00	1.297	-	-	0.03	0.367	0.476
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	12mm	Ant 4	DSI 4	376000	1880	1	21.87	23.00	1.297	-	-	0.01	0.443	0.575
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	15mm	Ant 4	DSI 4	372000	1860	1	21.62	23.00	1.374	-	-	0.06	0.354	0.486
2600MHz																					



FCC SAR Test Report

Report No. : FA392114

	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	21100	2535	1	20.30	21.40	1.288	-	-	0.08	2.430	3.130
87	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	20850	2510	1	20.28	21.40	1.294	-	-	-0.09	2.440	3.158
	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	21350	2560	1	20.25	21.40	1.303	-	-	0.16	2.330	3.036
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	21100	2535	1	20.19	21.40	1.321	-	-	0.01	2.310	3.052
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	20850	2510	1	20.24	21.40	1.306	-	-	-0.16	2.290	2.991
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	21350	2560	1	20.10	21.40	1.349	-	-	0.1	2.170	2.927
	LTE Band 7	20M	QPSK	100	0	-	Back	0mm	Ant 1	DSI 6	21100	2535	1	20.19	21.40	1.321	-	-	-0.04	2.090	2.762
	LTE Band 7	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	21100	2535	1	20.30	21.40	1.288	-	-	0.06	1.550	1.997
	LTE Band 7	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	21100	2535	1	20.19	21.40	1.321	-	-	0.1	1.480	1.956
	LTE Band 7C	20M	QPSK	1	99	-	Back	0mm	Ant 1	DSI 6	20850+21048	2510+2529.8	1	19.85	21.40	1.429	-	-	0.06	2.010	2.872
	LTE Band 7	20M	QPSK	1	0	-	Back	13mm	Ant 1	DSI 4	20850	2510	1	23.08	24.00	1.236	-	-	0.01	0.396	0.489
	LTE Band 7	20M	QPSK	1	0	-	Left Side	7mm	Ant 1	DSI 4	21100	2535	1	23.13	24.00	1.222	-	-	0.09	0.615	0.751
	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 4	DSI 6	21100	2535	1	19.40	20.20	1.202	-	-	0.06	1.490	1.791
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 4	DSI 6	21100	2535	1	19.35	20.20	1.216	-	-	0.04	1.300	1.581
	LTE Band 7	20M	QPSK	1	0	-	Left Side	0mm	Ant 4	DSI 6	21100	2535	1	19.40	20.20	1.202	-	-	-0.08	1.040	1.250
	LTE Band 7	20M	QPSK	50	0	-	Left Side	0mm	Ant 4	DSI 6	21100	2535	1	19.35	20.20	1.216	-	-	0.06	0.857	1.042
	LTE Band 7	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	21100	2535	1	19.40	20.20	1.202	-	-	0.01	1.760	2.116
	LTE Band 7	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	20850	2510	1	19.35	20.20	1.216	-	-	0.04	2.010	2.445
	LTE Band 7	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	21350	2560	1	19.33	20.20	1.222	-	-	0.03	1.760	2.150
	LTE Band 7	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	21100	2535	1	19.35	20.20	1.216	-	-	0.06	1.740	2.116
	LTE Band 7	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	20850	2510	1	19.27	20.20	1.239	-	-	-0.02	1.820	2.255
	LTE Band 7	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	21350	2560	1	19.22	20.20	1.253	-	-	0.01	1.770	2.218
	LTE Band 7	20M	QPSK	100	0	-	Top Side	0mm	Ant 4	DSI 6	21100	2535	1	19.28	20.20	1.236	-	-	0.05	1.650	2.039
	LTE Band 7	20M	QPSK	1	0	-	Back	12mm	Ant 4	DSI 4	21100	2535	1	23.54	24.00	1.112	-	-	0.01	0.628	0.698
	LTE Band 7	20M	QPSK	1	0	-	Left Side	6mm	Ant 4	DSI 4	21100	2535	1	23.54	24.00	1.112	-	-	0.06	0.814	0.905
	LTE Band 7	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 4	20850	2510	1	23.49	24.00	1.125	-	-	0.04	0.442	0.497
	LTE Band 41	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	40620	2593	1	21.45	22.60	1.303	62.9	1.006	0.03	1.130	1.481
	LTE Band 41	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	40620	2593	1	21.40	22.60	1.318	62.9	1.006	0.02	1.020	1.353
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	40620	2593	1	21.45	22.60	1.303	62.9	1.006	0.01	2.080	2.727
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	39750	2506	1	21.38	22.60	1.324	62.9	1.006	0.02	2.150	2.864
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	40185	2549.5	1	21.41	22.60	1.315	62.9	1.006	0.03	2.140	2.831
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	41055	2636.5	1	21.40	22.60	1.318	62.9	1.006	-0.01	2.400	3.183
88	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	41490	2680	1	21.42	22.60	1.312	62.9	1.006	-0.02	2.420	3.195
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	41490	2680	2	21.42	22.60	1.312	62.9	1.006	0.01	2.260	2.983
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	41490	2680	3	21.42	22.60	1.312	62.9	1.006	0.06	2.070	2.733
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	40620	2593	1	21.40	22.60	1.318	62.9	1.006	0.02	1.780	2.361
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	39750	2506	1	21.31	22.60	1.346	62.9	1.006	0.04	1.630	2.207
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	40185	2549.5	1	21.33	22.60	1.340	62.9	1.006	0.01	1.650	2.224
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	41055	2636.5	1	21.32	22.60	1.343	62.9	1.006	0.06	1.660	2.242
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	41490	2680	1	21.38	22.60	1.324	62.9	1.006	-0.02	1.660	2.212
	LTE Band 41	20M	QPSK	100	0	-	Back	0mm	Ant 1	DSI 6	40620	2593	1	21.39	22.60	1.321	62.9	1.006	0.03	1.500	1.994
	LTE Band 41	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	40620	2593	1	21.45	22.60	1.303	62.9	1.006	-0.04	1.600	2.098
	LTE Band 41	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	39750	2506	1	21.38	22.60	1.324	62.9	1.006	0.01	1.640	2.185
	LTE Band 41	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	40185	2549.5	1	21.41	22.60	1.315	62.9	1.006	0.02	1.670	2.210
	LTE Band 41	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	41055	2636.5	1	21.40	22.60	1.318	62.9	1.006	0.03	1.560	2.069
	LTE Band 41	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	41490	2680	1	21.42	22.60	1.312	62.9	1.006	-0.02	1.710	2.257
	LTE Band 41	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	40620	2593	1	21.40	22.60	1.318	62.9	1.006	0.06	1.650	2.188
	LTE Band 41	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	39750	2506	1	21.31	22.60	1.346	62.9	1.006	0.01	1.530	2.072
	LTE Band 41	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	40185	2549.5	1	21.33	22.60	1.340	62.9	1.006	0.02	1.510	2.035
	LTE Band 41	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	41055	2636.5	1	21.32	22.60	1.343	62.9	1.006	0.04	1.480	1.999
	LTE Band 41	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	41490	2680	1	21.38	22.60	1.324	62.9	1.006	0.01	1.350	1.799
	LTE Band 41	20M	QPSK	100	0	-	Left Side	0mm	Ant 1	DSI 6	40620	2593	1	21.39	22.60	1.321	62.9	1.006	0.01	1.360	1.808
	LTE Band 41	20M	QPSK	1	0	-	Front	6mm	Ant 1	DSI 4	40620	2593	1	22.93	24.00	1.279	62.9	1.006	0.03	0.765	0.985
	LTE Band 41	20M	QPSK	1	0	-	Back	13mm	Ant 1	DSI 4	41490	2680	1	22.79	24.00	1.321	62.9	1.006	0.03	0.368	0.489
	LTE Band 41	20M	QPSK	1	0	-	Left Side	7mm	Ant 1	DSI 4	41490	2680	1	22.79	24.00	1.321	62.9	1.006	0.03	0.666	0.885
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 4	DSI 6	40620	2593	1	21.25	22.30	1.274	62.9	1.006	-0.01	1.490	1.909



FCC SAR Test Report

Report No. : FA392114

	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 4	DSI 6	39750	2506	1	21.22	22.30	1.282	62.9	1.006	-0.14	1.660	2.141
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 4	DSI 6	40185	2549.5	1	21.19	22.30	1.291	62.9	1.006	-0.15	1.590	2.065
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 4	DSI 6	41055	2636.5	1	21.20	22.30	1.288	62.9	1.006	-0.12	1.460	1.892
	LTE Band 41	20M	QPSK	1	0	-	Back	0mm	Ant 4	DSI 6	41490	2680	1	21.18	22.30	1.294	62.9	1.006	-0.17	1.320	1.719
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 4	DSI 6	40620	2593	1	21.19	22.30	1.291	62.9	1.006	0.08	1.340	1.741
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 4	DSI 6	39750	2506	1	21.17	22.30	1.297	62.9	1.006	0.01	1.570	2.049
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 4	DSI 6	40185	2549.5	1	21.09	22.30	1.321	62.9	1.006	0.02	1.330	1.768
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 4	DSI 6	41055	2636.5	1	21.11	22.30	1.315	62.9	1.006	-0.11	1.240	1.641
	LTE Band 41	20M	QPSK	50	0	-	Back	0mm	Ant 4	DSI 6	41490	2680	1	21.13	22.30	1.309	62.9	1.006	-0.01	1.310	1.725
	LTE Band 41	20M	QPSK	100	0	-	Back	0mm	Ant 4	DSI 6	40620	2593	1	21.17	22.30	1.297	62.9	1.006	0.09	1.250	1.631
	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	40620	2593	1	21.25	22.30	1.274	62.9	1.006	-0.18	1.730	2.216
	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	39750	2506	1	21.22	22.30	1.282	62.9	1.006	0.14	1.920	2.477
	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	39750	2506	2	21.22	22.30	1.282	62.9	1.006	-0.01	1.540	1.987
	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	39750	2506	3	21.22	22.30	1.282	62.9	1.006	0.09	1.880	2.425
	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	40185	2549.5	1	21.19	22.30	1.291	62.9	1.006	-0.03	1.570	2.039
	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	41055	2636.5	1	21.20	22.30	1.288	62.9	1.006	-0.04	1.610	2.087
	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 4	DSI 6	41490	2680	1	21.18	22.30	1.294	62.9	1.006	-0.09	1.510	1.966
	LTE Band 41	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	40620	2593	1	21.19	22.30	1.291	62.9	1.006	0.18	1.550	2.013
	LTE Band 41	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	39750	2506	1	21.17	22.30	1.297	62.9	1.006	0.11	1.410	1.840
	LTE Band 41	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	40185	2549.5	1	21.09	22.30	1.321	62.9	1.006	0.07	1.390	1.848
	LTE Band 41	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	41055	2636.5	1	21.11	22.30	1.315	62.9	1.006	-0.03	1.440	1.905
	LTE Band 41	20M	QPSK	50	0	-	Top Side	0mm	Ant 4	DSI 6	41490	2680	1	21.13	22.30	1.309	62.9	1.006	0.09	1.310	1.725
	LTE Band 41	20M	QPSK	100	0	-	Top Side	0mm	Ant 4	DSI 6	40620	2593	1	21.17	22.30	1.297	62.9	1.006	-0.08	1.390	1.814
	LTE Band 38C	20M	QPSK	1	99	-	Top Side	0mm	Ant 4	DSI 6	37850+38048	2580+2599.8	1	21.06	22.30	1.330	62.9	1.006	0.06	1.810	2.423
	LTE Band 41	20M	QPSK	1	0	-	Back	12mm	Ant 4	DSI 4	39750	2506	1	22.83	24.00	1.309	62.9	1.006	0.01	0.417	0.549
	LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 4	39750	2506	1	22.83	24.00	1.309	62.9	1.006	0.09	0.279	0.367
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 1	DSI 6	507000	2535	1	19.71	21.00	1.346	-	-	0.06	1.360	1.830
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 1	DSI 6	507000	2535	1	19.67	21.00	1.358	-	-	0.02	1.280	1.739
89	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 1	DSI 6	507000	2535	1	19.71	21.00	1.346	-	-	-0.04	2.360	3.176
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	0mm	Ant 1	DSI 6	507000	2535	1	19.67	21.00	1.358	-	-	0.01	2.260	3.070
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Back	0mm	Ant 1	DSI 6	507000	2535	1	19.64	21.00	1.368	-	-	0.02	2.110	2.886
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	0mm	Ant 1	DSI 6	507000	2535	1	19.71	21.00	1.346	-	-	0.06	1.640	2.207
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	0mm	Ant 1	DSI 6	507000	2535	1	19.67	21.00	1.358	-	-	0.03	1.570	2.133
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Left Side	0mm	Ant 1	DSI 6	507000	2535	1	19.64	21.00	1.368	-	-	0.04	1.490	2.038
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 1	DSI 6	507000	2535	1	19.71	21.00	1.346	-	-	-0.02	1.260	1.696
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	0mm	Ant 1	DSI 6	507000	2535	1	19.67	21.00	1.358	-	-	0.06	1.220	1.657
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Front	6mm	Ant 1	DSI 4	507000	2535	1	23.38	24.00	1.153	-	-	0.02	0.738	0.851
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	13mm	Ant 1	DSI 4	507000	2535	1	23.38	24.00	1.153	-	-	0.01	0.352	0.406
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	7mm	Ant 1	DSI 4	507000	2535	1	23.38	24.00	1.153	-	-	0.03	0.587	0.677
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	12mm	Ant 1	DSI 4	507000	2535	1	23.38	24.00	1.153	-	-	0.06	0.264	0.305
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 4	DSI 6	507000	2535	1	18.55	19.90	1.365	-	-	0.02	0.807	1.101
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 4	DSI 6	507000	2535	1	18.50	19.90	1.380	-	-	0.03	0.845	1.166
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	507000	2535	1	18.55	19.90	1.365	-	-	0.07	1.570	2.142
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	507000	2535	1	18.50	19.90	1.380	-	-	0.06	1.510	2.084
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Back	0mm	Ant 4	DSI 6	507000	2535	1	18.47	19.90	1.390	-	-	0.09	1.440	2.002
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	0mm	Ant 4	DSI 6	507000	2535	1	18.55	19.90	1.365	-	-	0.03	1.020	1.392
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	0mm	Ant 4	DSI 6	507000	2535	1	18.50	19.90	1.380	-	-	0.02	1.080	1.491
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	507000	2535	1	18.55	19.90	1.365	-	-	0.02	1.790	2.443
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	507000	2535	1	18.50	19.90	1.380	-	-	0.06	1.730	2.388
	FR1 n7	40M	QPSK	216	0	DFT-SCS-15KHz	Top Side	0mm	Ant 4	DSI 6	507000	2535	1	18.47	19.90	1.390	-	-	0.02	1.660	2.307
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Front	8mm	Ant 4	DSI 4	507000	2535	1	23.03	24.00	1.250	-	-	0.06	0.365	0.456
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Back	12mm	Ant 4	DSI 4	507000	2535	1	23.09	24.00	1.233	-	-	0.01	0.526	0.649
	FR1 n7	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	6mm	Ant 4	DSI 4	507000	2535	1	23.03	24.00	1.250	-	-	0.02	0.635	0.794
	FR1 n7	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	15mm	Ant 4	DSI 4	507000	2535	1	23.09	24.00	1.233	-	-	0.03	0.395	0.487
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	0mm	Ant 4	DSI 6	518598	2592.99	1	18.95	20.10	1.303	-	-	0.06	0.929	1.211
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	0mm	Ant 4	DSI 6	518598	2592.99	1	18.90	20.10	1.318	-	-	0.01	0.911	1.201



FCC SAR Test Report

Report No. : FA392114

	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 4	DSI 6	518598	2592.99	1	18.95	20.10	1.303	-	-	-0.02	1.790	2.333
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 4	DSI 6	518598	2592.99	1	18.90	20.10	1.318	-	-	0.03	1.740	2.294
	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DSI 6	518598	2592.99	1	18.89	20.10	1.321	-	-	0.04	1.450	1.916
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	0mm	Ant 4	DSI 6	518598	2592.99	1	18.95	20.10	1.303	-	-	0.06	1.220	1.590
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	0mm	Ant 4	DSI 6	518598	2592.99	1	18.90	20.10	1.318	-	-	0.09	1.140	1.503
90	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSI 6	518598	2592.99	1	18.95	20.10	1.303	-	-	0.09	1.900	2.476
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSI 6	518598	2592.99	1	18.90	20.10	1.318	-	-	0.01	1.710	2.254
	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSI 6	518598	2592.99	1	18.89	20.10	1.321	-	-	0.03	1.610	2.127
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	8mm	Ant 4	DSI 4	518598	2592.99	1	22.90	24.00	1.288	-	-	0.02	0.454	0.585
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	12mm	Ant 4	DSI 4	518598	2592.99	1	22.90	24.00	1.288	-	-	0.01	0.638	0.822
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	6mm	Ant 4	DSI 4	518598	2592.99	1	22.90	24.00	1.288	-	-	0.03	0.823	1.060
	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	15mm	Ant 4	DSI 4	518598	2592.99	1	22.90	24.00	1.288	-	-	0.05	0.406	0.523
3500MHz																					
	LTE Band 42	20M	QPSK	1	0	-	Back	0mm	Ant 5	DSI 6	42590	3500	1	21.78	22.70	1.236	62.9	1.006	0.15	1.020	1.268
	LTE Band 42	20M	QPSK	50	0	-	Back	0mm	Ant 5	DSI 6	42590	3500	1	21.42	22.70	1.343	62.9	1.006	-0.14	0.651	0.879
	LTE Band 42	20M	QPSK	1	0	-	Top Side	0mm	Ant 5	DSI 6	42590	3500	1	21.78	22.70	1.236	62.9	1.006	0.11	1.900	2.362
	LTE Band 42	20M	QPSK	1	0	-	Top Side	0mm	Ant 5	DSI 6	42190	3460	1	21.70	22.70	1.259	62.9	1.006	0.07	1.740	2.204
91	LTE Band 42	20M	QPSK	1	0	-	Top Side	0mm	Ant 5	DSI 6	42990	3540	1	21.74	22.70	1.247	62.9	1.006	-0.09	1.980	2.485
	LTE Band 42	20M	QPSK	1	0	-	Top Side	0mm	Ant 5	DSI 6	42990	3540	2	21.74	22.70	1.247	62.9	1.006	0.07	1.860	2.334
	LTE Band 42	20M	QPSK	1	0	-	Top Side	0mm	Ant 5	DSI 6	42990	3540	3	21.74	22.70	1.247	62.9	1.006	-0.17	1.730	2.171
	LTE Band 42	20M	QPSK	50	0	-	Top Side	0mm	Ant 5	DSI 6	42590	3500	1	21.42	22.70	1.343	62.9	1.006	-0.04	1.770	2.391
	LTE Band 42	20M	QPSK	50	0	-	Top Side	0mm	Ant 5	DSI 6	42190	3460	1	21.30	22.70	1.380	62.9	1.006	-0.18	1.710	2.375
	LTE Band 42	20M	QPSK	50	0	-	Top Side	0mm	Ant 5	DSI 6	42990	3540	1	21.40	22.70	1.349	62.9	1.006	-0.13	1.730	2.348
	LTE Band 42	20M	QPSK	100	0	-	Top Side	0mm	Ant 5	DSI 6	42590	3500	1	21.30	22.70	1.380	62.9	1.006	-0.13	1.610	2.236
	LTE Band 42	20M	QPSK	1	0	-	Back	9mm	Ant 5	DSI 4	42590	3500	1	22.86	24.00	1.300	62.9	1.006	0.01	0.422	0.552
	LTE Band 42	20M	QPSK	1	0	-	Top Side	10mm	Ant 5	DSI 4	42990	3540	1	22.84	24.00	1.306	62.9	1.006	0.05	0.413	0.543
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	0mm	Ant 5	DSI 6	633332	3499.98	1	19.70	20.80	1.288	-	-	0.02	1.190	1.533
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	0mm	Ant 5	DSI 6	633332	3499.98	1	19.65	20.80	1.303	-	-	0.03	1.090	1.420
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 5	DSI 6	633332	3499.98	1	19.70	20.80	1.288	-	-	0.06	1.420	1.829
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 5	DSI 6	633332	3499.98	1	19.65	20.80	1.303	-	-	0.02	1.360	1.772
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	0mm	Ant 5	DSI 6	633332	3499.98	1	19.70	20.80	1.288	-	-	0.04	1.850	2.383
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	0mm	Ant 5	DSI 6	633332	3499.98	1	19.65	20.80	1.303	-	-	0.05	1.900	2.476
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Top Side	0mm	Ant 5	DSI 6	633332	3499.98	1	19.61	20.80	1.315	-	-	0.01	1.820	2.394
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	3mm	Ant 5	DSI 4	633332	3499.98	1	23.10	24.00	1.230	-	-	0.03	0.946	1.164
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	9mm	Ant 5	DSI 4	633332	3499.98	1	23.10	24.00	1.230	-	-	0.01	0.574	0.706
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	10mm	Ant 5	DSI 4	633332	3499.98	1	23.06	24.00	1.242	-	-	0.06	0.501	0.622
92	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633332	3499.98	1	21.51	22.50	1.256	-	-	0.04	1.980	2.487
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633332	3499.98	2	21.51	22.50	1.256	-	-	0.03	1.760	2.211
	FR1 n78 Part 27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633332	3499.98	3	21.51	22.50	1.256	-	-	0.01	1.830	2.299
	FR1 n78 Part 27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633332	3499.98	1	21.44	22.50	1.276	-	-	0.09	1.820	2.323
	FR1 n78 Part 27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633332	3499.98	1	20.48	21.50	1.265	-	-	0.01	1.760	2.226



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
WLAN/BT																	
93	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Full power	1	2412	1	19.35	20.50	1.303	98.6	1.014	-0.05	1.360	1.797
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Full power	1	2412	2	19.35	20.50	1.303	98.6	1.014	0.03	1.090	1.440
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Full power	1	2412	3	19.35	20.50	1.303	98.6	1.014	0.05	1.250	1.652
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Simultaneous	1	2412	1	16.96	18.00	1.271	98.6	1.014	0.06	0.762	0.982
	WLAN2.4GHz	802.11b 1Mbps	Back	13mm	Ant 6	Full power	1	2412	1	19.35	20.50	1.303	98.6	1.014	0.01	0.360	0.476
	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 6	Full power	44	5220	1	18.19	19.50	1.352	98.25	1.018	0.06	1.540	2.120
	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 6	Full power	36	5180	1	18.00	19.50	1.413	98.25	1.018	0.02	1.420	2.042
	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	44	5220	1	18.19	19.50	1.352	98.25	1.018	0.03	2.200	3.028
94	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	36	5180	1	18.00	19.50	1.413	98.25	1.018	-0.02	2.210	3.178
	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	36	5180	2	18.00	19.50	1.413	98.25	1.018	0.06	2.010	2.890
	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	36	5180	3	18.00	19.50	1.413	98.25	1.018	0.05	1.850	2.660
	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	40	5200	1	17.82	19.50	1.472	98.25	1.018	0.03	1.980	2.968
	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	48	5240	1	17.91	19.50	1.442	98.25	1.018	0.04	2.060	3.024
	WLAN5.2GHz	802.11n-HT20 MCS0	Top Side	0mm	Ant 6	Full power	44	5220	1	17.99	19.50	1.416	98.12	1.019	0.03	2.060	2.972
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6	Simultaneous	42	5210	1	12.71	14.50	1.510	92.92	1.076	0.06	0.365	0.593
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 6	Simultaneous	42	5210	1	12.71	14.50	1.510	92.92	1.076	0.03	0.601	0.977
	WLAN5.2GHz	802.11a 6Mbps	Back	13mm	Ant 6	Full power	44	5220	1	18.19	19.50	1.352	98.25	1.018	0.01	0.215	0.296
	WLAN5.2GHz	802.11a 6Mbps	Top Side	13mm	Ant 6	Full power	44	5220	1	18.19	19.50	1.352	98.25	1.018	0.02	0.297	0.409
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 6	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.03	0.641	0.890
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 6	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.01	1.110	1.542
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 6	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.05	0.543	0.754
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.01	1.780	2.473
95	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	60	5300	1	18.43	20.00	1.435	98.25	1.018	-0.03	1.860	2.718
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	60	5300	2	18.43	20.00	1.435	98.25	1.018	0.01	1.700	2.484
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	60	5300	3	18.43	20.00	1.435	98.25	1.018	-0.05	1.710	2.499
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 6	Simultaneous	58	5290	1	13.83	15.50	1.469	92.92	1.076	0.03	0.189	0.299
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6	Simultaneous	58	5290	1	13.83	15.50	1.469	92.92	1.076	0.01	0.392	0.620
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 6	Simultaneous	58	5290	1	13.83	15.50	1.469	92.92	1.076	0.02	0.159	0.251
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 6	Simultaneous	58	5290	1	13.83	15.50	1.469	92.92	1.076	0.06	0.621	0.982
	WLAN5.3GHz	802.11a 6Mbps	Front	5mm	Ant 6	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.04	0.242	0.336
	WLAN5.3GHz	802.11a 6Mbps	Back	13mm	Ant 6	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.02	0.237	0.329
	WLAN5.3GHz	802.11a 6Mbps	Right Side	7mm	Ant 6	Full power	64	5320	1	18.65	20.00	1.365	98.25	1.018	0.03	0.191	0.265
	WLAN5.3GHz	802.11a 6Mbps	Top Side	13mm	Ant 6	Full power	60	5300	1	18.43	20.00	1.435	98.25	1.018	0.09	0.311	0.454
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 6	Standalone	100	5500	1	17.60	19.00	1.380	98.25	1.018	0.01	0.541	0.760
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 6	Standalone	100	5500	1	17.60	19.00	1.380	98.25	1.018	-0.03	1.630	2.291
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 6	Standalone	140	5700	1	17.55	19.00	1.396	98.25	1.018	0.03	1.610	2.289
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Ant 6	Standalone	100	5500	1	17.60	19.00	1.380	98.25	1.018	0.01	0.508	0.714
96	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	100	5500	1	17.60	19.00	1.380	98.25	1.018	-0.12	2.260	3.176
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	100	5500	2	17.60	19.00	1.380	98.25	1.018	0.09	2.080	2.923
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	100	5500	3	17.60	19.00	1.380	98.25	1.018	0.03	1.890	2.656
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	116	5580	1	17.05	19.00	1.567	98.25	1.018	0.08	1.750	2.791
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	124	5620	1	17.03	19.00	1.574	98.25	1.018	0.01	1.740	2.788
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	132	5660	1	17.41	19.00	1.442	98.25	1.018	0.03	2.050	3.010
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	140	5700	1	17.55	19.00	1.396	98.25	1.018	0.02	2.100	2.985
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	144	5720	1	17.50	19.00	1.413	98.25	1.018	-0.08	2.120	3.048
	WLAN5.5GHz	802.11n-HT20 MCS0	Top Side	0mm	Ant 6	Standalone	124	5620	1	17.60	19.00	1.380	98.12	1.019	0.09	2.120	2.982
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 6	Simultaneous	106	5530	1	12.94	14.00	1.276	92.92	1.076	0.03	0.222	0.305
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6	Simultaneous	106	5530	1	12.94	14.00	1.276	92.92	1.076	-0.1	0.494	0.678
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 6	Simultaneous	106	5530	1	12.94	14.00	1.276	92.92	1.076	0.02	0.135	0.185
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 6	Simultaneous	106	5530	1	12.94	14.00	1.276	92.92	1.076	0.05	0.695	0.955
	WLAN5.5GHz	802.11a 6Mbps	Front	5mm	Ant 6	Full power	100	5500	1	18.66	20.00	1.361	98.25	1.018	0.01	0.329	0.456



FCC SAR Test Report

Report No. : FA392114

	WLAN5.5GHz	802.11a 6Mbps	Back	13mm	Ant 6	Full power	100	5500	1	18.66	20.00	1.361	98.25	1.018	0.03	0.334	0.463
	WLAN5.5GHz	802.11a 6Mbps	Right Side	7mm	Ant 6	Full power	100	5500	1	18.66	20.00	1.361	98.25	1.018	0.02	0.233	0.323
	WLAN5.5GHz	802.11a 6Mbps	Top Side	13mm	Ant 6	Full power	100	5500	1	18.66	20.00	1.361	98.25	1.018	0.06	0.401	0.556
	WLAN5.8GHz	802.11a 6Mbps	Front	0mm	Ant 6	Standalone	157	5785	1	17.50	19.00	1.413	98.25	1.018	0.02	0.795	1.143
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Ant 6	Standalone	157	5785	1	17.50	19.00	1.413	98.25	1.018	0.06	1.650	2.373
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Ant 6	Standalone	149	5745	1	17.33	19.00	1.469	98.25	1.018	0.02	1.520	2.273
	WLAN5.8GHz	802.11a 6Mbps	Right Side	0mm	Ant 6	Standalone	157	5785	1	17.50	19.00	1.413	98.25	1.018	0.09	0.500	0.719
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	157	5785	1	17.50	19.00	1.413	98.25	1.018	0.01	2.100	3.020
97	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	149	5745	1	17.33	19.00	1.469	98.25	1.018	-0.01	2.110	3.155
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	149	5745	2	17.33	19.00	1.469	98.25	1.018	0.02	1.720	2.572
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	149	5745	3	17.33	19.00	1.469	98.25	1.018	0.06	1.640	2.452
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	165	5825	1	17.26	19.00	1.493	98.25	1.018	0.03	2.010	3.055
	WLAN5.8GHz	802.11n-HT20 MCS0	Top Side	0mm	Ant 6	Standalone	157	5785	1	17.25	19.00	1.496	98.12	1.019	0.05	1.950	2.973
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 6	Simultaneous	155	5775	1	14.18	15.50	1.355	92.92	1.076	0.02	0.447	0.652
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6	Simultaneous	155	5775	1	14.18	15.50	1.355	92.92	1.076	0.06	0.492	0.717
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 6	Simultaneous	155	5775	1	14.18	15.50	1.355	92.92	1.076	0.03	0.150	0.219
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 6	Simultaneous	155	5775	1	14.18	15.50	1.355	92.92	1.076	0.04	0.660	0.962
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	Ant 6	Full power	157	5785	1	18.59	20.00	1.384	98.25	1.018	0.01	0.358	0.504
	WLAN5.8GHz	802.11a 6Mbps	Back	13mm	Ant 6	Full power	157	5785	1	18.59	20.00	1.384	98.25	1.018	0.03	0.347	0.489
	WLAN5.8GHz	802.11a 6Mbps	Right Side	7mm	Ant 6	Full power	157	5785	1	18.59	20.00	1.384	98.25	1.018	0.09	0.260	0.366
	WLAN5.8GHz	802.11a 6Mbps	Top Side	13mm	Ant 6	Full power	149	5745	1	18.13	20.00	1.538	98.25	1.018	0.02	0.415	0.650



16.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	189	836.4	1	30.38	31.50	1.294	-	-	-0.02	1.010	1	1.307
2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Back	5mm	Ant 0	DSI 7	189	836.4	1	30.38	31.50	1.294	-	-	0.02	0.995	1.015	1.288
1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	17.72	18.70	1.253	-	-	0.12	1.020	1	1.278
2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	21100	2535	1	17.72	18.70	1.253	-	-	0.03	0.996	1.024	1.248
1st	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	132322	1745	1	16.23	17.30	1.279	-	-	-0.09	0.991	1	1.268
2nd	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	132322	1745	1	16.23	17.30	1.279	-	-	0.03	0.985	1.006	1.260
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 3	9262	1852.4	1	18.75	19.70	1.245	-	-	-0.07	1.020	1	1.269
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 3	9262	1852.4	1	18.75	19.70	1.245	-	-	0.03	1.000	1.020	1.245
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Back	5mm	Ant 6	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.08	1.040	1	1.393
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Back	5mm	Ant 6	Standalone	1	2412	1	18.79	20.00	1.321	98.6	1.014	0.02	1.010	1.030	1.353
1st	WLAN5.8GHz	-	-	-	-	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	0.05	0.814	1	1.179
2nd	WLAN5.8GHz	-	-	-	-	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	Standalone	155	5775	1	13.21	14.50	1.346	92.92	1.076	0.06	0.806	1.010	1.167

<10g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	128	824.2	1	30.27	31.50	1.327	-	-	0.04	2.410	1	3.199
2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	128	824.2	1	30.27	31.50	1.327	-	-	0.02	2.390	1.008	3.172
1st	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	1	18.96	20.10	1.300	-	-	0.04	2.420	1	3.146
2nd	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	1	18.96	20.10	1.300	-	-	0.05	2.400	1.008	3.120
1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	512	1850.2	1	21.38	22.50	1.294	-	-	-0.14	2.480	1	3.210
2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	512	1850.2	1	21.38	22.50	1.294	-	-	0.02	2.450	1.012	3.171
1st	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	20850	2510	1	20.28	21.40	1.294	-	-	-0.09	2.440	1	3.158
2nd	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	20850	2510	1	20.28	21.40	1.294	-	-	0.01	2.410	1.012	3.119
1st	WLAN5.2GHz	-	-	-	-	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	36	5180	1	18.00	19.50	1.413	98.25	1.018	-0.02	2.210	1	3.178
2nd	WLAN5.2GHz	-	-	-	-	802.11a 6Mbps	Top Side	0mm	Ant 6	Full power	36	5180	1	18.00	19.50	1.413	98.25	1.018	0.01	2.180	1.014	3.135
1st	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	100	5500	1	17.60	19.00	1.380	98.25	1.018	-0.12	2.260	1	3.176
2nd	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	100	5500	1	17.60	19.00	1.380	98.25	1.018	0.01	2.230	1.013	3.134
1st	WLAN5.8GHz	-	-	-	-	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	149	5745	1	17.33	19.00	1.469	98.25	1.018	-0.01	2.110	1	3.155
2nd	WLAN5.8GHz	-	-	-	-	802.11a 6Mbps	Top Side	0mm	Ant 6	Standalone	149	5745	1	17.33	19.00	1.469	98.25	1.018	0.08	2.080	1.014	3.110

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

17. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
4.	WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes
5.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes
6.	WWAN + WLAN2.4GHz + NFC				Yes
7.	WWAN + WLAN5GHz + NFC				Yes
8.	WWAN + Bluetooth + NFC				Yes
9.	WWAN + WLAN5GHz + Bluetooth + NFC				Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- WWAN above includes 5G NR bands.
- EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- For EN-DC mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G(LTE) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed FCC limit. Therefore, simultaneous transmission compliance between 4G+5G NR operation is demonstrated in the Part 2 Report during algorithm validation. In Part 1 Report, simultaneous transmission compliance was evaluated individually with other Radios (WLAN or BT) using one of 4G or 5G NR.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- WLAN 2.4GHz and Bluetooth share the same antenna, and they cannot transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 2.4GHz can't transmit simultaneously.
- NFC can transmit simultaneously with other Radios in extremity exposure condition.
- For Headset SAR and non-Headset SAR always chose higher SAR to do co-located analysis.
- For standalone WWAN, always choose the highest SAR among the selected WWAN bands within the selected antenna for head each exposure position to perform simultaneous transmission analysis with WLAN/BT. This is the worst co-located analysis and can represent each bands.
- The maximum SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 17.6.

17.1 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE uses x%, then the exposure margin left for 5G NR is capped to (100-x)%. Thus, the compliance equation for LTE + 5G NR is

$$x\% * A + (100-x)\% * B \leq 1.0,$$

Where, A is normalized reported time-averaged SAR exposure ratio from LTE, and $A \leq 1.0$; B is normalized reported time-averaged exposure ratio from 5G NR (i.e. SAR exposure for 5G FR1), and $B \leq 1.0$.

Let C = normalized reported SAR exposure ratio from WLAN+BT, then for compliance,

$$x\% * A + (100-x)\% * B + C \leq 1.0 \quad (1)$$

$$x\% * A + (100-x)\% * B \leq x\% * \max(A, B) + (100-x)\% * \max(A, B) \leq \max(A, B)$$

$$x\% * A + (100-x)\% * B + C \leq \max(A, B) + C \leq 1.0 \quad (2)$$

If $A + C \leq 1.0$ and $B + C \leq 1.0$ can be proven, then " $x\% * A + (100-x)\% * B + C \leq 1.0$ ". Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

Step 1: Prove total exposure ratio (TER) of LTE + WLAN + BT < 1

Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN + BT < 1

Else, if $A + C > 1.0$ and/or $B + C > 1.0$, then the followings need to hold true for compliance:

- i. A and C are decoupled based on the SPLSR criteria, and
- ii. $(100-x)\% * B + C \leq 1.0$, and
- iii. $x\% * A + (100-x)\% * B \leq 1.0$

Note iii. is covered in Part 2 report; i. and ii. should be addressed in Part 2 report.

Above analysis is also apply to LTE inter-band uplink, LTE1 + LTE2 + WLAN + BT simultaneous transmission, So inter-band uplink CA no need to do additional simultaneously analysis again. Only required comply with total exposure ratio (TER) of LTE + WLAN + BT < 1.



17.2 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
GSM850 Ant 0	Right Cheek	0.491	0.180	0.235	0.058	0.67	0.78
	Right Tilted	0.269	0.137	0.288	0.051	0.41	0.61
	Left Cheek	0.462	0.387	0.318	0.144	0.85	0.92
	Left Tilted	0.254	0.315	0.371	0.113	0.57	0.74
GSM1900 Ant 0	Right Cheek	0.197	0.180	0.235	0.058	0.38	0.49
	Right Tilted	0.140	0.137	0.288	0.051	0.28	0.48
	Left Cheek	0.147	0.387	0.318	0.144	0.53	0.61
	Left Tilted	0.141	0.315	0.371	0.113	0.46	0.63
WCDMA II Ant 0	Right Cheek	0.148	0.180	0.235	0.058	0.33	0.44
	Right Tilted	0.113	0.137	0.288	0.051	0.25	0.45
	Left Cheek	0.113	0.387	0.318	0.144	0.50	0.58
	Left Tilted	0.116	0.315	0.371	0.113	0.43	0.60
WCDMA IV Ant 0	Right Cheek	0.145	0.180	0.235	0.058	0.33	0.44
	Right Tilted	0.087	0.137	0.288	0.051	0.22	0.43
	Left Cheek	0.087	0.387	0.318	0.144	0.47	0.55
	Left Tilted	0.075	0.315	0.371	0.113	0.39	0.56
WCDMA V Ant 0	Right Cheek	0.460	0.180	0.235	0.058	0.64	0.75
	Right Tilted	0.271	0.137	0.288	0.051	0.41	0.61
	Left Cheek	0.415	0.387	0.318	0.144	0.80	0.88
	Left Tilted	0.238	0.315	0.371	0.113	0.55	0.72
LTE Band 12 Ant 0	Right Cheek	0.134	0.180	0.235	0.058	0.31	0.43
	Right Tilted	0.072	0.137	0.288	0.051	0.21	0.41
	Left Cheek	0.114	0.387	0.318	0.144	0.50	0.58
	Left Tilted	0.060	0.315	0.371	0.113	0.38	0.54
LTE Band 13 Ant 0	Right Cheek	0.283	0.180	0.235	0.058	0.46	0.58
	Right Tilted	0.182	0.137	0.288	0.051	0.32	0.52
	Left Cheek	0.261	0.387	0.318	0.144	0.65	0.72
	Left Tilted	0.167	0.315	0.371	0.113	0.48	0.65
LTE Band 26 Ant 0	Right Cheek	0.254	0.180	0.235	0.058	0.43	0.55
	Right Tilted	0.144	0.137	0.288	0.051	0.28	0.48
	Left Cheek	0.234	0.387	0.318	0.144	0.62	0.70
	Left Tilted	0.135	0.315	0.371	0.113	0.45	0.62
LTE Band 5 Ant 4	Right Cheek	0.928	0.180	0.235	0.058	1.11	1.22
	Right Tilted	0.748	0.137	0.288	0.051	0.89	1.09
	Left Cheek	0.673	0.387	0.318	0.144	1.06	1.14
	Left Tilted	0.631	0.315	0.371	0.113	0.95	1.12
LTE Band 26 Ant 4	Right Cheek	0.740	0.180	0.235	0.058	0.92	1.03
	Right Tilted	0.607	0.137	0.288	0.051	0.74	0.95
	Left Cheek	0.555	0.387	0.318	0.144	0.94	1.02
	Left Tilted	0.506	0.315	0.371	0.113	0.82	0.99
LTE Band 66 Ant 0	Right Cheek	0.129	0.180	0.235	0.058	0.31	0.42
	Right Tilted	0.075	0.137	0.288	0.051	0.21	0.41
	Left Cheek	0.091	0.387	0.318	0.144	0.48	0.55
	Left Tilted	0.069	0.315	0.371	0.113	0.38	0.55
LTE Band 66 Ant 4	Right Cheek	0.522	0.180	0.235	0.058	0.70	0.82
	Right Tilted	0.926	0.137	0.288	0.051	1.06	1.27
	Left Cheek	0.391	0.387	0.318	0.144	0.78	0.85
	Left Tilted	0.501	0.315	0.371	0.113	0.82	0.99
LTE Band 25 Ant	Right Cheek	0.109	0.180	0.235	0.058	0.29	0.40



FCC SAR Test Report

Report No. : FA392114

0	Right Tilted	0.103	0.137	0.288	0.051	0.24	0.44
	Left Cheek	0.099	0.387	0.318	0.144	0.49	0.56
	Left Tilted	0.095	0.315	0.371	0.113	0.41	0.58
LTE Band 25 Ant 4	Right Cheek	0.830	0.180	0.235	0.058	1.01	1.12
	Right Tilted	0.924	0.137	0.288	0.051	1.06	1.26
	Left Cheek	0.496	0.387	0.318	0.144	0.88	0.96
	Left Tilted	0.622	0.315	0.371	0.113	0.94	1.11
LTE Band 7 Ant 1	Right Cheek	0.485	0.180	0.235	0.058	0.67	0.78
	Right Tilted	0.279	0.137	0.288	0.051	0.42	0.62
	Left Cheek	0.817	0.387	0.318	0.144	1.20	1.28
	Left Tilted	0.259	0.315	0.371	0.113	0.57	0.74
LTE Band 7 Ant 4	Right Cheek	0.752	0.180	0.235	0.058	0.93	1.05
	Right Tilted	0.914	0.137	0.288	0.051	1.05	1.25
	Left Cheek	0.267	0.387	0.318	0.144	0.65	0.73
	Left Tilted	0.348	0.315	0.371	0.113	0.66	0.83
LTE Band 41 Ant 4	Right Cheek	0.769	0.180	0.235	0.058	0.95	1.06
	Right Tilted	0.935	0.137	0.288	0.051	1.07	1.27
	Left Cheek	0.244	0.387	0.318	0.144	0.63	0.71
	Left Tilted	0.267	0.315	0.371	0.113	0.58	0.75
LTE Band 42 Ant 5	Right Cheek	0.500	0.180	0.235	0.058	0.68	0.79
	Right Tilted	0.618	0.137	0.288	0.051	0.76	0.96
	Left Cheek	0.833	0.387	0.318	0.144	1.22	1.30
	Left Tilted	0.931	0.315	0.371	0.113	1.25	1.42
FR1 n26 Ant 0	Right Cheek	0.219	0.180	0.235	0.058	0.40	0.51
	Right Tilted	0.125	0.137	0.288	0.051	0.26	0.46
	Left Cheek	0.201	0.387	0.318	0.144	0.59	0.66
	Left Tilted	0.129	0.315	0.371	0.113	0.44	0.61
FR1 n5 Ant 4	Right Cheek	0.891	0.180	0.235	0.058	1.07	1.18
	Right Tilted	0.785	0.137	0.288	0.051	0.92	1.12
	Left Cheek	0.691	0.387	0.318	0.144	1.08	1.15
	Left Tilted	0.625	0.315	0.371	0.113	0.94	1.11
FR1 n26 Ant 4	Right Cheek	0.760	0.180	0.235	0.058	0.94	1.05
	Right Tilted	0.632	0.137	0.288	0.051	0.77	0.97
	Left Cheek	0.540	0.387	0.318	0.144	0.93	1.00
	Left Tilted	0.495	0.315	0.371	0.113	0.81	0.98
FR1 n66 Ant 0	Right Cheek	0.081	0.180	0.235	0.058	0.26	0.37
	Right Tilted	0.044	0.137	0.288	0.051	0.18	0.38
	Left Cheek	0.050	0.387	0.318	0.144	0.44	0.51
	Left Tilted	0.033	0.315	0.371	0.113	0.35	0.52
FR1 n66 Ant 4	Right Cheek	0.535	0.180	0.235	0.058	0.72	0.83
	Right Tilted	0.911	0.137	0.288	0.051	1.05	1.25
	Left Cheek	0.562	0.387	0.318	0.144	0.95	1.02
	Left Tilted	0.677	0.315	0.371	0.113	0.99	1.16
FR1 n2 Ant 0	Right Cheek	0.086	0.180	0.235	0.058	0.27	0.38
	Right Tilted	0.066	0.137	0.288	0.051	0.20	0.41
	Left Cheek	0.065	0.387	0.318	0.144	0.45	0.53
	Left Tilted	0.065	0.315	0.371	0.113	0.38	0.55
FR1 n2 Ant 4	Right Cheek	0.864	0.180	0.235	0.058	1.04	1.16
	Right Tilted	0.913	0.137	0.288	0.051	1.05	1.25
	Left Cheek	0.498	0.387	0.318	0.144	0.89	0.96
	Left Tilted	0.628	0.315	0.371	0.113	0.94	1.11
FR1 n7 Ant 1	Right Cheek	0.422	0.180	0.235	0.058	0.60	0.72
	Right Tilted	0.323	0.137	0.288	0.051	0.46	0.66
	Left Cheek	0.712	0.387	0.318	0.144	1.10	1.17
	Left Tilted	0.276	0.315	0.371	0.113	0.59	0.76
FR1 n41 Ant 4	Right Cheek	0.813	0.180	0.235	0.058	0.99	1.11



FCC SAR Test Report

Report No. : FA392114

	Right Tilted	0.915	0.137	0.288	0.051	1.05	1.25
	Left Cheek	0.306	0.387	0.318	0.144	0.69	0.77
	Left Tilted	0.327	0.315	0.371	0.113	0.64	0.81
	Right Cheek	0.584	0.180	0.235	0.058	0.76	0.88
FR1 n78 Part 27Q Ant 5	Right Tilted	0.678	0.137	0.288	0.051	0.82	1.02
	Left Cheek	0.856	0.387	0.318	0.144	1.24	1.32
	Left Tilted	0.913	0.315	0.371	0.113	1.23	1.40
	Right Cheek	0.070	0.180	0.235	0.058	0.25	0.36
FR1 n78 Part 27Q Ant 1	Right Tilted	0.079	0.137	0.288	0.051	0.22	0.42
	Left Cheek	0.111	0.387	0.318	0.144	0.50	0.57
	Left Tilted	0.043	0.315	0.371	0.113	0.36	0.53
	Right Cheek	0.157	0.180	0.235	0.058	0.34	0.45
FR1 n78 Part 27Q Ant 2	Right Tilted	0.115	0.137	0.288	0.051	0.25	0.45
	Left Cheek	0.096	0.387	0.318	0.144	0.48	0.56
	Left Tilted	0.081	0.315	0.371	0.113	0.40	0.57
	Right Cheek	0.039	0.180	0.235	0.058	0.22	0.33
FR1 n78 Part 27Q Ant 8	Right Tilted	0.066	0.137	0.288	0.051	0.20	0.41
	Left Cheek	0.041	0.387	0.318	0.144	0.43	0.50
	Left Tilted	0.014	0.315	0.371	0.113	0.33	0.50
	Right Cheek	0.039	0.180	0.235	0.058	0.22	0.33

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE Band 41 Ant 1	Right Cheek	0.439	0.180	0.235	0.058	0.62	0.73
	Right Tilted	0.344	0.137	0.288	0.051	0.48	0.68
	Left Cheek	0.743	0.387	0.318	0.144	1.13	1.21
	Left Tilted	0.199	0.315	0.371	0.113	0.51	0.68
FR1 n7 Ant 4	Right Cheek	0.797	0.180	0.235	0.058	0.98	1.09
	Right Tilted	0.932	0.137	0.288	0.051	1.07	1.27
	Left Cheek	0.285	0.387	0.318	0.144	0.67	0.75
	Left Tilted	0.374	0.315	0.371	0.113	0.69	0.86



17.3 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN 1g SAR (W/kg)	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN5GHz Ant 6 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
GSM850 Ant 0	Front	0.696	0.400	0.240	0.068	1.10	1.00	
	Back	1.307	0.727	0.621	0.147	2.03	2.08	1/2
	Left side					0.00	0.00	
	Right side	0.601	0.512	0.242	0.080	1.11	0.92	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.222				1.22	1.22	
GSM1900 Ant 0	Front	0.318	0.400	0.240	0.068	0.72	0.63	
	Back	0.655	0.727	0.621	0.147	1.38	1.42	
	Left side					0.00	0.00	
	Right side	0.043	0.512	0.242	0.080	0.56	0.37	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.369				1.37	1.37	
WCDMA II Ant 0	Front	0.279	0.400	0.240	0.068	0.68	0.59	
	Back	0.986	0.727	0.621	0.147	1.71	1.75	3/4
	Left side					0.00	0.00	
	Right side	0.045	0.512	0.242	0.080	0.56	0.37	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.276				1.28	1.28	
WCDMA IV Ant 0	Front	0.365	0.400	0.240	0.068	0.77	0.67	
	Back	1.024	0.727	0.621	0.147	1.75	1.79	5/6
	Left side					0.00	0.00	
	Right side	0.050	0.512	0.242	0.080	0.56	0.37	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.287				1.29	1.29	
WCDMA V Ant 0	Front	0.622	0.400	0.240	0.068	1.02	0.93	
	Back	1.226	0.727	0.621	0.147	1.95	1.99	7/8
	Left side					0.00	0.00	
	Right side	0.521	0.512	0.242	0.080	1.03	0.84	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.150				1.15	1.15	
LTE Band 12 Ant 0	Front	0.268	0.400	0.240	0.068	0.67	0.58	
	Back	0.615	0.727	0.621	0.147	1.34	1.38	
	Left side					0.00	0.00	
	Right side	0.455	0.512	0.242	0.080	0.97	0.78	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	0.520				0.52	0.52	
LTE Band 13 Ant 0	Front	0.269	0.400	0.240	0.068	0.67	0.58	
	Back	0.540	0.727	0.621	0.147	1.27	1.31	
	Left side					0.00	0.00	
	Right side	0.335	0.512	0.242	0.080	0.85	0.66	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	0.510				0.51	0.51	
LTE Band 26 Ant 0	Front	0.593	0.400	0.240	0.068	0.99	0.90	
	Back	1.059	0.727	0.621	0.147	1.79	1.83	9/10
	Left side					0.00	0.00	
	Right side	0.492	0.512	0.242	0.080	1.00	0.81	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	0.972				0.97	0.97	
LTE Band 5	Front	0.225	0.400	0.240	0.068	0.63	0.53	



FCC SAR Test Report

Report No. : FA392114

Ant 4	Back	0.621	0.727	0.621	0.147	1.35	1.39	
	Left side	0.109				0.11	0.11	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.412	0.421	0.741	0.068	0.83	1.22	
	Bottom side					0.00	0.00	
LTE Band 26 Ant 4	Front	0.247	0.400	0.240	0.068	0.65	0.56	
	Back	0.701	0.727	0.621	0.147	1.43	1.47	
	Left side	0.107				0.11	0.11	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.537	0.421	0.741	0.068	0.96	1.35	
LTE Band 66 Ant 0	Bottom side					0.00	0.00	
	Front	0.340	0.400	0.240	0.068	0.74	0.65	
	Back	0.980	0.727	0.621	0.147	1.71	1.75	11/12
	Left side					0.00	0.00	
	Right side	0.055	0.512	0.242	0.080	0.57	0.38	
LTE Band 66 Ant 4	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.287				1.29	1.29	
	Front	0.152	0.400	0.240	0.068	0.55	0.46	
	Back	0.360	0.727	0.621	0.147	1.09	1.13	
	Left side	0.028				0.03	0.03	
LTE Band 25 Ant 0	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.614	0.421	0.741	0.068	1.04	1.42	
	Bottom side					0.00	0.00	
	Front	0.286	0.400	0.240	0.068	0.69	0.59	
	Back	0.722	0.727	0.621	0.147	1.45	1.49	
LTE Band 25 Ant 4	Left side					0.00	0.00	
	Right side	0.044	0.512	0.242	0.080	0.56	0.37	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.272				1.27	1.27	
	Front	0.306	0.400	0.240	0.068	0.71	0.61	
LTE Band 7 Ant 1	Back	0.615	0.727	0.621	0.147	1.34	1.38	
	Left side	0.067				0.07	0.07	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.618	0.421	0.741	0.068	1.04	1.43	
	Bottom side					0.00	0.00	
LTE Band 7 Ant 4	Front	0.639	0.400	0.240	0.068	1.04	0.95	
	Back	1.278	0.727	0.621	0.147	2.01	2.05	13/14
	Left side	0.680				0.68	0.68	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side		0.421	0.741	0.068	0.42	0.81	
LTE Band 41 Ant 4	Bottom side	0.579				0.58	0.58	
	Front	0.145	0.400	0.240	0.068	0.55	0.45	
	Back	0.614	0.727	0.621	0.147	1.34	1.38	
	Left side	0.175				0.18	0.18	
	Right side		0.512	0.242	0.080	0.51	0.32	
LTE Band 42 Ant 5	Top side	0.558	0.421	0.741	0.068	0.98	1.37	
	Bottom side					0.00	0.00	
	Front	0.152	0.400	0.240	0.068	0.55	0.46	
	Back	0.627	0.727	0.621	0.147	1.35	1.40	
	Left side	0.170				0.17	0.17	
LTE Band 42 Ant 5	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.548	0.421	0.741	0.068	0.97	1.36	
	Bottom side					0.00	0.00	
	Front	0.334	0.400	0.240	0.068	0.73	0.64	
	Back	0.541	0.727	0.621	0.147	1.27	1.31	
LTE Band 42 Ant 5	Left side	0.073				0.07	0.07	



FCC SAR Test Report

Report No. : FA392114

	Right side	0.190	0.512	0.242	0.080	0.70	0.51	
	Top side	0.624	0.421	0.741	0.068	1.05	1.43	
	Bottom side					0.00	0.00	
FR1 n26 Ant 0	Front	0.416	0.400	0.240	0.068	0.82	0.72	
	Back	0.748	0.727	0.621	0.147	1.48	1.52	
	Left side					0.00	0.00	
	Right side	0.313	0.512	0.242	0.080	0.83	0.64	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	0.557				0.56	0.56	
FR1 n5 Ant 4	Front	0.251	0.400	0.240	0.068	0.65	0.56	
	Back	0.616	0.727	0.621	0.147	1.34	1.38	
	Left side	0.147				0.15	0.15	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.468	0.421	0.741	0.068	0.89	1.28	
	Bottom side					0.00	0.00	
FR1 n26 Ant 4	Front	0.211	0.400	0.240	0.068	0.61	0.52	
	Back	0.529	0.727	0.621	0.147	1.26	1.30	
	Left side	0.117				0.12	0.12	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.394	0.421	0.741	0.068	0.82	1.20	
	Bottom side					0.00	0.00	
FR1 n66 Ant 0	Front	0.423	0.400	0.240	0.068	0.82	0.73	
	Back	1.105	0.727	0.621	0.147	1.83	1.87	15/16
	Left side					0.00	0.00	
	Right side	0.062	0.512	0.242	0.080	0.57	0.38	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.281				1.28	1.28	
FR1 n66 Ant 4	Front	0.242	0.400	0.240	0.068	0.64	0.55	
	Back	0.475	0.727	0.621	0.147	1.20	1.24	
	Left side	0.052				0.05	0.05	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.619	0.421	0.741	0.068	1.04	1.43	
	Bottom side					0.00	0.00	
FR1 n2 Ant 0	Front	0.358	0.400	0.240	0.068	0.76	0.67	
	Back	0.791	0.727	0.621	0.147	1.52	1.56	
	Left side					0.00	0.00	
	Right side	0.052	0.512	0.242	0.080	0.56	0.37	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	1.294				1.29	1.29	
FR1 n2 Ant 4	Front	0.243	0.400	0.240	0.068	0.64	0.55	
	Back	0.616	0.727	0.621	0.147	1.34	1.38	
	Left side	0.056				0.06	0.06	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.608	0.421	0.741	0.068	1.03	1.42	
	Bottom side					0.00	0.00	
FR1 n7 Ant 1	Front	0.748	0.400	0.240	0.068	1.15	1.06	
	Back	1.282	0.727	0.621	0.147	2.01	2.05	17/18
	Left side	0.758				0.76	0.76	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	0.670				0.67	0.67	
FR1 n41 Ant 4	Front	0.161	0.400	0.240	0.068	0.56	0.47	
	Back	0.622	0.727	0.621	0.147	1.35	1.39	
	Left side	0.223				0.22	0.22	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.552	0.421	0.741	0.068	0.97	1.36	



FCC SAR Test Report

Report No. : FA392114

	Bottom side					0.00	0.00	
FR1 n78 Part 27Q Ant 5	Front	0.329	0.400	0.240	0.068	0.73	0.64	
	Back	0.544	0.727	0.621	0.147	1.27	1.31	
	Left side	0.080				0.08	0.08	
	Right side	0.207	0.512	0.242	0.080	0.72	0.53	
	Top side	0.627	0.421	0.741	0.068	1.05	1.44	
	Bottom side					0.00	0.00	
FR1 n78 Part 27Q Ant 1	Front	0.646	0.400	0.240	0.068	1.05	0.95	
	Back	1.064	0.727	0.621	0.147	1.79	1.83	21/22
	Left side	0.541				0.54	0.54	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side		0.421	0.741	0.068	0.42	0.81	
	Bottom side	0.550				0.55	0.55	
FR1 n78 Part 27Q Ant 2	Front	0.275	0.400	0.240	0.068	0.68	0.58	
	Back	0.618	0.727	0.621	0.147	1.35	1.39	
	Left side	0.212				0.21	0.21	
	Right side		0.512	0.242	0.080	0.51	0.32	
	Top side	0.039	0.421	0.741	0.068	0.46	0.85	
	Bottom side					0.00	0.00	
FR1 n78 Part 27Q Ant 8	Front	0.515	0.400	0.240	0.068	0.92	0.82	
	Back	0.617	0.727	0.621	0.147	1.34	1.39	
	Left side					0.00	0.00	
	Right side	0.094	0.512	0.242	0.080	0.61	0.42	
	Top side	0.050	0.421	0.741	0.068	0.47	0.86	
	Bottom side					0.00	0.00	

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 41 Ant 1	Front	0.724	0.400	0.240	0.068	1.12	1.03	
	Back	1.282	0.727	0.621	0.147	2.01	2.05	19/20
	Left side	0.746				0.75	0.75	
	Bottom side	0.528				0.53	0.53	
FR1 n7 Ant 4	Front	0.185	0.400	0.240	0.068	0.59	0.49	
	Back	0.626	0.727	0.621	0.147	1.35	1.39	
	Left side	0.212				0.21	0.21	
	Top side	0.604	0.421	0.741	0.068	1.03	1.41	



17.4 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN 1g SAR (W/kg)	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN5GHz Ant 6 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
GSM850 Ant 0	Front	0.696	0.167	0.276	0.068	0.86	1.04	
	Back	1.307	0.378	0.374	0.147	1.69	1.83	1/2
GSM1900 Ant 0	Front	0.590	0.167	0.276	0.068	0.76	0.93	
	Back	1.302	0.378	0.374	0.147	1.68	1.82	3/4
WCDMA II Ant 0	Front	0.555	0.167	0.276	0.068	0.72	0.90	
	Back	1.269	0.378	0.374	0.147	1.65	1.79	5/6
WCDMA IV Ant 0	Front	0.461	0.167	0.276	0.068	0.63	0.81	
	Back	1.292	0.378	0.374	0.147	1.67	1.81	7/8
WCDMA V Ant 0	Front	0.622	0.167	0.276	0.068	0.79	0.97	
	Back	1.226	0.378	0.374	0.147	1.60	1.75	23/24
LTE Band 12 Ant 0	Front	0.268	0.167	0.276	0.068	0.44	0.61	
	Back	0.615	0.378	0.374	0.147	0.99	1.14	
LTE Band 13 Ant 0	Front	0.269	0.167	0.276	0.068	0.44	0.61	
	Back	0.540	0.378	0.374	0.147	0.92	1.06	
LTE Band 26 Ant 0	Front	0.593	0.167	0.276	0.068	0.76	0.94	
	Back	1.059	0.378	0.374	0.147	1.44	1.58	
LTE Band 5 Ant 4	Front	0.314	0.167	0.276	0.068	0.48	0.66	
	Back	0.864	0.378	0.374	0.147	1.24	1.39	
LTE Band 26 Ant 4	Front	0.247	0.167	0.276	0.068	0.41	0.59	
	Back	0.701	0.378	0.374	0.147	1.08	1.22	
LTE Band 66 Ant 0	Front	0.444	0.167	0.276	0.068	0.61	0.79	
	Back	1.268	0.378	0.374	0.147	1.65	1.79	9/10
LTE Band 66 Ant 4	Front	0.269	0.167	0.276	0.068	0.44	0.61	
	Back	0.911	0.378	0.374	0.147	1.29	1.43	
LTE Band 25 Ant 0	Front	0.549	0.167	0.276	0.068	0.72	0.89	
	Back	1.292	0.378	0.374	0.147	1.67	1.81	11/12
LTE Band 25 Ant 4	Front	0.578	0.167	0.276	0.068	0.75	0.92	
	Back	0.917	0.378	0.374	0.147	1.30	1.44	
LTE Band 7 Ant 1	Front	0.639	0.167	0.276	0.068	0.81	0.98	
	Back	1.278	0.378	0.374	0.147	1.66	1.80	13/14
LTE Band 7 Ant 4	Front	0.213	0.167	0.276	0.068	0.38	0.56	
	Back	0.936	0.378	0.374	0.147	1.31	1.46	
LTE Band 41 Ant 4	Front	0.224	0.167	0.276	0.068	0.39	0.57	
	Back	0.921	0.378	0.374	0.147	1.30	1.44	
LTE Band 42 Ant 5	Front	0.524	0.167	0.276	0.068	0.69	0.87	
	Back	0.929	0.378	0.374	0.147	1.31	1.45	
FR1 n26 Ant 0	Front	0.416	0.167	0.276	0.068	0.58	0.76	
	Back	0.748	0.378	0.374	0.147	1.13	1.27	
FR1 n5 Ant 4	Front	0.261	0.167	0.276	0.068	0.43	0.61	
	Back	0.641	0.378	0.374	0.147	1.02	1.16	
FR1 n26 Ant 4	Front	0.211	0.167	0.276	0.068	0.38	0.56	
	Back	0.529	0.378	0.374	0.147	0.91	1.05	
FR1 n66 Ant 0	Front	0.486	0.167	0.276	0.068	0.65	0.83	
	Back	1.269	0.378	0.374	0.147	1.65	1.79	15/16
FR1 n66 Ant 4	Front	0.353	0.167	0.276	0.068	0.52	0.70	
	Back	0.929	0.378	0.374	0.147	1.31	1.45	
FR1 n2 Ant 0	Front	0.506	0.167	0.276	0.068	0.67	0.85	
	Back	1.292	0.378	0.374	0.147	1.67	1.81	17/18
FR1 n2 Ant 4	Front	0.487	0.167	0.276	0.068	0.65	0.83	



FCC SAR Test Report

Report No. : FA392114

	Back	0.914	0.378	0.374	0.147	1.29	1.44	
FR1 n7 Ant 1	Front	0.748	0.167	0.276	0.068	0.92	1.09	
	Back	1.282	0.378	0.374	0.147	1.66	1.80	19/20
FR1 n41 Ant 4	Front	0.242	0.167	0.276	0.068	0.41	0.59	
	Back	0.949	0.378	0.374	0.147	1.33	1.47	
FR1 n78 Part 27Q Ant 5	Front	0.559	0.167	0.276	0.068	0.73	0.90	
	Back	0.924	0.378	0.374	0.147	1.30	1.45	
FR1 n78 Part 27Q Ant 1	Front	0.646	0.167	0.276	0.068	0.81	0.99	
	Back	1.064	0.378	0.374	0.147	1.44	1.59	
FR1 n78 Part 27Q Ant 2	Front	0.413	0.167	0.276	0.068	0.58	0.76	
	Back	0.928	0.378	0.374	0.147	1.31	1.45	
FR1 n78 Part 27Q Ant 8	Front	0.784	0.167	0.276	0.068	0.95	1.13	
	Back	0.948	0.378	0.374	0.147	1.33	1.47	

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 41 Ant 1	Front	0.742	0.167	0.276	0.068	0.91	1.09	
	Back	1.282	0.378	0.374	0.147	1.66	1.80	21/22
FR1 n7 Ant 4	Front	0.273	0.167	0.276	0.068	0.44	0.62	
	Back	0.922	0.378	0.374	0.147	1.30	1.44	

Sensor-Off

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
GSM1900 Ant 0	Front	0.552	0.222	0.568	0.069	0.77	1.19
	Back	0.876	0.148	0.635	0.058	1.02	1.57
WCDMA II Ant 0	Front	0.539	0.222	0.568	0.069	0.76	1.18
	Back	0.665	0.148	0.635	0.058	0.81	1.36
WCDMA IV Ant 0	Front	0.379	0.222	0.568	0.069	0.60	1.02
	Back	0.872	0.148	0.635	0.058	1.02	1.57
LTE Band 66 Ant 0	Front	0.422	0.222	0.568	0.069	0.64	1.06
	Back	0.884	0.148	0.635	0.058	1.03	1.58
LTE Band 66 Ant 4	Front	0.239	0.222	0.568	0.069	0.46	0.88
	Back	0.228	0.148	0.635	0.058	0.38	0.92
LTE Band 25 Ant 0	Front	0.540	0.222	0.568	0.069	0.76	1.18
	Back	0.621	0.148	0.635	0.058	0.77	1.31
LTE Band 25 Ant 4	Front	0.549	0.222	0.568	0.069	0.77	1.19
	Back	0.595	0.148	0.635	0.058	0.74	1.29
LTE Band 7 Ant 1	Front	0.622	0.222	0.568	0.069	0.84	1.26
	Back	0.646	0.148	0.635	0.058	0.79	1.34
LTE Band 7 Ant 4	Front	0.623	0.222	0.568	0.069	0.85	1.26
	Back	0.734	0.148	0.635	0.058	0.88	1.43
LTE Band 41 Ant 4	Front	0.425	0.222	0.568	0.069	0.65	1.06
	Back	0.557	0.148	0.635	0.058	0.71	1.25
LTE Band 42 Ant 5	Front	0.603	0.222	0.568	0.069	0.83	1.24
	Back	0.439	0.148	0.635	0.058	0.59	1.13
FR1 n66 Ant 0	Front	0.353	0.222	0.568	0.069	0.58	0.99
	Back	0.637	0.148	0.635	0.058	0.79	1.33
FR1 n66 Ant 4	Front	0.263	0.222	0.568	0.069	0.49	0.90
	Back	0.215	0.148	0.635	0.058	0.36	0.91
FR1 n2 Ant 0	Front	0.432	0.222	0.568	0.069	0.65	1.07
	Back	0.452	0.148	0.635	0.058	0.60	1.15



FCC SAR Test Report

Report No. : FA392114

FR1 n2 Ant 4	Front	0.481	0.222	0.568	0.069	0.70	1.12
	Back	0.519	0.148	0.635	0.058	0.67	1.21
FR1 n7 Ant 1	Front	0.723	0.222	0.568	0.069	0.95	1.36
	Back	0.538	0.148	0.635	0.058	0.69	1.23
FR1 n41 Ant 4	Front	0.700	0.222	0.568	0.069	0.92	1.34
	Back	0.745	0.148	0.635	0.058	0.89	1.44
FR1 n78 Part 27Q Ant 5	Front	0.478	0.222	0.568	0.069	0.70	1.12
	Back	0.453	0.148	0.635	0.058	0.60	1.15
FR1 n78 Part 27Q Ant 2	Front	0.333	0.222	0.568	0.069	0.56	0.97
	Back	0.568	0.148	0.635	0.058	0.72	1.26

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE Band 41 Ant 1	Front	0.698	0.222	0.568	0.069	0.92	1.34
	Back	0.652	0.148	0.635	0.058	0.80	1.35
FR1 n7 Ant 4	Front	0.540	0.222	0.568	0.069	0.76	1.18
	Back	0.694	0.148	0.635	0.058	0.84	1.39

17.5 Product specific 10g SAR Exposure Conditions

Remark:

- For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

WWAN Band	Exposure Position	1	2	3	4	1+2+4	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	NFC	Summed	Summed	
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
GSM850 Ant 0	Front	1.747		0.652	0.003	1.75	2.40	
	Back	2.394	0.982	0.717	0.019	3.40	3.13	
	Right side	1.462		0.251	0.002	1.46	1.72	
	Bottom side	3.199			0.001	3.20	3.20	
GSM1900 Ant 0	Front	0.847		0.652	0.003	0.85	1.50	
	Back	2.330	0.982	0.717	0.019	3.33	3.07	
	Bottom side	3.210			0.001	3.21	3.21	
WCDMA II Ant 0	Back	2.265	0.982	0.717	0.019	3.27	3.00	
	Bottom side	3.210			0.001	3.21	3.21	
WCDMA IV Ant 0	Front	1.095		0.652	0.003	1.10	1.75	
	Back	2.675	0.982	0.717	0.019	3.68	3.41	
	Bottom side	3.151			0.001	3.15	3.15	
WCDMA V Ant 0	Back	1.408	0.982	0.717	0.019	2.41	2.14	
	Bottom side	2.281			0.001	2.28	2.28	
LTE Band 66 Ant 0	Front	1.049		0.652	0.003	1.05	1.70	
	Back	2.546	0.982	0.717	0.019	3.55	3.28	
	Bottom side	3.146			0.001	3.15	3.15	
LTE Band 66 Ant 4	Top side	2.480		0.982	0.001	2.48	3.46	
LTE Band 25 Ant 0	Back	1.945	0.982	0.717	0.019	2.95	2.68	
	Bottom side	3.206			0.001	3.21	3.21	
LTE Band 25 Ant 4	Front	1.447		0.652	0.003	1.45	2.10	
	Back	1.785	0.982	0.717	0.019	2.79	2.52	
	Top side	2.480		0.982	0.001	2.48	3.46	
LTE Band 7 Ant 1	Back	3.158	0.982	0.717	0.019	4.16	3.89	1
	Left side	1.997	0.993		0.003	2.99	2.00	
LTE Band 7 Ant 4	Back	1.791	0.982	0.717	0.019	2.79	2.53	
	Left side	1.250			0.003	1.25	1.25	
	Top side	2.445		0.982	0.001	2.45	3.43	
LTE Band 41 Ant 4	Back	2.141	0.982	0.717	0.019	3.14	2.88	
	Top side	2.477		0.982	0.001	2.48	3.46	
LTE Band 42 Ant 5	Back	1.268	0.982	0.717	0.019	2.27	2.00	
	Top side	2.485		0.982	0.001	2.49	3.47	
FR1 n66 Ant 0	Front	1.201		0.652	0.003	1.20	1.86	
	Back	2.877	0.982	0.717	0.019	3.88	3.61	
	Bottom side	3.169			0.001	3.17	3.17	
FR1 n66 Ant 4	Back	0.886	0.982	0.717	0.019	1.89	1.62	
	Top side	2.468		0.982	0.001	2.47	3.45	
FR1 n2 Ant 0	Front	0.943		0.652	0.003	0.95	1.60	
	Back	1.911	0.982	0.717	0.019	2.91	2.65	
	Bottom side	3.166			0.001	3.17	3.17	
FR1 n2 Ant 4	Front	1.309		0.652	0.003	1.31	1.96	
	Back	2.279	0.982	0.717	0.019	3.28	3.02	
	Top side	2.488		0.982	0.001	2.49	3.47	
FR1 n7 Ant 1	Front	1.830		0.652	0.003	1.83	2.49	
	Back	3.176	0.982	0.717	0.019	4.18	3.91	2
	Left side	2.207			0.003	2.21	2.21	



FCC SAR Test Report

Report No. : FA392114


	Bottom side	1.696			0.001	1.70	1.70	
FR1 n41 Ant 4	Front	1.211		0.652	0.003	1.21	1.87	
	Back	2.333	0.982	0.717	0.019	3.33	3.07	
	Left side	1.590			0.003	1.59	1.59	
	Top side	2.476		0.982	0.001	2.48	3.46	
FR1 n78 Part 27Q Ant 5	Front	1.533		0.652	0.003	1.54	2.19	
	Back	1.829	0.982	0.717	0.019	2.83	2.57	
	Top side	2.476		0.982	0.001	2.48	3.46	
FR1 n78 Part 27Q Ant 2	Back	2.487	0.982	0.717	0.019	3.49	3.22	

WWAN Band	Exposure Position	1	2	3	4	1+2+4	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	NFC	Summed	Summed	
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
LTE Band 41 Ant 1	Front	1.481		0.652	0.003	1.48	2.14	
	Back	3.195	0.982	0.717	0.019	4.20	3.93	3
	Left side	2.257			0.003	2.26	2.26	
FR1 n7 Ant 4	Front	1.166		0.652	0.003	1.17	1.82	
	Back	2.142	0.982	0.717	0.019	3.14	2.88	
	Left side	1.491			0.003	1.49	1.49	
	Top side	2.443		0.982	0.001	2.44	3.43	


17.6 SPLSR Evaluation and Analysis

General Note:

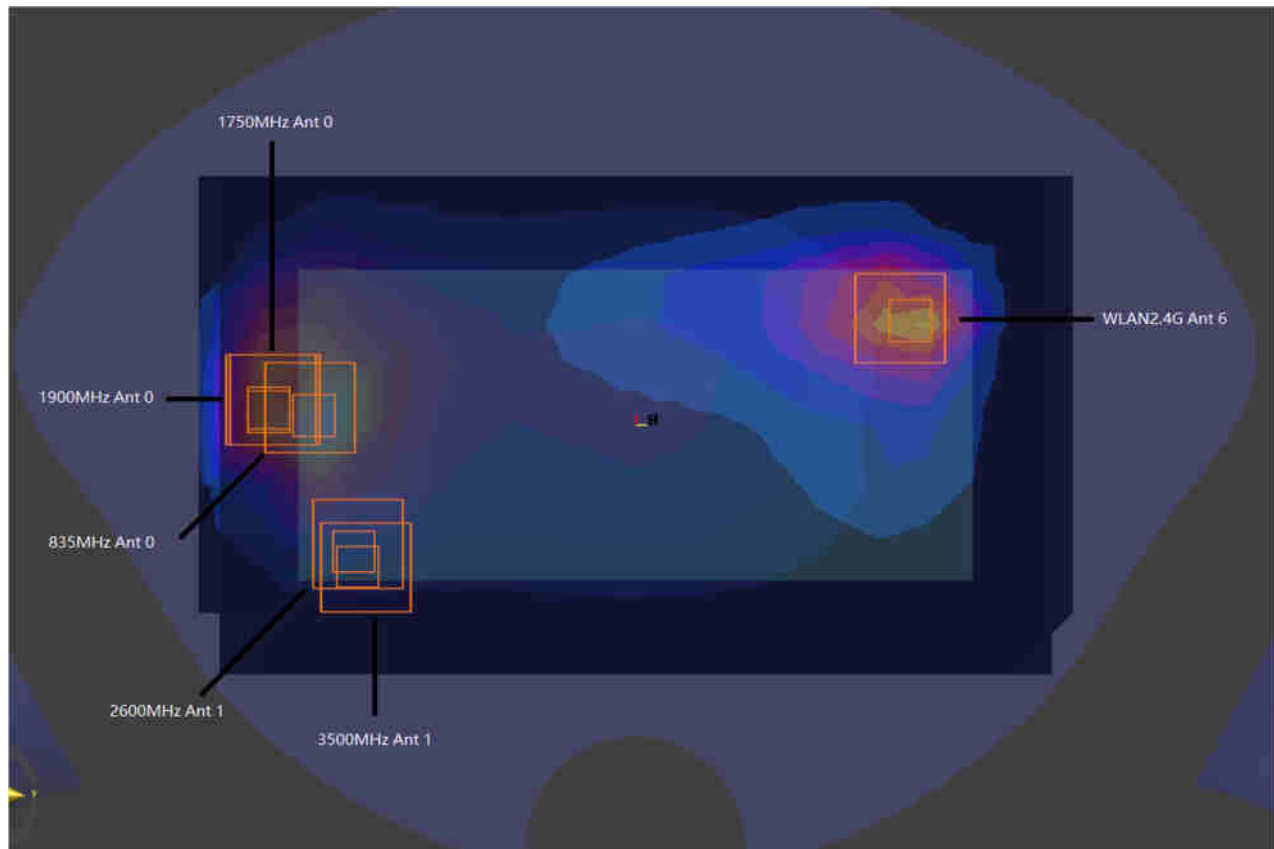
1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR_1 + SAR_2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
3. Per April 2022 TCB Workshop Notes, BT/WIFI Antenna 6 was summed algebraically with the NFC separately for the purposes of hybrid SPLSR combination and they are located at the top of the device.
4. Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.




Hotspot WWAN+WLAN2.4GHz

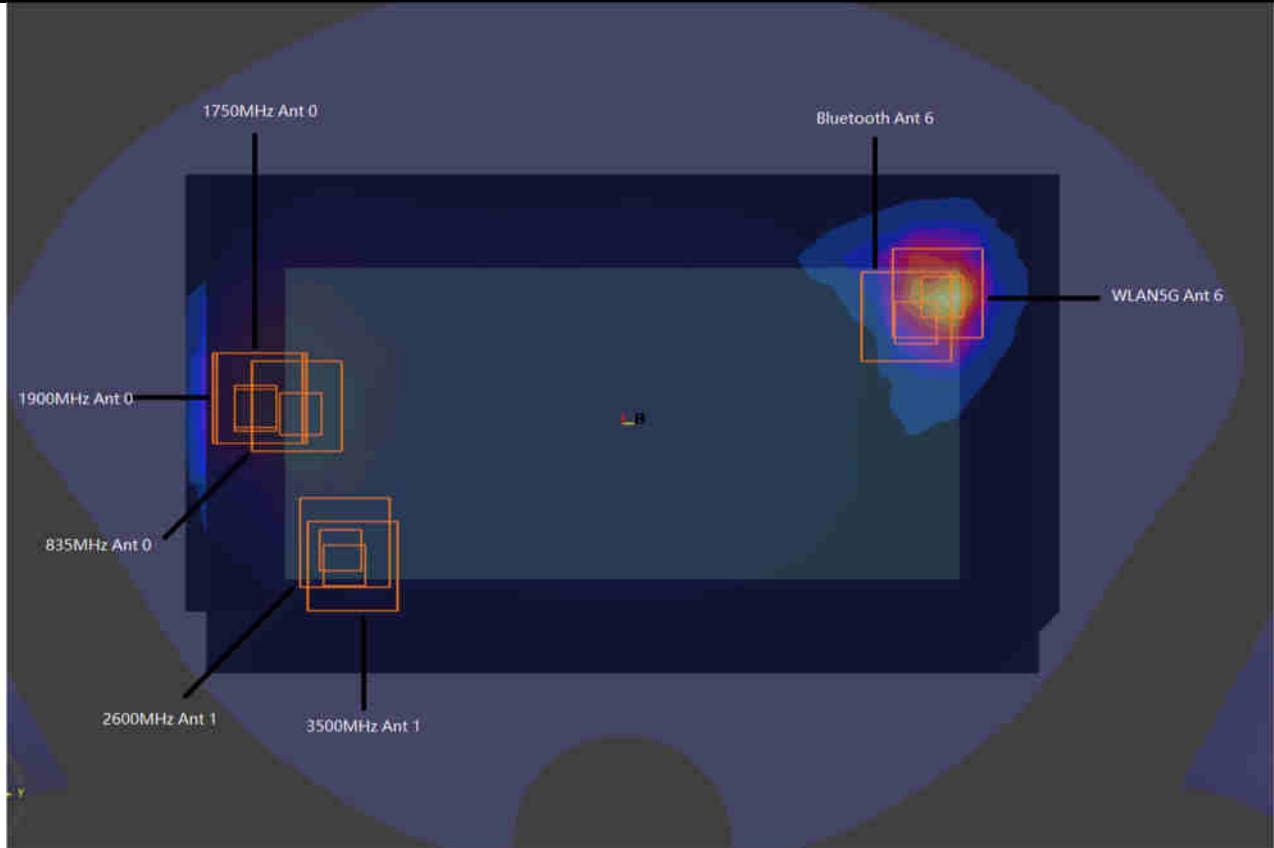


Hotspot WWAN+WLAN5GHz +BT

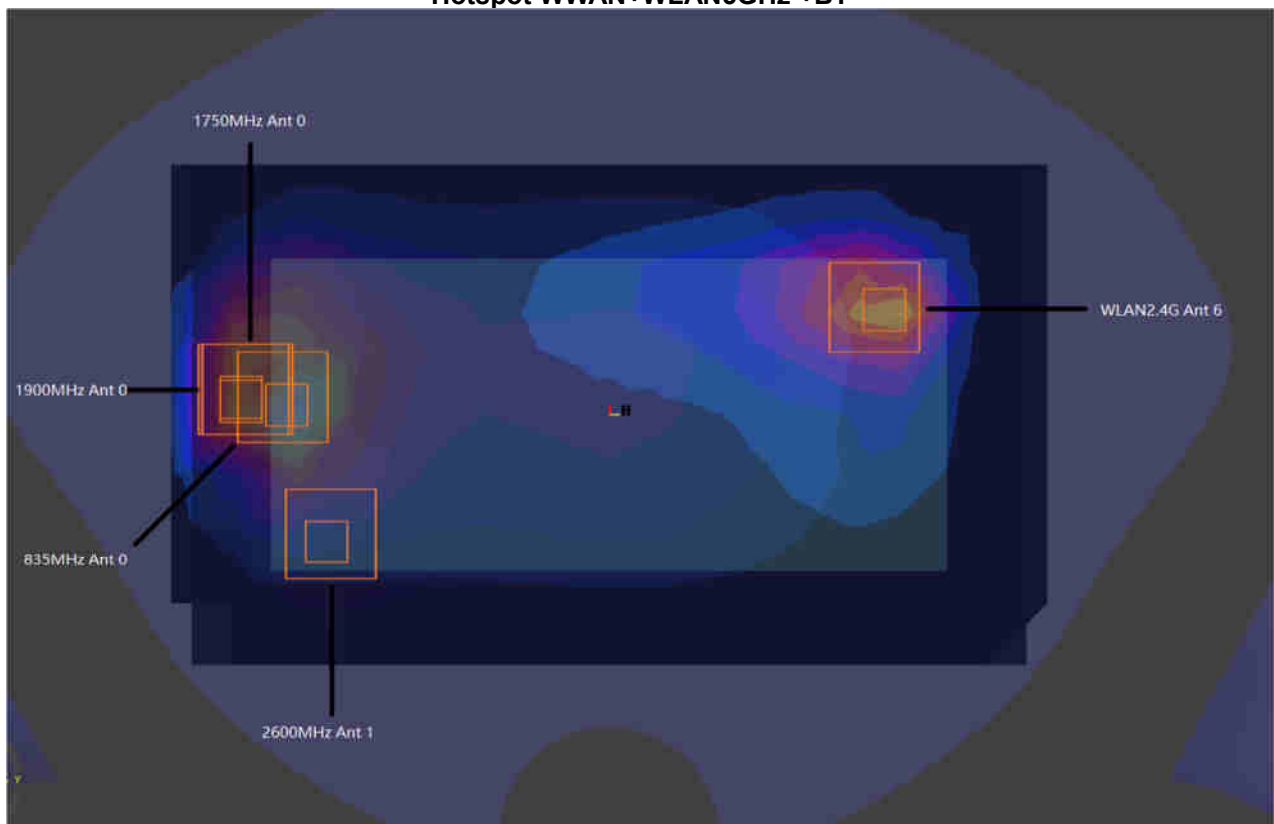

Body-worn WWAN+WLAN2.4GHz

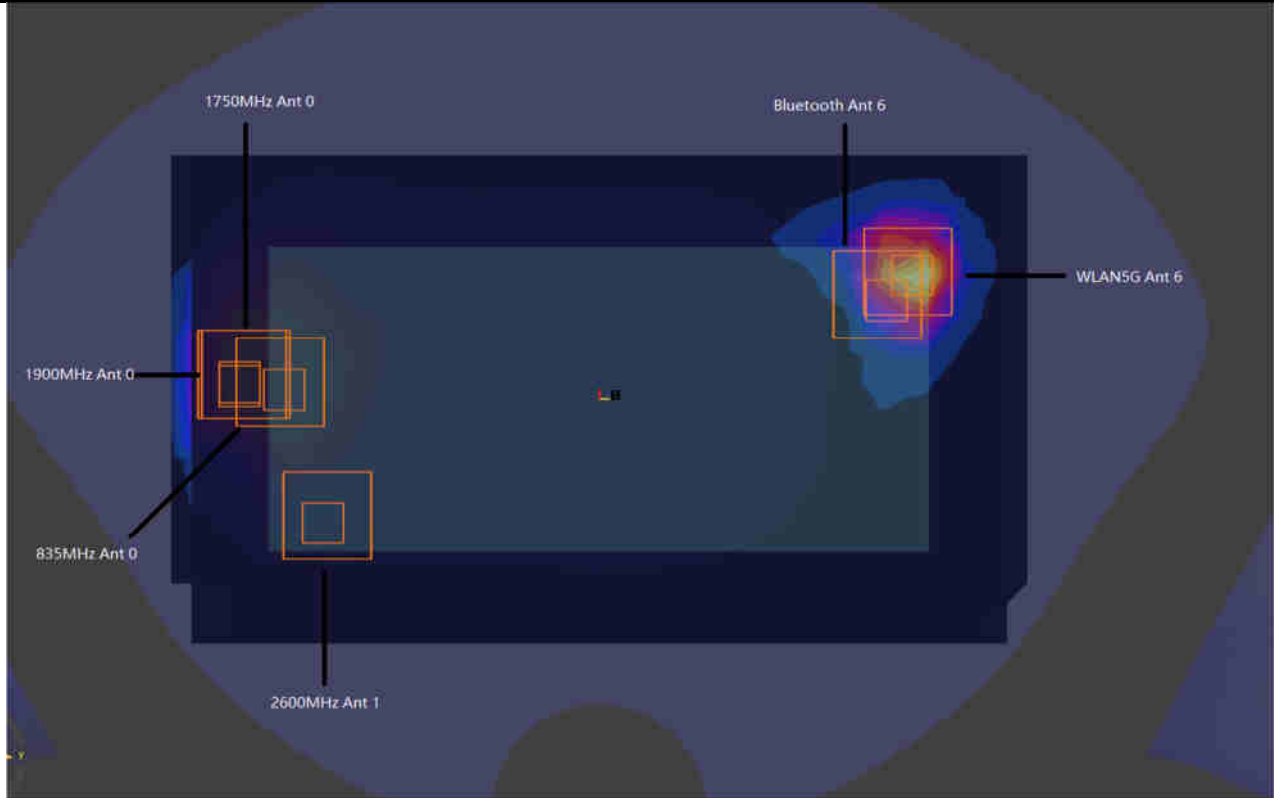

Body-worn WWAN+WLAN5GHz +BT

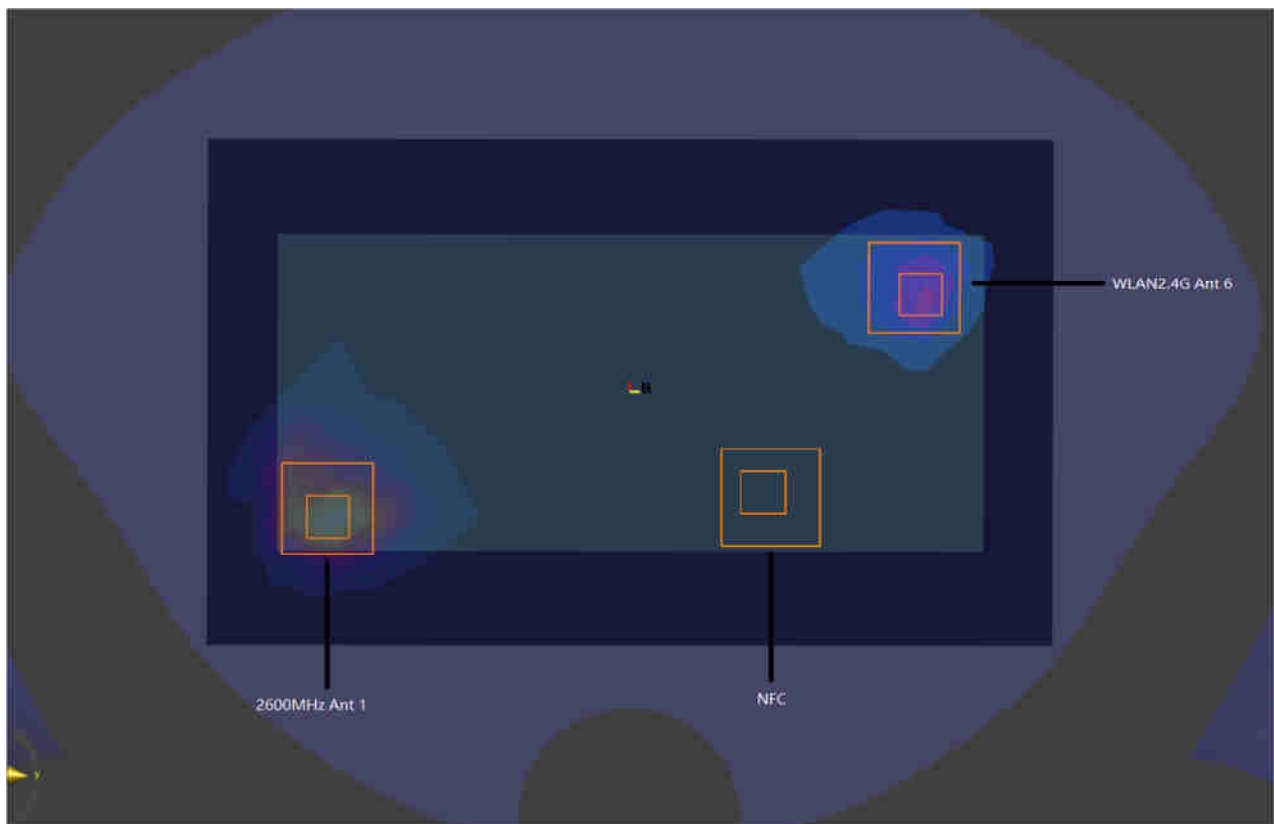

Extremity WWAN+WLAN2.4GHz +NFC



For Hotspot:

Case 1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850 Ant 0	Back	1.307	5mm	-26.5	-75	-204	144.0	2.03	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850 Ant 0	Back	1.307	5mm	-26.5	-75	-204	155.6	2.08	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	GSM850 Ant 0	Back	1.307	5mm	-26.5	-75	-204	146.6	2.08	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II Ant 0	Back	0.986	5mm	-26.5	-88.5	-204	157.3	1.71	0.01	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 4	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II Ant 0	Back	0.986	5mm	-26.5	-88.5	-204	168.9	1.75	0.01	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	WCDMA II Ant 0	Back	0.986	5mm	-26.5	-88.5	-204	160.0	1.75	0.01	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 5	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV Ant 0	Back	1.024	5mm	-26.5	-88.5	-204	157.3	1.75	0.01	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 6	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV Ant 0	Back	1.024	5mm	-26.5	-88.5	-204	168.9	1.79	0.01	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	WCDMA IV Ant 0	Back	1.024	5mm	-26.5	-88.5	-204	160.0	1.79	0.01	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 7	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V Ant 0	Back	1.226	5mm	-26.5	-75	-204	144.0	1.95	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V Ant 0	Back	1.226	5mm	-26.5	-75	-204	155.6	1.99	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	WCDMA V Ant 0	Back	1.226	5mm	-26.5	-75	-204	146.6	1.99	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 9	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 26 Ant 0	Back	1.059	5mm	-26.5	-73.5	-204	142.5	1.79	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				



FCC SAR Test Report

Report No. : FA392114

	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)	X	Y	Z				
Case 10	LTE Band 26 Ant 0	Back	1.059	5mm	-26.5	-73.5	-204	154.2	1.83	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	LTE Band 26 Ant 0	Back	1.059	5mm	-26.5	-73.5	-204	145.1	1.83	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 66 Ant 0	Back	0.98	5mm	-38.5	-76.5	-204	144.0	1.71	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 66 Ant 0	Back	0.98	5mm	-38.5	-76.5	-204	155.4	1.75	0.01	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	LTE Band 66 Ant 0	Back	0.98	5mm	-38.5	-76.5	-204	146.8	1.75	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant 1	Back	1.278	5mm	4	-69	-204	146.4	2.01	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant 1	Back	1.278	5mm	4	-69	-204	158.4	2.05	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	LTE Band 7 Ant 1	Back	1.278	5mm	4	-69	-204	148.4	2.05	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n66 Ant 0	Back	1.105	5mm	-38.5	-76.5	-204	144.0	1.83	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n66 Ant 0	Back	1.105	5mm	-38.5	-76.5	-204	155.4	1.87	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	FR1 n66 Ant 0	Back	1.105	5mm	-38.5	-76.5	-204	146.8	1.87	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n7 Ant 1	Back	1.282	5mm	5	-69	-204	146.8	2.01	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n7 Ant 1	Back	1.282	5mm	5	-69	-204	158.8	2.05	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							



FCC SAR Test Report

Report No. : FA392114

	FR1 n7 Ant 1	Back	1.282	5mm	5	-69	-204	148.8	2.05	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 19	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41 Ant 1	Back	1.282	5mm	4	-65	-204	142.7	2.01	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41 Ant 1	Back	1.282	5mm	4	-65	-204	154.7	2.05	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	LTE Band 41 Ant 1	Back	1.282	5mm	4	-65	-204	144.7	2.05	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 21	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	FR1 n78 Ant 1	Back	1.064	5mm	6.8	-70	-204	148.4	1.79	0.02	Not required
	WLAN2.4GHz Ant 6		0.727	5mm	-50.2	67	-204				
Case 22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	FR1 n78 Ant 1	Back	1.064	5mm	6.8	-70	-204	160.4	1.83	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	FR1 n78 Ant 1	Back	1.064	5mm	6.8	-70	-204	150.3	1.83	0.02	Not required
	WLAN5GHz Ant 6		0.621	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				

For Body-worn:

Case 1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850 Ant 0	Back	1.307	5mm	-26.5	-75	-204	144.0	1.69	0.02	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850 Ant 0	Back	1.307	5mm	-26.5	-75	-204	155.6	1.83	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	GSM850 Ant 0	Back	1.307	5mm	-26.5	-75	-204	146.6	1.83	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900 Ant 0	Back	1.302	5mm	-26.5	-88.5	-204	157.3	1.68	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 4	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900 Ant 0	Back	1.302	5mm	-26.5	-88.5	-204	168.9	1.82	0.01	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	GSM1900 Ant 0	Back	1.302	5mm	-26.5	-88.5	-204	160.0	1.82	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 5	WCDMA II Ant 0	Back	1.269	5mm	-26.5	-88.5	-204	157.3	1.65	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 6	WCDMA II Ant 0	Back	1.269	5mm	-26.5	-88.5	-204	168.9	1.79	0.01	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	WCDMA II Ant 0	Back	1.269	5mm	-26.5	-88.5	-204	160.0	1.79	0.01	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 7	WCDMA IV Ant 0	Back	1.292	5mm	-26.5	-88.5	-204	157.3	1.67	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 8	WCDMA IV Ant 0	Back	1.292	5mm	-26.5	-88.5	-204	168.9	1.81	0.01	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	WCDMA IV Ant 0	Back	1.292	5mm	-26.5	-88.5	-204	160.0	1.81	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 9	LTE Band 66 Ant 0	Back	1.268	5mm	-38.5	-76.5	-204	144.0	1.65	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 10	LTE Band 66 Ant 0	Back	1.268	5mm	-38.5	-76.5	-204	155.4	1.79	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	LTE Band 66 Ant 0	Back	1.268	5mm	-38.5	-76.5	-204	146.8	1.79	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 11	LTE Band 25 Ant 0	Back	1.292	5mm	-26.5	-88.5	-204	157.3	1.67	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 12	LTE Band 25 Ant 0	Back	1.292	5mm	-26.5	-88.5	-204	168.9	1.81	0.01	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	LTE Band 25 Ant 0	Back	1.292	5mm	-26.5	-88.5	-204	160.0	1.81	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 13	LTE Band 7 Ant 1	Back	1.278	5mm	4	-69	-204	146.4	1.66	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				



FCC SAR Test Report

Report No. : FA392114

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 14	LTE Band 7 Ant 1	Back	1.278	5mm	4	-69	-204	158.4	1.80	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	LTE Band 7 Ant 1	Back	1.278	5mm	4	-69	-204	148.4	1.80	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n66 Ant 0	Back	1.269	5mm	-38.5	-76.5	-204	144.0	1.65	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n66 Ant 0	Back	1.269	5mm	-38.5	-76.5	-204	155.4	1.79	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	FR1 n66 Ant 0	Back	1.269	5mm	-38.5	-76.5	-204	146.8	1.79	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n2 Ant 0	Back	1.292	5mm	-28	-87	-204	155.6	1.67	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n2 Ant 0	Back	1.292	5mm	-28	-87	-204	167.2	1.81	0.01	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	FR1 n2 Ant 0	Back	1.292	5mm	-28	-87	-204	158.3	1.81	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 19	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n7 Ant 1	Back	1.282	5mm	5	-69	-204	146.8	1.66	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n7 Ant 1	Back	1.282	5mm	5	-69	-204	158.8	1.80	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	FR1 n7 Ant 1	Back	1.282	5mm	5	-69	-204	148.8	1.80	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 21	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41 Ant 1	Back	1.282	5mm	4	-65	-204	142.7	1.66	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41 Ant 1	Back	1.282	5mm	4	-65	-204	154.7	1.80	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							



FCC SAR Test Report

Report No. : FA392114

	LTE Band 41 Ant 1	Back	1.282	5mm	4	-65	-204	144.7	1.80	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				
Case 23	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V Ant 0	Back	1.226	5mm	-26.5	-75	-204	144.0	1.60	0.01	Not required
	WLAN2.4GHz Ant 6		0.378	5mm	-50.2	67	-204				
Case 24	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V Ant 0	Back	1.226	5mm	-26.5	-75	-204	155.6	1.75	0.01	Not required
	WLAN5GHz Ant 6		0.374	5mm	-55	78	-204				
	Bluetooth Ant 6		0.147	5mm							
	WCDMA V Ant 0	Back	1.226	5mm	-26.5	-75	-204	146.6	1.75	0.02	Not required
	WLAN5GHz Ant 6		0.374	5mm							
	Bluetooth Ant 6		0.147	5mm	-48	70	-204				

For Extremity

Case 1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7 Ant 1	Back	3.158	0mm	3	-69	-204	146.8	4.16	0.06	Not required
	WLAN2.4GHz Ant 6		0.982	0mm	-47	69	-204				
	NFC		0.019	0mm							
	LTE Band 7 Ant 1	Back	3.158	0mm	3	-69	-204	100.9	4.16	0.08	Not required
	WLAN2.4GHz Ant 6		0.982	0mm							
	NFC		0.019	0mm	3	28.2	-177				
Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	FR1 n7 Ant 1	Back	3.176	0mm	4	-70	-204	148.1	4.18	0.06	Not required
	WLAN2.4GHz Ant 6		0.982	0mm	-47	69	-204				
	NFC		0.019	0mm							
	FR1 n7 Ant 1	Back	3.176	0mm	4	-70	-204	101.8	4.18	0.08	Not required
	WLAN2.4GHz Ant 6		0.982	0mm							
	NFC		0.019	0mm	3	28.2	-177				
Case 3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41 Ant 1	Back	3.195	0mm	4	-69	-204	147.1	4.20	0.06	Not required
	WLAN2.4GHz Ant 6		0.982	0mm	-47	69	-204				
	NFC		0.019	0mm							
	LTE Band 41 Ant 1	Back	3.195	0mm	4	-69	-204	100.9	4.20	0.09	Not required
	WLAN2.4GHz Ant 6		0.982	0mm							
	NFC		0.019	0mm	3	28.2	-177				

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [14] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015

-----THE END-----