



## FCC PART 15.247

### TEST REPORT

For

### CLC HONG KONG LIMITED

1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung St., Hung Hom, Kowloon, Hong Kong

**FCC ID: 2AG4WB103**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Star
<b>Test Engineer:</b> <u>Robin Zheng</u> <i>Robin Zheng</i>	
<b>Report Number:</b> <u>RDG160427005-00B</u>	
<b>Report Date:</b> <u>2016-05-06</u>	
<b>Reviewed By:</b> <u>Jerry Zhang</u> EMC Manager	<i>Jerry Zhang</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
ANTENNA CONNECTOR CONSTRUCTION .....	9
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
MEASUREMENT UNCERTAINTY .....	10
EUT SETUP .....	10
EMI TEST RECEIVER SETUP .....	11
TEST PROCEDURE .....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY .....	12
TEST DATA .....	12
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
MEASUREMENT UNCERTAINTY .....	15
EUT SETUP .....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	16
TEST PROCEDURE .....	16
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST RESULTS SUMMARY .....	17
TEST DATA .....	17
<b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST .....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE .....	21
TEST DATA .....	21

<b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA .....	27
<b>FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST.....</b>	<b>33</b>
APPLICABLE STANDARD .....	33
TEST PROCEDURE .....	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA .....	33
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>37</b>
APPLICABLE STANDARD .....	37
TEST PROCEDURE .....	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA .....	37
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>53</b>
APPLICABLE STANDARD .....	53
TEST PROCEDURE .....	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA .....	53
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>59</b>
APPLICABLE STANDARD .....	59
TEST PROCEDURE .....	59
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA .....	59

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *CLC HONG KONG LIMITED*'s product, model number: *B103 (FCC ID: 2AG4WB103)* (the "EUT") in this report was a *Star*, which was measured approximately: 11.25 cm (L) x 4.8cm (W) x 1.3 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5V charging from adapter.

Adapter Information :

Model : PM03

Input :AC 100-240V 50/60Hz 0.15A

Output : DC5.0V, 500mA

*All measurement and test data in this report was gathered from production sample serial number: 160427005 (Assigned byBACL, Dongguan). The EUT was received on 2016-04-28.*

### Objective

This report is prepared on behalf of *CLC HONG KONG LIMITED* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2AG4WB103.

FCC Part 22H, 24E PCE submissions with FCC ID: 2AG4WB103.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in engineering mode.

### EUT Exercise Software

The engineering mode configured the maximum power as default setting.

### Equipment Modifications

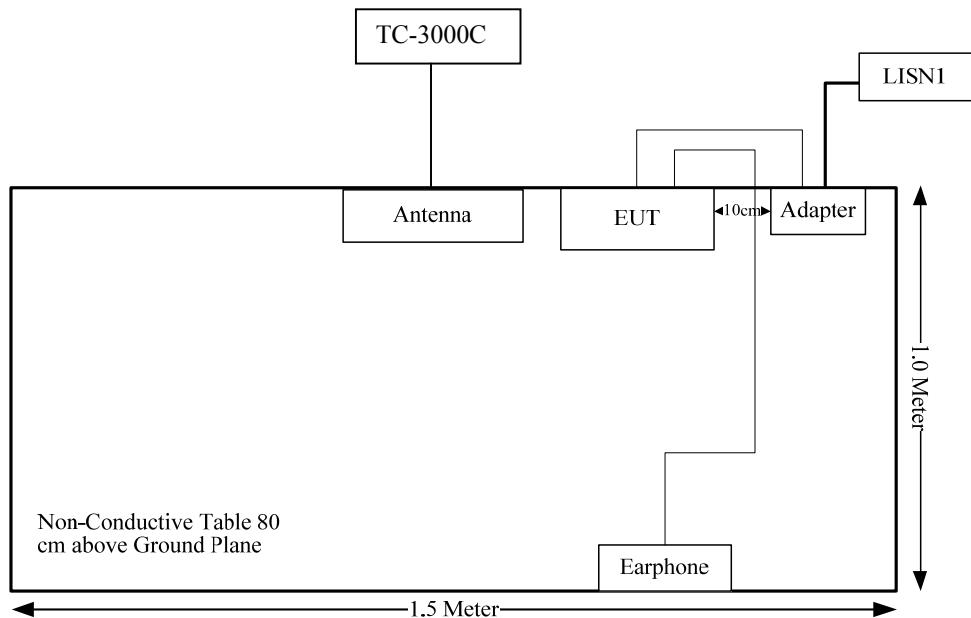
No modification was made to the EUT.

### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
TESCOM	Bluetooth Tester	TC-3000C	3000C000314

### External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.0	USB Port of Adapter	EUT
Earphone Cable	No	No	1.2	Audio Port of EUT	Earphone

**Block Diagram of Test Setup**

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

## FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

### Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### Measurement Result

The tune-up power is 4.8dBm (3.02mW).

$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}] = 3.025 * (\sqrt{2.480}) = 1.0 < 3.0$

**So the stand-alone SAR evaluation is not necessary.**

## FCC §15.203 - ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Antenna Connector Construction

The EUT has one internal antenna arrangement for buletooth and the antenna gain is 1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cisp}}_{\text{r}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cisp}}_{\text{r}}$  of Table 1, then:

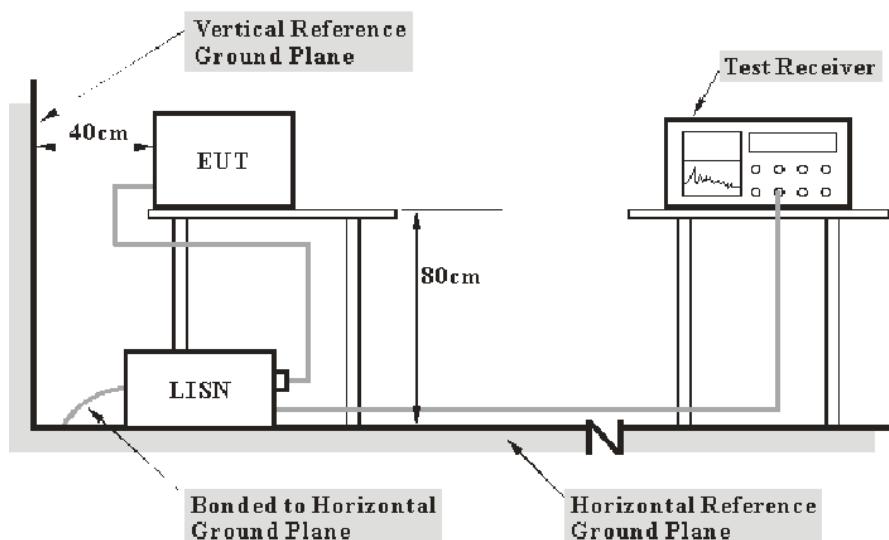
- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{\text{cisp}}_{\text{r}}$

Measurement	$U_{\text{cisp}}_{\text{r}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### EUT Setup



Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**11.2 dB at 4.651370MHz in the Neutral conducted mode**

## Test Data

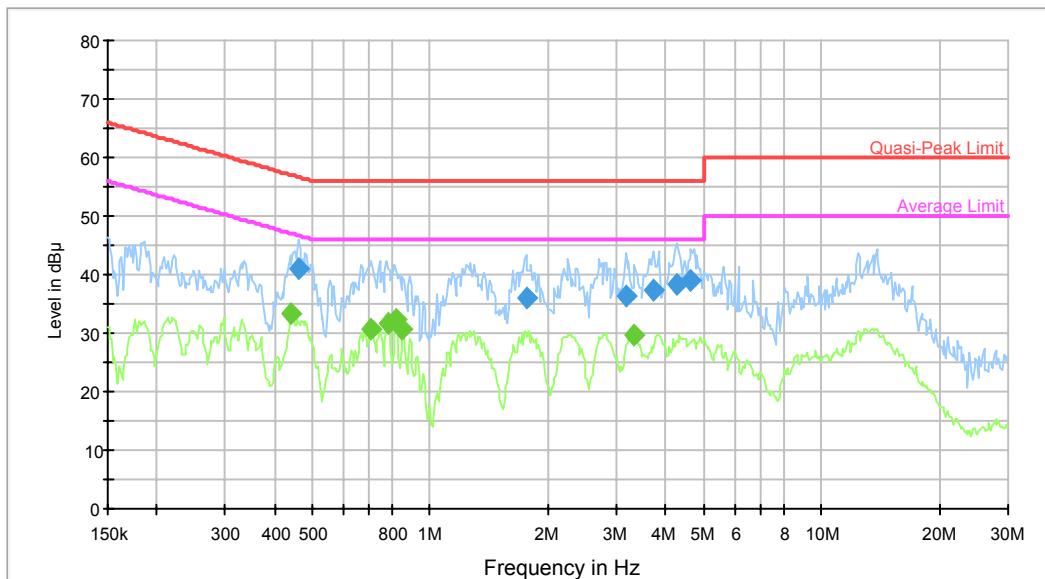
### Environmental Conditions

<b>Temperature:</b>	27.3°C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	100.4kPa

The testing was performed by Robin Zheng on 2016-04-29.

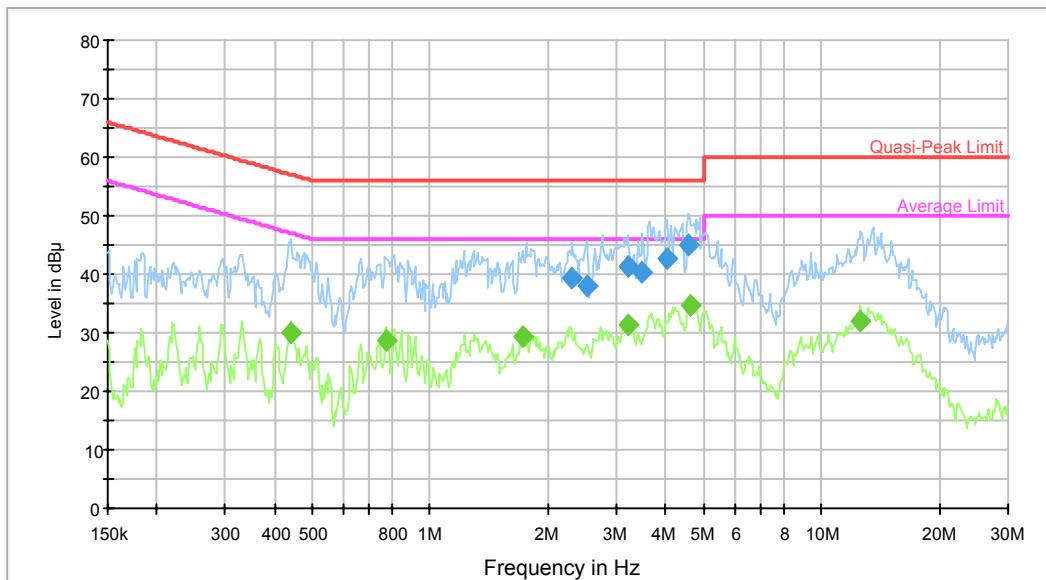
*Test Mode: Transmitting*

**AC120 V, 60 Hz, Line:**



Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.461346	40.8	9.000	L1	10.1	15.9	56.7	Compliance
1.759527	36.1	9.000	L1	10.4	19.9	56.0	Compliance
3.173039	36.2	9.000	L1	10.6	19.8	56.0	Compliance
3.721226	37.5	9.000	L1	10.6	18.5	56.0	Compliance
4.261034	38.5	9.000	L1	10.7	17.5	56.0	Compliance
4.651370	38.8	9.000	L1	10.7	17.2	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.443327	33.4	9.000	L1	10.2	13.6	47.0	Compliance
0.709407	30.5	9.000	L1	10.4	15.5	46.0	Compliance
0.780588	31.7	9.000	L1	10.4	14.3	46.0	Compliance
0.818813	32.3	9.000	L1	10.4	13.7	46.0	Compliance
0.852094	30.8	9.000	L1	10.4	15.2	46.0	Compliance
3.328423	29.7	9.000	L1	10.6	16.3	46.0	Compliance

**AC120 V, 60 Hz, Neutral:**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
2.307034	39.4	9.000	N	10.4	16.6	56.0	Compliance
2.518372	38.0	9.000	N	10.4	18.0	56.0	Compliance
3.198423	41.2	9.000	N	10.6	14.8	56.0	Compliance
3.491417	40.5	9.000	N	10.6	15.5	56.0	Compliance
4.029873	42.7	9.000	N	10.7	13.3	56.0	Compliance
4.577832	44.8	9.000	N	10.7	11.2	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.439808	30.1	9.000	N	10.1	17.0	47.1	Compliance
0.774393	28.7	9.000	N	10.4	17.3	46.0	Compliance
1.731709	29.4	9.000	N	10.4	16.6	46.0	Compliance
3.198423	31.4	9.000	N	10.6	14.6	46.0	Compliance
4.651370	34.8	9.000	N	10.7	11.2	46.0	Compliance
12.593528	31.9	9.000	N	10.6	18.1	50.0	Compliance

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

### Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cisp}}_r$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cisp}}_r$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}}_r)$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}}_r)$ , exceeds the disturbance limit.

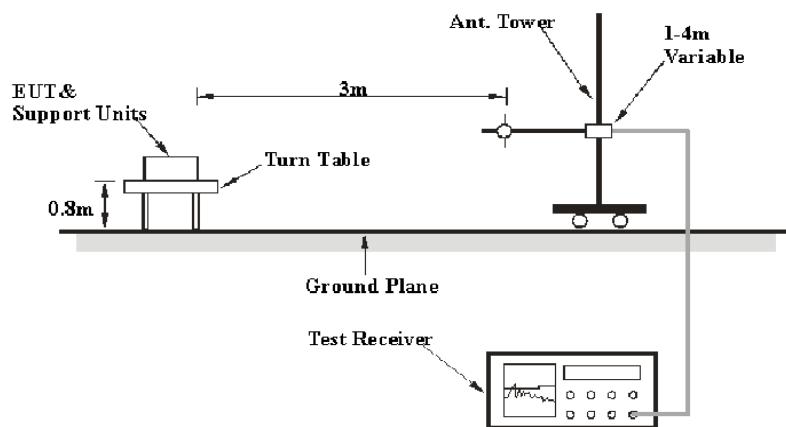
Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB

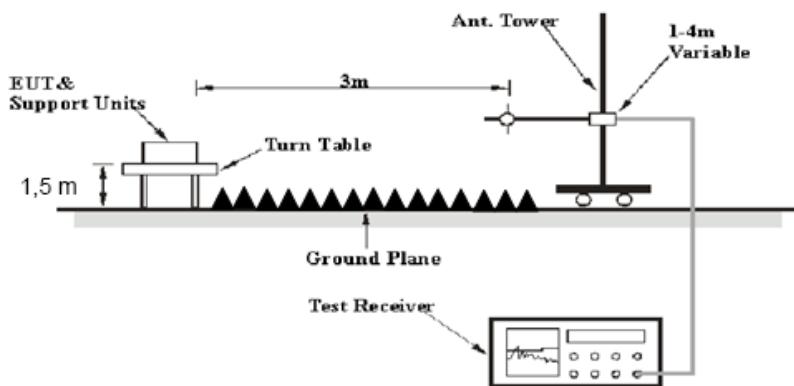
Table 1 – Values of  $U_{\text{cisp}}_r$

Measurement	$U_{\text{cisp}}_r$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1GHz:



**Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

**12.30 dB at 2400 MHz in the Horizontal polarization**

## Test Data

### Environmental Conditions

Temperature:	28.8°C
Relative Humidity:	55%
ATM Pressure:	100.4kPa

*The testing was performed by Robin Zheng on 2016-05-04.*

*Test Mode: Transmitting*

*BDR Mode (GFSK):*

Frequency (MHz)	Receiver		Rx Antenna	Polar (H/V)	Factor (dB)	Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC 15.247	
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)							Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel: 2402 MHz										
2402	64.65	PK	H	17.10	3.66	0.00	85.41	N/A	N/A	
2402	54.02	AV	H	17.10	3.66	0.00	74.78	N/A	N/A	
2402	64.34	PK	V	17.10	3.66	0.00	85.10	N/A	N/A	
2402	53.83	AV	V	17.10	3.66	0.00	74.59	N/A	N/A	
2400	40.95	PK	H	17.10	3.65	0.00	61.70	74.00	12.30	
2400	15.54	AV	H	17.10	3.65	0.00	36.29	54.00	17.71	
4804	32.49	PK	H	29.00	5.06	27.41	39.14	74.00	34.86	
4804	19.23	AV	H	29.00	5.06	27.41	25.88	54.00	28.12	
7206	31.64	PK	H	37.92	6.61	25.91	50.26	74.00	23.74	
7206	18.69	AV	H	37.92	6.61	25.91	37.31	54.00	16.69	
9608	29.75	PK	H	42.08	8.53	27.55	52.81	74.00	21.19	
9608	17.03	AV	H	42.08	8.53	27.55	40.09	54.00	13.91	
3720	38.22	PK	H	23.99	4.60	27.34	39.47	74.00	34.53	
3720	25.65	AV	H	23.99	4.60	27.34	26.90	54.00	27.10	
236.7	33.16	QP	H	12.13	1.85	21.48	25.66	46.00	20.34	
Middle Channel: 2441 MHz										
2441	65.52	PK	H	17.14	3.76	0.00	86.42	N/A	N/A	
2441	54.81	AV	H	17.14	3.76	0.00	75.71	N/A	N/A	
2441	65.06	PK	V	17.14	3.76	0.00	85.96	N/A	N/A	
2441	54.46	AV	V	17.14	3.76	0.00	75.36	N/A	N/A	
4882	33.02	PK	H	29.44	5.19	27.42	40.23	74.00	33.77	
4882	19.71	AV	H	29.44	5.19	27.42	26.92	54.00	27.08	
7323	31.89	PK	H	37.87	6.75	25.88	50.63	74.00	23.37	
7323	18.95	AV	H	37.87	6.75	25.88	37.69	54.00	16.31	
9764	29.77	PK	H	41.77	8.62	27.20	52.96	74.00	21.04	
9764	17.07	AV	H	41.77	8.62	27.20	40.26	54.00	13.74	
3720	37.88	PK	H	23.99	4.60	27.34	39.13	74.00	34.87	
3720	25.93	AV	H	23.99	4.60	27.34	27.18	54.00	26.82	
3087	32.9	PK	H	18.96	6.79	27.46	31.19	74.00	42.81	
3087	20.36	AV	H	18.96	6.79	27.46	18.65	54.00	35.35	
236.7	33.65	QP	H	12.13	1.85	21.48	26.15	46.00	19.85	
High Channel: 2480 MHz										
2480	66.03	PK	H	17.18	3.68	0.00	86.89	N/A	N/A	
2480	55.35	AV	H	17.18	3.68	0.00	76.21	N/A	N/A	
2480	65.7	PK	V	17.18	3.68	0.00	86.56	N/A	N/A	
2480	54.98	AV	V	17.18	3.68	0.00	75.84	N/A	N/A	
2483.5	39.85	PK	H	17.18	3.67	0.00	60.70	74.00	13.30	
2483.5	14.13	AV	H	17.18	3.67	0.00	34.98	54.00	19.02	
4960	33.57	PK	H	29.88	5.34	27.43	41.36	74.00	32.64	
4960	20.16	AV	H	29.88	5.34	27.43	27.95	54.00	26.05	
7440	32.15	PK	H	37.82	6.89	25.97	50.89	74.00	23.11	
7440	19.18	AV	H	37.82	6.89	25.97	37.92	54.00	16.08	
9920	29.85	PK	H	41.46	8.71	26.66	53.36	74.00	20.64	
9920	17.15	AV	H	41.46	8.71	26.66	40.66	54.00	13.34	
3720	38.12	PK	H	23.99	4.60	27.34	39.37	74.00	34.63	
3720	25.67	AV	H	23.99	4.60	27.34	26.92	54.00	27.08	
236.7	34.58	QP	H	12.13	1.85	21.48	27.08	46.00	18.92	

EDR Mode ( $\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC 15.247	
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	63.21	PK	H	17.10	3.66	0.00	83.97	N/A	N/A
2402	51.67	AV	H	17.10	3.66	0.00	72.43	N/A	N/A
2402	62.92	PK	V	17.10	3.66	0.00	83.68	N/A	N/A
2402	51.31	AV	V	17.10	3.66	0.00	72.07	N/A	N/A
2400	40.37	PK	H	17.10	3.65	0.00	61.12	74.00	12.88
2400	14.7	AV	H	17.10	3.65	0.00	35.45	54.00	18.55
4804	31.46	PK	H	29.00	5.06	27.41	38.11	74.00	35.89
4804	18.16	AV	H	29.00	5.06	27.41	24.81	54.00	29.19
7206	31.15	PK	H	37.92	6.61	25.91	49.77	74.00	24.23
7206	18.28	AV	H	37.92	6.61	25.91	36.90	54.00	17.10
9608	29.63	PK	H	42.08	8.53	27.55	52.69	74.00	21.31
9608	16.89	AV	H	42.08	8.53	27.55	39.95	54.00	14.05
3720	38.1	PK	H	23.99	4.60	27.34	39.35	74.00	34.65
3720	25.66	AV	H	23.99	4.60	27.34	26.91	54.00	27.09
236.7	32.91	QP	H	12.13	1.85	21.48	25.41	46.00	20.59
Middle Channel: 2441 MHz									
2441	63.8	PK	H	17.14	3.76	0.00	84.70	N/A	N/A
2441	52.44	AV	H	17.14	3.76	0.00	73.34	N/A	N/A
2441	63.62	PK	V	17.14	3.76	0.00	84.52	N/A	N/A
2441	51.97	AV	V	17.14	3.76	0.00	72.87	N/A	N/A
4882	31.77	PK	H	29.44	5.19	27.42	38.98	74.00	35.02
4882	18.53	AV	H	29.44	5.19	27.42	25.74	54.00	28.26
7323	31.33	PK	H	37.87	6.75	25.88	50.07	74.00	23.93
7323	18.39	AV	H	37.87	6.75	25.88	37.13	54.00	16.87
9764	29.66	PK	H	41.77	8.62	27.20	52.85	74.00	21.15
9764	16.96	AV	H	41.77	8.62	27.20	40.15	54.00	13.85
3720	37.99	PK	H	23.99	4.60	27.34	39.24	74.00	34.76
3720	25.5	AV	H	23.99	4.60	27.34	26.75	54.00	27.25
3087	32.68	PK	H	18.96	6.79	27.46	30.97	74.00	43.03
3087	20.58	AV	H	18.96	6.79	27.46	18.87	54.00	35.13
236.7	34.63	QP	H	12.13	1.85	21.48	27.13	46.00	18.87
High Channel: 2480 MHz									
2480	64.32	PK	H	17.18	3.68	0.00	85.18	N/A	N/A
2480	52.89	AV	H	17.18	3.68	0.00	73.75	N/A	N/A
2480	64.03	PK	V	17.18	3.68	0.00	84.89	N/A	N/A
2480	52.58	AV	V	17.18	3.68	0.00	73.44	N/A	N/A
2483.5	39.1	PK	H	17.18	3.67	0.00	59.95	74.00	14.05
2483.5	14.1	AV	H	17.18	3.67	0.00	34.95	54.00	19.05
4960	32.15	PK	H	29.88	5.34	27.43	39.94	74.00	34.06
4960	18.9	AV	H	29.88	5.34	27.43	26.69	54.00	27.31
7440	31.5	PK	H	37.82	6.89	25.97	50.24	74.00	23.76
7440	18.52	AV	H	37.82	6.89	25.97	37.26	54.00	16.74
9920	29.68	PK	H	41.46	8.71	26.66	53.19	74.00	20.81
9920	17	AV	H	41.46	8.71	26.66	40.51	54.00	13.49
3720	38.21	PK	H	23.99	4.60	27.34	39.46	74.00	34.54
3720	25.71	AV	H	23.99	4.60	27.34	26.96	54.00	27.04
236.7	34.78	QP	H	12.13	1.85	21.48	27.28	46.00	18.72

## EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC 15.247	
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	63.23	PK	H	17.10	3.66	0.00	83.99	N/A	N/A
2402	51.76	AV	H	17.10	3.66	0.00	72.52	N/A	N/A
2402	62.92	PK	V	17.10	3.66	0.00	83.68	N/A	N/A
2402	51.47	AV	V	17.10	3.66	0.00	72.23	N/A	N/A
2400	40.75	PK	H	17.10	3.65	0.00	61.50	74.00	12.50
2400	14.68	AV	H	17.10	3.65	0.00	35.43	54.00	18.57
4804	31.68	PK	H	29.00	5.06	27.41	38.33	74.00	35.67
4804	18.41	AV	H	29.00	5.06	27.41	25.06	54.00	28.94
7206	31.29	PK	H	37.92	6.61	25.91	49.91	74.00	24.09
7206	18.44	AV	H	37.92	6.61	25.91	37.06	54.00	16.94
9608	29.78	PK	H	42.08	8.53	27.55	52.84	74.00	21.16
9608	16.99	AV	H	42.08	8.53	27.55	40.05	54.00	13.95
3720	38.27	PK	H	23.99	4.60	27.34	39.52	74.00	34.48
3720	25.94	AV	H	23.99	4.60	27.34	27.19	54.00	26.81
236.7	31.85	QP	H	12.13	1.85	21.48	24.35	46.00	21.65
Middle Channel: 2441 MHz									
2441	64	PK	H	17.14	3.76	0.00	84.90	N/A	N/A
2441	52.48	AV	H	17.14	3.76	0.00	73.38	N/A	N/A
2441	63.65	PK	V	17.14	3.76	0.00	84.55	N/A	N/A
2441	52.22	AV	V	17.14	3.76	0.00	73.12	N/A	N/A
4882	32.06	PK	H	29.44	5.19	27.42	39.27	74.00	34.73
4882	18.82	AV	H	29.44	5.19	27.42	26.03	54.00	27.97
7323	31.47	PK	H	37.87	6.75	25.88	50.21	74.00	23.79
7323	18.51	AV	H	37.87	6.75	25.88	37.25	54.00	16.75
9764	29.79	PK	H	41.77	8.62	27.20	52.98	74.00	21.02
9764	17.12	AV	H	41.77	8.62	27.20	40.31	54.00	13.69
3720	38.15	PK	H	23.99	4.60	27.34	39.40	74.00	34.60
3720	25.61	AV	H	23.99	4.60	27.34	26.86	54.00	27.14
3087	32.68	PK	H	18.96	6.79	27.46	30.97	74.00	43.03
3087	20.12	AV	H	18.96	6.79	27.46	18.41	54.00	35.59
236.7	32.51	QP	H	12.13	1.85	21.48	25.01	46.00	20.99
High Channel: 2480 MHz									
2480	64.42	PK	H	17.18	3.68	0.00	85.28	N/A	N/A
2480	52.88	AV	H	17.18	3.68	0.00	73.74	N/A	N/A
2480	64.11	PK	V	17.18	3.68	0.00	84.97	N/A	N/A
2480	52.57	AV	V	17.18	3.68	0.00	73.43	N/A	N/A
2483.5	38.84	PK	H	17.18	3.67	0.00	59.69	74.00	14.31
2483.5	14.06	AV	H	17.18	3.67	0.00	34.91	54.00	19.09
4960	32.38	PK	H	29.88	5.34	27.43	40.17	74.00	33.83
4960	19.15	AV	H	29.88	5.34	27.43	26.94	54.00	27.06
7440	31.69	PK	H	37.82	6.89	25.97	50.43	74.00	23.57
7440	18.67	AV	H	37.82	6.89	25.97	37.41	54.00	16.59
9920	29.84	PK	H	41.46	8.71	26.66	53.35	74.00	20.65
9920	17.16	AV	H	41.46	8.71	26.66	40.67	54.00	13.33
3720	38.19	PK	H	23.99	4.60	27.34	39.44	74.00	34.56
3720	25.89	AV	H	23.99	4.60	27.34	27.14	54.00	26.86
236.7	33.21	QP	H	12.13	1.85	21.48	25.71	46.00	20.29

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	28.8°C
Relative Humidity:	55%
ATM Pressure:	100.4kPa

The testing was performed by Robin Zheng on 2016-05-04.

**Test Result:** Compliance.

Please refer to following tables and plots

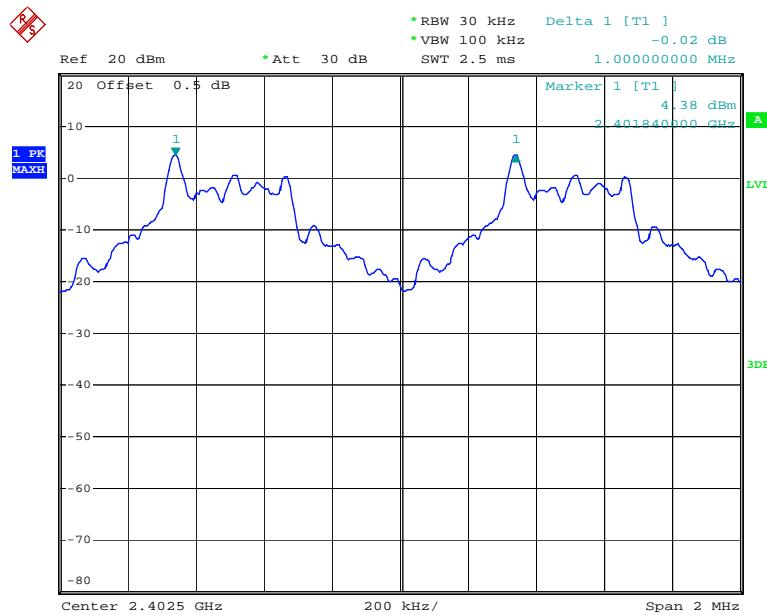
*Test Mode: Transmitting*

Mode	Channel	Frequency	Channel Separation	Limit	Result
		MHz	MHz	MHz	
BDR (GFSK)	Low	2402	1.000	0.49	Compliance
	Middle	2441	1.004	0.55	
	High	2480	1.004	0.55	
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.000	0.75	Compliance
	Middle	2441	1.004	0.75	
	High	2480	1.000	0.75	
EDR (8DPSK)	Low	2402	1.000	0.78	Compliance
	Middle	2441	1.004	0.77	
	High	2480	1.004	0.77	

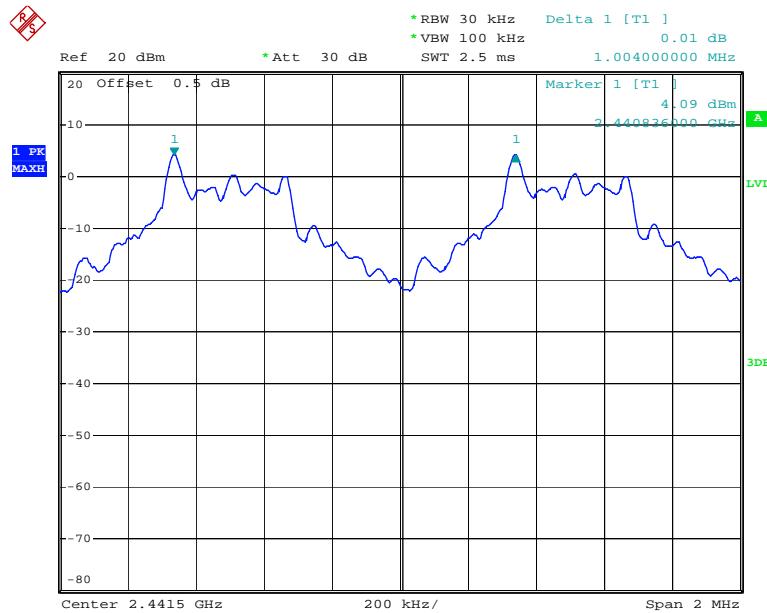
*Note: Limit = (2/3) × 20dB bandwidth*

*BDR Mode (GFSK):*

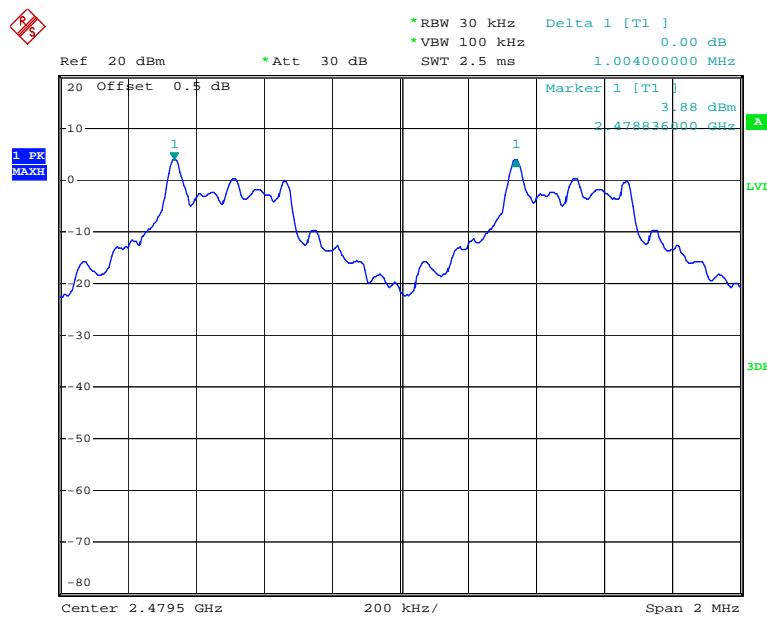
### Low Channel



Date: 4.MAY.2016 10:59:03

**Middle Channel**

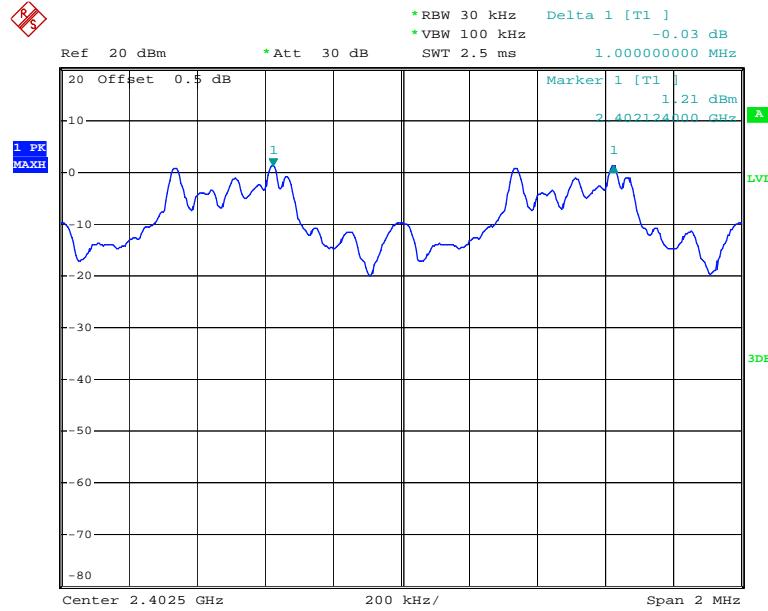
Date: 4.MAY.2016 11:00:32

**High Channel**

Date: 4.MAY.2016 11:01:17

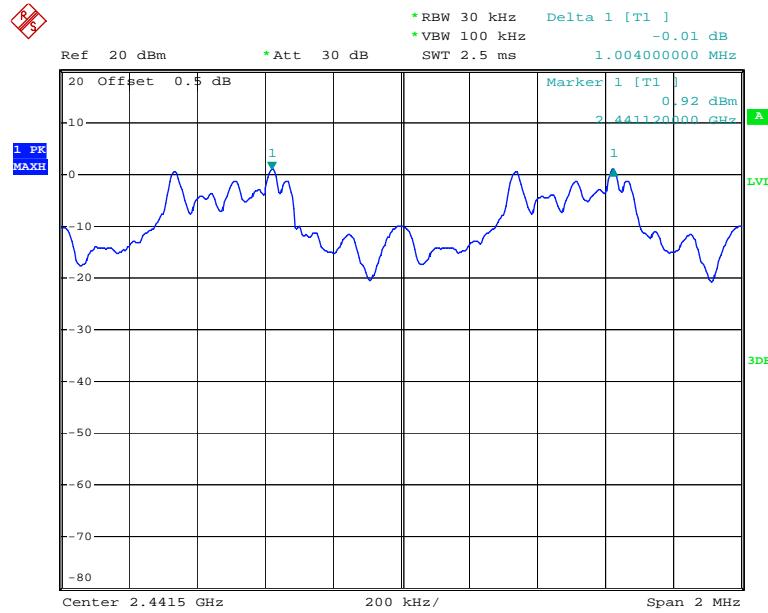
*EDR Mode ( $\pi/4$ -DQPSK):*

### Low Channel

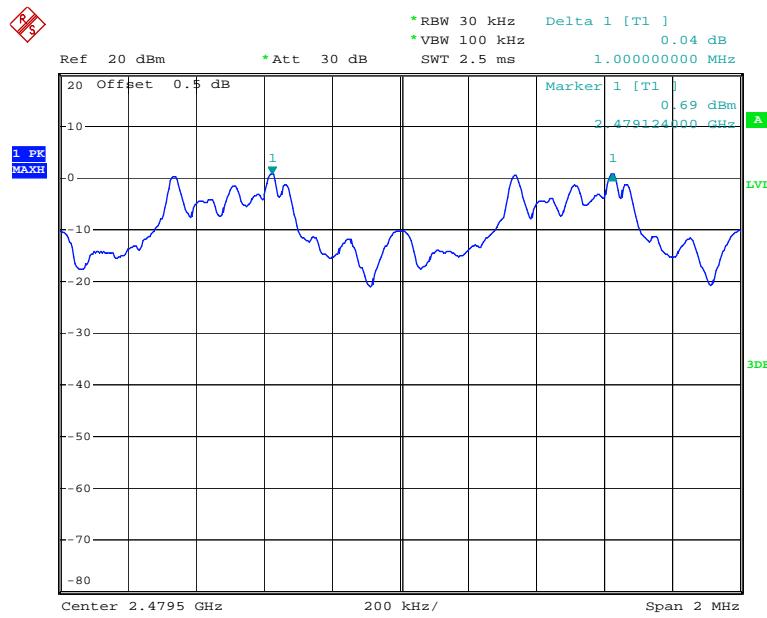


Date: 4.MAY.2016 11:02:28

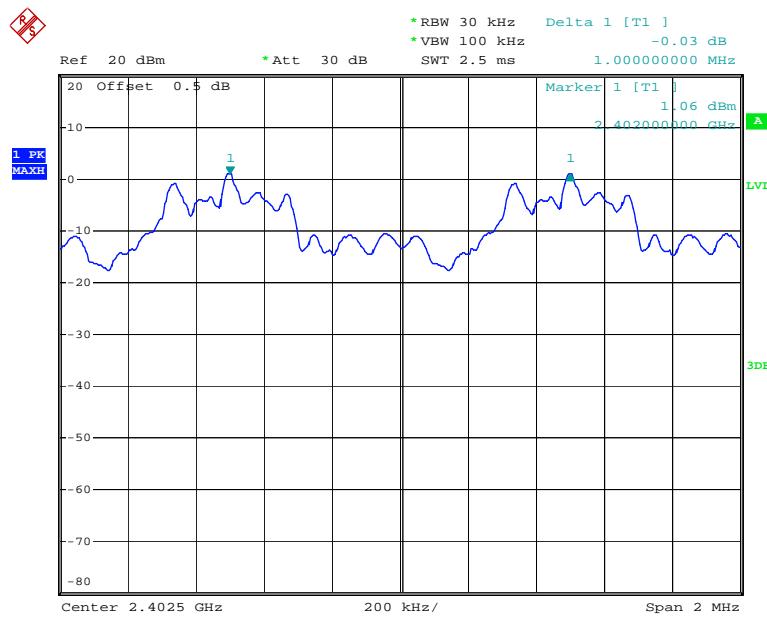
### Middle Channel



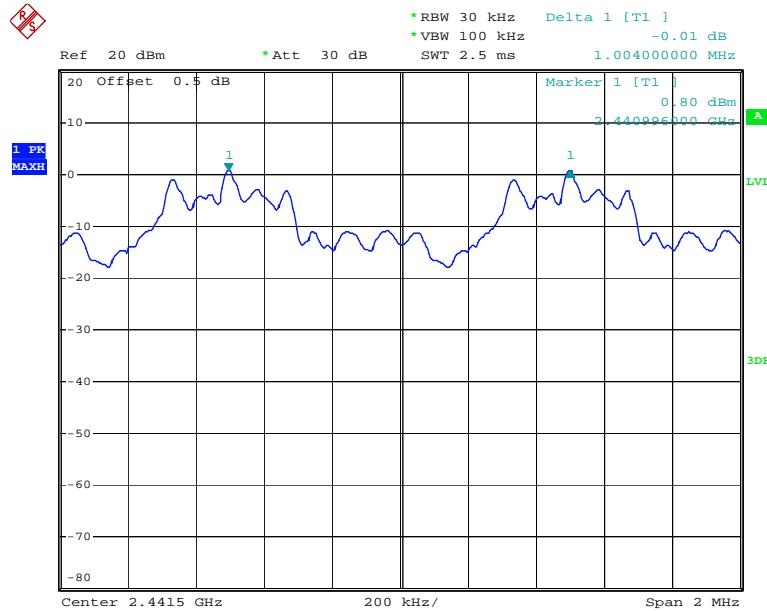
Date: 4.MAY.2016 11:03:30

**High Channel**

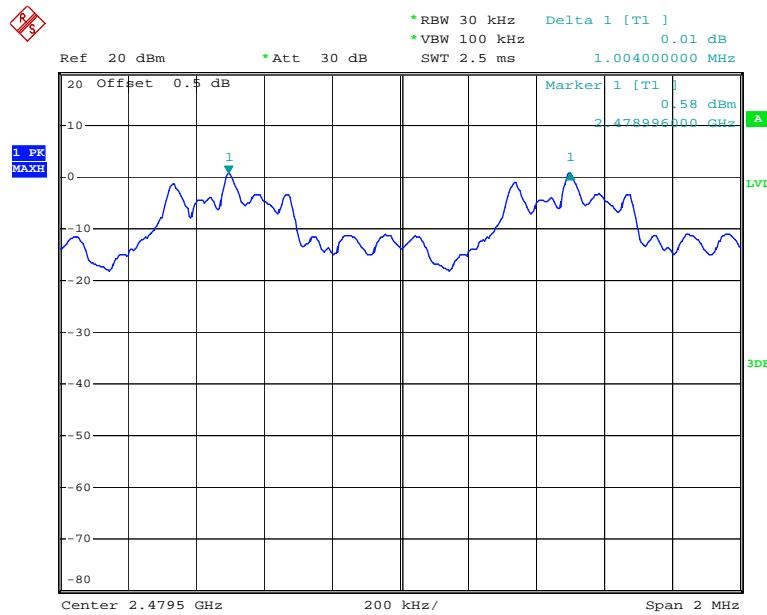
Date: 4.MAY.2016 11:05:03

*EDR Mode (8-DPSK):***Low Channel**

Date: 4.MAY.2016 11:06:24

**Middle Channel**

Date: 4.MAY.2016 11:07:41

**High Channel**

Date: 4.MAY.2016 11:08:33

## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	28.8°C
Relative Humidity:	55%
ATM Pressure:	100.4kPa

The testing was performed by Robin Zheng on 2016-05-04.

**Test Result:** Compliance.

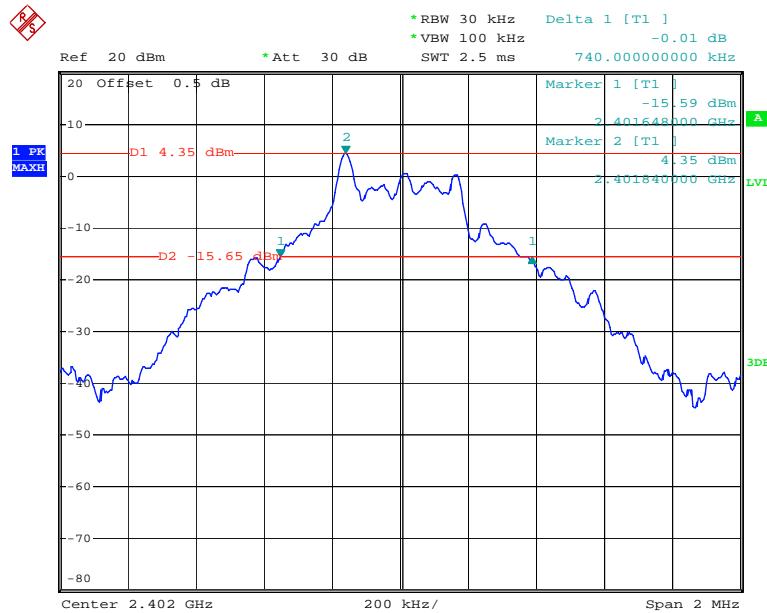
Please refer to following tables and plots

*Test Mode: Transmitting*

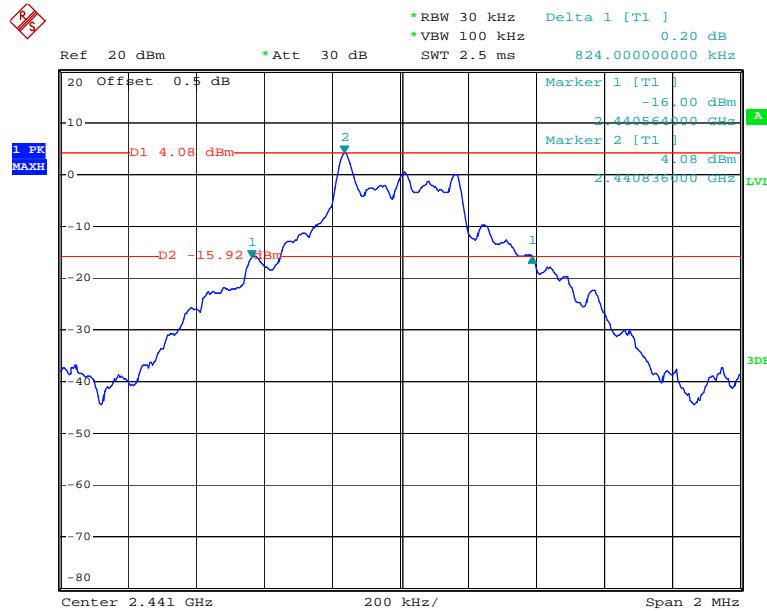
Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.74
	Middle	2441	0.82
	High	2480	0.83
EDR Mode ( $\pi/4$ -DQPSK):	Low	2402	1.12
	Middle	2441	1.12
	High	2480	1.12
EDR Mode (8-DPSK):	Low	2402	1.17
	Middle	2441	1.16
	High	2480	1.16

*BDR Mode (GFSK):*

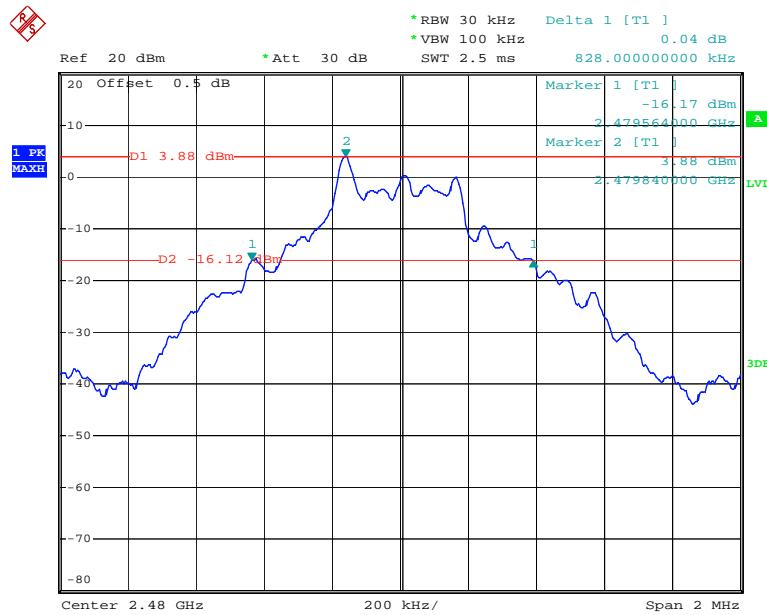
### Low Channel



Date: 4.MAY.2016 09:56:58

**Middle Channel**

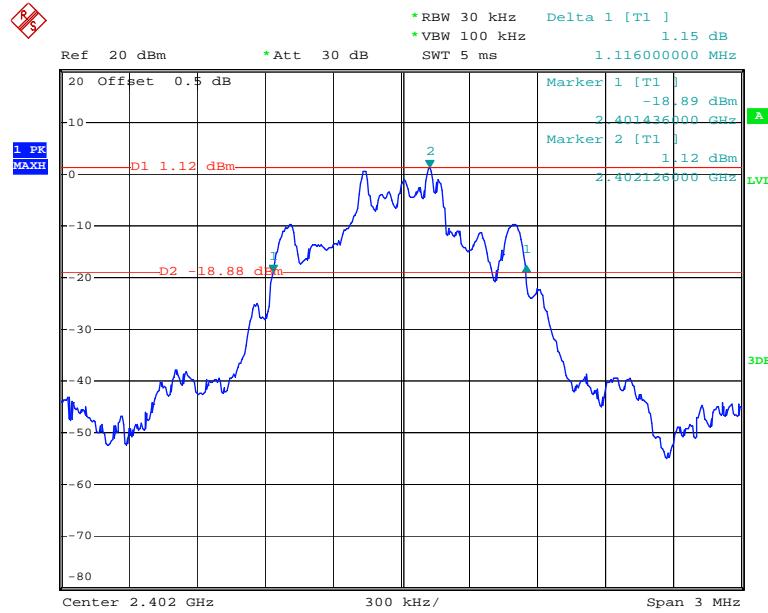
Date: 4.MAY.2016 09:58:35

**High Channel**

Date: 4.MAY.2016 09:59:47

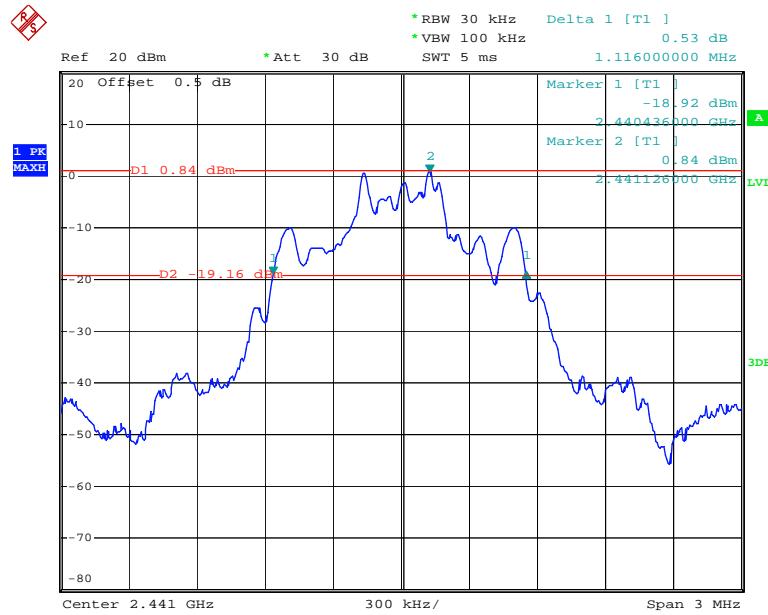
*EDR Mode ( $\pi/4$ -DQPSK):*

### Low Channel

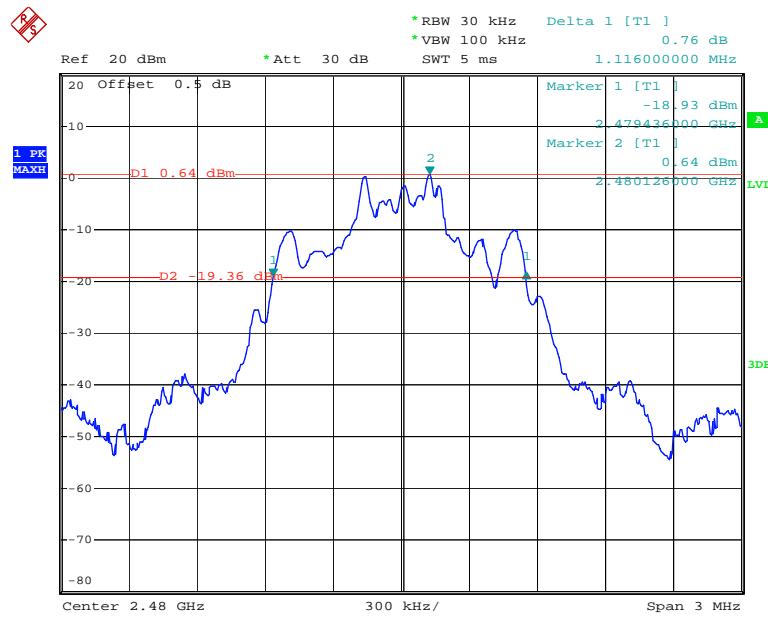


Date: 4.MAY.2016 10:01:32

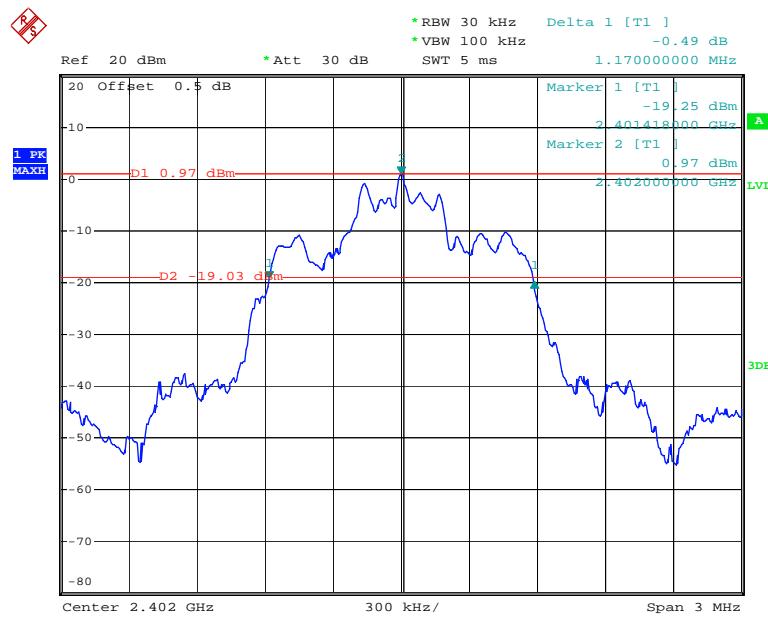
### Middle Channel



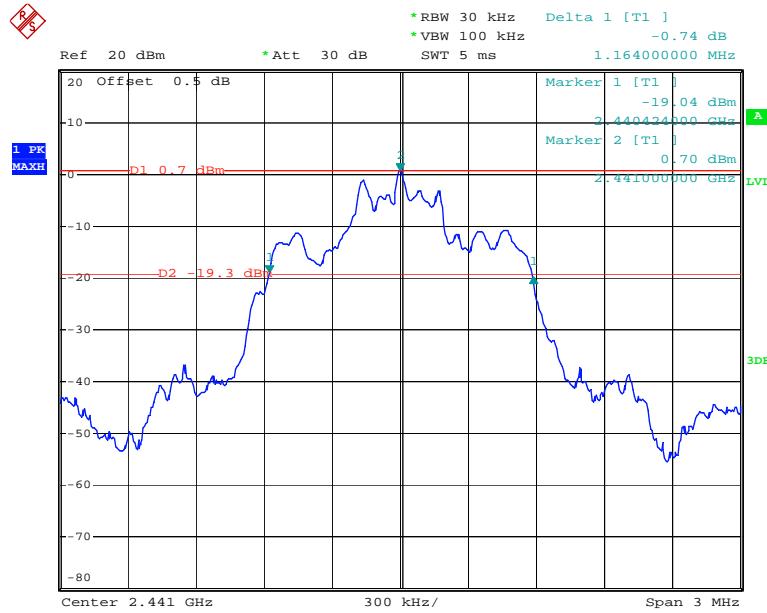
Date: 4.MAY.2016 10:02:59

**High Channel**

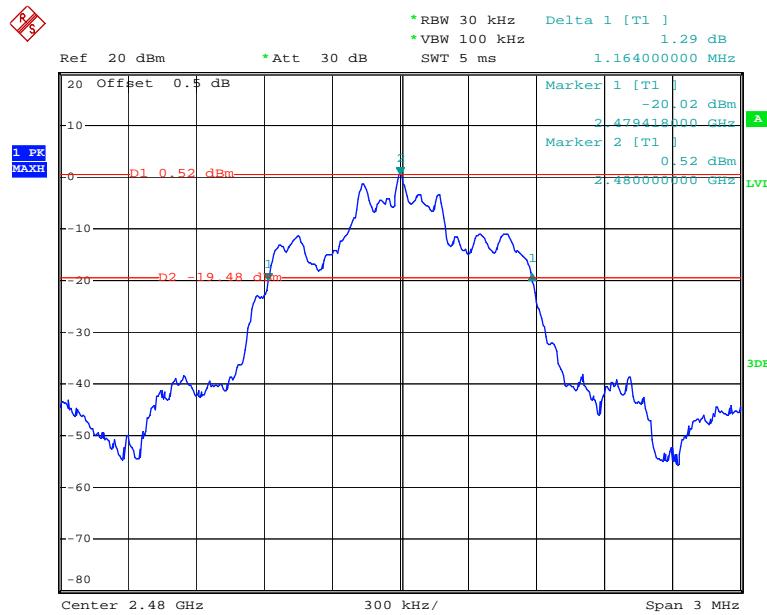
Date: 4.MAY.2016 10:10:24

**EDR Mode (8-DPSK):****Low Channel**

Date: 4.MAY.2016 10:12:13

**Middle Channel**

Date: 4.MAY.2016 10:13:59

**High Channel**

Date: 4.MAY.2016 10:15:03

## FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	28.8°C
Relative Humidity:	55%
ATM Pressure:	100.4kPa

The testing was performed by Robin Zheng on 2016-05-04.

**Test Result:** Compliance.

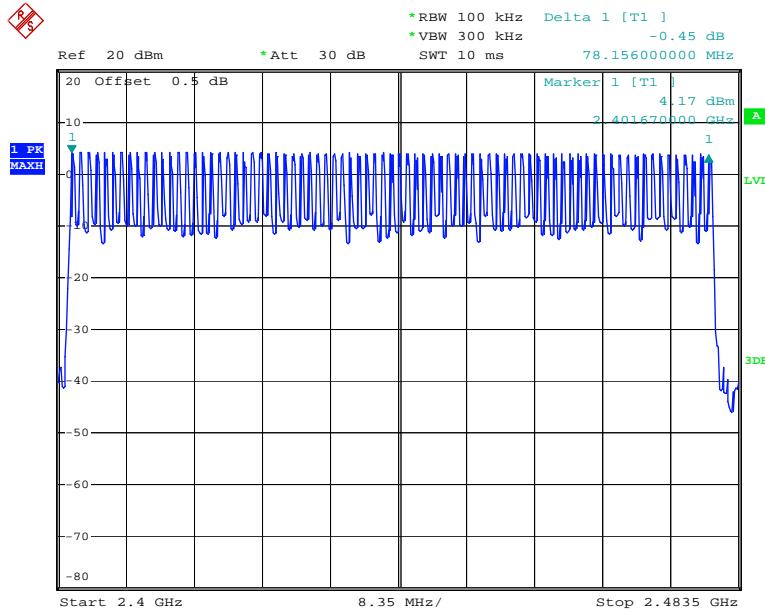
Please refer to following tables and plots

*Test Mode: Transmitting*

*BDR Mode (GFSK):*

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### Number of Hopping Channels

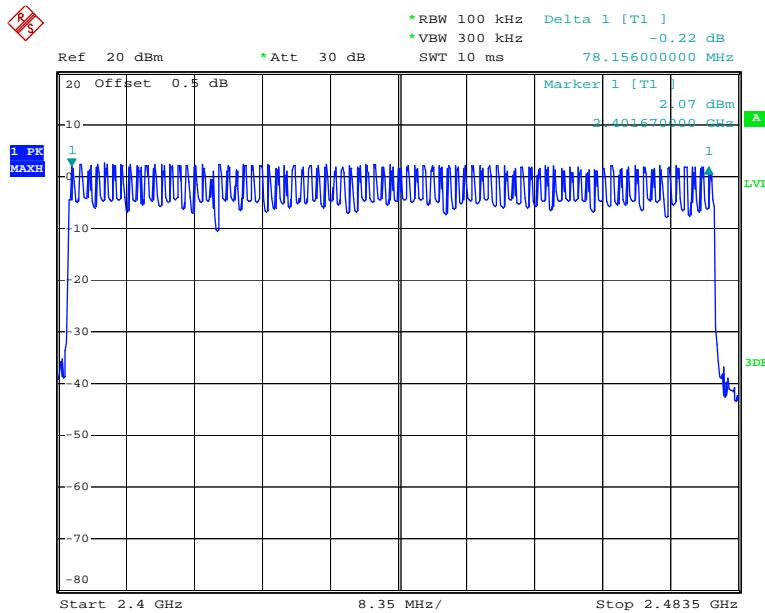


Date: 4.MAY.2016 10:21:15

EDR Mode ( $\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	$\geq 15$

### Number of Hopping Channels

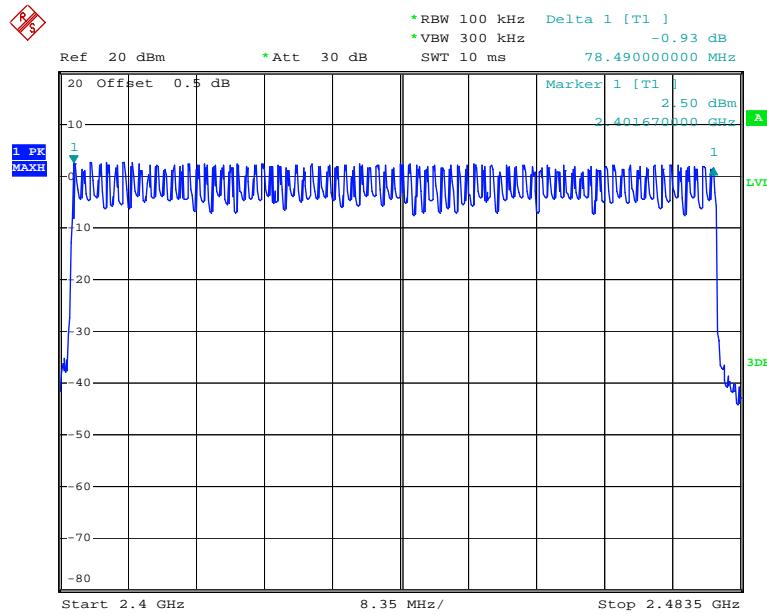


Date: 4.MAY.2016 10:29:04

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### Number of Hopping Channels



Date: 4.MAY.2016 10:35:59

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s  
Hop rate=1600/s

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	28.8°C
<b>Relative Humidity:</b>	55%
<b>ATM Pressure:</b>	100.4kPa

The testing was performed by Robin Zheng on 2016-05-04.

**Test Result:** Compliance.

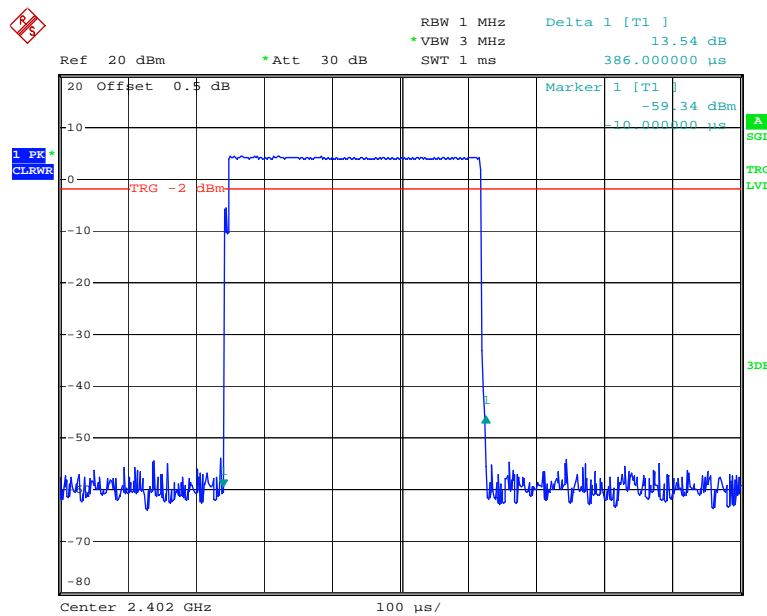
Please refer to following tables and plots

*Test Mode: Transmitting*

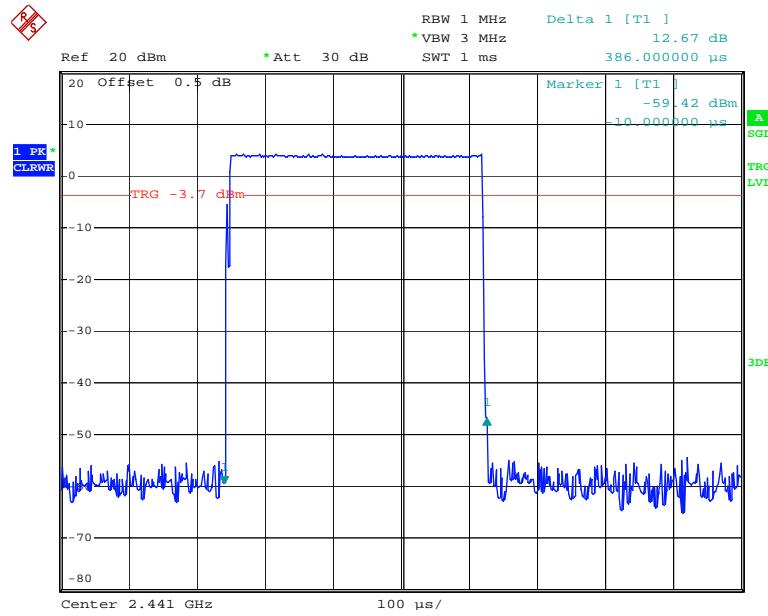
*BDR Mode (GFSK):*

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
<b>DH1</b>	Low	0.386	0.124	0.4	Compliance
	Middle	0.386	0.124	0.4	Compliance
	High	0.386	0.124	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s					
<b>DH3</b>	Low	1.656	0.265	0.4	Compliance
	Middle	1.656	0.265	0.4	Compliance
	High	1.656	0.265	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s					
<b>DH5</b>	Low	2.910	0.310	0.4	Compliance
	Middle	2.920	0.311	0.4	Compliance
	High	2.910	0.310	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s					

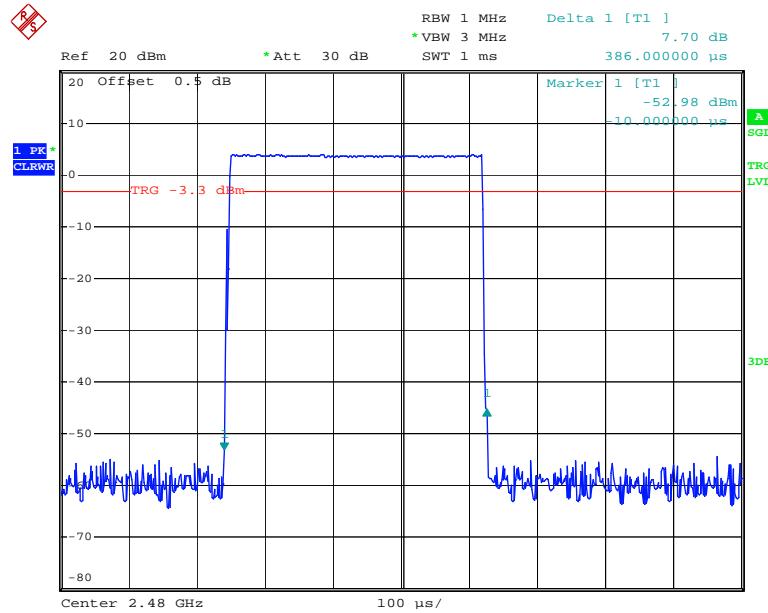
### DH1: Low Channel



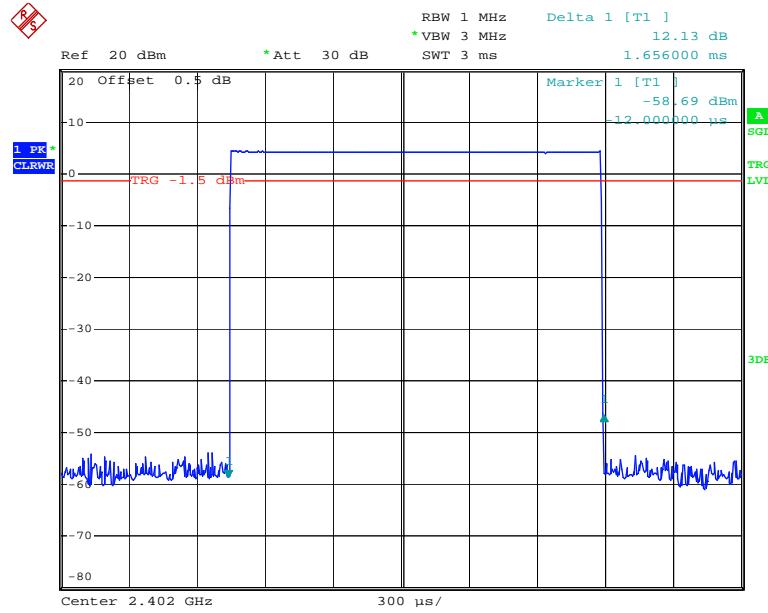
Date: 4.MAY.2016 10:36:57

**DH1: Middle Channel**

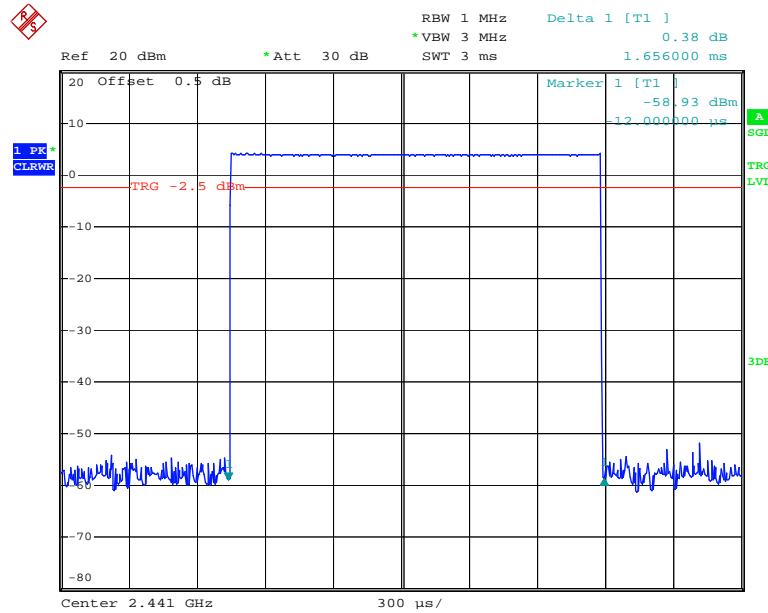
Date: 4.MAY.2016 10:37:06

**DH1: High Channel**

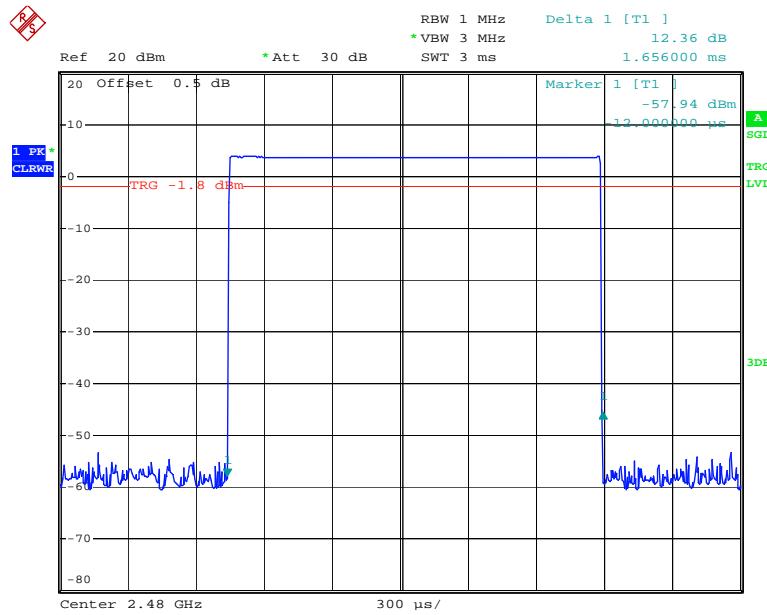
Date: 4.MAY.2016 10:37:14

**DH3: Low Channel**

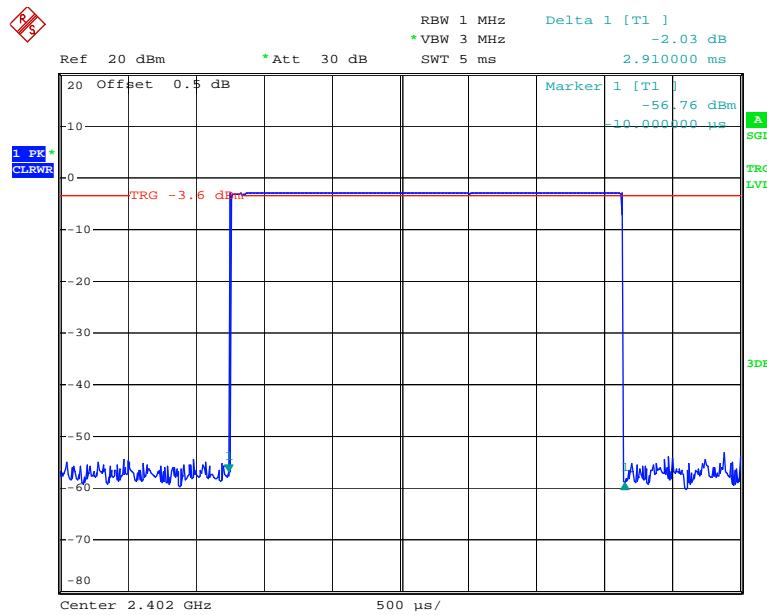
Date: 4.MAY.2016 10:37:46

**DH3: Middle Channel**

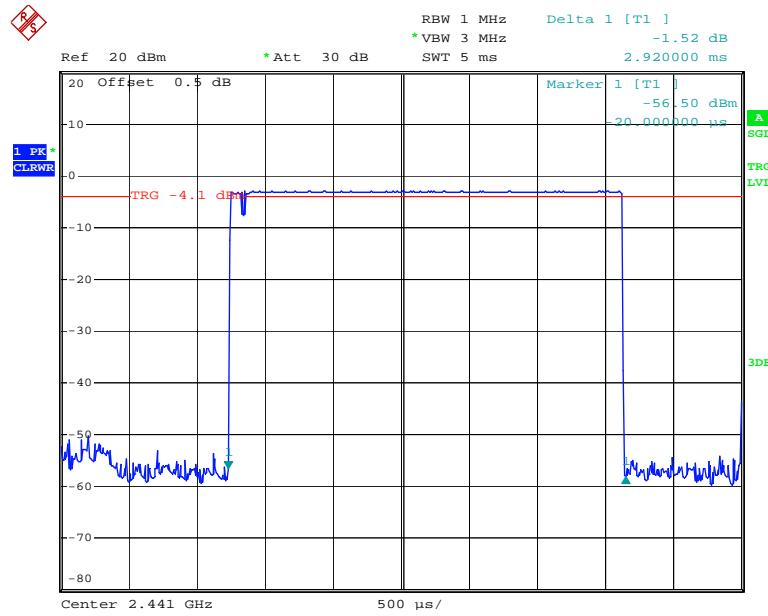
Date: 4.MAY.2016 10:37:54

**DH3: High Channel**

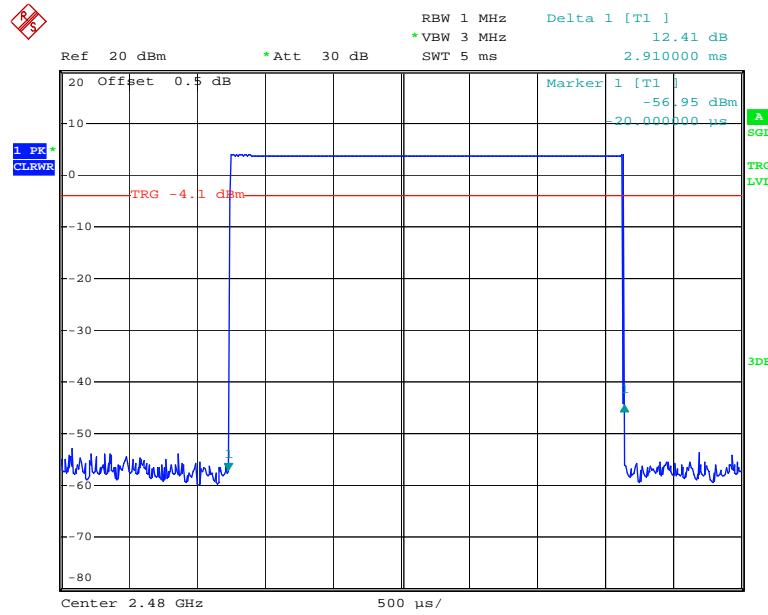
Date: 4.MAY.2016 10:38:03

**DH5: Low Channel**

Date: 4.MAY.2016 10:38:29

**DH5: Middle Channel**

Date: 4.MAY.2016 10:38:37

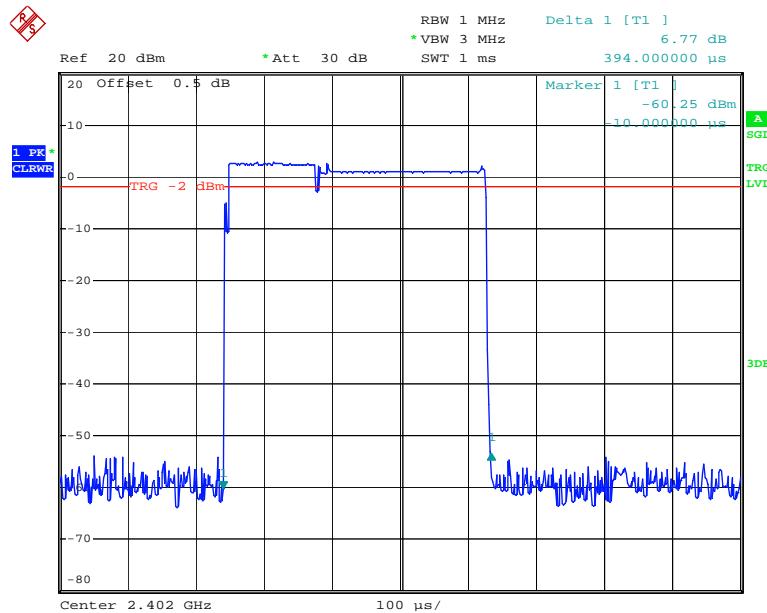
**DH5: High Channel**

Date: 4.MAY.2016 10:38:49

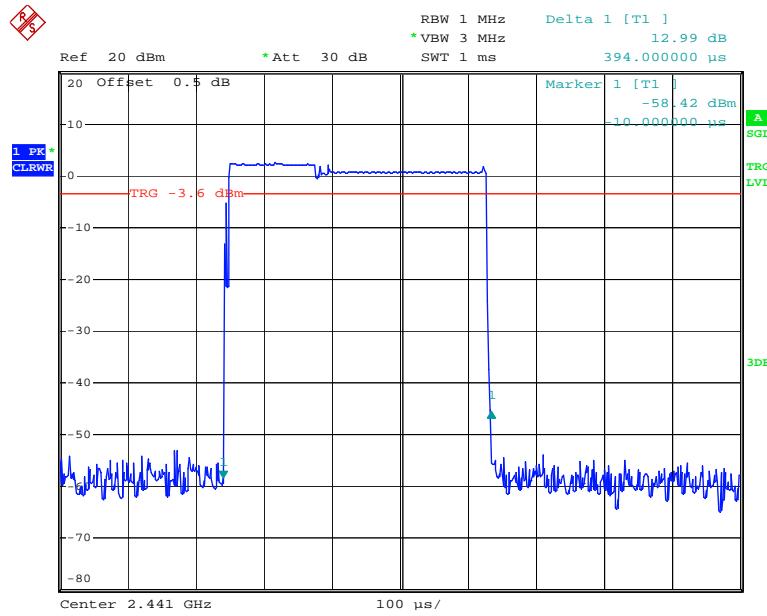
*EDR Mode ( $\pi/4$ -DQPSK):*

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
<b>2DH1</b>	Low	0.394	0.126	0.4	Compliance
	Middle	0.394	0.126	0.4	Compliance
	High	0.394	0.126	0.4	Compliance
Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s					
<b>2DH3</b>	Low	1.662	0.266	0.4	Compliance
	Middle	1.656	0.265	0.4	Compliance
	High	1.656	0.265	0.4	Compliance
Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s					
<b>2DH5</b>	Low	2.910	0.310	0.4	Compliance
	Middle	2.910	0.310	0.4	Compliance
	High	2.920	0.311	0.4	Compliance
Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s					

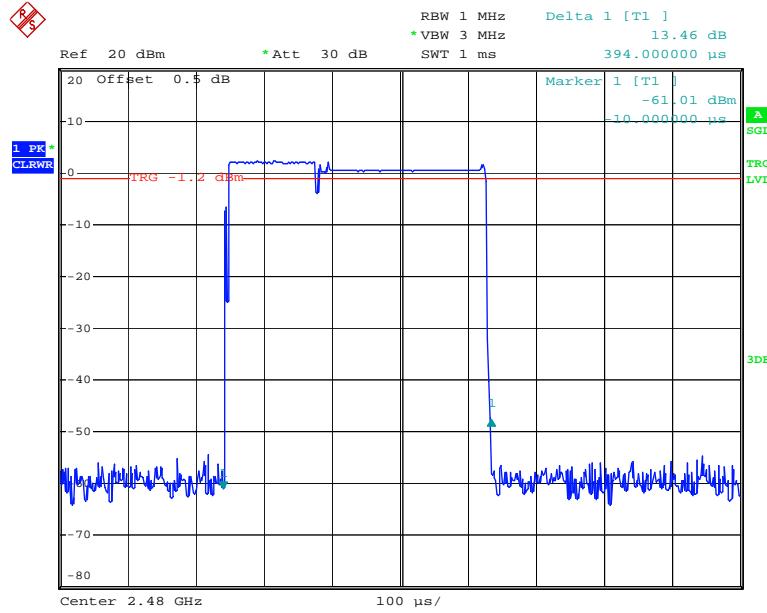
### 2DH1: Low Channel



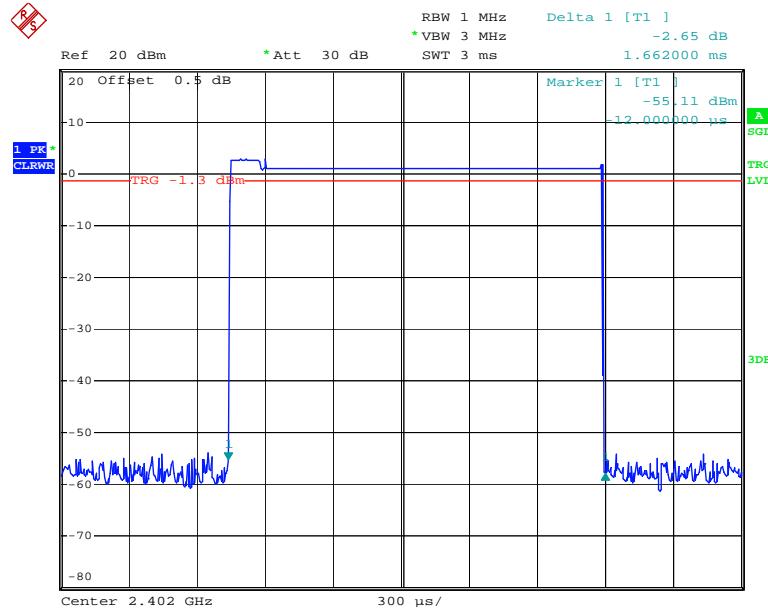
Date: 4.MAY.2016 10:39:27

**2DH1: Middle Channel**

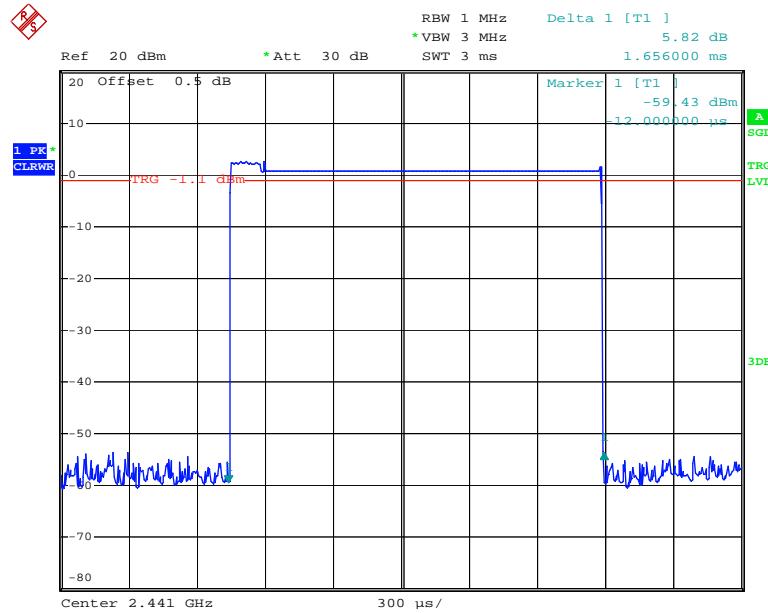
Date: 4.MAY.2016 10:39:36

**2DH1: High Channel**

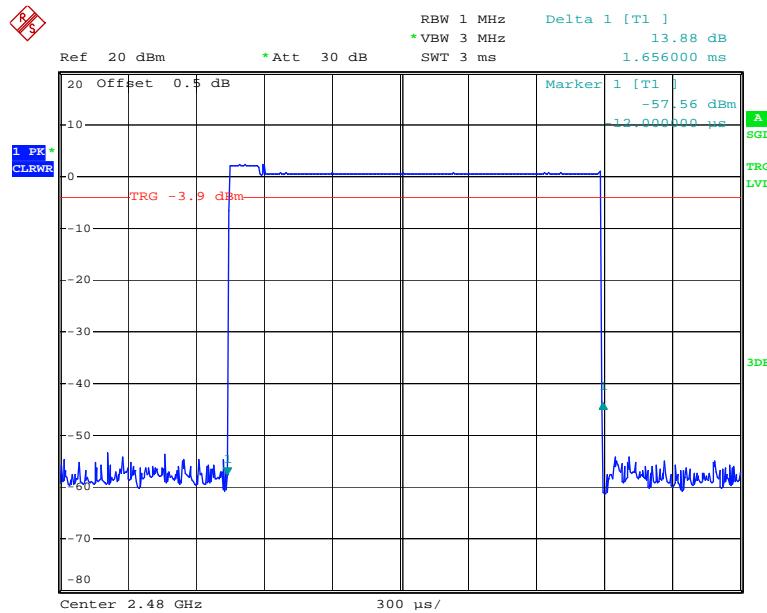
Date: 4.MAY.2016 10:39:45

**2DH3: Low Channel**

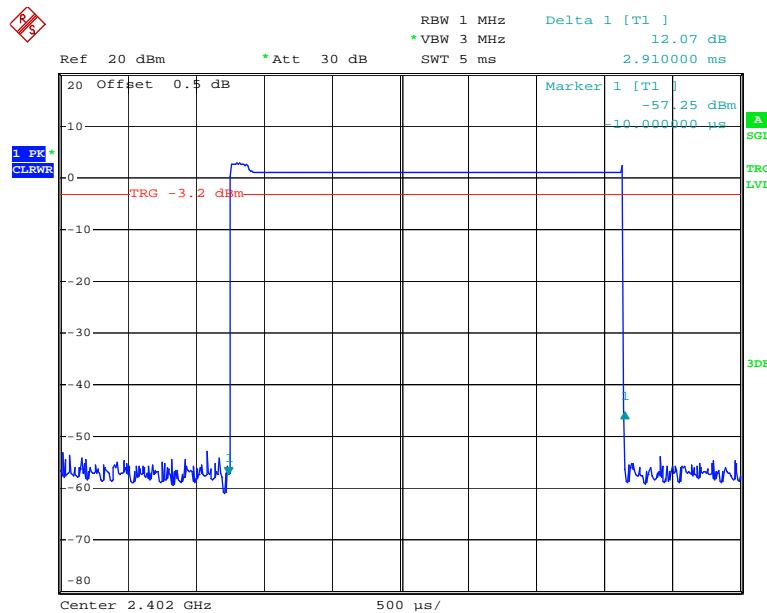
Date: 4.MAY.2016 10:40:15

**2DH3: Middle Channel**

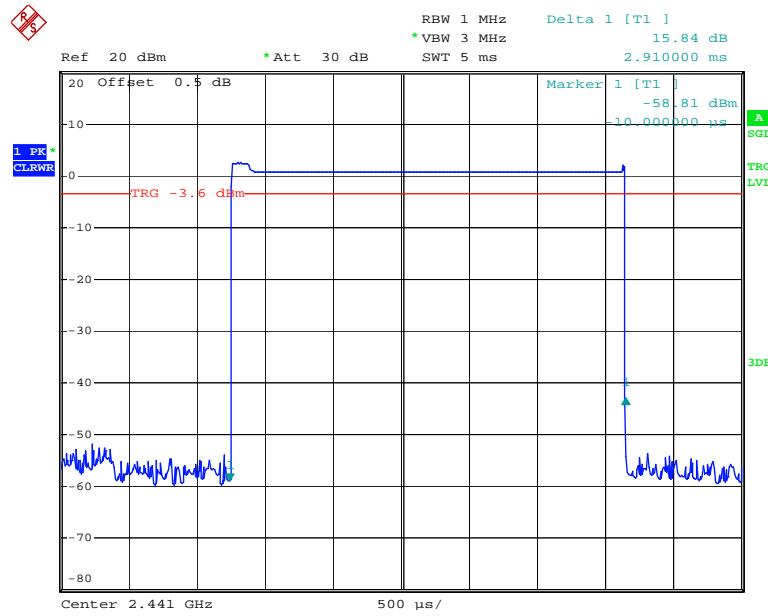
Date: 4.MAY.2016 10:40:24

**2DH3: High Channel**

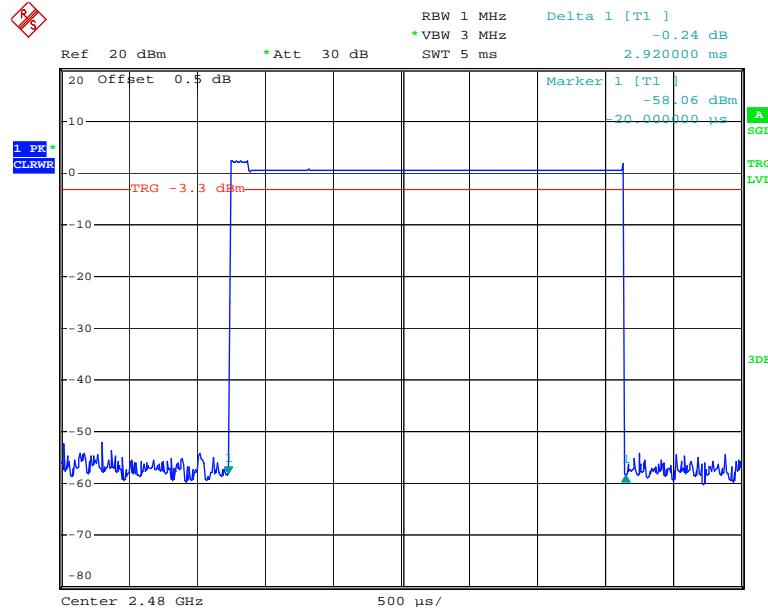
Date: 4.MAY.2016 10:40:32

**2DH5: Low Channel**

Date: 4.MAY.2016 10:41:03

**2DH5: Middle Channel**

Date: 4.MAY.2016 10:41:14

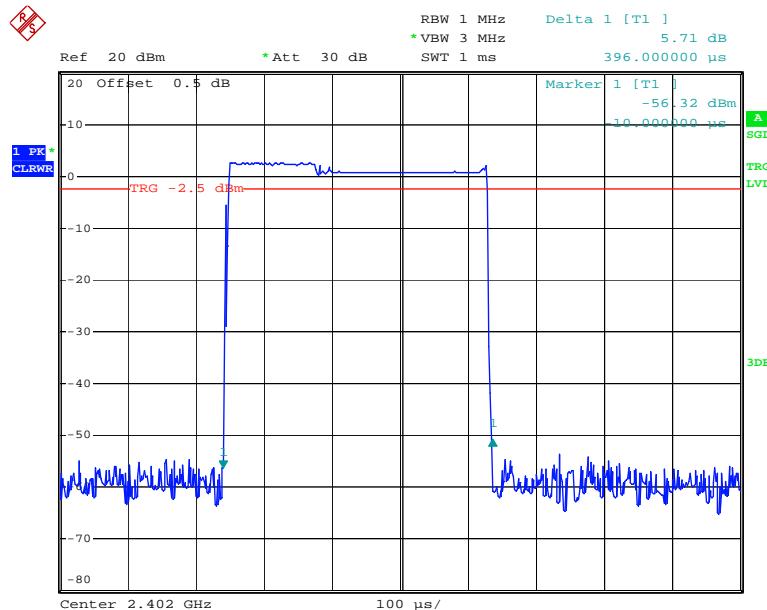
**2DH5: High Channel**

Date: 4.MAY.2016 10:41:22

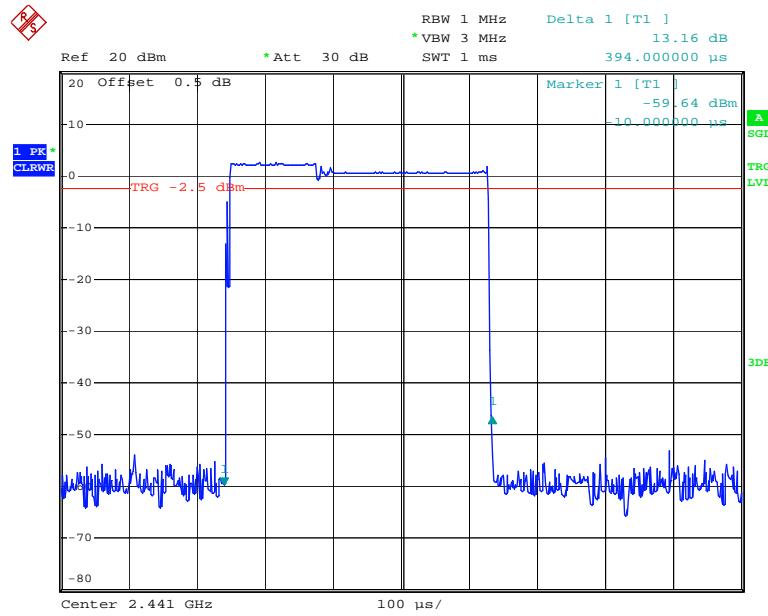
*EDR Mode (8-DPSK):*

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
<b>3DH1</b>	Low	0.396	0.127	0.4	Compliance
	Middle	0.394	0.126	0.4	Compliance
	High	0.394	0.126	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/2/79) × 31.6 s					
<b>3DH3</b>	Low	1.656	0.265	0.4	Compliance
	Middle	1.662	0.266	0.4	Compliance
	High	1.662	0.266	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/4/79) × 31.6 s					
<b>3DH5</b>	Low	2.920	0.311	0.4	Compliance
	Middle	2.920	0.311	0.4	Compliance
	High	2.920	0.311	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/6/79) × 31.6 s					

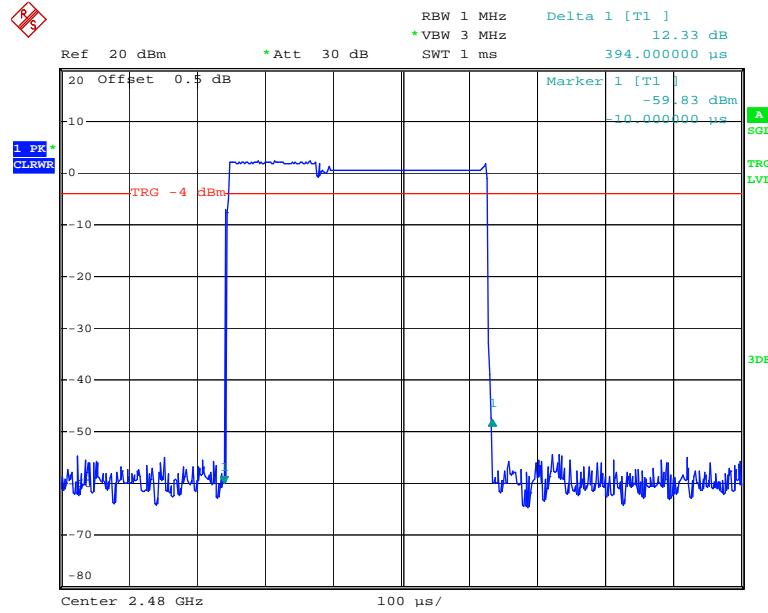
### 3DH1: Low Channel



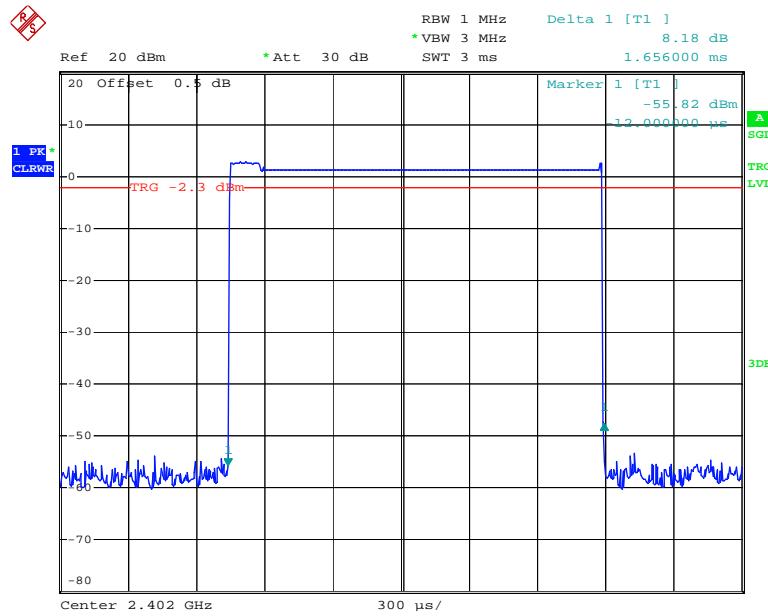
Date: 4.MAY.2016 10:41:54

**3DH1: Middle Channel**

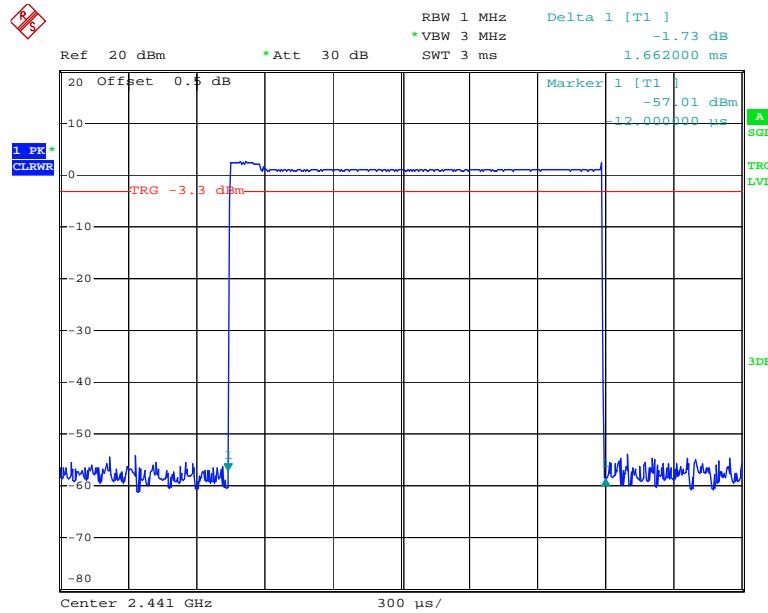
Date: 4.MAY.2016 10:42:02

**3DH1: High Channel**

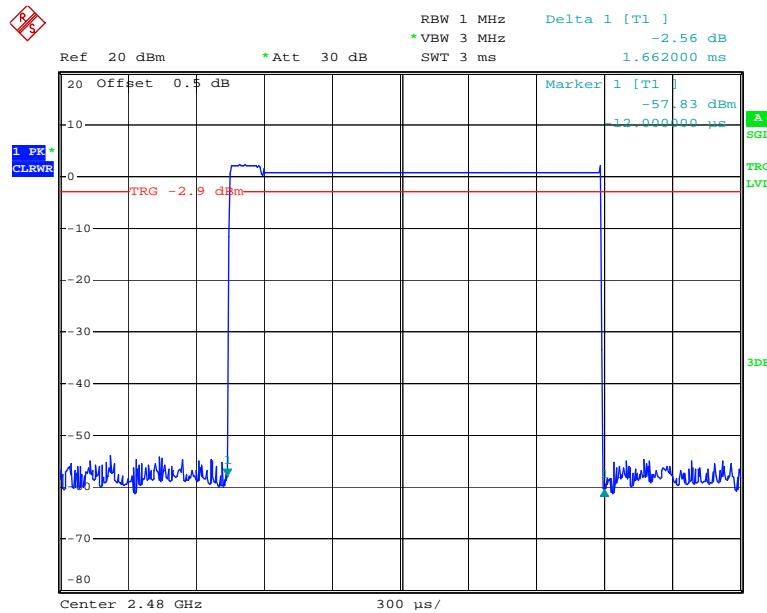
Date: 4.MAY.2016 10:42:13

**3DH3: Low Channel**

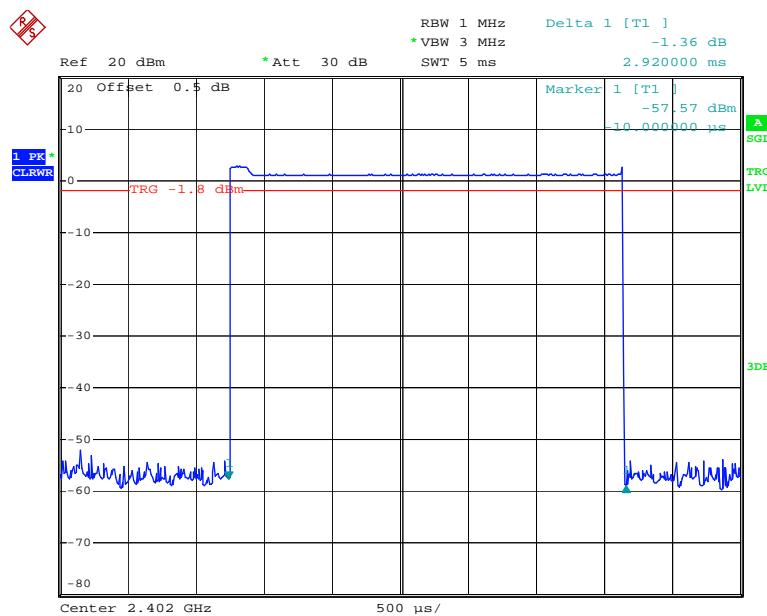
Date: 4.MAY.2016 10:42:40

**3DH3: Middle Channel**

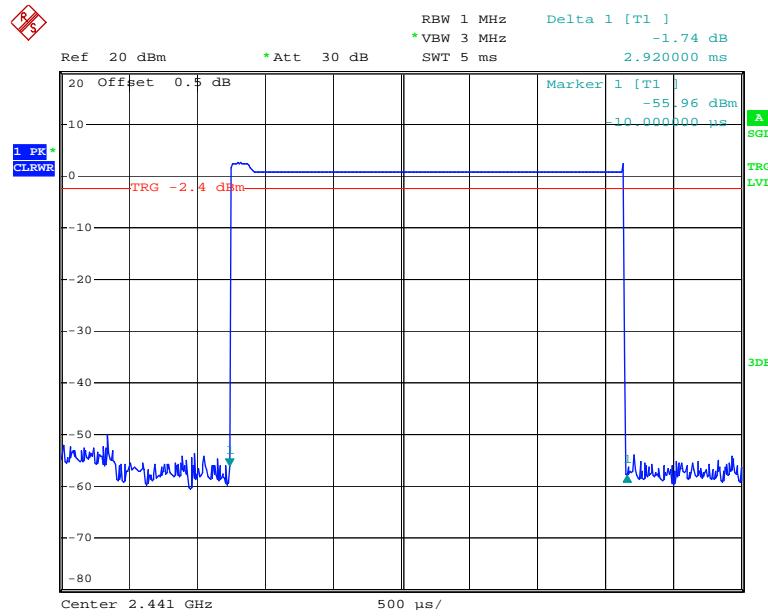
Date: 4.MAY.2016 10:42:48

**3DH3: High Channel**

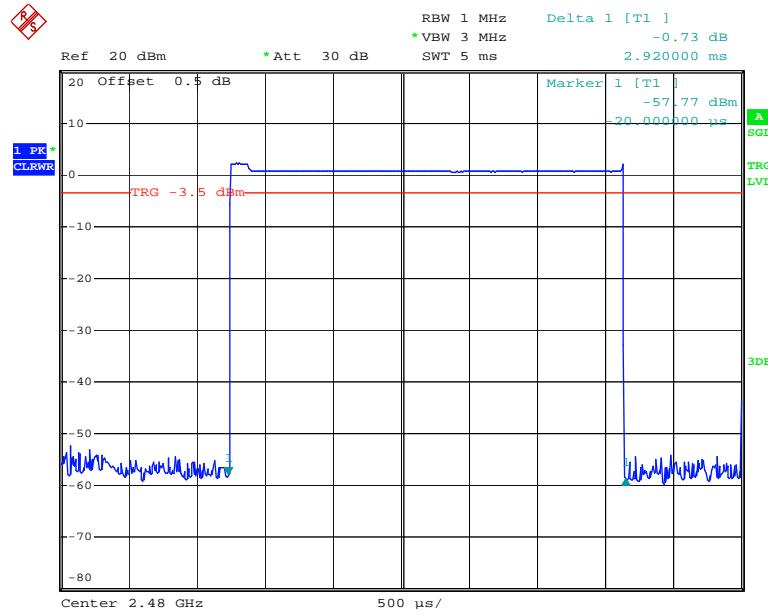
Date: 4.MAY.2016 10:42:57

**3DH5: Low Channel**

Date: 4.MAY.2016 10:43:20

**3DH5: Middle Channel**

Date: 4.MAY.2016 10:43:29

**3DH5: High Channel**

Date: 4.MAY.2016 10:43:37

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	28.8°C
Relative Humidity:	55%
ATM Pressure:	100.4kPa

The testing was performed by Robin Zheng on 2016-05-04.

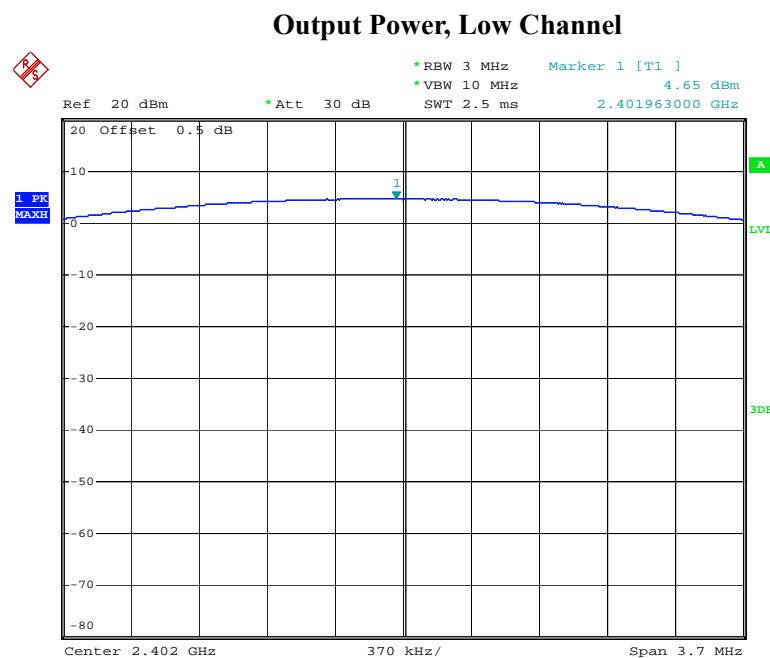
**Test Result:** Compliance.

*Test Mode: Transmitting*

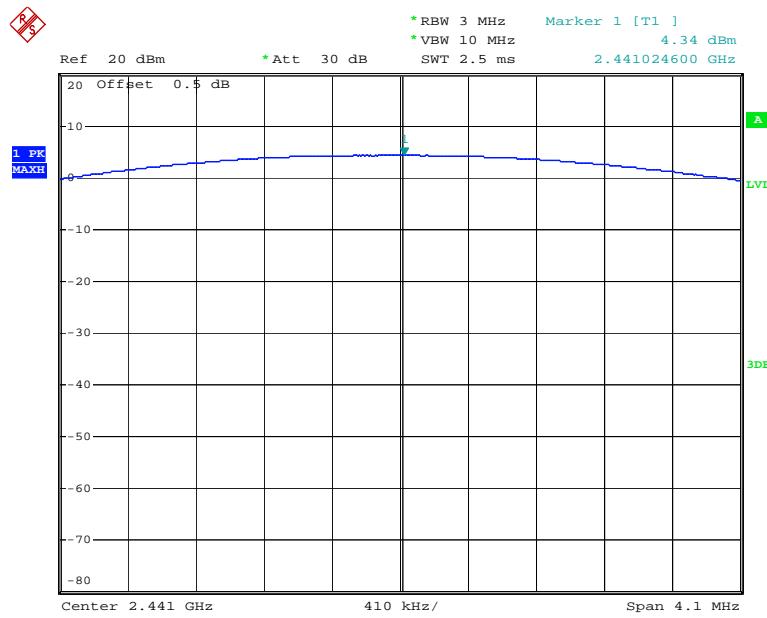
Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	4.65	30
	Middle	2441	4.34	30
	High	2480	4.16	30
EDR Mode ( $\pi/4$ -DQPSK)	Low	2402	3.31	30
	Middle	2441	2.97	30
	High	2480	2.79	30
EDR Mode (8-DPSK)	Low	2402	3.4	30
	Middle	2441	3.06	30
	High	2480	2.91	30

Note: The data above was tested in conducted mode.

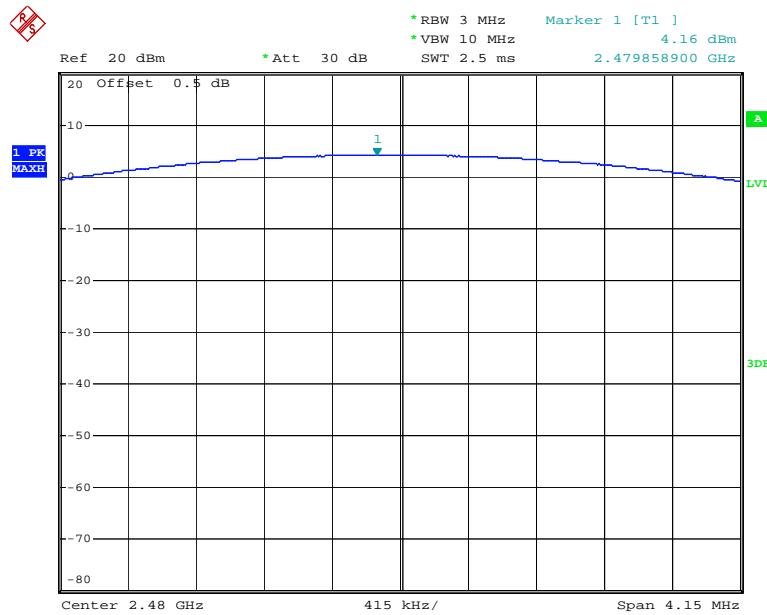
*BDR Mode (GFSK):*



Date: 4.MAY.2016 09:57:24

**Output Power, Middle Channel**

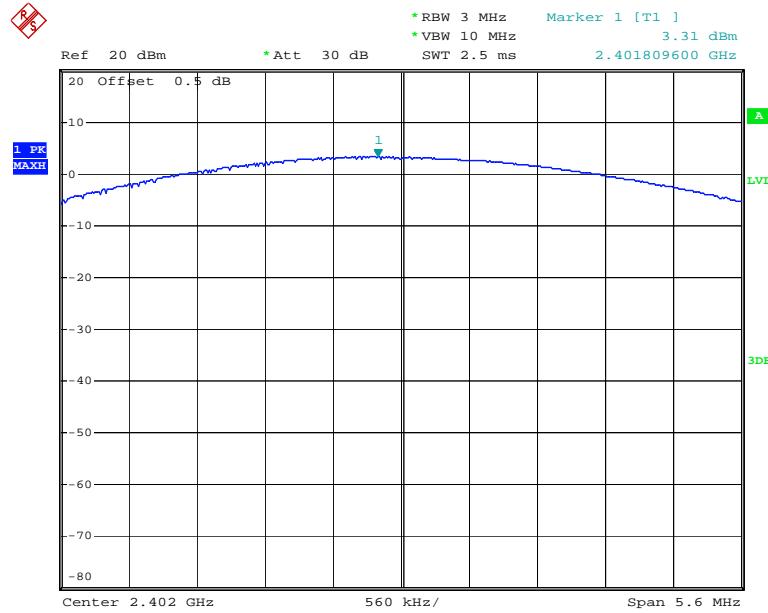
Date: 4.MAY.2016 09:59:04

**Output Power, High Channel**

Date: 4.MAY.2016 10:00:12

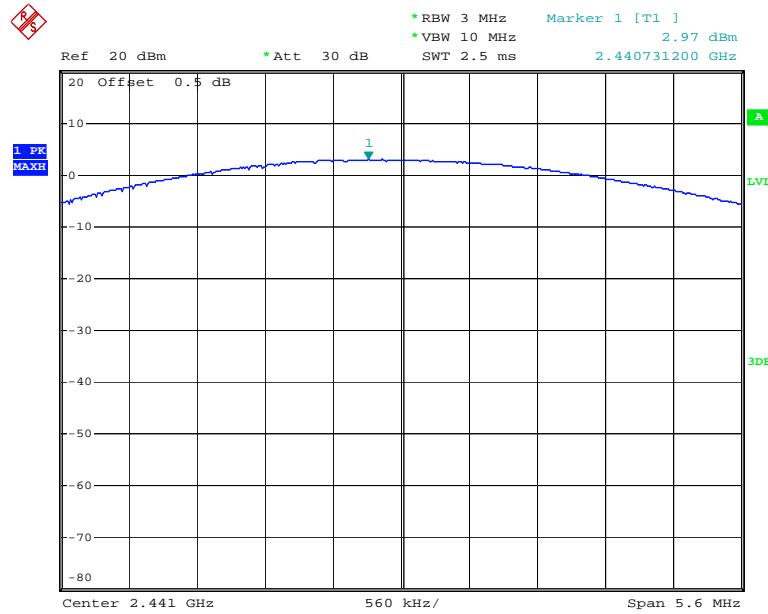
EDR Mode ( $\pi/4$ -DQPSK):

### Output Power, Low Channel



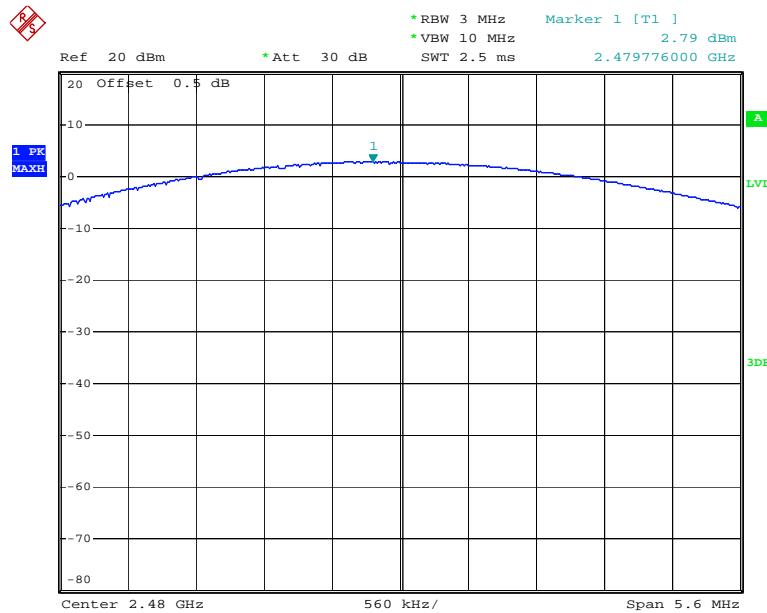
Date: 4.MAY.2016 10:01:58

### Output Power, Middle Channel



Date: 4.MAY.2016 10:03:26

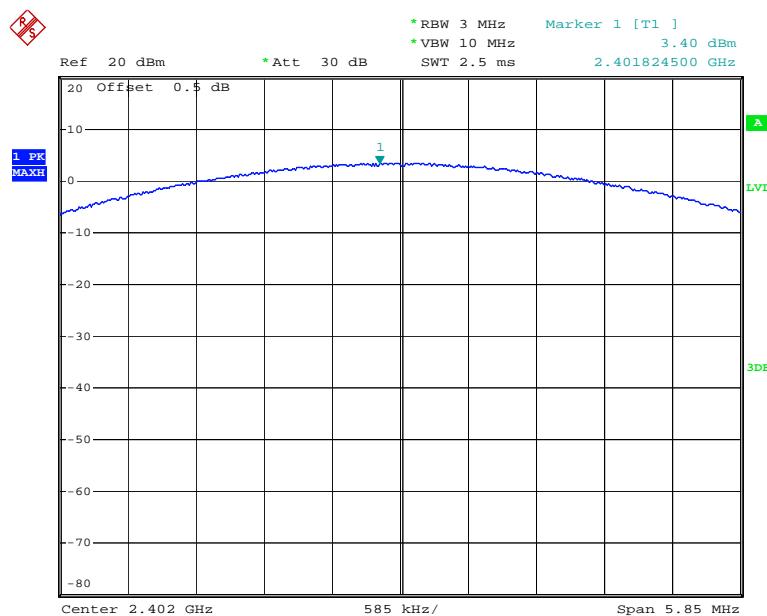
### Output Power, High Channel



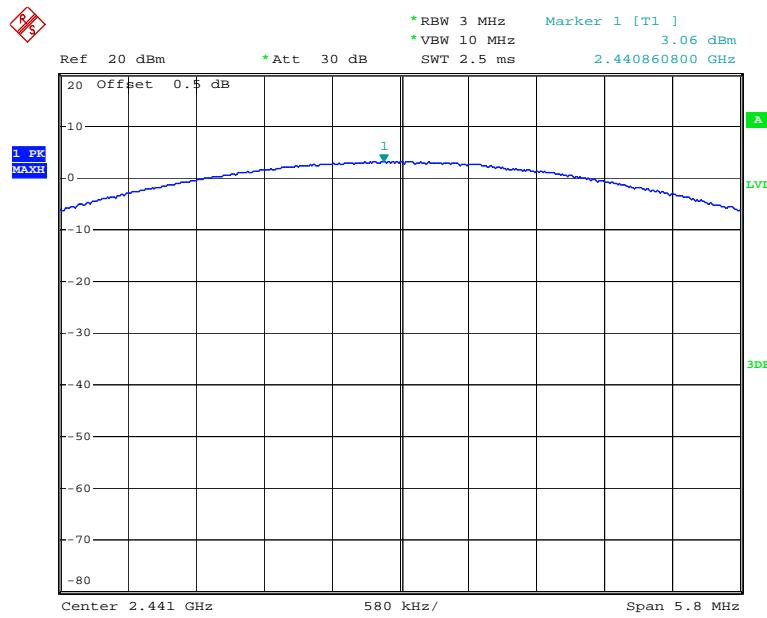
Date: 4.MAY.2016 10:10:51

*EDR Mode (8-DPSK):*

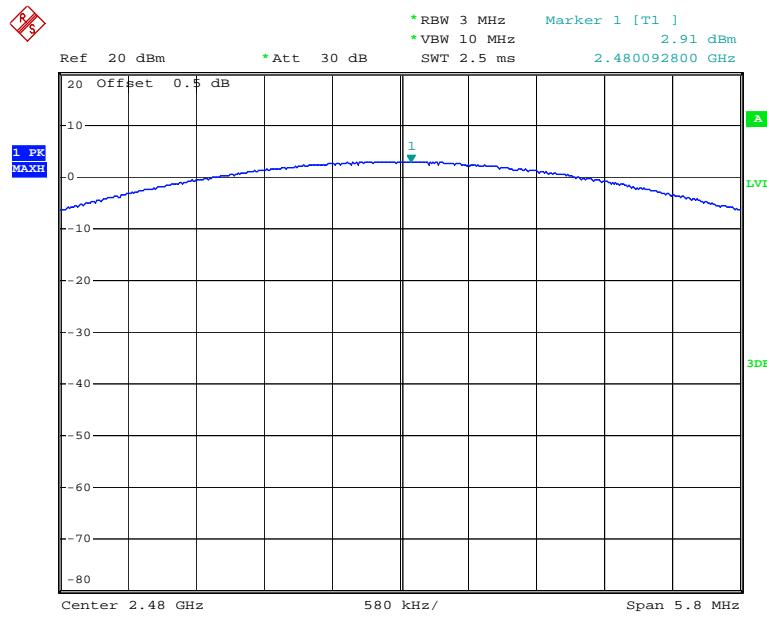
### Output Power, Low Channel



Date: 4.MAY.2016 10:12:40

**Output Power, Middle Channel**

Date: 4.MAY.2016 10:14:27

**Output Power, High Channel**

Date: 4.MAY.2016 10:15:30

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

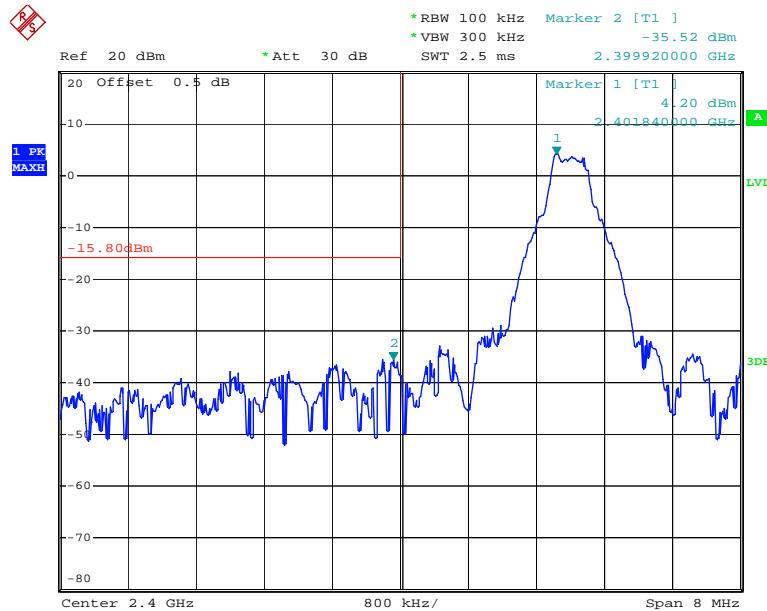
\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

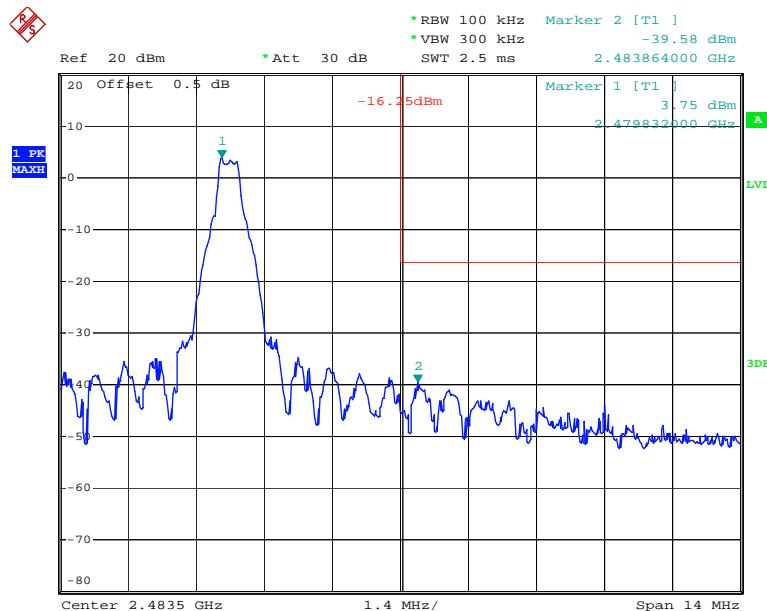
#### Environmental Conditions

Temperature:	28.8°C
Relative Humidity:	55%
ATM Pressure:	100.4kPa

The testing was performed by Robin Zheng on 2016-05-04.

**Test Result: Compliance***BDR Mode (GFSK):***Band Edge, Left Side**

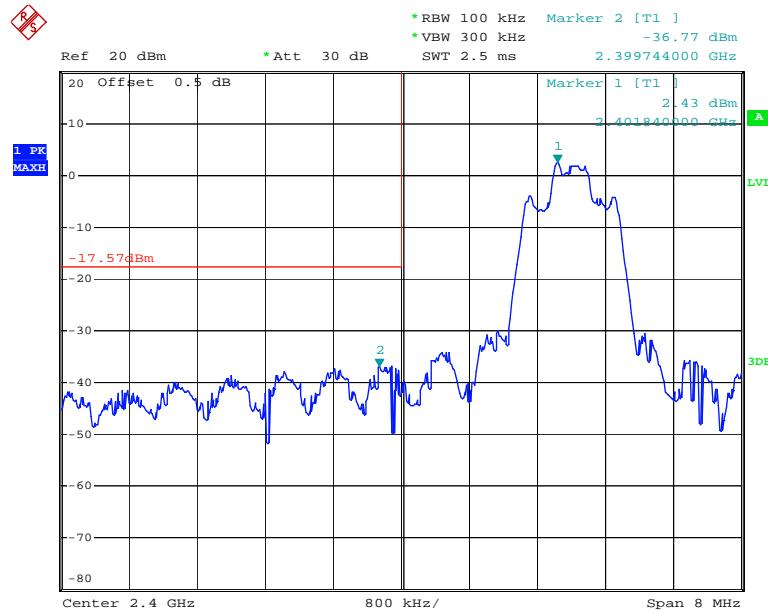
Date: 4.MAY.2016 09:57:41

**Band Edge, Right Side**

Date: 4.MAY.2016 10:00:31

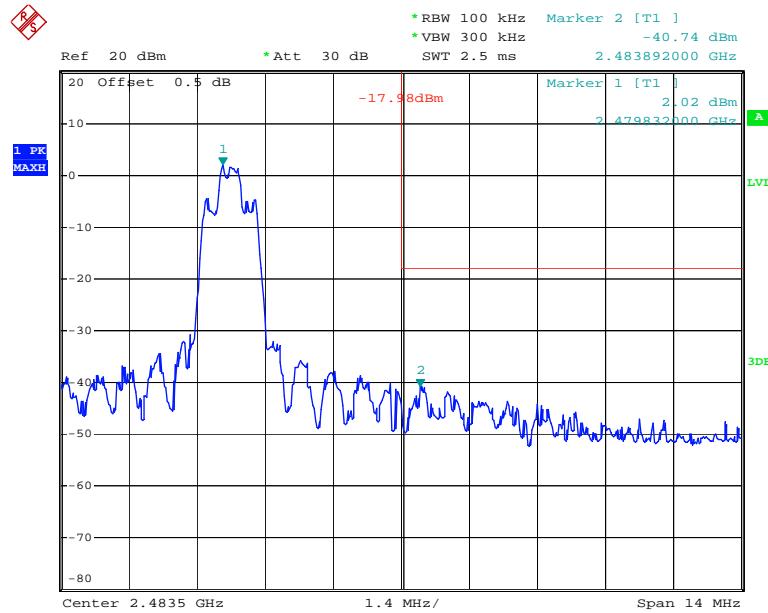
*EDR Mode ( $\pi/4$ -DQPSK):*

### Band Edge, Left Side



Date: 4.MAY.2016 10:02:22

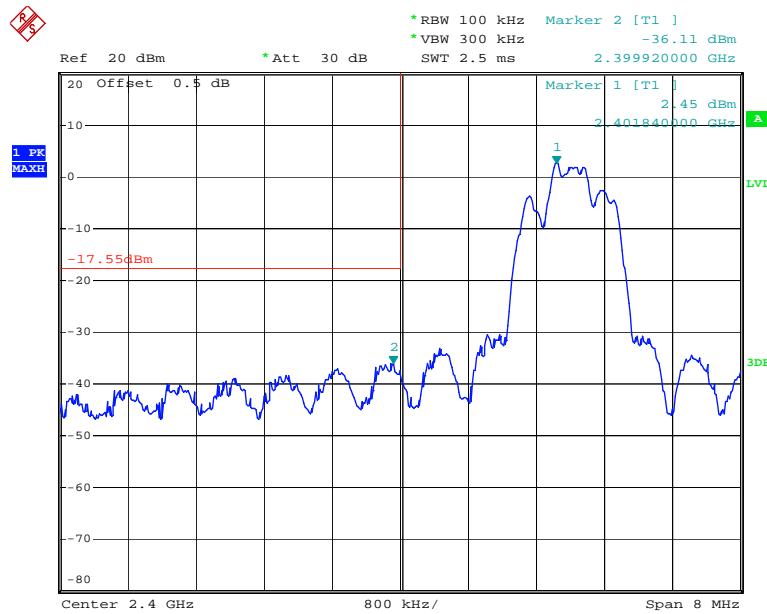
### Band Edge, Right Side



Date: 4.MAY.2016 10:11:09

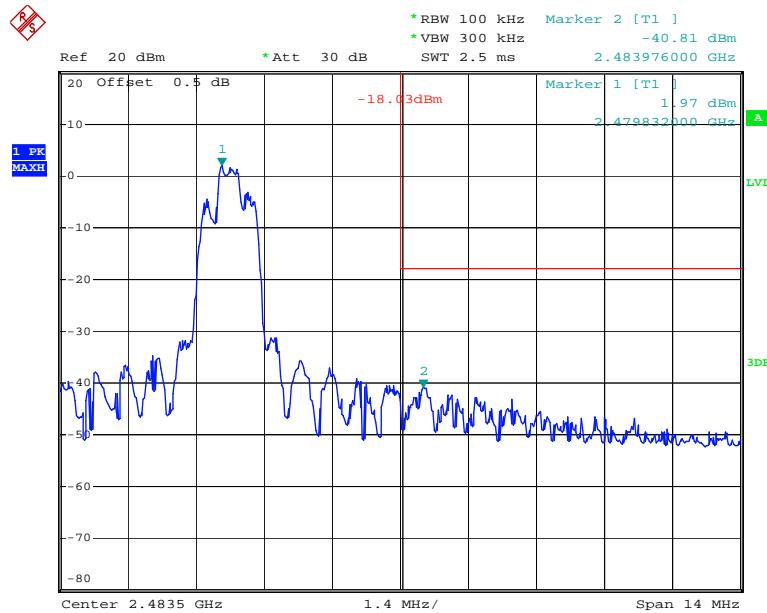
*EDR Mode (8-DPSK):*

### Band Edge, Left Side



Date: 4.MAY.2016 10:13:15

### Band Edge, Right Side



Date: 4.MAY.2016 10:15:47

\*\*\*\*\*END OF REPORT\*\*\*\*\*