

FCC Test Report

Report No.: RFBBQZ-WTW-P21020267-2

FCC ID: PY320400511

Test Model: NBR750

Received Date: Jan. 27, 2021

Test Date: Jan. 27 to Apr. 09, 2021

Issued Date: May 03, 2021

**Applicant and
Manufacturer:** NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwa.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	14
3.4 Description of Support Units	16
3.4.1 Configuration of System under Test	17
3.5 General Description of Applied Standard and references	18
4 Test Types and Results	19
4.1 Radiated Emission and Bandedge Measurement.....	19
4.1.1 Limits of Radiated Emission and Bandedge Measurement	19
4.1.2 Test Instruments	20
4.1.3 Test Procedure	23
4.1.4 Deviation from Test Standard	24
4.1.5 Test Setup.....	24
4.1.6 EUT Operating Condition	25
4.1.7 Test Results	26
4.2 Conducted Emission Measurement	48
4.2.1 Limits of Conducted Emission Measurement	48
4.2.2 Test Instruments	48
4.2.3 Test Procedure	49
4.2.4 Deviation from Test Standard	49
4.2.5 Test Setup.....	49
4.2.6 EUT Operating Condition	49
4.2.7 Test Results	50
4.3 Transmit Power Measurement	54
4.3.1 Limits of Transmit Power Measurement	54
4.3.2 Test Setup.....	54
4.3.3 Test Instruments	54
4.3.4 Test Procedure	54
4.3.5 Deviation from Test Standard	54
4.3.6 EUT Operating Condition	54
4.3.7 Test Results	55
4.4 Occupied Bandwidth Measurement	63
4.4.1 Test Setup.....	63
4.4.2 Test Instruments	63
4.4.3 Test Procedure	63
4.4.4 Test Results	64
4.5 Peak Power Spectral Density Measurement	71
4.5.1 Limits of Peak Power Spectral Density Measurement	71
4.5.2 Test Setup.....	71
4.5.3 Test Instruments	71
4.5.4 Test Procedure	71
4.5.5 Deviation from Test Standard	71
4.5.6 EUT Operating Condition	71
4.5.7 Test Results	72
4.6 Frequency Stability Measurement.....	76
4.6.1 Limits of Frequency Stability Measurement	76

4.6.2	Test Setup.....	76
4.6.3	Test Instruments	76
4.6.4	Test Procedure	76
4.6.5	Deviation from Test Standard	76
4.6.6	EUT Operating Condition	76
4.6.7	Test Results	77
4.7	6dB Bandwidth Measurement	78
4.7.1	Limits of 6dB Bandwidth Measurement	78
4.7.2	Test Setup.....	78
4.7.3	Test Instruments	78
4.7.4	Test Procedure	78
4.7.5	Deviation from Test Standard	78
4.7.6	EUT Operating Condition	78
4.7.7	Test Results	79
5	Pictures of Test Arrangements.....	81
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	82
	Annex B- Band-edge measurement (For U-NII-1 band)	85
	Appendix – Information of the Testing Laboratories	89

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P21020267-2	Original release.	May 03, 2021

1 Certificate of Conformity

Product: 5G Orbi Router

Brand: NETGEAR

Test Model: NBR750

Sample Status: Engineering sample

Applicant: NETGEAR, Inc.

Test Date: Jan. 27 to Apr. 09, 2021

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Cherry Chuo, **Date:** May 03, 2021
Cherry Chuo / Specialist

Approved by : Clark Lin, **Date:** May 03, 2021
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -6.82dB at 0.34922MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

Note:

1. For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.
2. For U-NII-1 band compliance with rule 15.407(b) of the band-edge items, the test plots were recorded in Annex B. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	5G Orbi Router
Brand	NETGEAR
Test Model	NBR750
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462 GHz 5GHz: 5.18~ 5.24 GHz, 5.745 ~ 5.825 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 874.084 mW 5.18 ~ 5.24 GHz: 791.922 mW 5.745 ~ 5.825 GHz: 943.449 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 630.295 mW 5.18 ~ 5.24 GHz: 791.922 mW 5.745 ~ 5.825 GHz: 830.137 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	NA

Note:

1. The EUT contains certified WWAN module which FCC ID: XMR2020RM502QAE.
2. There are WLAN, Bluetooth and WWAN technology used for the EUT. The EUT has four radios as following table:

Radio 1	Radio 2	Radio 3	Radio 4
WLAN 2.4GHz	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)	WWAN(5G NR + LTE)

3. Simultaneously transmission condition.

Condition	Technology			
1	WLAN 2.4GHz	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)	WWAN(5G NR + LTE)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT must be supplied with a power adapter and following different models could be chosen:

No.	Brand	Model No.	P/N	Spec.
1	NETGEAR	2ABN042F	332-10888-02	Input: 100-240Vac, 1.3A, 50/60Hz Output: 12Vdc, 3.5A DC Output cable: Unshielded, 1.8m
2	NETGEAR	AD2150F10	332-11093-02	Input: 100-120Vac, 1.0A, 50/60Hz Output: 12Vdc, 3.5A DC Output cable: Unshielded, 1.8m

Note: From the above models, the worst radiated emission test and conducted emission test were found in **Adapter 1**. Therefore only the test data of the model was recorded in this report.

5. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Connector Type
2.4~2.4835	4.37	Dipole	i-pex(MHF)
5.15 ~ 5.25	4.48		
5.725 ~ 5.85	6.78		

Note: More detailed information, please refer to antenna specification.

6. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
5GHz Band (Low Band)		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
5GHz Band (High Band)		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
 2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
 3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz, 80MHz) and 802.11ax mode for 20MHz (40MHz, 80MHz), therefore the manufacturer will control the power for 802.11n/ac mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)
7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
8. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
42	5210 MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6Mb/s
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6Mb/s
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode (low band)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240	38 to 46	46	OFDMA	BPSK	MCS0
CDD Mode (high band)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE20)	5745-5825	149 to 165	165	OFDMA	BPSK	MCS0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode (low band)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240	38 to 46	46	OFDMA	BPSK	MCS0
CDD Mode (high band)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE20)	5745-5825	149 to 165	165	OFDMA	BPSK	MCS0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6Mb/s
802.11ac (VHT20) (output power only)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
802.11ac (VHT20) (output power only)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11ac (VHT80) (output power only)		42	42	OFDM	BPSK	MCS0
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6Mb/s
802.11ac (VHT20) (output power only)		149 to 165	149, 157, 165	OFDM	BPSK	MCS0
802.11ac (VHT40) (output power only)		151 to 159	151, 159	OFDM	BPSK	MCS0
802.11ac (VHT80) (output power only)		155	155	OFDM	BPSK	MCS0
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Beamforming Mode (output power only)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter	
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	MCS0
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11ac (VHT80)		42	42	OFDM	BPSK	MCS0
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	MCS0
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	MCS0
802.11ac (VHT80)		155	155	OFDM	BPSK	MCS0
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	24deg. C, 67%RH	120Vac, 60Hz	Tom Yang
RE<1G	23deg. C, 69%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 71%RH	120Vac, 60Hz	Sampson Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Eric Peng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is < 98%, duty factor shall be considered.


For U-NII-1:

802.11a: Duty cycle = 1.975 ms / 2.106 ms = 0.938, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.28 \text{ dB}$

802.11ax (HE20): Duty cycle = 5.451 ms / 5.692 ms = 0.958, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.19 \text{ dB}$

802.11ax (HE40): Duty cycle = 5.449 ms / 5.721 ms = 0.952, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.21 \text{ dB}$

802.11ax (HE80): Duty cycle = 5.448 ms / 5.731 ms = 0.951, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.22 \text{ dB}$

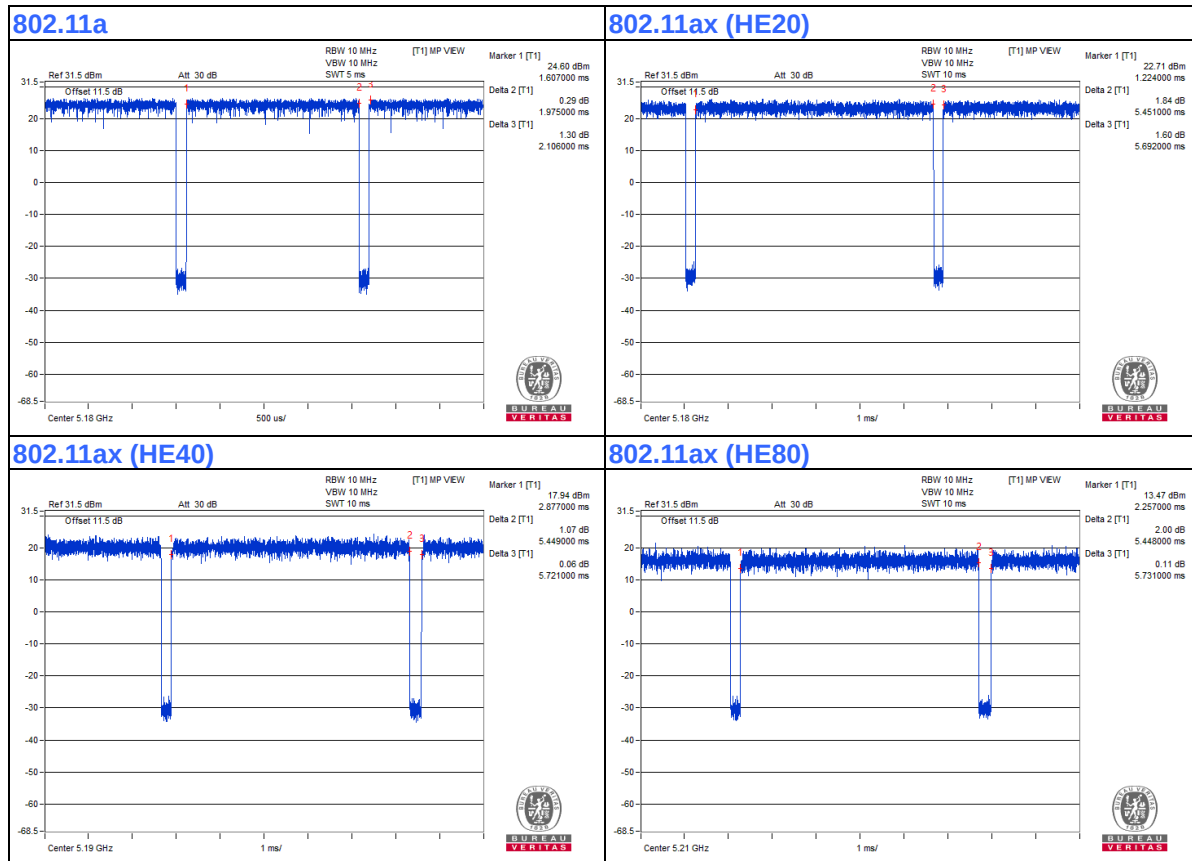


For U-NII-3:

802.11a: Duty cycle = 1.975 ms / 2.101 ms = 0.94, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.27 \text{ dB}$

802.11ax (HE20): Duty cycle = 5.45 ms / 5.694 ms = 0.957, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.19 \text{ dB}$

802.11ax (HE40): Duty cycle = 5.449 ms / 5.711 ms = 0.954, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.20 \text{ dB}$

802.11ax (HE80): Duty cycle = 5.448 ms / 5.683 ms = 0.959, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.18 \text{ dB}$

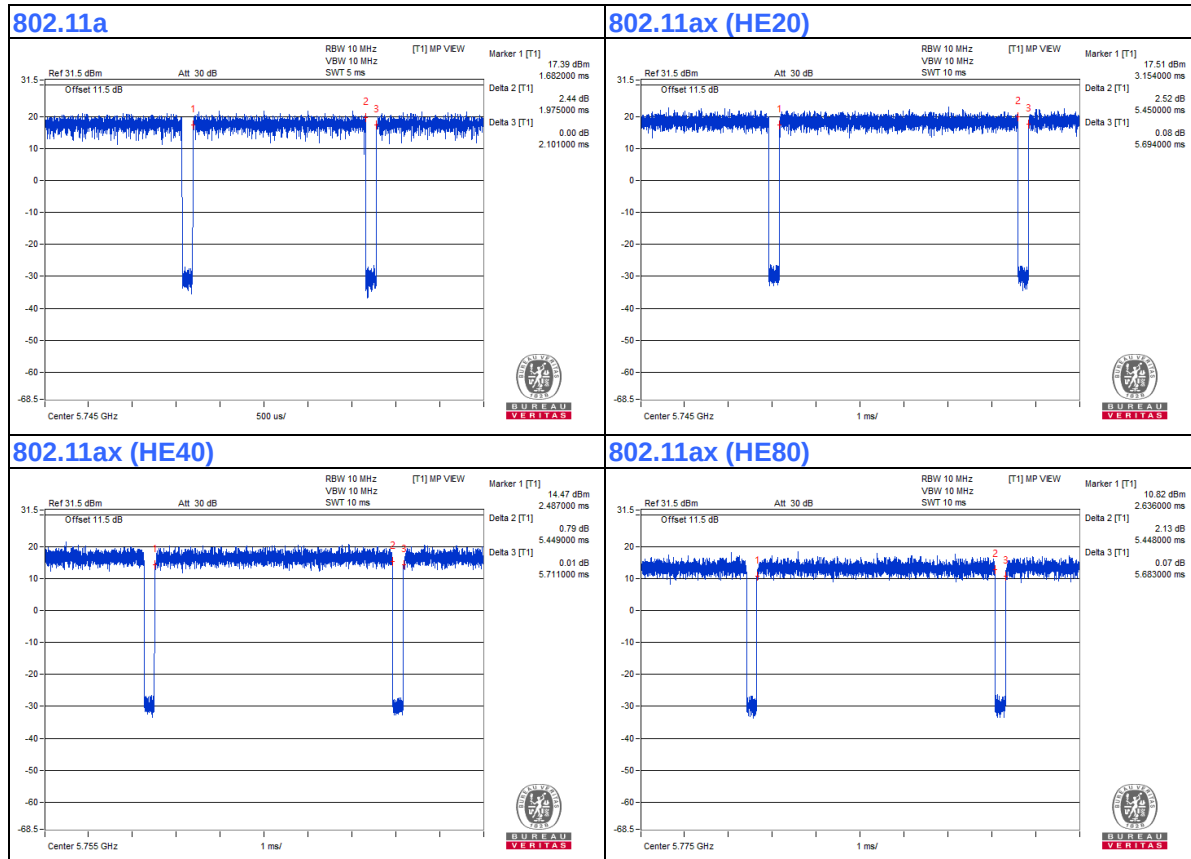

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	P88G	G1WJL42	NA	Provided by Lab
B.	Switch	D-Link	DGS-1005D	DR8WC92000523	NA	Provided by Lab
C.	Nano SIM Card	keysight	NA	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	DC Cable	1	1.8	No	0	Supplied by client

3.4.1 Configuration of System under Test

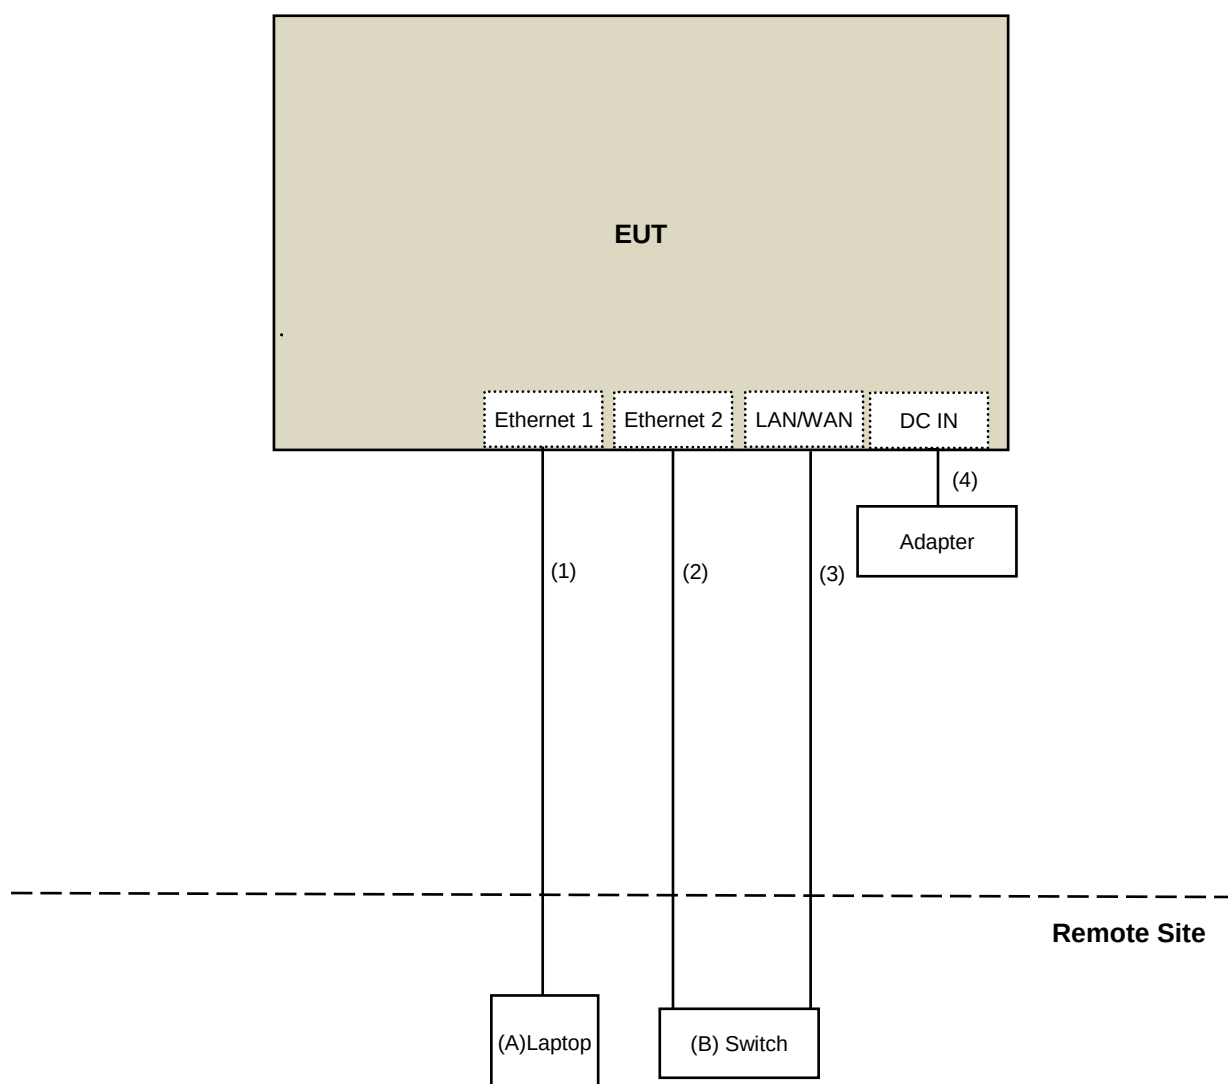

3.5 General Description of Applied Standard and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart E (15.407)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
^{*1} beyond 75 MHz or more above of the band edge. ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

For Radiated emission (Below 1GHz) test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Mar. 05, 2021	Mar. 04, 2022
RF Cable	5D-FB	LOOPCAB-001	Jan. 07, 2021	Jan. 06, 2022
RF Cable	5D-FB	LOOPCAB-002	Jan. 07, 2021	Jan. 06, 2022
Pre-Amplifier EMCI	EMC330N	980701	Mar. 10, 2021	Mar. 09, 2022
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 06, 2020	Nov. 05, 2021
RF Cable	8D	966-4-1	Mar. 17, 2021	Mar. 16, 2022
RF Cable	8D	966-4-2	Mar. 17, 2021	Mar. 16, 2022
RF Cable	8D	966-4-3	Mar. 17, 2021	Mar. 16, 2022
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	Jan. 11, 2021	Jan. 10, 2022
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Apr. 09, 2021

For Radiated emission (Above 1GHz) & BandEdge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC 12630 SE	980638	Apr. 08, 2020	Apr. 07, 2021
RF Cable	EMC104-SM-SM-1200	160922	Dec. 25, 2020	Dec. 24, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Jan. 27 to Mar. 04, 2021

For other test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
AC Power Source Extech Electronics	6905S	1991551	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 14, 2021	Jan. 13, 2022
True RMS Clamp Meter FLUKE	325	31130711WS	June 06, 2020	June 05, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Apr. 09, 2021

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

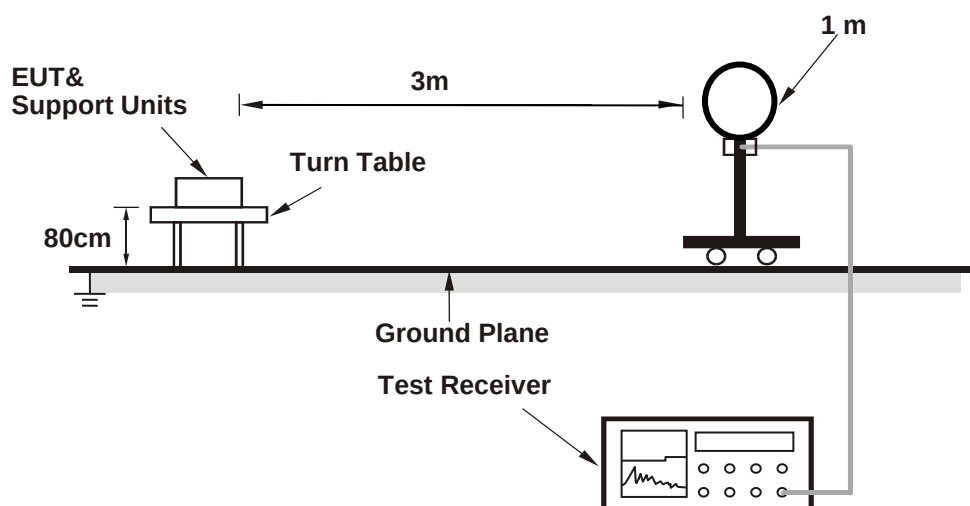

For Radiated emission 30MHz to 1GHz

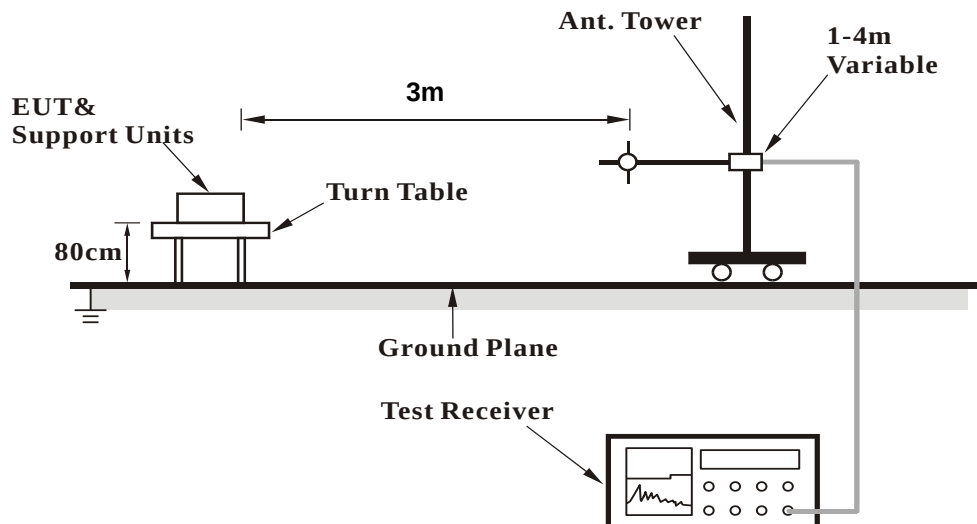

For Radiated emission above 1GHz

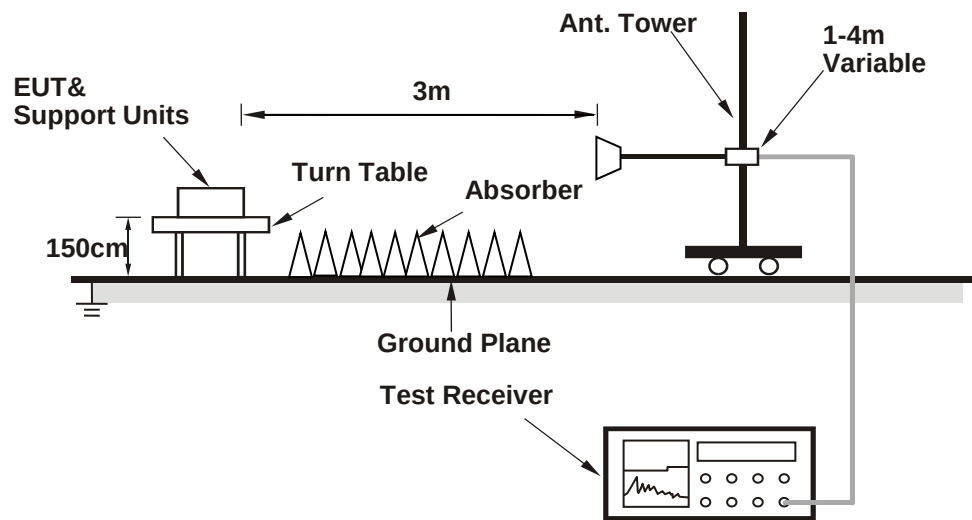

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Connected the EUT with the Laptop Computer which is placed on remote site.
- Controlling software (QSPR (5.0-00140)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.2 PK	74.0	-20.8	1.56 H	314	52.1	1.1
2	5150.00	43.2 AV	54.0	-10.8	1.56 H	314	42.1	1.1
3	*5180.00	110.6 PK			1.56 H	314	109.6	1.0
4	*5180.00	101.9 AV			1.56 H	314	100.9	1.0
5	#10360.00	50.3 PK	68.2	-17.9	2.36 H	232	40.0	10.3
6	15540.00	50.4 PK	74.0	-23.6	3.86 H	210	38.4	12.0
7	15540.00	36.1 AV	54.0	-17.9	3.86 H	210	24.1	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.6 PK	74.0	-9.4	1.61 V	16	63.5	1.1
2	5150.00	53.6 AV	54.0	-0.4	1.61 V	16	52.5	1.1
3	*5180.00	117.4 PK			1.61 V	16	116.4	1.0
4	*5180.00	108.3 AV			1.61 V	16	107.3	1.0
5	#10360.00	52.7 PK	68.2	-15.5	3.55 V	180	42.4	10.3
6	15540.00	48.9 PK	74.0	-25.1	3.47 V	131	36.9	12.0
7	15540.00	36.6 AV	54.0	-17.4	3.47 V	131	24.6	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.7 PK	74.0	-22.3	1.55 H	309	50.6	1.1
2	5150.00	40.3 AV	54.0	-13.7	1.55 H	309	39.2	1.1
3	*5200.00	111.0 PK			1.55 H	309	109.9	1.1
4	*5200.00	102.6 AV			1.55 H	309	101.5	1.1
5	5350.00	48.6 PK	74.0	-25.4	1.55 H	309	47.8	0.8
6	5350.00	36.9 AV	54.0	-17.1	1.55 H	309	36.1	0.8
7	#10400.00	53.2 PK	68.2	-15.0	2.38 H	226	42.8	10.4
8	15600.00	50.9 PK	74.0	-23.1	3.81 H	216	38.9	12.0
9	15600.00	38.5 AV	54.0	-15.5	3.81 H	216	26.5	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	1.58 V	15	55.5	1.1
2	5150.00	44.0 AV	54.0	-10.0	1.58 V	15	42.9	1.1
3	*5200.00	119.5 PK			1.58 V	15	118.4	1.1
4	*5200.00	110.5 AV			1.58 V	15	109.4	1.1
5	5350.00	52.0 PK	74.0	-22.0	1.58 V	15	51.2	0.8
6	5350.00	40.5 AV	54.0	-13.5	1.58 V	15	39.7	0.8
7	#10400.00	55.0 PK	68.2	-13.2	3.53 V	174	44.6	10.4
8	15600.00	50.9 PK	74.0	-23.1	3.50 V	138	38.9	12.0
9	15600.00	39.0 AV	54.0	-15.0	3.50 V	138	27.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.4 PK			1.56 H	319	110.6	0.8
2	*5240.00	102.8 AV			1.56 H	319	102.0	0.8
3	5392.00	48.2 PK	74.0	-25.8	1.56 H	319	47.2	1.0
4	5392.00	36.5 AV	54.0	-17.5	1.56 H	319	35.5	1.0
5	#10480.00	52.9 PK	68.2	-15.3	2.32 H	234	42.6	10.3
6	15720.00	50.7 PK	74.0	-23.3	3.83 H	220	39.5	11.2
7	15720.00	38.4 AV	54.0	-15.6	3.83 H	220	27.2	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.5 PK			1.69 V	13	118.7	0.8
2	*5240.00	110.6 AV			1.69 V	13	109.8	0.8
3	5356.60	52.4 PK	74.0	-21.6	1.69 V	13	51.5	0.9
4	5356.60	40.7 AV	54.0	-13.3	1.69 V	13	39.8	0.9
5	#10480.00	55.1 PK	68.2	-13.1	3.59 V	186	44.8	10.3
6	15720.00	51.2 PK	74.0	-22.8	3.52 V	145	40.0	11.2
7	15720.00	39.5 AV	54.0	-14.5	3.52 V	145	28.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.36	55.6 PK	68.2	-12.6	1.47 H	345	54.2	1.4
2	*5745.00	121.3 PK			1.47 H	345	119.6	1.7
3	*5745.00	112.1 AV			1.47 H	345	110.4	1.7
4	#5934.94	50.5 PK	68.2	-17.7	1.47 H	345	48.7	1.8
5	11490.00	48.7 PK	74.0	-25.3	2.11 H	249	36.6	12.1
6	11490.00	37.3 AV	54.0	-16.7	2.11 H	249	25.2	12.1
7	#17235.00	54.4 PK	68.2	-13.8	3.05 H	240	38.2	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.14	58.8 PK	68.2	-9.4	1.63 V	275	57.4	1.4
2	*5745.00	123.5 PK			1.63 V	275	121.8	1.7
3	*5745.00	115.1 AV			1.63 V	275	113.4	1.7
4	#5935.32	52.2 PK	68.2	-16.0	1.63 V	275	50.4	1.8
5	11490.00	48.8 PK	74.0	-25.2	3.59 V	168	36.7	12.1
6	11490.00	37.5 AV	54.0	-16.5	3.59 V	168	25.4	12.1
7	#17235.00	54.5 PK	68.2	-13.7	3.49 V	153	38.3	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5584.96	52.7 PK	68.2	-15.5	1.49 H	341	51.4	1.3
2	*5785.00	121.6 PK			1.49 H	341	119.8	1.8
3	*5785.00	112.3 AV			1.49 H	341	110.5	1.8
4	#5926.57	49.5 PK	68.2	-18.7	1.49 H	341	47.7	1.8
5	11570.00	48.4 PK	74.0	-25.6	2.14 H	244	36.4	12.0
6	11570.00	37.2 AV	54.0	-16.8	2.14 H	244	25.2	12.0
7	#17355.00	53.9 PK	68.2	-14.3	3.04 H	251	36.9	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.29	54.1 PK	68.2	-14.1	1.69 V	272	52.7	1.4
2	*5785.00	123.3 PK			1.69 V	272	121.5	1.8
3	*5785.00	114.9 AV			1.69 V	272	113.1	1.8
4	#5926.09	50.3 PK	68.2	-17.9	1.69 V	272	48.5	1.8
5	11570.00	48.8 PK	74.0	-25.2	3.53 V	161	36.8	12.0
6	11570.00	37.6 AV	54.0	-16.4	3.53 V	161	25.6	12.0
7	#17355.00	53.9 PK	68.2	-14.3	3.43 V	149	36.9	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.29	52.3 PK	68.2	-15.9	1.48 H	346	50.9	1.4
2	*5825.00	120.7 PK			1.48 H	346	118.9	1.8
3	*5825.00	112.2 AV			1.48 H	346	110.4	1.8
4	#5923.66	52.6 PK	69.2	-16.6	1.48 H	346	50.8	1.8
5	11650.00	48.7 PK	74.0	-25.3	2.06 H	245	37.0	11.7
6	11650.00	37.5 AV	54.0	-16.5	2.06 H	245	25.8	11.7
7	#17475.00	54.0 PK	68.2	-14.2	3.07 H	246	35.1	18.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.43	55.6 PK	68.2	-12.6	1.68 V	278	54.2	1.4
2	*5825.00	123.5 PK			1.68 V	278	121.7	1.8
3	*5825.00	115.0 AV			1.68 V	278	113.2	1.8
4	#5929.43	51.6 PK	68.2	-16.6	1.68 V	278	49.8	1.8
5	11650.00	48.8 PK	74.0	-25.2	3.57 V	156	37.1	11.7
6	11650.00	37.7 AV	54.0	-16.3	3.57 V	156	26.0	11.7
7	#17475.00	54.3 PK	68.2	-13.9	3.54 V	156	35.4	18.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5147.70	58.2 PK	74.0	-15.8	1.65 H	312	57.1	1.1
2	5147.70	46.5 AV	54.0	-7.5	1.65 H	312	45.4	1.1
3	*5180.00	110.6 PK			1.65 H	312	109.6	1.0
4	*5180.00	101.3 AV			1.65 H	312	100.3	1.0
5	#10360.00	50.6 PK	68.2	-17.6	2.90 H	233	40.3	10.3
6	15540.00	47.6 PK	74.0	-26.4	3.93 H	216	35.6	12.0
7	15540.00	36.1 AV	54.0	-17.9	3.93 H	216	24.1	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.2 PK	74.0	-7.8	1.60 V	16	65.1	1.1
2	5150.00	53.9 AV	54.0	-0.1	1.60 V	16	52.8	1.1
3	*5180.00	119.7 PK			1.60 V	16	118.7	1.0
4	*5180.00	108.4 AV			1.60 V	16	107.4	1.0
5	#10360.00	52.4 PK	68.2	-15.8	3.48 V	161	42.1	10.3
6	15540.00	47.8 PK	74.0	-26.2	3.44 V	126	35.8	12.0
7	15540.00	36.5 AV	54.0	-17.5	3.44 V	126	24.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.7 PK	74.0	-18.3	1.59 H	311	54.6	1.1
2	5150.00	43.2 AV	54.0	-10.8	1.59 H	311	42.1	1.1
3	*5200.00	114.1 PK			1.59 H	311	113.0	1.1
4	*5200.00	102.3 AV			1.59 H	311	101.2	1.1
5	5350.00	48.5 PK	74.0	-25.5	1.59 H	311	47.7	0.8
6	5350.00	36.9 AV	54.0	-17.1	1.59 H	311	36.1	0.8
7	#10400.00	52.1 PK	68.2	-16.1	2.91 H	227	41.7	10.4
8	15600.00	49.8 PK	74.0	-24.2	3.98 H	204	37.8	12.0
9	15600.00	37.8 AV	54.0	-16.2	3.98 H	204	25.8	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	1.60 V	16	58.7	1.1
2	5150.00	48.0 AV	54.0	-6.0	1.60 V	16	46.9	1.1
3	*5200.00	122.5 PK			1.60 V	16	121.4	1.1
4	*5200.00	110.2 AV			1.60 V	16	109.1	1.1
5	5350.00	52.7 PK	74.0	-21.3	1.60 V	16	51.9	0.8
6	5350.00	40.6 AV	54.0	-13.4	1.60 V	16	39.8	0.8
7	#10400.00	53.8 PK	68.2	-14.4	3.51 V	181	43.4	10.4
8	15600.00	49.2 PK	74.0	-24.8	3.44 V	122	37.2	12.0
9	15600.00	38.5 AV	54.0	-15.5	3.44 V	122	26.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.0 PK			1.56 H	313	113.2	0.8
2	*5240.00	102.0 AV			1.56 H	313	101.2	0.8
3	5382.30	48.2 PK	74.0	-25.8	1.56 H	313	47.3	0.9
4	5382.30	36.8 AV	54.0	-17.2	1.56 H	313	35.9	0.9
5	#10480.00	52.4 PK	68.2	-15.8	2.89 H	235	42.1	10.3
6	15720.00	49.6 PK	74.0	-24.4	3.94 H	195	38.4	11.2
7	15720.00	37.8 AV	54.0	-16.2	3.94 H	195	26.6	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.9 PK			1.63 V	16	121.1	0.8
2	*5240.00	109.9 AV			1.63 V	16	109.1	0.8
3	5359.58	51.6 PK	74.0	-22.4	1.63 V	16	50.7	0.9
4	5359.58	40.4 AV	54.0	-13.6	1.63 V	16	39.5	0.9
5	#10480.00	53.5 PK	68.2	-14.7	3.48 V	169	43.2	10.3
6	15720.00	49.1 PK	74.0	-24.9	3.44 V	126	37.9	11.2
7	15720.00	38.2 AV	54.0	-15.8	3.44 V	126	27.0	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.43	54.7 PK	68.2	-13.5	1.43 H	352	53.3	1.4
2	*5745.00	122.8 PK			1.43 H	352	121.1	1.7
3	*5745.00	111.7 AV			1.43 H	352	110.0	1.7
4	#5938.18	50.0 PK	68.2	-18.2	1.43 H	352	48.2	1.8
5	11490.00	46.9 PK	74.0	-27.1	2.15 H	248	34.8	12.1
6	11490.00	35.4 AV	54.0	-18.6	2.15 H	248	23.3	12.1
7	#17235.00	50.3 PK	68.2	-17.9	3.06 H	247	34.1	16.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.43	55.7 PK	68.2	-12.5	1.60 V	268	54.3	1.4
2	*5745.00	124.0 PK			1.60 V	268	122.3	1.7
3	*5745.00	115.5 AV			1.60 V	268	113.8	1.7
4	#5931.26	50.8 PK	68.2	-17.4	1.60 V	268	49.0	1.8
5	11490.00	47.5 PK	74.0	-26.5	3.62 V	161	35.4	12.1
6	11490.00	35.9 AV	54.0	-18.1	3.62 V	161	23.8	12.1
7	#17235.00	50.5 PK	68.2	-17.7	3.56 V	159	34.3	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.60	54.0 PK	68.2	-14.2	1.46 H	342	52.6	1.4
2	*5785.00	122.3 PK			1.46 H	342	120.5	1.8
3	*5785.00	111.8 AV			1.46 H	342	110.0	1.8
4	#5932.59	49.7 PK	68.2	-18.5	1.46 H	342	47.9	1.8
5	11570.00	46.7 PK	74.0	-27.3	2.07 H	248	34.7	12.0
6	11570.00	35.2 AV	54.0	-18.8	2.07 H	248	23.2	12.0
7	#17355.00	50.5 PK	68.2	-17.7	3.11 H	257	33.5	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.12	54.4 PK	68.2	-13.8	1.62 V	269	53.0	1.4
2	*5785.00	125.7 PK			1.62 V	269	123.9	1.8
3	*5785.00	115.2 AV			1.62 V	269	113.4	1.8
4	#5973.03	50.9 PK	68.2	-17.3	1.62 V	269	49.1	1.8
5	11570.00	47.6 PK	74.0	-26.4	3.51 V	156	35.6	12.0
6	11570.00	36.1 AV	54.0	-17.9	3.51 V	156	24.1	12.0
7	#17355.00	50.6 PK	68.2	-17.6	3.48 V	152	33.6	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.31	52.4 PK	68.2	-15.8	1.50 H	346	51.0	1.4
2	*5825.00	123.4 PK			1.50 H	346	121.6	1.8
3	*5825.00	112.0 AV			1.50 H	346	110.2	1.8
4	#5929.15	52.7 PK	68.2	-15.5	1.50 H	346	50.9	1.8
5	11650.00	47.4 PK	74.0	-26.6	2.16 H	255	35.7	11.7
6	11650.00	35.7 AV	54.0	-18.3	2.16 H	255	24.0	11.7
7	#17475.00	50.3 PK	68.2	-17.9	3.07 H	232	31.4	18.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.77	54.7 PK	68.2	-13.5	1.60 V	265	53.3	1.4
2	*5825.00	125.5 PK			1.60 V	265	123.7	1.8
3	*5825.00	114.7 AV			1.60 V	265	112.9	1.8
4	#5928.74	53.9 PK	68.2	-14.3	1.60 V	265	52.1	1.8
5	11650.00	47.4 PK	74.0	-26.6	3.53 V	156	35.7	11.7
6	11650.00	35.8 AV	54.0	-18.2	3.53 V	156	24.1	11.7
7	#17475.00	50.7 PK	68.2	-17.5	3.46 V	146	31.8	18.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	1.51 H	320	54.4	1.1
2	5150.00	42.3 AV	54.0	-11.7	1.51 H	320	41.2	1.1
3	*5190.00	105.5 PK			1.51 H	320	104.5	1.0
4	*5190.00	95.8 AV			1.51 H	320	94.8	1.0
5	#10380.00	50.2 PK	68.2	-18.0	2.90 H	219	39.9	10.3
6	15570.00	47.1 PK	74.0	-26.9	3.98 H	231	35.0	12.1
7	15570.00	35.7 AV	54.0	-18.3	3.98 H	231	23.6	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.2 PK	74.0	-8.8	1.60 V	17	64.1	1.1
2	5150.00	53.6 AV	54.0	-0.4	1.60 V	17	52.5	1.1
3	*5190.00	114.6 PK			1.60 V	17	113.6	1.0
4	*5190.00	103.3 AV			1.60 V	17	102.3	1.0
5	#10380.00	50.3 PK	68.2	-17.9	3.50 V	152	40.0	10.3
6	15570.00	46.6 PK	74.0	-27.4	3.44 V	116	34.5	12.1
7	15570.00	35.9 AV	54.0	-18.1	3.44 V	116	23.8	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.8 PK	74.0	-12.2	1.62 H	322	60.7	1.1
2	5150.00	50.0 AV	54.0	-4.0	1.62 H	322	48.9	1.1
3	*5230.00	110.3 PK			1.62 H	322	109.4	0.9
4	*5230.00	100.9 AV			1.62 H	322	100.0	0.9
5	5350.00	50.1 PK	74.0	-23.9	1.62 H	322	49.3	0.8
6	5350.00	38.9 AV	54.0	-15.1	1.62 H	322	38.1	0.8
7	#10460.00	50.0 PK	68.2	-18.2	2.94 H	221	39.6	10.4
8	15690.00	46.5 PK	74.0	-27.5	3.93 H	227	35.2	11.3
9	15690.00	35.3 AV	54.0	-18.7	3.93 H	227	24.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5146.30	63.7 PK	74.0	-10.3	1.68 V	17	62.6	1.1
2	5146.30	53.7 AV	54.0	-0.3	1.68 V	17	52.6	1.1
3	*5230.00	121.2 PK			1.68 V	17	120.3	0.9
4	*5230.00	108.5 AV			1.68 V	17	107.6	0.9
5	5356.19	56.4 PK	74.0	-17.6	1.68 V	17	55.5	0.9
6	5356.19	45.1 AV	54.0	-8.9	1.68 V	17	44.2	0.9
7	#10460.00	50.4 PK	68.2	-17.8	3.51 V	160	40.0	10.4
8	15690.00	45.9 PK	74.0	-28.1	3.45 V	128	34.6	11.3
9	15690.00	35.4 AV	54.0	-18.6	3.45 V	128	24.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.35	57.2 PK	68.2	-11.0	1.49 H	343	55.8	1.4
2	*5755.00	120.1 PK			1.49 H	343	118.4	1.7
3	*5755.00	109.0 AV			1.49 H	343	107.3	1.7
4	#5939.92	49.8 PK	68.2	-18.4	1.49 H	343	48.0	1.8
5	11510.00	46.5 PK	74.0	-27.5	2.19 H	240	34.4	12.1
6	11510.00	35.5 AV	54.0	-18.5	2.19 H	240	23.4	12.1
7	#17265.00	50.1 PK	68.2	-18.1	3.06 H	233	34.1	16.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5653.53	70.3 PK	70.8	-0.5	1.64 V	12	68.9	1.4
2	*5755.00	123.6 PK			1.64 V	12	121.9	1.7
3	*5755.00	110.9 AV			1.64 V	12	109.2	1.7
4	#5952.15	52.8 PK	68.2	-15.4	1.64 V	12	51.0	1.8
5	11510.00	46.3 PK	74.0	-27.7	3.57 V	149	34.2	12.1
6	11510.00	35.4 AV	54.0	-18.6	3.57 V	149	23.3	12.1
7	#17265.00	49.7 PK	68.2	-18.5	3.49 V	151	33.7	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.00	57.0 PK	68.2	-11.2	1.51 H	346	55.6	1.4
2	*5795.00	120.5 PK			1.51 H	346	118.6	1.9
3	*5795.00	108.7 AV			1.51 H	346	106.8	1.9
4	#5925.15	58.7 PK	68.2	-9.5	1.51 H	346	56.9	1.8
5	11590.00	46.2 PK	74.0	-27.8	2.22 H	247	34.2	12.0
6	11590.00	35.2 AV	54.0	-18.8	2.22 H	247	23.2	12.0
7	#17385.00	49.8 PK	68.2	-18.4	3.10 H	235	32.0	17.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.72	60.9 PK	68.2	-7.3	1.63 V	11	59.5	1.4
2	*5795.00	122.8 PK			1.63 V	11	120.9	1.9
3	*5795.00	111.0 AV			1.63 V	11	109.1	1.9
4	#5934.35	59.9 PK	68.2	-8.3	1.63 V	11	58.1	1.8
5	11590.00	46.3 PK	74.0	-27.7	3.55 V	151	34.3	12.0
6	11590.00	35.5 AV	54.0	-18.5	3.55 V	151	23.5	12.0
7	#17385.00	50.0 PK	68.2	-18.2	3.50 V	156	32.2	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5143.00	54.9 PK	74.0	-19.1	1.60 H	303	53.8	1.1
2	5143.00	44.2 AV	54.0	-9.8	1.60 H	303	43.1	1.1
3	*5210.00	102.7 PK			1.60 H	303	101.7	1.0
4	*5210.00	93.7 AV			1.60 H	303	92.7	1.0
5	5350.00	47.3 PK	74.0	-26.7	1.60 H	303	46.5	0.8
6	5350.00	36.3 AV	54.0	-17.7	1.60 H	303	35.5	0.8
7	5418.50	48.5 PK	74.0	-25.5	1.60 H	303	47.5	1.0
8	5418.50	36.1 AV	54.0	-17.9	1.60 H	303	35.1	1.0
9	#10420.00	50.1 PK	68.2	-18.1	2.86 H	218	39.7	10.4
10	15630.00	46.6 PK	74.0	-27.4	3.98 H	220	34.8	11.8
11	15630.00	35.3 AV	54.0	-18.7	3.98 H	220	23.5	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5146.03	66.0 PK	74.0	-8.0	1.65 V	16	64.9	1.1
2	5146.03	53.8 AV	54.0	-0.2	1.65 V	16	52.7	1.1
3	*5210.00	113.2 PK			1.65 V	16	112.2	1.0
4	*5210.00	101.1 AV			1.65 V	16	100.1	1.0
5	5356.27	52.7 PK	74.0	-21.3	1.65 V	16	51.8	0.9
6	5356.27	41.8 AV	54.0	-12.2	1.65 V	16	40.9	0.9
7	#10420.00	50.2 PK	68.2	-18.0	3.50 V	162	39.8	10.4
8	15630.00	46.2 PK	74.0	-27.8	3.42 V	124	34.4	11.8
9	15630.00	35.8 AV	54.0	-18.2	3.42 V	124	24.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.93	63.8 PK	68.2	-4.4	1.50 H	347	62.4	1.4
2	*5775.00	113.0 PK			1.50 H	347	111.2	1.8
3	*5775.00	101.5 AV			1.50 H	347	99.7	1.8
4	#5925.84	55.6 PK	68.2	-12.6	1.50 H	347	53.8	1.8
5	11550.00	45.8 PK	74.0	-28.2	2.06 H	253	33.7	12.1
6	11550.00	35.0 AV	54.0	-19.0	2.06 H	253	22.9	12.1
7	#17325.00	50.3 PK	68.2	-17.9	3.11 H	268	33.9	16.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.60	67.9 PK	68.2	-0.3	1.67 V	12	66.5	1.4
2	*5775.00	115.8 PK			1.67 V	12	114.0	1.8
3	*5775.00	104.9 AV			1.67 V	12	103.1	1.8
4	#5931.27	60.6 PK	68.2	-7.6	1.67 V	12	58.8	1.8
5	11550.00	46.0 PK	74.0	-28.0	3.54 V	158	33.9	12.1
6	11550.00	35.1 AV	54.0	-18.9	3.54 V	158	23.0	12.1
7	#17325.00	49.2 PK	68.2	-19.0	3.42 V	156	32.8	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:


For U-NII-1:

RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.34	32.5 QP	40.0	-7.5	3.00 H	317	46.0	-13.5
2	85.37	33.4 QP	40.0	-6.6	2.00 H	276	51.7	-18.3
3	105.34	37.0 QP	43.5	-6.5	3.00 H	5	52.6	-15.6
4	125.00	40.0 QP	43.5	-3.5	3.00 H	98	53.7	-13.7
5	300.36	35.1 QP	46.0	-10.9	1.00 H	121	45.8	-10.7
6	600.05	35.6 QP	46.0	-10.4	1.00 H	17	37.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

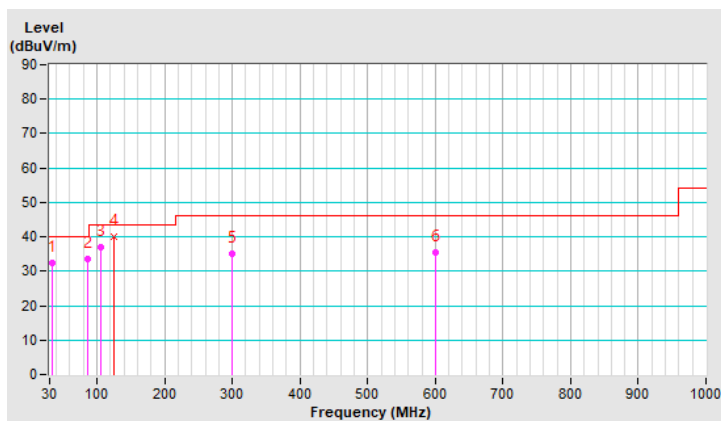


RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.67	36.8 QP	40.0	-3.2	1.00 V	181	50.4	-13.6
2	53.34	36.4 QP	40.0	-3.6	1.00 V	250	48.9	-12.5
3	62.37	36.4 QP	40.0	-3.6	1.50 V	299	50.0	-13.6
4	84.30	36.1 QP	40.0	-3.9	2.00 V	121	54.2	-18.1
5	125.03	36.7 QP	43.5	-6.8	1.00 V	300	50.4	-13.7
6	301.37	36.2 QP	46.0	-9.8	1.50 V	351	46.9	-10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

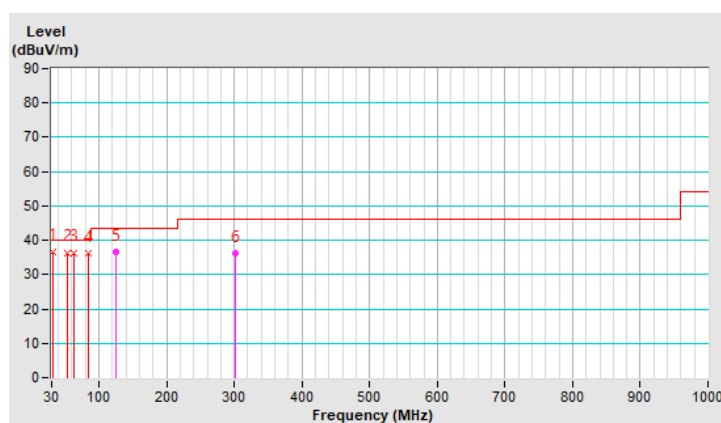


For U-NII-3:

RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.97	32.7 QP	40.0	-7.3	3.00 H	319	46.4	-13.7
2	84.97	33.7 QP	40.0	-6.3	2.00 H	250	51.9	-18.2
3	104.73	36.8 QP	43.5	-6.7	3.00 H	31	52.5	-15.7
4	125.07	40.1 QP	43.5	-3.4	3.00 H	101	53.8	-13.7
5	297.64	35.4 QP	46.0	-10.6	1.00 H	131	46.2	-10.8
6	599.97	35.4 QP	46.0	-10.6	1.00 H	23	37.7	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

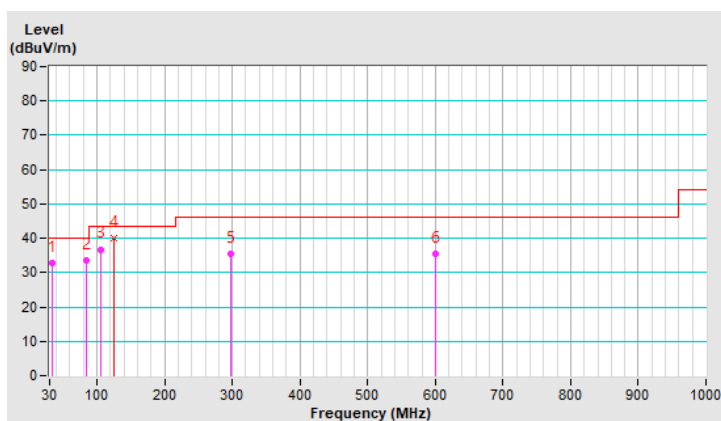


RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.90	36.7 QP	40.0	-3.3	1.00 V	197	50.5	-13.8
2	54.57	36.5 QP	40.0	-3.5	1.00 V	249	49.2	-12.7
3	64.37	36.6 QP	40.0	-3.4	1.50 V	307	50.5	-13.9
4	83.97	36.4 QP	40.0	-3.6	2.00 V	139	54.5	-18.1
5	125.05	36.6 QP	43.5	-6.9	1.00 V	295	50.3	-13.7
6	302.23	36.4 QP	46.0	-9.6	1.50 V	333	47.0	-10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

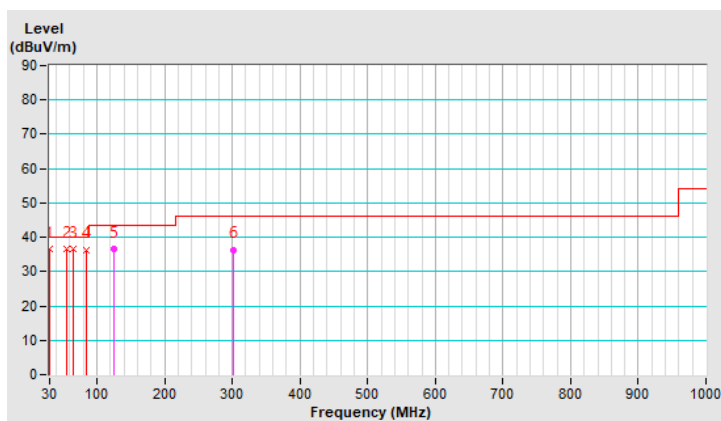

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 20, 2020	Oct. 19, 2021
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 27, 2020	Oct. 26, 2021
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 26, 2021	Mar. 25, 2022
50 ohms Terminator	50	3	Oct. 26, 2020	Oct. 25, 2021
RF Cable	5D-FB	COCCAB-001	Sep. 26, 2020	Sep. 25, 2021
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Apr. 09, 2021

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

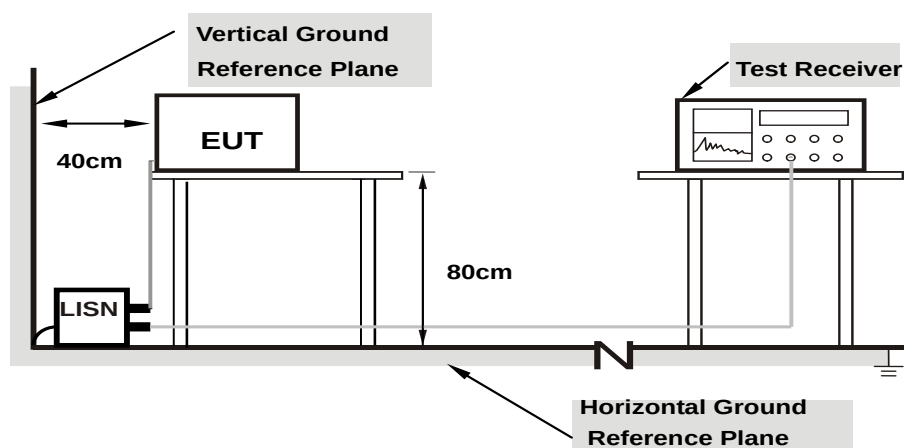

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.

4.2.7 Test Results


For U-NII-1:

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.96	39.55	29.18	49.51	39.14	66.00	56.00	-16.49	-16.86
2	0.19297	9.99	31.24	21.11	41.23	31.10	63.91	53.91	-22.68	-22.81
3	0.20469	9.99	30.12	21.11	40.11	31.10	63.42	53.42	-23.31	-22.32
4	0.34922	10.01	36.34	31.62	46.35	41.63	58.98	48.98	-12.63	-7.35
5	0.73984	10.04	18.40	11.78	28.44	21.82	56.00	46.00	-27.56	-24.18
6	10.53906	10.76	20.24	14.34	31.00	25.10	60.00	50.00	-29.00	-24.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

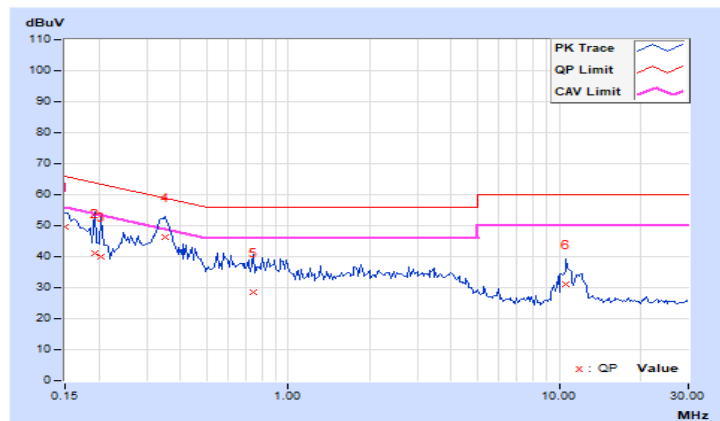


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.94	38.75	29.06	48.69	39.00	66.00	56.00	-17.31	-17.00
2	0.18906	9.97	31.38	21.41	41.35	31.38	64.08	54.08	-22.73	-22.70
3	0.34922	10.00	36.70	32.16	46.70	42.16	58.98	48.98	-12.28	-6.82
4	0.56016	10.03	19.73	13.59	29.76	23.62	56.00	46.00	-26.24	-22.38
5	0.92344	10.06	21.00	14.26	31.06	24.32	56.00	46.00	-24.94	-21.68
6	1.76953	10.12	22.30	16.97	32.42	27.09	56.00	46.00	-23.58	-18.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

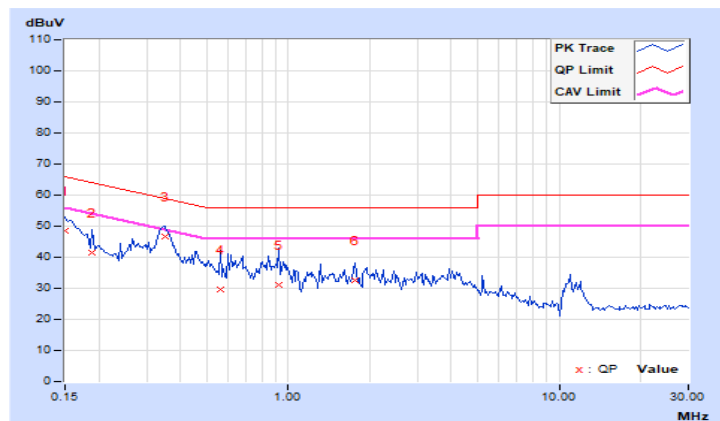


For U-NII-3:

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.96	37.60	27.33	47.56	37.29	65.58	55.58	-18.02	-18.29
2	0.26328	10.00	30.50	24.88	40.50	34.88	61.33	51.33	-20.83	-16.45
3	0.35313	10.01	36.50	31.94	46.51	41.95	58.89	48.89	-12.38	-6.94
4	0.41563	10.02	24.87	18.19	34.89	28.21	57.54	47.54	-22.65	-19.33
5	0.61875	10.03	22.33	16.64	32.36	26.67	56.00	46.00	-23.64	-19.33
6	10.27734	10.74	18.90	13.17	29.64	23.91	60.00	50.00	-30.36	-26.09

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

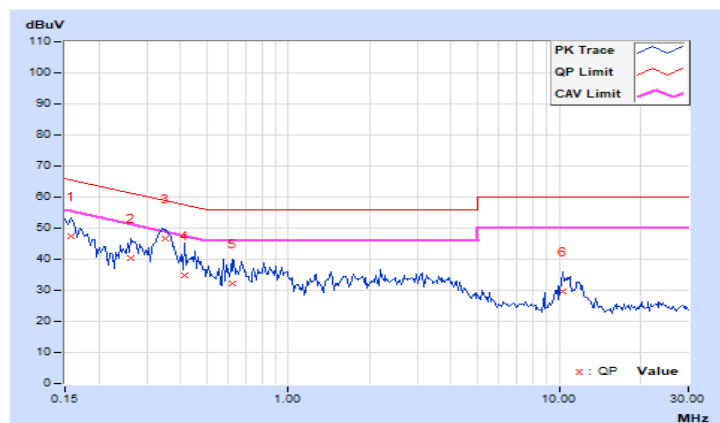


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.94	37.89	28.12	47.83	38.06	65.79	55.79	-17.96	-17.73
2	0.17344	9.96	33.93	24.28	43.89	34.24	64.79	54.79	-20.90	-20.55
3	0.36094	10.00	35.26	30.54	45.26	40.54	58.71	48.71	-13.45	-8.17
4	0.68125	10.04	22.87	18.04	32.91	28.08	56.00	46.00	-23.09	-17.92
5	1.99609	10.14	22.32	16.83	32.46	26.97	56.00	46.00	-23.54	-19.03
6	4.23828	10.26	20.96	14.82	31.22	25.08	56.00	46.00	-24.78	-20.92

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

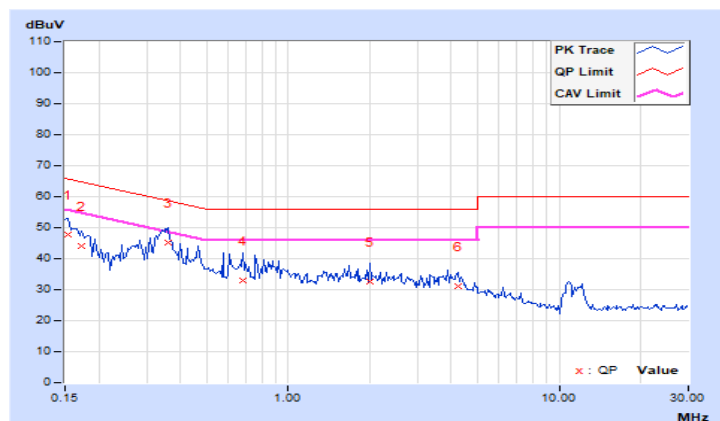

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Note: This device can support different category application which switched by access point mode and client mode by software.

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

For U-NII-1:

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.52	22.86	418.102	26.21	30.00	Pass
40	5200	26.07	25.54	762.672	28.82	30.00	Pass
48	5240	25.87	25.92	777.208	28.91	30.00	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.50	22.72	410.94	26.14	30.00	Pass
40	5200	25.66	25.16	696.224	28.43	30.00	Pass
48	5240	25.53	25.43	706.413	28.49	30.00	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	20.75	20.31	226.249	23.55	30.00	Pass
46	5230	25.56	25.88	747.007	28.73	30.00	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	20.63	20.60	230.427	23.63	30.00	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.72	22.99	434.572	26.38	30.00	Pass
40	5200	25.96	25.45	745.209	28.72	30.00	Pass
48	5240	25.76	25.73	750.814	28.76	30.00	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	21.03	20.53	239.745	23.80	30.00	Pass
46	5230	25.86	26.09	791.922	28.99	30.00	Pass

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	20.91	20.82	244.092	23.88	30.00	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.50	22.72	410.94	26.14	30.00	Pass
40	5200	25.66	25.16	696.224	28.43	30.00	Pass
48	5240	25.53	25.43	706.413	28.49	30.00	Pass

Note: 1. For U-NII-1: The directional gain = 4.48 dBi < 6dBi, so the power limit shall not be reduced.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	20.75	20.31	226.249	23.55	30.00	Pass
46	5230	25.56	25.88	747.007	28.73	30.00	Pass

Note: 1. For U-NII-1: The directional gain = 4.48 dBi < 6dBi, so the power limit shall not be reduced.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	20.63	20.60	230.427	23.63	30.00	Pass

Note: 1. For U-NII-1: The directional gain = 4.48 dBi < 6dBi, so the power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	23.72	22.99	434.572	26.38	30.00	Pass
40	5200	25.96	25.45	745.209	28.72	30.00	Pass
48	5240	25.76	25.73	750.814	28.76	30.00	Pass

Note: 1. For U-NII-1: The directional gain = 4.48 dBi < 6dBi, so the power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	21.03	20.53	239.745	23.80	30.00	Pass
46	5230	25.86	26.09	791.922	28.99	30.00	Pass

Note: 1. For U-NII-1: The directional gain = 4.48 dBi < 6dBi, so the power limit shall not be reduced.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	20.91	20.82	244.092	23.88	30.00	Pass

Note: 1. For U-NII-1: The directional gain = 4.48 dBi < 6dBi, so the power limit shall not be reduced.

For U-NII-3:

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	22.35	23.43	23.45	23.31	827.682	29.18	30.00	Pass
157	5785	22.94	23.47	23.40	23.41	857.176	29.33	30.00	Pass
165	5825	23.16	23.46	24.05	23.19	891.38	29.50	30.00	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	22.32	23.42	22.95	23.24	798.499	29.02	30.00	Pass
157	5785	22.43	23.23	23.68	22.91	814.142	29.11	30.00	Pass
165	5825	23.23	23.60	23.93	23.03	887.546	29.48	30.00	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	22.15	23.12	23.81	23.36	826.382	29.17	30.00	Pass
159	5795	22.71	23.15	23.76	23.11	835.504	29.22	30.00	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	21.81	22.12	22.64	22.12	661.218	28.20	30.00	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	22.60	23.64	23.18	23.47	843.477	29.26	30.00	Pass
157	5785	22.73	23.44	23.91	23.13	859.926	29.34	30.00	Pass
165	5825	23.52	23.88	24.14	23.32	943.449	29.75	30.00	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	22.43	23.34	24.04	23.59	872.832	29.41	30.00	Pass
159	5795	23.01	23.36	23.99	23.33	882.646	29.46	30.00	Pass

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	22.09	22.34	22.87	22.35	698.637	28.44	30.00	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	22.29	23.40	22.78	23.13	783.47	28.94	29.22	Pass
157	5785	22.28	23.25	23.39	22.55	778.553	28.91	29.22	Pass
165	5825	22.34	23.30	23.56	22.76	800.978	29.04	29.22	Pass

Note: 1. For U-NII-3: The directional gain = 6.78 dBi > 6dBi, so the so the power limit shall be reduced to $30-(6.78-6) = 29.22$ dBm.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	22.06	22.86	23.61	23.12	788.622	28.97	29.22	Pass
159	5795	22.53	22.96	23.69	22.77	799.876	29.03	29.22	Pass

Note: 1. For U-NII-3: The directional gain = 6.78 dBi > 6dBi, so the so the power limit shall be reduced to $30-(6.78-6) = 29.22$ dBm.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	21.81	22.12	22.64	22.12	661.218	28.20	29.22	Pass

Note: 1. For U-NII-3: The directional gain = 6.78 dBi > 6dBi, so the so the power limit shall be reduced to $30-(6.78-6) = 29.22$ dBm.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	22.45	23.56	22.89	23.29	810.619	29.09	29.22	Pass
157	5785	22.44	23.42	23.49	22.71	805.169	29.06	29.22	Pass
165	5825	22.50	23.46	23.72	22.90	830.137	29.19	29.22	Pass

Note: 1. For U-NII-3: The directional gain = 6.78 dBi > 6dBi, so the so the power limit shall be reduced to $30-(6.78-6) = 29.22$ dBm.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	22.22	23.02	23.77	23.19	813.853	29.11	29.22	Pass
159	5795	22.69	23.12	23.85	22.91	828.992	29.19	29.22	Pass

Note: 1. For U-NII-3: The directional gain = 6.78 dBi > 6dBi, so the so the power limit shall be reduced to $30-(6.78-6) = 29.22$ dBm.


802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	22.09	22.34	22.87	22.35	698.637	28.44	29.22	Pass

Note: 1. For U-NII-3: The directional gain = 6.78 dBi > 6dBi, so the so the power limit shall be reduced to $30-(6.78-6) = 29.22$ dBm.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Test Results

For U-NII-1:

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.56	16.44
40	5200	17.76	16.68
48	5240	17.76	17.16

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	19.08	19.08
40	5200	19.44	19.08
48	5240	19.44	19.32

802.11ax (HE40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	38.16	38.16
46	5230	39.48	38.64

802.11ax (HE80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	78.24	77.28

Spectrum Plot of Max. Value


802.11a_Chain 0 / CH40

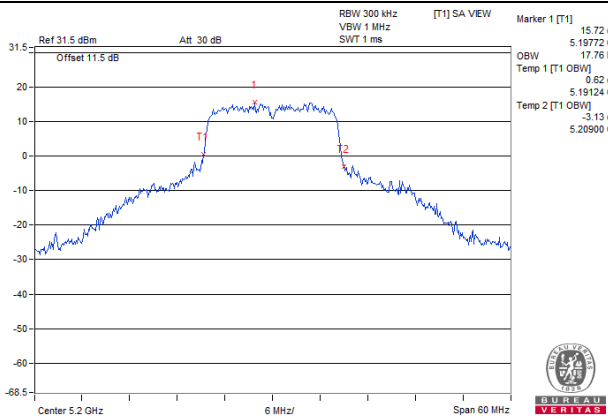


802.11ax (HE20)_Chain 0 / CH40

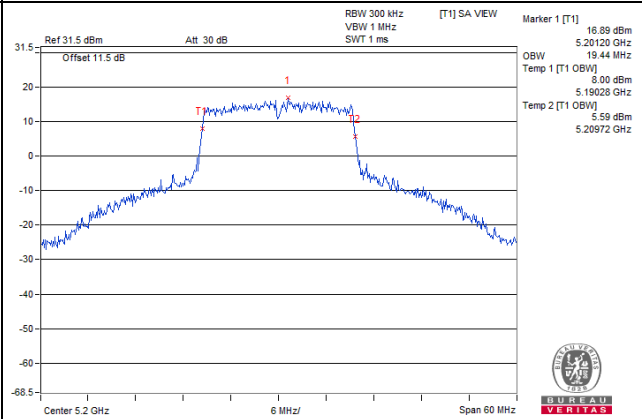

802.11ax (HE40)_Chain 0 / CH46

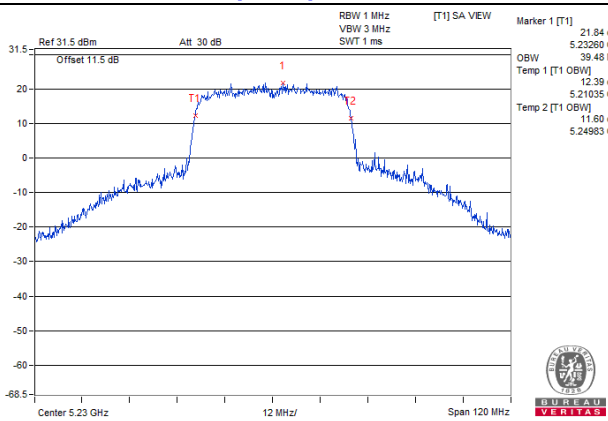

802.11ax (HE80)_Chain 0 / CH42

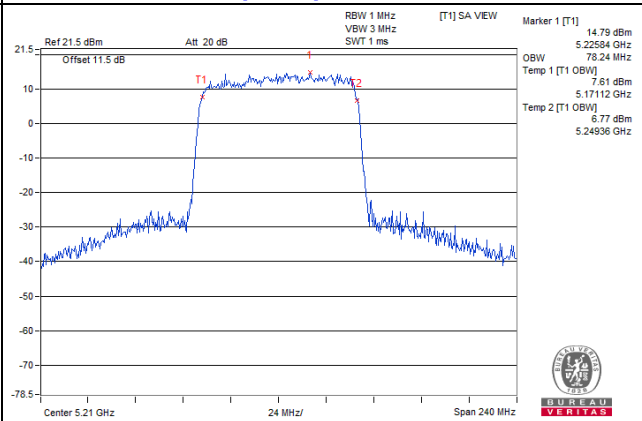

For U-NII-3:

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	16.52	16.52	16.52	16.52
157	5785	16.56	16.68	16.44	16.44
165	5825	16.32	16.32	16.44	16.44

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	19.05	19.08	19.08	18.96
157	5785	18.96	19.08	19.08	19.08
165	5825	18.96	19.08	19.08	18.96

802.11ax (HE40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
151	5755	38.16	38.64	37.92	38.16
159	5795	38.16	38.16	38.16	38.16

802.11ax (HE80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
155	5775	77.28	76.8	77.28	77.28

Spectrum Plot of Max. Value


802.11a Chain 1 / CH157

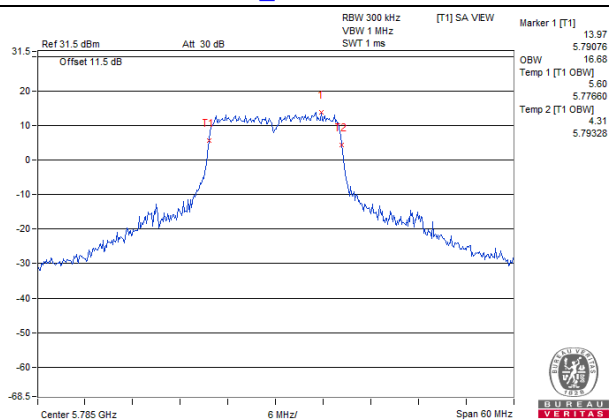


802.11ax (HE20) Chain 1 / CH149

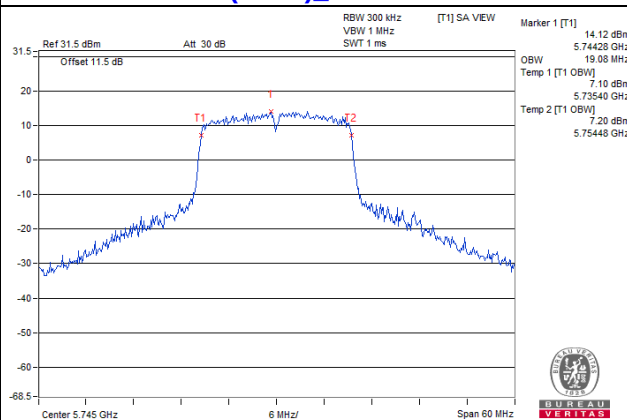

802.11ax (HE40) Chain 1 / CH151

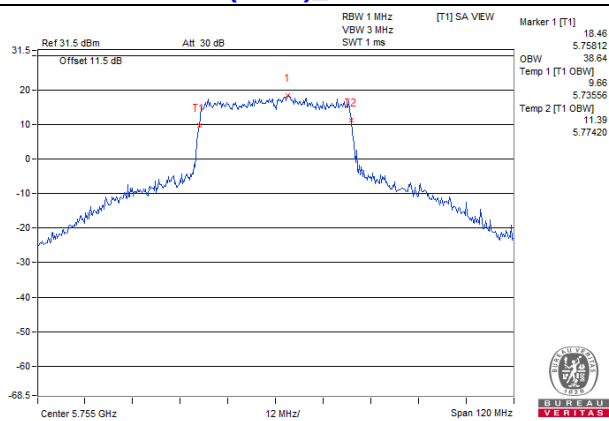


802.11ax (HE80) Chain 0 / CH155

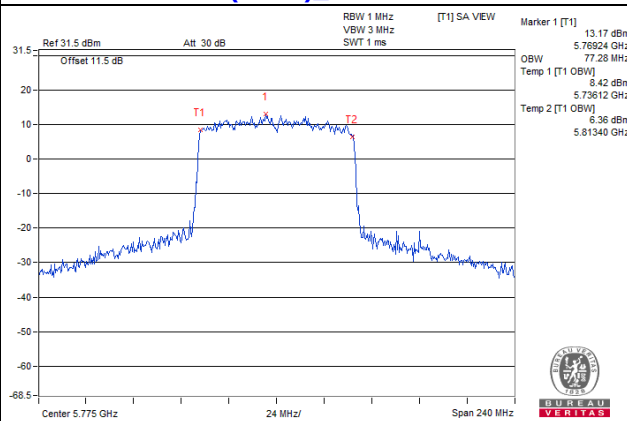


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11a_Chain 0 / CH48

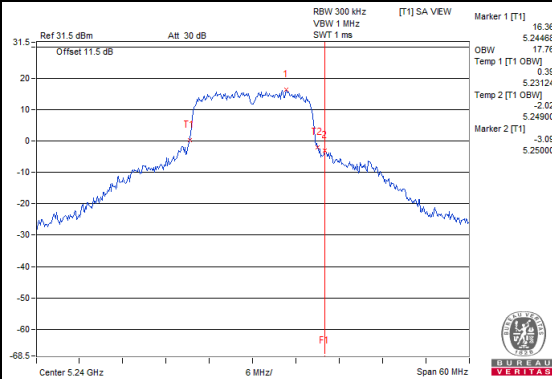


802.11a_Chain 1 / CH48

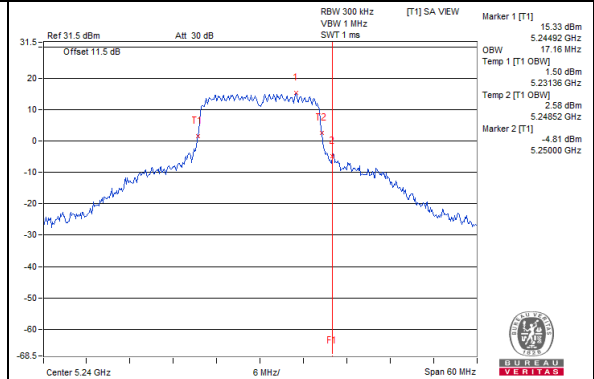


802.11ax (HE20)_Chain 0 / CH48

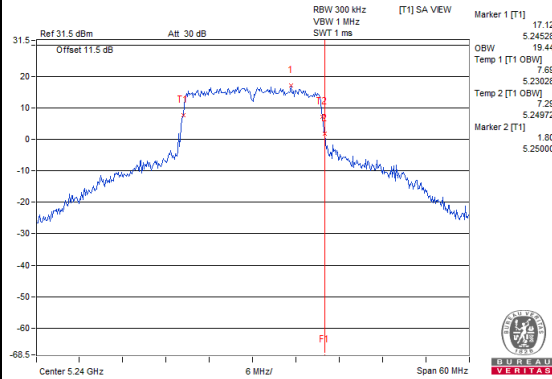


802.11ax (HE20)_Chain 1 / CH48

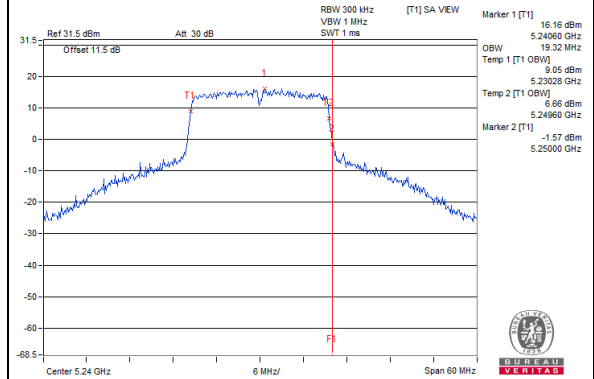


802.11ax (HE40)_Chain 0 / CH46

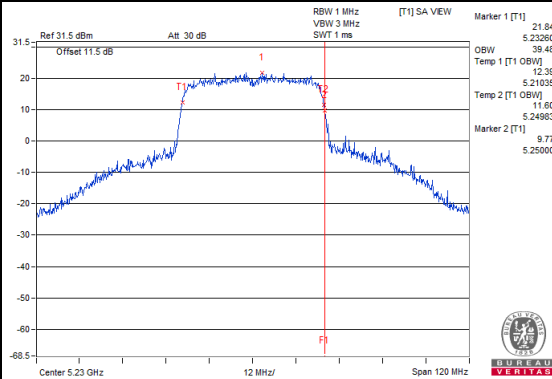


802.11ax (HE40)_Chain 1 / CH46

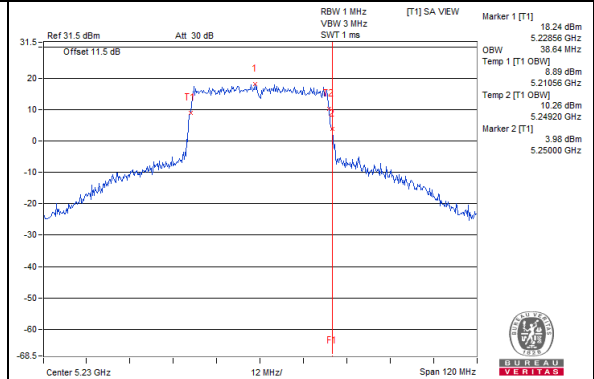

802.11ax (HE80)_Chain 0 / CH42

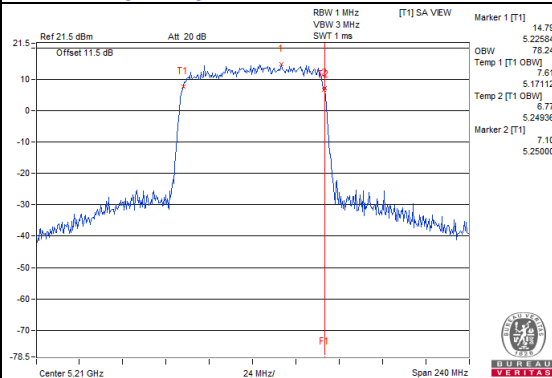


802.11ax (HE80)_Chain 1 / CH42

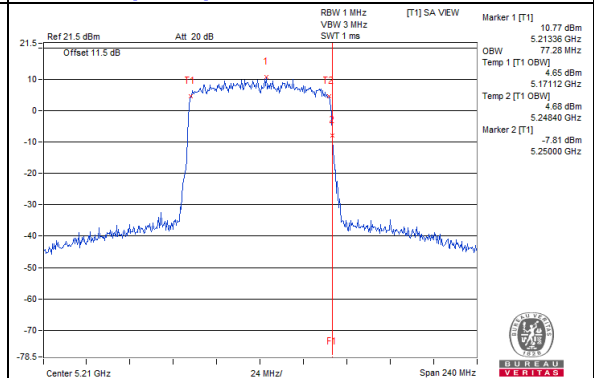


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11a_Chain 0 / CH149

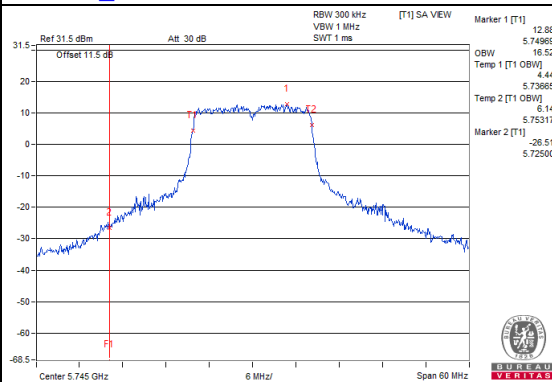


802.11a_Chain 1 / CH149

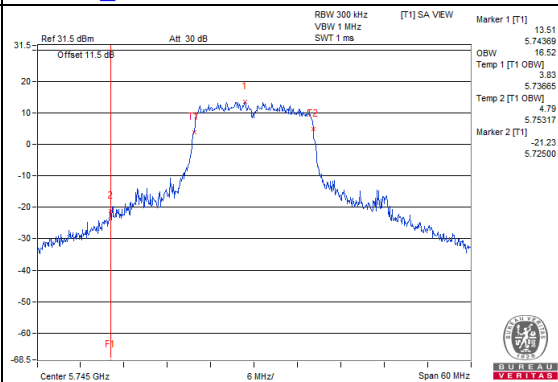


802.11a_Chain 2 / CH149

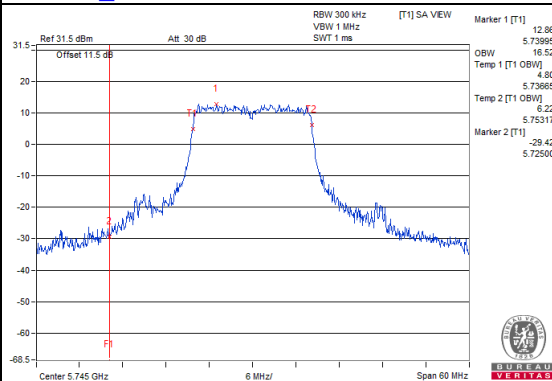


802.11a_Chain 3 / CH149

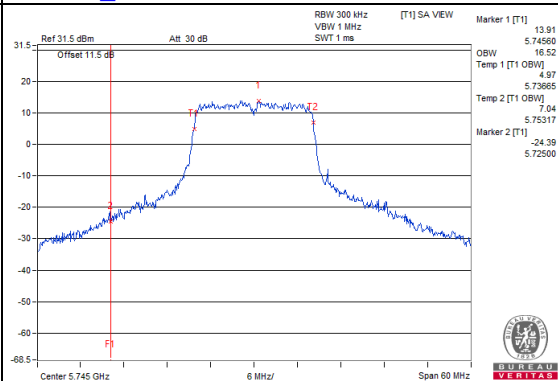


802.11ax (HE20)_Chain 0 / CH149

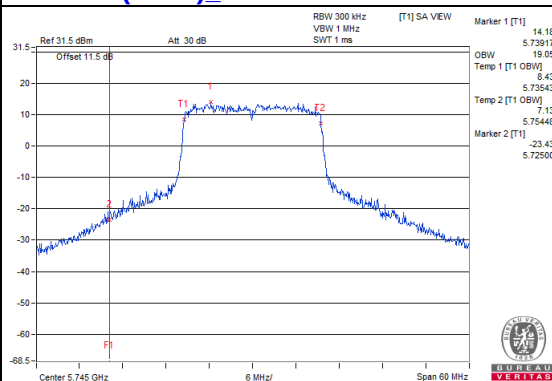


802.11ax (HE20)_Chain 1 / CH149

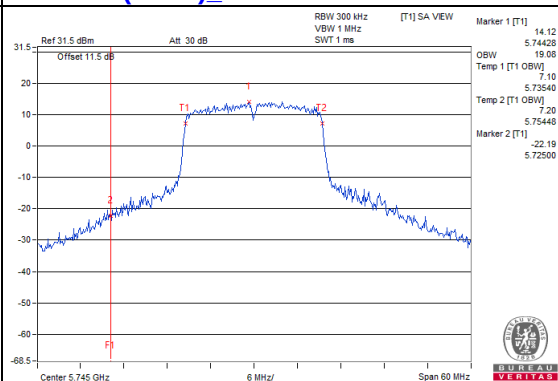

802.11ax (HE20)_Chain 2 / CH149

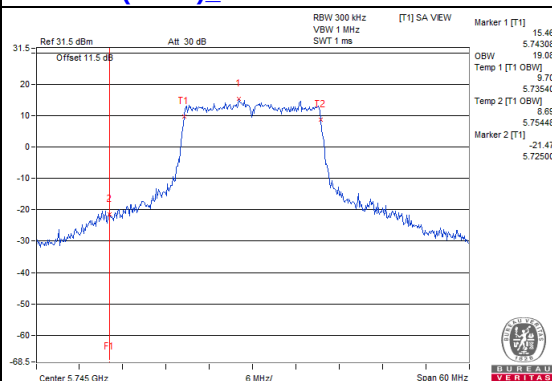


802.11ax (HE20)_Chain 3 / CH149

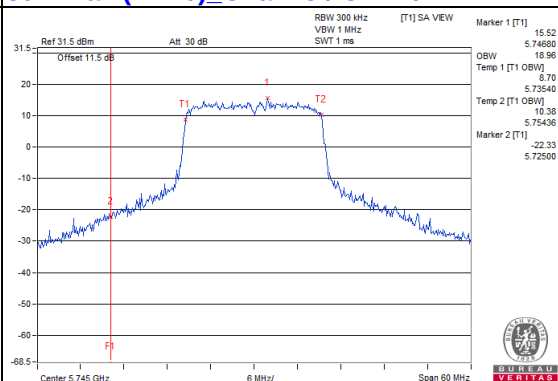


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11ax (HE40)_Chain 0 / CH151

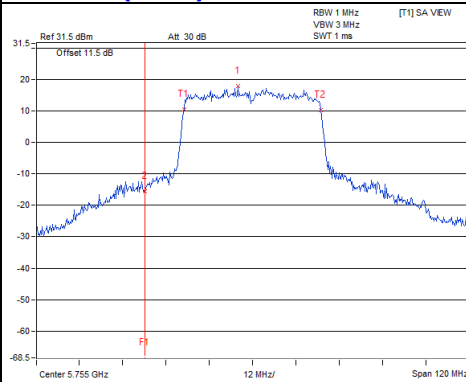


802.11ax (HE40)_Chain 1 / CH151

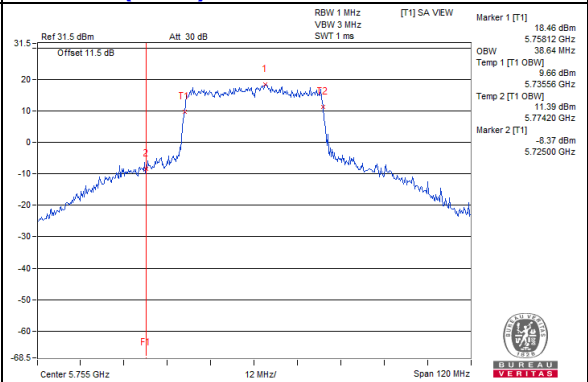


802.11ax (HE40)_Chain 2 / CH151

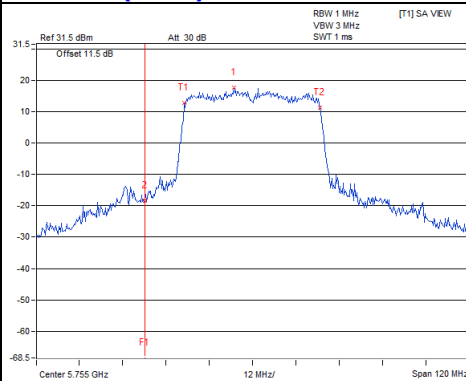


802.11ax (HE40)_Chain 3 / CH151

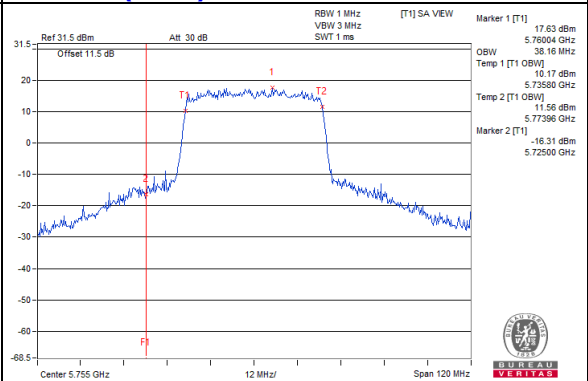


802.11ax (HE80)_Chain 0 / CH155

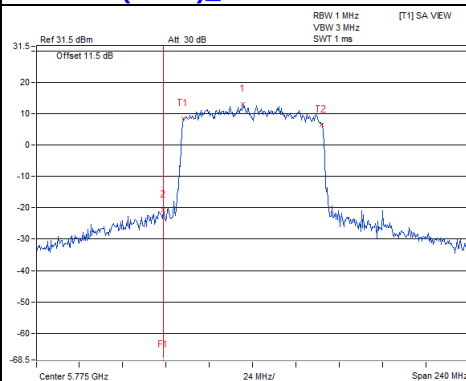


802.11ax (HE80)_Chain 1 / CH155

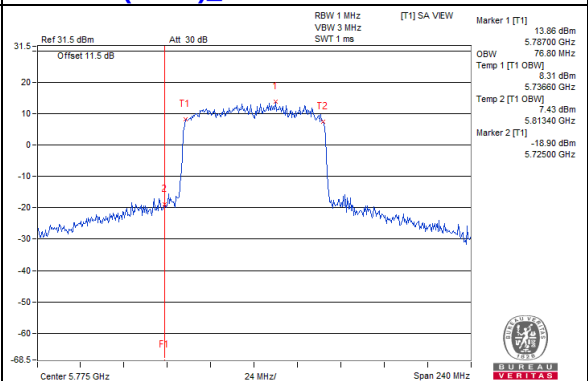

802.11ax (HE80)_Chain 2 / CH155

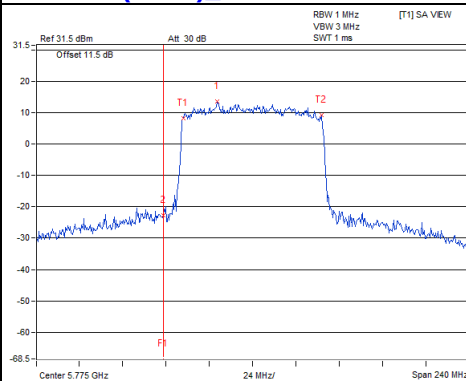

802.11ax (HE80)_Chain 3 / CH155

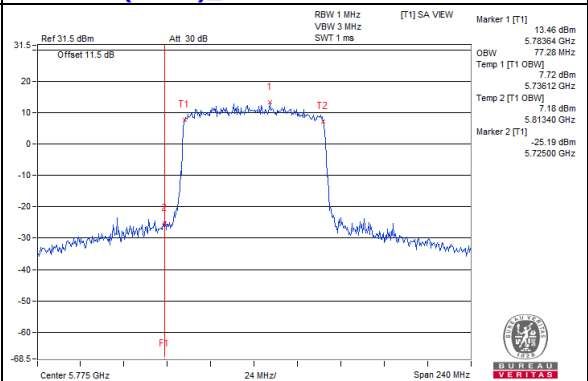

4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For U-NII-1, U-NII-2A, U-NII-2C band:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

※For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{ kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add 10 log (1/duty cycle)

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

For U-NII-1:

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Pass / Fail
		Chain0	Chain1				
36	5180	7.75	7.68	0.28	11.00	17.00	PASS
40	5200	10.81	10.50	0.28	13.95	17.00	PASS
48	5240	11.36	10.28	0.28	14.14	17.00	PASS

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 4.48 dBi < 6dBi, so the power density limit shall not be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Pass / Fail
		Chain0	Chain1				
36	5180	7.40	6.88	0.19	10.35	17.00	PASS
40	5200	10.42	9.61	0.19	13.23	17.00	PASS
48	5240	10.96	9.74	0.19	13.59	17.00	PASS

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 4.48 dBi < 6dBi, so the power density limit shall not be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Pass / Fail
		Chain0	Chain1				
38	5190	1.95	1.59	0.21	5.00	17.00	PASS
46	5230	8.54	6.61	0.21	10.90	17.00	PASS


- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 4.48 dBi < 6dBi, so the power density limit shall not be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Pass / Fail
		Chain0	Chain1				
42	5210	-0.44	-2.01	0.22	2.08	17.00	PASS

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = 4.48 dBi < 6dBi, so the power density limit shall not be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value

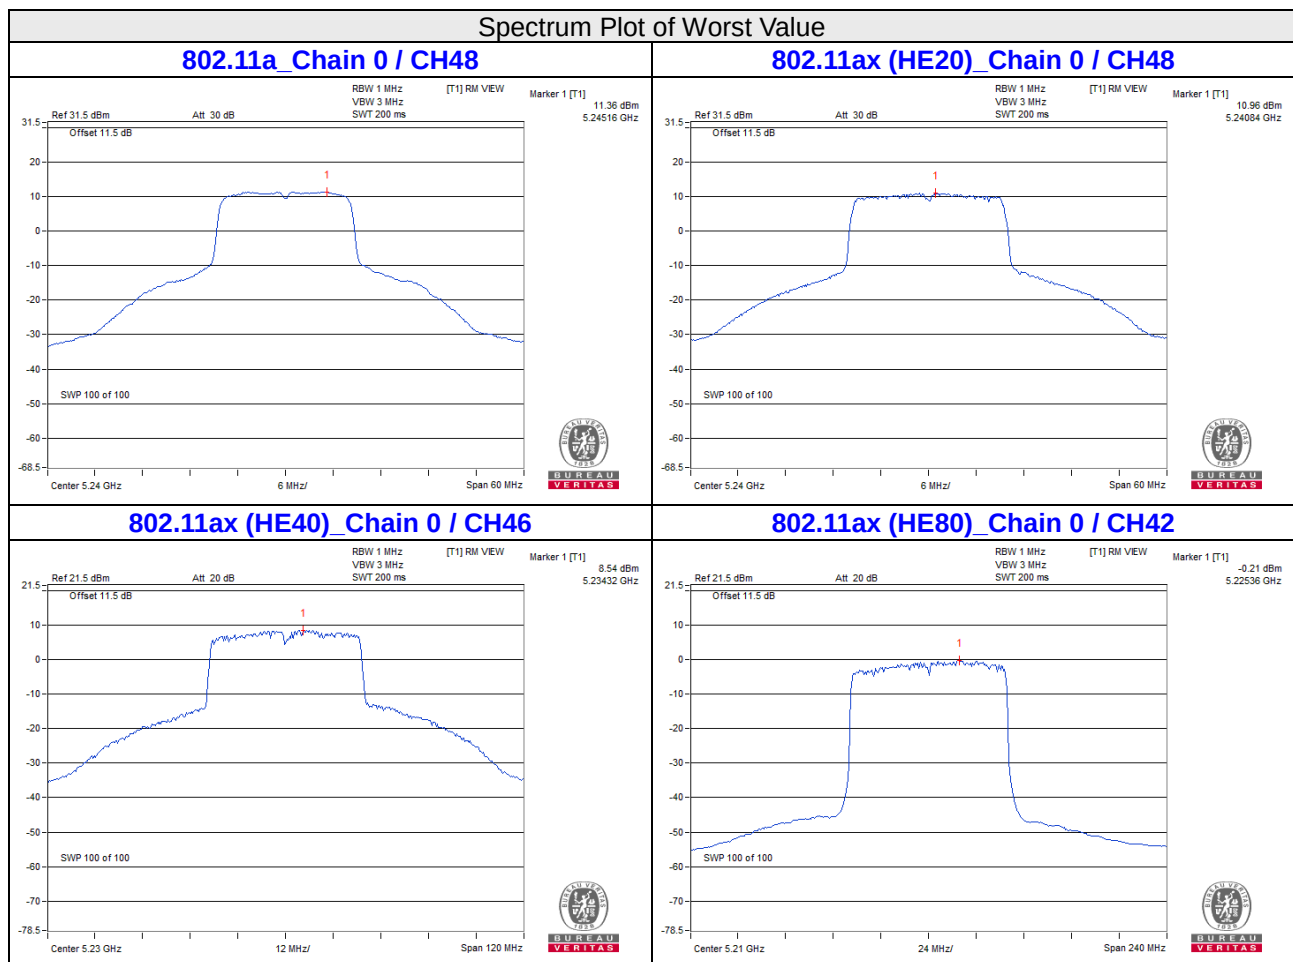

For U-NII-3:

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3						
149	5745	-0.08	0.06	-0.31	0.86	0.27	4.4102	6.44	8.66	29.22	PASS
157	5785	0.12	0.36	0.42	0.82	0.27	4.706	6.73	8.95	29.22	PASS
165	5825	-0.04	0.41	0.13	-0.25	0.27	4.3236	6.36	8.58	29.22	PASS

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 6.78 dBi > 6dBi, so the power density limit shall be reduced to $30 - (6.78 - 6) = 29.22$ dBm.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3						
149	5745	-1.45	-0.81	-0.50	-0.56	0.19	3.4647	5.40	7.62	29.22	PASS
157	5785	-1.22	-0.77	-0.43	-0.41	0.19	3.5609	5.52	7.74	29.22	PASS
165	5825	-1.65	-1.08	-1.20	-1.46	0.19	3.0683	4.87	7.09	29.22	PASS

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 6.78 dBi > 6dBi, so the power density limit shall be reduced to $30 - (6.78 - 6) = 29.22$ dBm.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3						
151	5755	-3.56	-2.22	-3.53	-3.22	0.20	2.0546	3.13	5.35	29.22	PASS
159	5795	-3.69	-2.72	-2.72	-3.70	0.20	2.0157	3.04	5.26	29.22	PASS


Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 6.78 dBi > 6dBi, so the power density limit shall be reduced to $30 - (6.78 - 6) = 29.22$ dBm.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD (mW/300kHz)	Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3						
155	5775	-7.77	-7.07	-7.67	-8.10	0.18	0.7191	-1.43	0.79	29.22	PASS

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = 6.78 dBi > 6dBi, so the power density limit shall be reduced to $30 - (6.78 - 6) = 29.22$ dBm.

Spectrum Plot of Worst Value

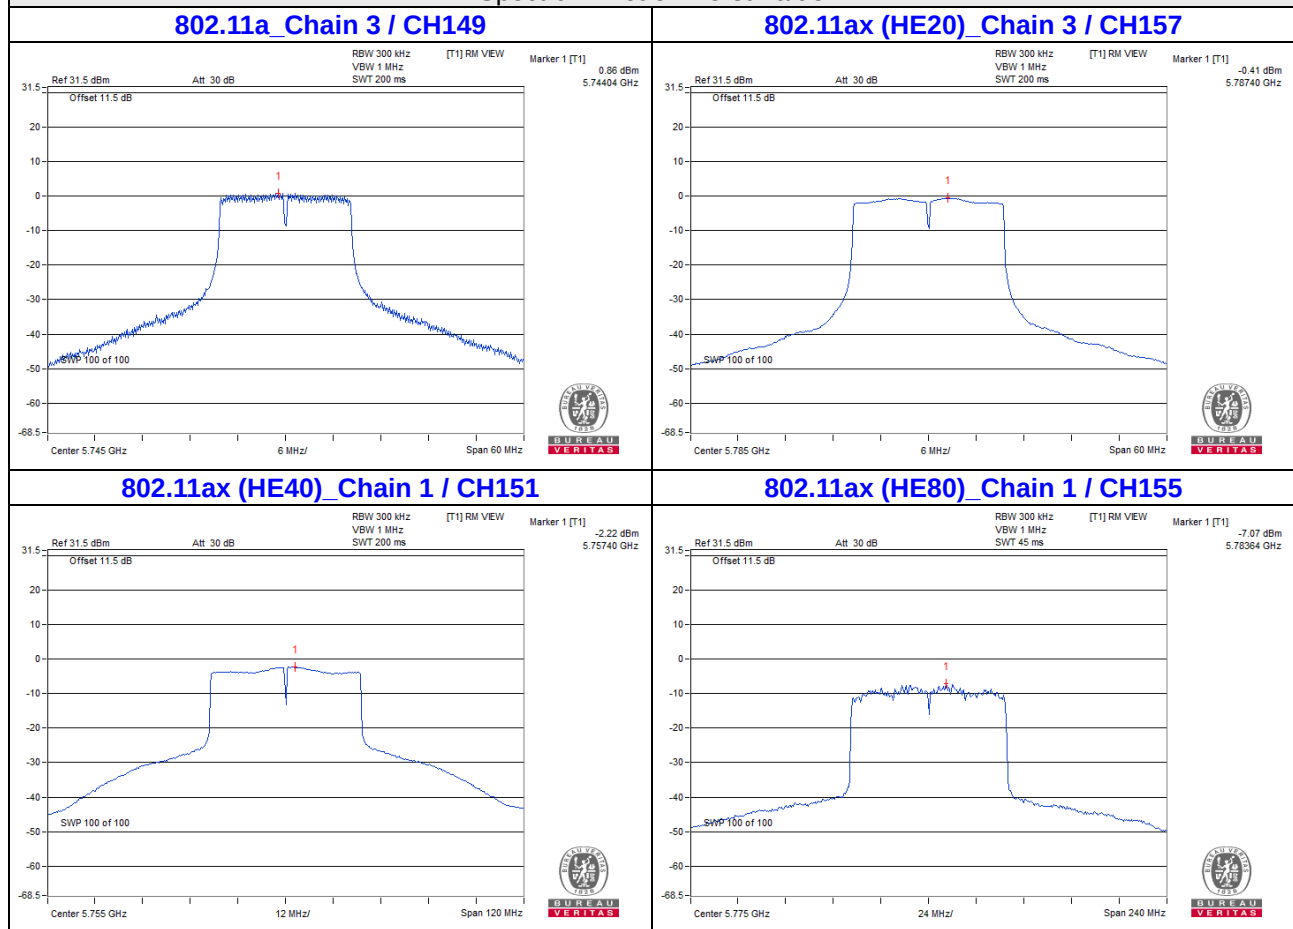


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

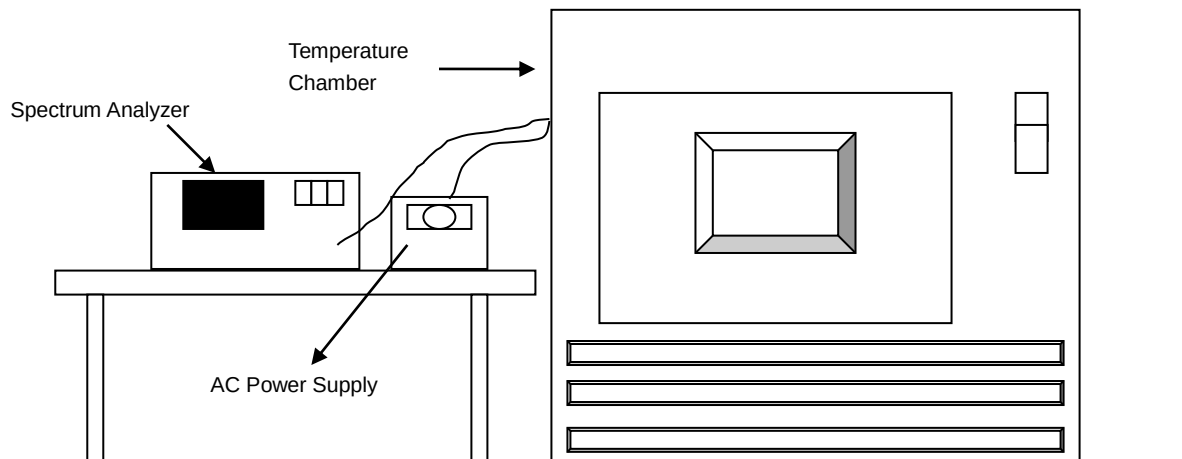

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
40	120	5179.9941	Pass	5179.9971	Pass	5179.9931	Pass	5179.9935	Pass
30	120	5180.0035	Pass	5180.005	Pass	5180.0051	Pass	5180.0006	Pass
20	120	5179.9966	Pass	5179.9932	Pass	5179.995	Pass	5179.9946	Pass
10	120	5179.9901	Pass	5179.9912	Pass	5179.9881	Pass	5179.9882	Pass
0	120	5179.9831	Pass	5179.9844	Pass	5179.9833	Pass	5179.9872	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9958	Pass	5179.9926	Pass	5179.9942	Pass	5179.9943	Pass
	120	5179.9966	Pass	5179.9932	Pass	5179.995	Pass	5179.9946	Pass
	102	5179.9969	Pass	5179.9938	Pass	5179.9947	Pass	5179.9949	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	15.7	15.2	15.4	16.08	0.5	Pass
157	5785	15.72	15.65	15.21	15.71	0.5	Pass
165	5825	15.44	15.21	15.36	16.09	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	18.34	16.73	18.67	18.3	0.5	Pass
157	5785	18	18.7	18.75	18.8	0.5	Pass
165	5825	18.06	18.78	18.85	18.46	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	37.93	38.12	37.11	37.89	0.5	Pass
159	5795	35.83	37.25	38.1	37.24	0.5	Pass

802.11ax (HE80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	76	75.46	76.78	76.62	0.5	Pass

Spectrum Plot of Worst Value


802.11a_Chain 1 / CH149

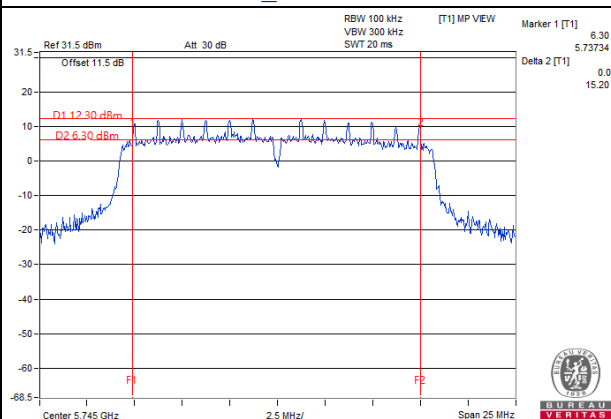


802.11ax (HE20)_Chain 1 / CH149

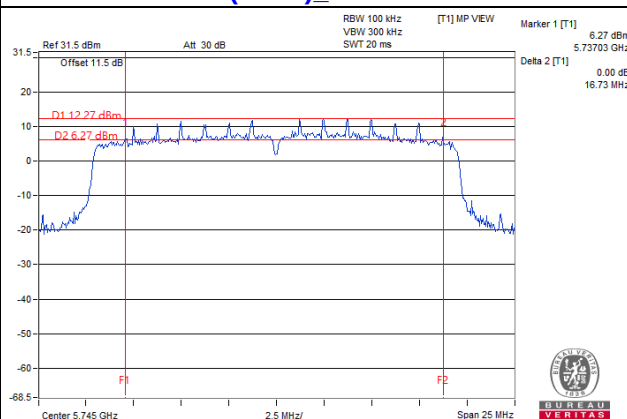

802.11ax (HE40)_Chain 0 / CH159

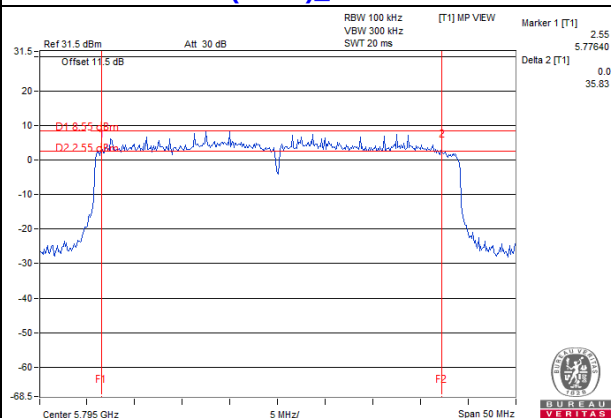

802.11ax (HE80)_Chain 1 / CH155

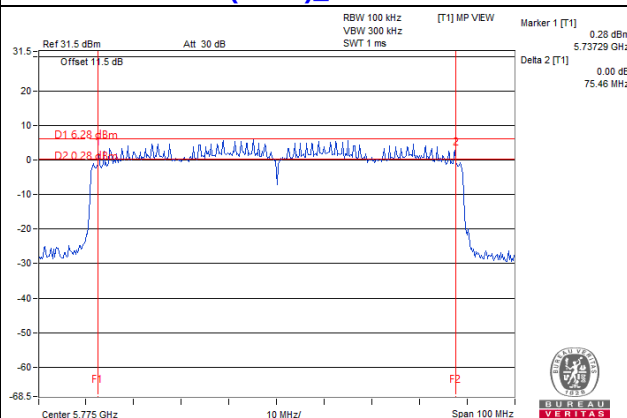


5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).


Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)

802.11a CH 149 : 5745 MHz

Horizontal

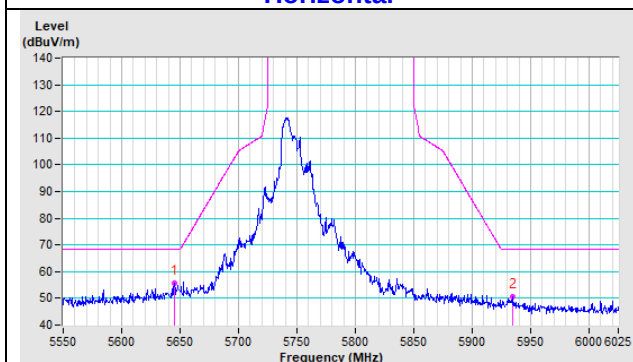


Vertical

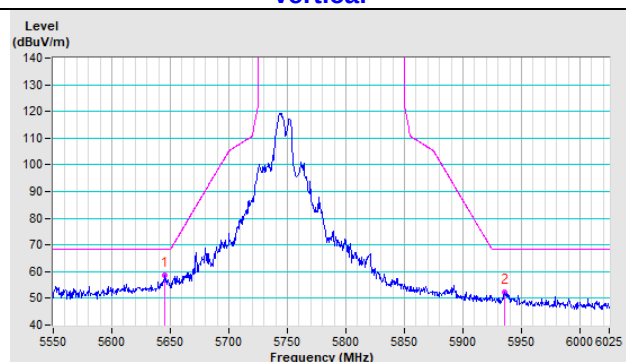


802.11a CH 157 : 5785 MHz

Horizontal

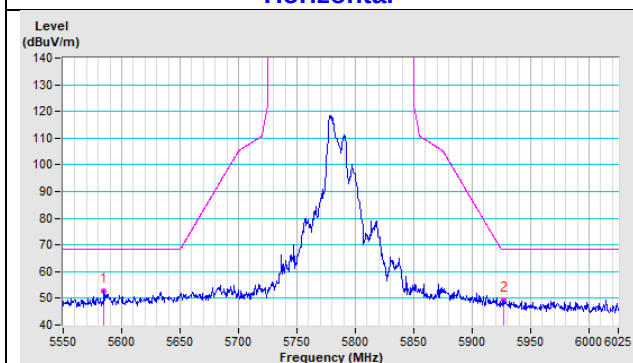


Vertical

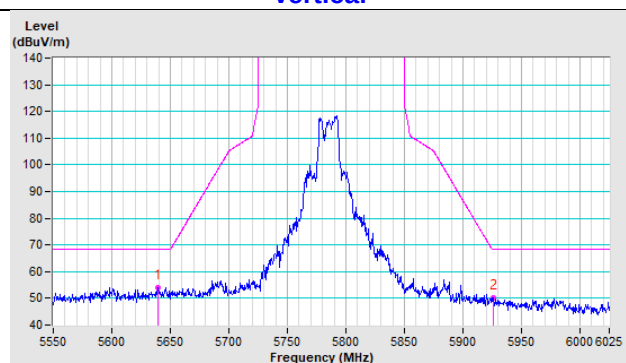


802.11a CH 165 : 5825 MHz

Horizontal

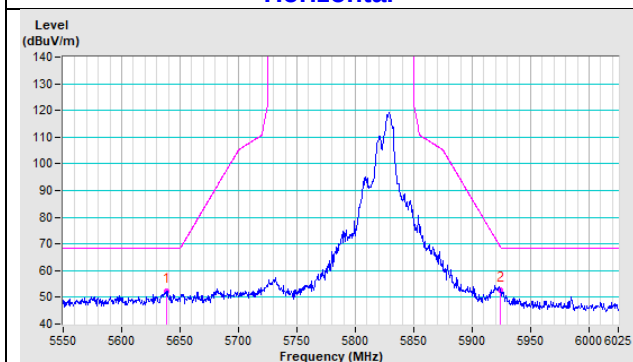


Vertical

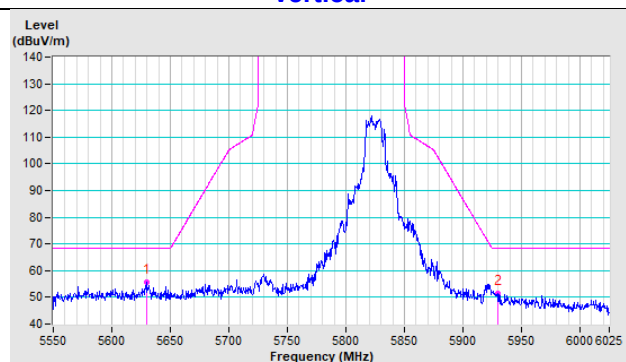


802.11ax (HE20) CH 149 : 5745 MHz

Horizontal

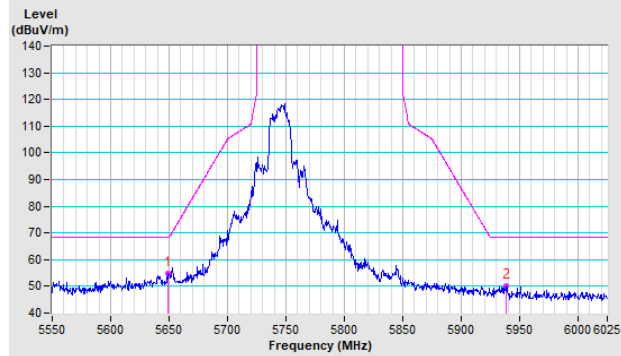


Vertical

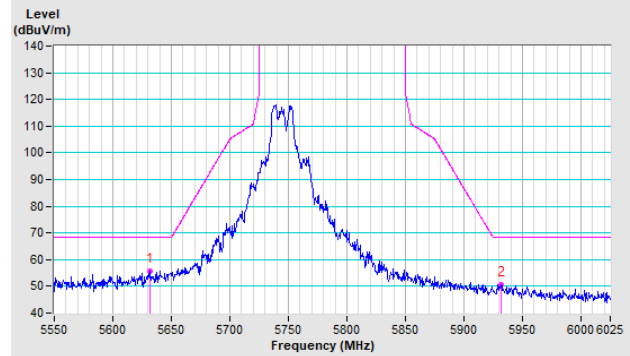


802.11ax (HE20) CH 157 : 5785 MHz

Horizontal

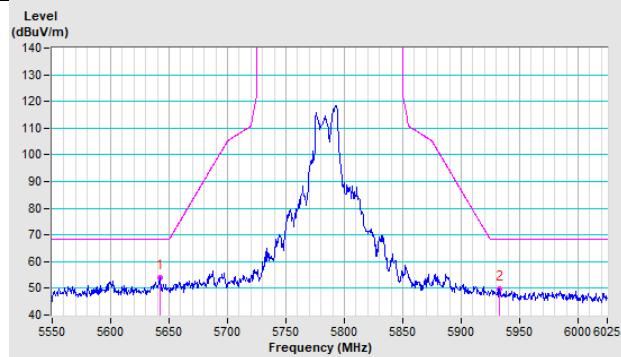


Vertical

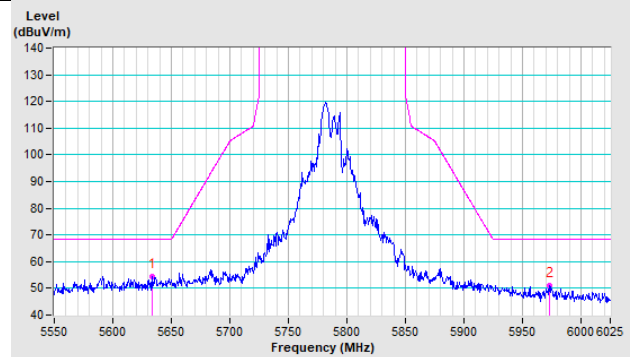


802.11ax (HE20) CH 165 : 5825 MHz

Horizontal

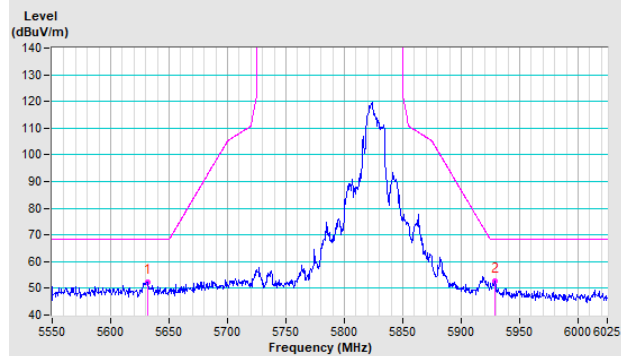


Vertical

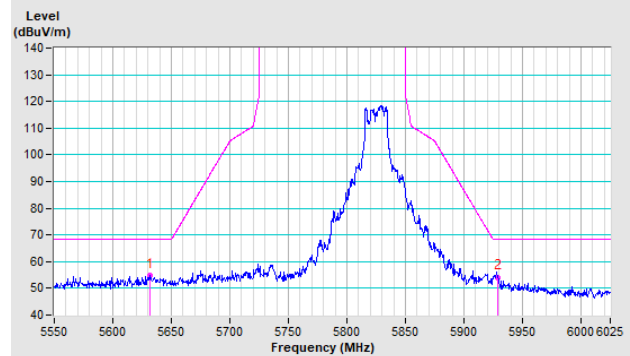


802.11ax (HE40) CH 151 : 5755 MHz

Horizontal

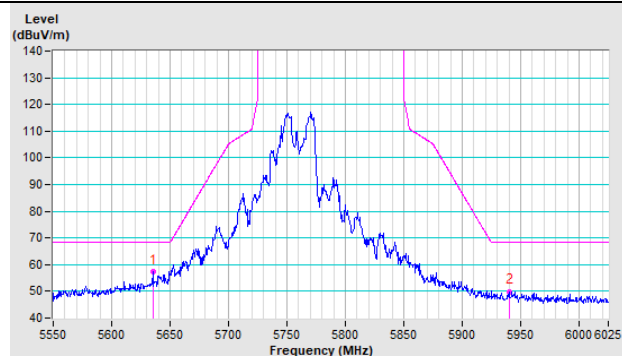


Vertical

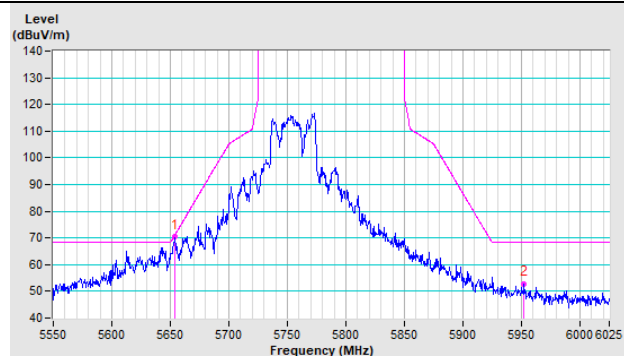


802.11ax (HE40) CH 159 : 5795 MHz

Horizontal

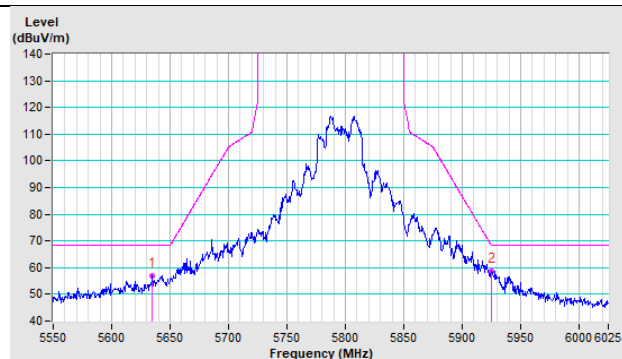


Vertical

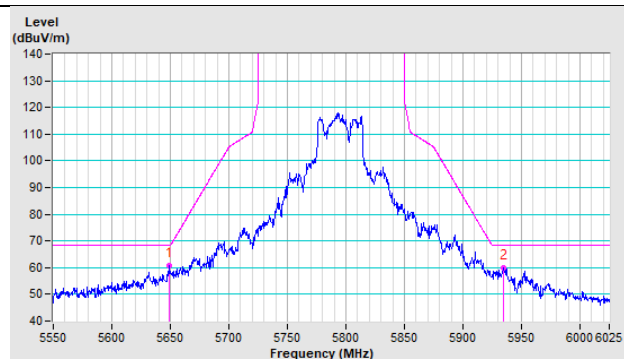


802.11ax (HE80) CH 155 : 5775 MHz


Horizontal

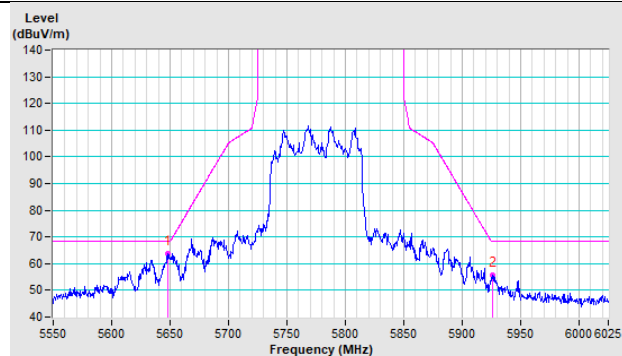



Vertical

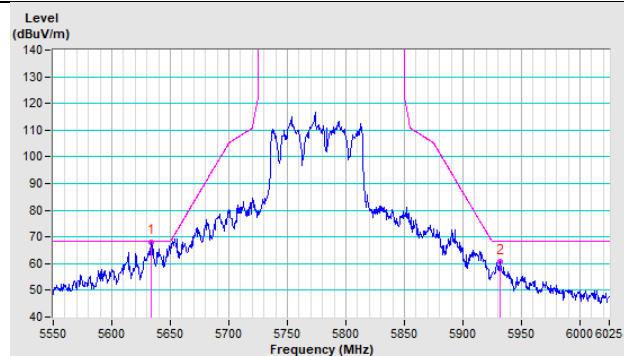


Annex B- Band-edge measurement (For U-NII-1 band)

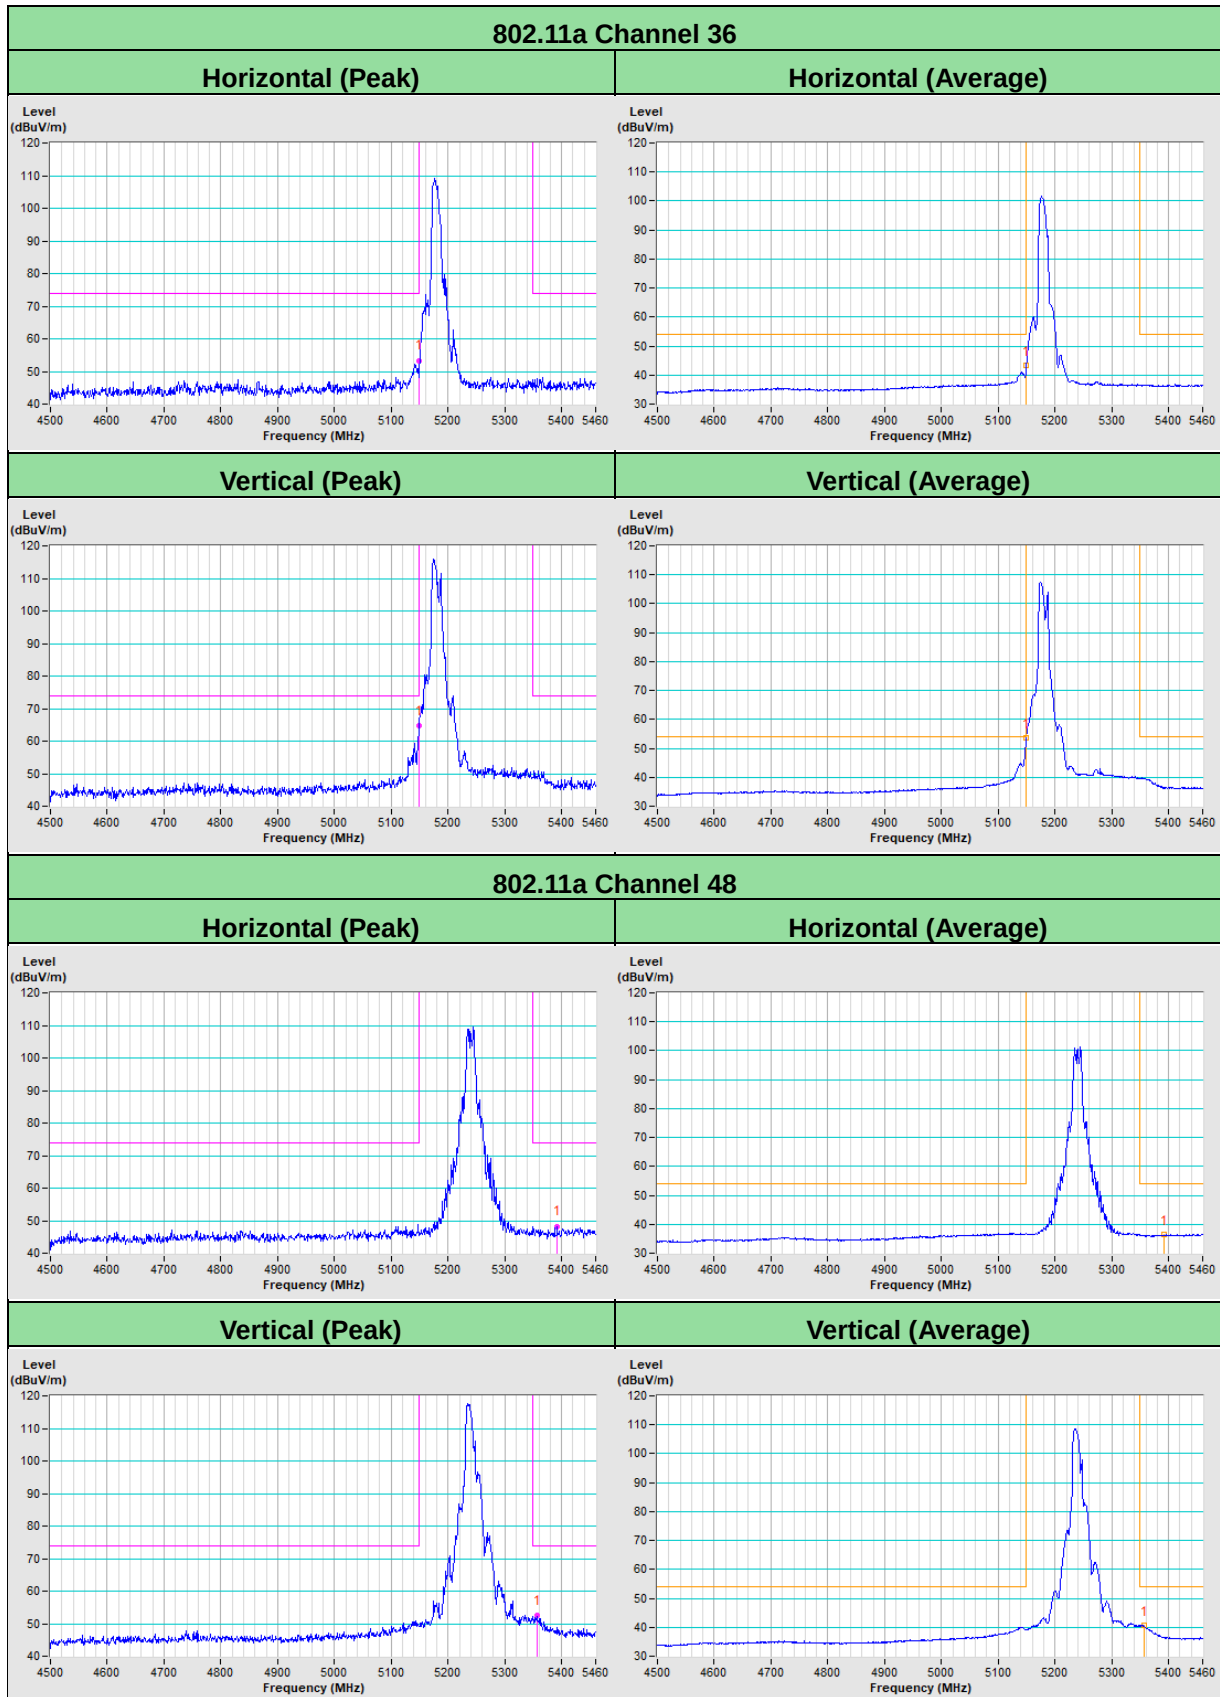

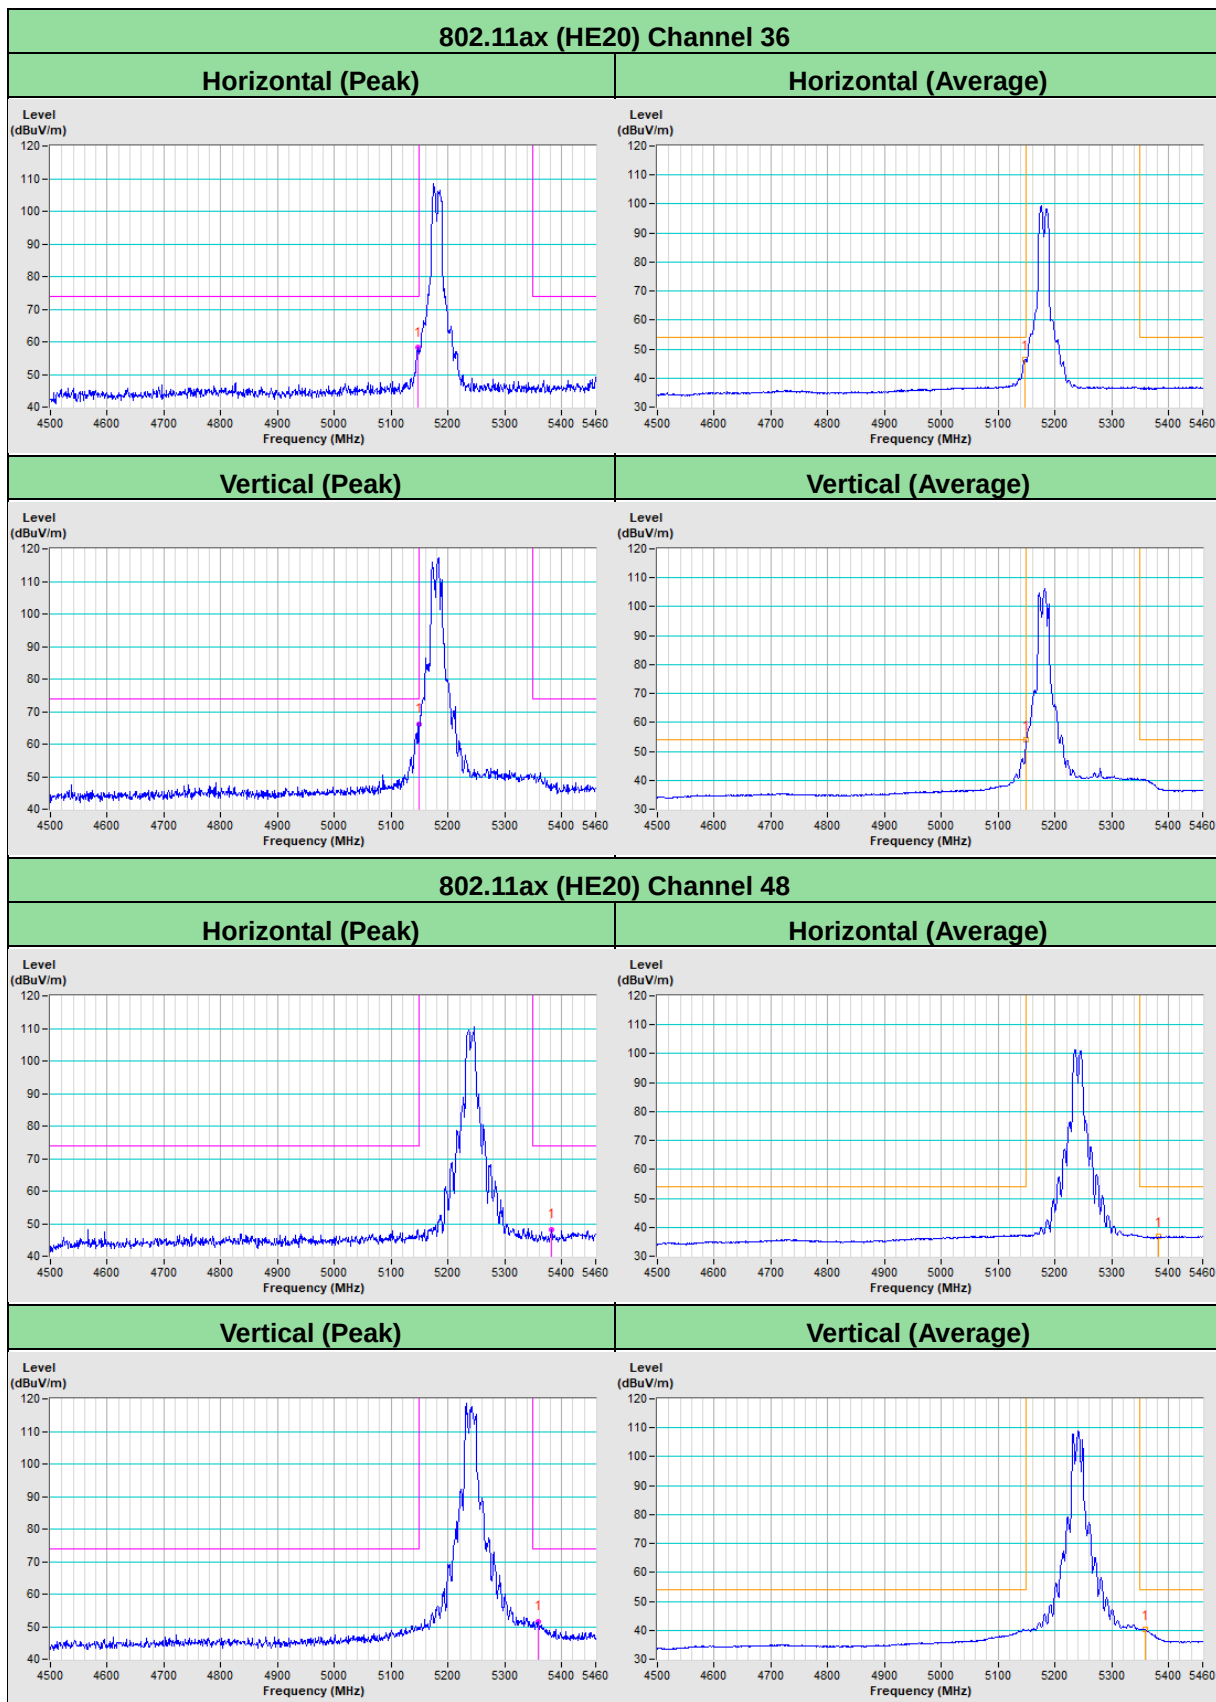

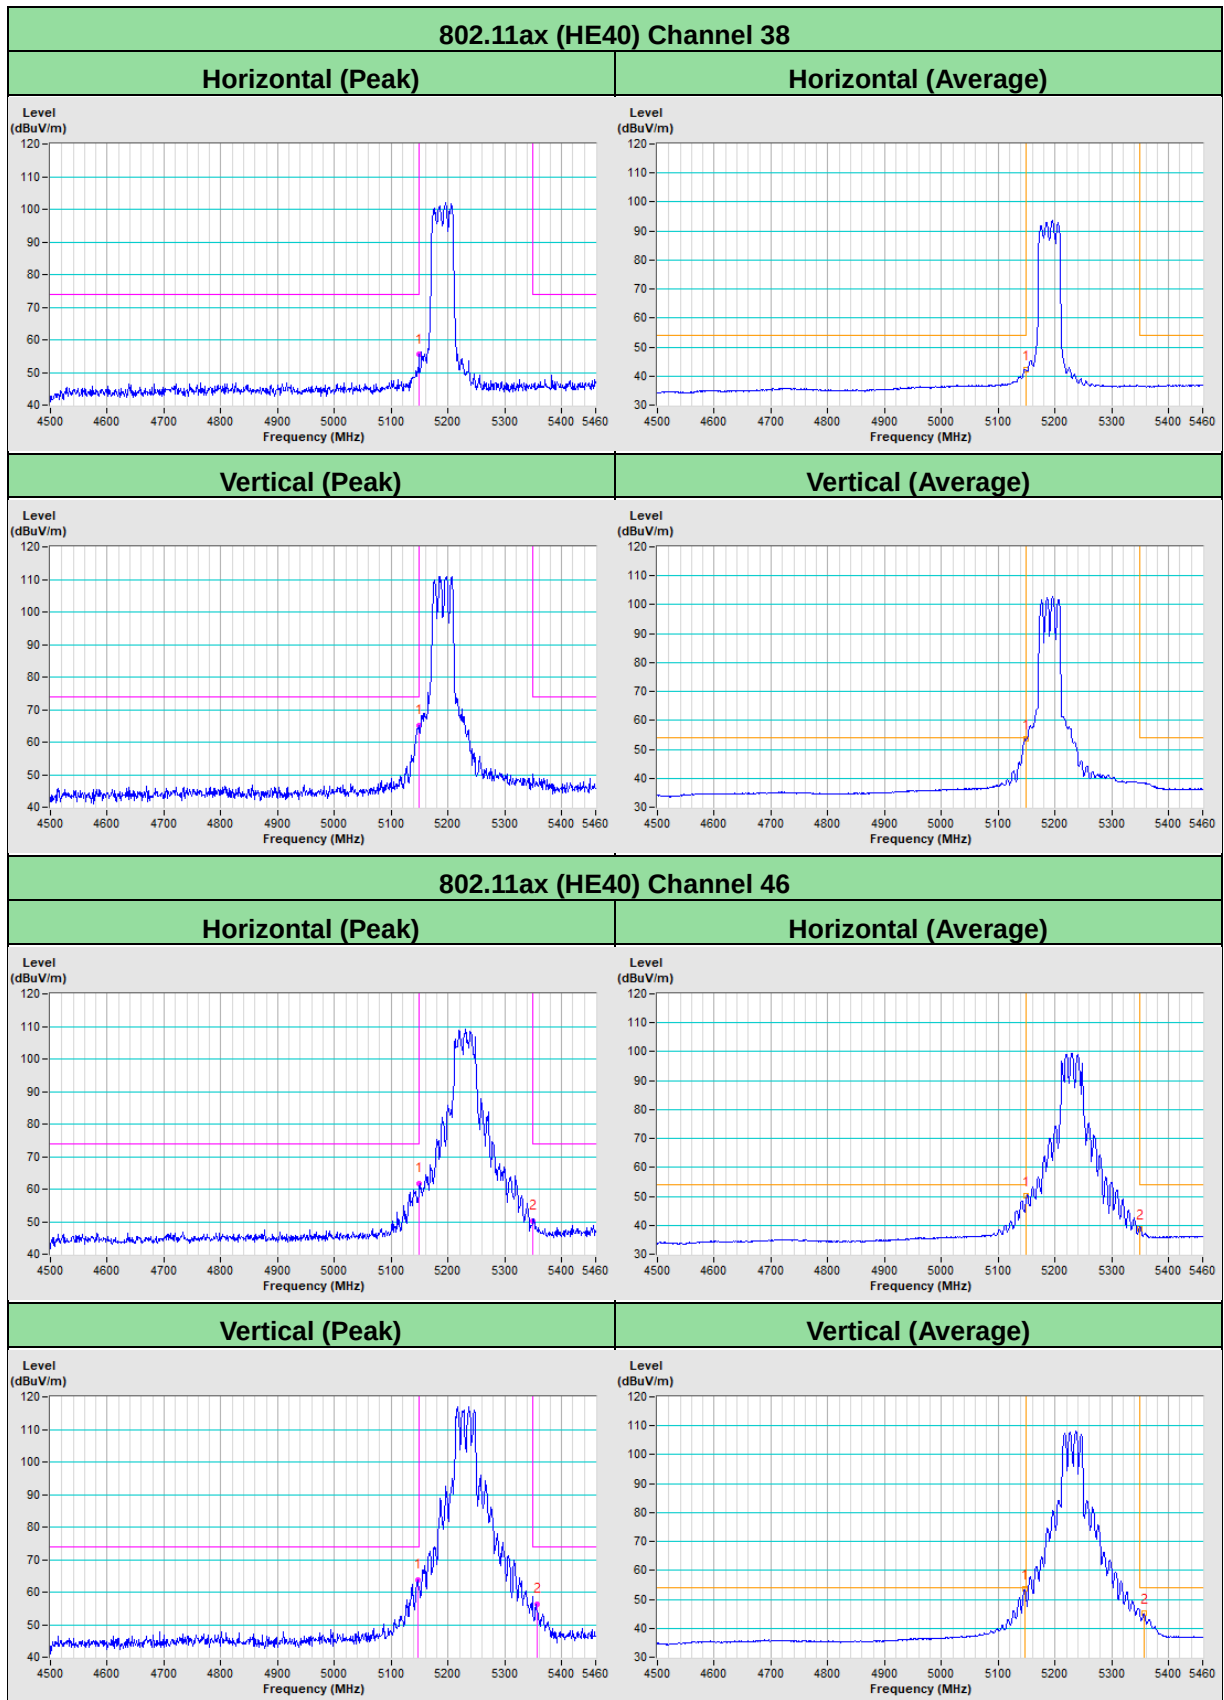

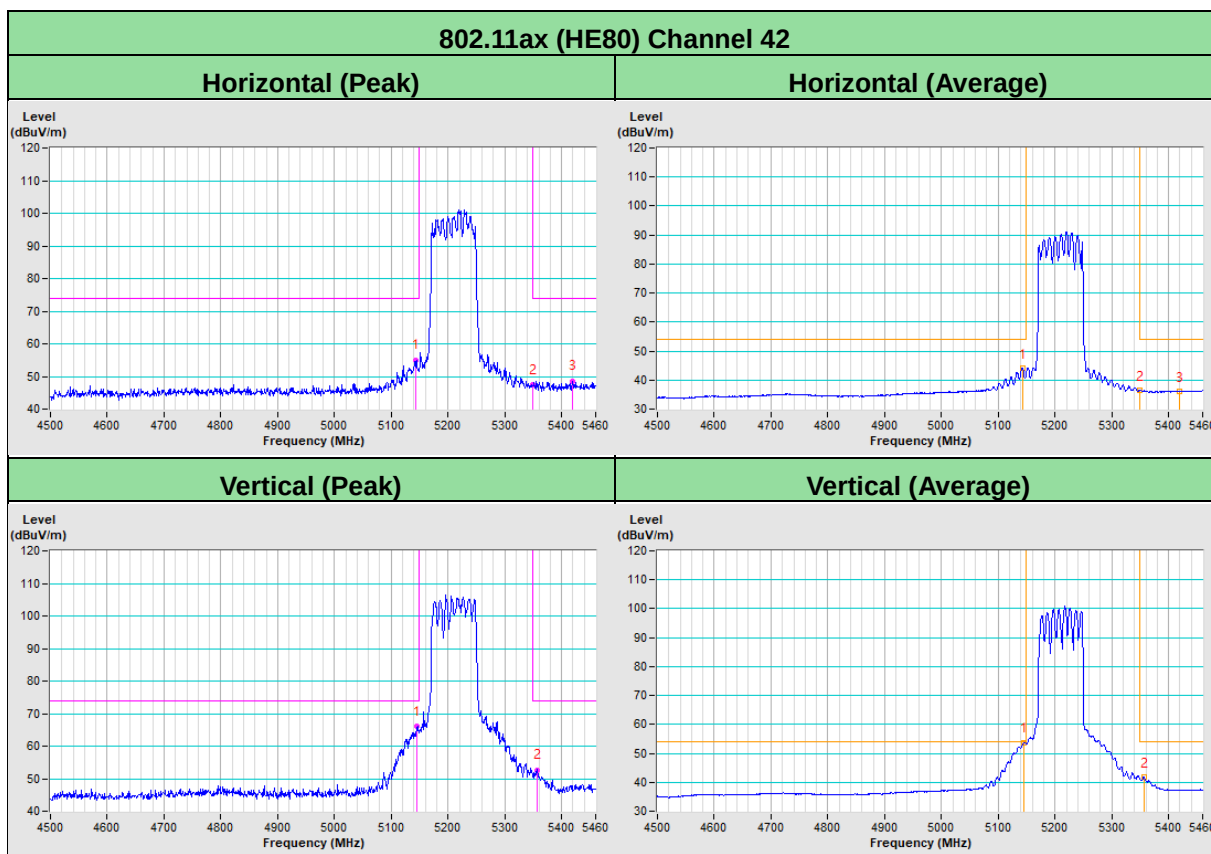

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---