





REV.	DESCRIPTION	REVD:	CHKD:	APPD:	DATE
A0		Cary			2023-12-21
A1	Added manufacturer in the drawing, changed FCC ID, IC ID number, switch the position of Model, SKU and QR, added Type, WEEE, CE	Cary			2024-05-07



Default tolerance: $\pm 0.2\text{mm}$



Definition of S/N

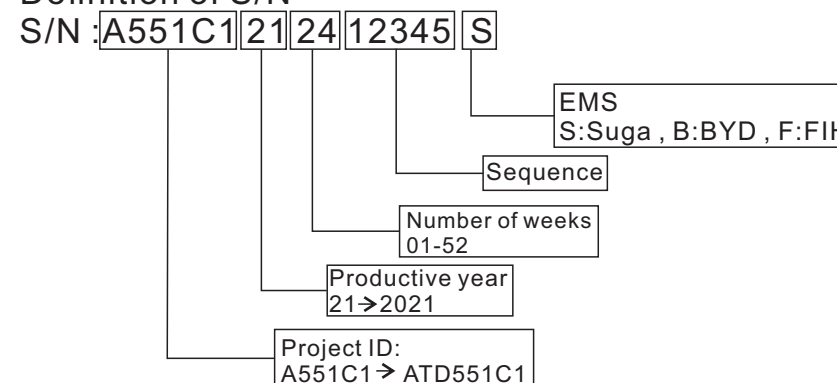

Notes:

- Material: Printable 75#PET, Matte
- White background with black print, printed on the Face stock, TTR:B110CR
- The QR code contains ICC ID, EID, IMEI, S/N
ICC ID:12345678901234567890,EID:12345678901234567890123456789012,
IMEI: 123456789012345,S/N:A551C1212412345S
- Operating temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- All materials and processes must comply with RoHs and REACH
- Alcohol friction resistance test:
It rubbed against the felted wool which has been immersed into absolute alcohol and with 500g weights back and forth for 50 times in the direction of 90 degree vertical.
- Rubber friction resistance test:
It rubbed against the rubber and with 500g weights back and forth for 50 times in the direction of 90 degree vertical

Label rules for ATD551C1 :

- The below parts are variable
 - QR code: According to the actual production
 - IMEI: According to the actual production
 - S/N: According to the actual production
 - Date Code: According to the actual production date



PART NAME: ATD551D product label	UNITS: mm	SHEET: 1/1	DRAWN: Cary
	MATERIAL: XX	SCALE: 1:1	CHECKED:
PART NO.:	MODEL: ATD551C1	A4	APPROVED: Nick

label location

