

Test Report On

PCS only Cellular Phone

FCC Part 24 Certification

FCC ID: OVFKWC-K4X3

Model: K483JLC

Date: January 5, 2006

STATEMENT OF CERTIFICATION

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the measurements of the sample's radio frequency interference emissions characteristics as of the dates and at the times of the test under the conditions herein specified.

STATEMENT OF COMPLIANCE

This product has been shown to be capable of compliance with the applicable technical standards as indicted in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

Date of Test:	December 21, 2005	
Test performed by:	Kyocera Wireless Corp. 10300 Campus Point Drive San Diego, Ca 92121	
Report Prepared by:	Fernando Calimbahin, Engineer	
Report Reviewed by:	CK Li, Engineer, Sr. Staff/ Manager	
No sel e 110 A. Le conse d'accesa la le caste de et en e l'en Le c OATO elle		

Nemko USA, Inc. performed the tests that required an OATS site.



1 General Information

Applicant:	Kyocera Wireless Corp 10300 Campus Point Drive San Diego CA 92121	
FCC ID:	OVFKWC-KX4X3	
Product:	PCS only Digital Phone	
Model Number:	K483JLC	
EUT Serial Number:	F0000004626421	
Type:	[] Prototype, [X] Pre-Production, [] Production	
Device Category:	Portable	
RF Exposure Environment:	General Population / Uncontrolled	
Antenna:	Fixed Stubby	
Detachable Antenna:	Yes	
External Input:	Audio/Digital Data	
Quantity:	Quantity production is planned	
FCC Rule Parts:	§24E	
Modes:	1900 CDMA	
Multiple Access Scheme:	CDMA	
TX Frequency (MHz):	1850 - 1910	
Emission Designators:	1M25F9W	
Max. Output Power (W):	0.268 EIRP	




2 Radiated Power

FCC: § 24.232 IC: RSS-133 §6.2

Measurement Procedures:

The EUT (F0000004626421) was positioned on a 2-axis non-conductive positioner inside an anechoic chamber.

The phone control software set the EUT conducted power. During tests, the phone was rotated 360 degree in azimuth and elevation by an automated antenna measurement workstation. Maximum radiated power was recorded using a Giga-tronics 8541C Universal Power Meter. All measurement results are EIRP in dBm.

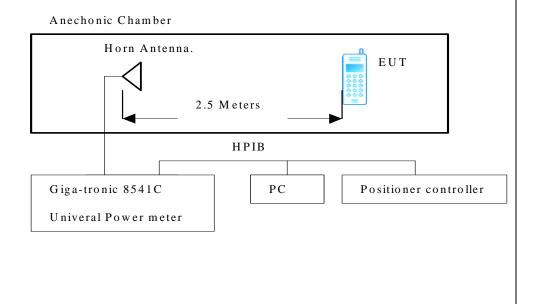

Mode	Frequency (MHz)	Channel	Max. Power (dBm)	Ref.
CDMA 1900	1851.25	25	24.13	
	1880.00	600	24.27	EIRP
	1908.75	1175	24.28	



3 Transmitter Radiated Spurious Emissions Measured Data

FCC:	§ 2.1053, § 24.238	IC:	RSS-133 §6.3

Measurement Procedures:

The radiated spurious emission test was performed at Nemko in San Diego, California. The test report is attached in a separate attachment.

C2PC Page 4 of 4 Model: K483JLC