

# **FCC Test Report**

FCC ID : R3USCBT16

Equipment : Bluetooth dongle

Model No. : SCBT16

Brand Name : EPOS

Applicant : Sennheiser Communications

Address : Industriparken 27, Ballerup 2750 , Denmark

Standard : 47 CFR FCC Part 15.247

Received Date : Apr. 28, 2020

Tested Date : May 11 ~ May 12, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Test

Testing Laboratory

Report No.: FR4D1101-05AE Report Version: Rev. 01



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	9
1.6	Deviation from Test Standard and Measurement Procedure	9
1.7	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	
3.4	Power Spectral Density	19
3.5	Emissions in Restricted Frequency Bands	22
3.6	Emissions in non-restricted Frequency Bands	32
4	TEST LABORATORY INFORMATION	34



## **Release Record**

Report No.	Version	Description	Issued Date
FR4D1101-05AE	Rev. 01	Initial issue	Jun. 09, 2020

Report No.: FR4D1101-05AE Page: 3 of 34



## **Summary of Test Results**

FCC Rules	Test Items	ns Measured		
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.150MHz 53.91 (Margin -12.09dB) - QP	Pass	
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 2506.00MHz	Pass	
15.209	Radiated Effissions	52.00 (Margin -2.00dB) - AV	F 455	
15.247(b)(3)	Maximum Output Power	Power [dBm]: 8.78	Pass	
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass	
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass	
15.203	Antenna Requirement	Meet the requirement of limit	Pass	

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR4D1101-05AE Page: 4 of 34



## 1 General Description

### 1.1 Information

#### 1.1.1 Product Details

The following models are provided to this EUT.

<b>Brand Name</b>	d Name   Model Name   Product name		Product description	Description
EPOS	SCBT16	BTD 800 USB-C	Bluetooth dongle	For marketing purpose
EPOS	SCBT16	GSA 70 USB-C	Bluetooth dongle	For marketing purpose

<sup>+</sup> All models are electrically identical, different model names are for marketing purpose.

### 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz) Bluetooth Ch. Freq. (MHz) Channel Number Data Rate						
2400-2483.5	V4.2 LE	2402-2480	0-39 [40]	1 Mbps		
Note 1: Bluetooth LE	Note 1: Bluetooth LE (Low energy) uses GFSK modulation.					

#### 1.1.3 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)	Remarks
1	PIFA	N/A	1.4	

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc for host
-------------------	---------------

### 1.1.5 Accessories

	Accessories						
No.	Equipment	Description					
1	USB type A to C cable	Brand name: SENNHEISER Model name: TB011 Power line: 1.35m shielded without core					

Report No.: FR4D1101-05AE Page: 5 of 34

The above product name s, product **BTD 800 USB-C** was selected as a representative one for the final test and only its data was recorded in this report.



### 1.1.6 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

## 1.1.7 Test Tool and Duty Cycle

Test Tool	CMW270				
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)			
Duty Cycle and Duty Factor	68.66	1.63			

### 1.1.8 Power Index of Test Tool

Modulation Mode		Test Frequency (MHz)	
Modulation Mode	2402	2440	2480
GFSK/1Mbps	default	default	default


Report No.: FR4D1101-05AE Page: 6 of 34



## 1.2 Local Support Equipment List

Support Equipment List							
No. Equipment Brand Model FCC ID Remarks					Remarks		
1	Notebook	DELL	Latitude E5470	DoC			

## 1.3 Test Setup Chart

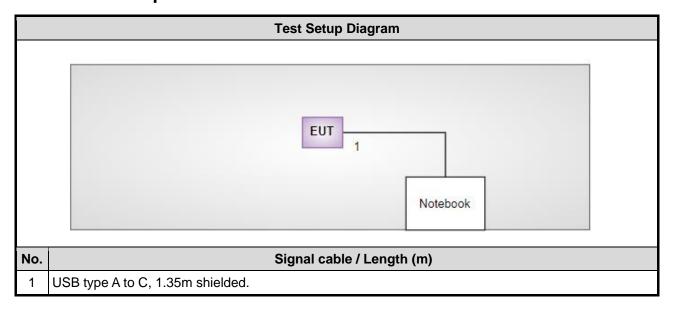

Report No.: FR4D1101-05AE Page: 7 of 34



## 1.4 Test Equipment List and Calibration Data

Conducted Emission						
Conduction room 1 / (	CO01-WS)					
May 14, 2020						
Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020		
R&S	R&S ENV216 101579 Mar. 12, 2020 Mar. 11, 2021					
SCHWARZBECK	SCHWARZBECK         Schwarzbeck 8127         8127-666         Dec. 20, 2019         Dec. 19, 2020					
Woken	Woken CFD200-NL CFD200-NL-001 Oct. 22, 2019 Oct. 21, 2020					
NA	NA 50 04 May 28, 2019 May 27, 2020					
AUDIX e3 6.120210k NA NA						
	Conduction room 1 / ( May 14, 2020  Manufacturer  R&S  R&S  SCHWARZBECK  Woken  NA	Conduction room 1 / (CO01-WS)  May 14, 2020  Manufacturer Model No.  R&S ESR3  R&S ENV216  SCHWARZBECK Schwarzbeck 8127  Woken CFD200-NL  NA 50	Conduction room 1 / (CO01-WS)           May 14, 2020         Model No.         Serial No.           R&S         ESR3         101658           R&S         ENV216         101579           SCHWARZBECK         Schwarzbeck 8127         8127-666           Woken         CFD200-NL         CFD200-NL-001           NA         50         04	Conduction room 1 / (CO01-WS)           May 14, 2020         Manufacturer         Model No.         Serial No.         Calibration Date           R&S         ESR3         101658         Dec. 12, 2019           R&S         ENV216         101579         Mar. 12, 2020           SCHWARZBECK         Schwarzbeck 8127         8127-666         Dec. 20, 2019           Woken         CFD200-NL         CFD200-NL-001         Oct. 22, 2019           NA         50         04         May 28, 2019		

Test Item	Radiated Emission					
Test Site	966 chamber1 / (03CH01-WS)					
Tested Date	May 11 ~ May 12, 202	20				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020	
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021	
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020	
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020	
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020	
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020	
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020	
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020	
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020	
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020	
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020	
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020	
Measurement Software	AUDIX	e3	6.120210g	NA	NA	
Note: Calibration Inter	val of instruments liste	d above is one year.				

Report No.: FR4D1101-05AE Page: 8 of 34



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	May 14, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
Signal Generator	R&S	SMB100A	175727	Dec. 27, 2019	Dec. 26, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Inte	rval of instruments liste	d above is one year.		•	•

### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

### 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.130 Hz			
Conducted power	±0.808 dB			
Power density	±0.583 dB			
Conducted emission	±2.715 dB			
AC conducted emission	±2.92 dB			
Radiated emission ≤ 1GHz	±3.41 dB			
Radiated emission > 1GHz	±4.59 dB			

Report No.: FR4D1101-05AE Page: 9 of 34



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	18°C / 70%	Alex Tsai
Radiated Emissions	03CH01-WS	25°C / 64-69%	Akun Chung Brad Wu
RF Conducted	TH01-WS	22°C / 64%	Brad Wu

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	BT LE	2440	1Mbps	
Maximum Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	

#### NOTE:

Report No.: FR4D1101-05AE Page: 10 of 34

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report.



### 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit						
Frequency Emission (MHz) Quasi-Peak Average						
0.15-0.5 66 - 56 * 56 - 46 *						
0.5-5 56 46						
5-30 60 50						
Note 1: * Decreases with the logarithm of the frequency.						

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

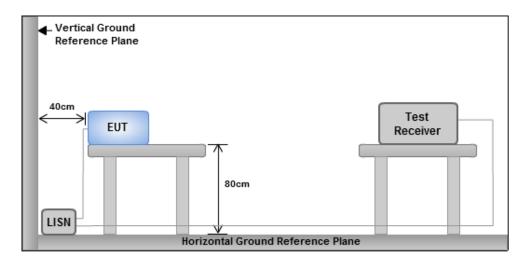


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR4D1101-05AE Page : 11 of 34




#### 3.1.4 Test Result of Conducted Emissions

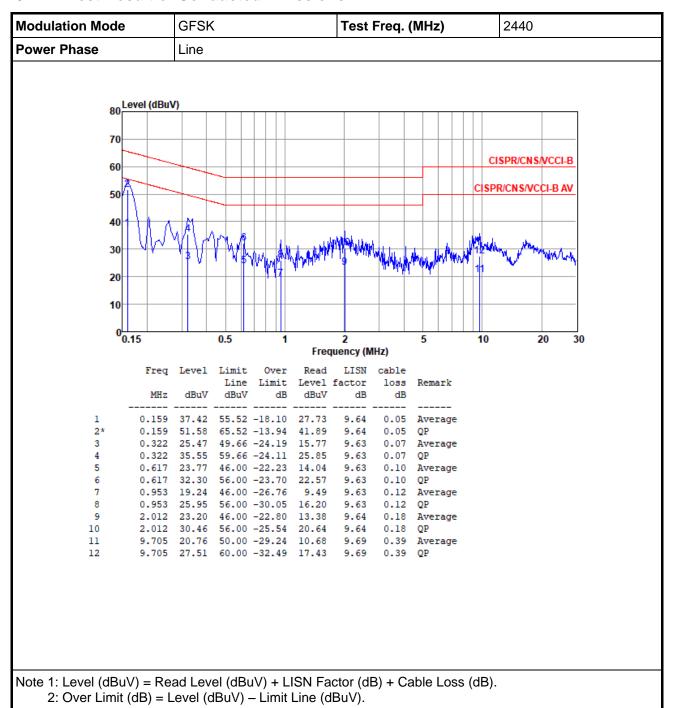

Report No.: FR4D1101-05AE Page: 12 of 34



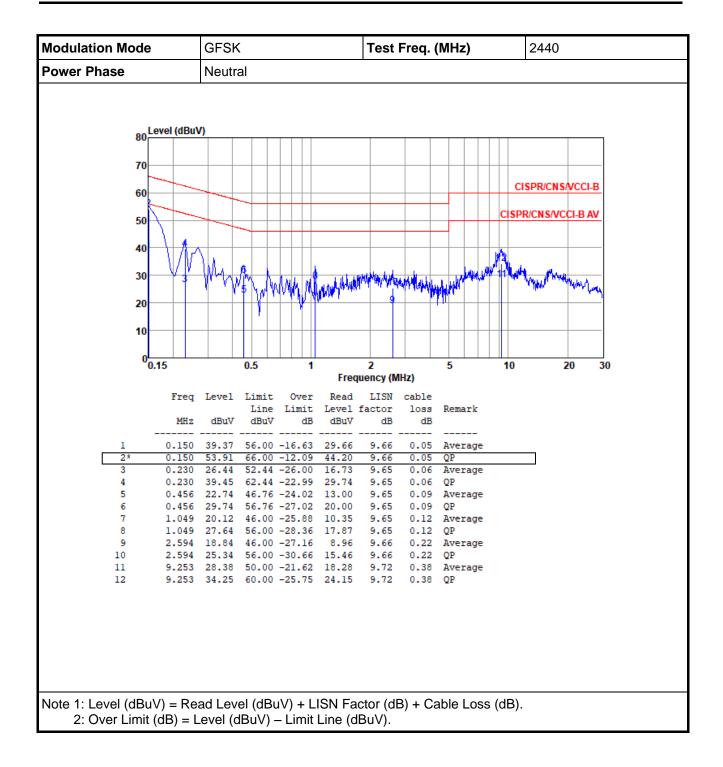

Report No.: FR4D1101-05AE Page: 13 of 34



### 3.2 6dB and Occupied Bandwidth

#### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.2.2 Test Procedures


#### 6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### **Occupied Bandwidth**

- Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

#### 3.2.3 Test Setup



Report No.: FR4D1101-05AE Page: 14 of 34



### 3.2.4 Test Result of 6dB and Occupied Bandwidth

#### **Summary**

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	684.783k	1.02M	1M02F1D	681.159k	1.017M

**Max-N dB** = Maximum6dB downbandwidth;**Max-OBW** = Maximum99% occupied bandwidth; **Min-N dB** = Minimum6dB downbandwidth;**Min-OBW** = Minimum99% occupied bandwidth;


#### Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	684.783k	1.02M
2440MHz	Pass	500k	681.159k	1.017M
2480MHz	Pass	500k	684.783k	1.017M

Port X-N dB = Port X6dB downbandwidth; Port X-OBW = Port X99% occupied bandwidth;

Report No.: FR4D1101-05AE Page: 15 of 34



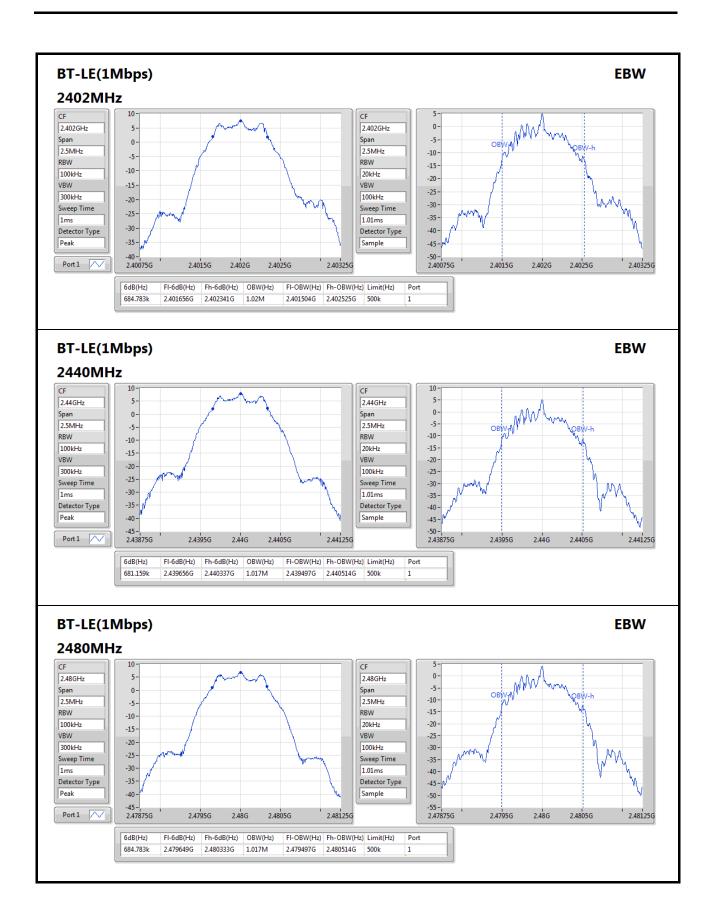

Report No.: FR4D1101-05AE Page: 16 of 34



### 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.3.3 Test Setup



Report No.: FR4D1101-05AE Page: 17 of 34



## 3.3.4 Test Result of Maximum Output Power

**Summary of Peak Conducted Output Power** 

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.78	0.00755

#### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.40	8.48	30.00
2440MHz	Pass	1.40	8.78	30.00
2480MHz	Pass	1.40	8.14	30.00

**Summary of Conducted (Average) Output Power** 

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.51	0.00710

#### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.40	8.26	-
2440MHz	Pass	1.40	8.51	-
2480MHz	Pass	1.40	7.82	-

Note: Average power is for reference only.

Report No.: FR4D1101-05AE Page: 18 of 34



## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.4.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup



Report No.: FR4D1101-05AE Page: 19 of 34



## 3.4.4 Test Result of Power Spectral Density

**Summary** 


Mode	PD
	(dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-7.84

#### Result

Mode	Result	Gain	PD	PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.40	-8.10	8.00
2440MHz	Pass	1.40	-7.84	8.00
2480MHz	Pass	1.40	-8.87	8.00

Report No.: FR4D1101-05AE Page: 20 of 34



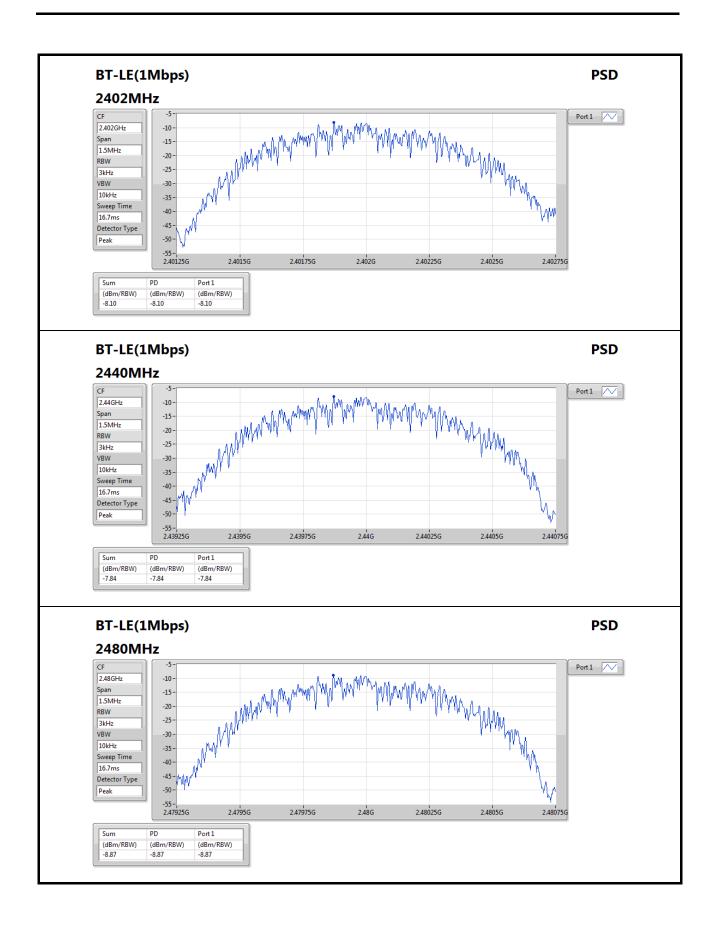

Report No.: FR4D1101-05AE Page: 21 of 34



### 3.5 Emissions in Restricted Frequency Bands

#### 3.5.1 Limit of Emissions in Restricted Frequency Bands

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR4D1101-05AE Page: 22 of 34




### 3.5.3 Test Setup

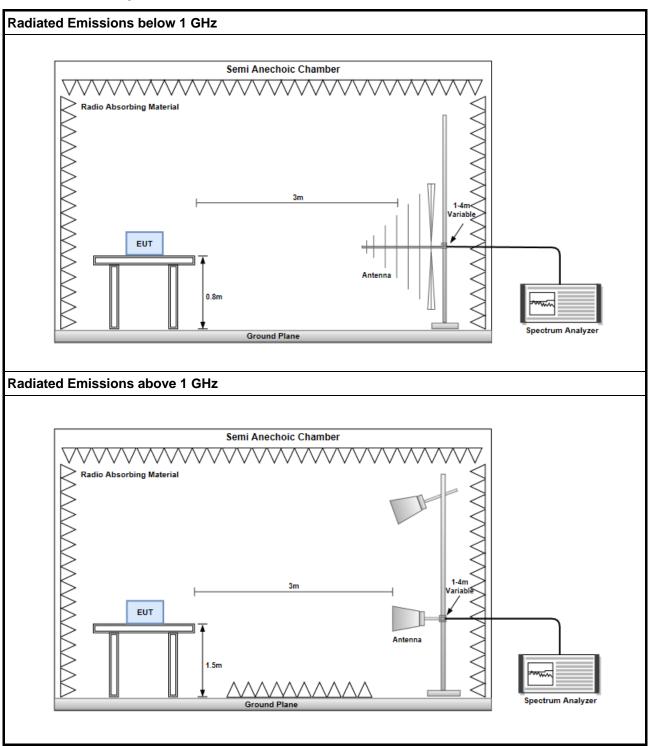

Report No.: FR4D1101-05AE Page: 23 of 34



#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

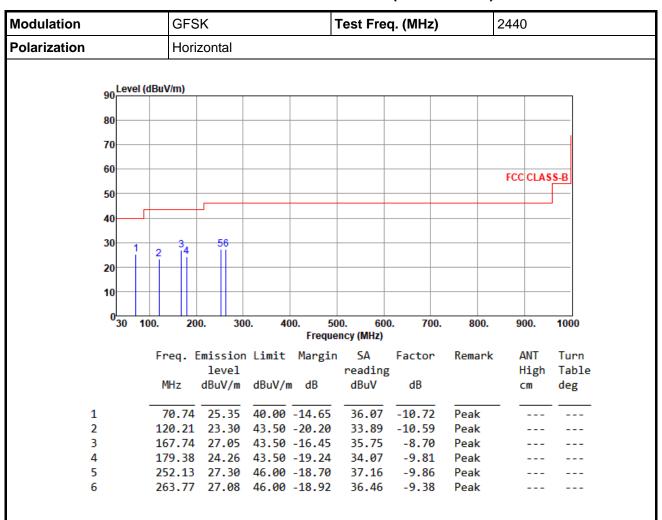

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR4D1101-05AE Page: 24 of 34



Modulation		GFS	K		-	Test Free	q. (MHz)		2440	
Polarization		Verti	cal		<b>,</b>			•		
		•								
9	Level (	dBuV/m)								
8	0									
7	0									
6	0								FCC CLA	SS-B
50	0									$\blacksquare$
										_
4	0									
3	0 1	2	3 4		5 6					
2	0		ĬĪ							
2										
10	0									
	030 10									
	30 10	00. 20	0. 30	0. 40		00. 600 ency (MHz)	0. 700.	800.	900.	1000
		Frea. F	mission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			level		8=	reading			High	
		MHz	dBuV/m	dBuV/n	ı dB	dBuV	dB		cm	deg
1		70.74	23.87		-16.13	34.59	-10.72	Peak		
2		183.26 215.27	23.83		-19.67 -18.53	34.24	-10.41 -12.04	Peak Peak		
4			24.97				-12.04	Peak		
5			27.36				-3.96	Peak		
6		480.08	28.30		-17.70	31.80	-3.50	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)
 \*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR4D1101-05AE Page: 25 of 34



### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

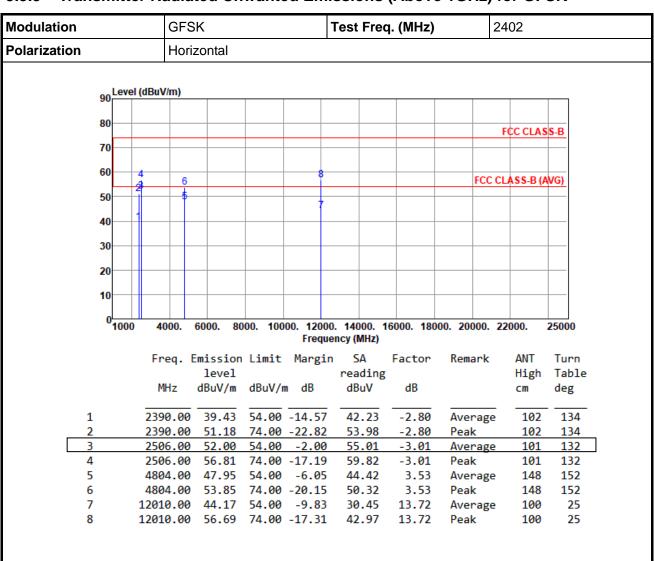

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR4D1101-05AE Page: 26 of 34



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		
oo Level (dBuV	l/m)		

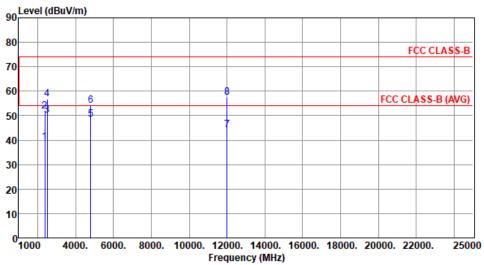

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.05	54.00	-14.95	41.85	-2.80	Average	110	163
2	2390.00	51.66	74.00	-22.34	54.46	-2.80	Peak	110	163
3	2506.00	50.02	54.00	-3.98	53.03	-3.01	Average	110	163
4	2506.00	56.81	74.00	-17.19	59.82	-3.01	Peak	110	163
5	4804.00	48.51	54.00	-5.49	44.98	3.53	Average	113	132
6	4804.00	54.05	74.00	-19.95	50.52	3.53	Peak	113	132
7	12010.00	44.28	54.00	-9.72	30.56	13.72	Average	100	38
8	12010.00	57.41	74.00	-16.59	43.69	13.72	Peak	100	38


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR4D1101-05AE Page: 27 of 34



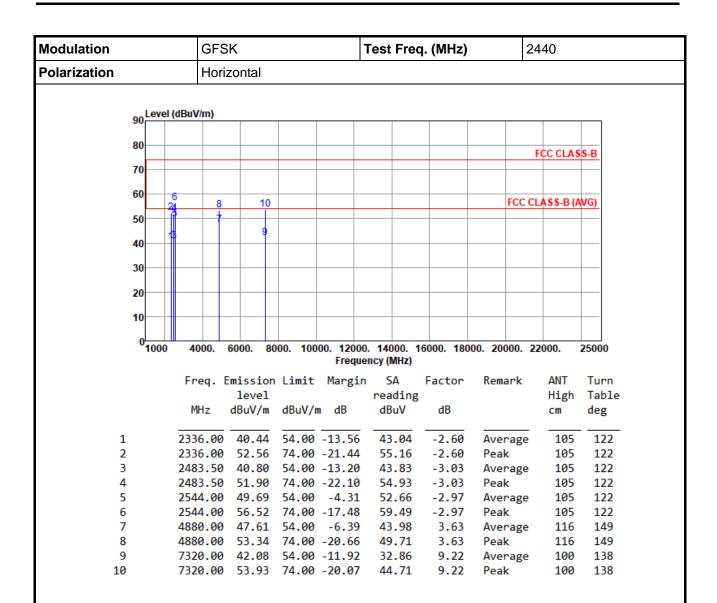

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR4D1101-05AE Page: 28 of 34



Modulation	Modulation GFSK				Test	Freq.	(MHz)	24	40		
Polarization		Vertical									
ا م	_evel (dBu\	//m)									
90											

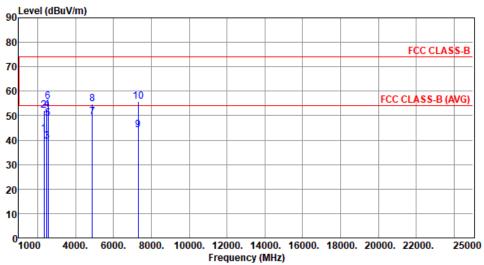

	Freq. 8	mission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2336.00	42.66	54.00	-11.34	45.26	-2.60	Average	110	164
2	2336.00	52.04	74.00	-21.96	54.64	-2.60	Peak	110	164
3	2483.50	39.58	54.00	-14.42	42.61	-3.03	Average	110	164
4	2483.50	52.40	74.00	-21.60	55.43	-3.03	Peak	110	164
5	2544.00	48.68	54.00	-5.32	51.65	-2.97	Average	110	157
6	2544.00	55.85	74.00	-18.15	58.82	-2.97	Peak	110	157
7	4880.00	49.39	54.00	-4.61	45.76	3.63	Average	100	116
8	4880.00	54.71	74.00	-19.29	51.08	3.63	Peak	100	116
9	7320.00	44.28	54.00	-9.72	35.06	9.22	Average	172	148
10	7320.00	55.67	74.00	-18.33	46.45	9.22	Peak	172	148

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)
\*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR4D1101-05AE Page: 29 of 34



Modulation			GFS	SK		-	Test Fred	q. (MHz)	2	480	
Polarization			Hori	zontal		1					
			•								
	90L	evel (	(dBuV/m)								
	80-										
	80									FCC CLAS	S-B
	70										-
	60										
		2	6	8					FCC C	LASS-B (A	(VG)
	50		5	7							
	40										
	30-										
	30										
	20										-
	10										
	01	000	4000.	6000. 8	000. 100			16000. 180	00. 20000. 2	2000.	25000
							ency (MHz)				
			Freq.		l Limit	Margin		Factor	Remark	ANT	Turn
			MHz	level dBuV/m	dD.M.	dD	reading dBuV	dB		High cm	Table
			MITZ	ubuv/III	ubuv/	III UD	ubuv	ub		CIII	deg
:	1		2483.50	41.46	54.00	-12.54	44.49	-3.03	Average	104	133
:	2		2483.50	54.49	74.00	-19.51	57.52	-3.03	Peak	104	133
	3		2584.00				51.29	-2.85	Average	100	134
	4		2584.00				58.18	-2.85	Peak	100	134
	5		4960.00	46.85	54.00	-/.15	43.02	3.83	Average	116	151

48.63

3.83

9.21

9.21

Peak

Peak

Average

151

135

135

116

100

100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor , cable loss and amplifier gain

4960.00 52.46 74.00 -21.54

7440.00 42.16 54.00 -11.84 32.95

7440.00 54.11 74.00 -19.89 44.90

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR4D1101-05AE Page: 30 of 34

Report Version: Rev. 01


6

7

8



Modulation		SK		Test	Test Freq. (MHz)				2480		
Polarization	Vert	tical									
Lou	ol (dDu\//m)										
90	el (dBuV/m)										
80											

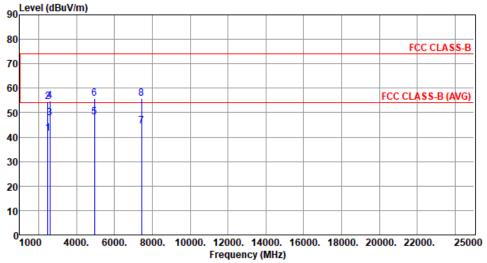

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
4	2402 50	44 42	<u></u>	42.50	44.45		A	110	165
1	2483.50	41.42	54.00	-12.58	44.45	-3.03	Average	110	165
2	2483.50	54.36	74.00	-19.64	57.39	-3.03	Peak	110	165
3	2584.00	47.85	54.00	-6.15	50.70	-2.85	Average	110	165
4	2584.00	54.96	74.00	-19.04	57.81	-2.85	Peak	110	165
5	4960.00	48.03	54.00	-5.97	44.20	3.83	Average	100	179
6	4960.00	55.64	74.00	-18.36	51.81	3.83	Peak	100	179
7	7440.00	44.56	54.00	-9.44	35.35	9.21	Average	168	144
8	7440.00	55.81	74.00	-18.19	46.60	9.21	Peak	168	144

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)
\*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR4D1101-05AE Page: 31 of 34



### 3.6 Emissions in non-restricted Frequency Bands

#### 3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

#### 3.6.2 Test Procedures


#### Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

#### **Emission level measurement**

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level


#### 3.6.3 Test Setup



Report No.: FR4D1101-05AE Page: 32 of 34



### 3.6.4 Test Result of Emissions in non-restricted Frequency Bands

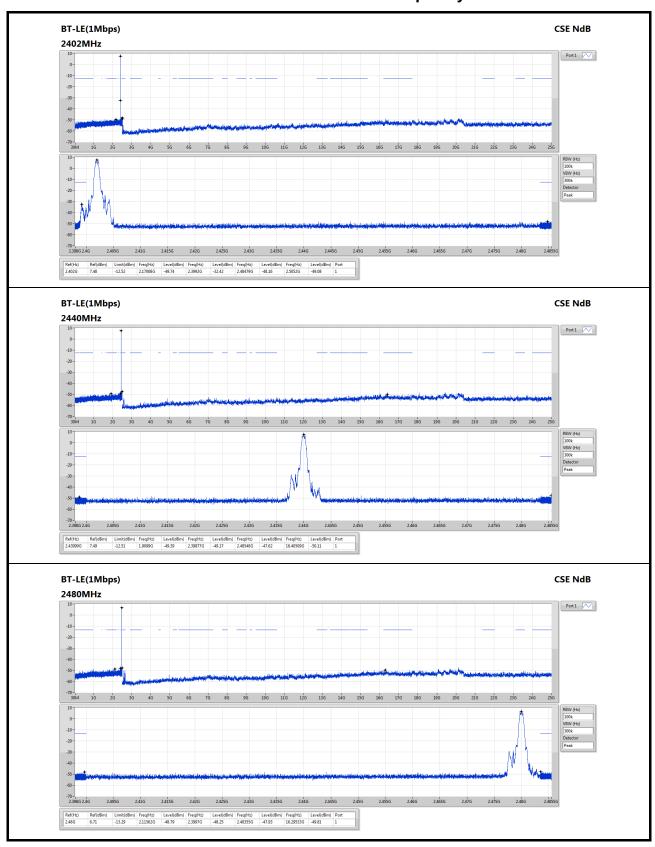

Page: 33 of 34

Report No.: FR4D1101-05AE



### 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

#### Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

#### Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

\_\_\_END\_\_\_

Report No.: FR4D1101-05AE Page: 34 of 34