

W3388

FPC Internal Antenna

1880 to 1930 MHz



Features & Applications:

FPC Internal Antenna



-10

-10

General Specifications - 5GFR1 + WiFi6E F16E					
Antenna type	Nominal Impedance	Polarization	Radiation pattern	Power withstanding	DC Ground
PIFA	50Ω	Line	Omni	5W	Yes

Test state	Free space	With head
Frequency (MHz)	1880-1930	1880-1930
Return Loss		
Peak Gain (dBi)	2.0	2.0
Efficiency (%)	50	40



MECHANICAL SPECIFICATIONS					
Dimension (Length x Width x Height)	Housing Material	Color	Weight	Fixing System	Mounting Hole Diameter
34.3X20.8X0.12MM	FPC	Green	1g	Direct Mount	N/A

ENVIRONMENTAL SPECIFICATIONS				
Operating Temperature	Ingress Protection	RoHS Compliant		
-40/+85°C	N/A	Yes		

Dimensions: inches (mm) Unless otherwise specified, all tolerances are ± 0.10 (0.25 mm)

Mechanical Drawing

W3388

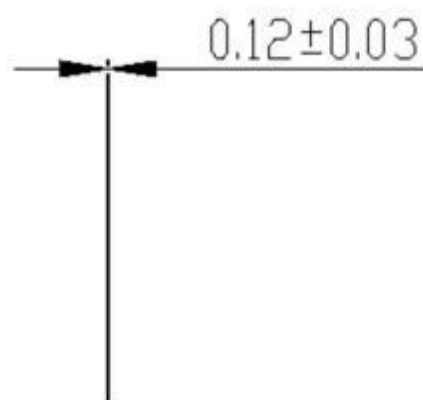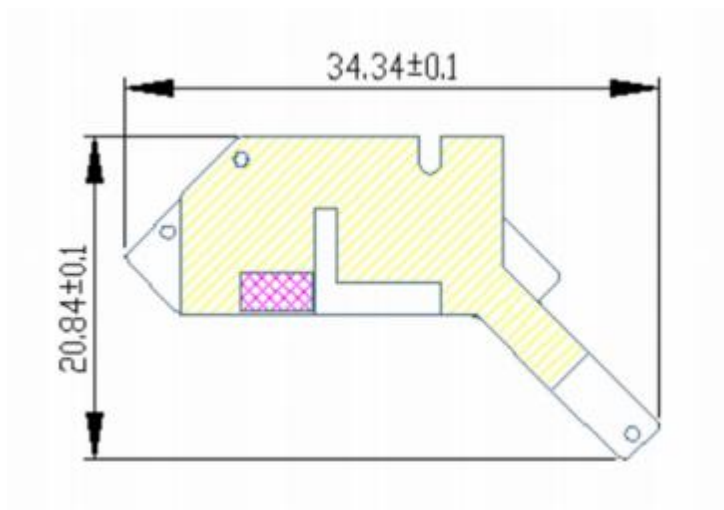

Charts-ReturnLoss

W3388





Charts-Efficiency

W3388



RadiationPattern

W3388

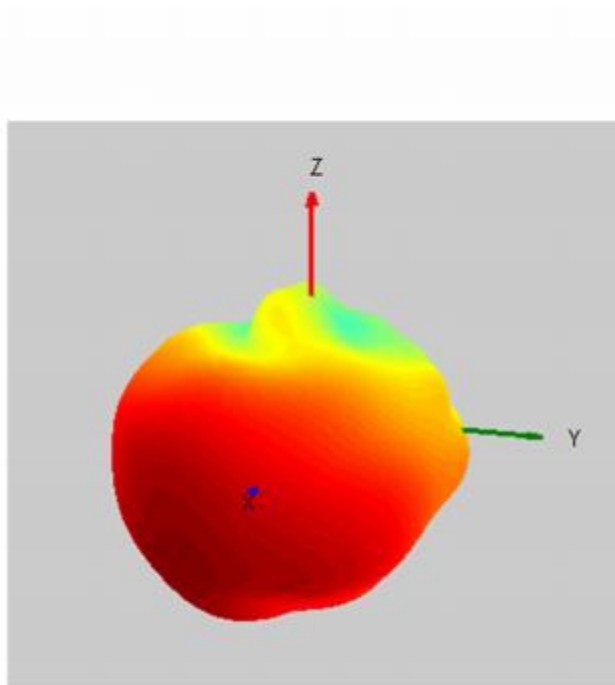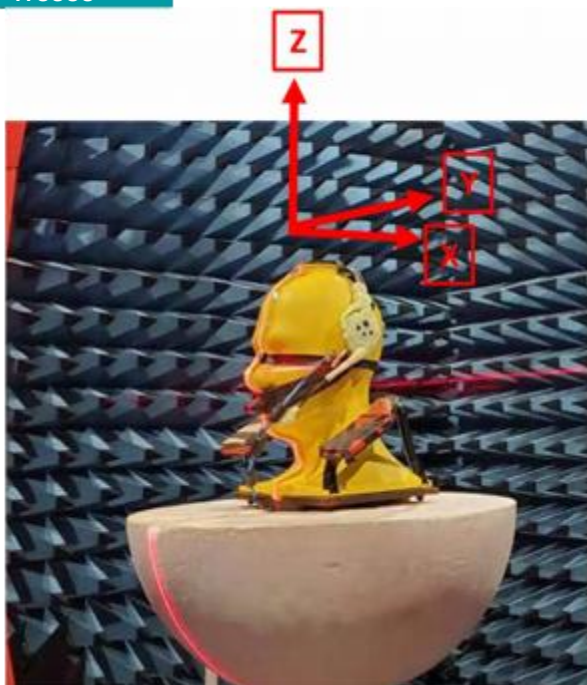

PACKAGING

W3388

TBD

Notes:

1. Please contact sales for availability, leadtime, and/or any special requests. Samples available upon request.

For More Information

[Americas-antennas.us@pulseelectronics.com](mailto:antennas.us@pulseelectronics.com) | [Europe-antennas.eu@pulseelectronics.com](mailto:antennas.eu@pulseelectronics.com) | [Asia-antennas.as@pulseelectronics.com](mailto:antennas.as@pulseelectronics.com) | [Questions?](#) +1-800-
ANTENNA Performance warranty of products offered on this datasheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein
may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.

Pulse Finland Oy
Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

Domicile: Kempele
Business ID: 1933992-8
firstname.lastname@pulseeng.com
www.pulseeng.com/antennas

