

FCC Test Report

Client Name : MOBILE INTOUCH CORP.

Address : 3311 S RAINBOW BLVD STE105,LAS VEGAS,NV 89146
USA

Product Name : 4G ROUTER

Date : Jan. 21, 2021



Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	7
1.6. Description Of Test Setup.....	8
1.7. Test Equipment List.....	9
1.8. Measurement Uncertainty.....	10
1.9. Description of Test Facility.....	10
2. Summary of Test Results.....	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit.....	12
3.2. Test Setup.....	12
3.3. Test Procedure.....	12
3.4. Test Data.....	12
4. Radiation Spurious Emission and Band Edge.....	17
4.1. Test Standard and Limit.....	17
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. Maximum Peak Output Power Test.....	46
5.1. Test Standard and Limit.....	46
5.2. Test Setup.....	46
5.3. Test Procedure.....	46
5.4. Test Data.....	46
6. Occupy Bandwidth Test.....	50
6.1. Test Standard.....	50
6.2. Test Setup.....	50
6.3. Test Procedure.....	50
6.4. Test Data.....	50
7. Power Spectral Density Test.....	80
7.1. Test Standard and Limit.....	80
7.2. Test Setup.....	80
7.3. Test Procedure.....	80
7.4. Test Data.....	80
8. Antenna Requirement.....	98
8.1. Test Standard and Requirement.....	98
8.2. Antenna Connected Construction.....	98

9. Frequency Stability.....	99
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	100
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	100
APPENDIX III -- INTERNAL PHOTOGRAPH.....	100



TEST REPORT

Applicant : MOBILE INTOUCH CORP.

Manufacturer : SHENZHEN MELON ELECTRONICS CO., LTD.

Product Name : 4G ROUTER

Model No. : Beam, Eagle, Plex, Flex

Trade Mark : Mobile Intouch/ MITWireless

Rating(s) : Input: DC 12V/1.5A with DC 7.4V, 4800 mAh Battery inside (via adapter input:
AC 100-240V/0.6A; Output: DC 12V 1.5A)

Test Standard(s) : **FCC Part15 Subpart E, Paragraph 15.407**
ANSI C63.10: 2013,

Test Method(s) : **KDB 789033 D02 General UNII Test Procedures New Rules v02r01**
KDB 662911 D01 Multiple Transmitter Output v02r01

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Oct. 28, 2020

Date of Test

Oct. 28, 2020~Jan. 07, 2021

Prepared By

Yilia Zhong

(Engineer / Yilia Zhong)

Reviewer

Bibo Zhang

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

Kingkong Jin

(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	MOBILE INTOUCH CORP.
Address	:	3311 S RAINBOW BLVD STE105,LAS VEGAS,NV 89146 USA
Manufacturer	:	SHENZHEN MELON ELECTRONICS CO., LTD.
Address	:	No.5 factory building, No.89 Hengping Road, Baoan community, Yuanshan street, Longgang District, Shenzhen, Guangdong,China
Factory	:	SHENZHEN MELON ELECTRONICS CO., LTD.
Address	:	No.5 factory building, No.89 Hengping Road, Baoan community, Yuanshan street, Longgang District, Shenzhen, Guangdong,China

1.2. Description of Device (EUT)

Product Name	:	4G ROUTER
Model No.	:	Beam, Eagle, Plex, Flex (Note: All samples are the same except the model number and appearance color, so we prepare "Eagle" for test only.)
Trade Mark	:	Mobile Intouch/ MITWireless
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter/ DC 7.4V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	WiFi 2.4G: 802.11b/ g/ n(HT20): 2412-2462MHz 802.11n(HT40): 2422-2452MHz WiFi 5.1G: 5180MHz~5240MHz WiFi 5.8G: 5745MHz~5825MHz
	Number of Channel:	WiFi 2.4G: 11 Channels for 802.11b/ g/ n(HT20) 7 Channels for 802.11n(HT40) WiFi 5.1G: 4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80) WiFi 5.8G: 5 Channels for 802.11a 5 Channels for 802.11n(HT20) 5 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40)

		1 Channels for 802.11ac(HT80)
	Modulation Type:	WiFi 2.4G: 802.11g/n OFDM WiFi 5.1G: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM WiFi 5.8G: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
	Antenna Type:	PIFA Antenna
	Antenna Gain(Peak):	WiFi 2.4G ANT A/ ANT B: 5dBi WiFi 5.1G ANT A/ ANT B: 2dBi WiFi 5.8G ANT A/ ANT B: 2dBi LTE Band 2/4: 3dBi
	Directional Gain:	WiFi 2.4G: 8.01 dBi WiFi 5.1G/ WiFi 5.8G: 5.01 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for Wifi 5.8G module. 3) Only 802.11n(HT20), 802.11n(HT40), 802.11ac(HT20), 802.11ac(HT40), 802.11ac(HT80) support MIMO.		

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20/ac20)	CH 149	5745MHz
	CH 157	5785MHz
	CH 165	5825MHz
OFDM(802.11n40/ac40)	CH 151	5755MHz
	CH 159	5795MHz
OFDM(802.11ac80)	CH 155	5775MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

1.5. List of channels**802.11a/n20/ac20**

Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		



802.11n40/ac40

Channel	Freq. (MHz)	Channel	Freq. (MHz)
151	5755	159	5795

802.11ac80

Channel	Freq. (MHz)
155	5775

1.6. Description Of Test Setup

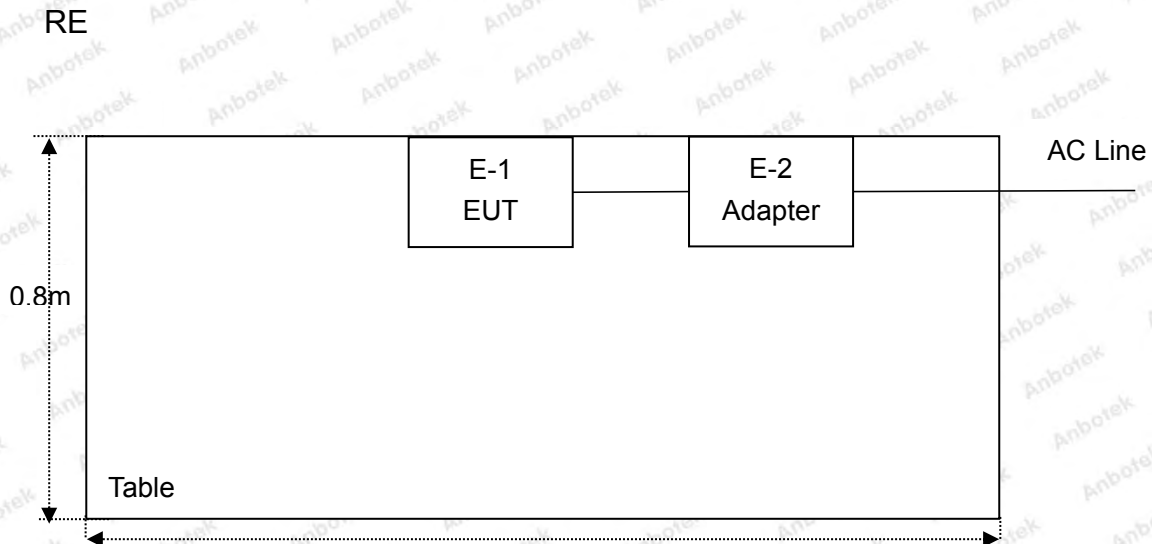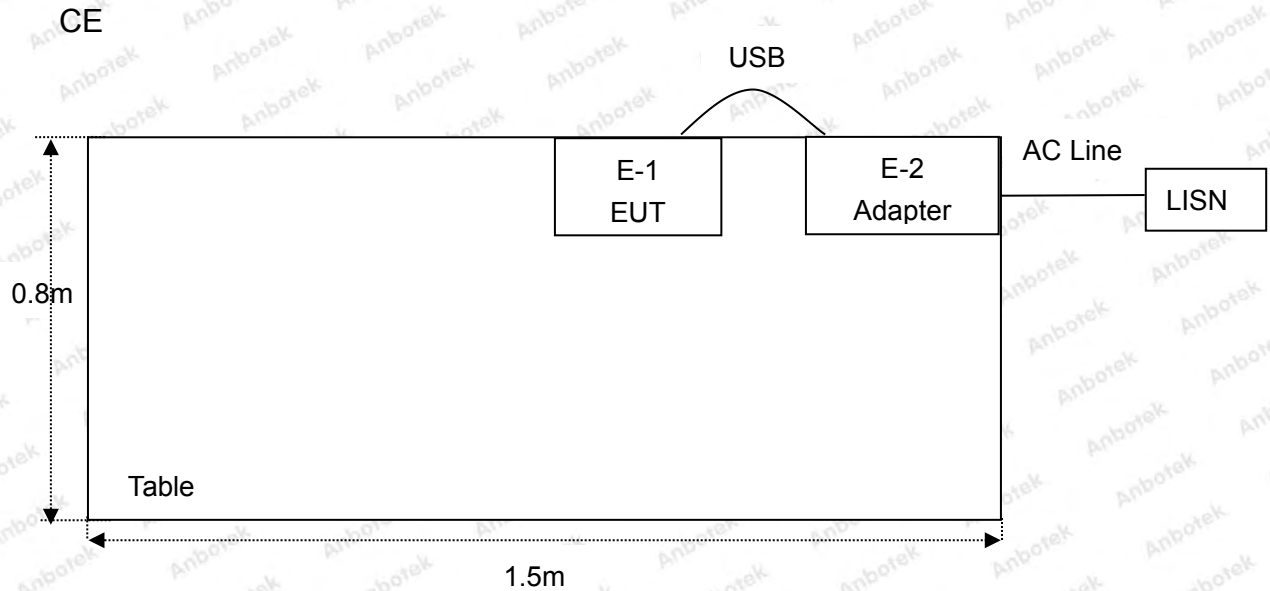

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)&15.407(e)	Occupy Bandwidth	PASS
15.407(a)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS
15.407(g)	Frequency Stability	PASS




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

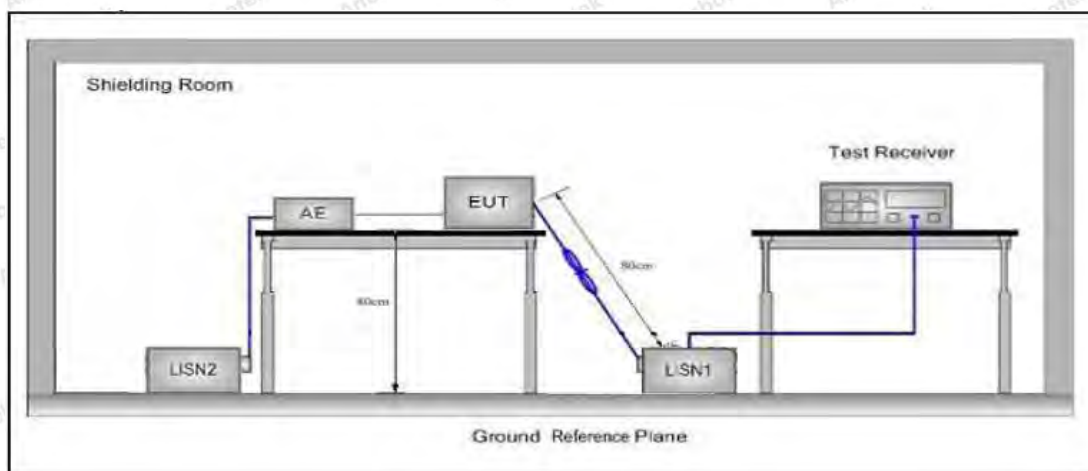

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, and found the 802.11ac80 CH 155 for ANT A which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: 802.11ac80 CH 155 for ANT A
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 22.6°C Hum.: 53%

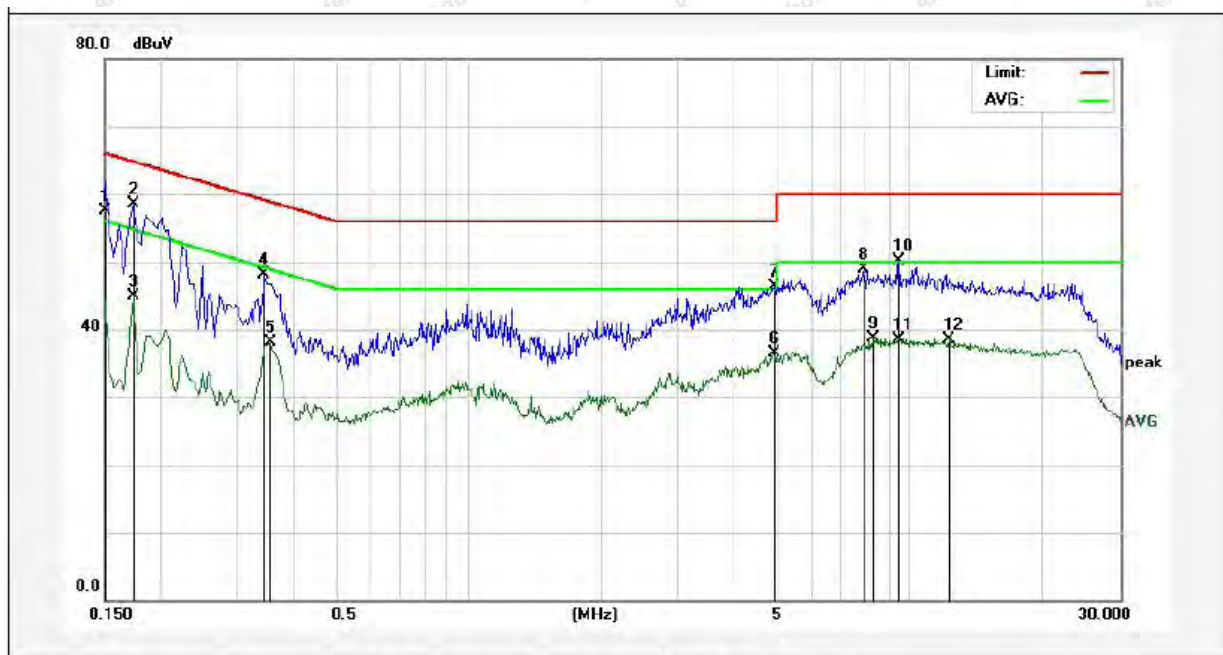

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	28.05	29.46	57.51	65.99	-8.48	QP	
2	0.1740	29.08	29.46	58.54	64.76	-6.22	QP	
3	0.1740	15.41	29.46	44.87	54.76	-9.89	AVG	
4	0.3460	18.60	29.45	48.05	59.06	-11.01	QP	
5	0.3540	8.61	29.45	38.06	48.87	-10.81	AVG	
6	4.9020	6.80	29.72	36.52	46.00	-9.48	AVG	
7	4.9340	16.60	29.72	46.32	56.00	-9.68	QP	
8	7.8900	19.14	29.81	48.95	60.00	-11.05	QP	
9	8.3220	8.90	29.83	38.73	50.00	-11.27	AVG	
10	9.4980	20.15	29.87	50.02	60.00	-9.98	QP	
11	9.4980	8.56	29.87	38.43	50.00	-11.57	AVG	
12	12.3139	8.69	29.85	38.54	50.00	-11.46	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: 802.11ac80 CH 155 for ANT A
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.6°C Hum.: 53%

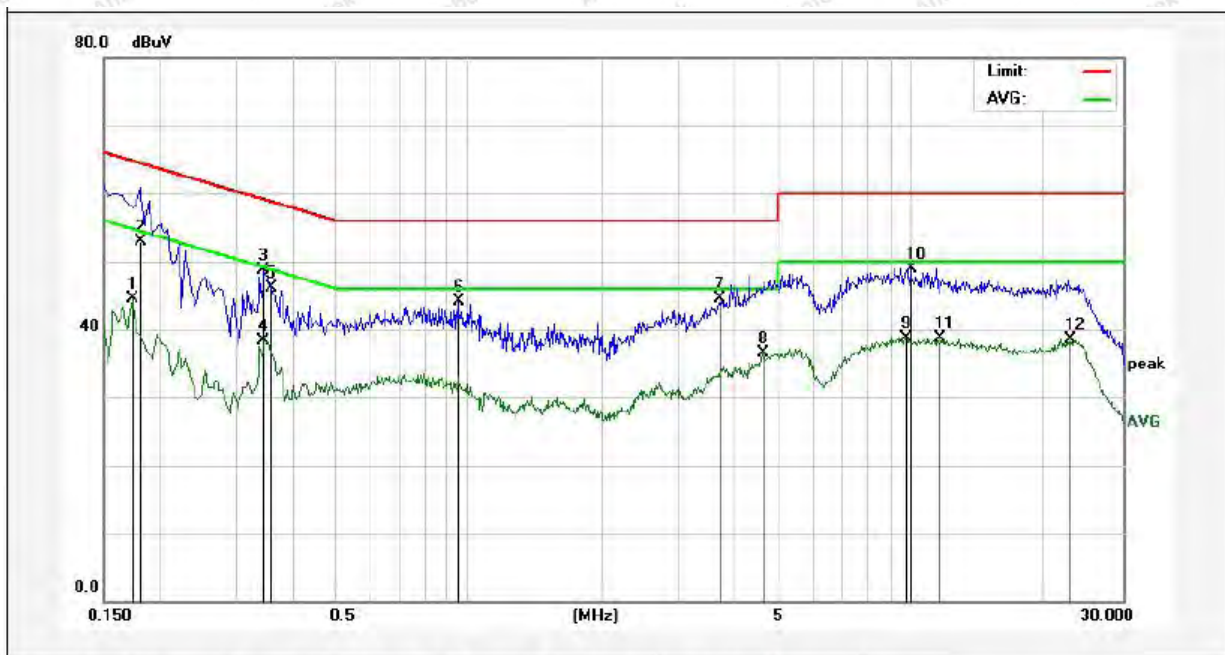

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	15.00	29.46	44.46	54.76	-10.30	AVG	
2	0.1819	23.44	29.46	52.90	64.39	-11.49	QP	
3	0.3460	19.24	29.45	48.69	59.06	-10.37	QP	
4	0.3460	8.82	29.45	38.27	49.06	-10.79	AVG	
5	0.3595	16.63	29.46	46.09	58.74	-12.65	QP	
6	0.9500	14.41	29.63	44.04	56.00	-11.96	QP	
7	3.7060	14.87	29.69	44.56	56.00	-11.44	QP	
8	4.6459	6.83	29.72	36.55	46.00	-9.45	AVG	
9	9.7379	8.89	29.87	38.76	50.00	-11.24	AVG	
10	9.9819	19.12	29.88	49.00	60.00	-11.00	QP	
11	11.6259	8.81	29.86	38.67	50.00	-11.33	AVG	
12	22.7939	8.52	29.96	38.48	50.00	-11.52	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: 802.11ac80 CH 155 for ANT A
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 22.6°C Hum.: 53%

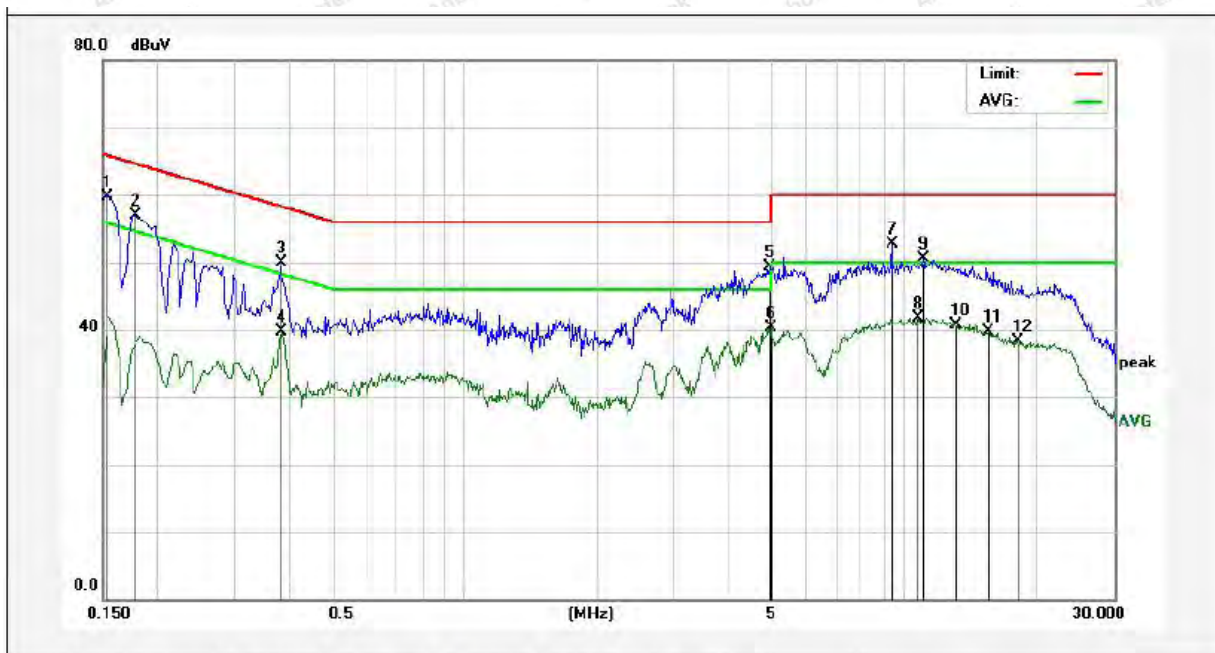

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	30.31	29.46	59.77	65.78	-6.01	QP	
2	0.1780	27.41	29.46	56.87	64.57	-7.70	QP	
3	0.3820	20.38	29.47	49.85	58.23	-8.38	QP	
4	0.3820	10.30	29.47	39.77	48.23	-8.46	AVG	
5	4.9260	19.51	29.72	49.23	56.00	-6.77	QP	
6	4.9540	10.60	29.73	40.33	46.00	-5.67	AVG	
7	9.3979	22.76	29.86	52.62	60.00	-7.38	QP	
8	10.7860	11.90	29.87	41.77	50.00	-8.23	AVG	
9	11.0580	20.70	29.86	50.56	60.00	-9.44	QP	
10	13.0420	10.96	29.84	40.80	50.00	-9.20	AVG	
11	15.5020	9.88	29.84	39.72	50.00	-10.28	AVG	
12	18.0300	8.35	29.91	38.26	50.00	-11.74	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 802.11ac80 CH 155 for ANT A
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.6°C Hum.: 53%

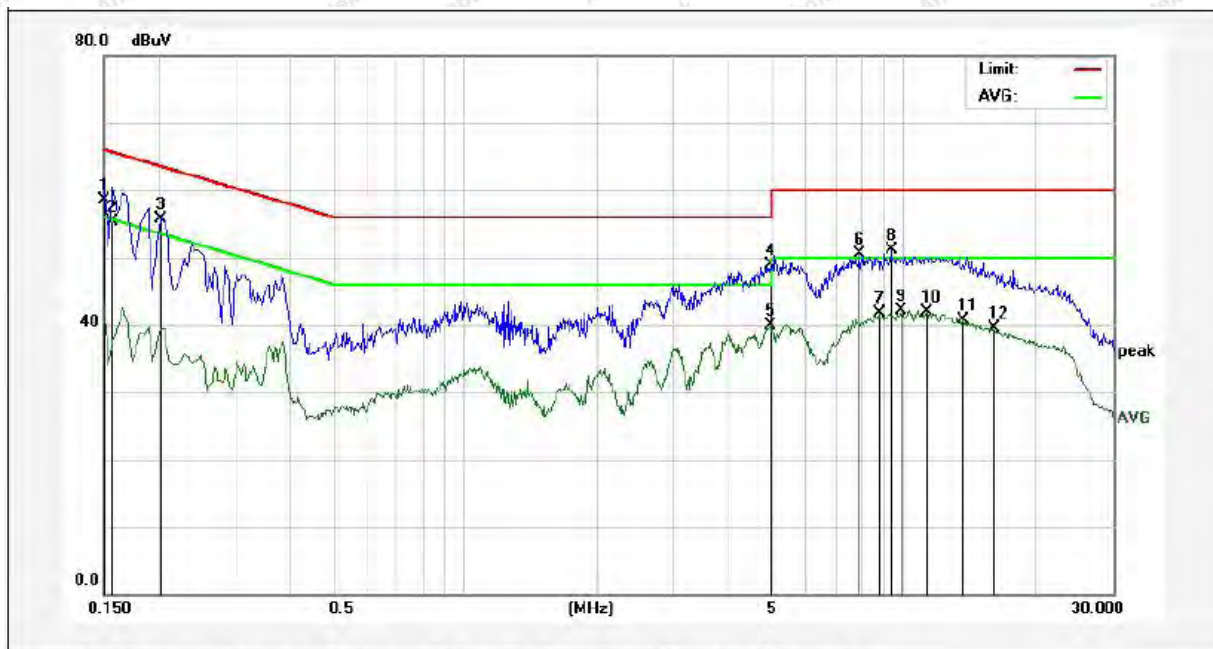

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	29.06	29.46	58.52	66.00	-7.48	QP	
2	0.1580	25.90	29.46	55.36	65.56	-10.20	QP	
3	0.2020	26.22	29.45	55.67	63.52	-7.85	QP	
4	4.9618	19.10	29.73	48.83	56.00	-7.17	QP	
5	4.9618	10.24	29.73	39.97	46.00	-6.03	AVG	
6	7.9259	20.63	29.81	50.44	60.00	-9.56	QP	
7	8.7779	11.88	29.84	41.72	50.00	-8.28	AVG	
8	9.3579	21.25	29.86	51.11	60.00	-8.89	QP	
9	9.8619	12.22	29.88	42.10	50.00	-7.90	AVG	
10	11.2899	12.02	29.87	41.89	50.00	-8.11	AVG	
11	13.6539	10.86	29.83	40.69	50.00	-9.31	AVG	
12	16.0019	9.68	29.85	39.53	50.00	-10.47	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

- (1) The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.
- (3) Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 dBuV/m$, for $EIPR[dBm] = -27dBm$.

4.2. Test Setup

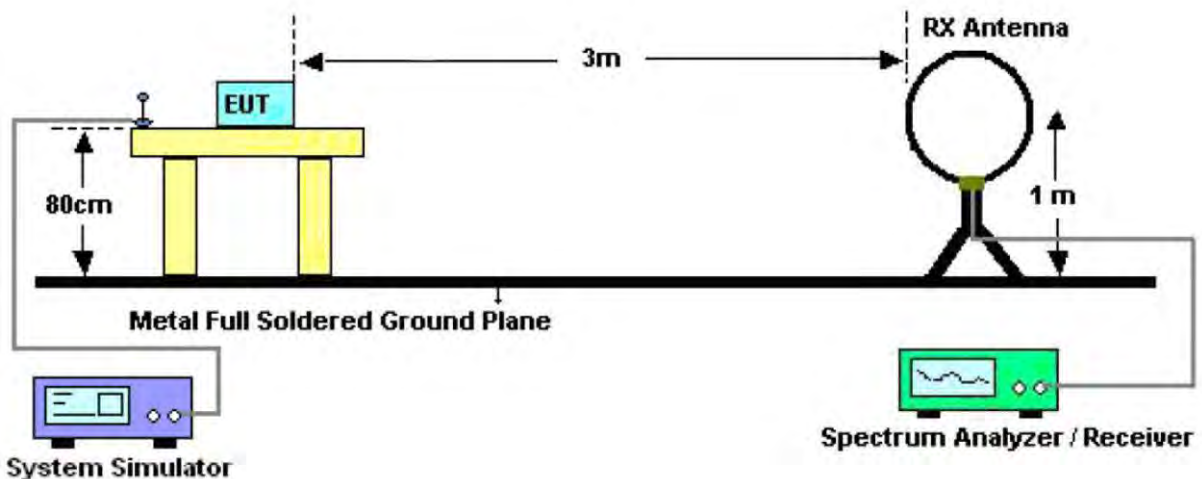


Figure 1. Below 30MHz

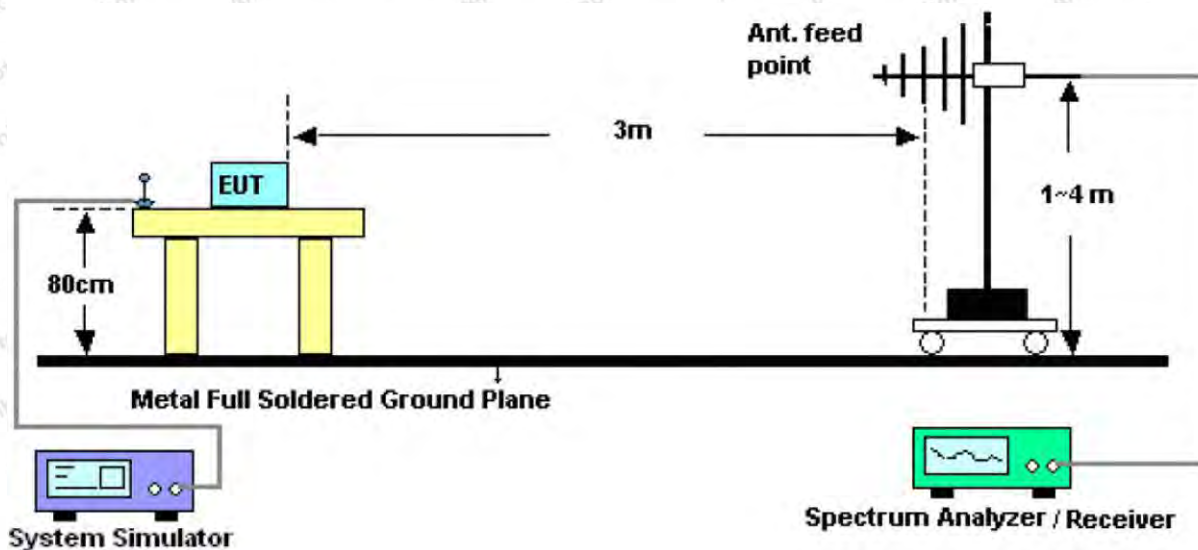


Figure 2. 30MHz to 1GHz

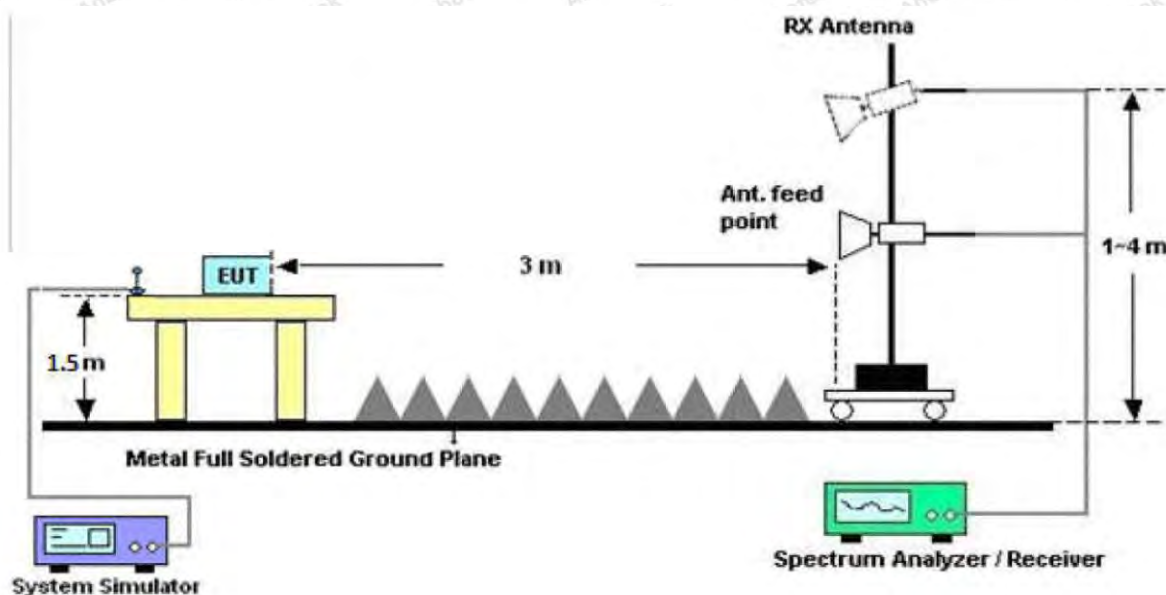


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-RF-05-a

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found the 802.11ac80 CH 155 for ANT A which is the worst case, only the worst case is recorded in the report.


Test Results (30~1000MHz)

Test Mode: 802.11ac80 CH 155 for ANT A

Power Source: AC 120V, 60Hz for adapter

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 23.7°C/50%RH

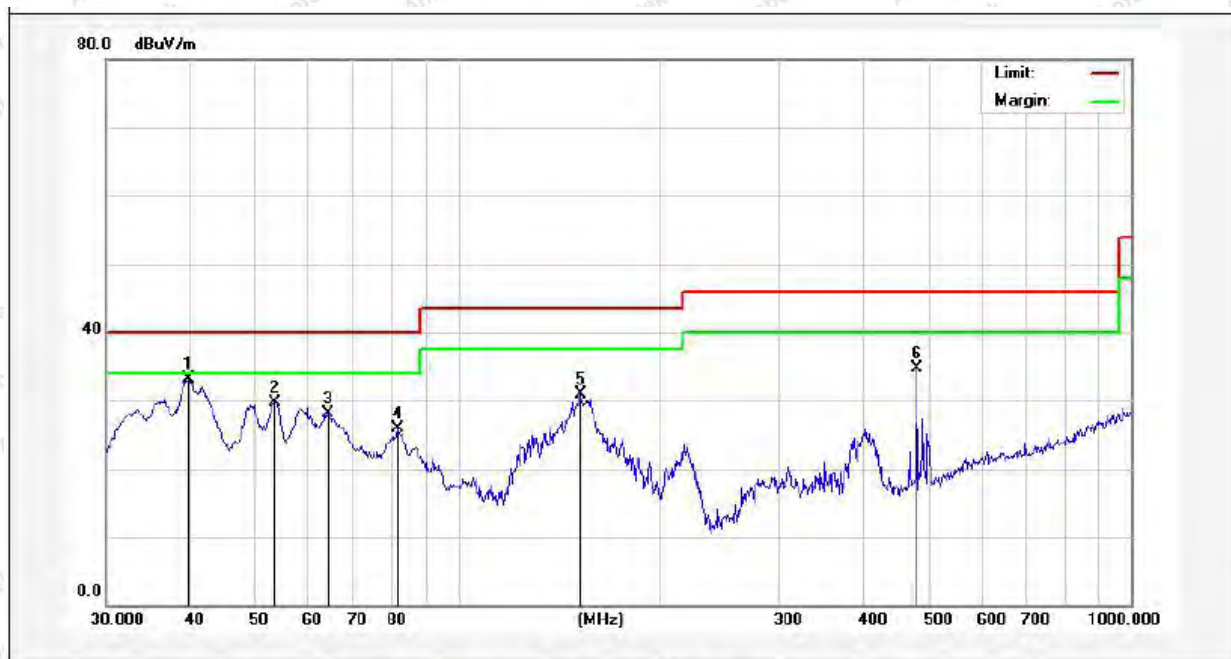

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.7146	46.84	-13.74	33.10	40.00	-6.90	QP	100	0	
2	53.5052	45.74	-16.02	29.72	40.00	-10.28	QP	100	360	
3	63.9827	45.81	-17.61	28.20	40.00	-11.80	QP	100	0	
4	81.2116	43.29	-17.48	25.81	40.00	-14.19	QP	100	360	
5	152.1297	50.67	-19.81	30.86	43.50	-12.64	QP	100	0	
6	480.5276	43.89	-9.21	34.68	46.00	-11.32	QP	100	360	

Test Results (30~1000MHz)

Test Mode: 802.11ac80 CH 155 for ANT A

Power Source: AC 120V, 60Hz for adapter

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 23.7°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	65.3431	42.46	-18.17	24.29	40.00	-15.71	QP	100	0	
2	215.2677	46.97	-19.56	27.41	43.50	-16.09	QP	100	360	
3	315.4806	41.75	-13.89	27.86	46.00	-18.14	QP	100	0	
4	403.2500	46.45	-12.93	33.52	46.00	-12.48	QP	100	360	
5	480.5276	45.58	-10.85	34.73	46.00	-11.27	QP	100	0	
6	958.7943	27.86	-0.64	27.22	46.00	-18.78	QP	100	360	

Test Results (30~1000MHz)

Test Mode: 802.11ac80 CH 155 for ANT A

Power Source: AC 240V, 60Hz for adapter

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 23.7°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.9881	48.89	-13.68	35.21	40.00	-4.79	QP	100	0	
2	53.8817	48.17	-16.15	32.02	40.00	-7.98	QP	100	360	
3	86.5027	43.15	-16.50	26.65	40.00	-13.35	QP	100	0	
4	153.2004	51.53	-19.76	31.77	43.50	-11.73	QP	100	360	
5	338.4001	32.49	-12.31	20.18	46.00	-25.82	QP	100	0	
6	480.5276	41.18	-9.21	31.97	46.00	-14.03	QP	100	360	


Test Results (30~1000MHz)

Test Mode: 802.11ac80 CH 155 for ANT A

Power Source: AC 240V, 60Hz for adapter

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 23.7°C/50%RH

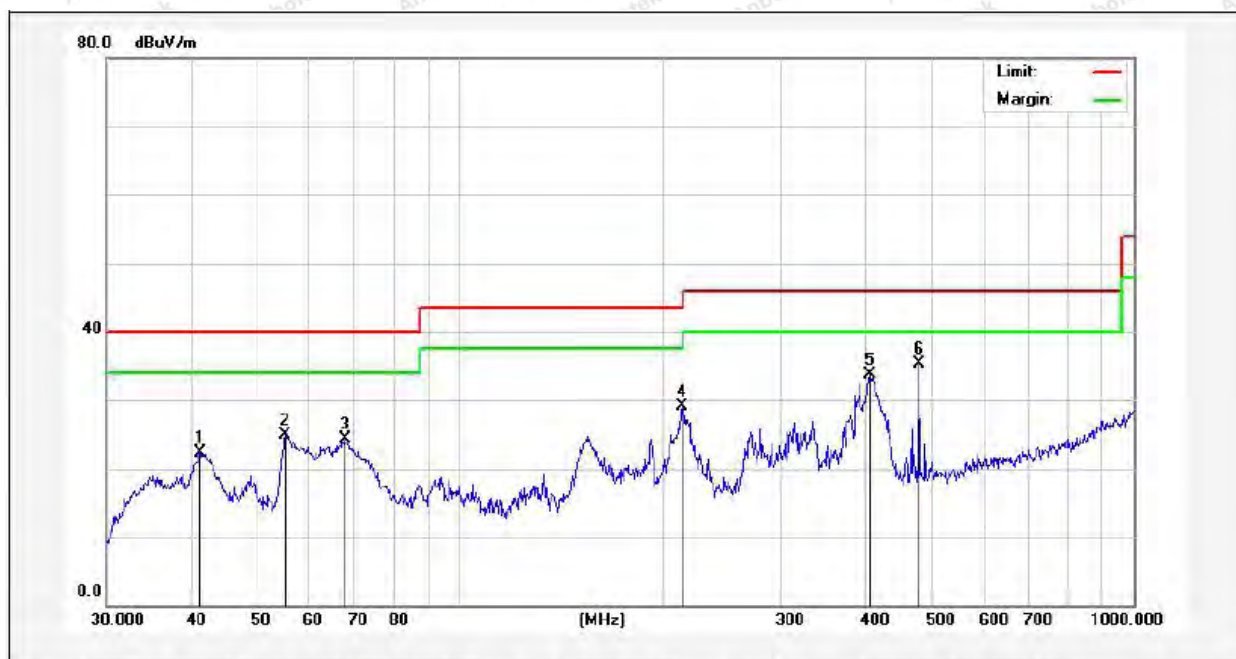

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	41.2764	37.25	-14.85	22.40	40.00	-17.60	QP	100	0	
2	55.2207	41.47	-16.51	24.96	40.00	-15.04	QP	100	360	
3	67.6751	43.78	-19.52	24.26	40.00	-15.74	QP	100	0	
4	213.7633	48.71	-19.58	29.13	43.50	-14.37	QP	100	360	
5	406.0880	46.49	-12.86	33.63	46.00	-12.37	QP	100	0	
6	480.5276	46.10	-10.85	35.25	46.00	-10.75	QP	100	360	

Test Results (Above 1000MHz)

ANT A:

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	40.23	31.98	17.08	33.91	55.38	68.20	-12.82	V
17235.00	41.92	32.65	20.03	34.85	59.75	68.20	-8.45	V
11490.00	39.92	31.98	17.08	33.91	55.07	68.20	-13.13	H
17235.00	39.40	32.65	20.03	34.85	57.23	68.20	-10.97	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	27.78	31.98	17.08	33.91	42.93	54.00	-11.07	V
17235.00	29.80	32.65	20.03	34.85	47.63	54.00	-6.37	V
11490.00	27.32	31.98	17.08	33.91	42.47	54.00	-11.53	H
17235.00	27.30	32.65	20.03	34.85	45.13	54.00	-8.87	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	39.50	32.44	17.18	33.91	55.21	68.20	-12.99	V
17355.00	40.97	32.78	20.12	34.86	59.01	68.20	-9.19	V
11570.00	41.77	32.44	17.18	33.91	57.48	68.20	-10.72	H
17355.00	41.59	32.78	20.12	34.86	59.63	68.20	-8.57	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	27.72	32.44	17.18	33.91	43.43	54.00	-10.57	V
17355.00	27.10	32.78	20.12	34.86	45.14	54.00	-8.86	V
11570.00	29.86	32.44	17.18	33.91	45.57	54.00	-8.43	H
17355.00	29.44	32.78	20.12	34.86	47.48	54.00	-6.52	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	40.70	32.59	18.02	33.92	57.39	68.20	-10.81	V
17475.00	40.96	32.87	20.15	34.88	59.10	68.20	-9.10	V
11650.00	39.73	32.59	18.02	33.92	56.42	68.20	-11.78	H
17475.00	39.44	32.87	20.15	34.88	57.58	68.20	-10.62	H


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	27.24	32.59	18.02	33.92	43.93	54.00	-10.07	V
17475.00	27.88	32.87	20.15	34.88	46.02	54.00	-7.98	V
11650.00	28.51	32.59	18.02	33.92	45.20	54.00	-8.80	H
17475.00	29.57	32.87	20.15	34.88	47.71	54.00	-6.29	H


Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11n(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Band Edge test:

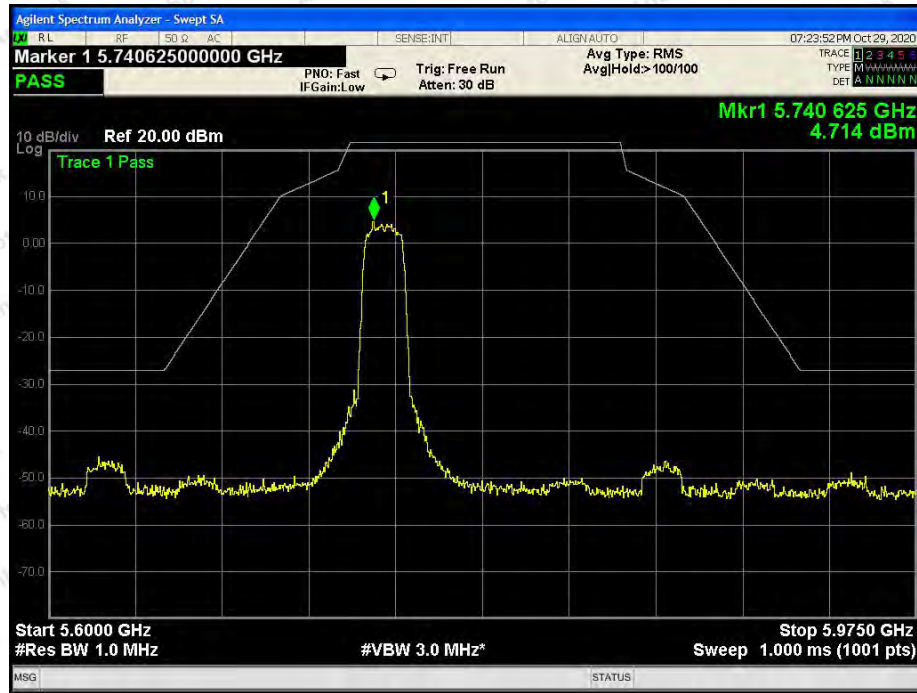


802.11a: Band Edge, Left Side

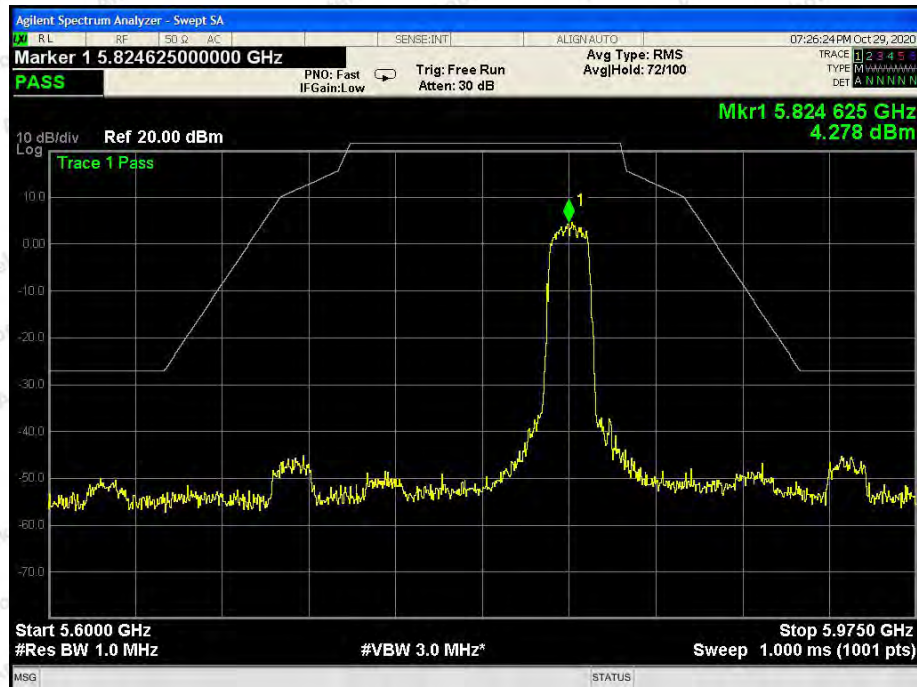


802.11a: Band Edge, Right Side

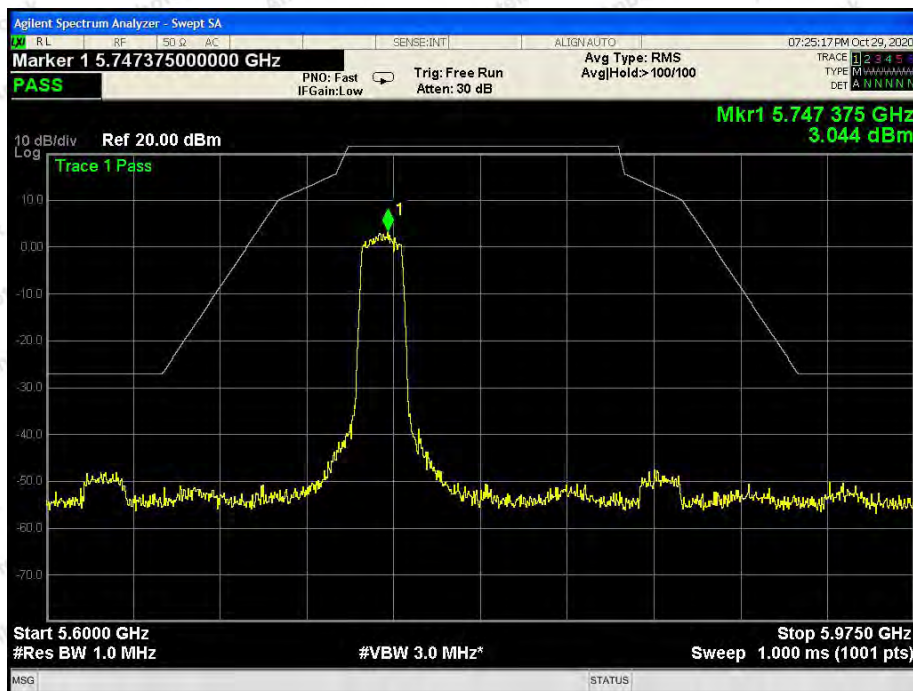


802.11n(20): Band Edge, Left Side

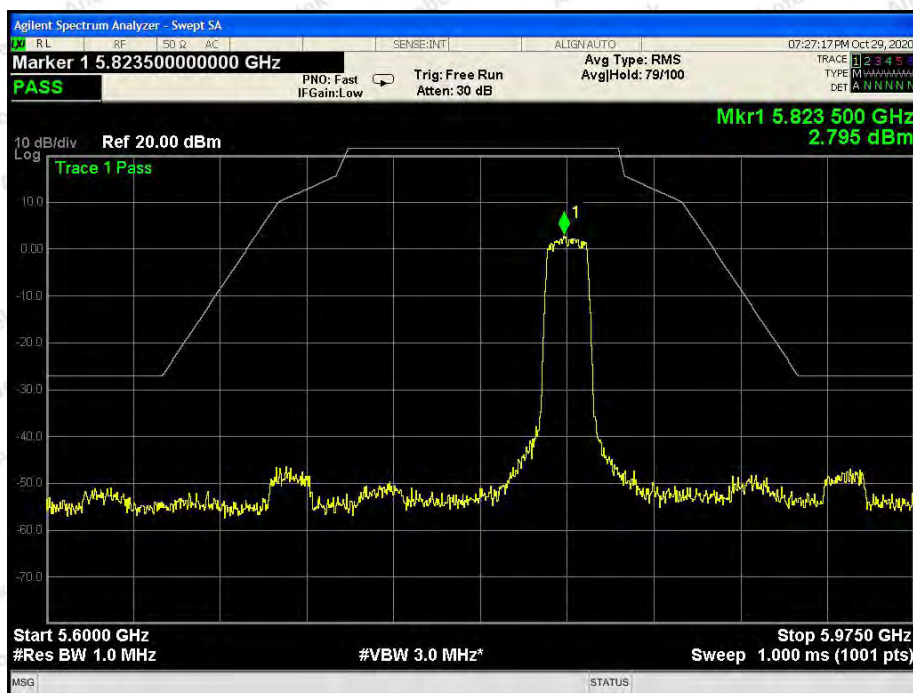


802.11n(20): Band Edge, Right Side

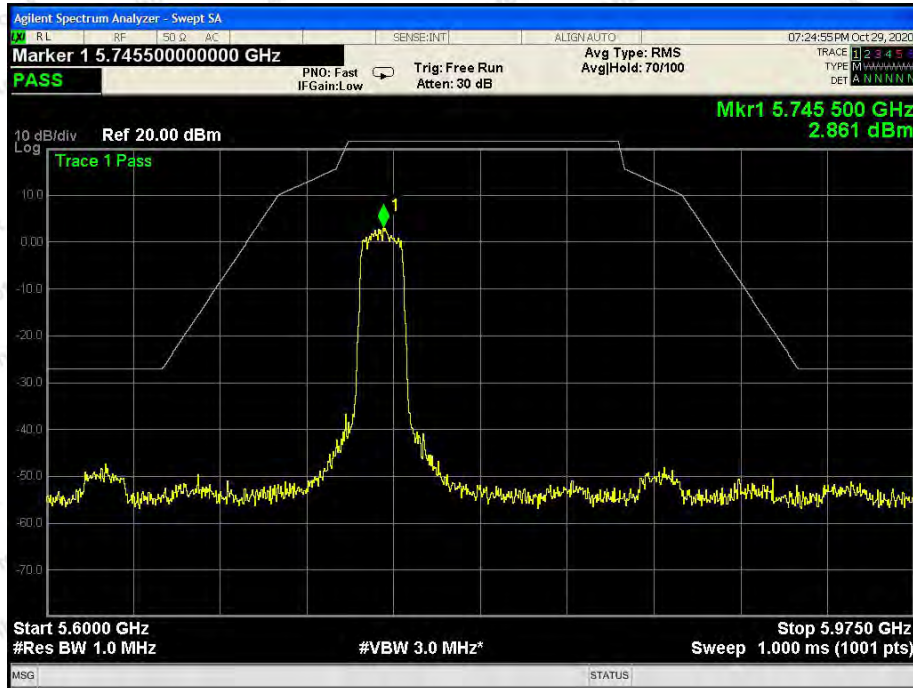


802.11ac(20): Band Edge, Left Side

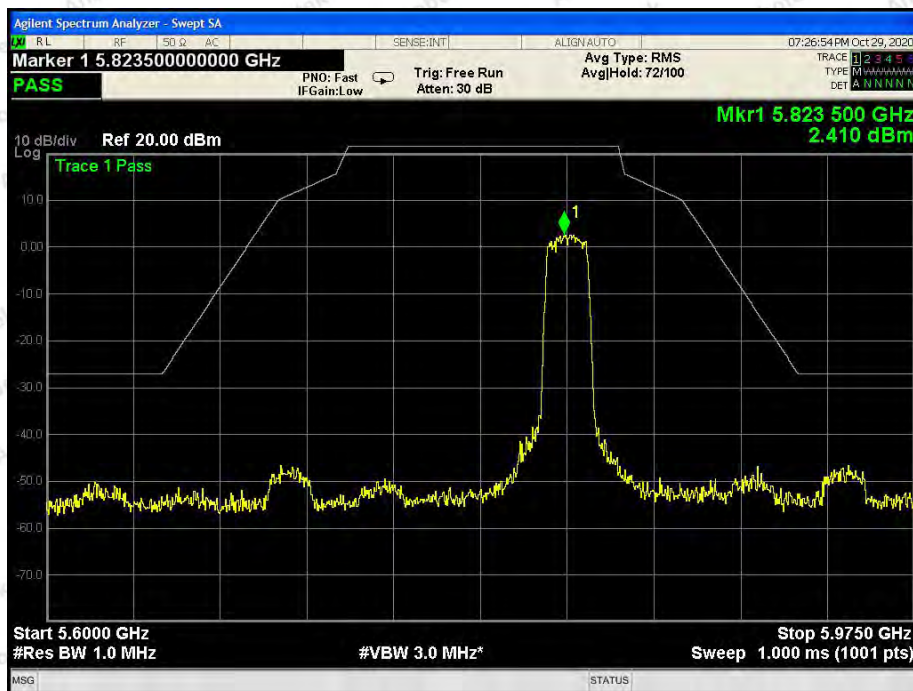


802.11ac(20): Band Edge, Right Side

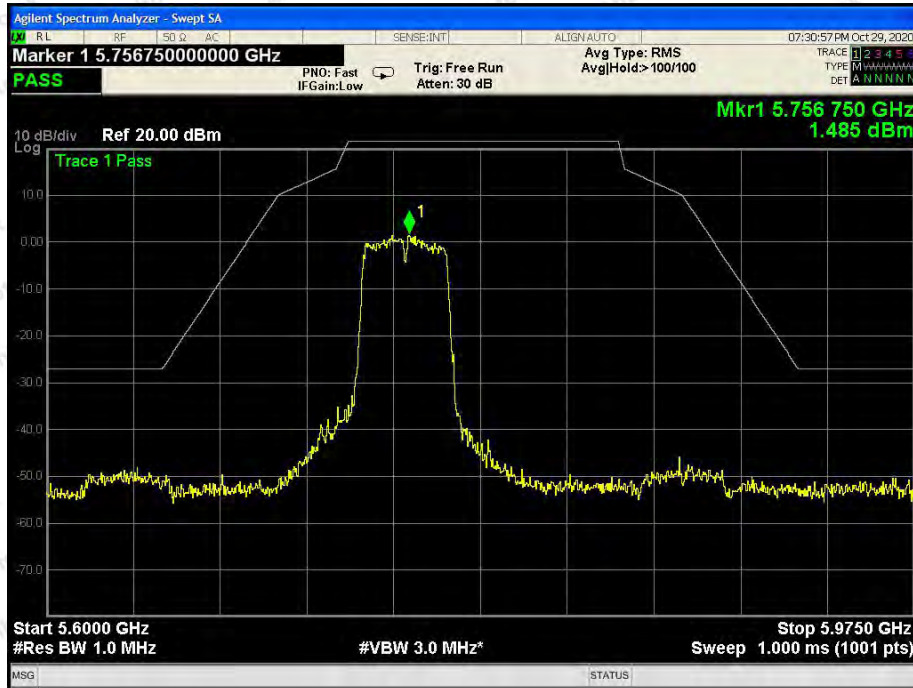


802.11n(40): Band Edge, Left Side

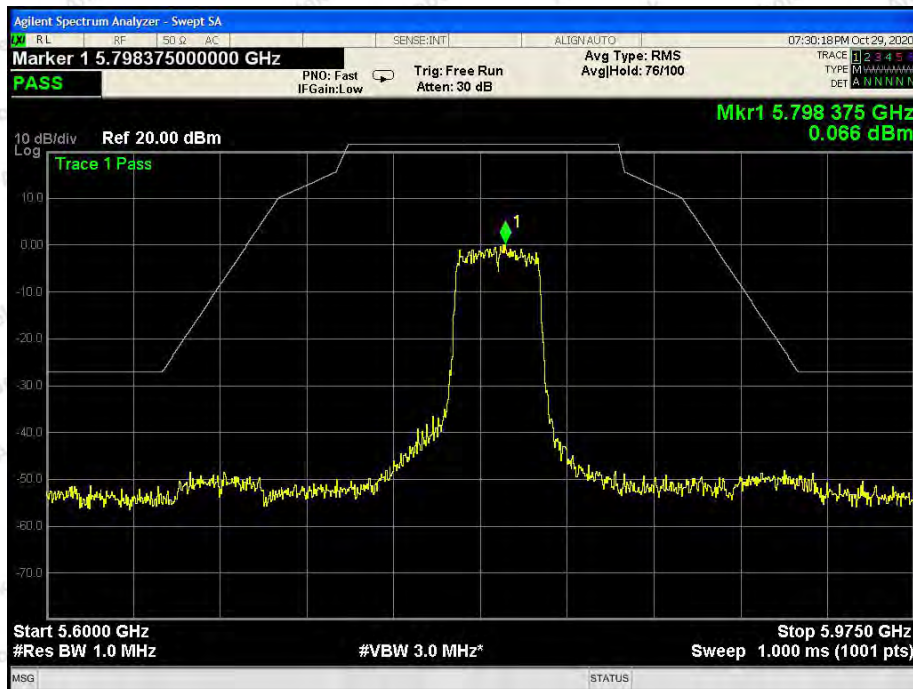


802.11n(40): Band Edge, Right Side

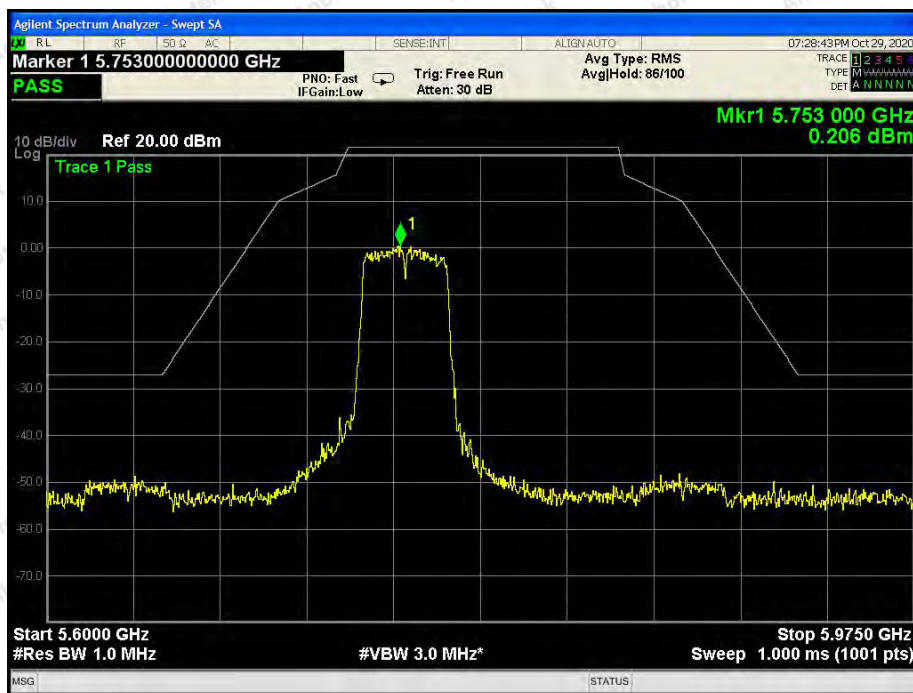

802.11ac(40): Band Edge, Left Side

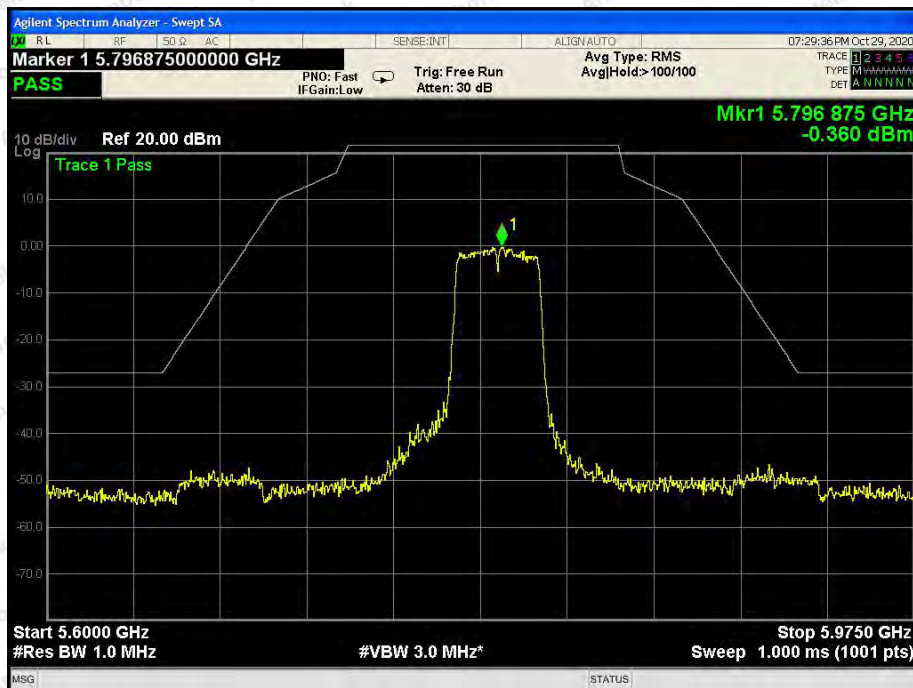

802.11ac(40): Band Edge, Right Side

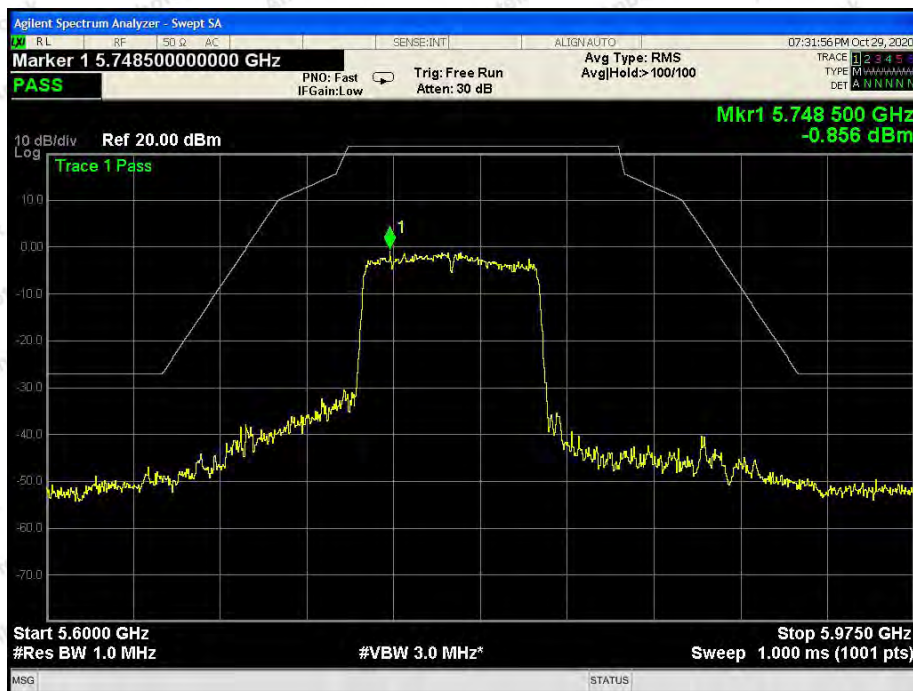

802.11ac(80): Band Edge

Test Results (Above 1000MHz)

ANT B:

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	40.60	31.98	17.08	33.91	55.75	68.20	-12.45	V
17235.00	41.53	32.65	20.03	34.85	59.36	68.20	-8.84	V
11490.00	41.49	31.98	17.08	33.91	56.64	68.20	-11.56	H
17235.00	41.10	32.65	20.03	34.85	58.93	68.20	-9.27	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.42	31.98	17.08	33.91	44.57	54.00	-9.43	V
17235.00	28.29	32.65	20.03	34.85	46.12	54.00	-7.88	V
11490.00	29.11	31.98	17.08	33.91	44.26	54.00	-9.74	H
17235.00	29.72	32.65	20.03	34.85	47.55	54.00	-6.45	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	41.68	32.44	17.18	33.91	57.39	68.20	-10.81	V
17355.00	40.01	32.78	20.12	34.86	58.05	68.20	-10.15	V
11570.00	40.66	32.44	17.18	33.91	56.37	68.20	-11.83	H
17355.00	40.75	32.78	20.12	34.86	58.79	68.20	-9.41	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	28.35	32.44	17.18	33.91	44.06	54.00	-9.94	V
17355.00	28.60	32.78	20.12	34.86	46.64	54.00	-7.36	V
11570.00	27.01	32.44	17.18	33.91	42.72	54.00	-11.28	H
17355.00	27.56	32.78	20.12	34.86	45.60	54.00	-8.40	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Pol.
11650.00	39.12	32.59	18.02	33.92	55.81	68.20	-12.39	V
17475.00	40.82	32.87	20.15	34.88	58.96	68.20	-9.24	V
11650.00	40.74	32.59	18.02	33.92	57.43	68.20	-10.77	H
17475.00	40.45	32.87	20.15	34.88	58.59	68.20	-9.61	H


Average value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Pol.
11650.00	29.59	32.59	18.02	33.92	46.28	54.00	-7.72	V
17475.00	28.07	32.87	20.15	34.88	46.21	54.00	-7.79	V
11650.00	31.14	32.59	18.02	33.92	47.83	54.00	-6.17	H
17475.00	29.84	32.87	20.15	34.88	47.98	54.00	-6.02	H


Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11n(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Band Edge test:

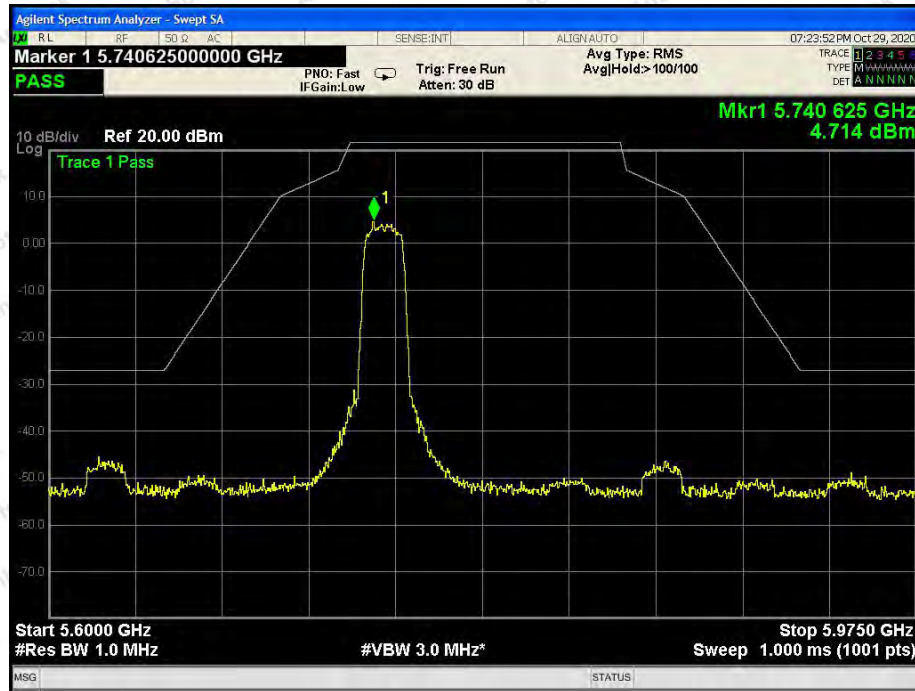


802.11a: Band Edge, Left Side

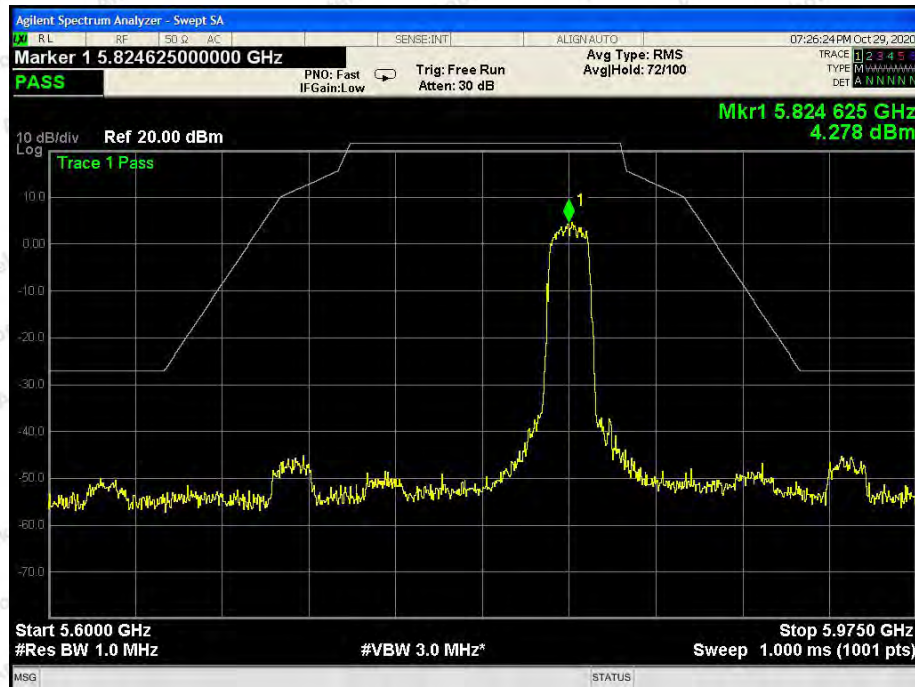


802.11a: Band Edge, Right Side

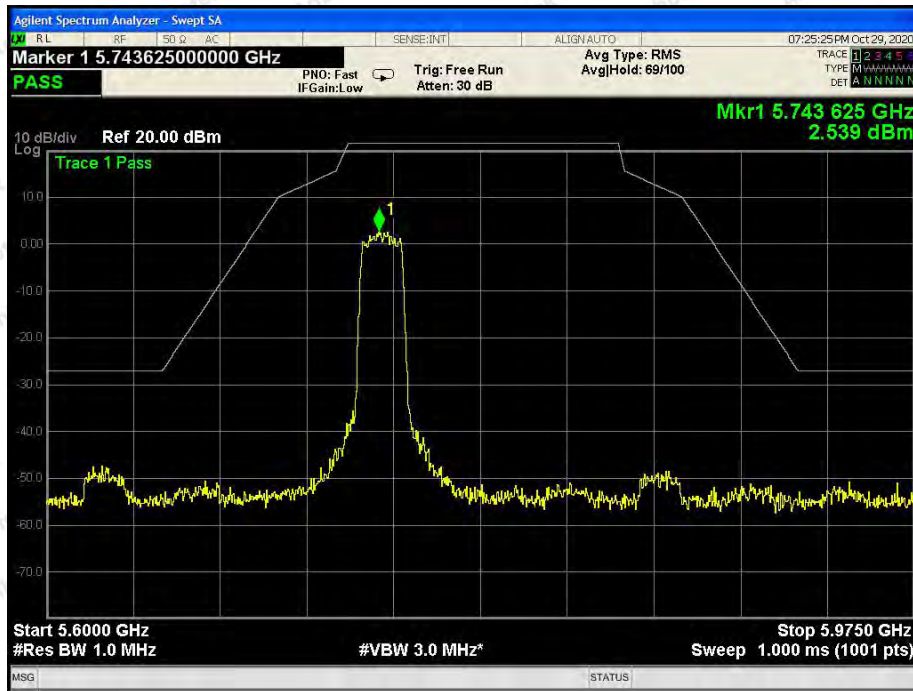


802.11n(20): Band Edge, Left Side

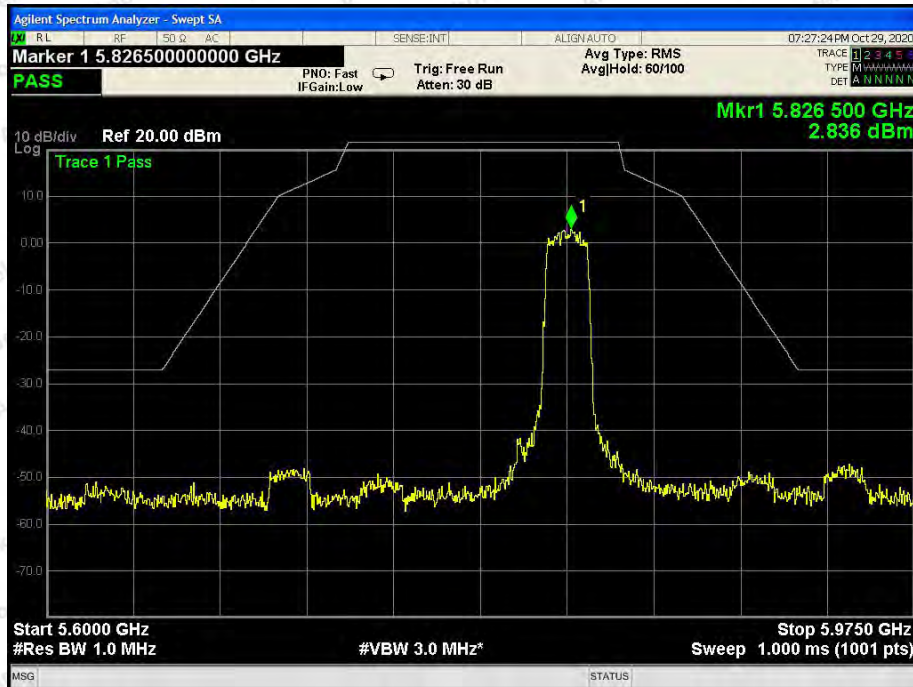


802.11n(20): Band Edge, Right Side

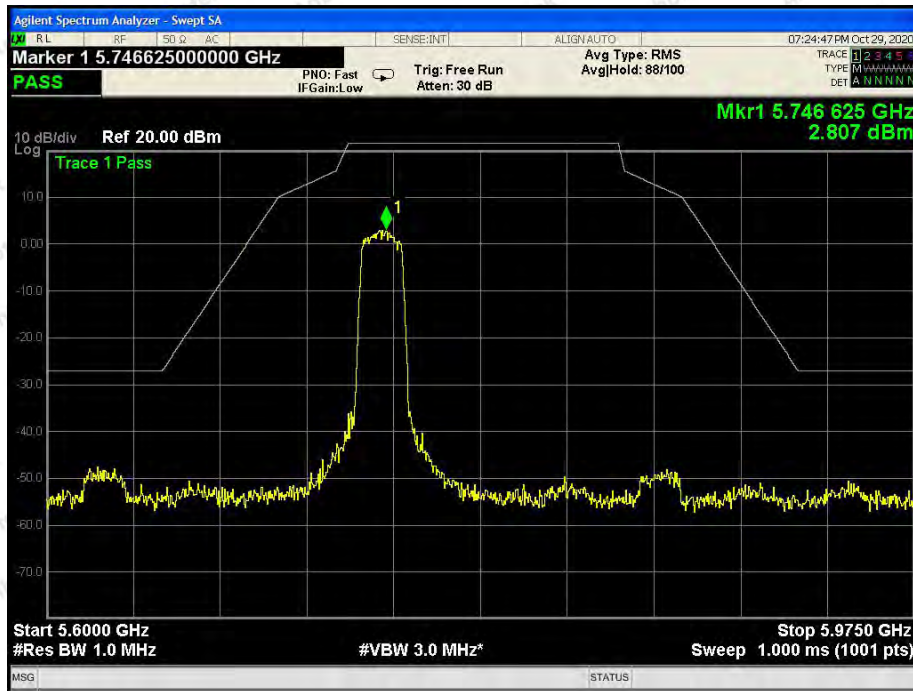


802.11ac(20): Band Edge, Left Side

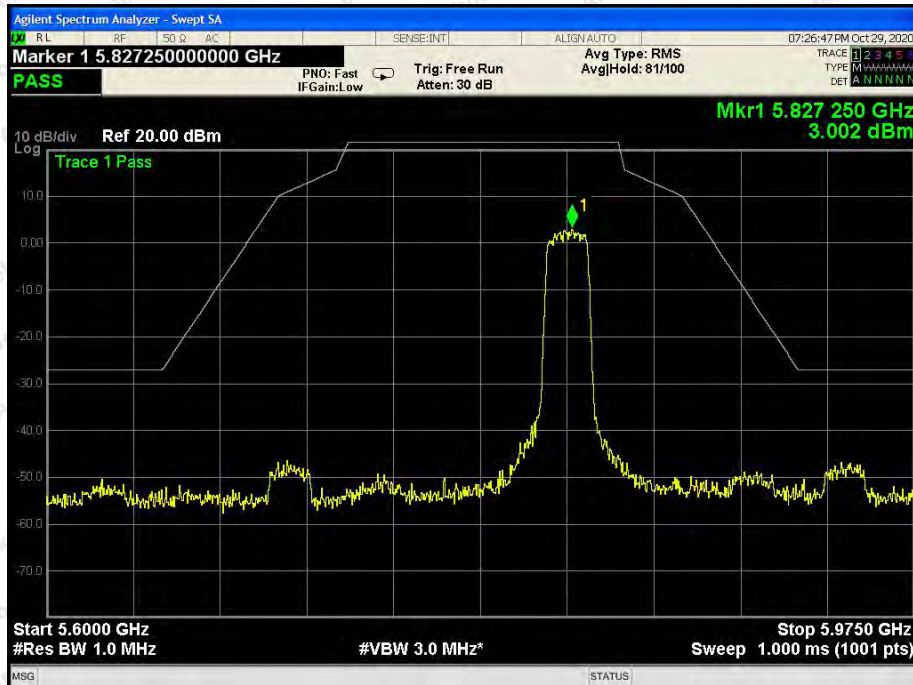


802.11ac(20): Band Edge, Right Side

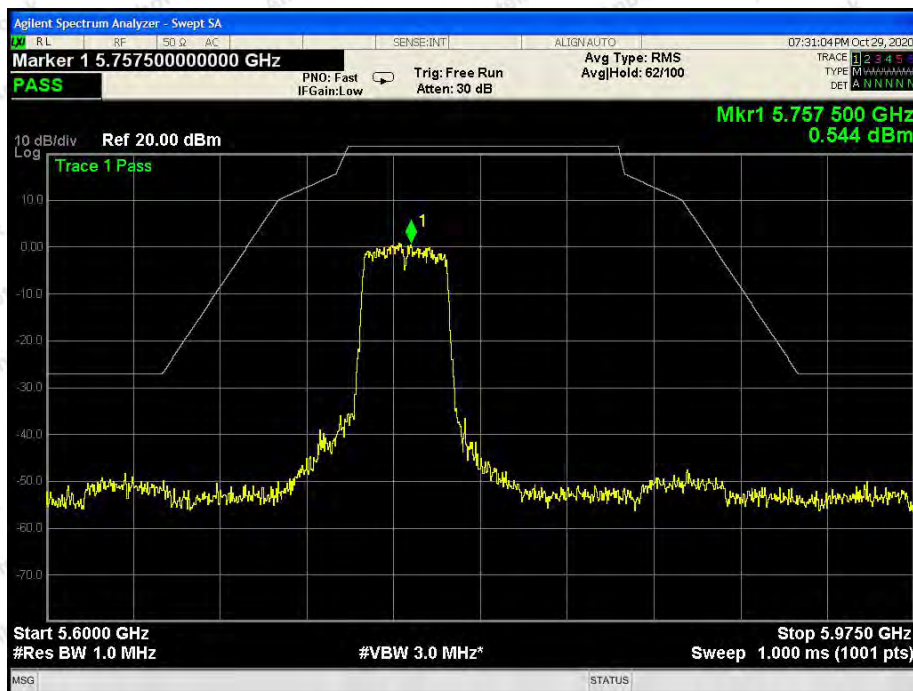


802.11n(40): Band Edge, Left Side

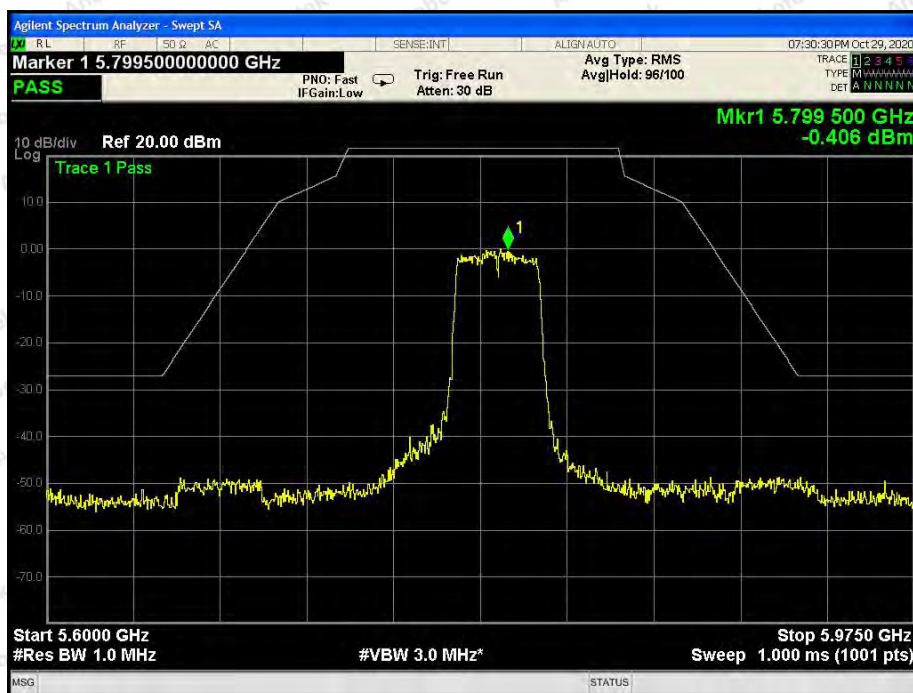


802.11n(40): Band Edge, Right Side

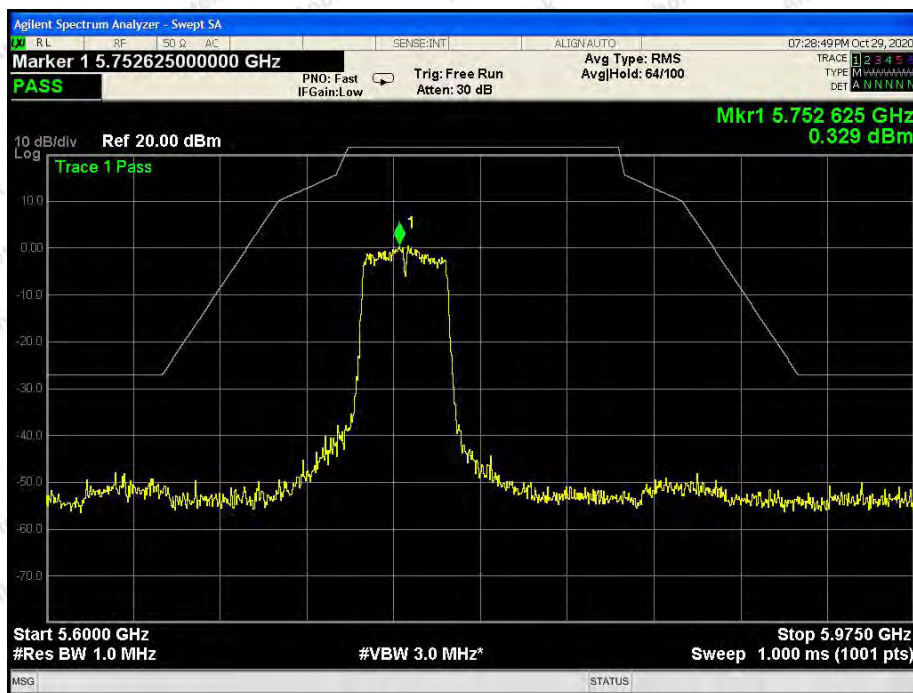

802.11ac(40): Band Edge, Left Side

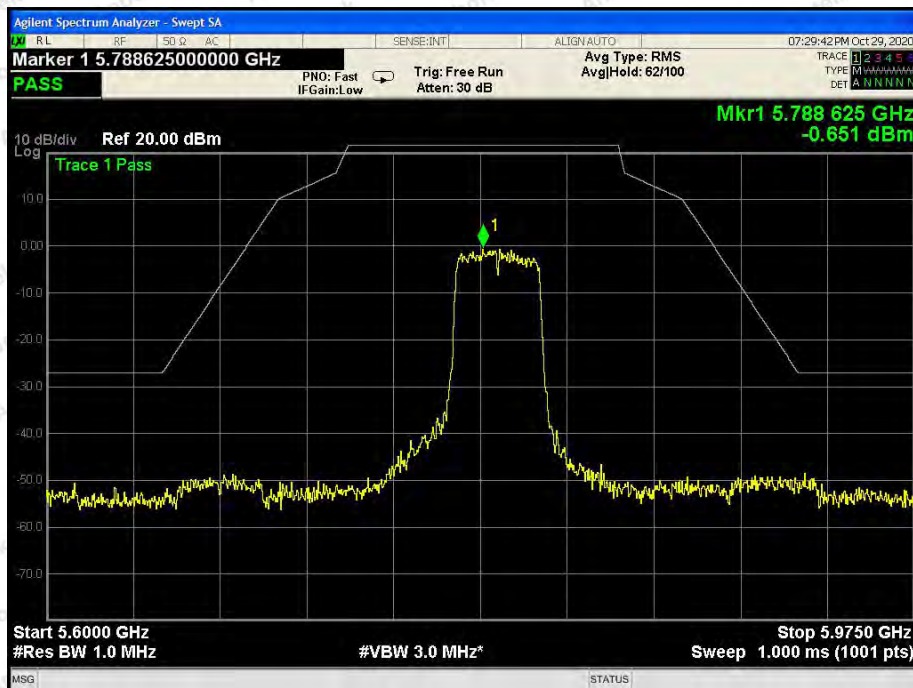

802.11ac(40): Band Edge, Right Side

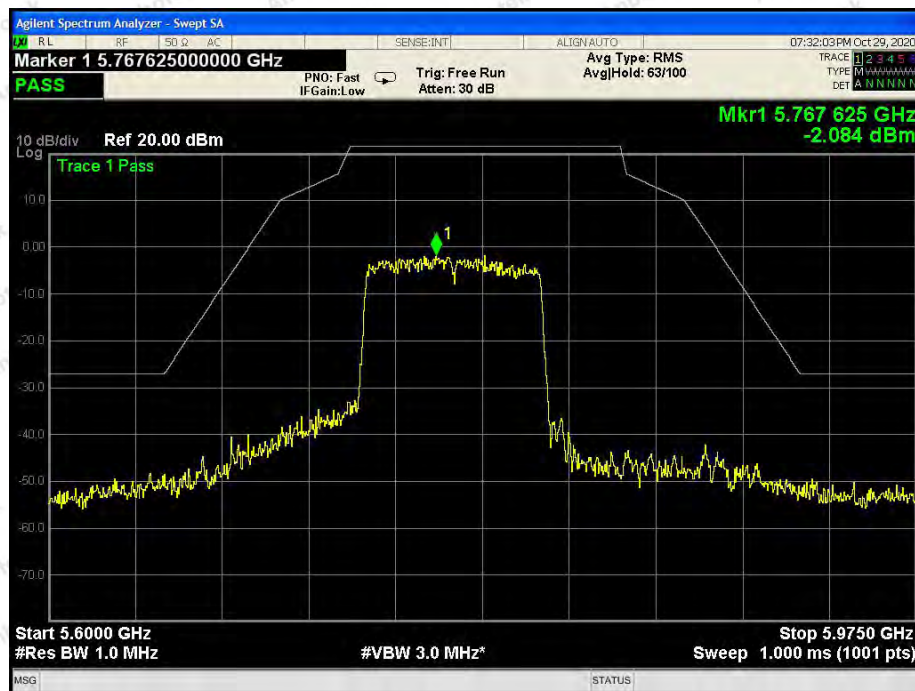

802.11ac(80): Band Edge

Test Results (Above 1000MHz)

ANT A+B:

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.40	31.98	17.08	33.91	56.55	68.20	-11.65	V
17235.00	41.61	32.65	20.03	34.85	59.44	68.20	-8.76	V
11490.00	39.47	31.98	17.08	33.91	54.62	68.20	-13.58	H
17235.00	40.76	32.65	20.03	34.85	58.59	68.20	-9.61	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	27.90	31.98	17.08	33.91	43.05	54.00	-10.95	V
17235.00	27.68	32.65	20.03	34.85	45.51	54.00	-8.49	V
11490.00	28.13	31.98	17.08	33.91	43.28	54.00	-10.72	H
17235.00	28.75	32.65	20.03	34.85	46.58	54.00	-7.42	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	41.56	32.44	17.18	33.91	57.27	68.20	-10.93	V
17355.00	40.97	32.78	20.12	34.86	59.01	68.20	-9.19	V
11570.00	39.98	32.44	17.18	33.91	55.69	68.20	-12.51	H
17355.00	40.58	32.78	20.12	34.86	58.62	68.20	-9.58	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	27.50	32.44	17.18	33.91	43.21	54.00	-10.79	V
17355.00	27.90	32.78	20.12	34.86	45.94	54.00	-8.06	V
11570.00	29.69	32.44	17.18	33.91	45.40	54.00	-8.60	H
17355.00	29.46	32.78	20.12	34.86	47.50	54.00	-6.50	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	41.39	32.59	18.02	33.92	58.08	68.20	-10.12	V
17475.00	39.10	32.87	20.15	34.88	57.24	68.20	-10.96	V
11650.00	41.79	32.59	18.02	33.92	58.48	68.20	-9.72	H
17475.00	40.31	32.87	20.15	34.88	58.45	68.20	-9.75	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	29.41	32.59	18.02	33.92	46.10	54.00	-7.90	V
17475.00	27.27	32.87	20.15	34.88	45.41	54.00	-8.59	V
11650.00	29.52	32.59	18.02	33.92	46.21	54.00	-7.79	H
17475.00	29.34	32.87	20.15	34.88	47.48	54.00	-6.52	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.34	31.98	17.08	33.91	56.49	68.20	-11.71	V
17235.00	40.95	32.65	20.03	34.85	58.78	68.20	-9.42	V
11490.00	40.59	31.98	17.08	33.91	55.74	68.20	-12.46	H
17235.00	41.71	32.65	20.03	34.85	59.54	68.20	-8.66	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.93	31.98	17.08	33.91	45.08	54.00	-8.92	V
17235.00	29.27	32.65	20.03	34.85	47.10	54.00	-6.90	V
11490.00	27.28	31.98	17.08	33.91	42.43	54.00	-11.57	H
17235.00	29.41	32.65	20.03	34.85	47.24	54.00	-6.76	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	41.12	32.44	17.18	33.91	56.83	68.20	-11.37	V
17355.00	41.06	32.78	20.12	34.86	59.10	68.20	-9.10	V
11570.00	40.39	32.44	17.18	33.91	56.10	68.20	-12.10	H
17355.00	41.27	32.78	20.12	34.86	59.31	68.20	-8.89	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.09	32.44	17.18	33.91	44.80	54.00	-9.20	V
17355.00	29.52	32.78	20.12	34.86	47.56	54.00	-6.44	V
11570.00	27.52	32.44	17.18	33.91	43.23	54.00	-10.77	H
17355.00	29.57	32.78	20.12	34.86	47.61	54.00	-6.39	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	40.92	32.59	18.02	33.92	57.61	68.20	-10.59	V
17475.00	39.65	32.87	20.15	34.88	57.79	68.20	-10.41	V
11650.00	39.77	32.59	18.02	33.92	56.46	68.20	-11.74	H
17475.00	40.54	32.87	20.15	34.88	58.68	68.20	-9.52	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	28.26	32.59	18.02	33.92	44.95	54.00	-9.05	V
17475.00	28.38	32.87	20.15	34.88	46.52	54.00	-7.48	V
11650.00	29.77	32.59	18.02	33.92	46.46	54.00	-7.54	H
17475.00	28.82	32.87	20.15	34.88	46.96	54.00	-7.04	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	40.22	31.98	17.08	33.91	55.37	68.20	-12.83	V
17265.00	40.46	32.65	20.03	34.85	58.29	68.20	-9.91	V
11510.00	40.62	31.98	17.08	33.91	55.77	68.20	-12.43	H
17265.00	42.00	32.65	20.03	34.85	59.83	68.20	-8.37	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	28.79	31.98	17.08	33.91	43.94	54.00	-10.06	V
17265.00	28.39	32.65	20.03	34.85	46.22	54.00	-7.78	V
11510.00	28.03	31.98	17.08	33.91	43.18	54.00	-10.82	H
17265.00	29.76	32.65	20.03	34.85	47.59	54.00	-6.41	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	40.50	32.59	18.02	33.92	57.19	68.20	-11.01	V
17385.00	41.60	32.87	20.15	34.88	59.74	68.20	-8.46	V
11590.00	39.80	32.59	18.02	33.92	56.49	68.20	-11.71	H
17385.00	39.20	32.87	20.15	34.88	57.34	68.20	-10.86	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	28.24	32.59	18.02	33.92	44.93	54.00	-9.07	V
17385.00	29.27	32.87	20.15	34.88	47.41	54.00	-6.59	V
11590.00	28.25	32.59	18.02	33.92	44.94	54.00	-9.06	H
17385.00	29.85	32.78	20.12	34.86	47.89	54.00	-6.11	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	41.83	31.98	17.08	33.91	56.98	68.20	-11.22	V
17265.00	41.28	32.65	20.03	34.85	59.11	68.20	-9.09	V
11510.00	41.73	31.98	17.08	33.91	56.88	68.20	-11.32	H
17265.00	41.06	32.65	20.03	34.85	58.89	68.20	-9.31	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	29.72	31.98	17.08	33.91	44.87	54.00	-9.13	V
17265.00	29.28	32.65	20.03	34.85	47.11	54.00	-6.89	V
11510.00	27.22	31.98	17.08	33.91	42.37	54.00	-11.63	H
17265.00	27.03	32.65	20.03	34.85	44.86	54.00	-9.14	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	40.14	32.59	18.02	33.92	56.83	68.20	-11.37	V
17385.00	41.48	32.87	20.15	34.88	59.62	68.20	-8.58	V
11590.00	39.61	32.59	18.02	33.92	56.30	68.20	-11.90	H
17385.00	41.54	32.87	20.15	34.88	59.68	68.20	-8.52	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	29.50	32.59	18.02	33.92	46.19	54.00	-7.81	V
17385.00	29.45	32.87	20.15	34.88	47.59	54.00	-6.41	V
11590.00	27.60	32.59	18.02	33.92	44.29	54.00	-9.71	H
17385.00	29.79	32.78	20.12	34.86	47.83	54.00	-6.17	H

Test mode:	IEEE 802.11ac(HT80)	Test channel:	
------------	---------------------	---------------	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11550.00	41.36	32.44	17.18	33.91	57.07	68.20	-11.13	V
17325.00	41.40	32.78	20.12	34.86	59.44	68.20	-8.76	V
11550.00	40.65	32.44	17.18	33.91	56.36	68.20	-11.84	H
17325.00	40.45	32.78	20.12	34.86	58.49	68.20	-9.71	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11550.00	28.70	32.44	17.18	33.91	44.41	54.00	-9.59	V
17325.00	28.86	32.78	20.12	34.86	46.90	54.00	-7.10	V
11550.00	29.86	32.44	17.18	33.91	45.57	54.00	-8.43	H
17325.00	28.30	32.78	20.12	34.86	46.34	54.00	-7.66	H

Note:


1. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30dBm

5.2. Test Setup

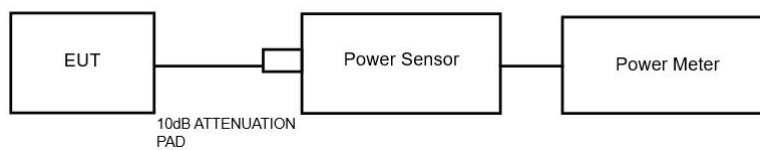

5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Test Item	:	Max. peak output power
Test Voltage	:	DC 7.4V Battery inside
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	24℃
Humidity	:	55%RH

ANT A:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	15.73	30	PASS
	5785	14.69	30	PASS
	5825	15.51	30	PASS
802.11n20	5745	13.08	30	PASS
	5785	15.01	30	PASS
	5825	15.40	30	PASS
802.11ac20	5745	13.15	30	PASS
	5785	15.17	30	PASS
	5825	15.40	30	PASS
802.11n40	5755	15.83	30	PASS
	5795	15.17	30	PASS
802.11ac40	5755	16.10	30	PASS
	5795	15.03	30	PASS
802.11ac80	5775	15.64	30	PASS



ANT B:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	14.73	30	PASS
	5785	14.53	30	PASS
	5825	15.51	30	PASS
802.11n20	5745	13.58	30	PASS
	5785	15.01	30	PASS
	5825	15.40	30	PASS
802.11ac20	5745	15.73	30	PASS
	5785	15.17	30	PASS
	5825	15.40	30	PASS
802.11n40	5755	15.80	30	PASS
	5795	15.15	30	PASS
802.11ac40	5755	16.11	30	PASS
	5795	15.05	30	PASS
802.11ac80	5775	15.68	30	PASS

ANT A+B:


Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11n20	5745	16.35	30	PASS
	5785	18.02	30	PASS
	5825	18.41	30	PASS
802.11ac20	5745	17.64	30	PASS
	5785	18.18	30	PASS
	5825	18.41	30	PASS
802.11n40	5755	18.84	30	PASS
	5795	18.18	30	PASS
802.11ac40	5755	19.11	30	PASS
	5795	18.04	30	PASS
802.11ac80	5775	18.65	30	PASS

6. Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)&15.407(e)
---------------	--

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;

Set the VBW > RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

6 dB bandwidth

RBW = 100kHz;

Set the video bandwidth (VBW) ≥ 3 RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.

5. Repeat until all the rest channels are investigated.

6.4. Test Data

Report No.: 18220WC00155603

FCC ID: 2AXZ3-EAGLE

Page 51 of 100

Test Item : 6dB &26dB BW
 Test Voltage : DC 7.4V Battery inside
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 24℃
 Humidity : 55%RH

Mode	Channel Frequency (MHz)	6dB BW(MHz)		Limit	Results
		ANT A	ANT B		
802.11a	5745	16.35	16.35	>0.5MHz	PASS
	5785	16.34	16.34		PASS
	5825	16.32	16.32		PASS
802.11n20	5745	15.74	15.74		PASS
	5785	17.03	17.03		PASS
	5825	17.60	17.60		PASS
802.11ac20	5745	17.07	17.07		PASS
	5785	17.56	17.56		PASS
	5825	17.06	17.06		PASS
802.11n40	5755	35.22	35.22		PASS
	5795	35.10	35.10		PASS
802.11ac40	5755	35.20	35.20		PASS
	5795	35.10	35.10		PASS
802.11ac80	5775	71.39	71.39		PASS

Mode	Channel Frequency (MHz)	26dB BW(MHz)		99% Bandwidth (MHz)	
		ANT A	ANT B	ANT A	ANT B
802.11a	5745	19.65	19.65	16.642	16.642
	5785	19.64	19.64	16.649	16.649
	5825	19.38	19.38	16.622	16.622
802.11n20	5745	19.94	19.94	17.611	17.611
	5785	19.94	19.94	17.610	17.610
	5825	19.98	19.98	17.640	17.640
802.11ac20	5745	19.98	19.90	17.620	17.632
	5785	19.90	20.06	17.632	17.631
	5825	20.06	19.98	17.631	17.620
802.11n40	5755	39.80	39.80	35.965	35.965
	5795	40.05	40.05	36.070	36.070
802.11ac40	5755	39.85	39.85	36.013	36.013
	5795	39.92	39.92	36.111	36.111
802.11ac80	5775	81.23	81.23	75.013	75.013



ANT A
6dB Bandwidth

Test Mode: 802.11a--Low



Test Mode: 802.11a---Middle





Test Mode: 802.11a---High



Test Mode: 802.11n20---Low



Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High



Test Mode: 802.11ac20--Low



Test Mode: 802.11ac20---Middle



Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low




Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low



Test Mode: 802.11ac40---High

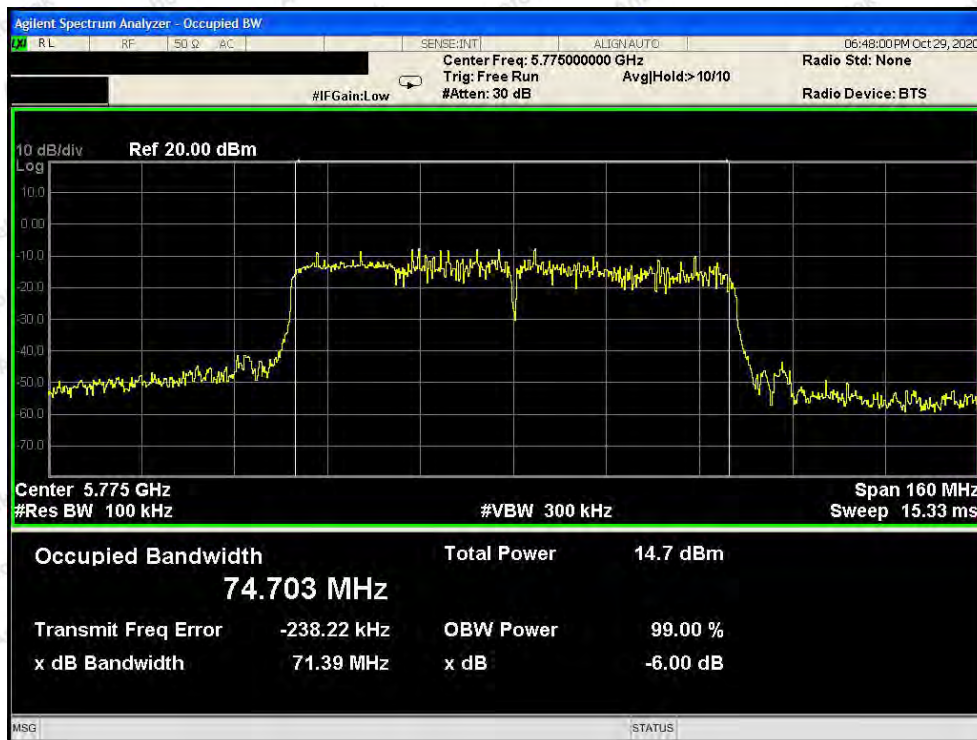

Test Mode: 802.11ac80



26dB & 99% Bandwidth



Test Mode: 802.11a--Low




Test Mode: 802.11a---Middle



Test Mode: 802.11a---High



Test Mode: 802.11n20---Low

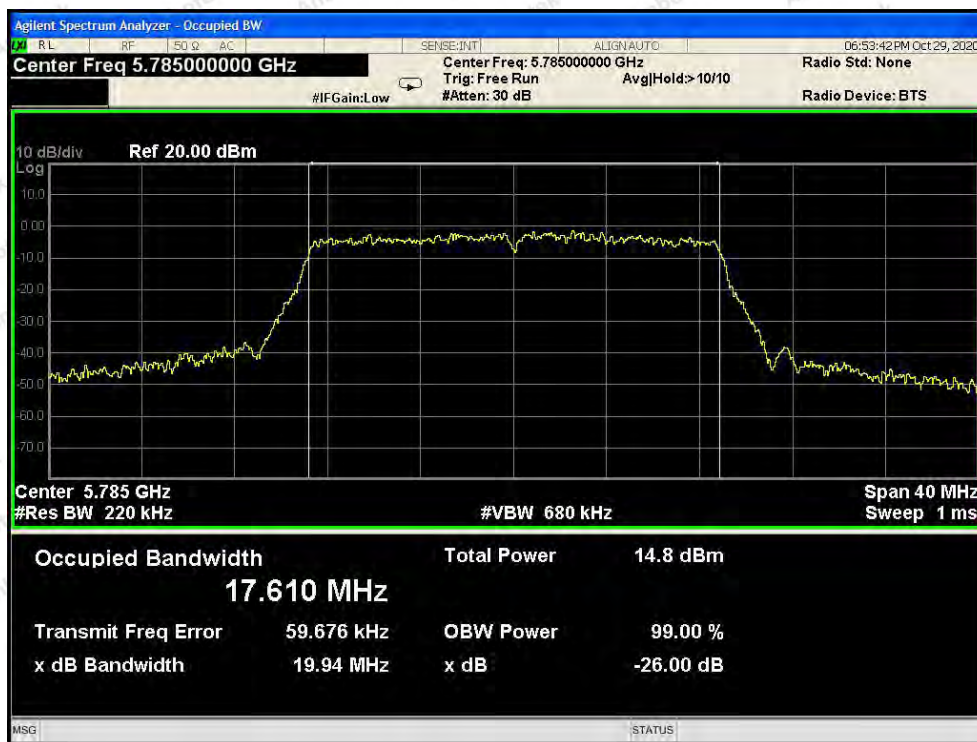

Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High



Test Mode: 802.11ac20--Low



Test Mode: 802.11ac20---Middle



Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low



Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low



Test Mode: 802.11ac40---High



Test Mode: 802.11ac80



ANT B
6dB Bandwidth

Test Mode: 802.11a--Low



Test Mode: 802.11a---Middle



Test Mode: 802.11a---High



Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High



Test Mode: 802.11ac20--Low

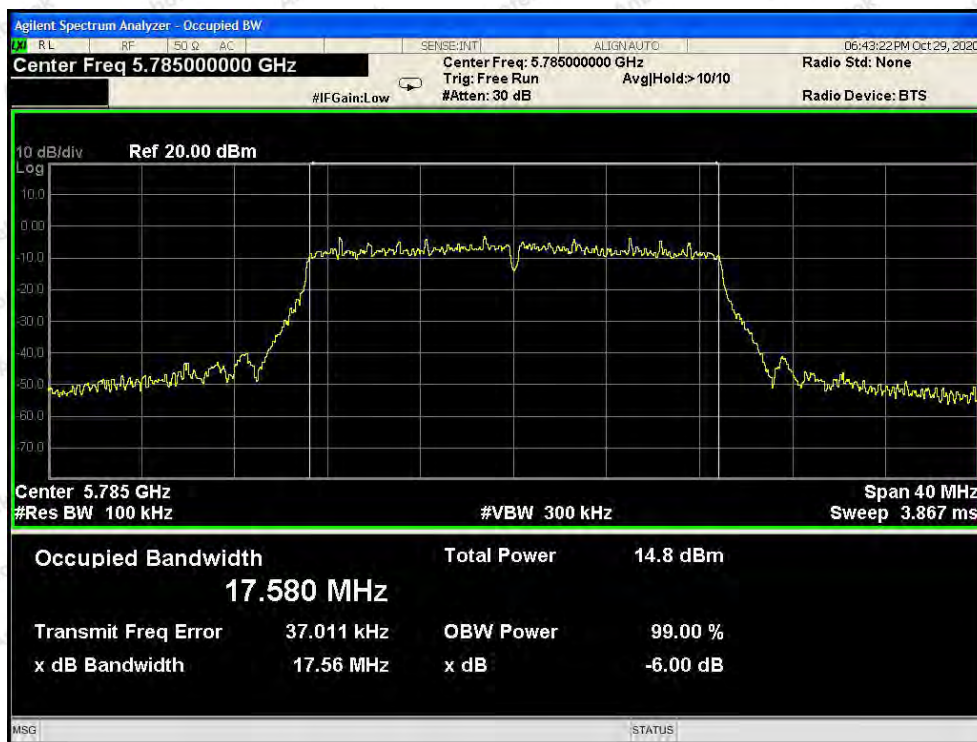

Test Mode: 802.11ac20---Middle



Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low




Test Mode: 802.11n40---High




Test Mode: 802.11ac40---Low



Test Mode: 802.11ac40---High

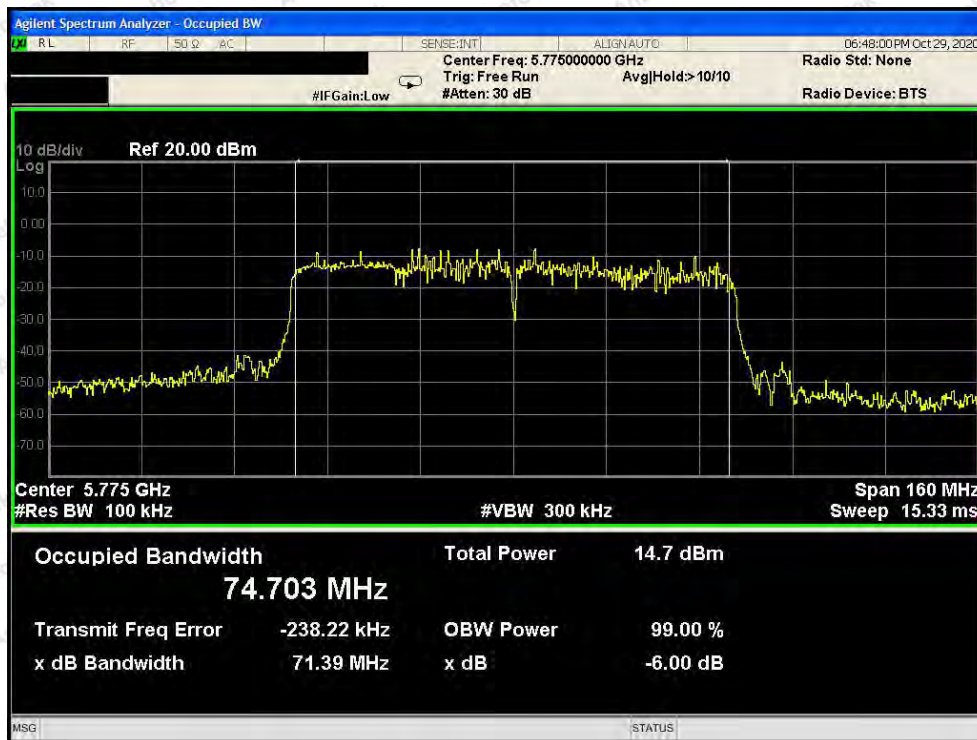

Test Mode: 802.11ac80

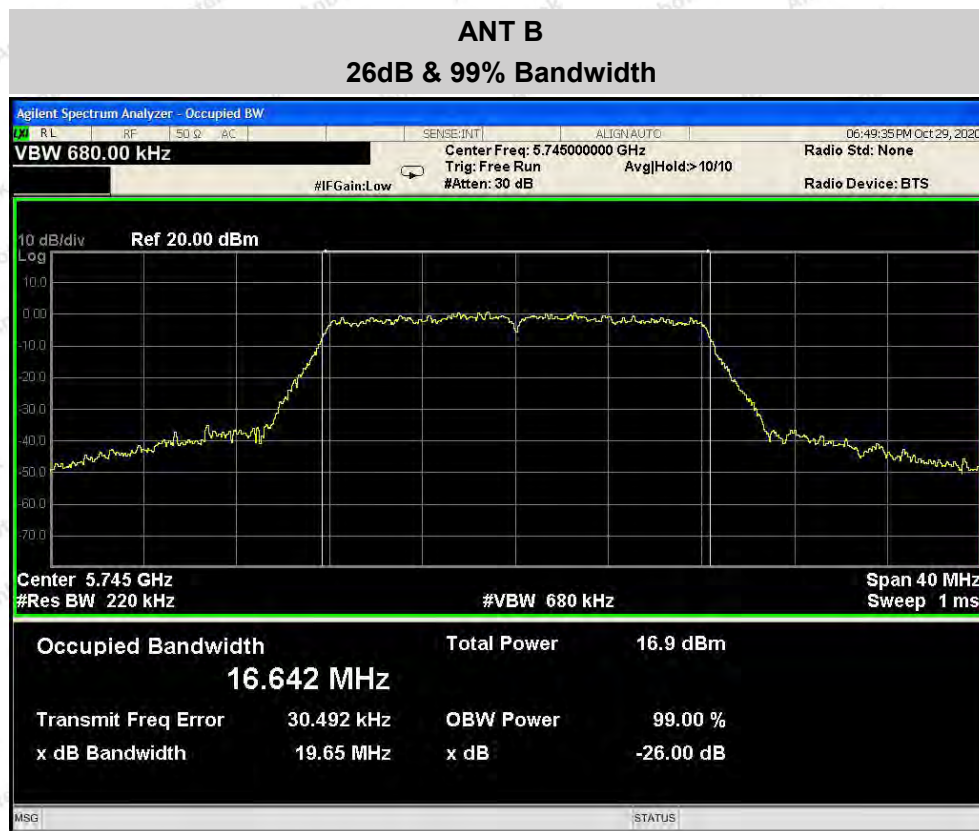

Test Mode: 802.11a--Low




Test Mode: 802.11a---Middle



Test Mode: 802.11a---High



Test Mode: 802.11n20---Low

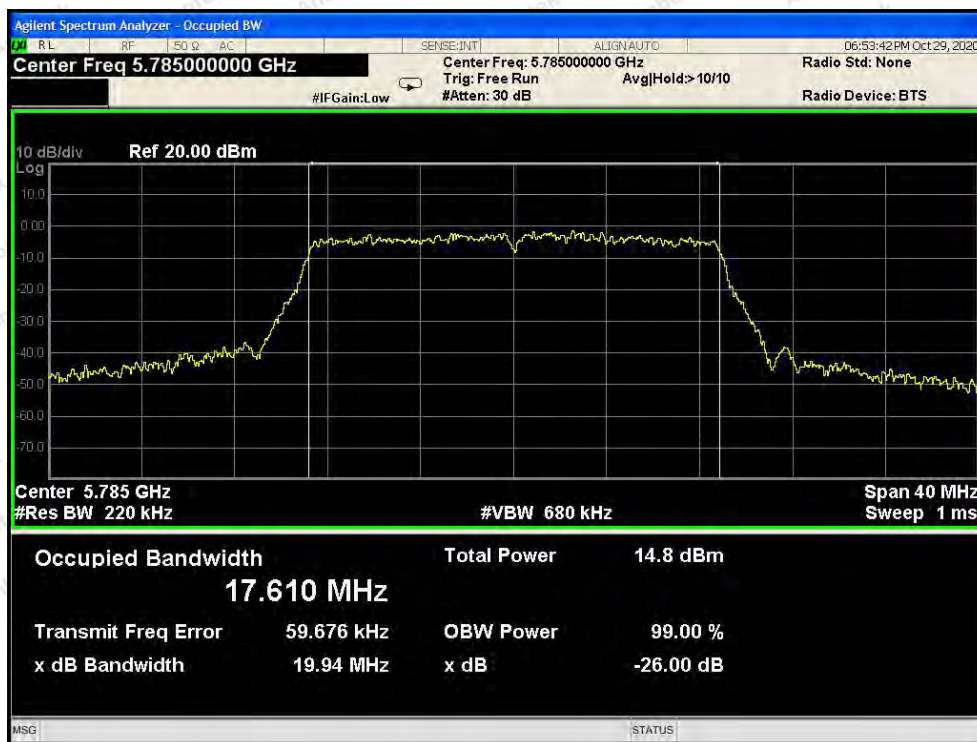

Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High



Test Mode: 802.11ac20--Low



Test Mode: 802.11ac20---Middle



Test Mode: 802.11ac20---High




Test Mode: 802.11n40---Low



Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low

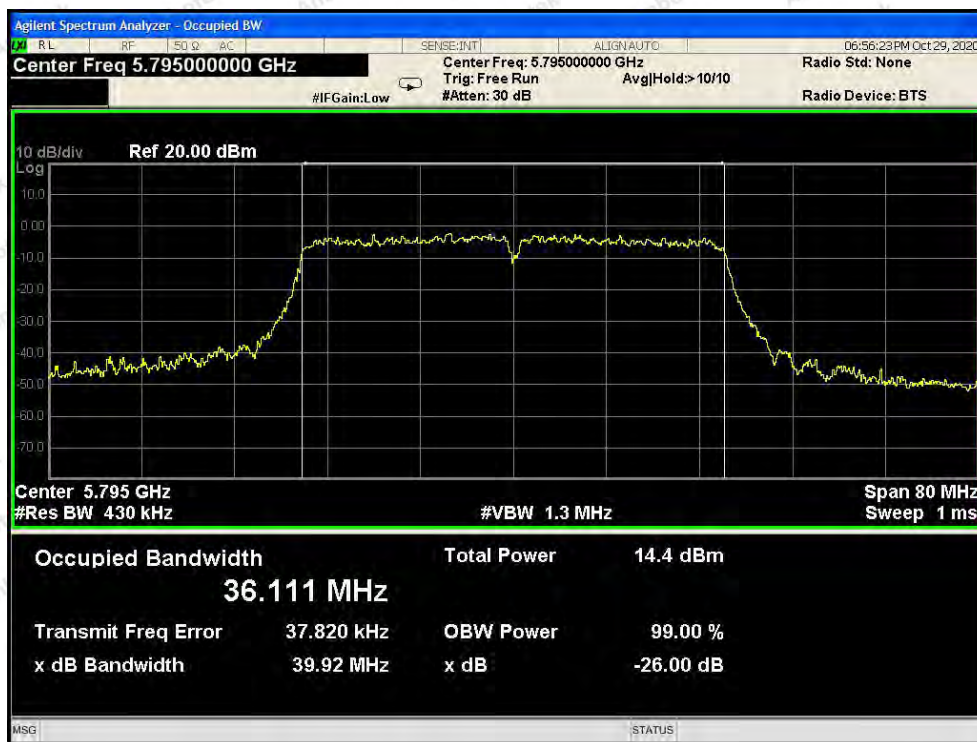

Test Mode: 802.11ac40---High




Test Mode: 802.11ac80

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30 dBm/500KHz

7.2. Test Setup



7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =510KHz;
3. Set VBW $\geq$ 3 RBW=2MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

7.4. Test Data

Test Item : Power Spectral Density
 Test Voltage : AC 240V, 60Hz for adapter
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 24℃
 Humidity : 55%RH

ANT A:

Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	2.818	2.732	30	PASS
	5785	1.756	1.670	30	PASS
	5825	4.425	4.339	30	PASS
802.11n20	5745	2.640	2.554	30	PASS
	5785	0.467	0.381	30	PASS
	5825	2.616	2.530	30	PASS
802.11ac20	5745	1.982	1.896	30	PASS
	5785	1.147	1.061	30	PASS
	5825	1.488	1.402	30	PASS
802.11n40	5755	-0.577	-0.663	30	PASS
	5795	-2.031	-2.117	30	PASS
802.11ac40	5755	0.374	0.288	30	PASS
	5795	-2.220	-2.306	30	PASS
802.11ac80	5775	-1.992	-2.078	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)

ANT B:

Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	3.483	3.397	30	PASS
	5785	2.070	1.984	30	PASS
	5825	4.301	4.215	30	PASS
802.11n20	5745	2.797	2.711	30	PASS
	5785	1.382	1.296	30	PASS
	5825	1.969	1.883	30	PASS
802.11ac20	5745	1.535	1.449	30	PASS
	5785	1.538	1.452	30	PASS
	5825	1.850	1.764	30	PASS
802.11n40	5755	-0.433	-0.519	30	PASS
	5795	-1.163	-1.249	30	PASS
802.11ac40	5755	0.157	0.071	30	PASS
	5795	-1.405	-1.491	30	PASS
802.11ac80	5775	-2.045	-2.131	30	PASS


Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)

ANT A+B:


Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11n20	5745	5.730	5.644	30	PASS
	5785	3.959	3.873	30	PASS
	5825	5.315	5.229	30	PASS
802.11ac20	5745	4.775	4.689	30	PASS
	5785	4.357	4.271	30	PASS
	5825	4.683	4.597	30	PASS
802.11n40	5755	2.506	2.420	30	PASS
	5795	1.435	1.349	30	PASS
802.11ac40	5755	3.277	3.191	30	PASS
	5795	1.217	1.131	30	PASS
802.11ac80	5775	0.992	0.906	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)




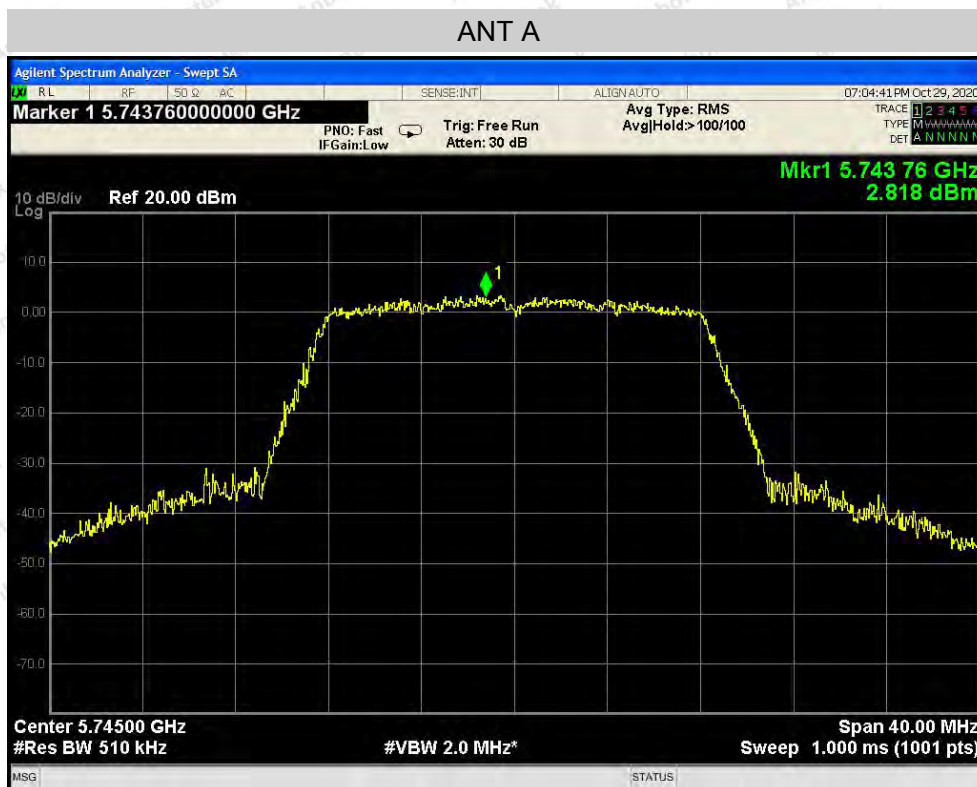

Test Mode: 802.11a--Low

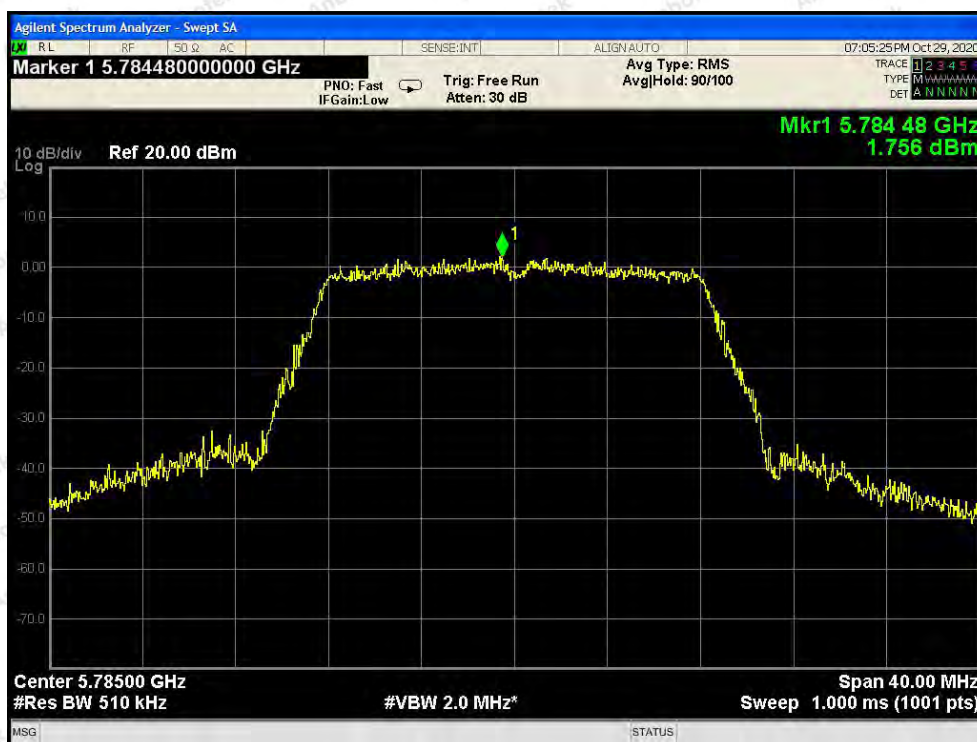

Test Mode: 802.11a---Middle

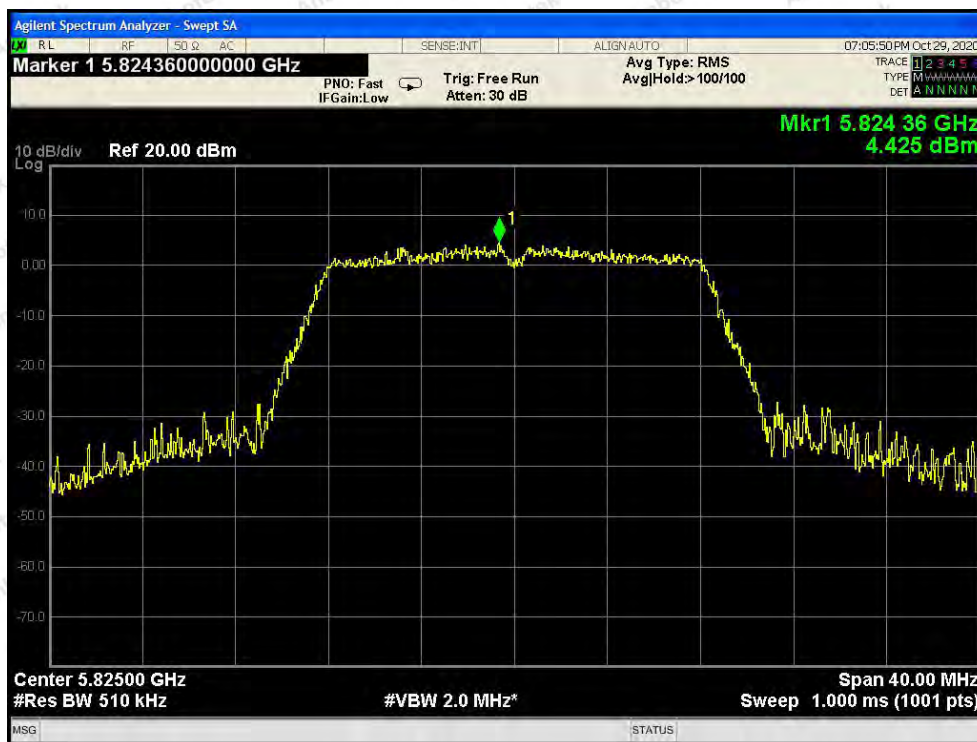

Test Mode: 802.11a---High




Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High

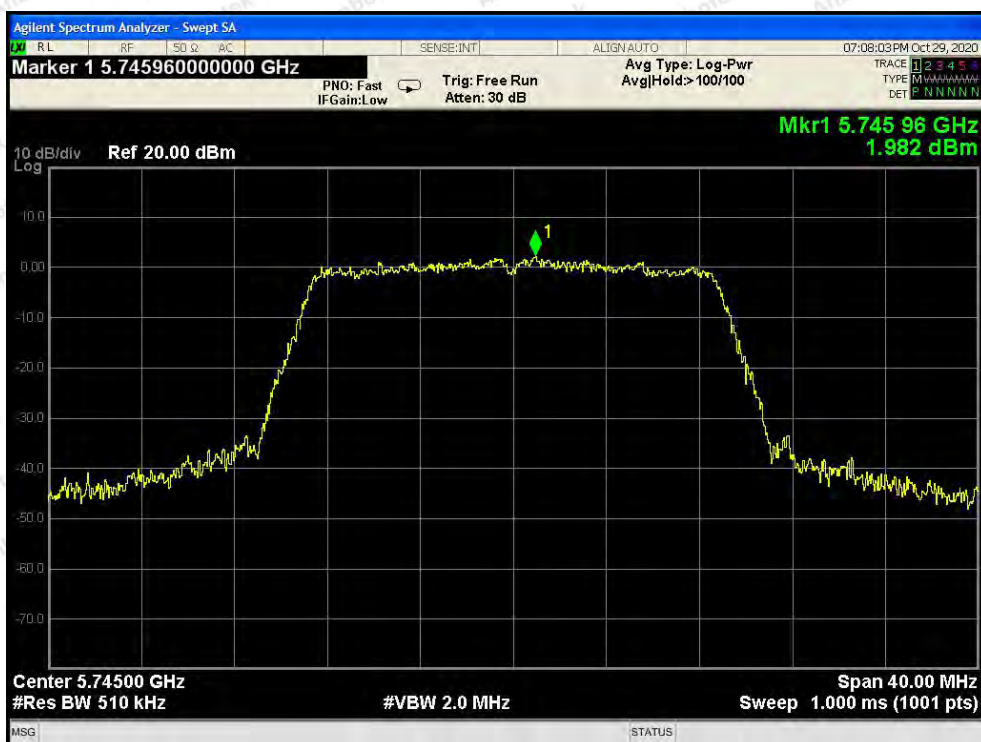

Test Mode: 802.11ac20--Low

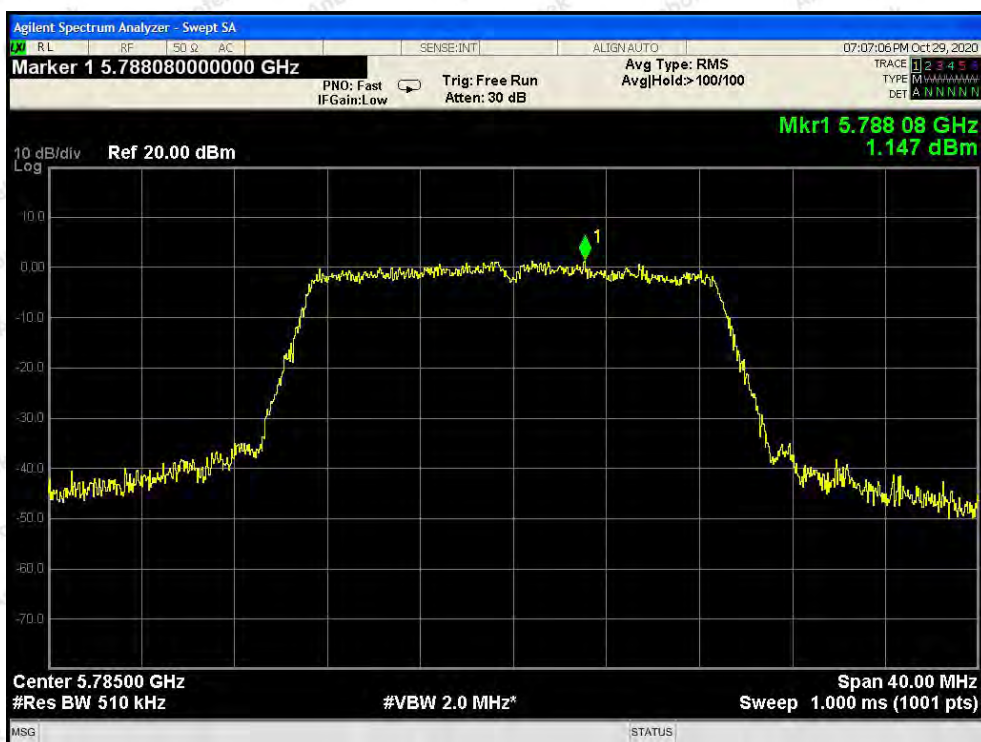

Test Mode: 802.11ac20---Middle

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com


Code:AB-RF-05-a



Hotline

400-003-0500

www.anbotek.com

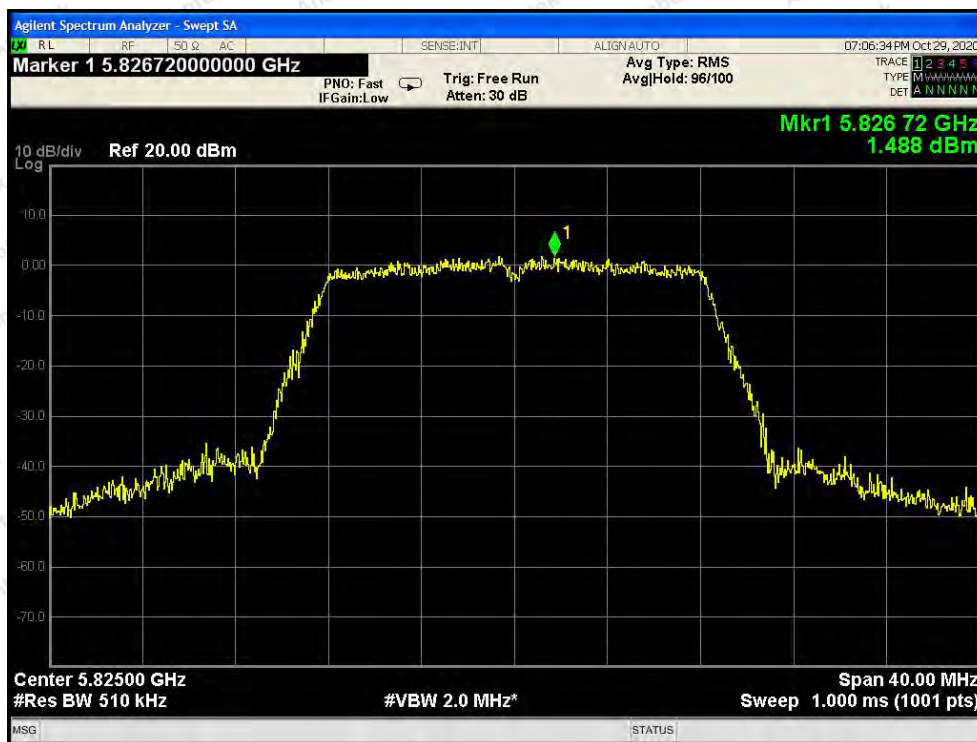

Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low



Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low



Test Mode: 802.11ac40---High



Test Mode: 802.11ac80



Test Mode: 802.11a--Low



Test Mode: 802.11a---Middle



Test Mode: 802.11a---High



Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle




Test Mode: 802.11n20---High



Test Mode: 802.11ac20--Low

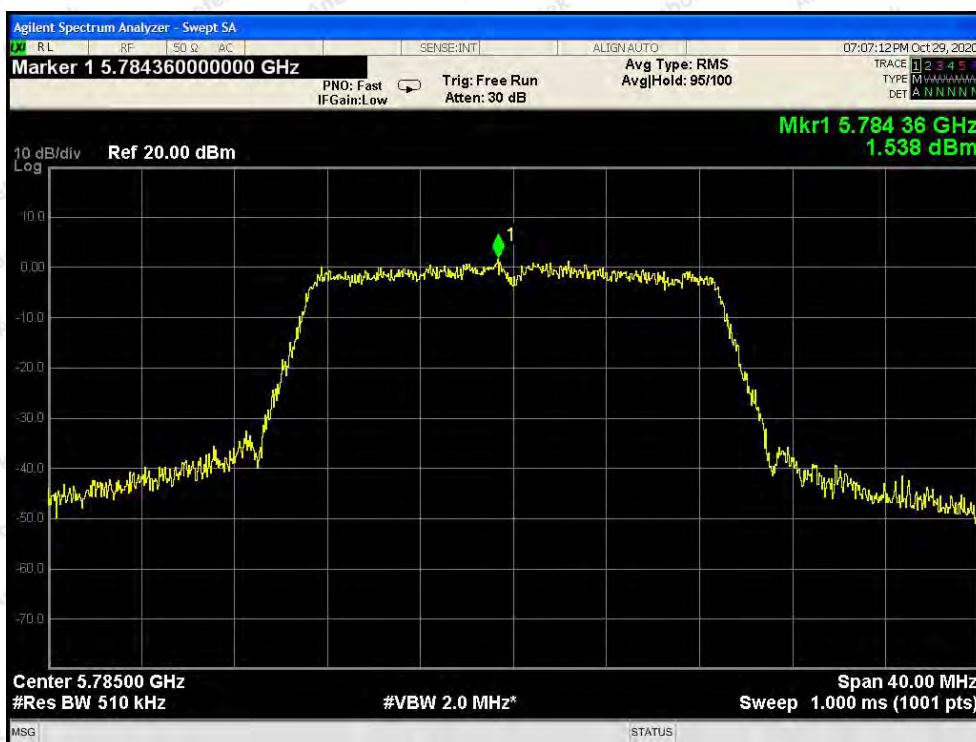

Test Mode: 802.11ac20---Middle

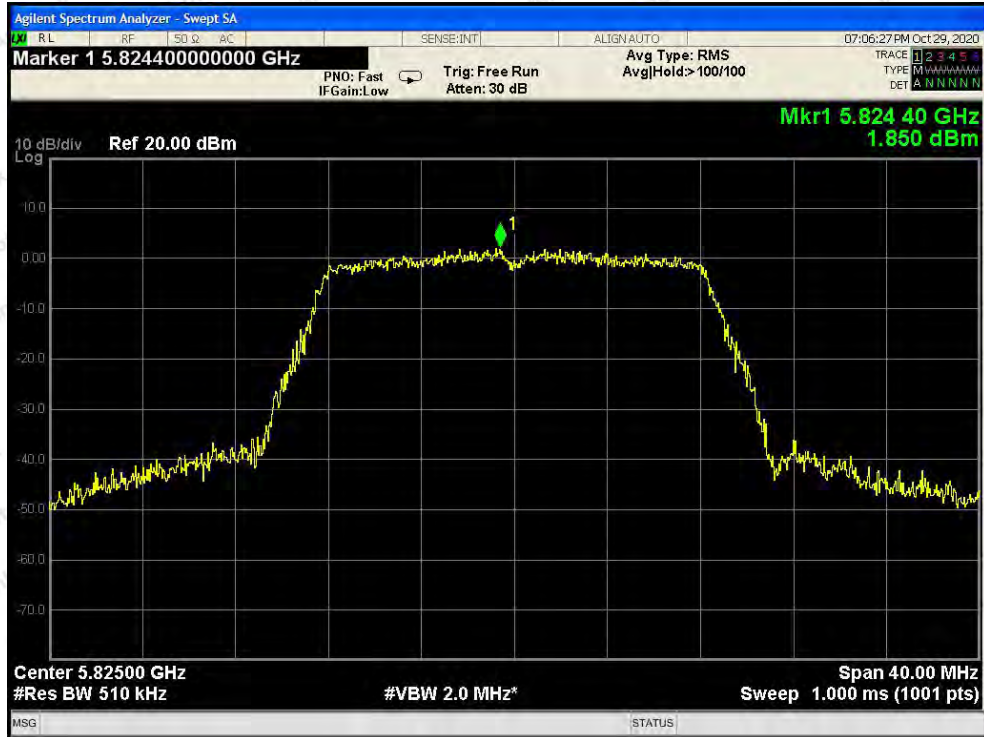

Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low




Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low



Test Mode: 802.11ac40---High

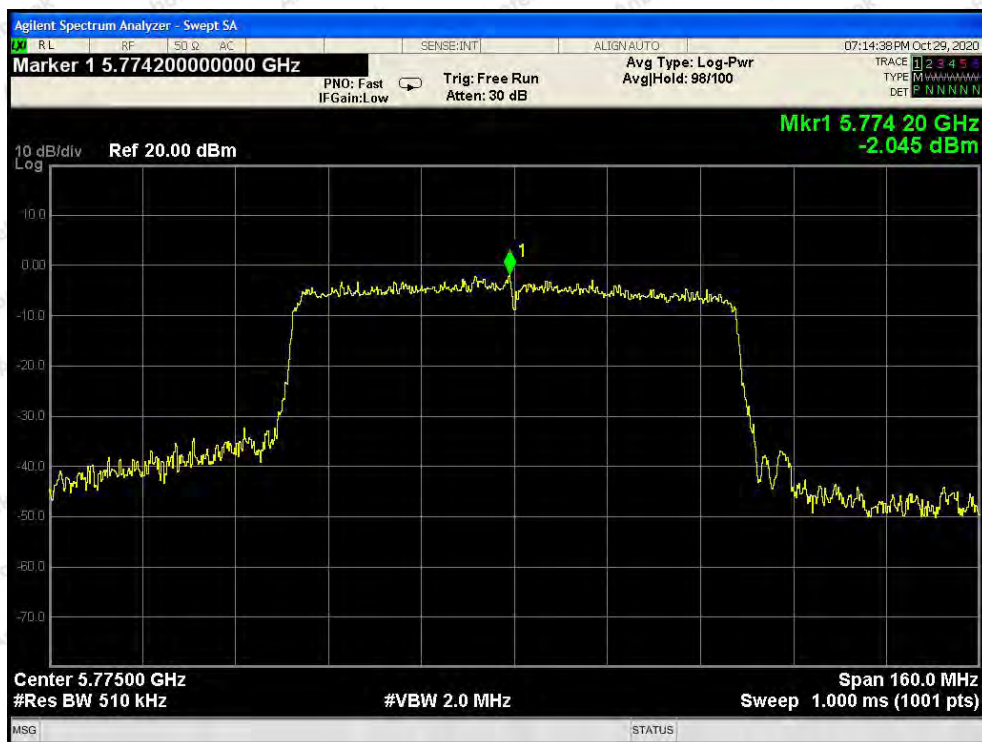

Test Mode: 802.11ac80

8. Antenna Requirement

8.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2. Antenna Connected Construction

The antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is 2dBi. It complies with the standard requirement.

9. Frequency Stability

According to the manufacturer, under any normal operating conditions, the working frequency of the product is in the range of 5725-5850MHz.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files for Test Setup Photos of the EUT.

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files for External Photos of the EUT.

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files for Internal Photos of the EUT.

----- End of Report -----

