

### **PCTEST**

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



# **HEARING AID COMPATIBILITY**

**Applicant Name:** 

LG Electronics U.S.A, Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States Date of Testing: 3/16/2020 - 3/31/2020 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2002250026-10-R1.ZNF Date of Issue: 4/10/2020

FCC ID: ZNFK300TM

APPLICANT: LG ELECTRONICS U.S.A, INC.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

**DUT Type:** Portable Handset **Model:** LM-K300TM

Additional Model(s): LM-K300TMS, LM-K300MM, LMK300TM, LMK300TMS,

LMK300MM, K300TM, K300TMS, K300MM

**Test Device Serial No.:** Pre-Production Sample [S/N: 10268]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M2002250026-10-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 1 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 1 01 95

# TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	18
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	22
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	25
8.	FCC 3G MEASUREMENTS	28
9.	T-COIL TEST SUMMARY	30
10.	MEASUREMENT UNCERTAINTY	43
11.	EQUIPMENT LIST	44
12.	TEST DATA	45
13.	CALIBRATION CERTIFICATES	76
14.	CONCLUSION	90
15.	REFERENCES	91
16.	TEST SETUP PHOTOGRAPHS	93

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 2 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 2 01 95

## 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

## **Compatibility Tests Involved:**

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

<sup>&</sup>lt;sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFK300TM	PCTEST Proof to the post of a comment	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 3 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		1 age 5 01 95

© 2020 PCTEST REV 3.1

#### 2. **DUT DESCRIPTION**



FCC ID: ZNFK300TM

Applicant: LG Electronics U.S.A, Inc.

1000 Sylvan Avenue

Englewood Cliffs, NJ 07632

**United States** 

Model: LM-K300TM

LM-K300TMS, LM-K300MM, LMK300TM, LMK300TMS, Additional Model(s):

LMK300MM, K300TM, K300TMS, K300MM

Serial Number: 10268 HW Version: **TBD** SW Version: **TBD** 

Antenna: Internal Antenna DUT Type: Portable Handset

### LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B25 & B2, B26 & B5, and B66 & B4. These pairs of LTE bands have the same target powers and share the same transmission paths. Since the supported frequency span for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B25, B26, and B66) were evaluated for hearing-aid compliance.

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 4 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 4 01 95

## Table 2-1 ZNFK300TM HAC Air Interfaces

				1 1000 HVI HVO 7 III HILCHAO		
Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated
	835	1/0	V	Vers MIEL en DT	CMDC V-11	EVRC
CDMA	1900	VO	Yes	Yes: WIFI or BT	CMRS Voice <sup>1</sup>	EVKC
	EvDO	VD	Yes	Yes: WIFI or BT	Google Duo <sup>2</sup>	OPUS
	850	vo	Yes	Yes: WIFI or BT	CMRS Voice <sup>1</sup>	EFR
GSM	1900	VO	res	res. Wiri of B1	CIVINS VOICE	LFN
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo <sup>2</sup>	OPUS
	850					
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice <sup>1</sup>	NB AMR
OWITS	1900					
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo <sup>2</sup>	OPUS
	680 (B71)		Yes <sup>3</sup>			
	700 (B12)					
	780 (B13)					
	850 (B5)					VoltE: NB AMR, WB AMR, EVS Google Duo: OPUS
LTE (FDD)	850 (B26)	VD	Yes	Yes: WIFI or BT	VoLTE <sup>1</sup> , Google Duo <sup>2</sup>	
	1700 (B4)		163			
	1700 (B66)					
	1900 (B2)					
	1900 (B25)					
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE <sup>1</sup> , Google Duo <sup>2</sup>	Volte: NB AMR, WB AMR, EVS Google Duo: OPUS
	2450					
	5200 (U-NII 1)					
WIFI	5300 (U-NII 2A)	VD	Yes	Yes: CDMA, GSM, UMTS, or LTE VoWIFI², Google Duo²	VoWIFI: NB AMR, WB AMR, EVS Google Duo: OPUS	
	5500 (U-NII 2C)					Google Duo. OFO3
	5800 (U-NII 3)					
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, or LTE	N/A	N/A
			2. Reference le 3. LTE B71, wh	evel in accordance with 7.4.2.1 of ANSI C63.19-20. evel is -20dBm0 in accordance with FCC KDB 2850 ile outside the scope of ANSI C63.19 and FCC HAI th currently available test equipment	76 D02	

procedures with currently available test equipment.

FCC ID: ZNFK300TM	PCTEST* Proud to be post of ® element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga F of OF
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 5 of 95
© 2020 PCTEST				REV 3.5.M

## 3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

## I. MAGNETIC COUPLING

## **Axial and Radial Field Intensity**

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be  $\geq$  -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

## **Frequency Response**

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.


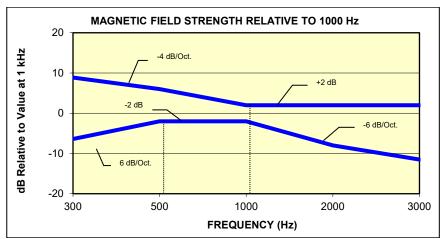


Figure 3-1
Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

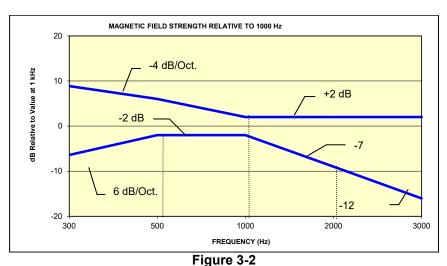

Magnetic Field frequency response for wireless devices with an axial field that exceeds
-15 dB(A/m) at 1 kHz

FCC ID: ZNFK300TM	PCTEST* Proud to be post of @ connect	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 6 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 0 01 95

## **Signal Quality**

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Catagony	Telephone RF Parameters		
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]		
T1	0 to 10 dB		
T2	10 to 20 dB		
Т3	20 to 30 dB		
T4	> 30 dB		
Table 3-1  Magnetic Coupling Parameters			

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFK300TM	PCTEST* Proud to be past of @ steemed	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 7 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 7 01 95

# 4. METHOD OF MEASUREMENT

# I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

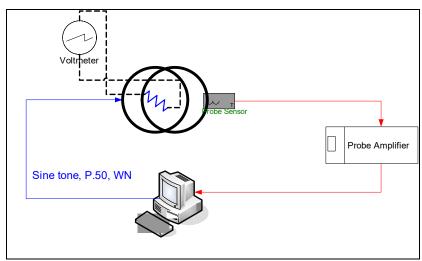


Figure 4-1 Validation Setup with Helmholtz Coil

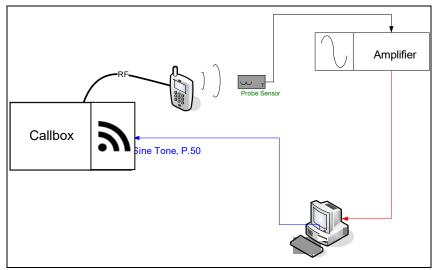


Figure 4-2 T-Coil Test Setup

FCC ID: ZNFK300TM	PCTEST* Proud to be past of @ steemed	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 8 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage o oi 95

## II. Scanning Mechanism

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm

Maximum speed 6.1 cm/sec
Line Voltage: 115 VAC
Line Frequency: 60 Hz


Material Composite: Delrin (Acetal)

Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

Dimensions: 36" x 25" x 38" Operating Area: 36" x 49" x 55"

Reflections: < -20 dB (in anechoic chamber)



**Figure 4-3** RF Near-Field Scanner

## III. ITU-T P.50 Artificial Voice

Manufacturer: ITU-T

Active Frequency Range: 100 Hz – 8 kHz

Stimulus Type: Male and Female, no spaces

Single Sample 20.96 seconds

Duration:

Activity Level: 100%




Figure 4-4
Spectral Characteristic of full P.50





Figure 4-5
Temporal Characteristic of full P.50

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 9 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 9 01 95



ABM2 Measurement Block Diagram:



Figure 4-6 Magnetic Measurement Processing Steps

#### IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
  - a. Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
  - "A-weighting" and Half-Band Integration was applied to the measurements.
  - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
  - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
  - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H<sub>c</sub> = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil (SN: 925), N=20; r=0.08m; R=10.2Ω and using V=18mV:

$$H_c = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

For the Helmholtz Coil (SN: SBI 1052), N=20; r=0.13m; R=10.193Ω and using V=29mV:

$$H_c = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

FCC ID: ZNFK300TM	PCTEST Proud to be post of ® clement	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 10 01 95

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor for HH coil SN: SBI 1052 and 18mV was observed across the resistor for HH coil SN: 925. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 41).

Frequency Response Validation The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the P.50 signal as shown below:



Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz - 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

> Table 4-1 **ABM2 Frequency Response Validation**

	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 11 of 05
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 11 of 95




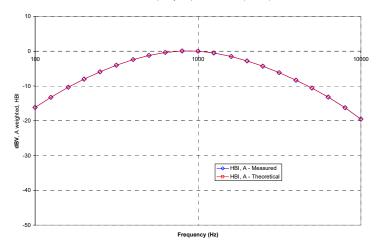


Figure 4-8
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2
ABM2 Power Sum Validation

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: ZNFK300TM	PCTEST* Proud to be port of the elements	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 12 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 12 01 95

© 2020 PCTEST REV 3.5.M





Figure 4-10 **ABM2 Power Sum Validation** 

### 3. Measurement Test Setup

- a. Fine scan above the WD (TEM)
  - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

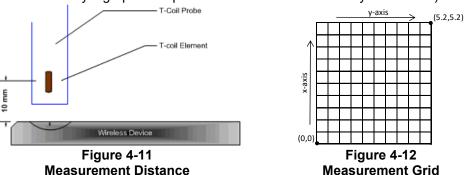

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-14 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
  - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN <sup>TM</sup>	TDMA (22 and 11 Hz)	-18

FCC ID: ZNFK300TM	PCTEST* Proud to be part of @ element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 13 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 13 01 93

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- iii. See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
  - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
  - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 8 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 5 and 7. configuration information can be found in Section 6 and 7.)
  - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
  - a. Narrow-band Magnetic Intensity
    - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
  - b. Frequency Response
    - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
    - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
    - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
  - c. Signal Quality Index
    - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
    - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
    - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: ZNFK300TM	PCTEST* Proud to be part of @ element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 14 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 14 01 95

## V. Test Setup




Figure 4-13
Audio Magnetic Field Test Setup

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

## VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

# VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 15 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 15 01 95

© 2020 PCTEST REV 3

## VIII. Wireless Device Channels and Frequencies

### 1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes.

Table 4-3
Center Channels and Frequencies

Center Chamile's and Frequencies					
Test frequencies & associated channels					
Channel	Frequency (MHz)				
Secondary Cellular 8	20				
564 (CDMA)	820.10				
Cellular 850					
384 (CDMA)	836.52				
190 (GSM)	836.60				
4183 (UMTS)	836.60				
AWS 1750					
1412 (UMTS)	1730.40				
PCS 1900	PCS 1900				
600 (CDMA)	1880				
661 (GSM)	1880				
9400 (UMTS)	1880				

## 2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD. The middle channel and supported bandwidths from the worst-case bands according to Table 7-6 and 7-7 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-5 to 9-12 and 9-20 to 9-21 for LTE bandwidths and channels.

### 3. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. The 5GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested on higher U-NII bands as well as applicable low and high channels. See Tables 9-13 to 9-16 and 9-22 to 9-25 for WIFI standards and channels.

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ minuted	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 16 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 10 01 95

## IX. Test Flow

The flow diagram below was followed (From C63.19):

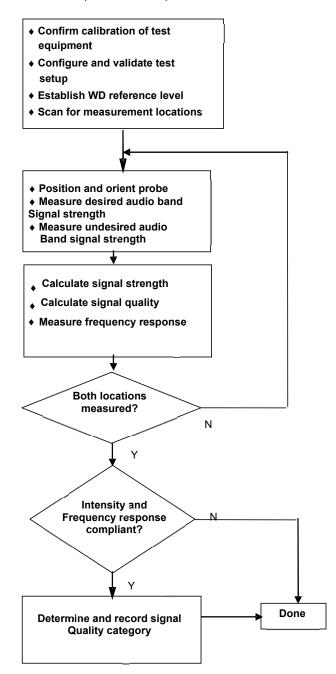


Figure 4-14 C63.19 T-Coil Signal Test Process

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 17 01 95

© 2020 PCTEST REV 3.5.M 3/2/2020

#### 5. **VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION**

#### I. Test System Setup for VoLTE over IMS T-coil Testing

## 1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

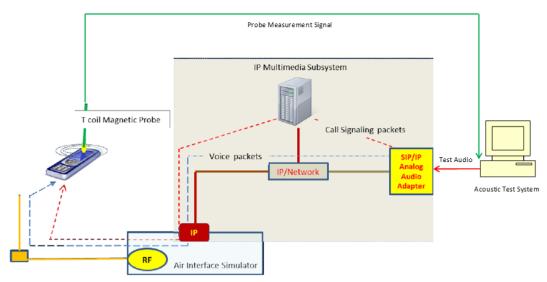


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

## 2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level\*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

\* http://c63.org/documents/misc/posting/new\_interpretations.htm

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	HAC (T-COIL) TEST REPORT	
Filename:	Test Dates:	DUT Type:		Page 18 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 16 01 95

© 2020 PCTEST 3/2/2020

## II. DUT Configuration for VoLTE over IMS T-coil Testing

## 1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 99%RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

Table 5-1
VoLTE over IMS SNNR by Radio Configuration

	VOLTE OVER IMS SINKE BY RADIO CONTIGURATION											
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]			
12	707.5	23095	10	QPSK	1	0	1.63	-46.60	48.23			
12	707.5	23095	10	QPSK	1	25	2.21	-47.50	49.71			
12	707.5	23095	10	QPSK	1	49	1.65	-47.95	49.60			
12	707.5	23095	10	QPSK	25	0	2.03	-47.76	49.79			
12	707.5	23095	10	QPSK	25	12	1.63	-49.11	50.74			
12	707.5	23095	10	QPSK	25	25	2.17	-48.46	50.63			
12	707.5	23095	10	QPSK	50	0	1.54	-48.29	49.83			
12	707.5	23095	10	16QAM	1	0	1.70	-42.09	43.79			
12	707.5	23095	10	16QAM	1	25	1.57	-43.16	44.73			
12	707.5	23095	10	16QAM	1	49	1.89	-41.71	43.60			
12	707.5	23095	10	16QAM	25	0	1.89	-48.41	50.30			
12	707.5	23095	10	16QAM	25	12	1.81	-48.00	49.81			
12	707.5	23095	10	16QAM	25	25	2.22	-48.05	50.27			
12	707.5	23095	10	16QAM	50	0	1.75	-49.31	51.06			
12	707.5	23095	10	64QAM	1	0	1.58	-42.44	44.02			
12	707.5	23095	10	64QAM	1	25	1.58	-42.55	44.13			
12	707.5	23095	10	64QAM	1	49	1.70	-42.28	43.98			
12	707.5	23095	10	64QAM	25	0	2.19	-48.23	50.42			
12	707.5	23095	10	64QAM	25	12	1.78	-49.12	50.90			
12	707.5	23095	10	64QAM	25	25	1.88	-48.56	50.44			
12	707.5	23095	10	64QAM	50	0	1.71	-48.42	50.13			

### 2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 23.85kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 5-2
AMR Codec Investigation – VoLTE over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	1.77	2.96	3.47	3.21			23095
ABM2 (dBA/m)	-42.07	-41.63	-41.97	-42.03	Axial	Band 12 10MHz	
Frequency Response	Pass	Pass	Pass	Pass	Axiai		
S+N/N (dB)	43.84	44.59	45.44	45.24			


- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"

FCC ID: ZNFK300TM	PCTEST Proof to be post of @ content	HAC (T-COIL) TEST REPORT	OIL) TEST REPORT LG	
Filename:	Test Dates:	DUT Type:		Page 19 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 19 01 95

Table 5-3
EVS Codec Investigation - VoLTE over IMS

Codec Setting:	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	3.31	2.17	3.92	3.36			23095
ABM2 (dBA/m)	-42.19	-42.37	-41.70	-41.74	Avial	Band 12 10MHz	
Frequency Response	Pass	Pass	Pass	Pass	- Axial		
S+N/N (dB)	45.50	44.54	45.62	45.10			

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"



Audio Band Magnetic Curve Measurement Block Diagram

## 3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length  $T_f$  = 307200  $\cdot$   $T_s$  = 10 ms, where  $T_s$  is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length 30720  $\cdot$   $T_s$  = 1 ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192  $\cdot$  Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Table 5-4
Uplink-Downlink Configurations for Type 2 Frame Structures

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									Calculated Transmission	
configuration		0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	J	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	J	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	HAC (T-COIL) TEST REPORT	
Filename:	Test Dates:	DUT Type:		Page 20 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 20 01 95

### a. Power Class 3 Uplink-Downlink Configuration Investigation

Power class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-5
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	0	1.77	-32.51	34.28
2593.0	40620	20	16QAM	1	0	1	1.73	-28.57	30.30
2593.0	40620	20	16QAM	1	0	2	2.07	-28.54	30.61
2593.0	40620	20	16QAM	1	0	3	2.07	-31.84	33.91
2593.0	40620	20	16QAM	1	0	4	1.76	-31.34	33.10
2593.0	40620	20	16QAM	1	0	5	2.10	-31.89	33.99
2593.0	40620	20	16QAM	1	0	6	1.80	-32.27	34.07

## b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-6
Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	1	1.67	-27.40	29.07
2593.0	40620	20	16QAM	1	0	2	1.79	-27.49	29.28
2593.0	40620	20	16QAM	1	0	3	1.91	-30.82	32.73
2593.0	40620	20	16QAM	1	0	4	1.98	-30.50	32.48
2593.0	40620	20	16QAM	1	0	5	1.63	-30.64	32.27

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

## c. Conclusion

Per the investigations above, UL-DL Configuration 1 was used to evaluate both Power Class 3 and Power Class 2 VoLTE over IMS.

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 21 01 95

#### 6. **VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION**

#### I. Test System Setup for VoWIFI over IMS T-coil Testing

## 1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

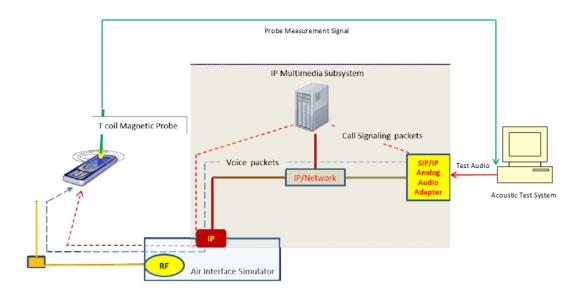


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

### 2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level<sup>2</sup>. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

<sup>&</sup>lt;sup>2</sup> FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

1 00 0 miles of Engineer	g aa	eeere zez r een reening ier ennite n	roo, coptonizor roj.	
FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 22 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 22 01 93

© 2020 PCTEST **REV 3.5.M** 

# II. DUT Configuration for VoWIFI over IMS T-coil Testing

# 1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

Table 6-1
IEEE 802.11b SNNR by Radio Configuration

	i=== common juntament									
Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]				
IEEE 802.11b	6	DSSS	1	-1.55	-37.15	35.60				
IEEE 802.11b	6	DSSS	2	-1.67	-37.37	35.70				
IEEE 802.11b	6	CCK	5.5	-1.61	-37.57	35.96				
IEEE 802.11b	6	CCK	11	-1.72	-37.74	36.02				

Table 6-2 IEEE 802.11g/a SNNR by Radio Configuration

izzz odzinigła ontrik by rkadio comigaración						
Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11g	6	BPSK	6	-1.75	-47.42	45.67
IEEE 802.11g	6	BPSK	9	-1.90	-43.34	41.44
IEEE 802.11g	6	QPSK	12	-1.69	-44.40	42.71
IEEE 802.11g	6	QPSK	18	-1.62	-44.40	42.78
IEEE 802.11g	6	16QAM	24	-1.85	-43.39	41.54
IEEE 802.11g	6	16QAM	36	-1.62	-47.81	46.19
IEEE 802.11g	6	64QAM	48	-1.58	-45.90	44.32
IEEE 802.11g	6	64QAM	54	-1.70	-45.71	44.01

Table 6-3 IEEE 802.11n/ac 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]	
IEEE 802.11n	20	40	BPSK	0	-1.77	-39.16	37.39	
IEEE 802.11n	20	40	QPSK	1	-1.85	-39.99	38.14	
IEEE 802.11n	20	40	QPSK	2	-1.63	-41.03	39.40	
IEEE 802.11n	20	40	16QAM	3	-1.94	-39.54	37.60	
IEEE 802.11n	20	40	16QAM	4	-1.74	-40.47	38.73	
IEEE 802.11n	20	40	64QAM	5	-1.62	-42.45	40.83	
IEEE 802.11n	20	40	64QAM	6	-1.76	-42.35	40.59	
IEEE 802.11n	20	40	64QAM	7	-1.74	-43.57	41.83	
IEEE 802.11ac	20	40	256QAM	8	-1.62	-41.36	39.74	

Table 6-4 IEEE 802.11n/ac 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	40	38	BPSK	0	-1.56	-40.65	39.09
IEEE 802.11n	40	38	QPSK	1	-1.87	-41.80	39.93
IEEE 802.11n	40	38	QPSK	2	-1.77	-42.17	40.40
IEEE 802.11n	40	38	16QAM	3	-1.81	-43.06	41.25
IEEE 802.11n	40	38	16QAM	4	-1.97	-42.50	40.53
IEEE 802.11n	40	38	64QAM	5	-1.65	-41.85	40.20
IEEE 802.11n	40	38	64QAM	6	-1.79	-42.74	40.95
IEEE 802.11n	40	38	64QAM	7	-1.84	-43.39	41.55
IEEE 802.11ac	40	38	256QAM	8	-1.99	-42.77	40.78
IEEE 802.11ac	40	38	256QAM	9	-1.91	-44.07	42.16

FCC ID: ZNFK300TM	POTEST Proof to be post of the second	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 23 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 23 01 95

## 2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 23.85kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 6-5
AMR Codec Investigation – VoWIFI over IMS

		Amir Oou	o mitestig	ation vo	*****	11410		
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	-1.67	-1.12	-1.14	-1.23				
ABM2 (dBA/m)	-37.13	-37.56	-37.38	-37.08	Axial		.===	
Frequency Response	Pass	Pass	Pass	Pass	Axiai	2.4GHz	IEEE 802.11b	6
S+N/N (dB)	35.46	36.44	36.24	35.85				

Table 6-6
EVS Codec Investigation – VoWIFI over IMS

Codec Setting:	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	-0.70	-1.84	0.02	0.00		2.420	IEEE 802.11b	6
ABM2 (dBA/m)	-37.37	-37.59	-37.92	-38.21	Axial			
Frequency Response	Pass	Pass	Pass	Pass	Axiai	2.4GHz		
S+N/N (dB)	36.67	35.75	37.94	38.21				

Mute on; Backlight off; Max Volume; Max Contrast




Figure 6-2
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFK300TM	PCTEST* Proud to be past of @ interest	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 24 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 24 01 95

## 7. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

# I. Test System Setup for OTT VoIP T-Coil Testing

## 1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

## 2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

## 3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation<sup>3</sup>. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

# II. DUT Configuration for OTT VoIP T-Coil Testing

## 1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Table 7-1
Codec Investigation – OTT VoIP (EvDO)

Codec Setting:	75kbps	6kbps	Orientation	Channel		
ABM1 (dBA/m)	4.48	3.41				
ABM2 (dBA/m)	-47.10	-47.53	Axial	600		
Frequency Response	Pass	Pass	Axiai			
S+N/N (dB)	51.58	50.94				

<sup>&</sup>lt;sup>3</sup> FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 25 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 25 01 95

Table 7-2 Codec Investigation - OTT VoIP (EDGE)

Codec investigation - OTT voil (LDOL)						
Codec Setting:	75kbps	6kbps	Orientation	Channel		
ABM1 (dBA/m)	3.18	3.45				
ABM2 (dBA/m)	-27.60	-25.82	Avial	190		
Frequency Response	Pass	Pass	- Axial			
S+N/N (dB)	30.78	29.27				

Table 7-3 Codec Investigation – OTT VoIP (HSPA)

0040011	Codo nivociganon Ciri					
Codec Setting:	75kbps	6kbps	Orientation	Channel		
ABM1 (dBA/m)	3.31	3.35				
ABM2 (dBA/m)	-50.29	-50.12	Axial	4183		
Frequency Response	Pass	Pass	Axiai			
S+N/N (dB)	53.60	53.47				


Table 7-4 Codec Investigation - OTT VoIP (LTE)

	acc ilives	011 1011	( <b>-</b>		
Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	3.43	3.26	3.26		132322
ABM2 (dBA/m)	-39.48	-39.45	Axial	Band 66	
Frequency Response	Pass	Pass	Axiai	20MHz	
S+N/N (dB)	42.91	42.71			

Table 7-5 Codec Investigation - OTT VoIP (WIFI)

Codec Setting:	75kbps	6kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	4.12	3.14			IEEE 802.11b	6
ABM2 (dBA/m)	-36.21	-36.06	Avial	2.401 -		
Frequency Response	Pass	Pass	Axial	2.4GHz		
S+N/N (dB)	40.33	39.20				

- Mute on; Backlight off; Max Volume; Max Contrast
- Radio Configurations can be found in Section 9.II.H



**Audio Band Magnetic Curve Measurement Block Diagram** 

FCC ID: ZNFK300TM	PCTEST* Proud to be part of @ interest	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 26 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 20 01 95

## 2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 66 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE bands:

Table 7-6
OTT VoIP (LTE FDD) SNNR by LTE Band

			• • . ,	,		,			
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
71	680.5	133297	20	16QAM	1	0	3.18	-41.03	44.21
12	707.5	23095	10	16QAM	1	0	3.12	-45.82	48.94
13	782.0	23230	10	16QAM	1	0	3.64	-44.88	48.52
26	831.5	26865	15	16QAM	1	0	3.16	-42.86	46.02
66	1745.0	132322	20	16QAM	1	0	3.49	-39.31	42.80
25	1882.5	26365	20	16QAM	1	0	3.13	-40.95	44.08

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

Table 7-7
OTT VoIP (LTE TDD) SNNR by LTE Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
41 (PC3)	2593.0	40620	20	16QAM	1	0	3.62	-30.72	34.34
41 (PC2)	2593.0	40620	20	16QAM	1	0	3.64	-29.11	32.75

## 3. LTE TDD Uplink Carrier Aggregation for OTT VoIP

LTE TDD ULCA was evaluated to ensure LTE TDD standalone was the worst-case scenario. The configurations in Table 7-8 were determined from Table 7-7 and satisfy the configuration requirements as defined in 3GPP 36.101.

Table 7-8

LTE TDD SNNR for OTT VoIP Uplink Carrier Aggregation

				PCC				SCC									
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
CA_41C (PC3)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	3.30	-31.41	34.71
CA_41C (PC2)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	3.54	-30.11	33.65

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ minuted	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 27 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 27 01 95

## 8. FCC 3G MEASUREMENTS

# I. CDMA Test Configurations

Radio Configuration 1, Service Option 3 (thick, green data curve) was used for the testing as the worst-case configuration for the handset due to vocoder gating from the EVRC logic. See below plot for ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:


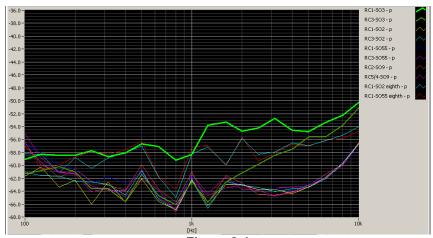


Figure 8-1
CDMA Audio Band Magnetic Noise

Table 8-1 FCC 3G ABM Measurements for ZNFK300TM (CDMA)

			\			
Configuration:	RC1/SO3	RC3/SO3	RC4/SO3	Orientation	Channel	
ABM1 (dBA/m)	-8.06	-8.30	-8.46			
ABM2 (dBA/m)	-36.11	-50.59	-50.73	Axial	600	
Frequency Response	Pass	Pass	Pass	Axiai		
S+N/N (dB)	28.05	42.29	42.27			

- · Mute on; Backlight off; Max Volume; Max Contrast
- Power Control Bits = "All Up"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFK300TM	PCTEST Proof to the post of a common	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 28 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 20 01 95

#### II. **UMTS Test Configurations**

AMR at 12.2kbps, 13.6kbps SRB (thick, purple data curve) was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:




Figure 8-3 **UMTS Audio Band Magnetic Noise** 

Table 8-2 **Codec Investigation - UMTS** 

		co mvestigatio	<u></u>			
Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel	
ABM1 (dBA/m)	-3.81	-3.82	-3.96			
ABM2 (dBA/m)	-52.74	-53.04	-53.10	Axial	9400	
Frequency Response	Pass	Pass	Pass	Axiai		
S+N/N (dB)	48.93	49.22	49.14			

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC="All 1s"



**Audio Band Magnetic Curve Measurement Block Diagram** 

FCC ID: ZNFK300TM	PCTEST  Proud to be post of ® element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 29 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 29 01 95

# T-COIL TEST SUMMARY

Table 9-1 **Consolidated Tabled Results** 

Consolidated Tabled Results											
		-	esponse rgin	_	netic / Verdict		SNNR dict	Margin from FCC Limit	C63.19-2011		
		8.3	3.2	8.3	3.1	8.3	3.4	(dB)	Rating		
C63.19	9 Section	Axial	Radial	Axial	Radial	Axial	Radial				
	Secondary Cellular	PASS	NA	PASS	PASS	PASS	PASS				
CDMA	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-6.31	Т3		
	PCS	PASS	NA	PASS	PASS	PASS	PASS				
	Secondary Cellular	PASS	NA	PASS	PASS	PASS	PASS				
EvDO (OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-30.98	T4		
(OTT VOIF)	PCS	PASS	NA	PASS	PASS	PASS	PASS				
0014	Cellular	PASS	NA	PASS	PASS	PASS	PASS	2.20	To		
GSM	PCS	PASS	NA	PASS	PASS	PASS	PASS	-2.20	Т3		
EDGE	Cellular	PASS	NA	PASS	PASS	PASS	PASS	6.04	To		
(OTT VoIP)	PCS	PASS	NA	PASS	PASS	PASS	PASS	-6.01	Т3		
	Cellular	PASS	NA	PASS	PASS	PASS	PASS				
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-21.04	T4		
	PCS	PASS	NA	PASS	PASS	PASS	PASS				
	Cellular	PASS	NA	PASS	PASS	PASS	PASS				
HSPA (OTT VoIP)	AWS	PASS	NA	PASS	PASS	PASS	PASS	-32.72	T4		
(011 1011)	PCS	PASS	NA	PASS	PASS	PASS	PASS				
	B71	PASS	NA	PASS	PASS	PASS	PASS				
	B12	PASS	NA	PASS	PASS	PASS	PASS				
LTE FDD	B13	PASS	NA	PASS	PASS	PASS	PASS	10.40	Т4		
LIEFUU	B26	PASS	NA	PASS	PASS	PASS	PASS	-18.43	14		
	B66	PASS	NA	PASS	PASS	PASS	PASS				
	B25	PASS	NA	PASS	PASS	PASS	PASS				
LTE FDD (OTT VoIP)	B66	PASS	NA	PASS	PASS	PASS	PASS	-20.18	T4		
LTE TOD	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	C E4	To		
LTE TDD	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-6.51	Т3		
LTE TDD (OTT VoIP)	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-9.29	Т3		
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS				
WLAN	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	-14.91	T4		
	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS				
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS				
WLAN (OTT VoIP)	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	-17.06	T4		
(OTT VOIF)	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS				
	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS				
U-NII	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	-16.65	T4		
	IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS				
	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS				
U-NII (OTT VoIP)	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	-23.53	T4		
(OTT VOIP)	IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS				

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ connect	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 30 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 30 01 93

© 2020 PCTEST **REV 3.5.M** 

#### I. **Raw Handset Data**

Table 9-2 **Raw Data Results for CDMA** 

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		476	-7.65	-35.28		2.00	27.63	20.00	-7.63	Т3	
	Axial	564	-7.67	-34.43	-61.19	2.00	26.76	20.00	-6.76	Т3	2.6, 1.8
Secondary		684	-8.33	-34.64		2.00	26.31	20.00	-6.31	Т3	
Cellular		476	-13.31	-41.18			27.87	20.00	-7.87	Т3	
	Radial	564	-13.51	-40.56	-61.49	N/A	27.05	20.00	-7.05	Т3	2.2, 2.6
		684	-13.46	-40.42			26.96	20.00	-6.96	Т3	
		1013	-7.77	-35.04		2.00	27.27	20.00	-7.27	Т3	
	Axial	384	-7.90	-36.62	-61.19	2.00	28.72	20.00	-8.72	Т3	2.6, 1.8
Cellular		777	-7.65	-36.45		2.00	28.80	20.00	-8.80	Т3	
Celiulai		1013	-13.40	-40.80			27.40	20.00	-7.40	Т3	
	Radial	384	-13.69	-41.96	-61.49	N/A	28.27	20.00	-8.27	Т3	2.2, 2.6
		777	-13.65	-41.80			28.15	20.00	-8.15	Т3	
		25	-7.97	-36.43		2.00	28.46	20.00	-8.46	Т3	
	Axial	600	-7.82	-36.06	-61.19	2.00	28.24	20.00	-8.24	Т3	2.6, 1.8
PCS		1175	-8.35	-36.30		2.00	27.95	20.00	-7.95	Т3	
FUS		25	-13.49	-41.13			27.64	20.00	-7.64	Т3	
	Radial	600	-13.40	-41.03	-61.49	9 N/A	27.63	20.00	-7.63	Т3	2.2, 2.6
		1175	-13.22	-41.56			28.34	20.00	-8.34	Т3	

Table 9-3 **Raw Data Results for GSM** 

				- 10111 -	Jala Nest		<b>-</b>					
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		128	9.93	-21.36		1.41	31.29	20.00	-11.29	T4		
	Axial	190	9.90	-20.41	-58.13	1.24	30.31	20.00	-10.31	T4	2.6, 1.8	
GSM850		251	9.90	-20.03		1.27	29.93	20.00	-9.93	Т3		
GSIMIOSU		128	2.06	-21.46			23.52	20.00	-3.52	Т3		
	Radial	190	2.02	-20.62	-58.89	-58.89 N/A		22.64	20.00	-2.64	Т3	2.2, 2.6
		251	2.12	-20.08			22.20	20.00	-2.20	Т3		
		512	9.56	-26.04		1.37	35.60	20.00	-15.60	T4		
	Axial	661	9.90	-26.54	-58.13	1.13	36.44	20.00	-16.44	T4	2.6, 1.8	
GSM1900		810	9.87	-25.83		1.19	35.70	20.00	-15.70	T4		
G3W1900		512	2.08	-26.26			28.34	20.00	-8.34	Т3		
	Radial	661	2.09	-26.67	-58.89	N/A	28.76	20.00	-8.76	Т3	2.2, 2.6	
		810	1.99	-25.93	00.00		27.92	20.00	-7.92	Т3		

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 31 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 31 01 93

Table 9-4
Raw Data Results for UMTS

				- 10		113 101 01					
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		4132	-3.90	-53.29		1.21	49.39	20.00	-29.39	T4	
	Axial	4183	-3.93	-53.49	-60.56	1.25	49.56	20.00	-29.56	T4	2.6, 1.8
UMTS V		4233	-3.96	-53.21		1.24	49.25	20.00	-29.25	T4	
OWITS V		4132	-12.20	-53.53			41.33	20.00	-21.33	T4	
	Radial	4183	-12.24	-53.61	-62.80	N/A	41.37	20.00	-21.37	T4	2.2, 2.6
		4233	-12.26	-53.30			41.04	20.00	-21.04	T4	
		1312	-3.90	-52.86		1.23	48.96	20.00	-28.96	T4	
	Axial	1412	-3.90	-53.07	-60.56	1.24	49.17	20.00	-29.17	T4	2.6, 1.8
UMTS IV		1513	-3.94	-53.33		1.24	49.39	20.00	-29.39	T4	
OWISIV		1312	-12.25	-53.66			41.41	20.00	-21.41	T4	
	Radial	1412	-12.26	-53.98	-62.80	N/A	41.72	20.00	-21.72	T4	2.2, 2.6
		1513	-12.28	-53.59			41.31	20.00	-21.31	T4	
		9262	-3.95	-52.89		1.23	48.94	20.00	-28.94	T4	
	Axial	9400	-3.91	-52.68	-60.56	1.26	48.77	20.00	-28.77	T4	2.6, 1.8
UMTSII		9538	-3.99	-52.89		1.25	48.90	20.00	-28.90	T4	
UNITSII		9262	-12.29	-53.50			41.21	20.00	-21.21	T4	
	Radial	9400	-12.32	-53.80	-62.80	2.80 N/A	41.48	20.00	-21.48	T4	2.2, 2.6
	Radiai	9538	-12.34	-53.43			41.09	20.00	-21.09	T4	

# Table 9-5 Raw Data Results for LTE B71

						Duta IX							
	Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Ī			20MHz	133297	1.85	-40.84		2.00	42.69	20.00	-22.69	T4	
		Axial	15MHz	133297	1.73	-41.52	-61.19	2.00	43.25	20.00	-23.25	T4	2.6, 1.8
		Axidi	10MHz	133297	1.74	-43.60	-01.19	2.00	45.34	20.00	-25.34	T4	2.0, 1.0
	TE Band 71		5MHz	133297	1.71	-44.06		2.00	45.77	20.00	-25.77	T4	
ľ	I E Ballu 7 I		20MHz	133297	-3.61	-43.13			39.52	20.00	-19.52	T4	
		Radial	15MHz	133297	-3.65	-42.76	-61.49	N/A	39.11	20.00	-19.11	T4	2.2. 2.6
		Naulai	10MHz	133297	-3.66	-46.16	-01.49	IVA	42.50	20.00	-22.50	T4	2.2, 2.0
			5MHz	133297	-3.25	-46.91			43.66	20.00	-23.66	T4	

# Table 9-6 Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	23095	2.09	-41.83		2.00	43.92	20.00	-23.92	T4	
	Axial	5MHz	23095	2.26	-42.84	-61.19	2.00	45.10	20.00	-25.10	T4	2.6, 1.8
	Axiai	3MHz	23095	2.09	-43.42	-01.19	2.00	45.51	20.00	-25.51	T4	2.0, 1.0
LTE Band 12		1.4MHz	23095	2.11	-42.24		2.00	44.35	20.00	-24.35	T4	
LIE Ballu 12		10MHz	23095	-3.30	-46.46			43.16	20.00	-23.16	T4	
	Radial	5MHz	23095	-3.37	-46.80	-61.49	N/A	43.43	20.00	-23.43	T4	2.2, 2.6
	Naulai	3MHz	23095	-3.58	-47.22	-01.49	IVA	43.64	20.00	-23.64	T4	2.2, 2.0
		1.4MHz	23095	-3.25	-47.03			43.78	20.00	-23.78	T4	

# Table 9-7 Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	10MHz	23230	1.74	-42.61	-61.19	2.00	44.35	20.00	-24.35	T4	2.6, 1.8
LTE Ban		5MHz	23230	2.00	-41.56	-01.19	2.00	43.56	20.00	-23.56	T4	2.0, 1.0
LIE Dall	Radial	10MHz	23230	-3.23	-46.96	-61.49	N/A	43.73	20.00	-23.73	T4	2.2. 2.6
	Radiai	5MHz	23230	-3.52	-45.92	-01.49	IWA	42.40	20.00	-22.40	T4	2.2, 2.0

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 32 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 32 01 93

# Table 9-8 Raw Data Results for LTE B26

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		15MHz	26865	1.89	-41.44		2.00	43.33	20.00	-23.33	T4	
		10MHz	26865	1.83	-42.15	] [	2.00	43.98	20.00	-23.98	T4	
	Axial	5MHz	26865	1.71	-41.44	-61.19	2.00	43.15	20.00	-23.15	T4	2.6, 1.8
		3MHz	26865	1.67	-42.62		2.00	44.29	20.00	-24.29	T4	
LTE Band 26		1.4MHz	26865	1.75	-42.73		2.00	44.48	20.00	-24.48	T4	
LIE Ballu 26		15MHz	26865	-3.31	-43.51			40.20	20.00	-20.20	T4	
		10MHz	26865	-3.61	-44.06			40.45	20.00	-20.45	T4	
	Radial	5MHz	26865	-3.61	-44.28	-61.49	N/A	40.67	20.00	-20.67	T4	2.2, 2.6
		3MHz	26865	-3.60	-44.38			40.78	20.00	-20.78	T4	
		1.4MHz	26865	-3.31	-44.62			41.31	20.00	-21.31	T4	

# Table 9-9 Raw Data Results for LTE B66

				11411	Data IX	zouito io						
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	132572	1.54	-39.56		2.00	41.10	20.00	-21.10	T4	
		20MHz	132322	1.84	-39.96		2.00	41.80	20.00	-21.80	T4	
		20MHz	132072	1.62	-40.21		2.00	41.83	20.00	-21.83	T4	
	Axial	15MHz	132322	1.96	-41.29	-61.19	2.00	43.25	20.00	-23.25	T4	2.6, 1.8
	Axiai	10MHz	132322	1.98	-41.95	-01.19	2.00	43.93	20.00	-23.93	T4	2.0, 1.0
		5MHz	132322	1.81	-41.98		2.00	43.79	20.00	-23.79	T4	
		3MHz	132322	1.95	-43.82		2.00	45.77	20.00	-25.77	T4	
LTE Band 66		1.4MHz	132322	1.82	-43.13		2.00	44.95	20.00	-24.95	T4	
LIE Ballu 66		20MHz	132572	-3.68	-42.11			38.43	20.00	-18.43	T4	
		20MHz	132322	-3.75	-42.42			38.67	20.00	-18.67	T4	
		20MHz	132072	-3.43	-42.96			39.53	20.00	-19.53	T4	
	5 " 1	15MHz	132322	-3.58	-43.38	24.40		39.80	20.00	-19.80	T4	
	Radial	10MHz	132322	-3.59	-43.89	-61.49	N/A	40.30	20.00	-20.30	T4	2.2, 2.6
		5MHz	132322	-3.48	-45.00			41.52	20.00	-21.52	T4	
		3MHz	132322	-3.49	-45.11			41.62	20.00	-21.62	T4	
		1.4MHz	132322	-3.53	-45.17			41.64	20.00	-21.64	T4	

# Table 9-10 Raw Data Results for LTE B25

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	26365	1.66	-41.32		2.00	42.98	20.00	-22.98	T4	
		15MHz	26365	1.82	-41.29		2.00	43.11	20.00	-23.11	T4	
	Axial	10MHz	26365	1.81	-41.07	-61.19	2.00	42.88	20.00	-22.88	T4	2.6, 1.8
	Axiai	5MHz	26365	1.76	-41.52	-01.19	2.00	43.28	20.00	-23.28	T4	2.0, 1.0
		3MHz	26365	1.69	-42.37		2.00	44.06	20.00	-24.06	T4	
LTE Band 25		1.4MHz	26365	1.67	-41.68		2.00	43.35	20.00	-23.35	T4	
LIE Banu 25		20MHz	26365	-3.49	-43.98			40.49	20.00	-20.49	T4	
		15MHz	26365	-3.42	-43.89			40.47	20.00	-20.47	T4	
	Radial	10MHz	26365	-3.63	-43.79	-61.49	N/A	40.16	20.00	-20.16	T4	2.2, 2.6
	Radiai	5MHz	26365	-3.60	-43.60	-01.49	IVA	40.00	20.00	-20.00	T4	2.2, 2.0
		3MHz	26365	-3.44	-44.31			40.87	20.00	-20.87	T4	
		1.4MHz	26365	-3.56	-45.26			41.70	20.00	-21.70	T4	

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 33 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 33 01 93

## **Table 9-11** Raw Data Results for LTE B41 Power Class 3

				Duta i ii			- · · · · · · ·		•				
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	40620	1.99	-27.96		2.00	29.95	20.00	-9.95	T3		
	Avial	15MHz	40620	1.49	-27.51	-61.19	2.00	29.00	20.00	-9.00	T3	2.6, 1.8	
	Axial	10MHz	40620	2.03	-27.41	-01.19	2.00	29.44	20.00	-9.44	Т3	2.0, 1.0	
LTE Band 44		5MHz	40620	1.64	-28.14		2.00	29.78	20.00	-9.78	T3		
LIE Ballu 41	LTE Band 41	20MHz	40620	-3.47	-36.33	-61.49		32.86	20.00	-12.86	T4		
		15MHz	40620	-3.53	-36.16		-61.49 N/A	NI/A	32.63	20.00	-12.63	T4	2.2. 2.6
		10MHz	40620	-3.49	-35.77			IVA	32.28	20.00	-12.28	T4	2.2, 2.0
		5MHz	40620	-3.76	-36.00			32.24	20.00	-12.24	T4	1	

## **Table 9-12** Raw Data Results for LTE B41 Power Class 2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	40620	1.52	-26.15		2.00	27.67	20.00	-7.67	Т3		
		15MHz	41490	1.54	-26.33	]	2.00	27.87	20.00	-7.87	Т3		
		15MHz	41055	1.68	-24.83		2.00	26.51	20.00	-6.51	Т3		
	Axial	15MHz	40620	1.73	-25.75	-61.19	2.00	27.48	20.00	-7.48	Т3	2.6, 1.8	
	Axiai	15MHz	40185	2.05	-26.73	-01.19	2.00	28.78	20.00	-8.78	Т3	2.0, 1.6	
		15MHz	39750	1.71	-26.42		2.00	28.13	20.00	-8.13	Т3		
	10MHz	40620	1.72	-25.85		2.00	27.57	20.00	-7.57	Т3			
LTE Band 41		5MHz	40620	1.67	-26.81		2.00	28.48	20.00	-8.48	Т3		
LIE Ballu 41		20MHz	41490	-3.52	-32.72			29.20	20.00	-9.20	Т3		
		20MHz	41055	-3.54	-31.21			27.67	20.00	-7.67	Т3		
		20MHz	40620	-3.68	-32.44			28.76	20.00	-8.76	Т3		
	Dadial	20MHz	40185	-3.48	-32.88	61.40	NVA	29.40	20.00	-9.40	Т3	2.2, 2.6	
	Radial	20MHz	39750	-3.56	-33.29	-61.49 27 32	-61.49 N/A 27	IWA	29.73	20.00	-9.73	Т3	2.2, 2.0
		15MHz	40620	-3.38	-32.27				28.89	20.00	-8.89	Т3	
		10MHz	40620	-3.53	-32.32				28.79	20.00	-8.79	T3	
		5MHz	40620	-3.72	-32.77			29.05	20.00	-9.05	Т3	1	

## **Table 9-13 Raw Data Results for 2.4GHz WIFI**

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		1	-1.65	-37.53		2.00	35.88	20.00	-15.88	T4	
	Axial	6	-1.63	-36.54	-61.19	2.00	34.91	20.00	-14.91	T4	2.6, 1.8
IEEE		11	-1.86	-37.00		2.00	35.14	20.00	-15.14	T4	
802.11b		1	-7.51	-43.67			36.16	20.00	-16.16	T4	
	Radial	6	-7.55	-42.48	-61.49		34.93	20.00	-14.93	T4	2.2, 2.6
		11	-7.74	-43.66			35.92	20.00	-15.92	T4	
IEEE	Axial	6	-1.63	-43.20	-61.19	2.00	41.57	20.00	-21.57	T4	2.6, 1.8
802.11g	Radial	6	-7.66	-49.20	-61.49		41.54	20.00	-21.54	T4	2.2, 2.6
IEEE	Axial	6	-1.72	-37.73	-61.19	2.00	36.01	20.00	-16.01	T4	2.6, 1.8
802.11n	Radial	6	-7.81	-48.13	-61.49		40.32	20.00	-20.32	T4	2.2, 2.6

## **Table 9-14** Raw Data Results for 5GHz WIFI IEEE 802.11a

				tutt Dut	u itosui	101 0	O112 111		002.110				
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	20MHz	1	40	-1.77	-43.64	-61.19	2.00	41.87	20.00	-21.87	T4	2.6, 1.8
EEE 802.11a													
	Radial	20MHz	1	40	-7.62	-54.55	-61.49	N/A	46.93	20.00	-26.93	T4	2.2, 2.6

FCC ID: ZNFK300TM	PCTEST* Proud to be past of @ steemed	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 34 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 34 of 95

# Table 9-15 Raw Data Results for 5GHz WIFI IEEE 802.11n

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		40MHz	1	38	-1.78	-40.30		2.00	38.52	20.00	-18.52	T4		
		20MHz	1	40	-1.82	-39.16		2.00	37.34	20.00	-17.34	T4		
		40MHz	2A	54	-1.57	-41.01		2.00	39.44	20.00	-19.44	T4		
		20MHz	2A	56	-1.85	-38.93		2.00	37.08	20.00	-17.08	T4		
	Axial	40MHz	2C	110	-1.84	-40.89	-61.19	2.00	39.05	20.00	-19.05	T4	2.6, 1.8	
	Axidi	20MHz	2C	116	-1.52	-38.81	-01.19	2.00	37.29	20.00	-17.29	T4	2.0, 1.0	
		40MHz	3	151	-1.74	-40.52		2.00	38.78	20.00	-18.78	T4		
		20MHz	3	149	-1.69	-38.40		2.00	36.71	20.00	-16.71	T4		
	IEEE	20MHz	3	157	-2.03	-38.68		2.00	36.65	20.00	-16.65	T4		
IEEE		20MHz	3	165	-1.61	-39.05		2.00	37.44	20.00	-17.44	T4		
802.11n														
002		40MHz	1	38	-7.53	-54.26			46.73	20.00	-26.73	T4		
		20MHz	1	40	-7.44	-53.42			45.98	20.00	-25.98	T4		
		40MHz	2A	54	-7.35	-52.23			44.88	20.00	-24.88	T4		
		20MHz	2A	56	-7.70	-53.29			45.59	20.00	-25.59	T4		
	Padial	40MHz	2C	110	-7.34	-54.66	61.40	N/A	47.32	20.00	-27.32	T4	2.2, 2.6	
	Radial	20MHz	2C	100	-7.47	-54.16	-61.49	-61 49 N/A	IVA	46.69	20.00	-26.69	T4	2.2, 2.0
		20MHz	2C	116	-7.28	-51.72			44.44	20.00	-24.44	T4		
		20MHz	2C	140	-7.40	-52.58			45.18	20.00	-25.18	T4		
		40MHz	3	151	-7.40	-52.37			44.97	20.00	-24.97	T4		
		20MHz	3	157	-7.37	-52.80			45.43	20.00	-25.43	T4		

# Table 9-16 Raw Data Results for 5GHz WIFI IEEE 802.11ac

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Avial	40MHz	1	38	-1.60	-41.41	-61.19	2.00	39.81	20.00	-19.81	T4	2.6, 1.8
IEEE	Axial	20MHz	1	40	-1.59	-39.36	-01.19	2.00	37.77	20.00	-17.77	T4	2.0, 1.6
	IEEE 802.11ac												
002.114	802.11ac Radial	40MHz	1	38	-7.58	-54.52	64.40	NUA	46.94	20.00	-26.94	T4	2.2. 2.6
	Nadiai	20MHz	1	40	-7.41	-53.54	-61.49	9 N/A	46.13	20.00	-26.13	T4	2.2, 2.0

Table 9-17
Raw Data Results for EvDO (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Secondary Cellular	Axial	564	3.01	-49.47	-58.13	1.82	52.48	20.00	-32.48	T4	2.6, 1.8
EvDO	Radial	564	-2.04	-55.16	-61.49	N/A	53.12	20.00	-33.12	T4	2.2, 2.6
Cellular	Axial	384	3.41	-48.97	-58.13	1.82	52.38	20.00	-32.38	T4	2.6, 1.8
EvDO	Radial	384	-2.64	-56.08	-61.49	N/A	53.44	20.00	-33.44	T4	2.2, 2.6
PCS	Axial	600	3.13	-47.85	-58.13	1.81	50.98	20.00	-30.98	T4	2.6, 1.8
EvDO	Radial	600	-2.62	-54.71	-61.49	N/A	52.09	20.00	-32.09	T4	2.2, 2.6

Table 9-18
Raw Data Results for EDGE (OTT VoIP)

	Naw Bata Nesatts for EBSE (OTT VOIL)											
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
EDGE850	Axial	190	3.45	-25.45	-58.13	1.78	28.90	20.00	-8.90	Т3	2.6, 1.8	
EDGE850	Radial	190	-2.35	-28.36	-61.49	N/A	26.01	20.00	-6.01	Т3	2.2, 2.6	
EDGE1900	Axial	661	3.02	-30.64	-58.13	1.82	33.66	20.00	-13.66	T4	2.6, 1.8	
EDGE1900	Radial	661	-2.12	-34.02	-61.49	N/A	31.90	20.00	-11.90	T4	2.2, 2.6	

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ control	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 35 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 33 of 93

# Table 9-19 Raw Data Results for HSPA (OTT VoIP)

Fraguerov Marsin from											
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	3.24	-49.83	-58.13	1.82	53.07	20.00	-33.07	T4	2.6, 1.8
nora v	Radial	4183	-2.16	-56.63	-61.49	N/A	54.47	20.00	-34.47	T4	2.2, 2.6
HSPA IV	Axial	1412	3.63	-49.65	-58.13	1.73	53.28	20.00	-33.28	T4	2.6, 1.8
HOPAIV	Radial	1412	-2.40	-57.10	-61.49	N/A	54.70	20.00	-34.70	T4	2.2, 2.6
HSPA II	Axial	9400	3.53	-49.19	-58.13	1.82	52.72	20.00	-32.72	T4	2.6, 1.8
HOPA II	Radial	9400	-2.49	-56.23	-61.49	N/A	53.74	20.00	-33.74	T4	2.2, 2.6

Table 9-20
Raw Data Results for LTE FDD B66 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates		
		20MHz	132572	3.02	-38.80		1.70	41.82	20.00	-21.82	T4			
		20MHz	132322	3.07	-39.13		1.72	42.20	20.00	-22.20	T4			
		20MHz	132072	3.08	-39.53		1.82	42.61	20.00	-22.61	T4			
	Axial	15MHz	132322	3.02	-40.24	-58.13	1.67	43.26	20.00	-23.26	T4	2.6, 1.8		
	Axiai	10MHz	132322	3.18	-40.72	-30.13	1.72	43.90	20.00	-23.90	T4	2.0, 1.0		
		5MHz	132322	3.19	-40.80		1.80	43.99	20.00	-23.99	T4			
		3MHz	132322	3.07	-41.60		1.75	44.67	20.00	-24.67	T4			
LTE Band 66		1.4MHz	132322	3.23	-41.41		1.80	44.64	20.00	-24.64	T4			
LIL Dana oo		20MHz	132572	-2.46	-42.64			40.18	20.00	-20.18	T4			
		20MHz	132322	-2.35	-44.64			42.29	20.00	-22.29	T4			
		20MHz	132072	-2.10	-42.38			40.28	20.00	-20.28	T4			
	D-45-1	15MHz	132322	-2.16	-45.86	-61.49 -61.49	-45.86 -46.46 -46.32 -61.49 N/A	NVA	43.70	20.00	-23.70	T4	00.00	
	Radial	10MHz	132322	-2.53	-46.46			-61 /Q N/A	N/A	43.93	20.00	-23.93	T4	2.2, 2.6
		5MHz	132322	-2.27	-46.32				44.05	20.00	-24.05	T4		
		3MHz	132322	-2.02	-46.19			44.17	20.00	-24.17	T4			
		1.4MHz	132322	-2.29	-45.96			43.67	20.00	-23.67	T4			

Table 9-21
Raw Data Results for LTE B41 (PC2) (OTT VoIP)

	Raw Bata Results for ETE B41 (1 02) (011 Voil )											
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 41	Axial	20MHz	40620	3.55	-28.63	-58.13	1.88	32.18	20.00	-12.18	T4	2.6, 1.8
		15MHz	40620	3.36	-28.52		1.58	31.88	20.00	-11.88	T4	
		10MHz	40620	3.68	-28.14		1.66	31.82	20.00	-11.82	T4	
		5MHz	41490	3.55	-27.19		1.60	30.74	20.00	-10.74	T4	
		5MHz	41055	3.71	-26.81		1.67	30.52	20.00	-10.52	T4	
		5MHz	40620	3.19	-28.21		1.65	31.40	20.00	-11.40	T4	
		5MHz	40185	3.85	-28.11		1.58	31.96	20.00	-11.96	T4	
		5MHz	39750	3.66	-28.17		1.71	31.83	20.00	-11.83	T4	
	Radial	20MHz	40620	-2.37	-32.83	-61.49	N/A	30.46	20.00	-10.46	T4	2.2, 2.6
		15MHz	41490	-2.14	-33.21			31.07	20.00	-11.07	T4	
		15MHz	41055	-2.43	-31.72			29.29	20.00	-9.29	Т3	
		15MHz	40620	-2.35	-32.62			30.27	20.00	-10.27	T4	
		15MHz	40185	-2.15	-33.75			31.60	20.00	-11.60	T4	
		15MHz	39750	-2.37	-33.72			31.35	20.00	-11.35	T4	
		10MHz	40620	-2.28	-32.66			30.38	20.00	-10.38	T4	
		5MHz	40620	-2.26	-32.95			30.69	20.00	-10.69	T4	

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 36 of 95	
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 30 01 93	

## **Table 9-22** Raw Data Results for 2.4GHz WIFI (OTT VoIP)

			IXUII D	ita itesa	113 101 2	10112 <b>11</b> 11	1 (011 1	<u> </u>			
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		1	2.70	-36.22		1.76	38.92	20.00	-18.92	T4	
	Axial	6	3.03	-36.36	-58.13	1.82	39.39	20.00	-19.39	T4	2.6, 1.8
IEEE		11	2.99	-35.78		1.69	38.77	20.00	-18.77	T4	
802.11b		1	-2.29	-40.16			37.87	20.00	-17.87	T4	
	Radial	6	-2.36	-39.42	-61.49	N/A	37.06	20.00	-17.06	T4	2.2, 2.6
		11	-2.36	-40.08			37.72	20.00	-17.72	T4	
IEEE	Axial	6	2.99	-38.74	-58.13	1.69	41.73	20.00	-21.73	T4	2.6, 1.8
802.11g	Radial	6	-2.05	-43.44	-61.49	N/A	41.39	20.00	-21.39	T4	2.2, 2.6
IEEE	Axial	6	2.73	-40.34	-58.13	1.75	43.07	20.00	-23.07	T4	2.6, 1.8
802.11n	Radial	6	-2.32	-43.36	-61.49	N/A	41.04	20.00	-21.04	T4	2.2, 2.6

**Table 9-23** Raw Data Results for 5GHz WIFI IEEE 802.11a (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	1	40	2.94	-41.11		1.82	44.05	20.00	-24.05	T4	2.6, 1.8
Axial		20MHz	2A	56	2.68	-41.00		1.75	43.68	20.00	-23.68	T4	
	Assimi	20MHz	2C	116	2.80	-41.64	-58.13	1.88	44.44	20.00	-24.44	T4	
IEEE	Axiai	20MHz	3	149	3.12	-40.47		1.84	43.59	20.00	-23.59	T4	
802.11a		20MHz	3	157	2.91	-40.62		1.80	43.53	20.00	-23.53	T4	
		20MHz	3	165	2.69	-41.24		1.75	43.93	20.00	-23.93	T4	
	Radial	20MHz	1	40	-2.50	-51.40	-61.49	N/A	48.90	20.00	-28.90	T4	2.2, 2.6

**Table 9-24** Raw Data Results for 5GHz WIFI IEEE 802.11n (OTT VoIP)

			<u> </u>	ata 1100	<u> </u>	00112	VII I I I I I I I I I I I I I I I I I I	_ 00	<u>10</u>	<del>10</del> /			
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	40MHz	1	38	2.89	-42.48	-58.13	1.73	45.37	20.00	-25.37	T4	2.6, 1.8
	Axidi	20MHz	1	40	2.88	-42.30	-36.13	1.80	45.18	20.00	-25.18	T4	
		40MHz	1	38	-2.40	-51.34			48.94	20.00	-28.94	T4	
		20MHz	1	40	-2.21	-49.55			47.34	20.00	-27.34	T4	
IEEE		40MHz	2A	54	-2.59	-52.08			49.49	20.00	-29.49	T4	
802.11n		20MHz	2A	56	-2.46	-49.64			47.18	20.00	-27.18	T4	
002.1111	Radial	40MHz	2C	110	-2.03	-51.89	-61.49		49.86	20.00	-29.86	T4	22.26
	Radiai	20MHz	2C	116	-2.42	-48.92	-01.49	N/A	46.50	20.00	-26.50	T4	2.2, 2.6
		40MHz	3	151	-2.10	-51.34			49.24	20.00	-29.24	T4	
		20MHz	3	149	-2.51	-49.25			46.74	20.00	-26.74	T4	
		20MHz	3	157	-2.54	-48.33			45.79	20.00	-25.79	T4	
		20MHz	3	165	-2.51	-48.84			46.33	20.00	-26.33	T4	

#### **Table 9-25** Raw Data Results for 5GHz WIFI IEEE 802.11ac (OTT VoIP)

	Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	Assimi	40MHz	1	38	2.70	-43.04	-58.13	1.71	45.74	20.00	-25.74	T4	2.6, 1.8
		Axiai	20MHz	1	40	2.76	-43.43		1.87	46.19	20.00	-26.19	T4	
	IEEE													
۰	802.11ac Radial	Dedial	40MHz	1	38	-2.05	-51.55	64.40	NI/A	49.50	20.00	-29.50	T4	2.2, 2.6
		Radiai	20MHz	1	40	-2.31	-51.20	-01.49	-61.49 N/A	48.89	20.00	-28.89	T4	2.2, 2.0

FCC ID: ZNFK300TM	PCTEST* Proud to be part of @ element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 37 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 37 01 93

#### II. **Test Notes**

#### A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Phone Settings→Additional Settings→Hearing aids) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G modes.
- 6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

#### B. CDMA

- 1. Power Configuration: Power Control Bits = "All Up"
- 2. Vocoder Configuration: RC1/SO3 (CDMA EVRC)

#### C. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);

#### D. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);

#### E. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 99%RB offset
- 3. Vocoder Configuration: WB AMR 23.85kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 66 at 20MHz is the worst-case for the Axial and Radial probe orientation.

#### F. LTE TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 99%RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 1
- 4. Power Class 2 Uplink-Downlink configuration: 1
- 5. Vocoder Configuration: WB AMR 23.85kbps
- 6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 15MHz is the worst-case for the Axial probe orientation, LTE Band 41 (Power Class 2) at 20MHz is the worst-case for the Radial probe orientation.

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 38 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 36 01 93

#### G. WIFI

- 1. Radio Configuration
  - a. IEEE 802.11b: DSSS, 1Mbps
  - b. IEEE 802.11g/a: BPSK, 9Mbps
  - c. IEEE 802.11n/ac 20MHz: BPSK, MCS 0
  - d. IEEE 802.11n/ac 40MHz: BPSK, MCS 0
- 2. Vocoder Configuration: WB AMR 23.85kbps
- 3. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for the Axial and Radial probe orientation.
- 4. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11n at 20MHz (U-NII 3) is the worst-case for the Axial probe orientation. IEEE 802.11n at 20MHz (U-NII 2C) is the worst-case for the Radial probe orientation.


#### H. OTT VolP

- 1. Vocoder Configuration: 6kbps
- 2. EvDO Configuration
  - a. Revision: A
- 3. EDGE Configuration
  - a. MCS Index: 7
  - b. Number of TX slots: 2
- 4. HSPA Configuration:
  - a. Release: 6
  - b. 3GPP 34.121 Subtest 1
- 5. LTE FDD Configuration:
  - a. Power Configuration: TPC = "Max Power"
  - b. Radio Configuration: 16QAM, 1RB, 99%RB offset
  - c. LTE Band 66 was the worst-case band from Table 7-6 and was used to test both Axial and Radial probe orientations.
  - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 66 at 20MHz is the worst-case for the Axial and Radial probe orientation.
- 6. LTE TDD Configuration:
  - a. Power Configuration: TPC = "Max Power"
  - b. Radio Configuration: 16QAM, 1RB, 99%RB offset
  - c. Power Class 2 Uplink-Downlink configuration: 1
  - d. LTE Band 41 (PC2) was the worst-case band from Table 7-7 and was used to test both Axial and Radial probe orientations.
  - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 15MHz is the worst-case for the Radial probe orientation.
- 7. WIFI Configuration:
  - a. Radio Configuration
    - i. IEEE 802.11b; DSSS, 1Mbps
    - ii. IEEE 802.11g/a: BPSK, 9Mbps
    - iii. IEEE 802.11n/ac 20MHz: BPSK, MCS 0
    - iv. IEEE 802.11n/ac 40MHz: BPSK. MCS 0
  - b. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for the Axial and Radial probe orientation.


FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 39 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 39 01 93

c. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11a 20MHz (U-NII 3) is the worst-case for the Axial probe orientation. IEEE 802.11n at 20MHz (U-NII 3) is the worst-case for the Radial probe orientation.


## III. 1 kHz Vocoder Application Check



This model was verified to be within the linear region for ABM1 measurements at -18 dBm0 for CDMA. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

FCC ID: ZNFK300TM	PCTEST* Proud to be post of ® element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 40 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 40 01 95

## IV. T-Coil Validation Test Results

Table 9-26
Helmholtz Coil Validation Table of Results – 03/16/2020

TIGHTHOUZ GOT VAIIA			
ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.952	PASS
Environmental Noise	< -58 dBA/m	-58.13	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.059	PASS
Environmental Noise	< -58 dBA/m	-58.89	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

Table 9-27
Helmholtz Coil Validation Table of Results – 03/25/2020


Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.908	PASS
Environmental Noise	< -58 dBA/m	-60.56	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.142	PASS
Environmental Noise	< -58 dBA/m	-62.80	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS


Table 9-28 Helmholtz Coil Validation Table of Results – 03/30/2020

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.299	PASS
Environmental Noise	< -58 dBA/m	-61.19	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.440	PASS
Environmental Noise	< -58 dBA/m	-61.49	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

FCC ID: ZNFK300TM	PCTEST* Proud to be post of @ minuted	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 41 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 41 01 95

#### **ABM1 Magnetic Field Distribution Scan Overlays** ٧.

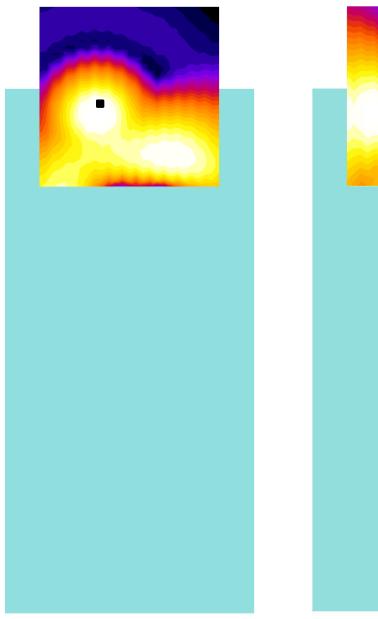

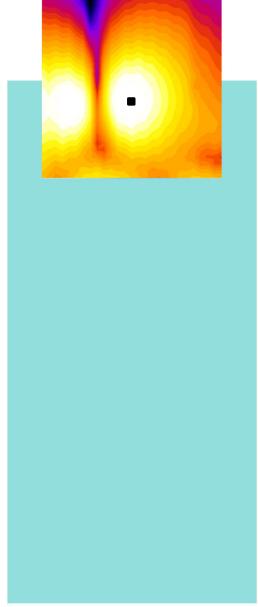

Axial Radial (Transverse)

Figure 9-1 T-Coil Scan Overlay Magnetic Field Distributions

#### Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 42 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 42 01 95

#### **MEASUREMENT UNCERTAINTY** 10.

## **Table 10-1 Uncertainty Estimation Table**

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)							0.71
Expanded uncertainty (k=2), 95% confidence level							1.31

#### Notes:

- Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 43 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 43 01 93

#### **EQUIPMENT LIST** 11.

## **Table 11-1 Equipment List**

Equipment List							
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number	
Control Company	4040	Temperature / Humidity Monitor	10/9/2018	Biennial	10/9/2020	181647812	
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	9/6/2018	Biennial	9/6/2020	2655082910	
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	4/24/2019	Biennial	4/24/2021	7BFNM32	
Listen	SoundConnect	Microphone Power Supply	9/6/2018	Biennial	9/6/2020	0899-PS150	
Listen	SoundConnect	Microphone Power Supply	4/22/2019	Biennial	4/22/2021	PS2612	
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	9/6/2018	Biennial	9/6/2020	23792992	
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	4/24/2019	Biennial	4/24/2021	23528889	
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/5/2020	Annual	2/5/2021	162125	
Rohde & Schwarz	CMW500	Radio Communication tester	5/17/2019	Annual	5/17/2020	128635	
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/6/2019	Annual	6/6/2020	161662	
Rohde & Schwarz	CMW500	Radio Communication tester	8/14/2019	Annual	8/14/2020	140144	
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053	
TEM	Axial T-Coil Probe	Axial T-Coil Probe	9/19/2018	Biennial	9/19/2020	TEM-1123	
TEM	Axial T-Coil Probe	Axial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1124	
TEM	Radial T-Coil Probe	Radial T-Coil Probe	9/19/2018	Biennial	9/19/2020	TEM-1129	
TEM	Radial T-Coil Probe	Radial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1130	
TEM	Helmholtz Coil	Helmholtz Coil	10/10/2018	Biennial	10/10/2020	SBI 1052	
TEM	C63.19	Helmholtz Coil	5/20/2019	Biennial	5/20/2021	925	
TEM		HAC System Controller with Software	N/A		N/A	N/A	
TEM		HAC Positioner	N/A		N/A	N/A	

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 44 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 44 01 95

#### 12. TEST DATA

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 45 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		raye 45 01 95



# **PCTEST Hearing-Aid Compatibility Facility**

DUT: HH Coil - SN: SBI 1052

Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### **Equipment:**


Probe: Axial T-Coil Probe - SN: TEM-1123; Calibrated: 9/19/2018

Helmholtz Coil - SN: SBI 1052; Calibrated: 10/10/2018

#### **Noise Spectrum**

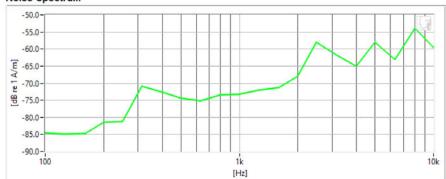

#### Frequency Response

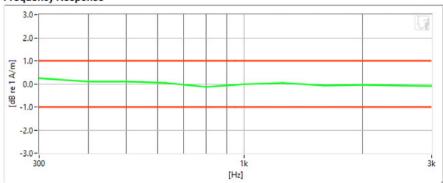

#### Results

Verification 1kHz Intensity	-9.952 dB	$\checkmark$	Max/Min	-9.5/-10.5
Verification ABM2	-58.13 dB	•	Maximum	-58.0
Frequency Response Margin	800m dB	~	Tolerance curves	Aligned Data

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ connect	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 46 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 40 or 95



DUT: HH Coil - SN: SBI 1052

Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### **Equipment:**


Probe: Axial T-Coil Probe - SN: TEM-1123; Calibrated: 9/19/2018

Helmholtz Coil - SN: SBI 1052; Calibrated: 10/10/2018

#### **Noise Spectrum**

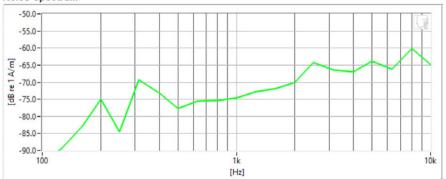

#### Frequency Response

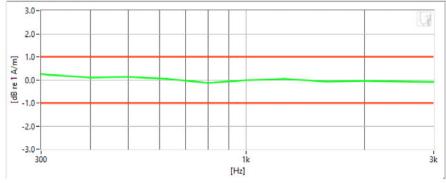

#### Results

Verification 1kHz Intensity	-9.908 dB	$\checkmark$	Max/Min	-9.5/-10.5
Verification ABM2	-60.56 dB	$\checkmark$	Maximum	-58.0
Frequency Response Margin	700m dB	~	Tolerance curves	Aligned Data

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 47 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		raye 47 01 95



# DUT: HH Coil - SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 5/17/2019
- Helmholtz Coil SN: 925; Calibrated: 5/20/2019

#### **Noise Spectrum**

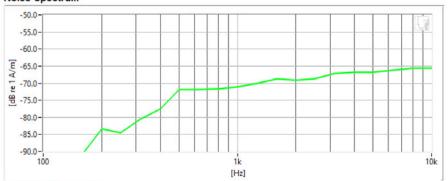

#### Frequency Response

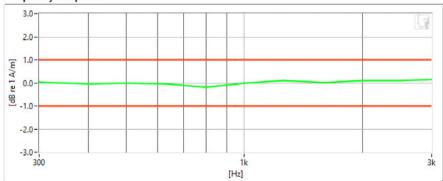

#### Results

Verification 1kHz Intensity	-10.299	dB	$\checkmark$	Max/Min	-9.5/-10.5
Verification ABM2	-61.19	dB	$\checkmark$	Maximum	-58.0
Frequency Response Margin	800m	dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ connect	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 48 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 46 01 95



## **PCTEST Hearing-Aid Compatibility Facility**

DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

#### Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/19/2018
- Helmholtz Coil SN: SBI 1052; Calibrated: 10/10/2018

#### **Noise Spectrum**

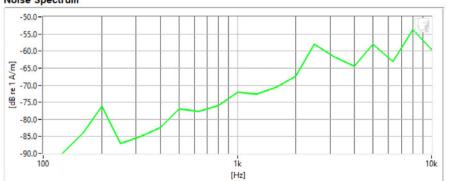

#### Frequency Response

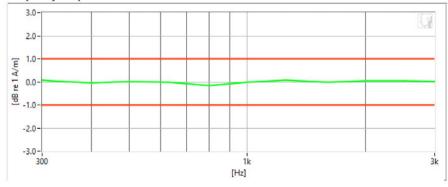

#### Results

Verification 1kHz Intensity	-10.059	dB	•	Max/Min	-9.5/-10.5
Verification ABM2	-58.89	dB	$\checkmark$	Maximum	-58.0
Frequency Response Margin	800m	dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 49 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 49 01 95



## **PCTEST Hearing-Aid Compatibility Facility**

DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

#### Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/19/2018
- Helmholtz Coil SN: SBI 1052; Calibrated: 10/10/2018

#### **Noise Spectrum**

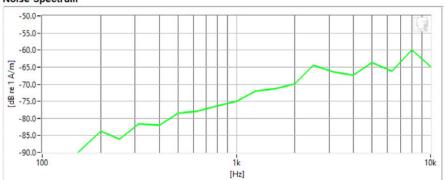

#### Frequency Response

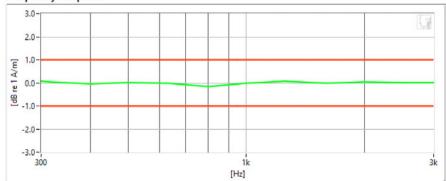

#### Results

Verification 1kHz Intensity	-10.142	dB	$\checkmark$	Max/Min	-9.5/-10.5
Verification ABM2	-62.8	dB	•	Maximum	-58.0
Frequency Response Margin	800m	dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 50 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 50 of 95




DUT: HH Coil - SN: 925 Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 5/17/2019
- Helmholtz Coil SN: 925; Calibrated: 5/20/2019

#### **Noise Spectrum**

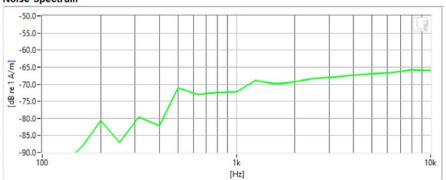

#### Frequency Response

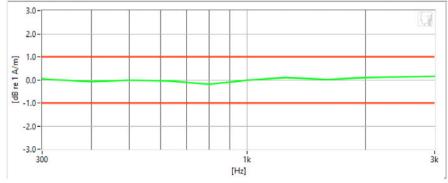

#### Results

Verification 1kHz Intensity	-10.44 dB	$\checkmark$	Max/Min	-9.5/-10.5
Verification ABM2	-61.49 dB	•	Maximum	-58.0
Frequency Response Margin	800m dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK300TM	PCTEST* Proud to be post of @ element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 51 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 51 01 95



Type: Portable Handset Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

#### **Test Configuration:**

- . Mode: Secondary Cellular CDMA
- Channel: 684
- Speech Signal: ITU-T P.50 Artificial Voice

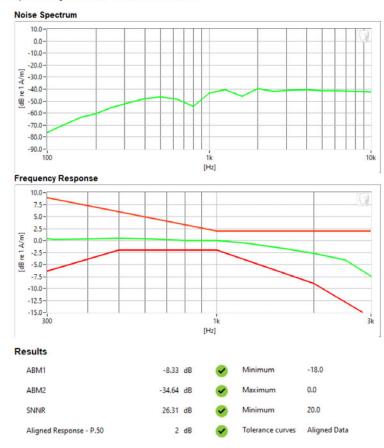

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 52 of 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

#### **Test Configuration:**

Mode: Cellular CDMA

Channel: 1013

Speech Signal: ITU-T P.50 Artificial Voice

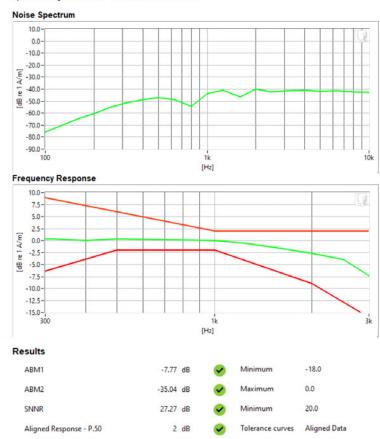

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 53 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 53 of 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

#### **Test Configuration:**

Mode: PCS CDMA

Channel: 1175

Speech Signal: ITU-T P.50 Artificial Voice

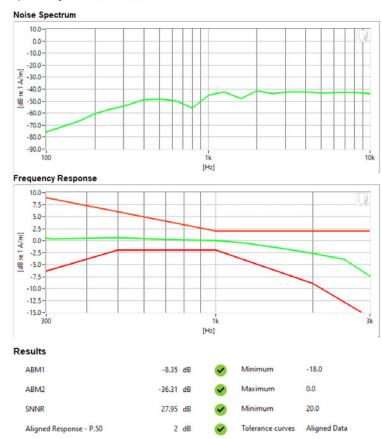

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ minuted	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 54 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 54 of 95



Type: Portable Handset Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/19/2018

#### **Test Configuration:**

- Mode: GSM 850 Channel: 251
- Speech Signal: ITU-T P.50 Artificial Voice

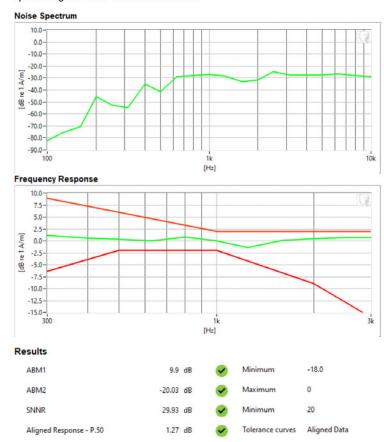

FCC ID: ZNFK300TM	PCTEST* Proof to be part of @ stormed	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 55 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 55 of 95



Type: Portable Handset Serial: 10268

#### Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/19/2018

#### **Test Configuration:**

 Mode: GSM 1900 Channel: 512

Speech Signal: ITU-T P.50 Artificial Voice

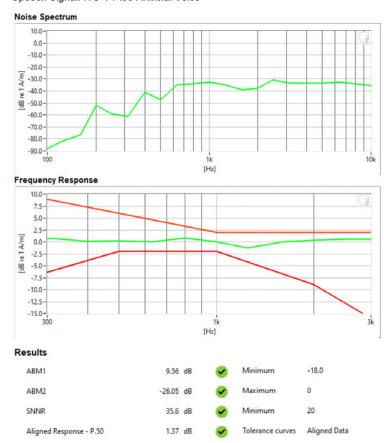

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 56 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 50 of 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/19/2018

#### **Test Configuration:**

. Mode: UMTS Band V

Channel: 4233

Speech Signal: ITU-T P.50 Artificial Voice

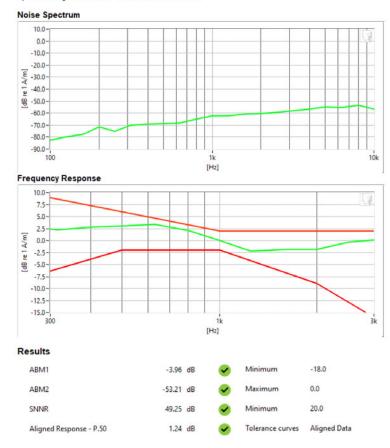

FCC ID: ZNFK300TM	PCTEST* Poud to be port of ® circumst	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 57 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 37 of 93



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/19/2018

#### **Test Configuration:**

. Mode: UMTS Band IV

Channel: 1312

Speech Signal: ITU-T P.50 Artificial Voice

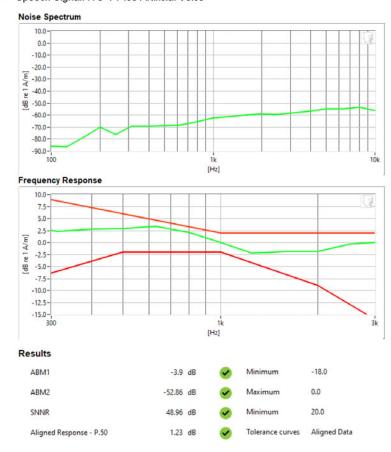

FCC ID: ZNFK300TM	PCTEST* Proud to be past of @ steemed	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 58 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 36 01 93



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/19/2018

#### **Test Configuration:**

. Mode: UMTS Band II

Channel: 9400

Speech Signal: ITU-T P.50 Artificial Voice

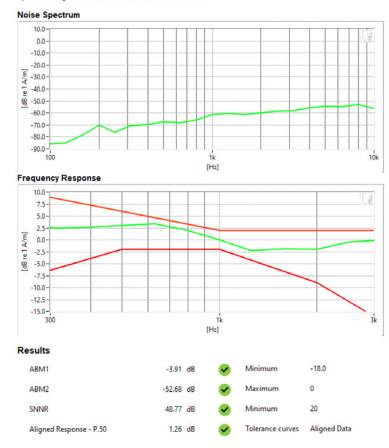

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ minuted	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 59 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 39 01 93



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

#### **Test Configuration:**

 Mode: LTE FDD Band 66 Bandwidth: 20MHz Channel: 132572

Speech Signal: ITU-T P.50 Artificial Voice

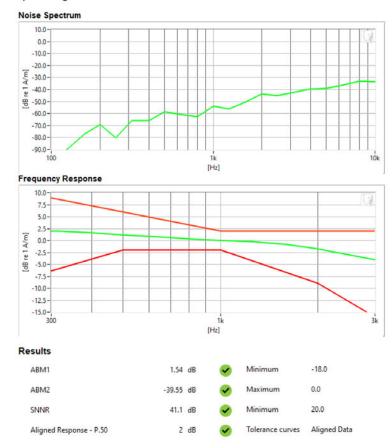

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 60 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 60 of 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

#### **Test Configuration:**

Mode: 2.4GHz WIFIStandard: IEEE 802.11b

Channel: 6

· Speech Signal: ITU-T P.50 Artificial Voice

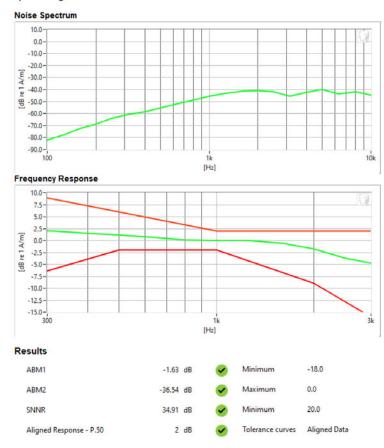

FCC ID: ZNFK300TM	PCTEST* Proud to be past of @ interest	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 61 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage of 01 95



Type: Portable Handset Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

#### **Test Configuration:**

- Mode: 5GHz WIFI
- Standard: IEEE 802.11n (U-NII 3)
- Bandwidth: 20MHz
- Channel: 157
- Speech Signal: ITU-T P.50 Artificial Voice

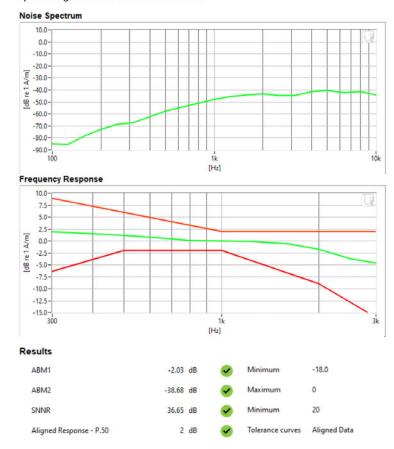

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 62 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 62 01 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/19/2018


#### **Test Configuration:**

VoIP Application: Google Duo

Mode: EDGE 850

· Channel: 190

· Speech Signal: ITU-T P.50 Artificial Voice

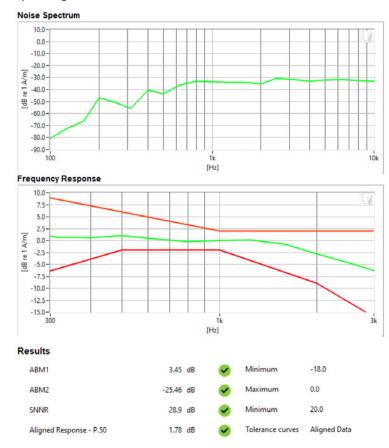

FCC ID: ZNFK300TM	PCTEST* Proof to be part of @ stormed	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 63 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 63 of 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011


#### **Equipment:**

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

### **Test Configuration:**

Mode: Secondary Cellular CDMA

Channel: 684

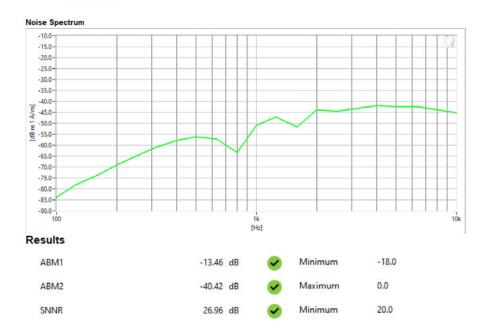

FCC ID: ZNFK300TM	PCTEST* Proud to be post of @ connect	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 64 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 64 of 95



Type: Portable Handset Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

#### **Test Configuration:**

 Mode: Cellular CDMA Channel: 1013

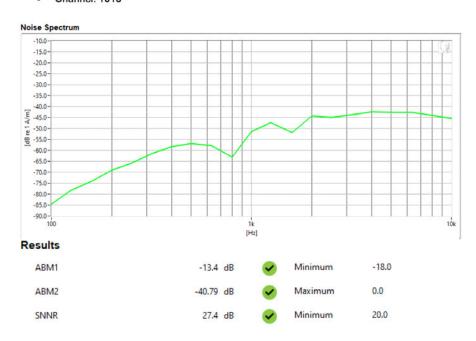

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ contract	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 65 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 65 of 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### **Equipment:**

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

### **Test Configuration:**

Mode: PCS CDMAChannel: 600



FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 66 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 60 01 95



#### **DUT: ZNFK300TM** Type: Portable Handset

Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/19/2018

#### **Test Configuration:**

 Mode: GSM 850 Channel: 251

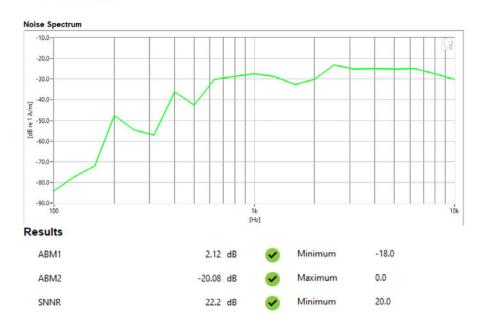

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 67 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 07 01 95



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/19/2018

#### **Test Configuration:**

 Mode: GSM 1900 Channel: 810



FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 68 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 00 01 95



Type: Portable Handset Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/19/2018

#### **Test Configuration:**

 Mode: UMTS Band V Channel: 4233

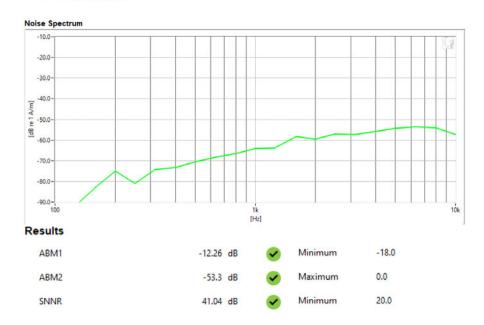

FCC ID: ZNFK300TM	PCTEST* Proud to be part of @ element	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 69 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 69 of 95



Type: Portable Handset Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/19/2018

#### **Test Configuration:**

 Mode: UMTS Band IV Channel: 1513

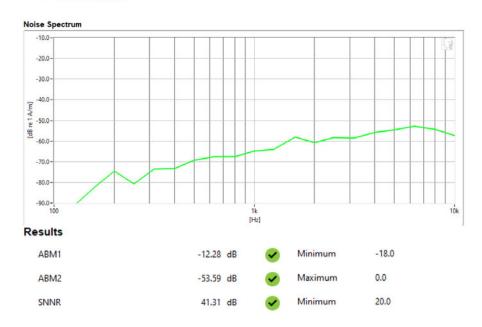

FCC ID: ZNFK300TM	PCTEST* Proud to be port of the innerest	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 70 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 70 of 95



Type: Portable Handset Serial: 10268


Measurement Standard: ANSI C63.19-2011

#### **Equipment:**

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/19/2018

### **Test Configuration:**

 Mode: UMTS Band II Channel: 9538

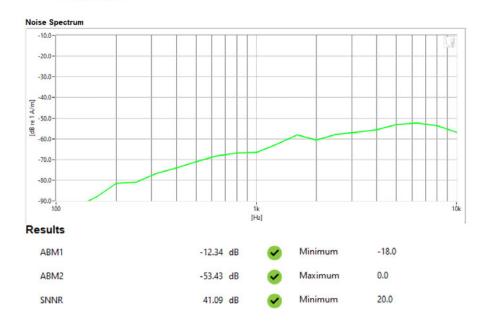

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 71 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		



Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### **Equipment:**

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

### **Test Configuration:**

Mode: LTE FDD Band 66Bandwidth: 20MHzChannel: 132572



FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 72 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 72 01 95



# **DUT: ZNFK300TM**

Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011


#### **Equipment:**

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

#### **Test Configuration:**

Mode: 2.4GHz WFI Standard: IEEE 802.11b

Channel: 6

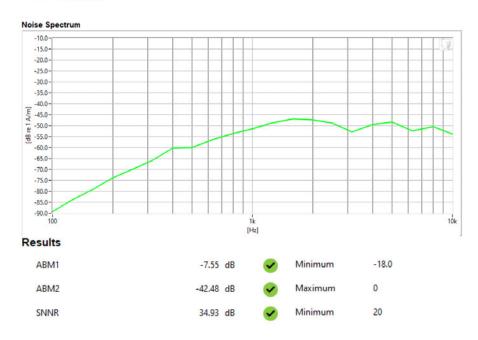

## PCTEST 2020

FCC ID: ZNFK300TM	PCTEST* Proud to be post of @ connect	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 73 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 73 01 93



# **DUT: ZNFK300TM**

Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011

#### **Equipment:**

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019


#### **Test Configuration:**

Mode: 5GHz WIFI

Standard: IEEE 802.11n (U-NII 2C)

Bandwidth: 20MHz Channel: 116



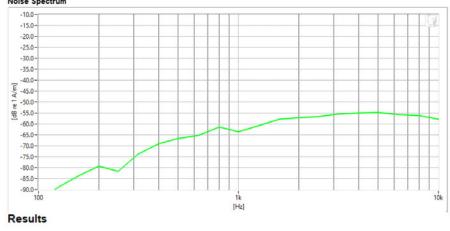

ABM1	-7.28	dB	$\checkmark$	Minimum	-18.0
ABM2	-51.72	dB	•	Maximum	0.0
SNNR	44.44	dB	•	Minimum	20.0

## PCTEST 2020

FCC ID: ZNFK300TM	PCTEST* Proud to be post of @ monand	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 74 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 74 01 95



# **DUT: ZNFK300TM**

Type: Portable Handset Serial: 10268

Measurement Standard: ANSI C63.19-2011


#### **Equipment:**

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

#### **Test Configuration:**

· VolP Application: Google Duo

Mode: EDGE 850 Channel: 190

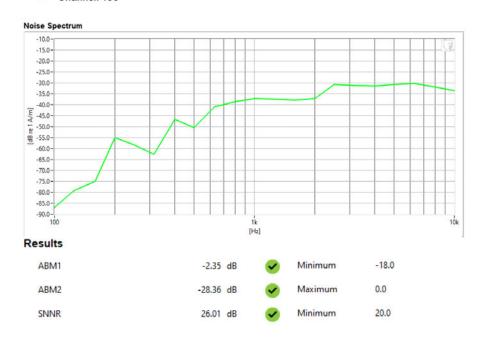

## PCTEST 2020

FCC ID: ZNFK300TM	PCTEST* Proud to be post of @ connect	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 75 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 75 01 95

#### **CALIBRATION CERTIFICATES** 13.

FCC ID: ZNFK300TM	PCTEST* Provid to be post of @ second	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 76 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 70 01 95

REV 3.5.M © 2020 PCTEST



# **Certificate of Calibration**

for

#### AXIAL T COIL PROBE

Manufactured by:

TEM CONSULTING LP

Model No:

AXIAL T COIL PROBE

Serial No: Calibration Recall No: TEM-1123 29156

Submitted By:

Customer:

Andrew Harwell

Company:

**PCTest Engineering Lab** 

Address:

6660-B Dobbin Road

Columbia

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM C

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration. The information supplied relates to the calibrated item listed above. West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2008 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by: Fc

Calibration Date:

19-Sep-18

Felix Christopher (QA Mgr.)

Certificate No:

29156 -2

West Caldwell

ISO/IEC 17025:2005

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

ACCREDITED

Calibration uncompromised calibration Laboratories, Inc.

Calibration Lab. Cert. # 1533.01

1575 State Route 96, Victor, NY 14564, U.S.A.

Approved by: FCC ID: ZNFK300TM HAC (T-COIL) TEST REPORT 📆 LG Quality Manager

1M2002250026-10-R1.ZNF

Test Dates:

**DUT Type:** 

Portable Handset

Page 77 of 95

© 2020 PCTEST

Filename:

3/16/2020 - 3/31/2020



1575 State Route 96, Victor NY 14564



# REPORT OF CALIBRATION

TEM Consulting LP Axial T Coil Probe Company: PCTest Enginering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1123 I. D. No.: XXXX

Calibration results: Probe Sensitivity measured with Helmholtz Coil Helmholtz Coll; Before & after data same: ... X ... the number of turns on each coil; 10 No. 0.204 Laboratory Environment: the radius of each coil, in meters; Ambient Temperature: °C 0.08 22.7 Α the current in the coils, in amperes.; 7.09 A/m/V Ambient Humidity: % RH Helmholtz Coil Constant; Helmholtz Coil magnetic field; 5.95 A/m Ambient Pressure: 99.326 Calibration Date: 19-Sep-2018 Calibration Due: Probe Sensitivity at 1000 Hт -59.89 dBV/A/m. Report Number: 29156 -2 was 1.013 mV/A/m Control Number: 29156 903 Ohms Probe resistance


The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers:

683/284413-14

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

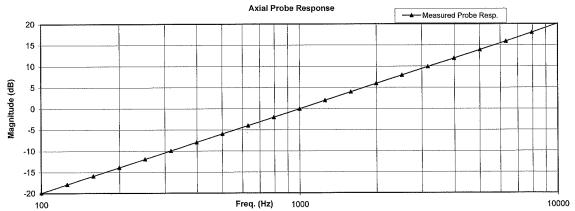

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, IŞØ)17025

Cal. Date: 19-Sep-2018

Measurements performed by: ......

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

FCC ID: ZNFK300TM	PCTEST* Proud to be port of the elements	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 78 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 76 01 95

# HCATEMC\_TEM-1123\_Sep-19-2018

## West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Enginering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1123

Function	Tolerance			Measured values			
			Before	Out	Remarks		
Probe Sensitivity at	1000 Hz.	dBV/A/m	-59.89				
		dB					
Probe Level Linearity		6	6.03				
	Ref. (0 dB)	0	0.00				
		-6	-6.03				
		-12	-12.05				
	***************************************	Hz					
Probe Frequency Response							
	Ref. (0 dB)		1				
			1				
			1				
			1				
		10000	20.1				
		Probe Sensitivity at 1000 Hz.  Probe Level Linearity  Ref. (0 dB)	Probe Sensitivity at 1000 Hz. dBV/A/m  Probe Level Linearity 6 Ref. (0 dB) 0 -6 -12  Probe Frequency Response 100 126 158 200 251 316 398 501 631 794	Probe Sensitivity at 1000 Hz. dBV/A/m -59.89  Probe Level Linearity 6 6 6.03 Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12.05  Probe Frequency Response 100 -19.9 158 -15.9 200 -13.9 251 -11.9 316 -9.9 398 -7.9 501 -6.0 631 -4.0 794 -2.0 Ref. (0 dB) 1000 0.0 1259 2.0 1585 4.0 1995 5.9 2512 7.9 3162 9.9 3981 11.9 5012 13.9 6310 15.9 7943 18.0	Probe Sensitivity at 1000 Hz. dBV/A/m -59.89  Probe Level Linearity  Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12.05  Probe Frequency Response 100 -19.9 126 -17.9 158 -15.9 200 -13.9 251 -11.9 316 -9.9 398 -7.9 501 -6.0 631 -4.0 794 -2.0 Ref. (0 dB) 1000 0.0 1259 2.0 1585 4.0 1995 5.9 2512 7.9 3162 9.9 3981 11.9 5012 13.9 6310 15.9 7943 18.0		

Instruments used for o	alibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,287708	25-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,287708	25-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,287708	25-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/284413-14	25-Jul-2019

Cal. Date: 19-Sep-2018


Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

FCC ID: ZNFK300TM	PCTEST* Proof to be past of @ steemed	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 79 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 79 01 95



# **Certificate of Calibration**

for

AXIAL T COIL PROBE

Manufactured by:

TEM CONSULTING AXIAL T COIL PROBE

Model No: Serial No:

TEM-1124

Calibration Recall No: 29973

Submitted By:

Customer:

ANDREW HARWELL

Company: Address: PCTEST ENGINEERING LAB

6660-B DOBBIN ROAD COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM C

V K94 6/4/2019

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.
The information supplied relates to the calibrated item listed above.
West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

QA Doc. #1051 Rev. 2.0 10/1/01

17-May-19

James Zhu

Certificate No:

29973 -1

Quality Manager ISO/IEC 17025:2005

West Caldy

1 Certificate Page 1 of 1 West Caldwell A Calibration

ACCREDITED

uncompromised calibration Laboratories, Inc.

Calibration Lab. Cert. # 1533.01

1575 State Route 96, Victor, NY 14564, U.S.A.

FCC ID: ZNFK300TM PCTEST HAC (T-COIL) TEST REPORT

LG LG

Approved by: Quality Manager

Filename: 1M2002250026-10-R1.ZNF Test Dates: 3/16/2020 - 3/31/2020

DUT Type:

Portable Handset

Page 80 of 95



Calibration Lab. Cert. # 1533.01

ISO/IEC 17025: 2005

1575 State Route 96, Victor NY 14564

# REPORT OF CALIBRATION

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Labs

Model No.: Axial T Coil Probe

Serial No.: TEM-1124

I. D. No.: XXXX

Probe Sensitivity measured wit	h Helmhol	tz Coil			
Helmholtz Coil;			Before & after data same:	<b>x</b>	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.09	Α	Ambient Temperature:	20.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	42.7	% RH
Helmholtz Coil magnetic field;	5.96	A/m	Ambient Pressure:	98.256	kPa
			Calibration Date:	17-May-2019	
Probe Sensitivity at	1000	Hz.	Calibration Due:	17-May-2020	
was	-60.41	dBV/A/m	Report Number:	29973	-1
	0.954	mV/A/m	Control Number:	29973	
Probe resistance	903	Ohms			


The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers:

683/290345-18

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

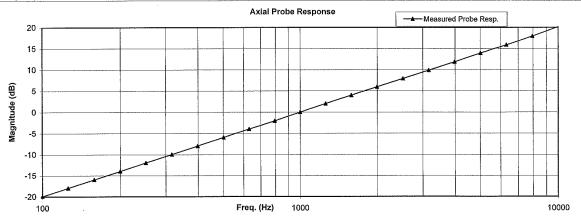

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 17025

Cal. Date: 17-May-2019

Measurements performed by: ......

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 81 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 61 01 95

## HCATEMC\_TEM-1124\_May-17-2019

#### West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

Model No.: Axial T Coil Probe

Serial No.: TEM-1124

**TEM Consulting LP Axial T Coil Probe** Company: PCTest Engineering Labs

Function  Probe Sensitivity at  Probe Level Linearity	1000 Hz.	dBV/A/m dB	Before -60.41	Out	Remarks
**************************************	1000 Hz.		-60.41		
Probe Level Linearity		dВ			
Probe Level Linearity		4D			
		6	6.10		
	Ref. (0 dB)	0	0.00		
		-6	-6.00		ŀ
		-12	-12.00		
		Hz			
Probe Frequency Response		100	-19.9		
		3			
		1			
		i i			
	Ref. (0 dB)		I .		
			1		
			1		
					1
		10000	20.2		
	Probe Frequency Response		-6 -12 Probe Frequency Response 100 126 158 200 251 316 398 501 631 794	Ref. (0 dB)  Ref. (0 dB)  Ref. (0 dB)  Ref. (0 dB)  -6 -6 -6.00 -12.00  Hz -19.9 -19	Ref. (0 dB)  Ref. (0 dB)

			'		
Instruments used for o	alibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019
1					

Cal. Date: 17-May-2019


Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

FCC ID: ZNFK300TM	POTEST Proof to be part of the post of the	HAC (I-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 82 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 62 01 95

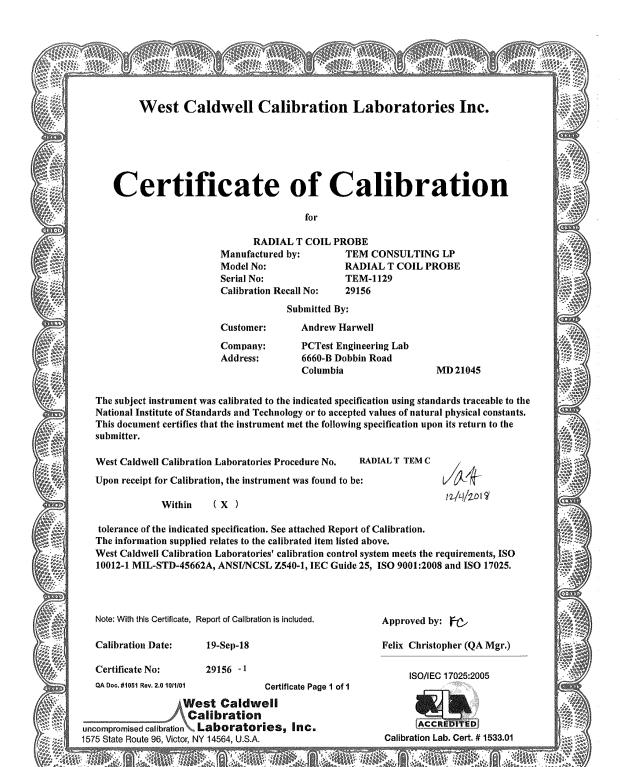

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dogo 92 of 05	
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 83 of 95	

© 2020 PCTEST

#### HCRTEMC\_TEM-1129\_Sep-19-2018



1575 State Route 96, Victor NY 14564



# REPORT OF CALIBRATION

TEM Consulting LP Radial T Coil Probe ,Company: PCTest Engineering Lab

Model No.: Radial T Coil Probe

Serial No.: TEM-1129

I. D. No.: XXXX


Probe Sensitivity measured wit	h Heimhol	tz Coil			
Helmholtz Coil;			Before & after data same:	<b>X</b>	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.08	Α	Ambient Temperature:	22.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	52.1	% RH
Helmholtz Coil magnetic field;	5.95	A/m	Ambient Pressure:	99.326	kPa
			Calibration Date:	19-Sep-2018	
Probe Sensitivity at	1000	Hz.	Re-calibration Due:		
was	-60.37	dBV/A/m	Report Number:	29156	-1
	0.958	mV/A/m	Control Number:	29156	
Probe resistance	886	Ohms			

This Calibration is traceable through NIST test numbers:

683/284413-14

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

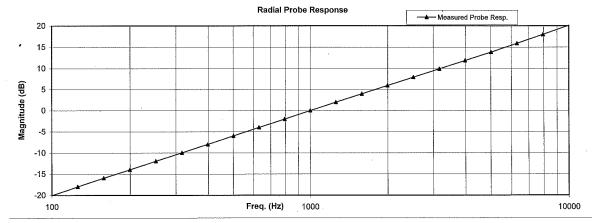

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISQ 17025

Cal. Date: 19-Sep-2018

Measurements performed by: ...... James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the internet	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 84 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 64 01 95

## HCRTEMC\_TEM-1129\_Sep-19-2018

## West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

for Model No.: Radial T Coil Probe

Serial No.: TEM-1129

Function	Tolera	nce	Measured values			
hala sa	——————————————————————————————————————		Before	Out	Remarks	
Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37			
		dB				
Probe Level Linearity		6	6.03			
	Ref. (0 dB)	0	0.00			
		-6	-6.03			
		-12	-12.05			
		Hz				
Probe Frequency Response						
	Ref. (0 dB)					
			1			
			18.0			
		10000	20.1			
		Probe Level Linearity Ref. (0 dB)	Probe Level Linearity  Ref. (0 dB)  Ref. (0 dB)	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37  Probe Level Linearity 6 6 6.03 Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12.05  Probe Frequency Response 100 -20.0 126 -17.9 158 -15.9 200 -14.0 251 -12.0 316 -10.0 398 -8.0 501 -6.0 631 -4.0 794 -2.0 Ref. (0 dB) 1000 0.0 1259 2.0 1885 4.0 1995 6.0 2512 7.9 3162 9.9 3981 11.9 5012 13.9 6310 15.9 7943 18.0	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37    Probe Level Linearity	

Instruments used for o	alibration:		Date of Cal.	Traceability No.	Due Date
' HP	34401A	S/N US360641	25-Jul-2018	,287708	25-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,287708	25-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,287708	25-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/284413-14	25-Jul-2019

Cal. Date: 19-Sep-2018

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

FCC ID: ZNFK300TM	PCTEST: HAC (T-COIL) TEST REPORT		LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 85 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 63 01 95



# **Certificate of Calibration**

for

#### RADIAL T COIL PROBE

Manufactured by:

TEM CONSULTING

Model No:

RADIAL T COIL PROBE

Serial No: Calibration Recall No: TEM-1130 29973

#### Submitted By:

Customer:

ANDREW HARWELL

Company: Address: PCTEST ENGINEERING LAB 6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

6/4/2019

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above.

West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015 and ISO 17025.

Note: With this Certificate, Report of Calibration is Included.

Approved by:

Calibration Date:

17-May-19

Certificate No:

29973 -2

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1
West Caldwell

uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

James Zhu Quality Manager ISO/IEC 17025:2005



Calibration Lab. Cert. # 1533.01

FCC ID: ZNFK300TM

PCTEST

HAC (T-COIL) TEST REPORT

Filename:

1M2002250026-10-R1,ZNF

3/16/2020 - 3/31/2020

Portable Handset

Approved by:
Quality Manager

Page 86 of 95

© 2020 PCTEST

REV 3.5.N



1575 State Route 96, Victor NY 14564



# REPORT OF CALIBRATION

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Labs

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

I. D. No.: XXXX

Probe Sensitivity measured wit	h Helmholi	tz Coil			
Helmholtz Coil;			Before & after data same:	<b>X</b>	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.08	Α	Ambient Temperature:	20.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	42.7	% RH
Helmholtz Coil magnetic field;	5.94	A/m	Ambient Pressure:	98.256	kPa
			Calibration Date:	17-May-2019	
Probe Sensitivity at	1000	Hz.	Calibration Due:	17-May-2020	
was	-60.37	dBV/A/m	Report Number:	29973	-2
	0.958	mV/A/m	Control Number:	29973	1
Probe resistance	895	Ohms			


The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers:

683/290345-18

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

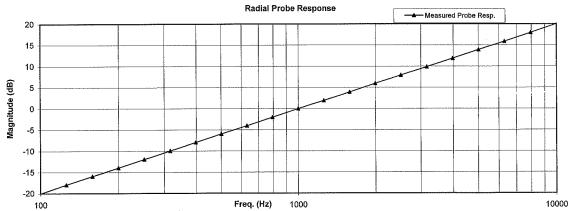

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 17025

Cal. Date: 17-May-2019

Measurements performed by: ......

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

FCC ID: ZNFK300TM	POTEST* Proud to be post of @ control	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 87 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 67 01 95

# HCRTEMC\_TEM-1130\_May-17-2019

#### West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

for

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Labs

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

Test	Function	Tolera	nce	Me	asured val	ues
				Before	Out	Remarks
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37		
			dB			
2.0	Probe Level Linearity		6	6.00		
		Ref. (0 dB)	0	0.00		1
			-6	-6.10		
			-12	-12.10		
			Hz			
3.0	Probe Frequency Response		100	-20.0		
		126	-17.9			
			158	-16.0		1
			200	-14.0		
			251	-12.0		
			316	-10.0		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
		Ref. (0 dB)	1000	0.0		
			1259	1.9		
			1585	3.9		
			1995	5.9		İ
			2512	7.9		
			3162	9.9		
			3981	11.9		
			5012	13.9		
			6310	15.9		
			7943	18.0		
			10000	20.1		

Instruments used for o	alibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

FCC ID: ZNFK300TM	PCTEST* Proof to be pet of @ stement	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 88 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 66 01 95

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 89 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 69 01 95

# 14. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFK300TM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 90 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Fage 90 01 95

#### 15. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, "IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- 11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, " U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- 12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report, Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

FCC ID: ZNFK300TM	PCTEST* Provid to be post of @ second	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 91 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		rage 91 01 95

© 2020 PCTEST **REV 3.5.M** 

- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements. AIP Press.

FCC ID: ZNFK300TM	PCTEST* Proud to be part of the element	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 92 of 95
1M2002250026-10-R1.ZNF	3/16/2020 - 3/31/2020	Portable Handset		Page 92 01 95