

Test Report



Product: Detector

Trade Mark: N/A

Model Number: T06S

FCC ID: 2BKBX-T06S

Prepared for

Shenzhen Weilin Huachuang Technology Co., Ltd
4/F, Building D, Youth Pioneer Park, Jianshe East Road, Qinghua
Community, Longhua District, Shenzhen

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China
Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110
Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	DESCRIPTION OF EUT	5
1.2	TEST MODE.....	5
1.3	TEST SETUP	5
1.4	ANCILLARY EQUIPMENT	5
2	SUMMARY OF TEST RESULT	6
3	TEST FACILITIES AND ACCREDITATIONS	7
3.1	TEST LABORATORY	7
3.2	ENVIRONMENTAL CONDITIONS	7
3.3	MEASUREMENT UNCERTAINTY	7
3.4	TEST SOFTWARE	7
4	LIST OF TEST EQUIPMENT	8
5	EMC EMISSION TEST	9
5.1	CONDUCTED EMISSION	9
5.2	RADIATED EMISSION	13
6	PHOTOGRAPHS OF THE TEST SETUP.....	19
7	PHOTOGRAPHS OF THE EUT	21

TEST RESULT CERTIFICATION

Applicant's Name : Shenzhen Weilin Huachuang Technology Co.,Ltd
Address : 4/F, Building D, Youth Pioneer Park, Jianshe East Road,
Qinghua Community, Longhua District, Shenzhen
Manufacturer's Name : Shenzhen Weilin Huachuang Technology Co.,Ltd
Address : 4/F, Building D, Youth Pioneer Park, Jianshe East Road,
Qinghua Community, Longhua District, Shenzhen

Product description

Product name : Detector
Model Number : T06S

Standards : E-CFR Title 47 Part 15 Subpart B
Test procedure..... : ANSI C63.4: 2014

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test :

Date (s) of performance of tests : Mar. 28, 2025~ Apr. 02, 2025

Test Result..... : **Pass**

Testing Engineer :




(Z o e S u)

Technical Manager :



(G a r y L u)

Authorized Signatory :



(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	Detector
Model name:	T06S
Series Model:	N/A
Different of series model:	N/A
Battery:	DC 3.7V, 500mAh
Power supply:	Input: 5V=1A Battery: DC 3.7V
Adapter information:	N/A

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	Charging Mode
2	RF detection Mode
3	Magnetic field detection Mode
4	Infrared detection Mode

Test Item	Final Test Mode
Conducted Emissions	1
Radiated Emissions 30 to 1000 MHz	1
Radiated Emissions 1 GHz to 6 GHz	2

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Adapter	CD289	35810	Ugreen Group Limited
Phone	iPhone 12pro MXA	FF2LDX4T60 D5H	Apple Inc.

2 Summary of Test Result

Test procedures according to the technical standards:

E-CFR Title 47 Part 15 Subpart B					
No.	Standard Section	Test Item	Limit	Result	Remark
1	15.107	Conducted Emissions	Class B	Pass	
2	15.109	Radiated Emissions	Class B	Pass	
Note: 1. "N/A" means the test case does not apply to the test object.					

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site:	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location:	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

A. Conducted Measurement:

Measurement Frequency Range	U, (dB)	Note
150 kHz to 30 MHz	2.5	AC Power Port

B. Radiated Measurement:

Measurement Frequency Range	U, (dB)	Note
30 MHz to 1000 MHz	4.2	/
1 GHz to 6 GHz	4.7	/

3.4 Test Software

Software name	Manufacturer	Model	Version
Conducted Emission test Software	Farad	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission test Software	Farad	EZ-EMC	FA-03A2

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2024-05-18	2026-05-17
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2024-05-18	2026-05-17
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 91270	01193	2024-05-18	2026-05-17
4	HB-E005	Preamplifier	Noyetec	LAN-0118	NYCM1420102	2024-05-17	2025-05-16
5	HB-E006	Preamplifier	Noyetec	LAN-1840	NYCM1420103	2024-05-17	2025-05-16
6	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2024-05-17	2025-05-16
7	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
8	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM1420204	/	/
9	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2024-05-21	2025-05-20
10	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2024-05-18	2026-05-17
11	HB-E076	Preamplifier	Hewlett Packard	8447D	1937A02278	2024-05-17	2025-05-16
Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2024-05-17	2025-05-16
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2024-05-17	2025-05-16
3	HB-E016	ZN23201	Noyetec	ZN23201	N/A	2024-05-21	2025-05-20
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2024-05-17	2025-05-16
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2024-05-17	2025-05-16

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 EMC Emission Test

5.1 Conducted Emission


5.1.1 Limits

Limits – Class A		
Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	79	66
0.5 to 30	73	60
Limits – Class B		
Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note: 1. the tighter limit applies at the band edges. 2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.		


5.1.2 Test Procedures


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.1.3 Test setup

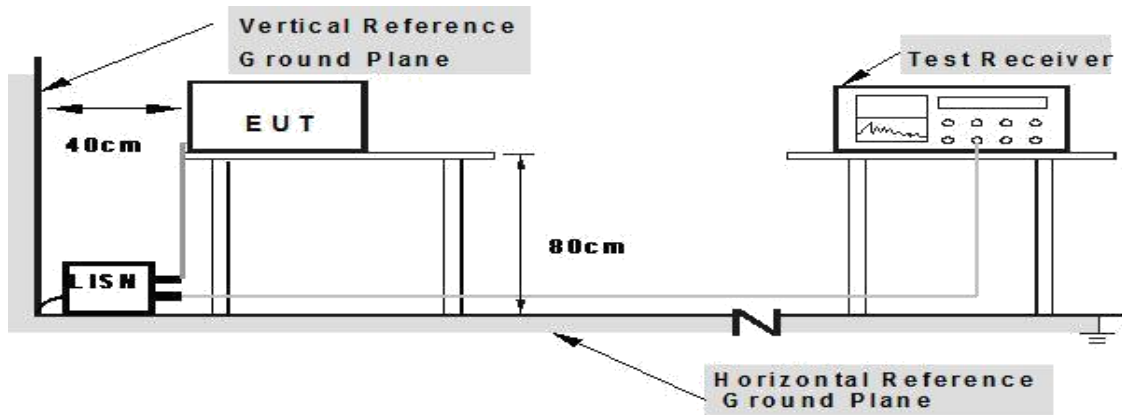

5.1.4 Test Result

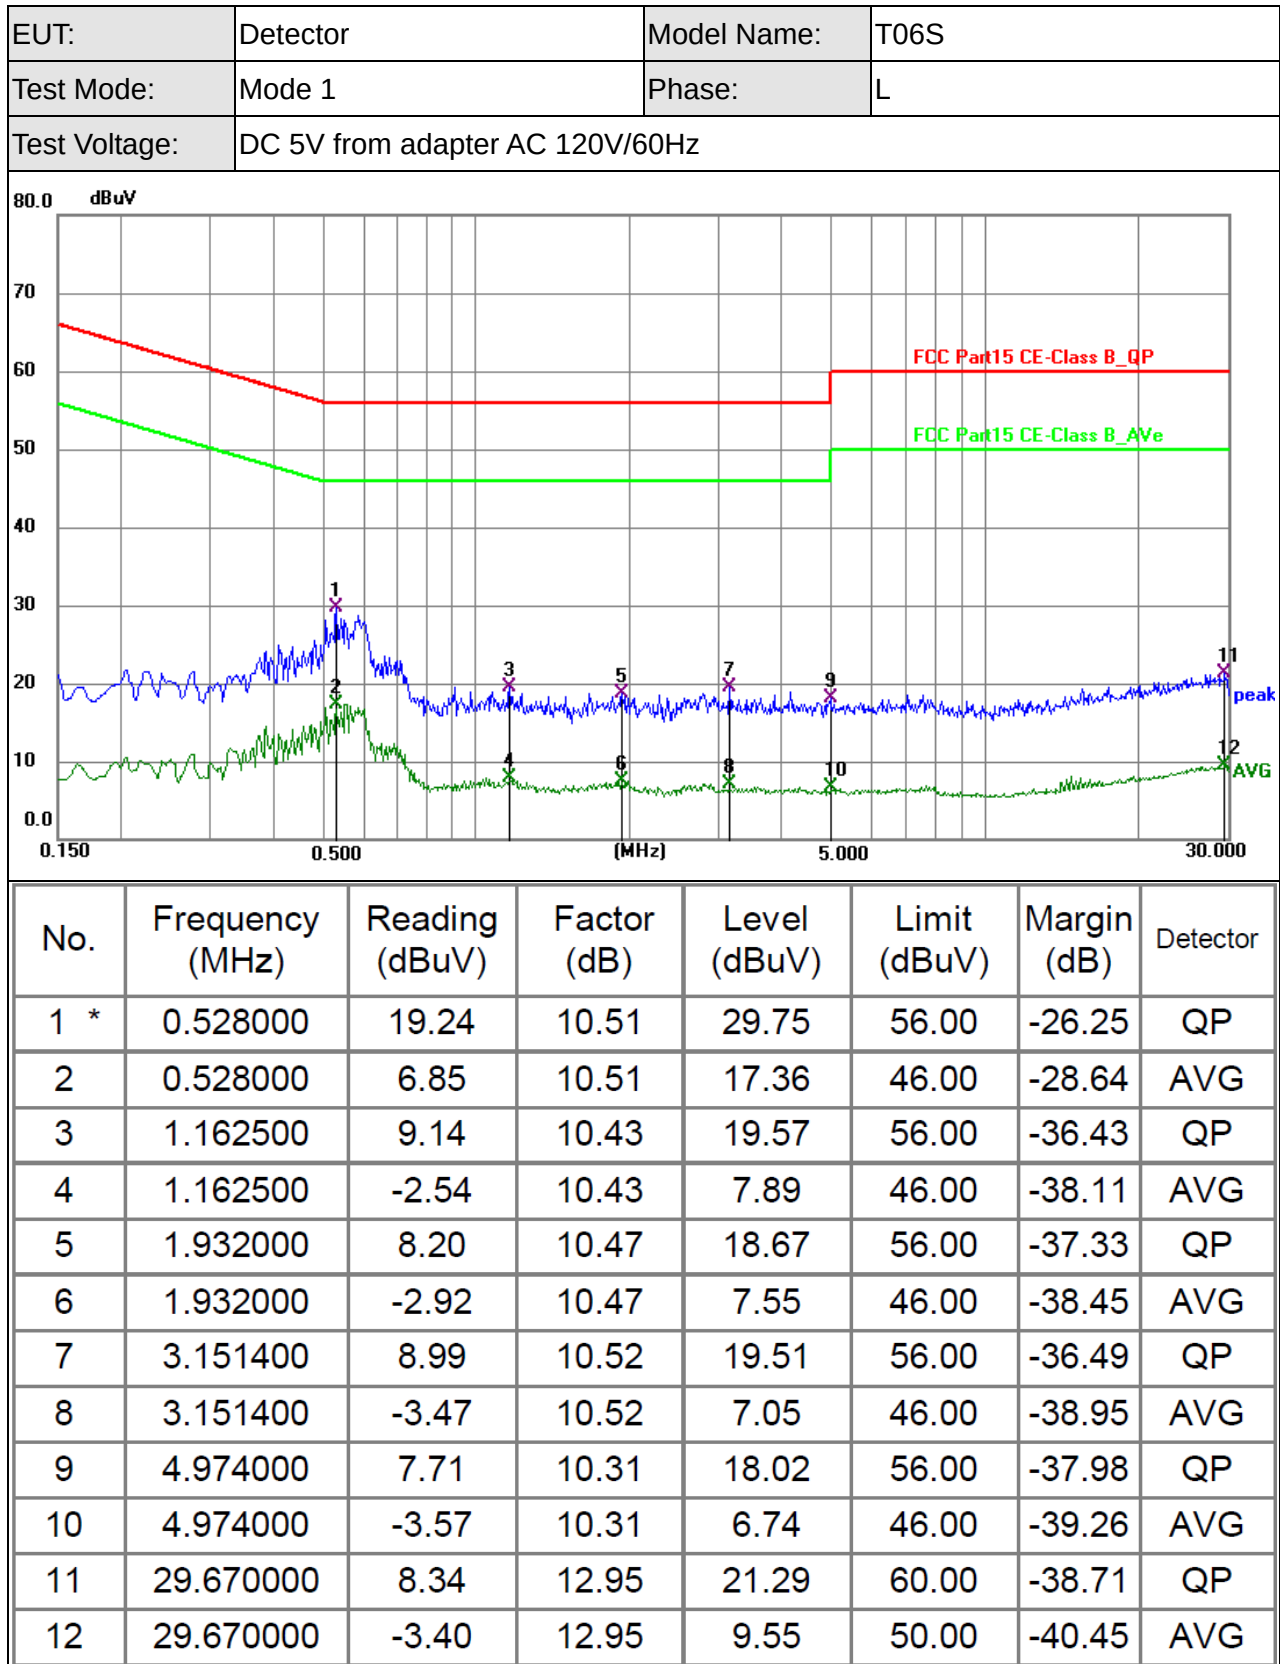

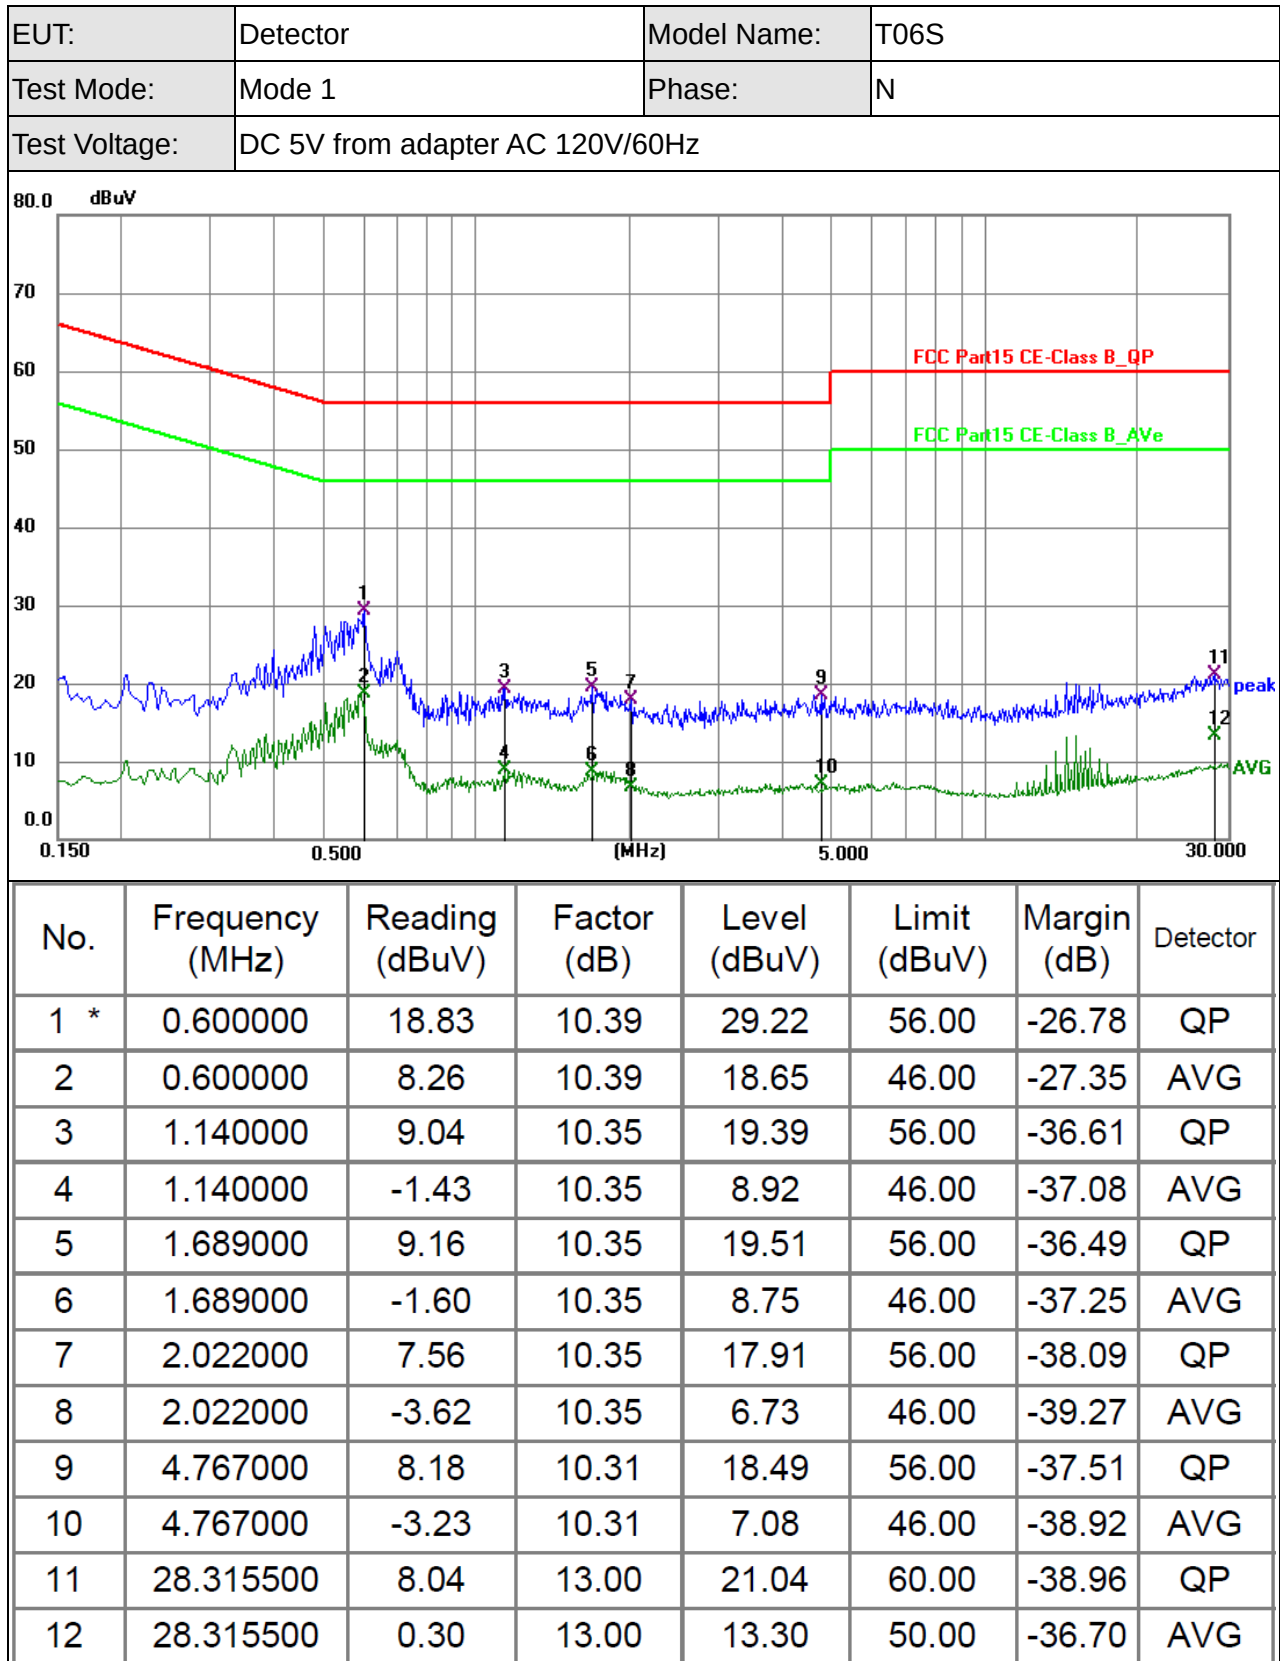

5.2 Radiated Emission

5.2.1 Limits


Limits – Class A at 3 m		
Frequency (MHz)	Quasi-Peak(dBμV/m)	Average(dBμV/m)
30 to 88	49	/
88 to 216	53.5	/
216 to 960	56.4	/
960 to 1000	59.5	/
Above 1000	84	64
Limits – Class B at 3 m		
Frequency (MHz)	Quasi-Peak(dBμV/m)	Average(dBμV/m)
30 to 88	40	/
88 to 216	43.5	/
216 to 960	46	/
960 to 1000	54	/
Above 1000	74	54

5.2.2 Test Procedures


- The radiated emission tests were performed in the 3 meters.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- For the actual test configuration, please refer to the related item – EUT test photos.

5.2.3 Test Setup

Radiated emission test-up frequency for 30MHz - 1GHz:

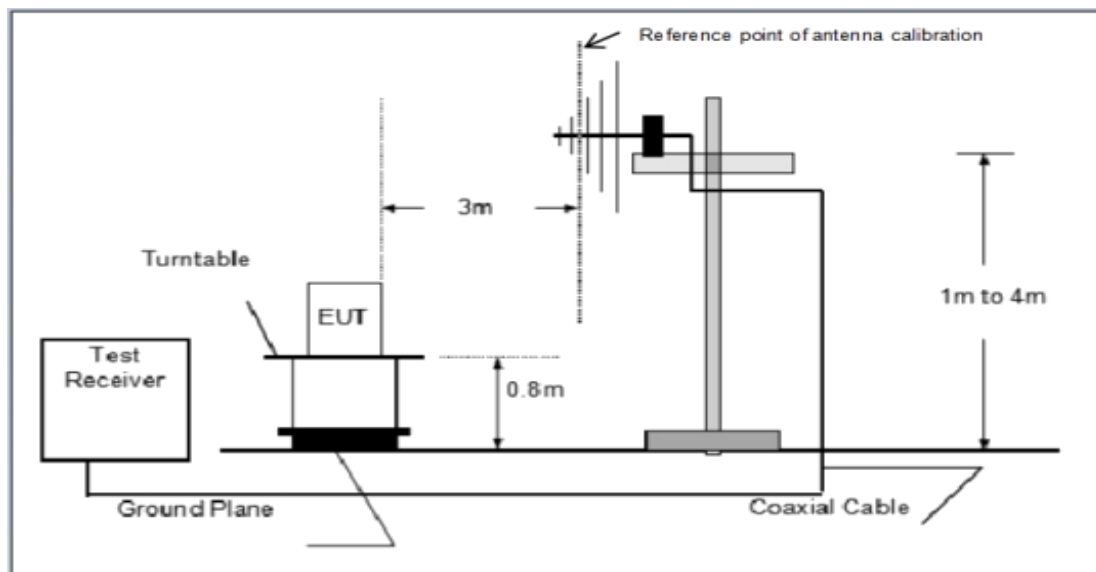

Radiated emission test-up frequency for above 1GHz:

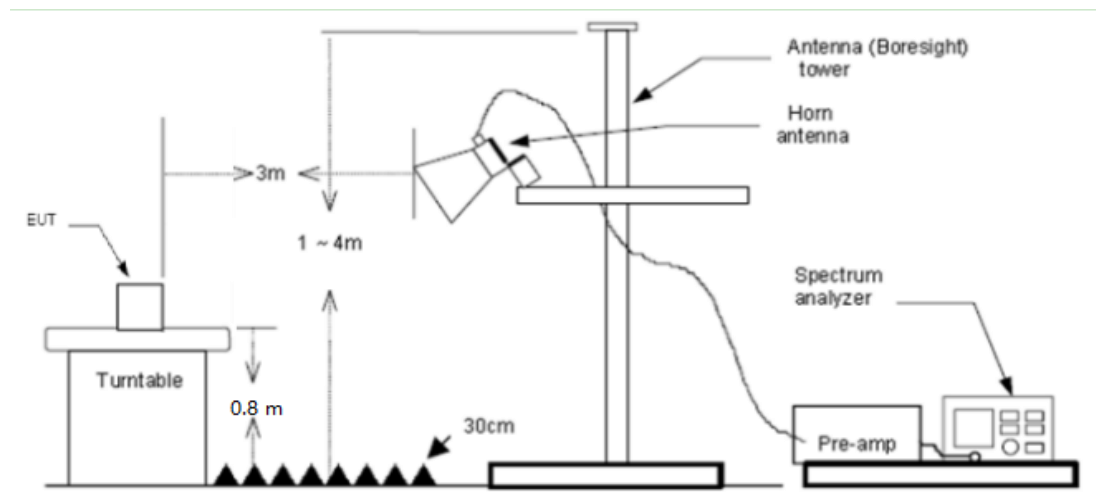

5.2.4 Test Result


Note: the highest working frequency of EUT is above 108MHz.

Formula:

Measurement Level (dBuV/m) = Reading Level (dBuV/m) + Correct Factor (dBuV/m)


Margin Level (dBuV/m) = Measurement Level (dBuV/m) – Limit Level (dBuV/m)

EUT:	Detector	Model Name:	T06S
Test Mode:	Mode 1	Phase:	Horizontal
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

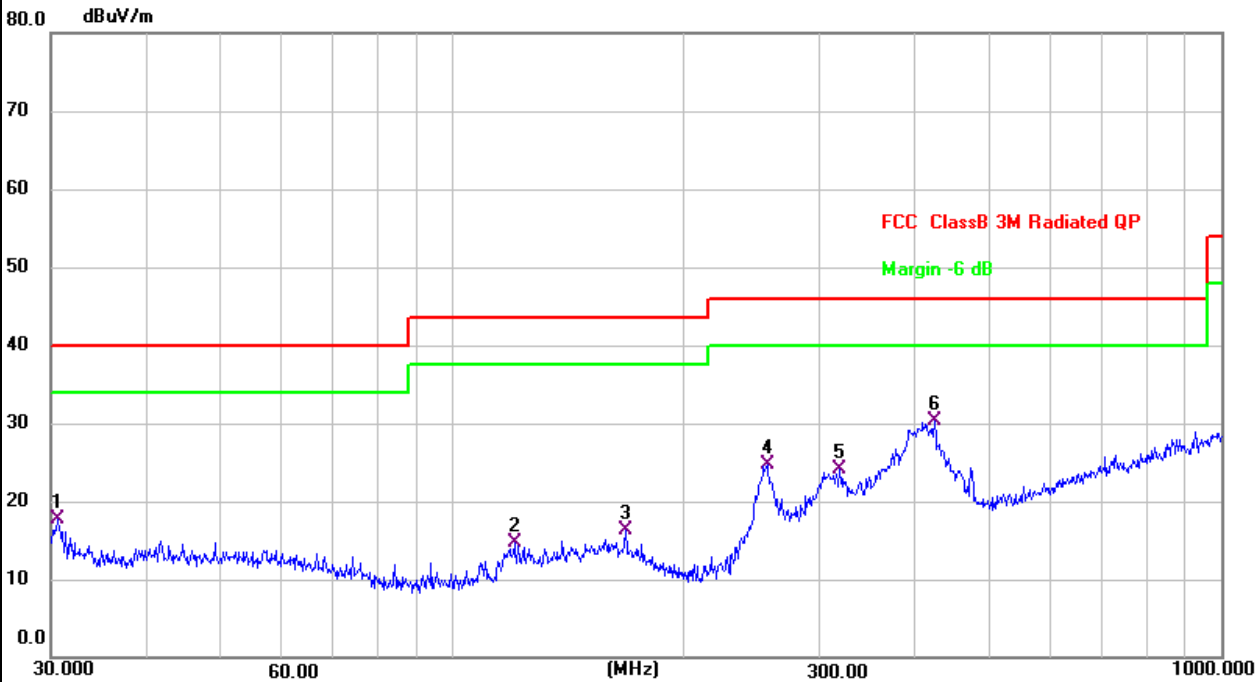


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.6379	33.06	-15.27	17.79	40.00	-22.21	QP
2	120.2766	30.20	-15.44	14.76	43.50	-28.74	QP
3	167.8243	29.77	-13.50	16.27	43.50	-27.23	QP
4	256.5211	39.02	-14.29	24.73	46.00	-21.27	QP
5	318.8170	36.28	-12.15	24.13	46.00	-21.87	QP
6 *	423.5403	39.24	-8.90	30.34	46.00	-15.66	QP

EUT:	Detector	Model Name:	T06S
Test Mode:	Mode 1	Phase:	Vertical
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

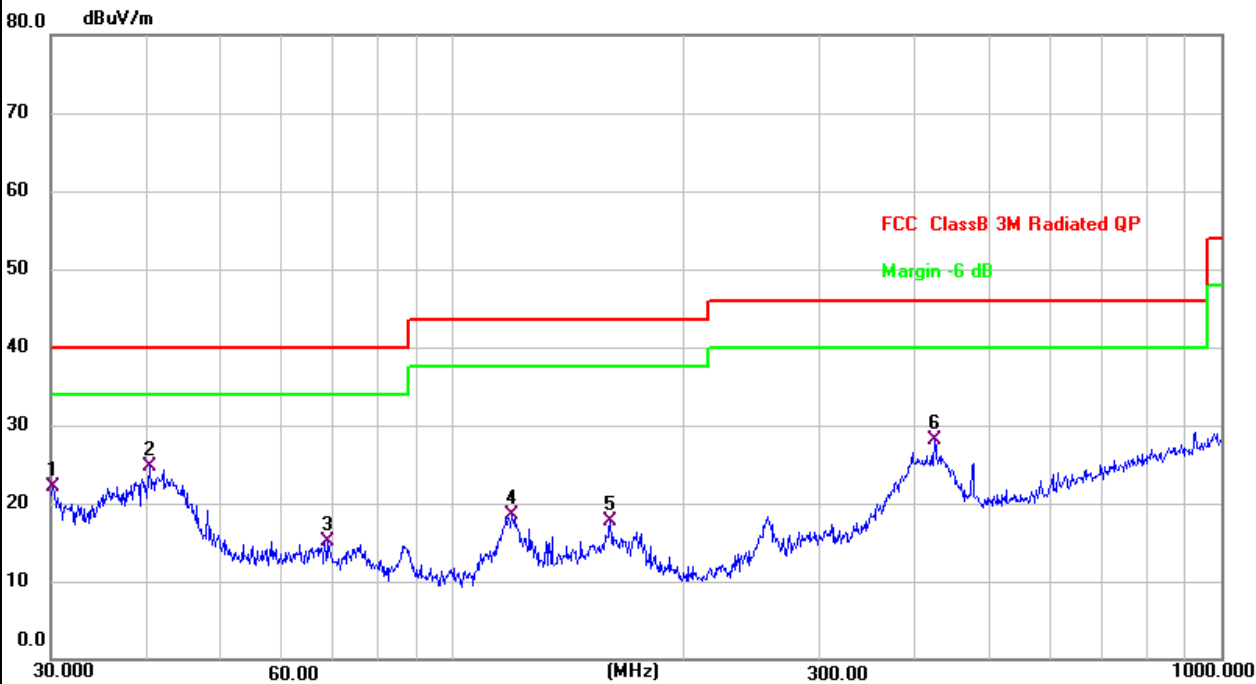


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.2111	37.52	-15.32	22.20	40.00	-17.80	QP
2 *	40.4172	38.68	-14.00	24.68	40.00	-15.32	QP
3	68.6310	31.02	-15.83	15.19	40.00	-24.81	QP
4	119.4361	34.13	-15.59	18.54	43.50	-24.96	QP
5	160.3456	31.16	-13.40	17.76	43.50	-25.74	QP
6	423.5403	36.95	-8.90	28.05	46.00	-17.95	QP

EUT:	Detector	Model Name:	T06S
Test Mode:	Mode 2	Phase:	Horizontal
Test Voltage:	DC 3.7V from battery		

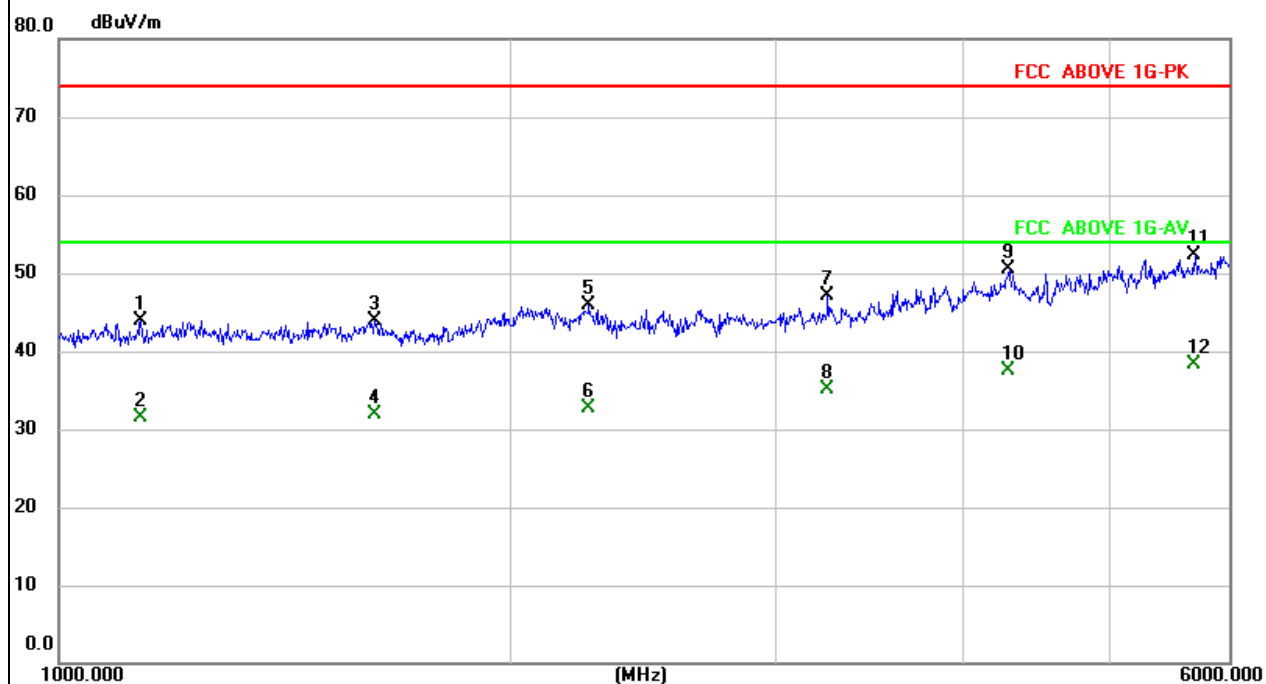

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1133.628	47.16	-3.16	44.00	74.00	-30.00	peak
2	1133.628	34.66	-3.16	31.50	54.00	-22.50	AVG
3	1622.187	46.51	-2.68	43.83	74.00	-30.17	peak
4	1622.187	34.58	-2.68	31.90	54.00	-22.10	AVG
5	2251.658	46.31	-0.33	45.98	74.00	-28.02	peak
6	2251.658	33.03	-0.33	32.70	54.00	-21.30	AVG
7	3245.229	45.28	1.75	47.03	74.00	-26.97	peak
8	3245.229	33.45	1.75	35.20	54.00	-18.80	AVG
9	4284.092	43.97	6.47	50.44	74.00	-23.56	peak
10	4284.092	31.03	6.47	37.50	54.00	-16.50	AVG
11	5696.195	42.47	9.76	52.23	74.00	-21.77	peak
12 *	5696.195	28.64	9.76	38.40	54.00	-15.60	AVG

EUT:	Detector	Model Name:	T06S
Test Mode:	Mode 2	Phase:	Vertical
Test Voltage:	DC 3.7V from battery		

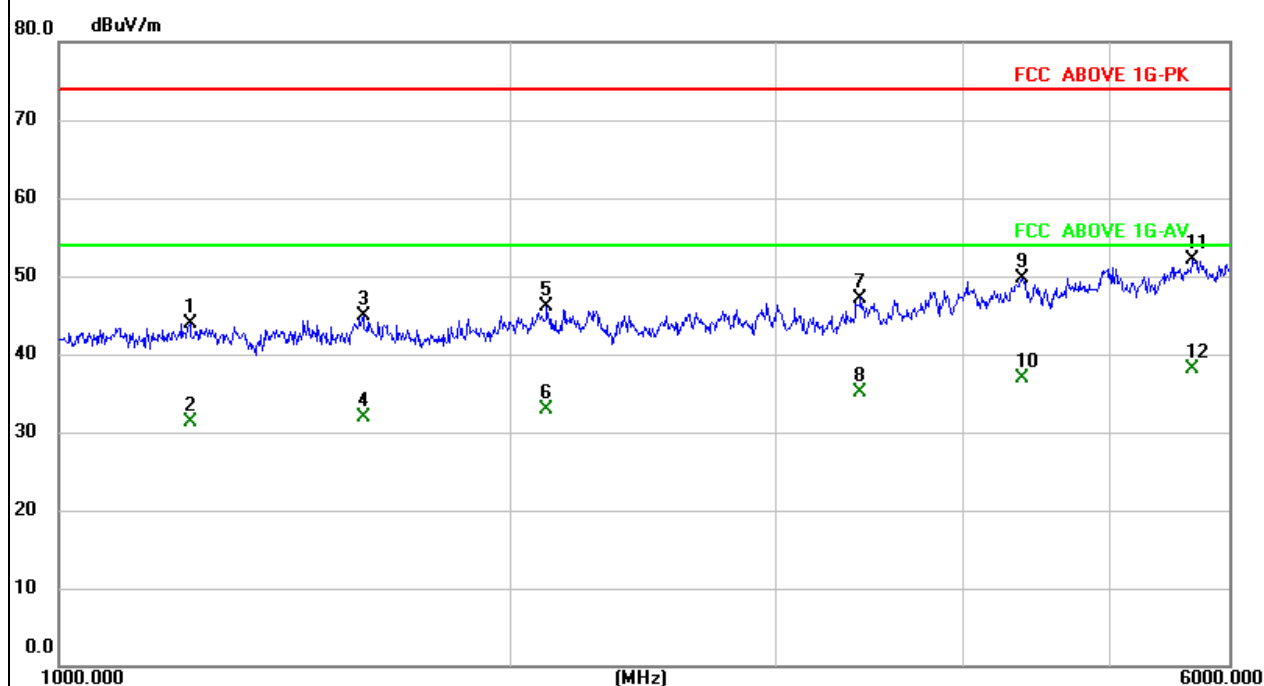

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1222.230	46.81	-2.91	43.90	74.00	-30.10	peak
2	1222.230	34.21	-2.91	31.30	54.00	-22.70	AVG
3	1593.380	47.47	-2.62	44.85	74.00	-29.15	peak
4	1593.380	34.52	-2.62	31.90	54.00	-22.10	AVG
5	2111.004	46.13	-0.12	46.01	74.00	-27.99	peak
6	2111.004	33.02	-0.12	32.90	54.00	-21.10	AVG
7	3412.193	45.26	1.94	47.20	74.00	-26.80	peak
8	3412.193	33.16	1.94	35.10	54.00	-18.90	AVG
9	4369.367	42.93	6.83	49.76	74.00	-24.24	peak
10	4369.367	30.07	6.83	36.90	54.00	-17.10	AVG
11	5675.819	42.62	9.45	52.07	74.00	-21.93	peak
12 *	5675.819	28.75	9.45	38.20	54.00	-15.80	AVG

6 Photographs of the Test Setup


Radiated Emission Below 1GHz



Radiated Emission Above 1GHz



Conducted Emission

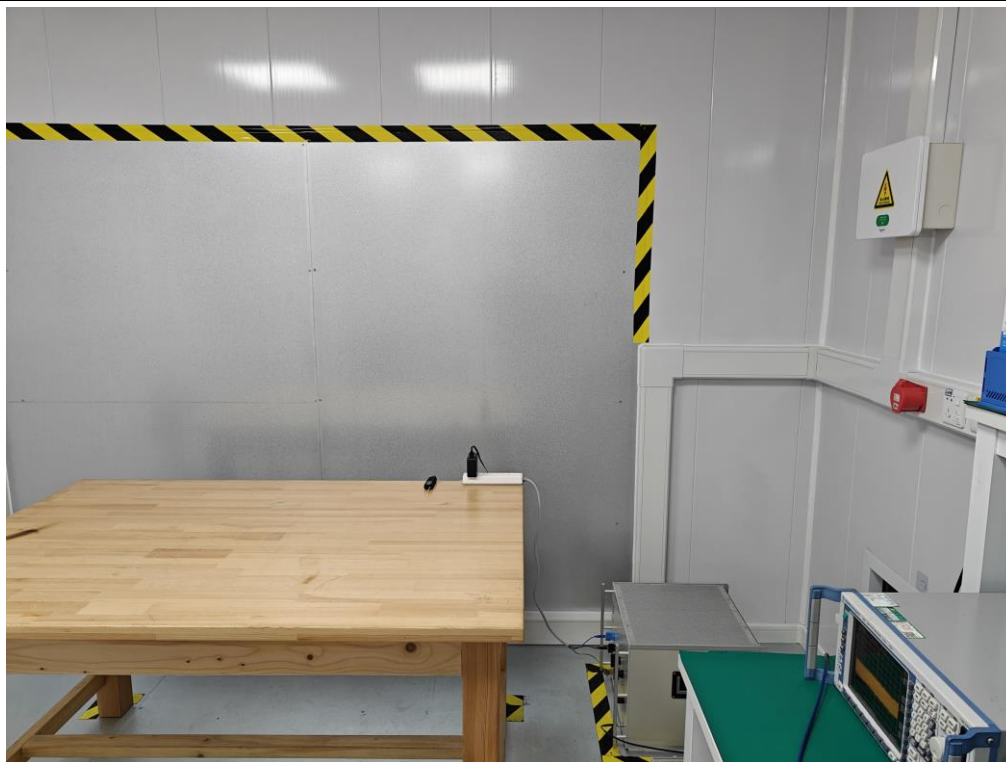

7 Photographs of the EUT

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8

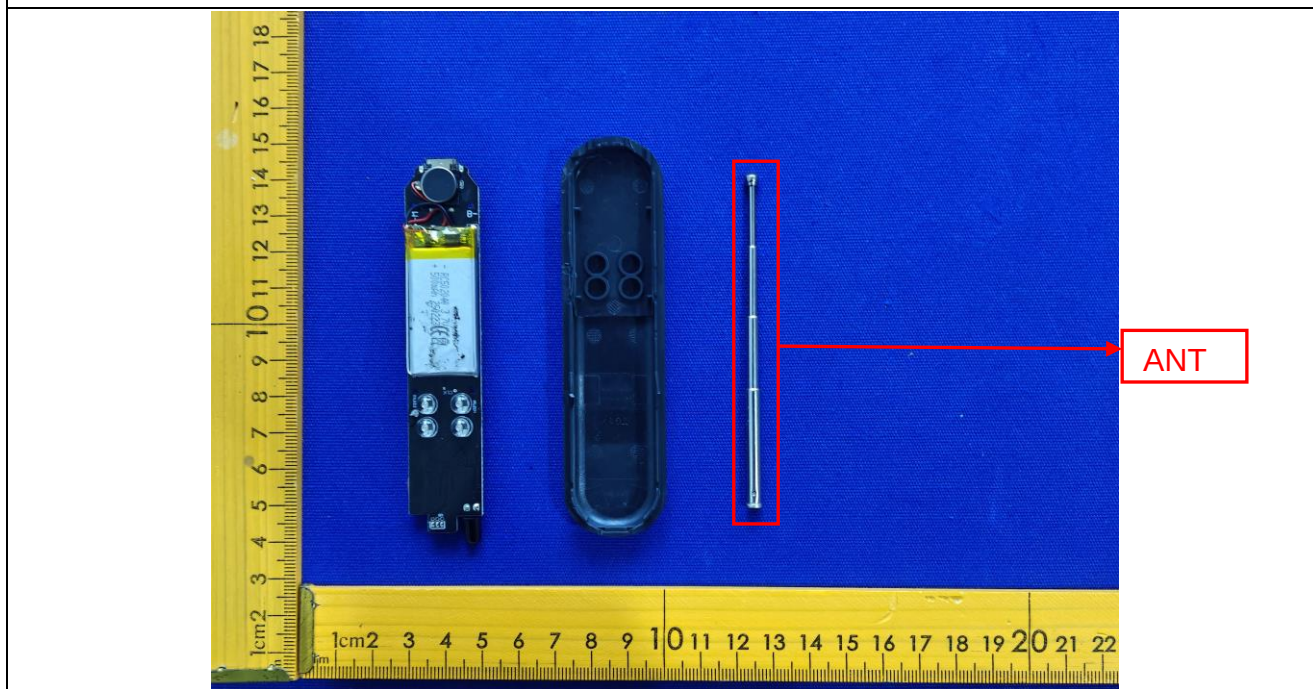


Photo 9


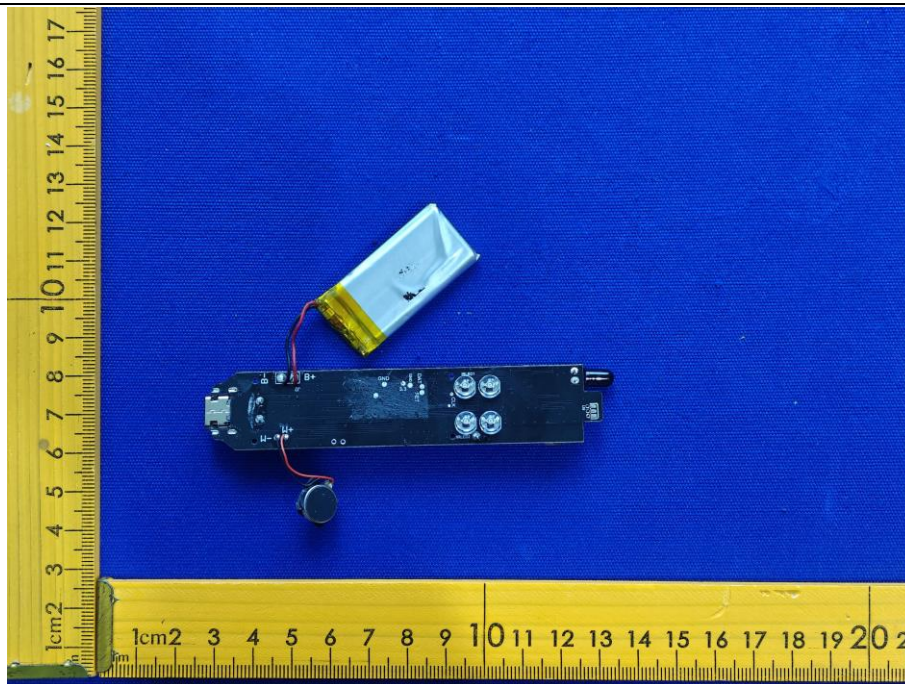


Photo 10

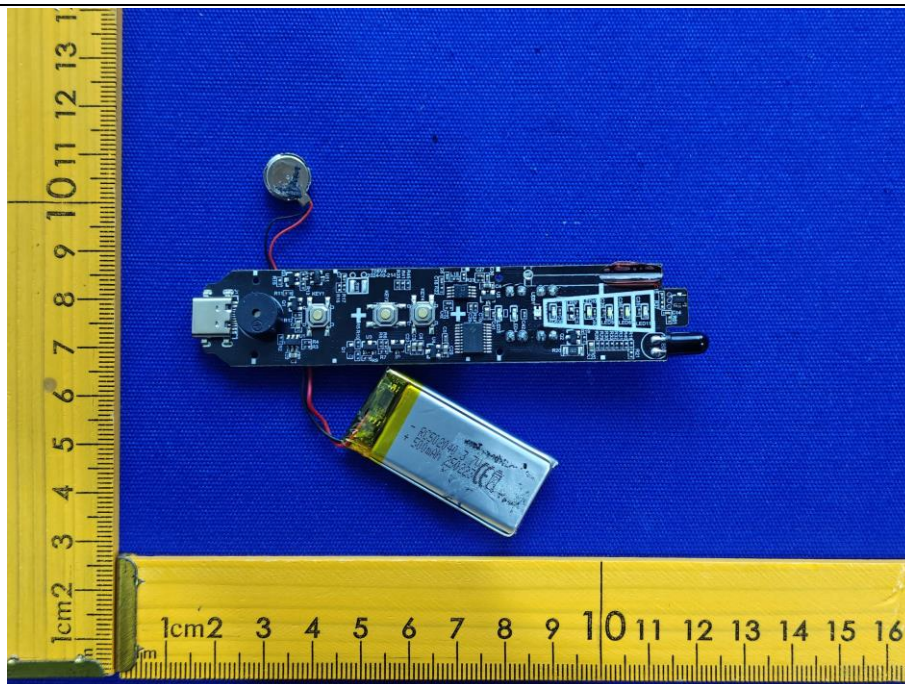

***** END OF REPORT *****