



Valued Quality. Delivered.

## TEST REPORT

**Report Number: 17020267HKG-001**

Application  
for  
Original Grant of 47 CFR Part 15 Certification

Hunting Camera

**FCC ID: 2ALGTBTC9-10**

This report contains the data of (Wi-Fi) portion only.

Prepared and Checked by:

Approved by:

***Signed On File***

Leung Sung Tak, Andy  
Engineer

---

Koo Wai Ip  
Technical Supervisor  
March 22, 2017

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)

## INTERTEK TESTING SERVICES

---

### GENERAL INFORMATION

<b>Applicant Name:</b>	Prometheus Group LLC
<b>Applicant Address:</b>	P.O. Box 130100, Birmingham, Alabama 35213-0100, USA.
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2015 Edition
<b>FCC ID:</b>	2ALGTBTC9-10
<b>FCC Model(s):</b>	BTC-9D
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	Hunting Camera
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	February 13, 2017
<b>Date of Test:</b>	February 13, 2017 to February 20, 2017
<b>Report Date:</b>	March 22, 2017
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 Test Results Summary &amp; Statement of Compliance</b>	<b>5</b>
1.1 Summary of Test Results	5
1.2 Statement of Compliance	5
<b>2.0 General Description</b>	<b>7</b>
2.1 Product Description	7
2.2 Test Methodology	8
2.3 Test Facility	8
2.4 Related Submittal(s) Grants	8
<b>3.0 System Test Configuration</b>	<b>10</b>
3.1 Justification	10
3.2 EUT Exercising Software	11
3.3 Details of EUT and Description of Accessories	12
3.4 Measurement Uncertainty	12
<b>4.0 Test Results</b>	<b>16</b>
4.1 Maximum Conducted Output Power at Antenna Terminals	16
4.2 Minimum 6dB RF Bandwidth	16
4.3 Maximum Power Spectral Density	23
4.4 Out of Band Conducted Emissions	30
4.5 Field Strength Calculation	40
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	41
4.6.1 Radiated Emission Configuration Photograph	41
4.6.2 Radiated Emission Data	41
4.6.3 Radiated Emission Test Setup	52
4.6.4 Transmitter Duty Cycle Calculation	53
4.7 AC Power Line Conducted Emission	54
<b>5.0 Equipment List</b>	<b>56</b>

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**

## INTERTEK TESTING SERVICES

---

### 1.0 Test Results Summary & Statement of Compliance

#### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	Results	Details see section
Antenna Requirement	15.203	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	Pass	4.2
Max. Power Density (average)	15.247(e)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	N/A	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

#### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2015 Edition

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 2 GENERAL DESCRIPTION**

## INTERTEK TESTING SERVICES

---

### 2.0 General Description

#### 2.1 Product Description

The Equipment-Under-Test (EUT) BTC-9D is a Hunting Camera. The EUT contains a WIFI (b/g/n) and a Bluetooth 4.0 BLE modules. The EUT is powered by 12.0VDC (4 x 3.0V "CR2032" batteries). The video can be transferred via WIFI or micro USB port to Smartphone or PC. The Bluetooth portion is for the connection between the EUT and Apps. An iOS/Android Apps installed in Smartphone can act as the remote control of the EUT.

##### For the Bluetooth 4.0 module:

For Bluetooth 4.0 BLE mode, it occupies a frequency range from 2402MHz to 2480MHz (40 channels with channel spacing of 2MHz). It transmits via GFSK modulation.

##### For the Wi-Fi module:

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

## INTERTEK TESTING SERVICES

---

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v04 (05-April-2017). All other measurements were made in accordance with the procedures in 47 CFR Part 2.

### 2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

### 2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (WiFi portion)



## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 3 SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 3.0 **System Test Configuration**

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by new 12.0VDC (4 x 3.0V "CR2032" batteries).

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.

## INTERTEK TESTING SERVICES

---

### 3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM.

### 3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## INTERTEK TESTING SERVICES

---

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

A battery (provided with the unit) was used to power the device. Their description are listed below.

- (1) A new 12.0VDC (4 x 3.0V "CR2032" batteries) (Provided by Intertek)

#### Description of Accessories:

There are no accessories for compliance of this product.

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 4 TEST RESULTS**


## INTERTEK TESTING SERVICES

### 4.0 Test Results

#### 4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

##### RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 1 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	13.2	20.893
Middle Channel: 2437	13.8	23.988
High Channel: 2462	14.5	28.184

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 1 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	20.9	123.027
Middle Channel: 2437	21.3	134.896
High Channel: 2462	22.1	162.181

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 1 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	21.4	138.038
Middle Channel: 2437	22.5	177.828
High Channel: 2462	22.8	190.546

## INTERTEK TESTING SERVICES

---

### 4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function  
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)  
max. conducted (peak) output level = 14.5 dBm

IEEE 802.11g (OFDM, 9 Mbps)  
max. conducted (peak) output level = 22.1 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)  
max. conducted (peak) output level = 22.8 dBm

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ \_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi

The plots of conducted output power are saved as below.

## INTERTEK TESTING SERVICES

### 4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	10.32
Middle Channel: 2437	10.24
High Channel: 2462	10.24

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	16.64
Middle Channel: 2437	16.64
High Channel: 2462	16.64

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	17.76
Middle Channel: 2437	17.84
High Channel: 2462	17.76

#### Limits

6 dB bandwidth shall be at least 500kHz


The plots of 6dB RF bandwidth are saved as below.



## INTERTEK TESTING SERVICES


### Plots of 6dB RF bandwidth

802.11b, Lowest Channel

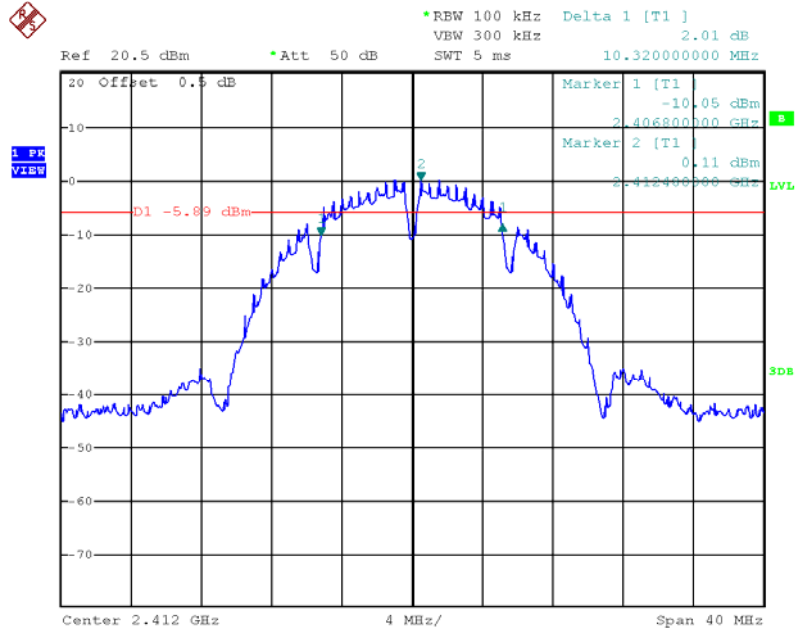

Date: 20.FEB.2017 09:48:12

802.11b, Middle Channel

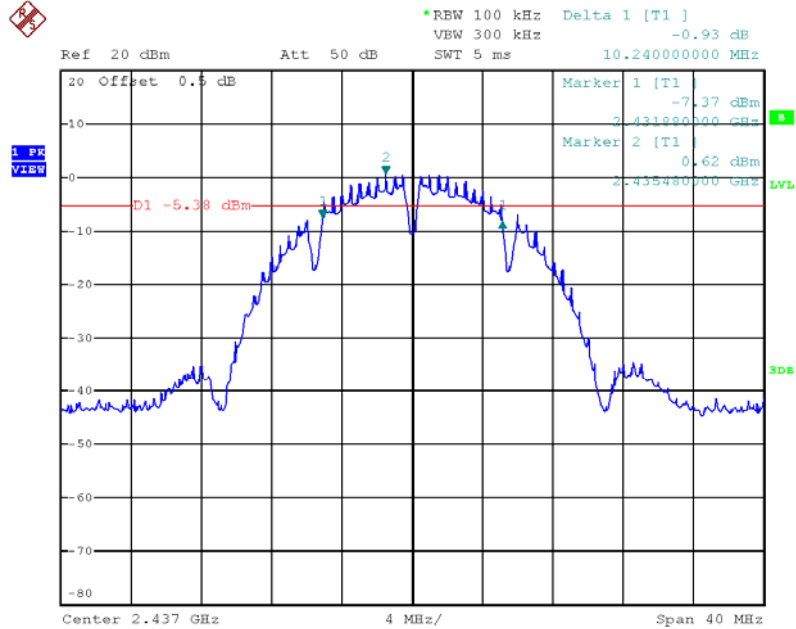


Date: 20.FEB.2017 10:06:06

## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11b, Highest Channel

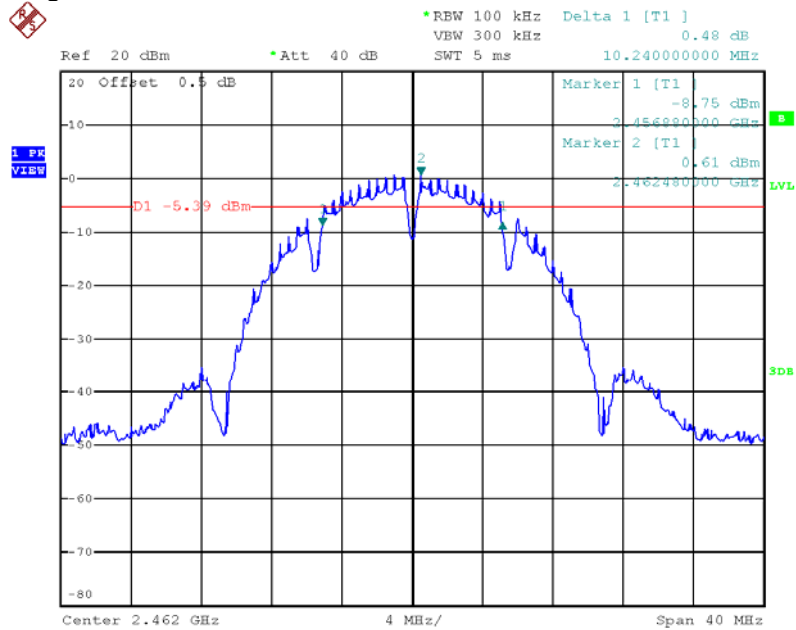


Date: 20.FEB.2017 10:13:54

## INTERTEK TESTING SERVICES


### Plots of 6dB RF bandwidth

802.11g, Lowest Channel

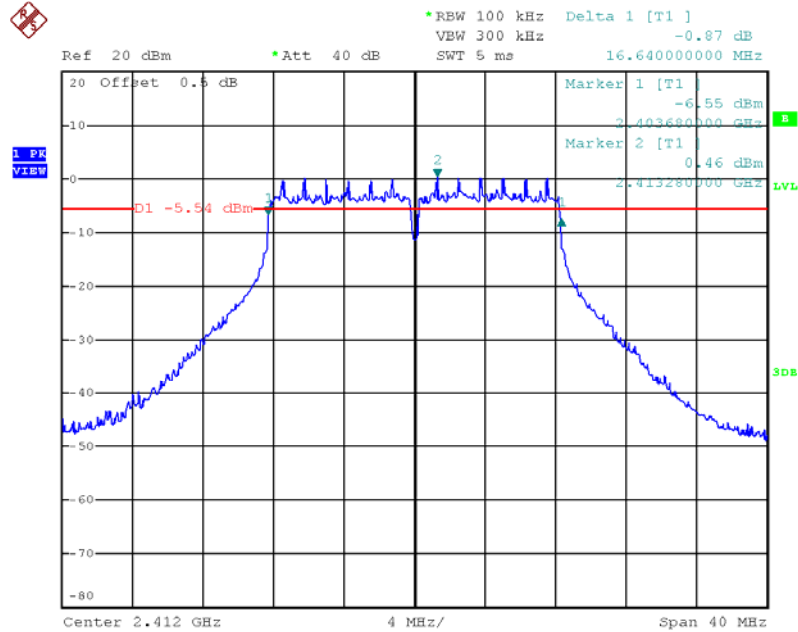

Date: 20.FEB.2017 10:21:17

802.11g, Middle Channel

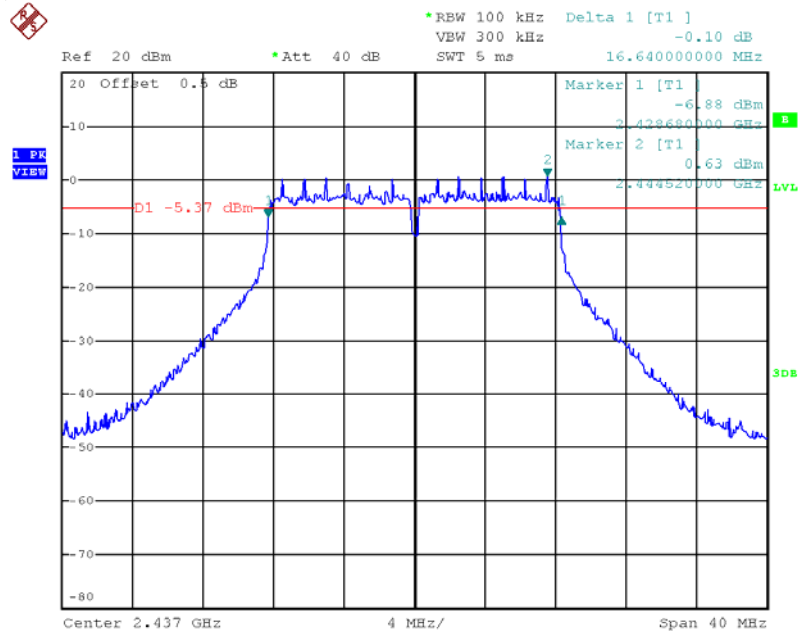


Date: 20.FEB.2017 10:27:55

## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11g, Highest Channel

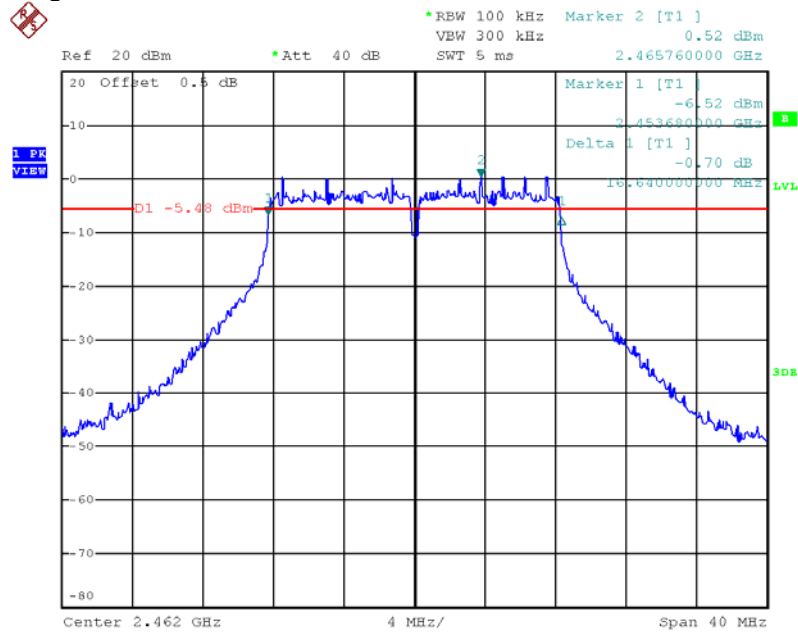


Date: 20.FEB.2017 11:18:21

## INTERTEK TESTING SERVICES


### Plots of 6dB RF bandwidth

802.11n (20MHz), Lowest Channel

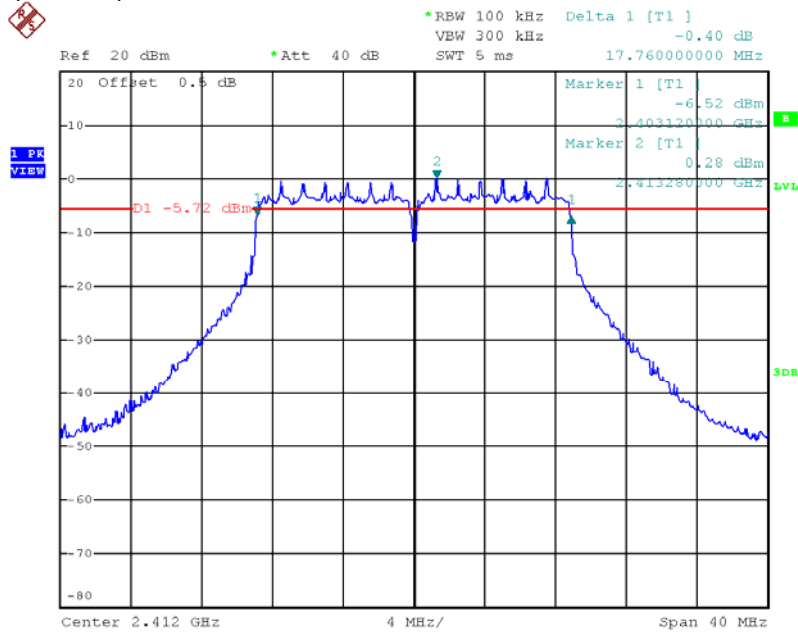

Date: 20.FEB.2017 10:54:00

802.11n (20MHz), Middle Channel

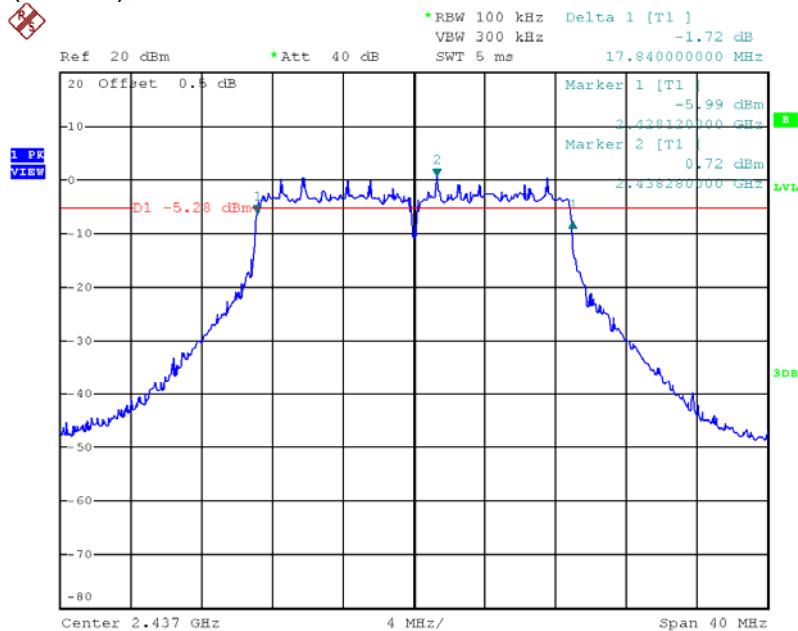


Date: 20.FEB.2017 10:59:14

## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11n (20MHz), Highest Channel

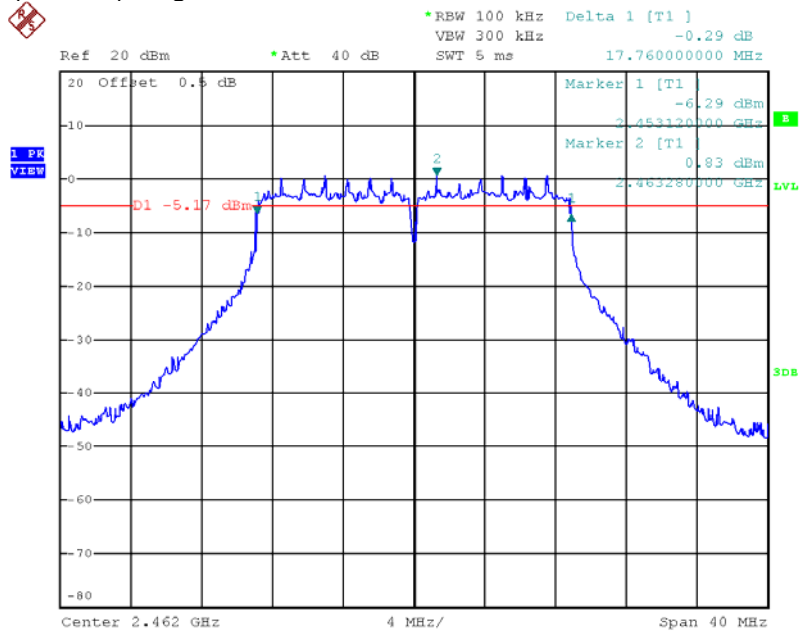

Date: 20.FEB.2017 11:04:09

## INTERTEK TESTING SERVICES

### 4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	0.46
Middle Channel: 2437	0.44
High Channel: 2462	0.78

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	0.14
Middle Channel: 2437	0.50
High Channel: 2462	0.54

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-0.16
Middle Channel: 2437	0.36
High Channel: 2462	0.57

Cable Loss: 0.5 dB


Limit:  
8dBm

The plots of power spectral density are as below.

## INTERTEK TESTING SERVICES


### Plots of power spectral density

802.11b, Lowest channel

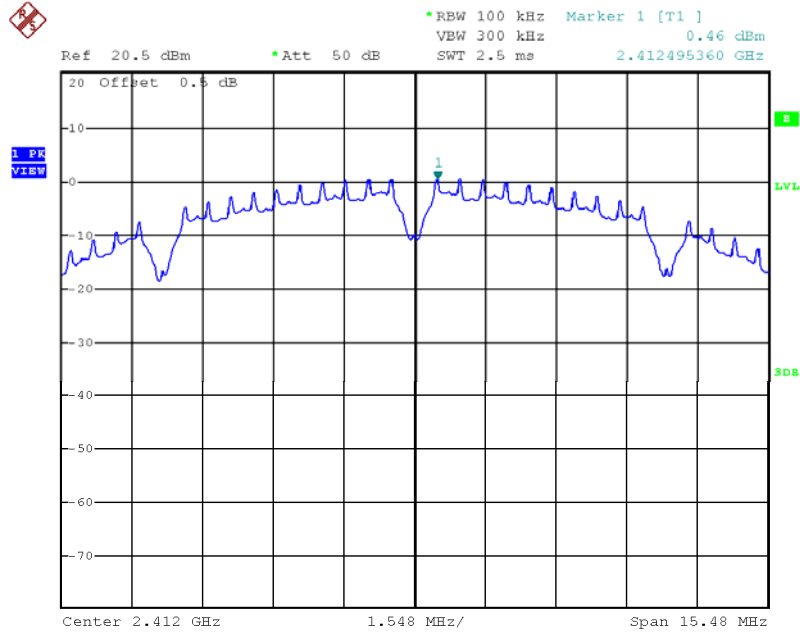

Date: 20.FEB.2017 09:52:42

802.11b, Middle channel

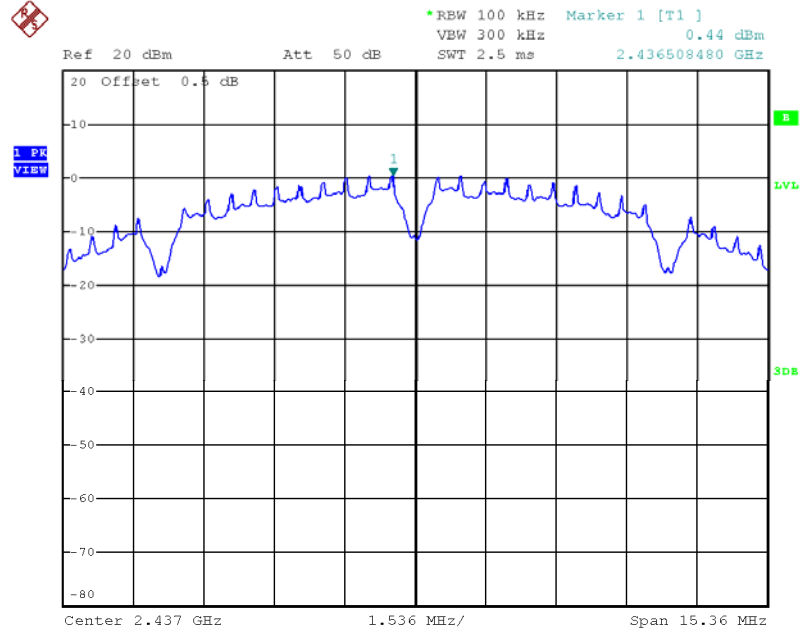


Date: 20.FEB.2017 10:07:30



## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11b, Highest channel

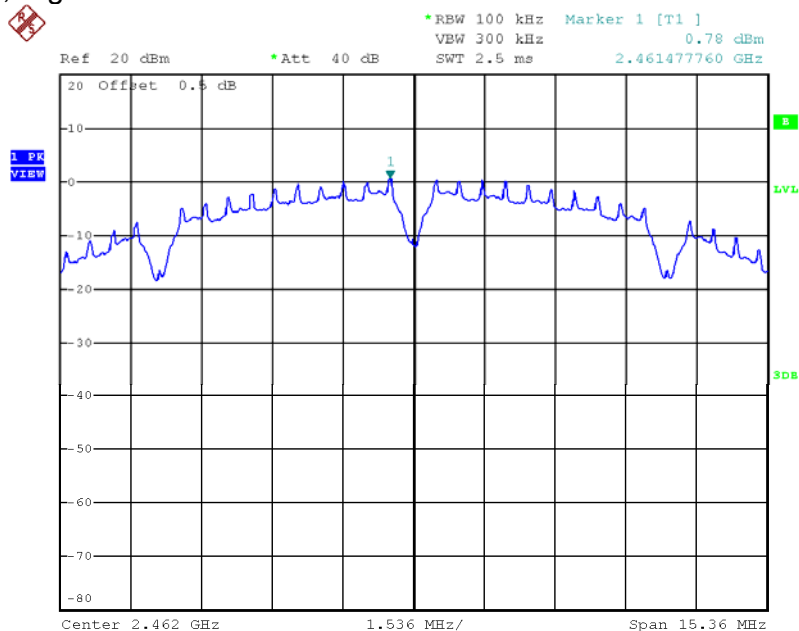


Date: 20.FEB.2017 10:14:42

## INTERTEK TESTING SERVICES


### Plots of power spectral density

802.11g, Lowest channel

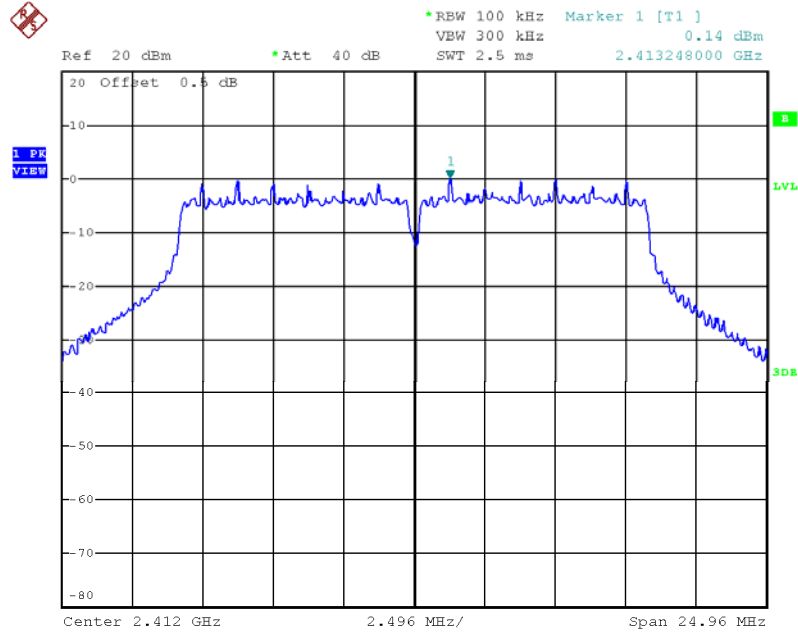

Date: 20.FEB.2017 10:22:19

802.11g, Middle channel

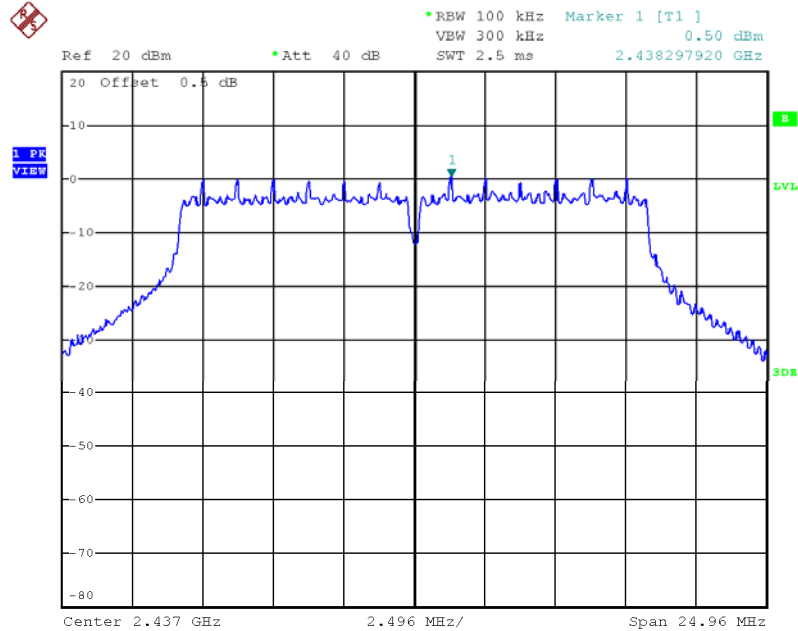


Date: 20.FEB.2017 10:29:02

## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11g, Highest channel

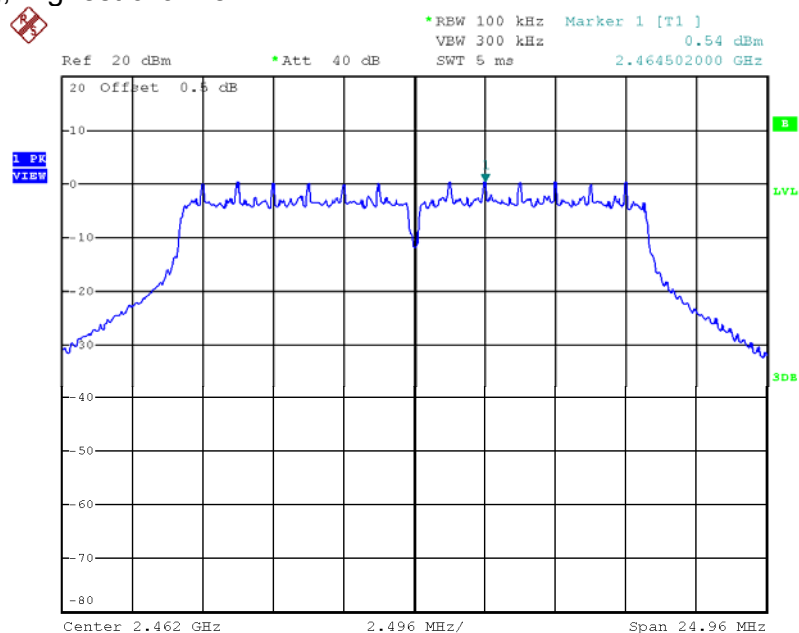


Date: 20.FEB.2017 10:47:00

## INTERTEK TESTING SERVICES


### Plots of power spectral density

802.11n (20MHz), Lowest channel

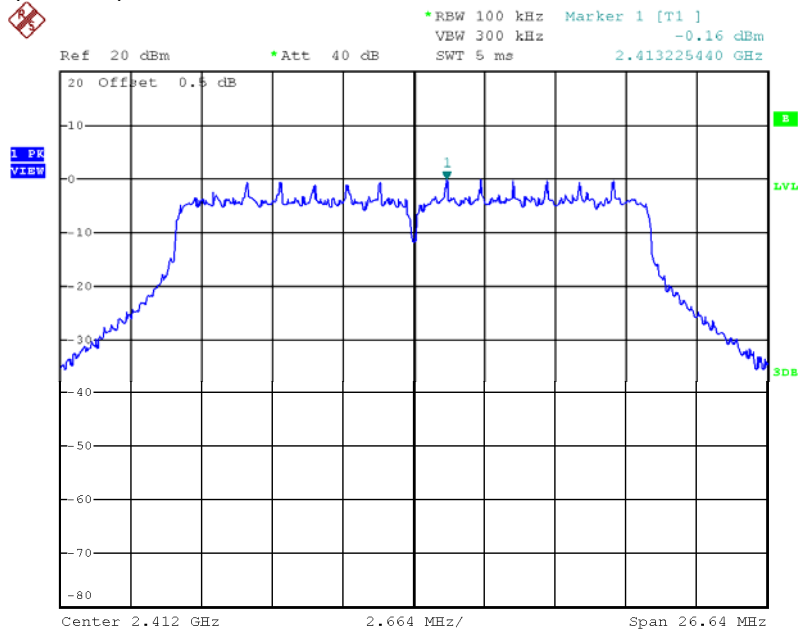

Date: 20.FEB.2017 10:54:53

802.11n (20MHz), Middle channel

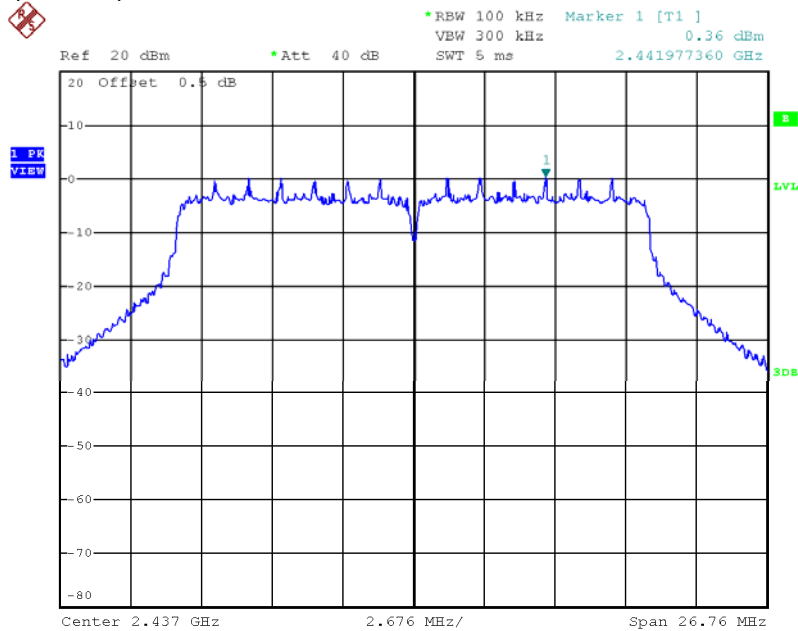


Date: 20.FEB.2017 11:00:09

## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11n (20MHz), Highest channel

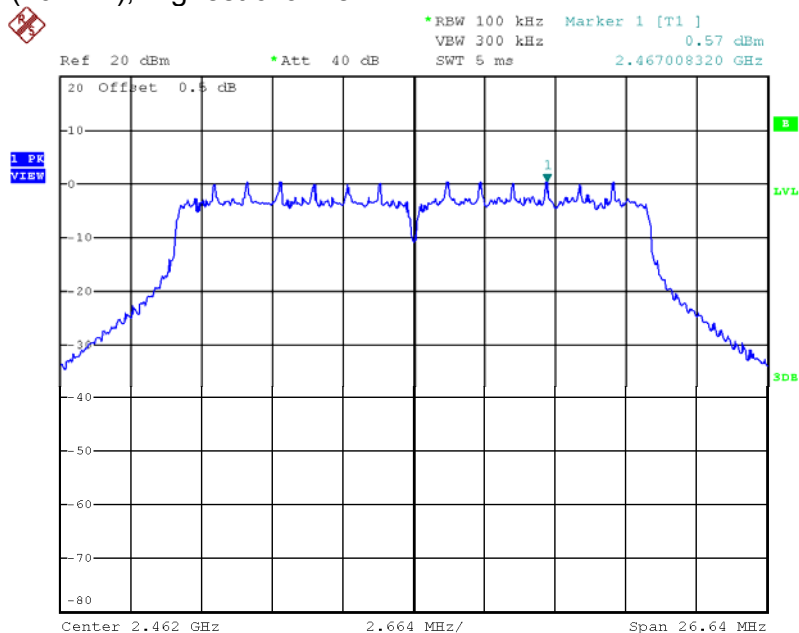

Date: 20.FEB.2017 11:05:19

## INTERTEK TESTING SERVICES

---

### 4.4 Out of Band Conducted Emissions

For 802.11b/g/n20/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20MHz.

The measurement procedures under sections 11 of KDB558074 D01 v04 (05-April-2017) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

#### Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least for 802.11b,g,n20MHz below the maximum measured in-band peak PSD level.

The plots of out of band conducted emissions are as below.

## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

802.11b, Lowest Channel, Plot A

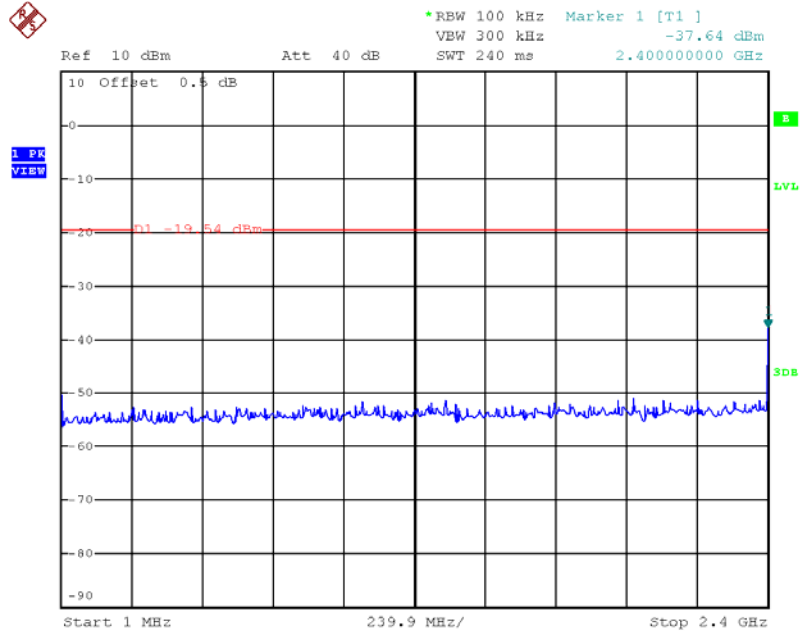

Date: 20.FEB.2017 10:02:30

802.11b, Lowest Channel, Plot B

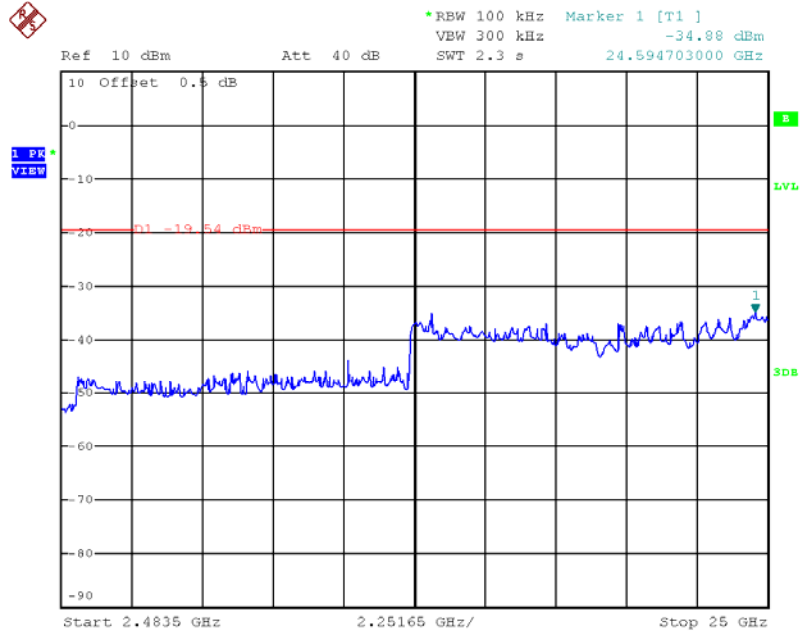


Date: 20.FEB.2017 10:01:52

## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

#### 802.11b, Middle Channel, Plot A

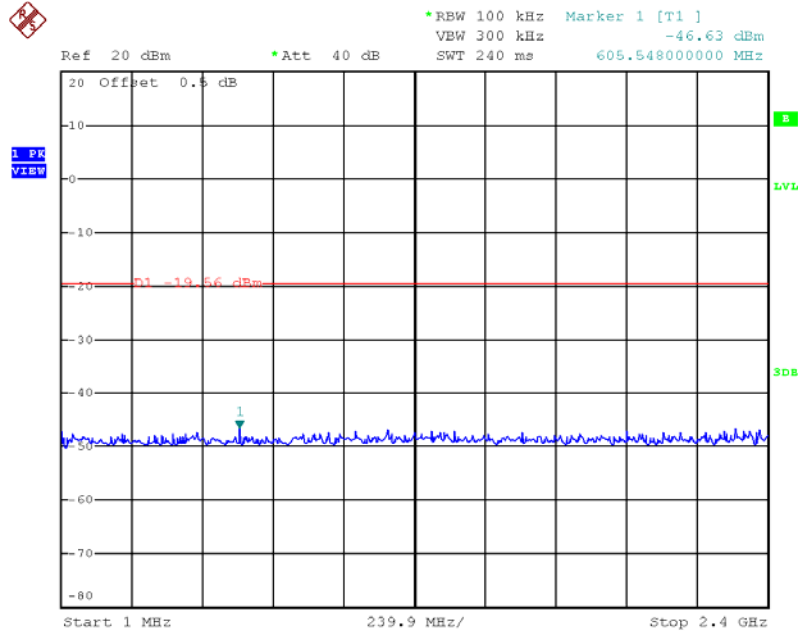

Date: 20.FEB.2017 10:10:27

#### 802.11b, Middle Channel, Plot B

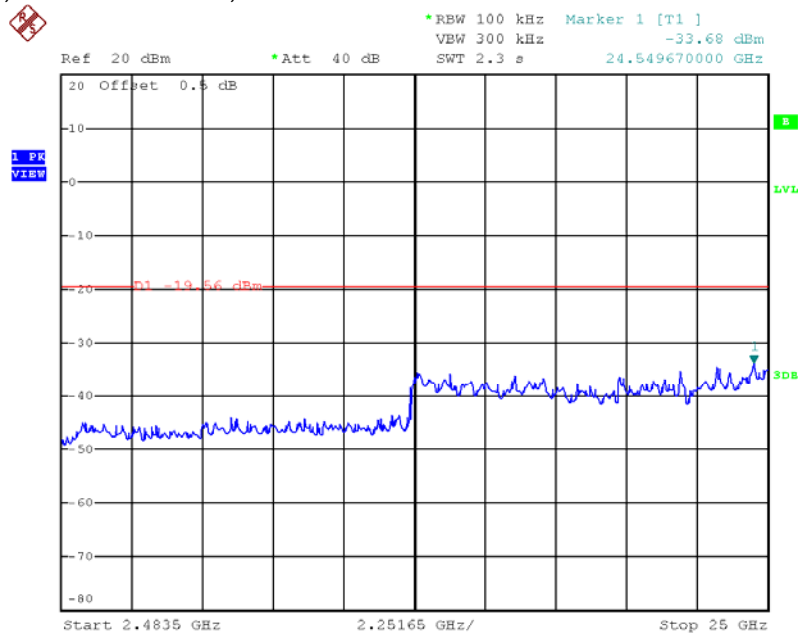


Date: 20.FEB.2017 10:11:06



## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

802.11b, Highest Channel, Plot A

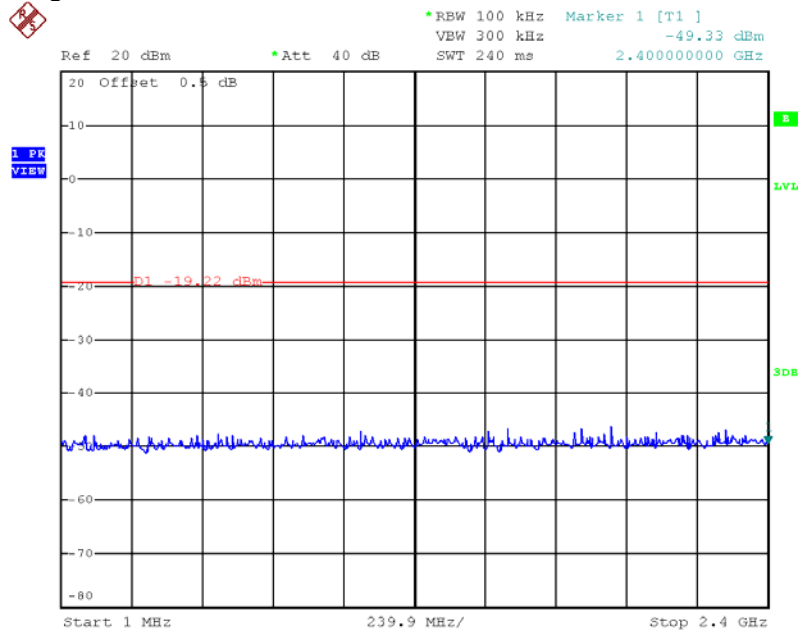

Date: 20.FEB.2017 10:15:40

802.11b, Highest Channel, Plot B

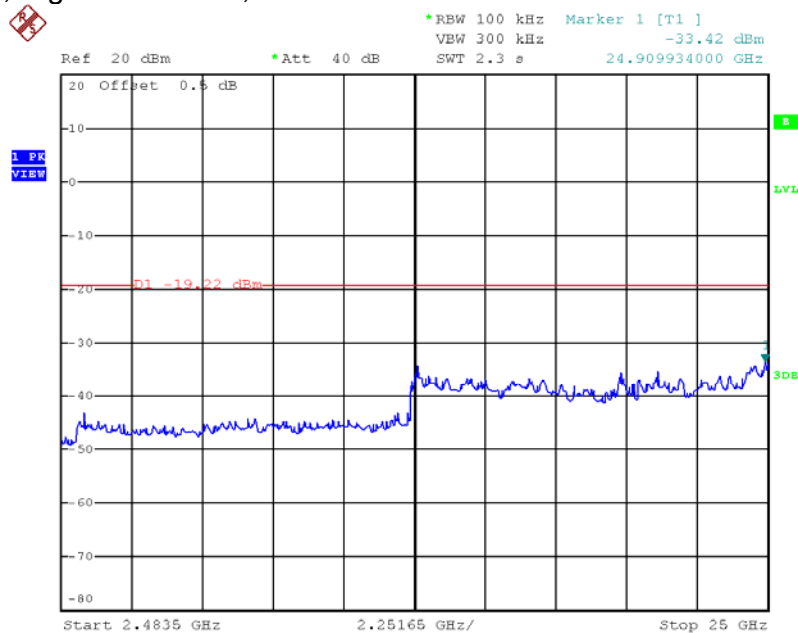


Date: 20.FEB.2017 10:16:31

## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

802.11g, Lowest Channel, Plot A

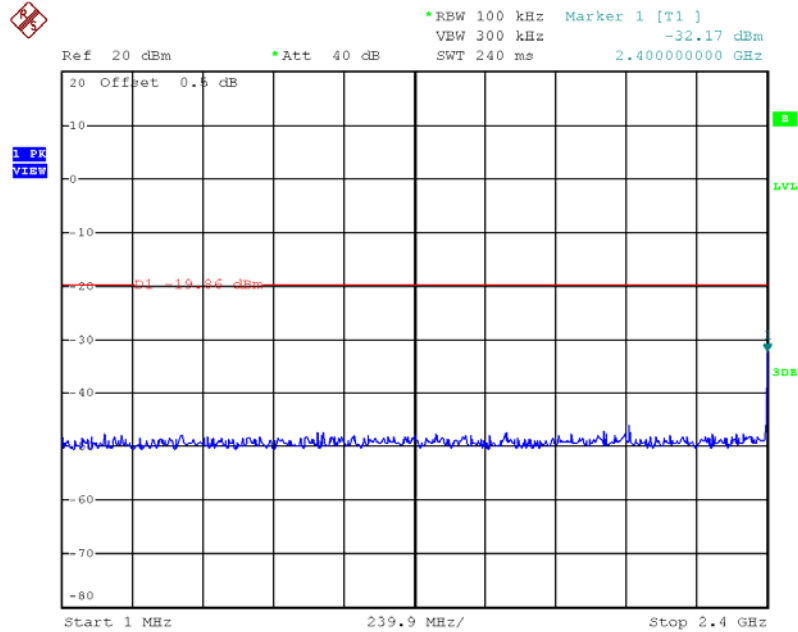

Date: 20.FEB.2017 10:23:16

802.11g, Lowest Channel, Plot B

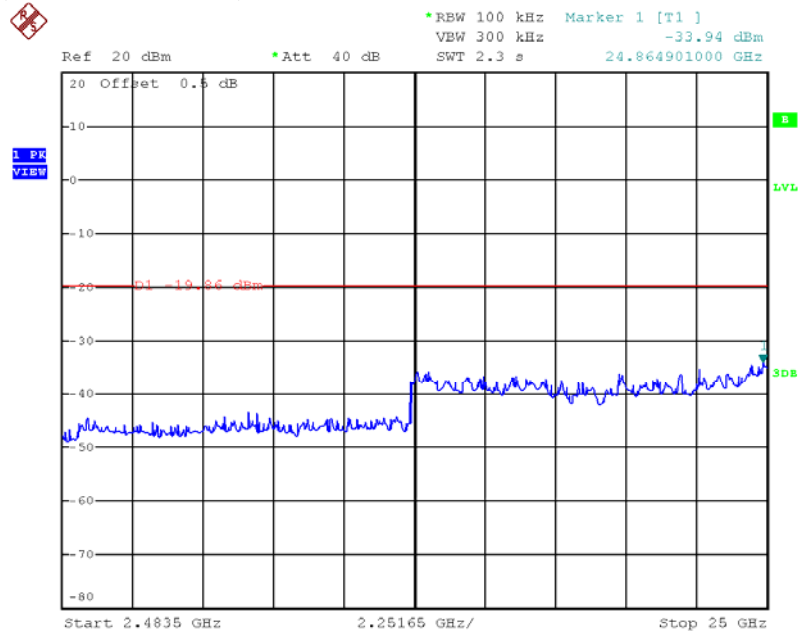


Date: 20.FEB.2017 10:23:48

## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

802.11g, Middle Channel, Plot A

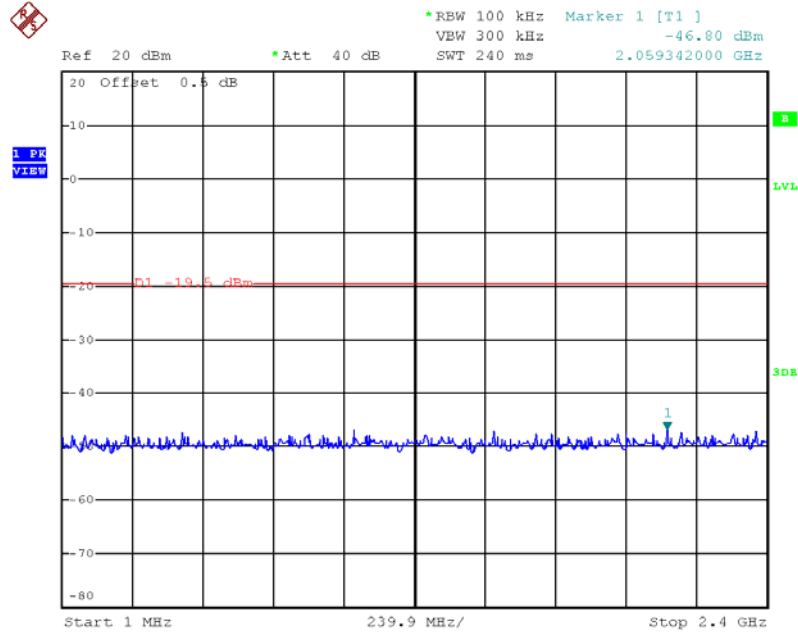

Date: 20.FEB.2017 10:30:10

802.11g, Middle Channel, Plot B

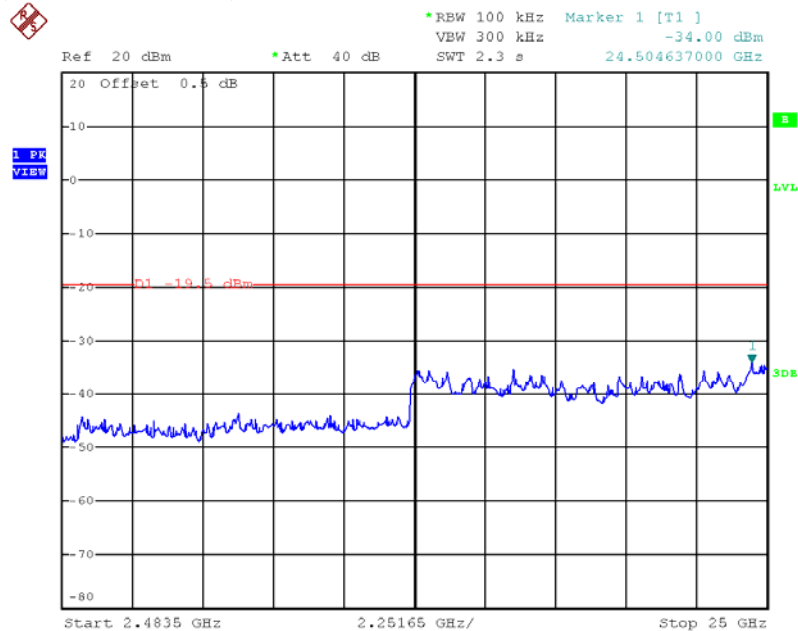


Date: 20.FEB.2017 10:30:45

## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

802.11g, Highest Channel, Plot A

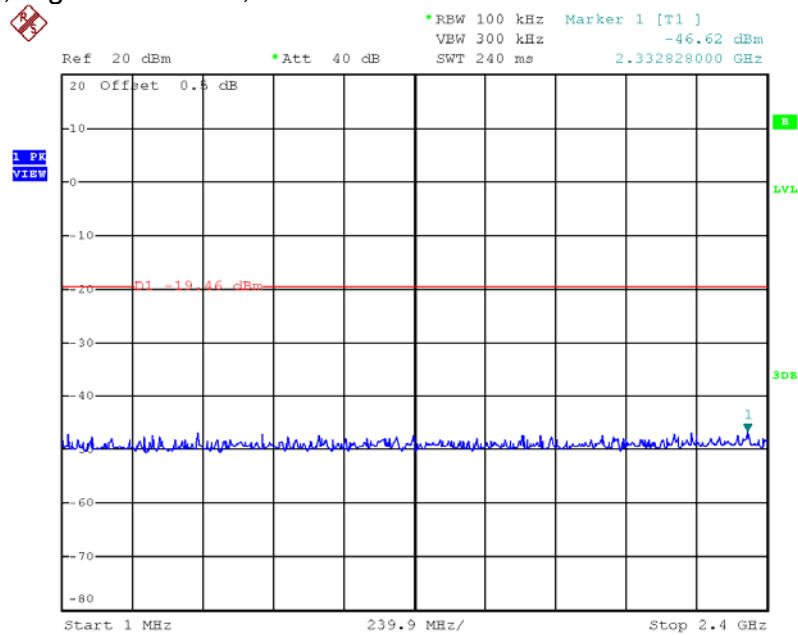

Date: 20.FEB.2017 11:20:06

802.11g, Highest Channel, Plot B

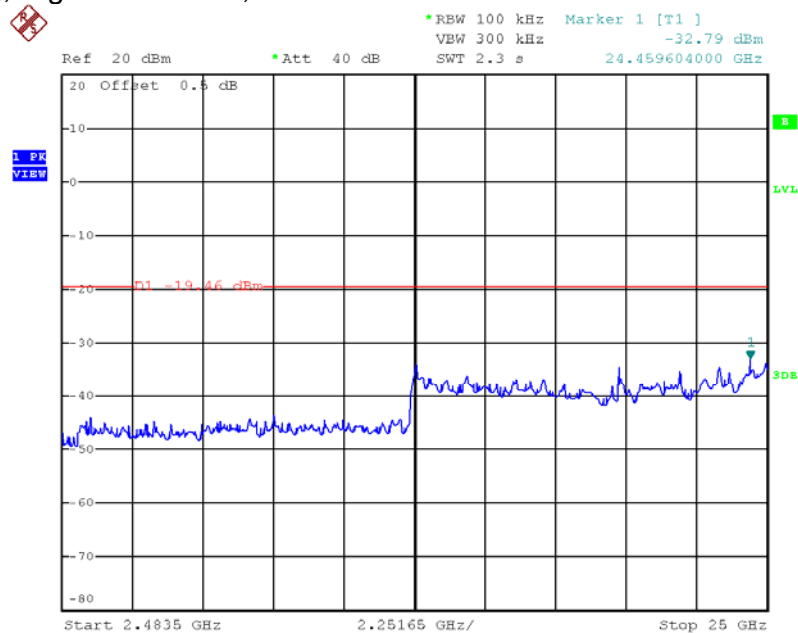


Date: 20.FEB.2017 11:20:38



## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

802.11n (20MHz), Middle Channel, Plot A

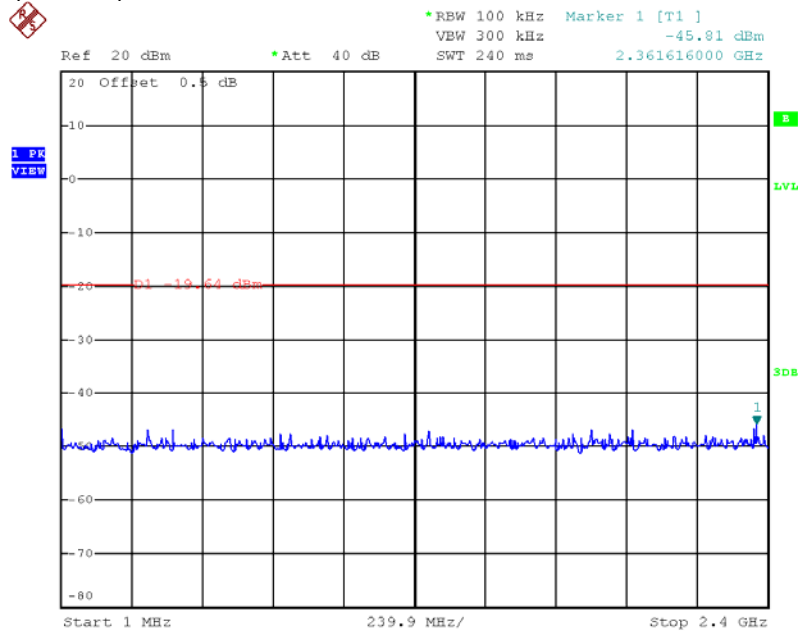

Date: 20.FEB.2017 11:00:50

802.11n (20MHz), Middle Channel, Plot B

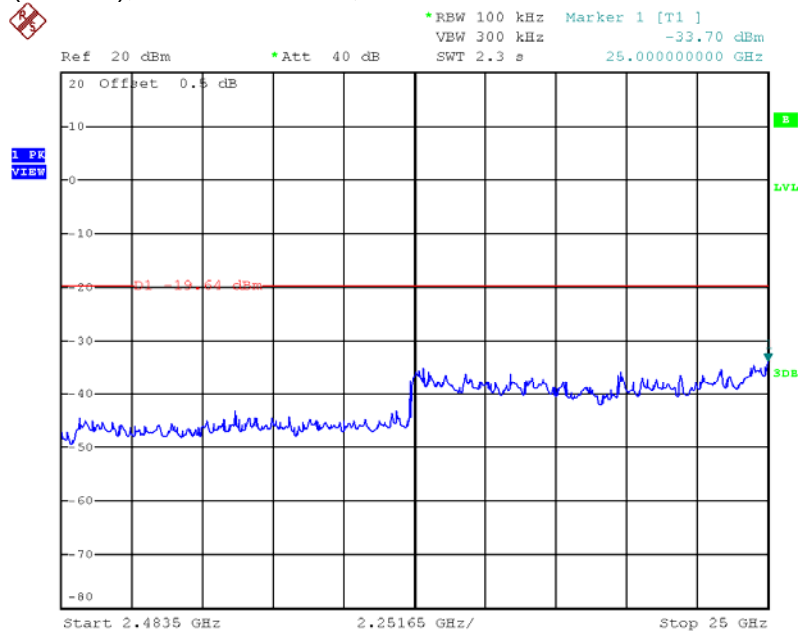


Date: 20.FEB.2017 11:01:33

## INTERTEK TESTING SERVICES


### Plots of out of band conducted emissions

802.11n (20MHz), Highest Channel, Plot A

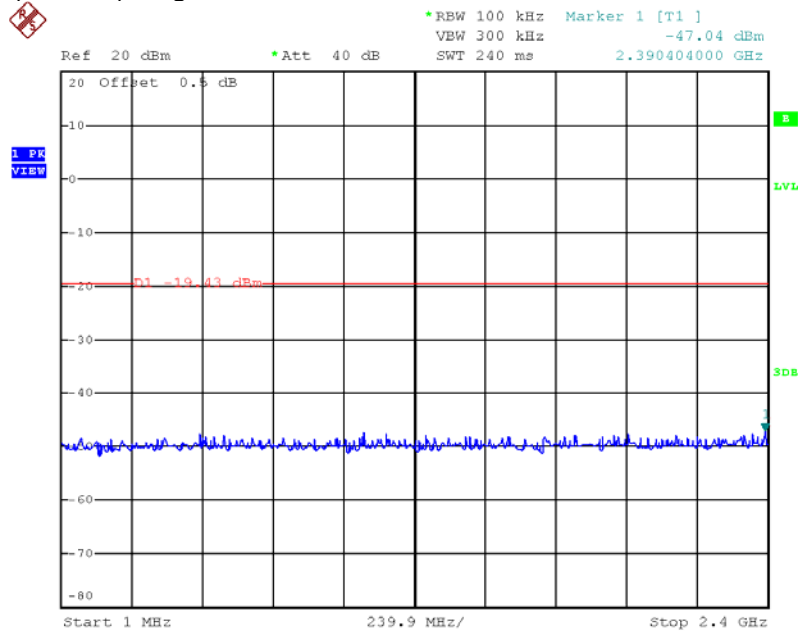

Date: 20.FEB.2017 11:06:14

802.11n (20MHz), Highest Channel, Plot B

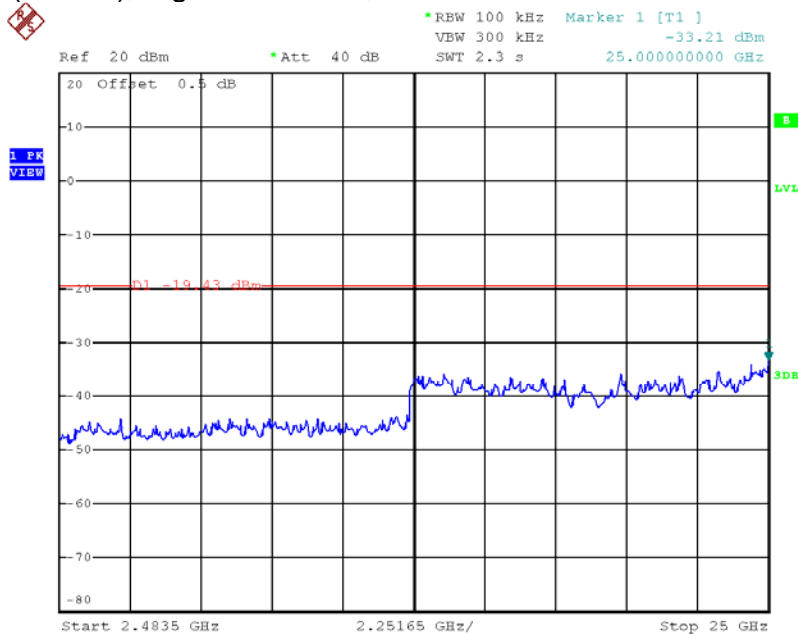

Date: 20.FEB.2017 11:07:03

## INTERTEK TESTING SERVICES

---

### 4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V  
AF = 7.4 dB  
CF = 1.6 dB  
AG = 29.0 dB  
PD = 0.0 dB  
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$



## INTERTEK TESTING SERVICES

---

### 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

#### 4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

2483.5 MHz

The worst case radiated emission configuration photographs are saved with filename:  
config photos.pdf

#### 4.6.2 Radiated Emission Data

The data in tables 1-10 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 2.3 dB margin

## INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 1  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2390.000</i></b>	<b><i>50.7</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>47.1</i></b>	<b><i>54.0</i></b>	<b><i>-6.9</i></b>
<b><i>H</i></b>	<b><i>4824.000</i></b>	<b><i>42.4</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>44.3</i></b>	<b><i>54.0</i></b>	<b><i>-9.7</i></b>
<b><i>V</i></b>	<b><i>12060.000</i></b>	<b><i>34.1</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>41.6</i></b>	<b><i>54.0</i></b>	<b><i>-12.4</i></b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2390.000</i></b>	<b><i>62.2</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>58.6</i></b>	<b><i>74.0</i></b>	<b><i>-15.4</i></b>
<b><i>H</i></b>	<b><i>4824.000</i></b>	<b><i>48.7</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>50.6</i></b>	<b><i>74.0</i></b>	<b><i>-23.4</i></b>
<b><i>V</i></b>	<b><i>12060.000</i></b>	<b><i>47.1</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>54.6</i></b>	<b><i>74.0</i></b>	<b><i>-19.4</i></b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 2  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>42.8</b>	<b>33</b>	<b>34.9</b>	<b>44.7</b>	<b>54.0</b>	<b>-9.3</b>
<b>H</b>	<b>7311.000</b>	<b>33.2</b>	<b>33</b>	<b>37.9</b>	<b>38.1</b>	<b>54.0</b>	<b>-15.9</b>
<b>V</b>	<b>12185.000</b>	<b>34.1</b>	<b>33</b>	<b>40.5</b>	<b>41.6</b>	<b>54.0</b>	<b>-12.4</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>49.2</b>	<b>33</b>	<b>34.9</b>	<b>51.1</b>	<b>74.0</b>	<b>-22.9</b>
<b>H</b>	<b>7311.000</b>	<b>45.4</b>	<b>33</b>	<b>37.9</b>	<b>50.3</b>	<b>74.0</b>	<b>-23.7</b>
<b>V</b>	<b>12185.000</b>	<b>46.9</b>	<b>33</b>	<b>40.5</b>	<b>54.4</b>	<b>74.0</b>	<b>-19.6</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 3  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>51.1</b>	<b>33</b>	<b>29.4</b>	<b>47.5</b>	<b>54.0</b>	<b>-6.5</b>
<b>H</b>	<b>4924.000</b>	<b>43.9</b>	<b>33</b>	<b>34.9</b>	<b>45.8</b>	<b>54.0</b>	<b>-8.2</b>
<b>H</b>	<b>7386.000</b>	<b>33.5</b>	<b>33</b>	<b>37.9</b>	<b>38.4</b>	<b>54.0</b>	<b>-15.6</b>
<b>V</b>	<b>12310.000</b>	<b>34.0</b>	<b>33</b>	<b>40.5</b>	<b>41.5</b>	<b>54.0</b>	<b>-12.5</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>62.5</b>	<b>33</b>	<b>29.4</b>	<b>58.9</b>	<b>74.0</b>	<b>-15.1</b>
<b>H</b>	<b>4924.000</b>	<b>50.2</b>	<b>33</b>	<b>34.9</b>	<b>52.1</b>	<b>74.0</b>	<b>-21.9</b>
<b>H</b>	<b>7386.000</b>	<b>45.6</b>	<b>33</b>	<b>37.9</b>	<b>50.5</b>	<b>74.0</b>	<b>-23.5</b>
<b>V</b>	<b>12310.000</b>	<b>46.8</b>	<b>33</b>	<b>40.5</b>	<b>54.3</b>	<b>74.0</b>	<b>-19.7</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 4  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2390.000</i></b>	<b><i>51.0</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>47.4</i></b>	<b><i>54.0</i></b>	<b><i>-6.6</i></b>
<b><i>H</i></b>	<b><i>4824.000</i></b>	<b><i>38.3</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>40.2</i></b>	<b><i>54.0</i></b>	<b><i>-13.8</i></b>
<b><i>V</i></b>	<b><i>12060.000</i></b>	<b><i>34.3</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>41.8</i></b>	<b><i>54.0</i></b>	<b><i>-12.2</i></b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2390.000</i></b>	<b><i>64.3</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>60.7</i></b>	<b><i>74.0</i></b>	<b><i>-13.3</i></b>
<b><i>H</i></b>	<b><i>4824.000</i></b>	<b><i>50.4</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>52.3</i></b>	<b><i>74.0</i></b>	<b><i>-21.7</i></b>
<b><i>V</i></b>	<b><i>12060.000</i></b>	<b><i>47.2</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>54.7</i></b>	<b><i>74.0</i></b>	<b><i>-19.3</i></b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 5  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>4874.000</i></b>	<b><i>39.4</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>41.3</i></b>	<b><i>54.0</i></b>	<b><i>-12.7</i></b>
<b><i>H</i></b>	<b><i>7311.000</i></b>	<b><i>33.3</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>38.2</i></b>	<b><i>54.0</i></b>	<b><i>-15.8</i></b>
<b><i>V</i></b>	<b><i>12185.000</i></b>	<b><i>34.2</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>41.7</i></b>	<b><i>54.0</i></b>	<b><i>-12.3</i></b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>4874.000</i></b>	<b><i>51.9</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>53.8</i></b>	<b><i>74.0</i></b>	<b><i>-20.2</i></b>
<b><i>H</i></b>	<b><i>7311.000</i></b>	<b><i>45.5</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>50.4</i></b>	<b><i>74.0</i></b>	<b><i>-23.6</i></b>
<b><i>V</i></b>	<b><i>12185.000</i></b>	<b><i>47.1</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>54.6</i></b>	<b><i>74.0</i></b>	<b><i>-19.4</i></b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 11

Table 6  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2483.500</i></b>	<b><i>54.7</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>51.1</i></b>	<b><i>54.0</i></b>	<b><i>-2.9</i></b>
<b><i>H</i></b>	<b><i>4924.000</i></b>	<b><i>39.9</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>41.8</i></b>	<b><i>54.0</i></b>	<b><i>-12.2</i></b>
<b><i>H</i></b>	<b><i>7386.000</i></b>	<b><i>33.6</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>38.5</i></b>	<b><i>54.0</i></b>	<b><i>-15.5</i></b>
<b><i>V</i></b>	<b><i>12310.000</i></b>	<b><i>34.2</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>41.7</i></b>	<b><i>54.0</i></b>	<b><i>-12.3</i></b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2483.500</i></b>	<b><i>68.3</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>64.7</i></b>	<b><i>74.0</i></b>	<b><i>-9.3</i></b>
<b><i>H</i></b>	<b><i>4924.000</i></b>	<b><i>52.5</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>54.4</i></b>	<b><i>74.0</i></b>	<b><i>-19.6</i></b>
<b><i>H</i></b>	<b><i>7386.000</i></b>	<b><i>45.8</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>50.7</i></b>	<b><i>74.0</i></b>	<b><i>-23.3</i></b>
<b><i>V</i></b>	<b><i>12310.000</i></b>	<b><i>46.9</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>54.4</i></b>	<b><i>74.0</i></b>	<b><i>-19.6</i></b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 7  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2390.000</i></b>	<b><i>51.9</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>48.3</i></b>	<b><i>54.0</i></b>	<b><i>-5.7</i></b>
<b><i>H</i></b>	<b><i>4824.000</i></b>	<b><i>41.0</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>42.9</i></b>	<b><i>54.0</i></b>	<b><i>-11.1</i></b>
<b><i>V</i></b>	<b><i>12060.000</i></b>	<b><i>34.0</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>41.5</i></b>	<b><i>54.0</i></b>	<b><i>-12.5</i></b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2390.000</i></b>	<b><i>65.1</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>61.5</i></b>	<b><i>74.0</i></b>	<b><i>-12.5</i></b>
<b><i>H</i></b>	<b><i>4824.000</i></b>	<b><i>53.2</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>55.1</i></b>	<b><i>74.0</i></b>	<b><i>-18.9</i></b>
<b><i>V</i></b>	<b><i>12060.000</i></b>	<b><i>46.9</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>54.4</i></b>	<b><i>74.0</i></b>	<b><i>-19.6</i></b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



## INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 8  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>4874.000</i></b>	<b><i>41.2</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>43.1</i></b>	<b><i>54.0</i></b>	<b><i>-10.9</i></b>
<b><i>H</i></b>	<b><i>7311.000</i></b>	<b><i>33.7</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>38.6</i></b>	<b><i>54.0</i></b>	<b><i>-15.4</i></b>
<b><i>V</i></b>	<b><i>12185.000</i></b>	<b><i>34.0</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>41.5</i></b>	<b><i>54.0</i></b>	<b><i>-12.5</i></b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>4874.000</i></b>	<b><i>53.4</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>55.3</i></b>	<b><i>74.0</i></b>	<b><i>-18.7</i></b>
<b><i>H</i></b>	<b><i>7311.000</i></b>	<b><i>45.9</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>50.8</i></b>	<b><i>74.0</i></b>	<b><i>-23.2</i></b>
<b><i>V</i></b>	<b><i>12185.000</i></b>	<b><i>47.0</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>54.5</i></b>	<b><i>74.0</i></b>	<b><i>-19.5</i></b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 11

Table 9  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2483.500</i></b>	<b><i>55.3</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>51.7</i></b>	<b><i>54.0</i></b>	<b><i>-2.3</i></b>
<b><i>H</i></b>	<b><i>4924.000</i></b>	<b><i>41.5</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>43.4</i></b>	<b><i>54.0</i></b>	<b><i>-10.6</i></b>
<b><i>H</i></b>	<b><i>7386.000</i></b>	<b><i>33.6</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>38.5</i></b>	<b><i>54.0</i></b>	<b><i>-15.5</i></b>
<b><i>V</i></b>	<b><i>12310.000</i></b>	<b><i>33.9</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>41.4</i></b>	<b><i>54.0</i></b>	<b><i>-12.6</i></b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<b><i>H</i></b>	<b><i>2483.500</i></b>	<b><i>68.7</i></b>	<b><i>33</i></b>	<b><i>29.4</i></b>	<b><i>65.1</i></b>	<b><i>74.0</i></b>	<b><i>-8.9</i></b>
<b><i>H</i></b>	<b><i>4924.000</i></b>	<b><i>53.7</i></b>	<b><i>33</i></b>	<b><i>34.9</i></b>	<b><i>55.6</i></b>	<b><i>74.0</i></b>	<b><i>-18.4</i></b>
<b><i>H</i></b>	<b><i>7386.000</i></b>	<b><i>45.7</i></b>	<b><i>33</i></b>	<b><i>37.9</i></b>	<b><i>50.6</i></b>	<b><i>74.0</i></b>	<b><i>-23.4</i></b>
<b><i>V</i></b>	<b><i>12310.000</i></b>	<b><i>46.8</i></b>	<b><i>33</i></b>	<b><i>40.5</i></b>	<b><i>54.3</i></b>	<b><i>74.0</i></b>	<b><i>-19.7</i></b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: WiFi Tx Other

Table 10

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	104.519	25.8	16	13.0	22.8	43.5	-20.7
H	202.196	30.6	16	16.0	30.6	43.5	-12.9
<b>H</b>	<b>250.106</b>	<b>39.5</b>	<b>16</b>	<b>20.0</b>	<b>43.5</b>	<b>46.0</b>	<b>-2.5</b>
V	350.082	33.2	16	24.0	41.2	46.0	-4.8
V	550.011	22.8	16	28.0	34.8	46.0	-11.2
V	850.037	22.7	16	31.0	37.7	46.0	-8.3
<b>V</b>	<b>1450.045</b>	<b>48.3</b>	<b>33</b>	<b>26.1</b>	<b>41.4</b>	<b>54.0</b>	<b>-12.6</b>
<b>V</b>	<b>1550.213</b>	<b>54.1</b>	<b>33</b>	<b>27.2</b>	<b>48.3</b>	<b>54.0</b>	<b>-5.7</b>
V	1650.184	46.6	33	27.2	40.8	54.0	-13.2


NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.


## INTERTEK TESTING SERVICES

### 4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

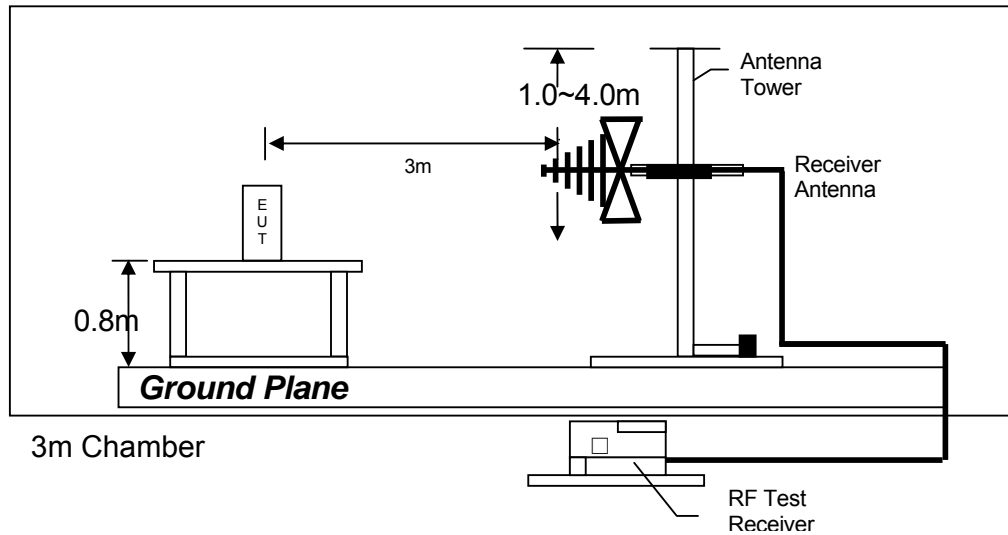

Test setup of radiated emissions up to 1GHz

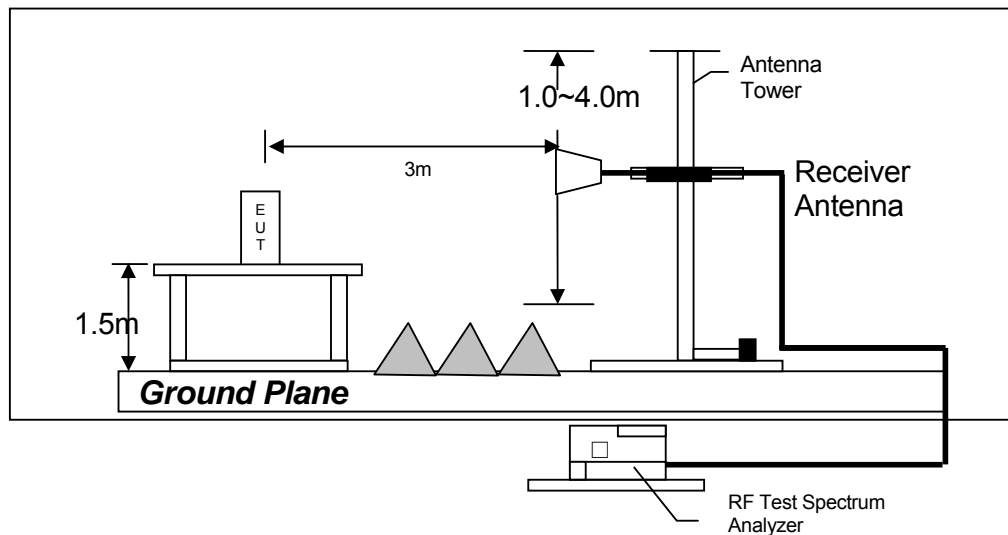

Test setup of radiated emissions above 1GHz

## **INTERTEK TESTING SERVICES**

---

### 4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

## INTERTEK TESTING SERVICES

---

### 4.7 AC Power Line Conducted Emission

- ☒ Not applicable – EUT is only powered by battery for operation.
- ☐ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 5 EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

### 5.0 Equipment List

#### 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer
Registration No.	EW-3095	EW-2253
Manufacturer	R&S	R&S
Model No.	ESCI	FSP40
Calibration Date	Oct. 25, 2016	Jun. 15, 2016
Calibration Due Date	Oct. 25, 2017	Jun. 15, 2017

Equipment	Biconical Antenna	Log Periodic Antenna	Double Ridged Guide Antenna
Registration No.	EW-0571	EW-0447	EW-1133
Manufacturer	EMCO	EMCO	EMCO
Model No.	3104C	3146	3115
Calibration Date	May 18, 2016	May 18, 2016	Nov. 05, 2015
Calibration Due Date	Nov. 18, 2017	Nov. 18, 2017	May 05, 2017

#### 2) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2329
Manufacturer	R&S
Model No.	FSP3
Calibration Date	Aug. 26, 2016
Calibration Due Date	Aug. 26, 2017

**END OF TEST REPORT**