

**WB2500**

**802.11b Wireless**

**CardBus PC Card**

**User Manual**

# REGULATORY STATEMENTS

## FCC Certification

The United States Federal Communication Commission (FCC) and the Canadian Department of Communications have established certain rules governing the use of electronic equipment.

### **Part 15, Class B**

This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) This device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
  - Reorient or relocate the receiving antenna.
  - Increase the distance between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

### **CAUTION:**

- 1) This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
- 2) This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

# Table of Contents

<b>INTRODUCTION.....</b>	<b>1</b>
FEATURES .....	1
WIRELESS NETWORK OPTIONS .....	2
The Peer-to-Peer Network.....	2
The Access Point Network.....	3
LED INDICATORS .....	3
Link: Green (On/Off).....	3
Act: Orange (Blink).....	3
<b>INSTALLATION .....</b>	<b>4</b>
INSTALL THE DEVICE .....	4
INSTALL THE DRIVER.....	4
In Windows 98 .....	4
In Windows ME .....	7
In Windows 2000 .....	9
In Windows XP .....	11
Verify .....	13
INSTALL THE UTILITY .....	14
<b>NETWORK CONNECTION .....</b>	<b>16</b>
IN WINDOWS 98/ME.....	16

IN WINDOWS 2000/XP .....	19
<b>CONFIGURATION.....</b>	<b>22</b>
ACCESSING THE CONFIGURATION UTILITY .....	22
Config Tab .....	23
Advanced Config Tab .....	26
Status Tab.....	28
Statistics Tab .....	29
About Tab .....	30
Exit Tab.....	31
<b>UNINSTALLATION .....</b>	<b>32</b>
UNINSTALL THE UTILITY .....	32
UNINSTALL THE DRIVER .....	34
<b>SPECIFICATIONS.....</b>	<b>35</b>

# INTRODUCTION

**The 802.11b Wireless 32bit CardBus PC Card** is a high-speed 11 Megabits per second (Mbps) Ethernet wireless network adapter that plugs into any CardBus enabled PC. Once connected with other networked PC's, it allows you to share hard disk drives, DVD drives, CD drives, printers, and the likes. It also provides shared access to a modem for Internet access. Based on radio frequency (RF) technology, a wireless LAN transmits and receives data over the air, along with the guarantee to provide privacy and noninterference by the use of separate radio frequency.

**The 802.11b Wireless 32bit CardBus PC Card** allows you to take full advantage of your PC's mobility with access to real-time information and online services anytime and anywhere. Plus, with the network installation simplicity and flexibility, you can eliminate the need to pull cable through walls and ceilings and allow the network to go where wires cannot go. Exploring WWW and augmenting networks can never be done more easily.


## Features

- Complies with IEEE 802.11b standard for 2.4GHz Wireless LAN
- Complies with PC Card standard
- Supports PC Card hot swap and true Plug & Play
- Works with all existing network infrastructure
- Complies with specific wireless products and services
- Capable of up to 128-Bit WEP Encryption
- Freedom to roam while staying connected
- 11 Mbps high-speed transfer rate
- Rich diagnostic LED indicators with Integrated Antenna
- Supports Window 98/2000/ME/XP
- Lower power consumption
- Easy to install and configure


## Wireless Network Options

### The Peer-to-Peer Network

This network installation lets you set a small wireless workgroup easily and quickly. Equipped with wireless PC Cards or wireless PCI, you can share files and printers between each PC and laptop.

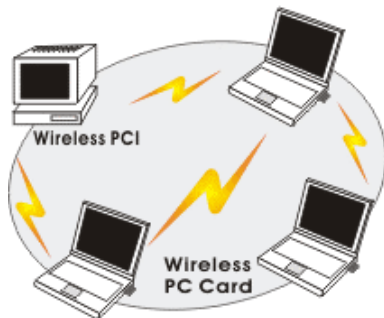


Or you can use one computer as an Internet Server to connect to a wired global network and share files and information with other PCs via a wireless LAN.

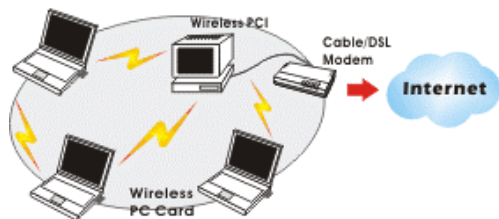

## The Access Point Network

The network installation allows you to share files, printers, and Internet access much more conveniently. With wireless PC Cards, you can connect wireless LAN to a wired global network via an **Access Point**.

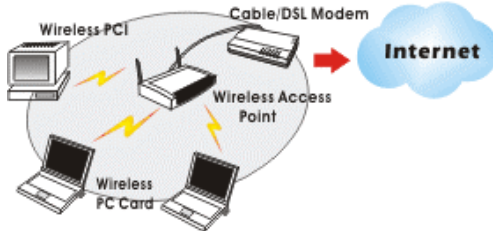

## LED Indicators

### Link: Green (On/Off)

*Glow* – linking to an Access Point or Peer-to-Peer mode.

### Act: Orange (Blink)

*Blink* – Transmitting/receiving wireless data.

# INSTALLATION


## Install the Device

1. Locate the CardBus slot of your system.
1. Align the Wireless PC Card in the CardBus slot. Push evenly and slowly until it is seated.
2. Once the device has been connected to your computer, Windows will detect the new hardware and then automatically copy all of the files needed for networking.


## Install the Driver

### In Windows 98

1. In **Add New Hardware Wizard**, click **Next**.

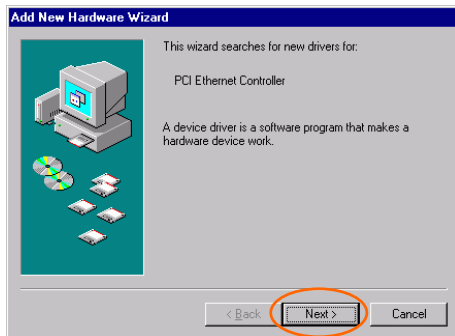

2. Select **Search for the best driver for your device (Recommended)**. Click **Next**.

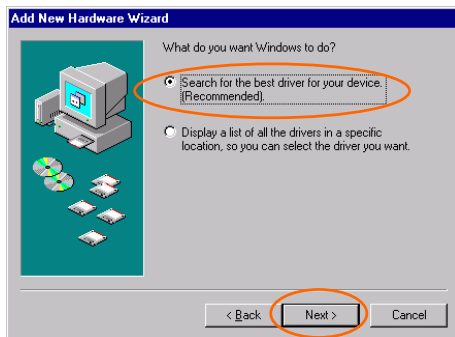


3. Insert the supplied CD-ROM into the CD-ROM drive. Select **Specify a location:** and click **Browse** to provide the appropriate path (e.g. **D:\WIN98**). Click **Next**.



4. Click **Next**, Windows will copy all the necessary files to your system.



5. Insert **Windows 98** CD-ROM, and then click **OK**.

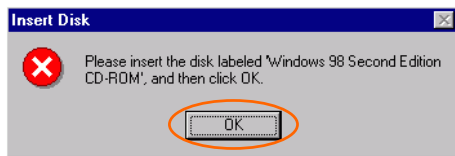


6. Click **Finish** to complete the installation.




7. When Windows prompts you to restart your computer, click **Yes**.

## In Windows ME

1. Select **Specify the location of the driver (Advanced)**, click **Next**.

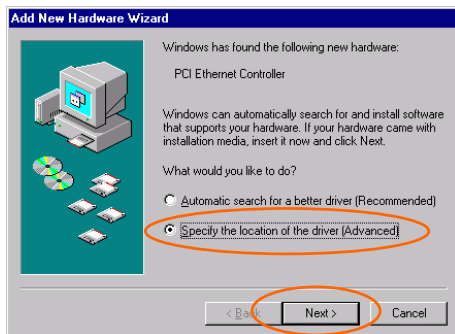

2. Insert the supplied CD-ROM into the CD-ROM drive. Select **Search for the best driver for your device (Recommended)** and click **Browse** to provide the appropriate path (e.g. D:\WINME.) Click **Next**.

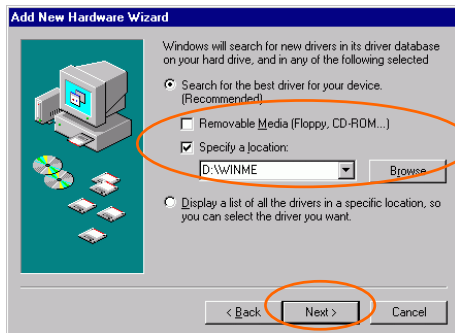


3. Click **Next**, Windows will copy all the necessary files to your system.



4. Click **Finish** to complete the installation.




5. When Windows prompts you to restart your computer, click **Yes**.

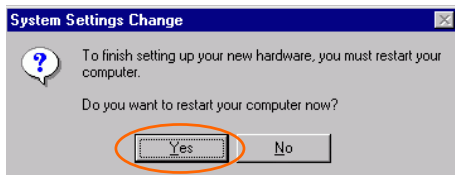


## In Windows 2000


1. In **Found New Hardware Wizard**, click **Next**.

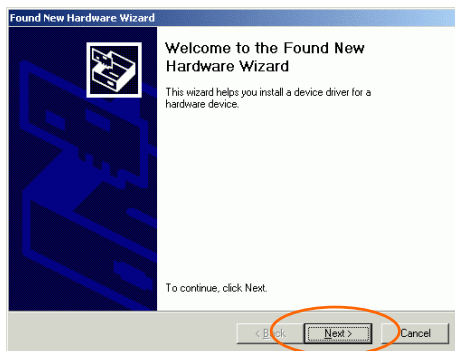


2. In **Install Hardware Device Drivers**, select **Search for a suitable driver for my device (recommended)**, click **Next**.

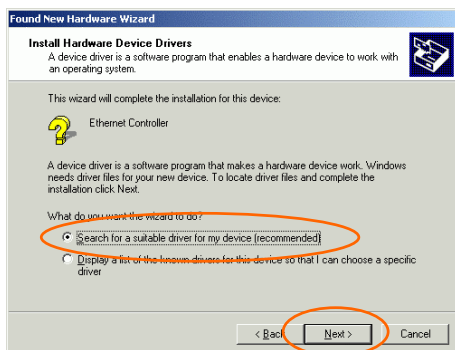


3. Insert the supplied CD-ROM into the CD-ROM drive. Select **Specify a location**, click **Next**.

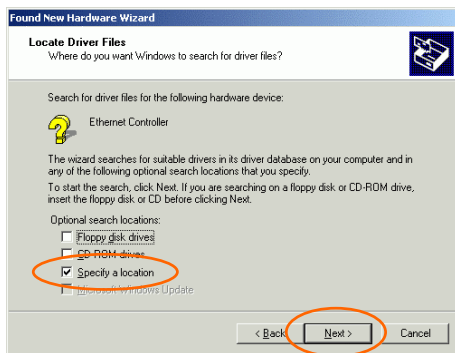

4. Click **Browse** to provide the appropriate path (e.g. **D:\WIN2000**). Click **OK**.

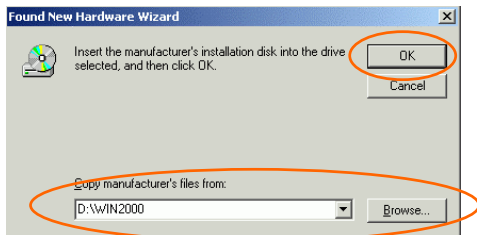

5. Click **Next**, Windows will copy all the necessary files to your system.

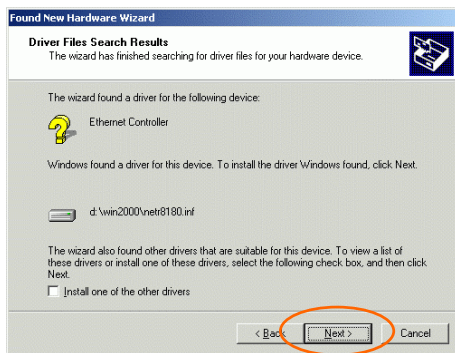


6. In **Digital Signature Not Found** window, click **Yes** to continue.




7. Click **Finish** to complete the installation.

## In Windows XP

1. Select **Install from a list or specific location (Advanced)** and click **Next**.

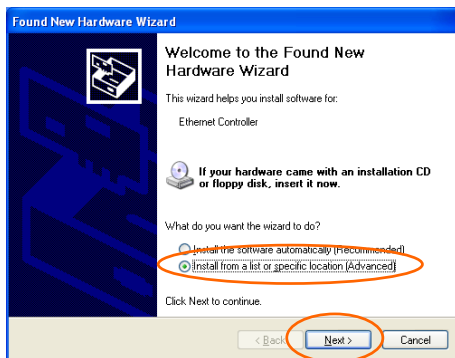


2. Insert the supplied **CD-ROM** into the CD-ROM drive. Select **Include this location in the search:** and click **Browse** to provide the appropriate path (e.g. **D:\WINXP**). Click **Next**.

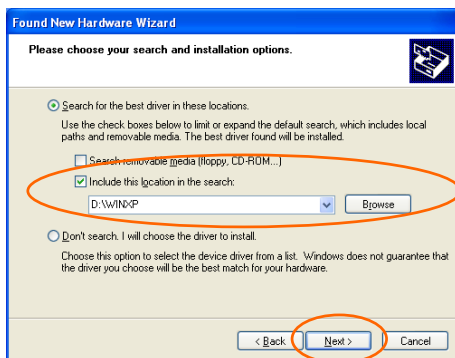

3. Click **Continue Anyway** to proceed. Windows will copy all the necessary files to your system.




4. Click **Finish** to complete the installation.

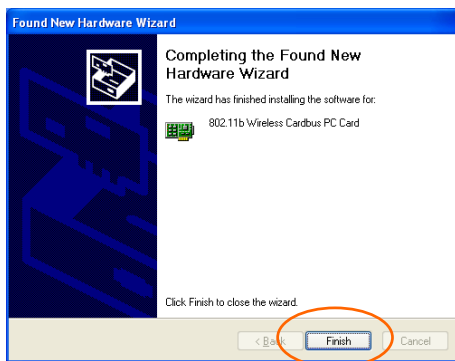


## Verify

To verify if the device exists in your computer and is enabled, go to **Start** → **Settings** → **Control Panel** → **System (→ Hardware)** → **Device Manager**. Expand the **Network adapters** category. If the **802.11b Wireless CardBus PC Card** is listed here, it means that your device is properly installed and enabled.

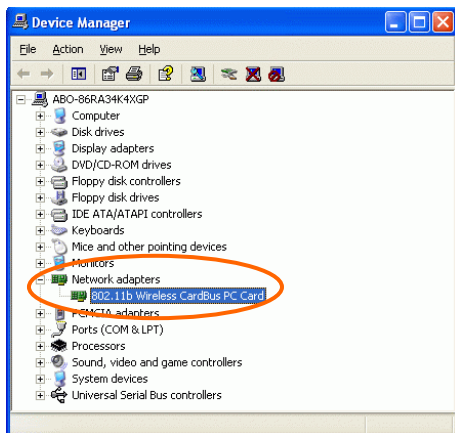


## Install the Utility


1. Insert the supplied **CD-ROM** into the CD-ROM drive. Double click on **Setup.exe** to install the **Wireless LAN Utility**.

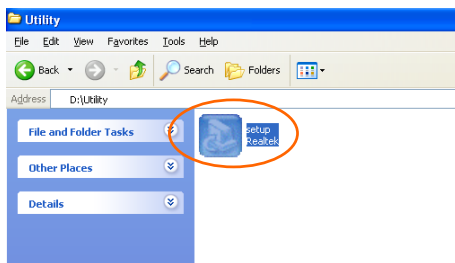


2. When the **Welcome** screen appears, click **Next** to continue.

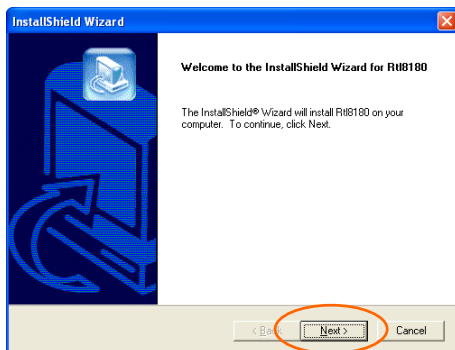

3. In **License Agreement**, click **Yes** to accept the terms.

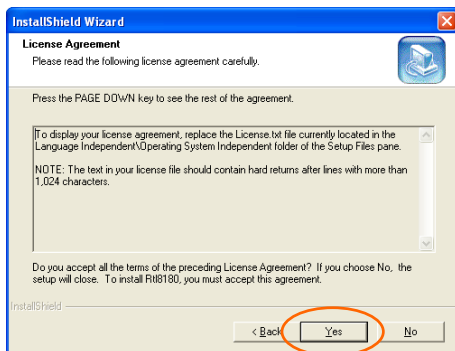

4. Click **Finish** to complete the installation.

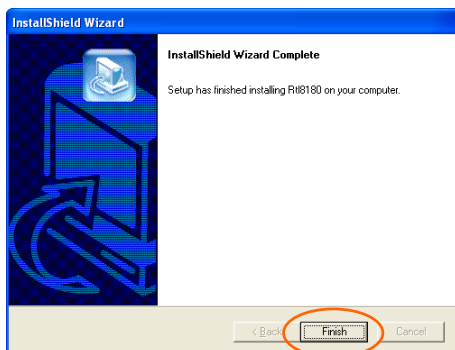


# NETWORK CONNECTION

Once the driver has been installed, you must make some changes to your network settings.

## In Windows 98/ME


1. Go to **Start → Settings → Control Panel → Network**.
2. Make sure that the following components are installed.

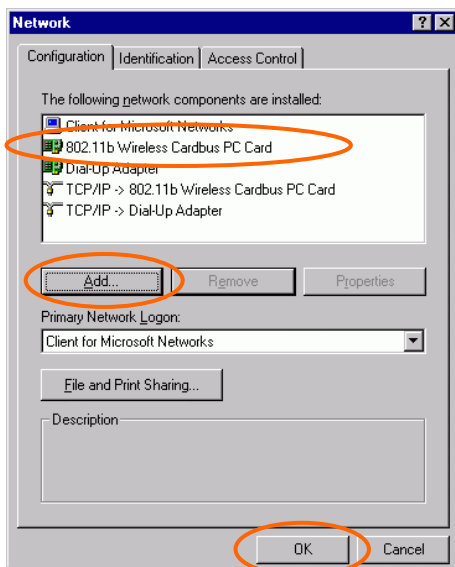


- 802.11b Wireless CardBus PC Card
- IPX/SPX-compatible Protocol
- NetBEUI
- TCP/IP

If any components are missing, click on the **Add** button to add them in. All the protocols and clients required and listed above are provided by Microsoft.


3. After clicking **Add**, highlight the component you need, click **Add**.

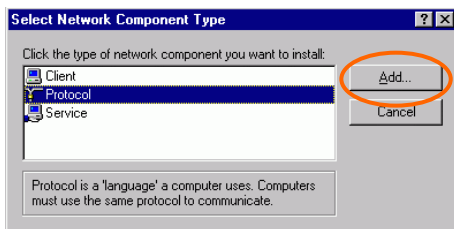


4. Highlight **Microsoft**, and then double click on the item you want to add. Click **OK**.

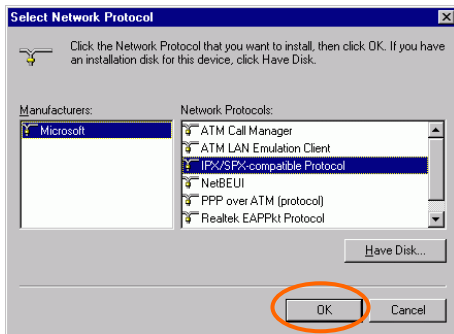


5. For making your computer visible on the network, enable the **File and Print Sharing**.
6. Click the **Identification** tab. Make up a name that is unique from the other computers' names on the network. Type the name of your workgroup, which should be the same used by all of the other PCs on the network.

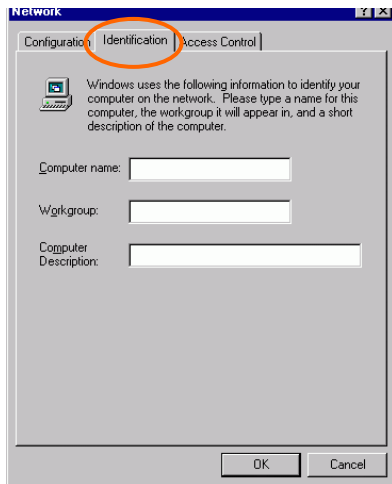

7. Click the **Access Control** tab. Make sure that “**Share-level access control**” is selected. If connecting to a Netware server, share level can be set to “**User-level access control.**”

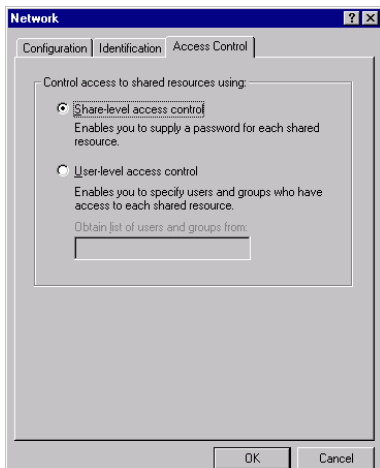

8. When finished, restart your computer to activate the new device.

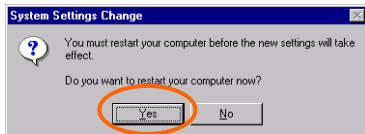

9. Once the computer has restarted and Windows has booted up, a **Logon** window will appear and require you to enter a username and password. Make up a username and password and click **OK**. Do not click the **Cancel** button, or you won't be able to log onto the network.
10. Double-click the **Network Neighborhood** icon on the windows desktop, and you should see the names of the other PCs on the network.

## In Windows 2000/XP


1. (In **Windows 2000**)

Go to **Start** → **Settings** → **Control Panel** → **Network and Dial-up Connections** → **Local Area Connection** → **Properties**.



(In **Windows XP**)

Go to **Start** → **Control Panel** → **Network Connections** → **Wireless Network Connection Enabled 802.11b Wireless CardBus PC Card** → **Properties**.



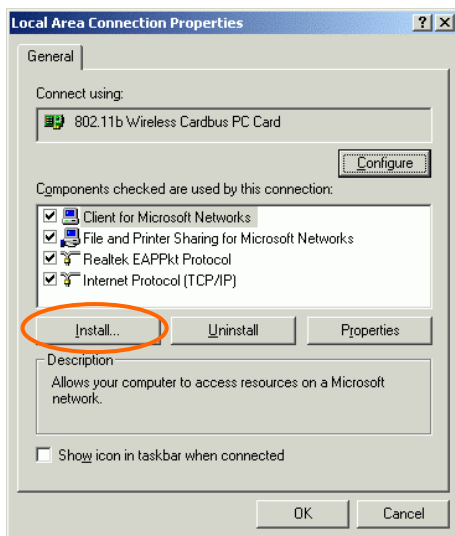

2. Make sure that you have all the following components installed.
  - **Client for Microsoft Networks**
  - **NWLink NetBIOS**
  - **NWLink IPX/SPX/NetBIOS Compatible Transport Protocol**
  - **Internet Protocol (TCP/IP)**
3. If any components are missing, click on the **Install...** button to select the **Client/Service/Protocol** required. After selecting the component you need, click **Add...** to add it in.

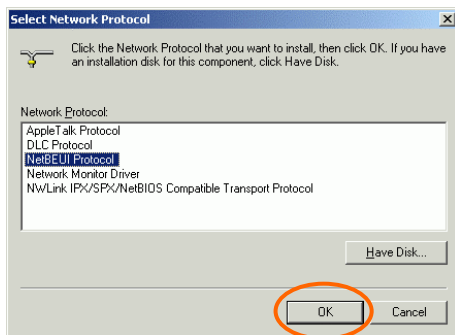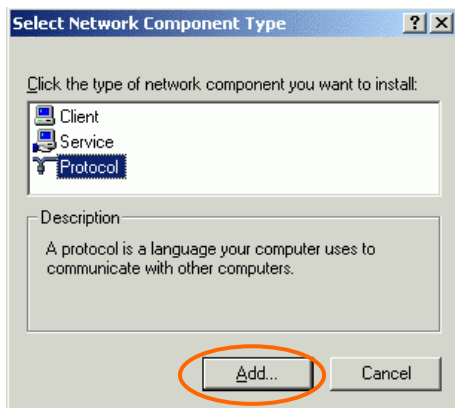

4. For making your computer visible on the network, make sure you have installed **File and Printer Sharing for Microsoft Networks**.
5. When finished, you must restart your computer to complete the installation.

# CONFIGURATION

After successful installation of the Wireless PC Card's Driver and Utility, a **Network Status** icon (see Fig.1) will display in the system tray. Meanwhile, a **RTL8180 Shortcut** icon (see Fig.2) will appear on the desktop.




Fig1




Fig2

## Accessing the Configuration Utility

The Configuration Utility is accessed by double-clicking on the **Shortcut** icon.



Click **Advanced** to enter the Configuration Window.

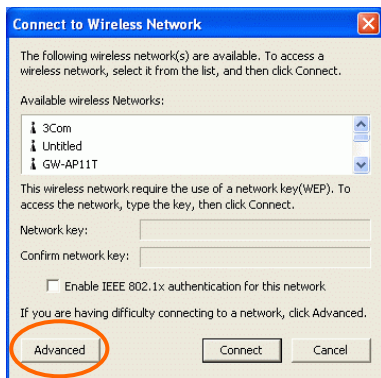

All settings are categorized into 6 Tabs:

**Config Tab**

**Advanced Config Tab**

**Status Tab**


**Statistics Tab**

**About Tab**


**Exit Tab**

## Config Tab

The **Config** tab allows you to configure WEP encryption and add/remove Profile(s).

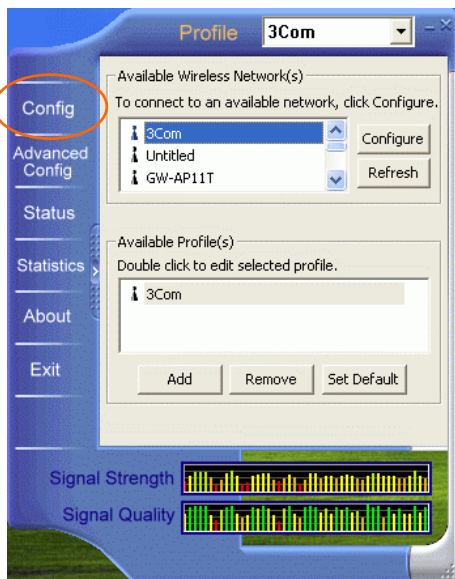


Item	Description
Available Wireless Network(s)	Displays all available networks.
<div data-bbox="118 263 232 295" style="border: 1px solid black; padding: 2px; display: inline-block;">Configure</div>	<p data-bbox="360 263 966 319">Highlight an available network, click <b>Configure</b> to set up WEP encryption (see diagram below).</p> <div data-bbox="433 326 891 844" style="border: 1px solid blue; padding: 10px; margin: 10px auto; width: fit-content;"> <p data-bbox="443 333 677 354"><b>Wireless network properties</b> <span style="float: right; color: red;">✕</span></p> <p data-bbox="453 396 653 417">Network Name(SSID): <input type="text" value="3Com"/></p> <p data-bbox="464 438 643 459">Wireless network key(WEP)</p> <p data-bbox="464 466 757 487">This network requires a key for the following:</p> <div data-bbox="484 501 757 550"> <input type="checkbox"/> Data encryption(WEP enabled)  <input type="checkbox"/> Network Authentication(Shared mode)         </div> <p data-bbox="464 578 550 599">Network key: <input type="text"/></p> <p data-bbox="464 613 601 634">Confirm network key: <input type="text"/></p> <p data-bbox="464 662 674 683">Key index (advanced): <input type="text" value="1"/></p> <div data-bbox="453 711 850 774"> <input type="checkbox"/> Enable IEEE 802.1x authentication for this network  <input type="checkbox"/> This is a computer-to-computer(ad hoc) network; wireless access points are not used.         </div> <div data-bbox="660 802 871 830" style="text-align: right;"> <input type="button" value="OK"/> <input type="button" value="Cancel"/> </div> </div>
<div data-bbox="118 907 208 939" style="border: 1px solid black; padding: 2px; display: inline-block;">Refresh</div>	Click the button to refresh and search for all available networks.

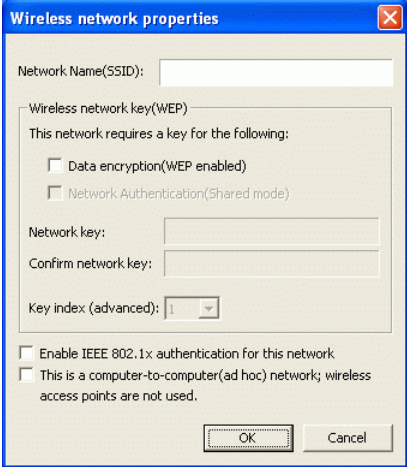Item	Description
<b>Available Profile(s)</b>	Displays all available profiles.
<div data-bbox="118 176 168 211" style="border: 1px solid black; padding: 2px; display: inline-block;">Add</div>	<p>Click the button and the <b>Wireless Network Properties</b> window will appear. In the <b>Network Name (SSID)</b> field, enter your desired network name listed in the above <b>Available Wireless Network(s)</b> box, and click <b>OK</b>.</p> 
<div data-bbox="118 912 212 947" style="border: 1px solid black; padding: 2px; display: inline-block;">Remove</div>	<p>Highlight the unwanted profile listed in the <b>Available profile(s)</b> box, and click the button to remove it.</p>
<div data-bbox="118 999 245 1034" style="border: 1px solid black; padding: 2px; display: inline-block;">Set Default</div>	<p>Highlight a profile, click the button to set it as a default profile.</p>

## Advanced Config Tab

The **Advanced Config** Tab allows you to change advanced configuration settings, such as the **Ad Hoc default channel**, **Power Save** and **Radio Off**.

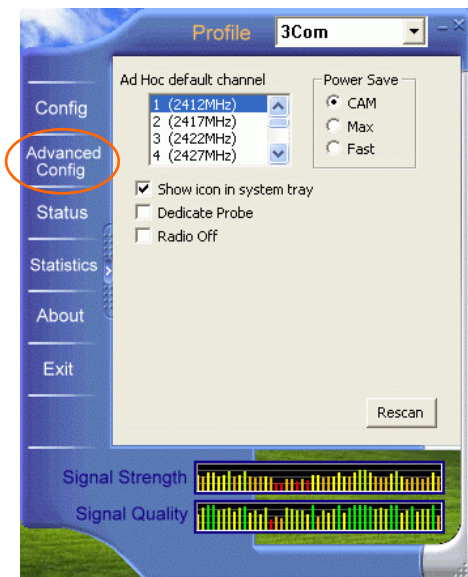


Item	Description
<b>Ad Hoc default channel</b>	Select the appropriate channel from the list provided to correspond with your network settings. All devices in the wireless LAN must be configured to share the same radio channel in order to function properly.
<b>Power Save</b> <b>⦿ CAM</b> <b>(Constantly Awake Mode)</b>	Keeps the PC card powered up continuously so there is little lag in message response time. Consumes the most power but offers the highest throughput. Is recommended for desktop computers and devices that use AC power.

Item	Description
<p><b>☉ Max PSP (Power Save Mode)</b></p>	<p>Causes the access point to buffer incoming messages for the client adapter, which wakes up periodically and polls the access point to see if any buffered messages are waiting for it. The PC card can request each message and then go back to sleep.</p> <p>Conserves the most power but offers the lowest throughput. Is recommended for devices which power consumption is the ultimate concern (such as small battery-powered devices).</p>
<p><b>☉ Fast PSP (Power Save Mode)</b></p>	<p>Switched between PSP mode and CAM mode, depending on network traffic. This mode switched to CAM when retrieving a large number of packets and switches back to PSP after the packets have been retrieved.</p> <p>Is recommended when power consumption is a concern but you need greater throughput than that allowed by Max PSP.</p>
<p><b>Channel</b></p>	<p><b>Channel button is enabled only in Peer-to-Peer mode.</b> (There are 14 channels available, depending on the country.)</p>
<p><input type="checkbox"/> Show icon in System Tray</p>	<p>Check this box to show icon in system tray.</p>
<p><input type="checkbox"/> Dedicate Probe</p>	
<p><input type="checkbox"/> Radio Off</p>	<p>Check/Uncheck this box to disable/enable the radio module function of the Wireless PC Card.</p>
<p><b>Rescan</b></p>	<p>Searches for all available networks. Click this button to rescan and issue an updated list of all available sites.</p>


## Status Tab

The **Status** Tab displays basic link information, including **Channel Set**, **MAC Address**, **Network Type** and **Power Save Mode**.

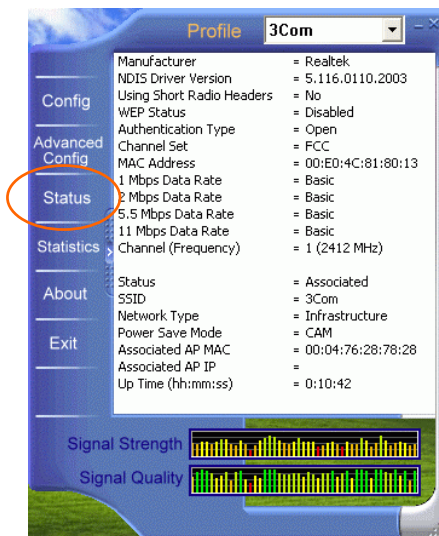


## Statistics Tab

The **Statistics** tab shows the available statistic information. Press **Reset** button to renew this list of statistics.

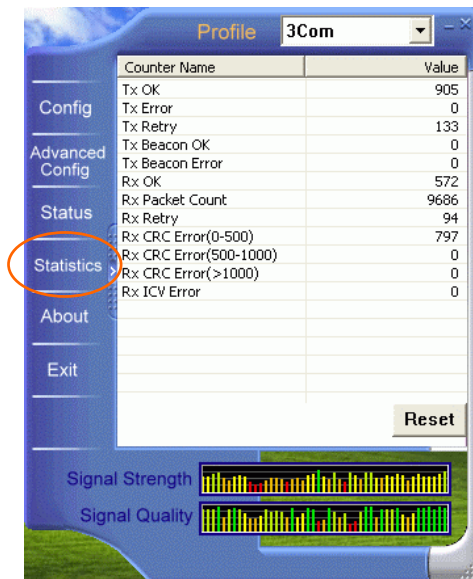


## About Tab

Click on the **About** tab to view basic version information about the **Configuration Utility**.

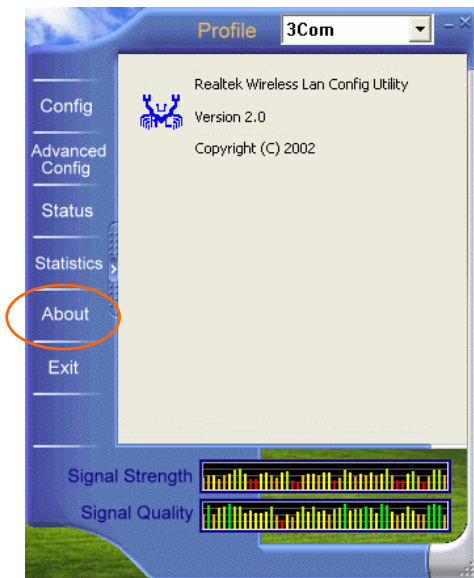

## Exit Tab

Click on the **Exit** tab to exit the application.

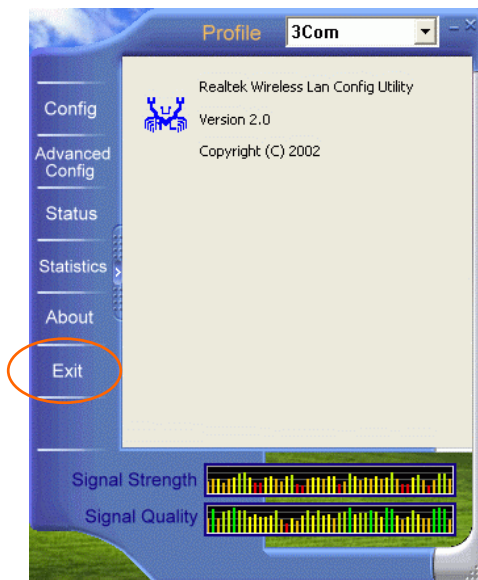


# UNINSTALLATION


In case you need to uninstall the Utility or Driver, please refer to below sections.

## Uninstall the Utility


1. Go to **Start → (Settings →) Control Panel → Add or Remove Programs**.
2. Highlight **RTL8180**, Click **Change/Remove**.

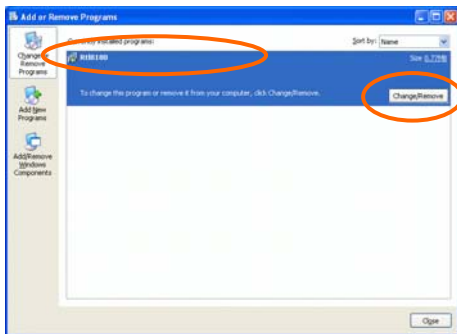


3. Click **Next** to continue.

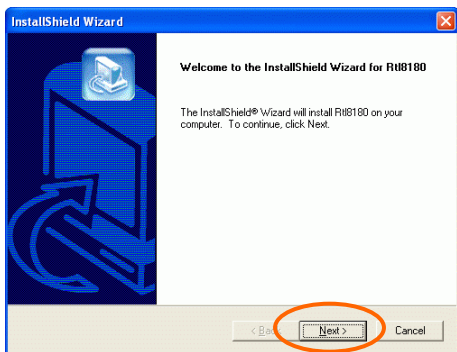

4. Click **OK** to continue.




5. Click **Finish** to complete the uninstalled procedure.

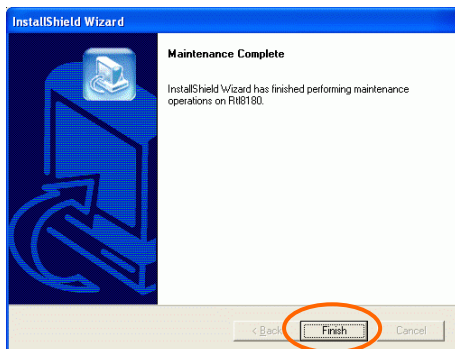

## Uninstall the Driver

1. Right-click **My Computer** → **Properties** → **Hardware** → **Device Manager**.
2. Right-click **802.11b Wireless CardBus PC Card** then click **Uninstall** (or **Remove**).

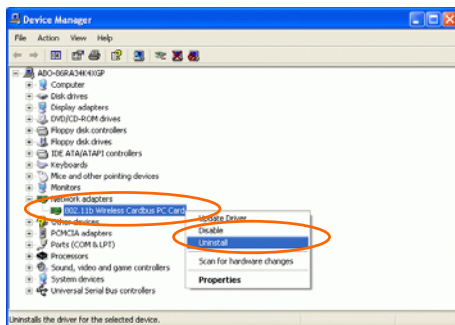

3. Click **OK**.



4. The system may prompt you to restart your computer. Click **Yes**

# SPECIFICATIONS

<b>Standards</b>	IEEE 802.11b,Wi-Fi compliant
<b>Host Interface</b>	32-bit CardBus
<b>Antenna</b>	Patch Antenna
<b>Physical Specifications</b>	Weight: 40 g Dimension: 119(L) x 53.94 (W) x 6.88(H) mm
<b>LED Indicators</b>	LINK: Green (ON) ACT: Orange (Blink)
<b>Power Requirement</b>	Operating Voltage: 3.3V TX consumption: 320mA (Max) RX consumption: 150mA (Max)
<b>Operating Frequency Range</b>	2.412GHz-2.4835GHz
<b>Number of Selectable Channels</b>	USA, Canada: 11 channels Europe: 13 channels Japan: 14 channels
<b>Modulation Technique</b>	Direct Sequence Spread Spectrum (CCK, DQPSK, DBPSK)
<b>Security</b>	0/64/128 bit WEP
<b>Spreading</b>	11 chip Barker sequence
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
<b>Supported OS</b>	Windows 98/ME/2000/XP
<b>EMC Certification</b>	FCC Part 15 in US EN300328 and EN300826 (EN301489-17) in Europe
<b>Environment Specifications</b>	Operating Temperature: 0~65℃ ambient temperature Storage Temperature: -20~75℃ ambient temperature Operating humidity: 95% maximum (non-condensing) Storage humidity: 95% maximum (non-condensing)