



FCC RADIO TEST REPORT

FCC ID : TVE-2401T25

Equipment : Network Security Gateway

Brand Name : FORTINET



Model Name : FortiGateRugged 70Fxxxxxxxxxx,
FORTIGATERUGGED-70Fxxxxxxxxxx,
FGR-70Fxxxxxxxxxx,
FortiGateRugged 70F-3G4Gxxxxxxxxxx,
FORTIGATERUGGED-70F-3G4Gxxxxxxxxxx,
FGR-70F-3G4Gxxxxxxxxxx, (where "x" can be used
as "A-Z", or "0-9", or "-", or blank for software
changes or marketing purposes only)


Applicant : Fortinet, Inc.
899 KIFER RD
SUNNYVALE CA 94086
UNITED STATES

Manufacturer : Fortinet, Inc.
899 KIFER RD
SUNNYVALE CA 94086
UNITED STATES

Standard : FCC Part 15 Subpart C §15.247

The product was received on Sep. 05, 2022 and testing was performed from Sep. 13, 2022 to Nov. 07, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
4 List of Measuring Equipment	35
5 Uncertainty of Evaluation.....	37
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR281818	01	Initial issue of report	Dec. 20, 2022
FR281818	02	Revise Product Feature of Equipment Under Test	Jan. 18, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	13.85 dB under the limit at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	5.77 dB under the limit at 0.506 MHz
3.7	15.203	Antenna Requirement	Pass	-

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to report "Uncertainty of Evaluation".

Comments and Explanations:

- The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.
- The purpose of different model name is for marketing segmentation and different RF function.

Reviewed by: Yun Huang
Report Producer: Clio Lo

1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth - LE

Product Feature		
Antenna Type	Stubby Helical Antenna, Straight type	
Antenna information		
2402 MHz ~ 2480 MHz	Peak Gain (dBi)	1.53

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	CO05-HY (TAF Code: 1190)	
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.	

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	TH05-HY, 03CH20-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


Mode	Power Setting
Bluetooth – LE (1Mbps)	-
2402MHz	12.00
2440MHz	12.00
2480MHz	12.00
Bluetooth – LE (2Mbps)	-
2402MHz	12.00
2440MHz	12.00
2480MHz	12.00

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth - LE Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth - LE Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth - LE Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth - LE Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth - LE Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth - LE Tx CH39_2480 MHz_2Mbps

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated Test Cases	Mode 1: Bluetooth - LE Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth - LE Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth - LE Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth - LE Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth - LE Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth - LE Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth - LE + Adapter

2.3 Connection Diagram of Test System

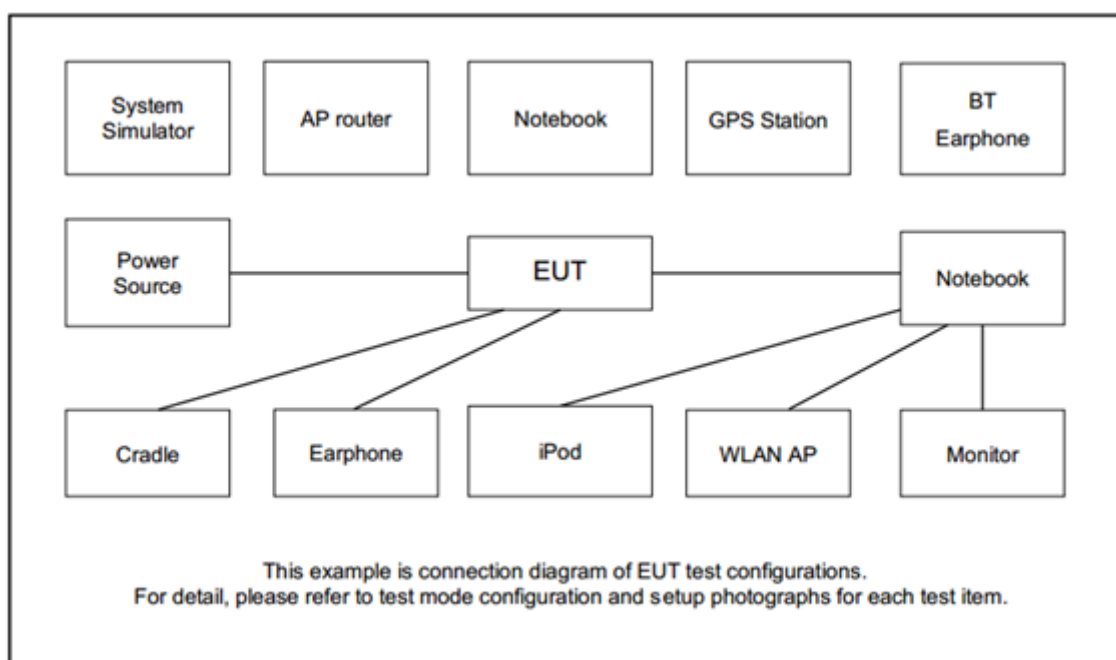

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Mobile Phone	SAMSUNG	SM-A730F/DS	A3LSMA730F	N/A	N/A
2.	Adapter	FSP	FSP036-RHBN3	N/A	N/A	Unshielded, 1.8m



2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

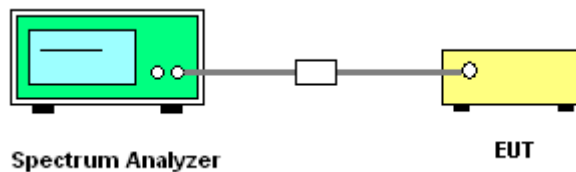




3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

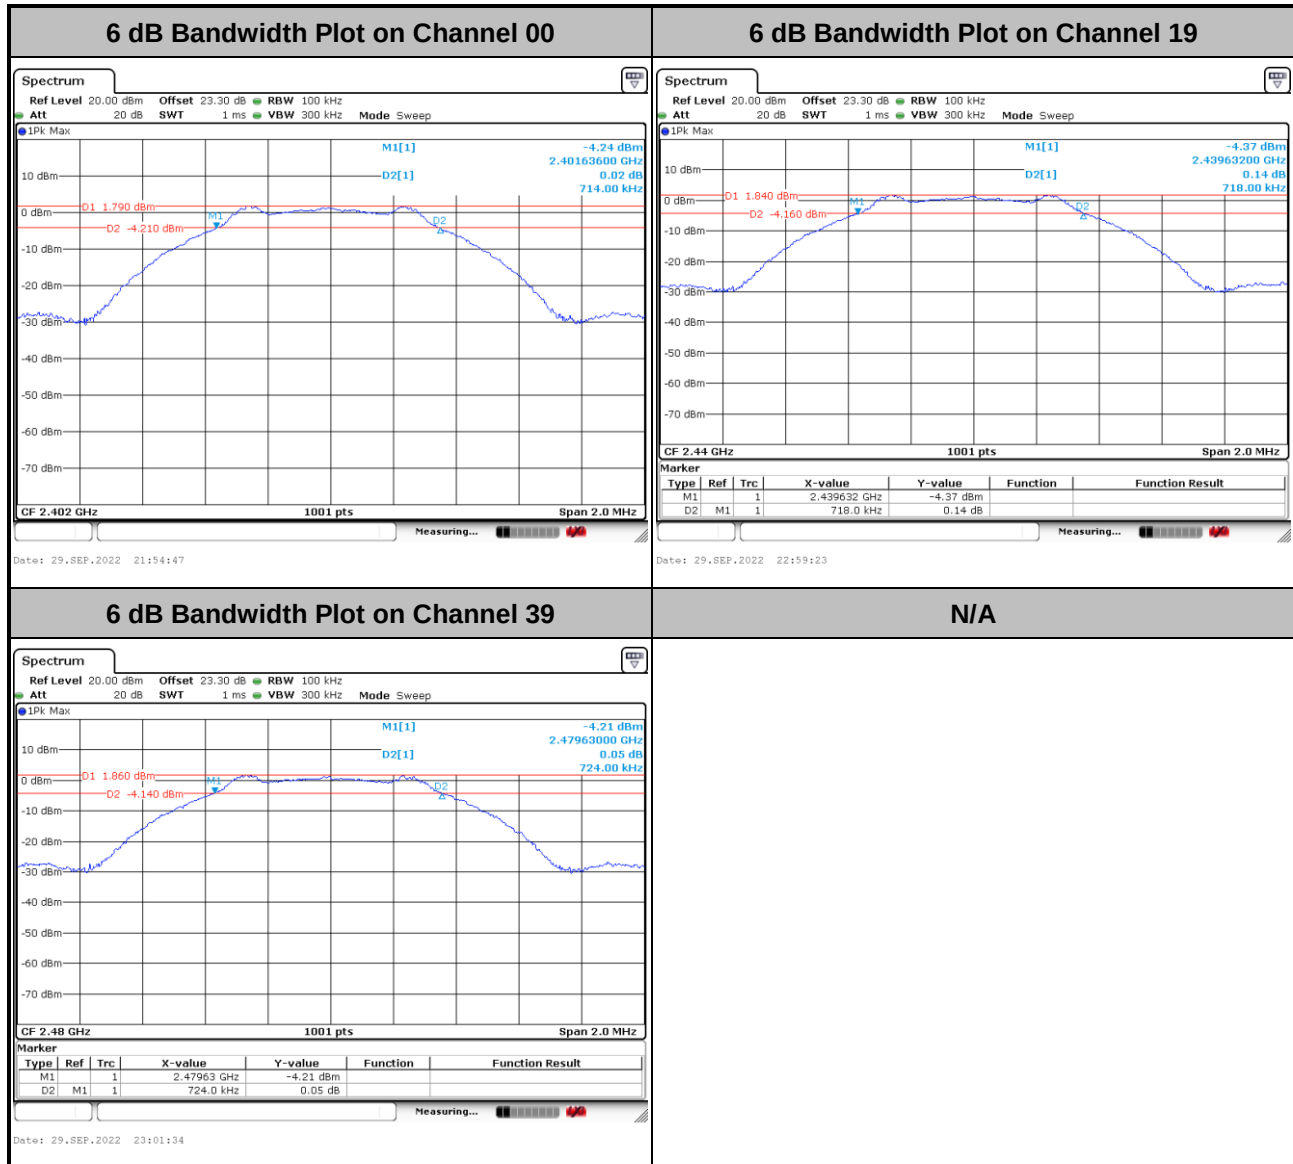



<2Mbps>

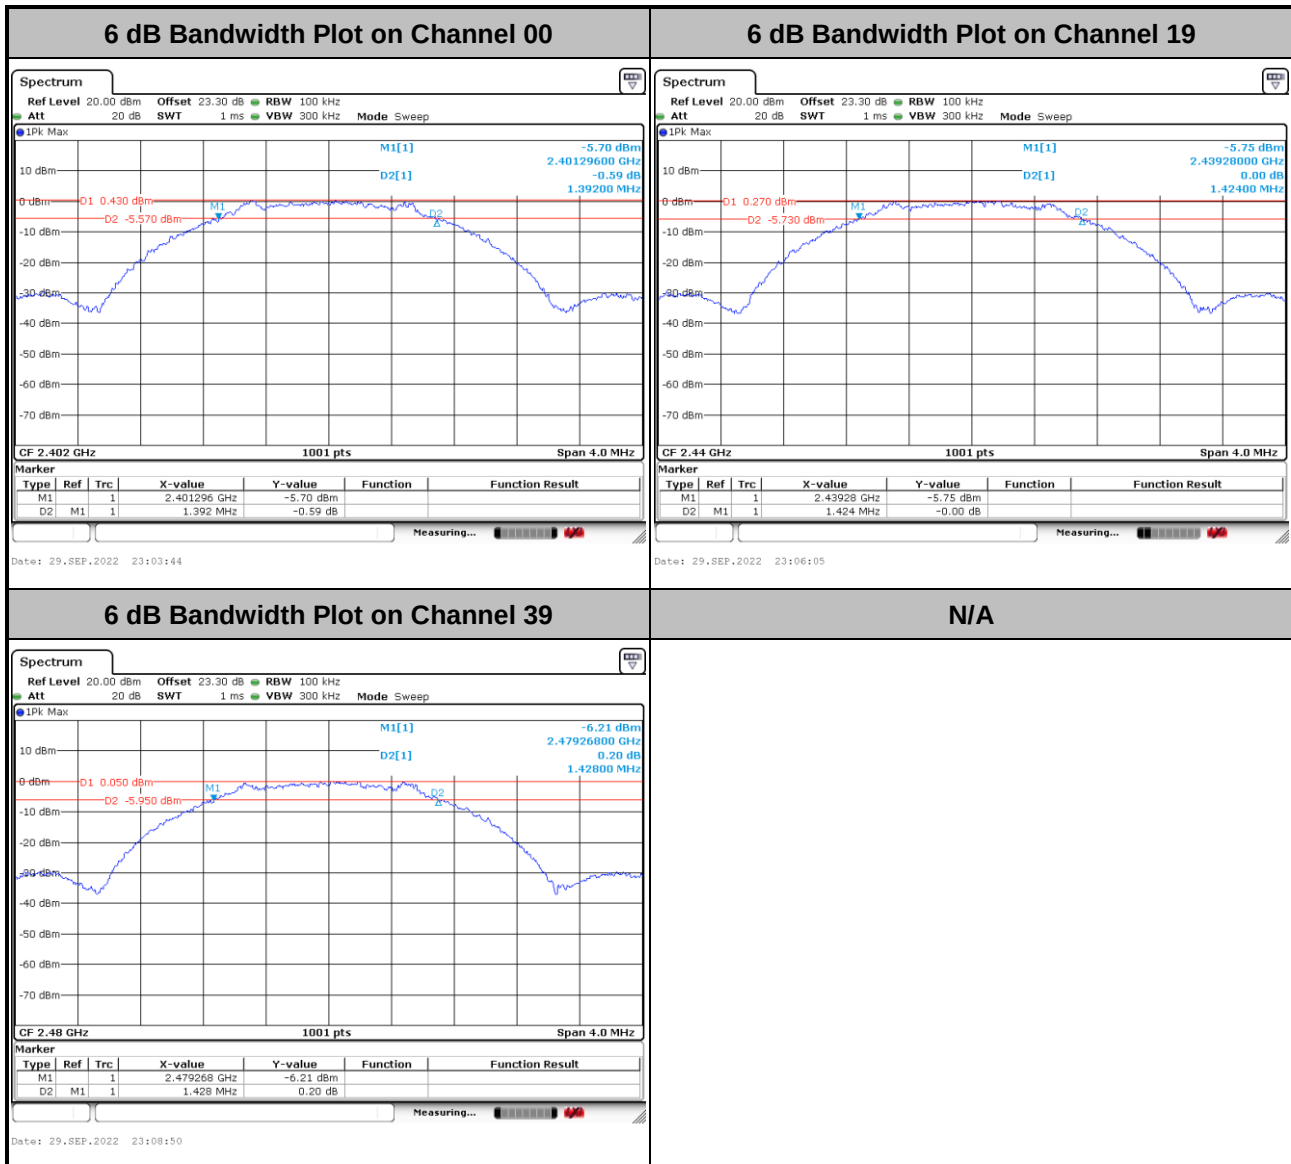




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps>

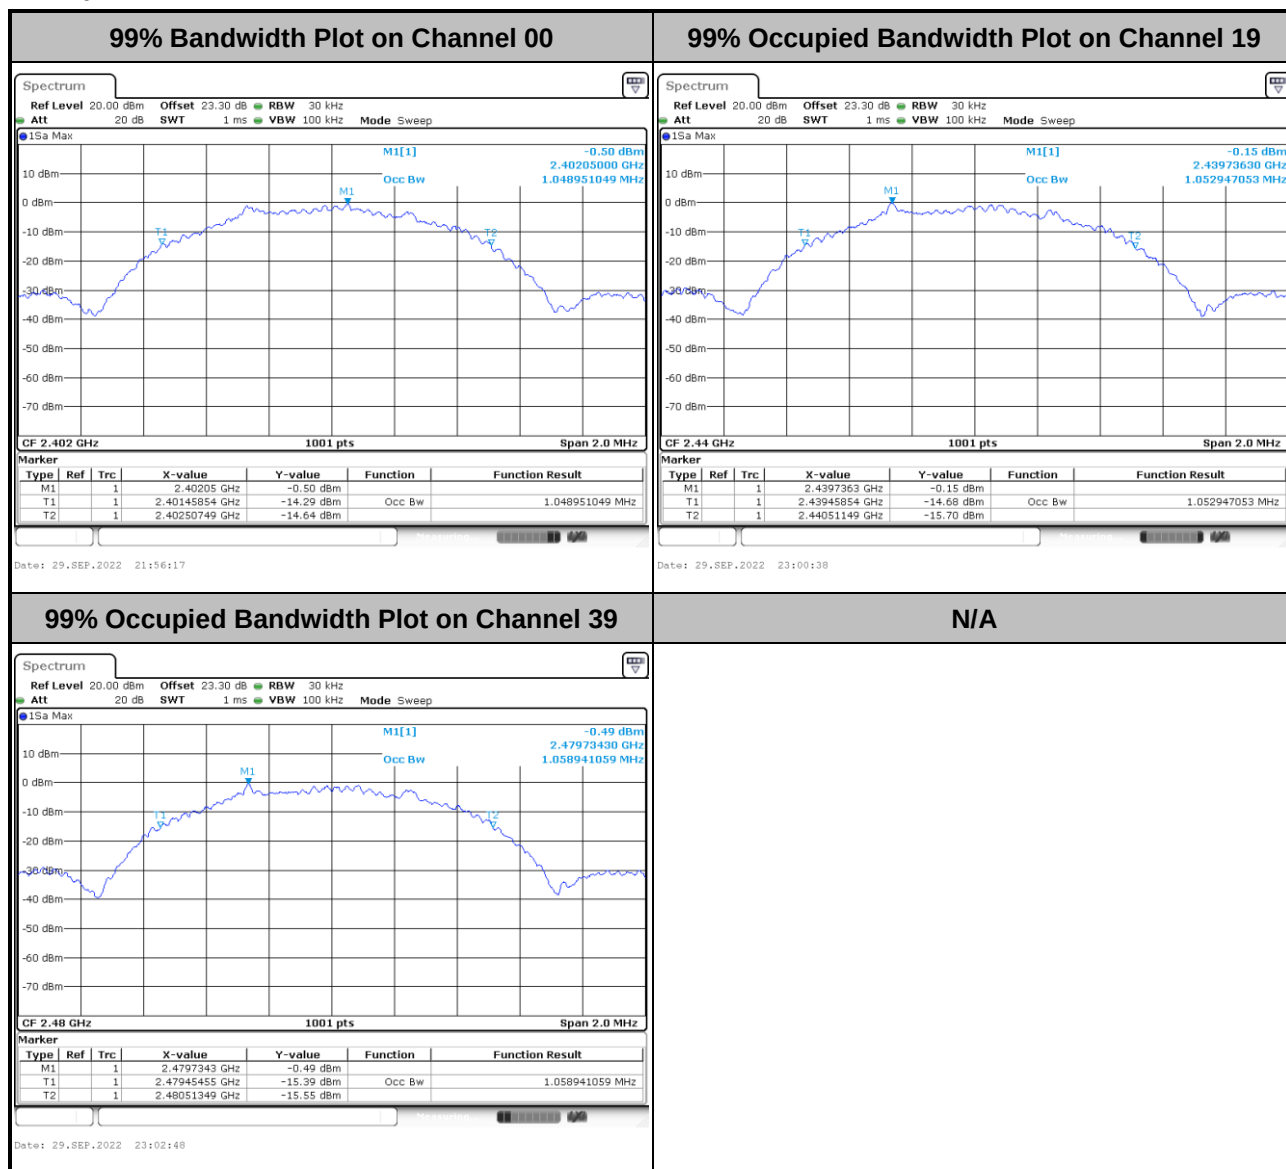

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

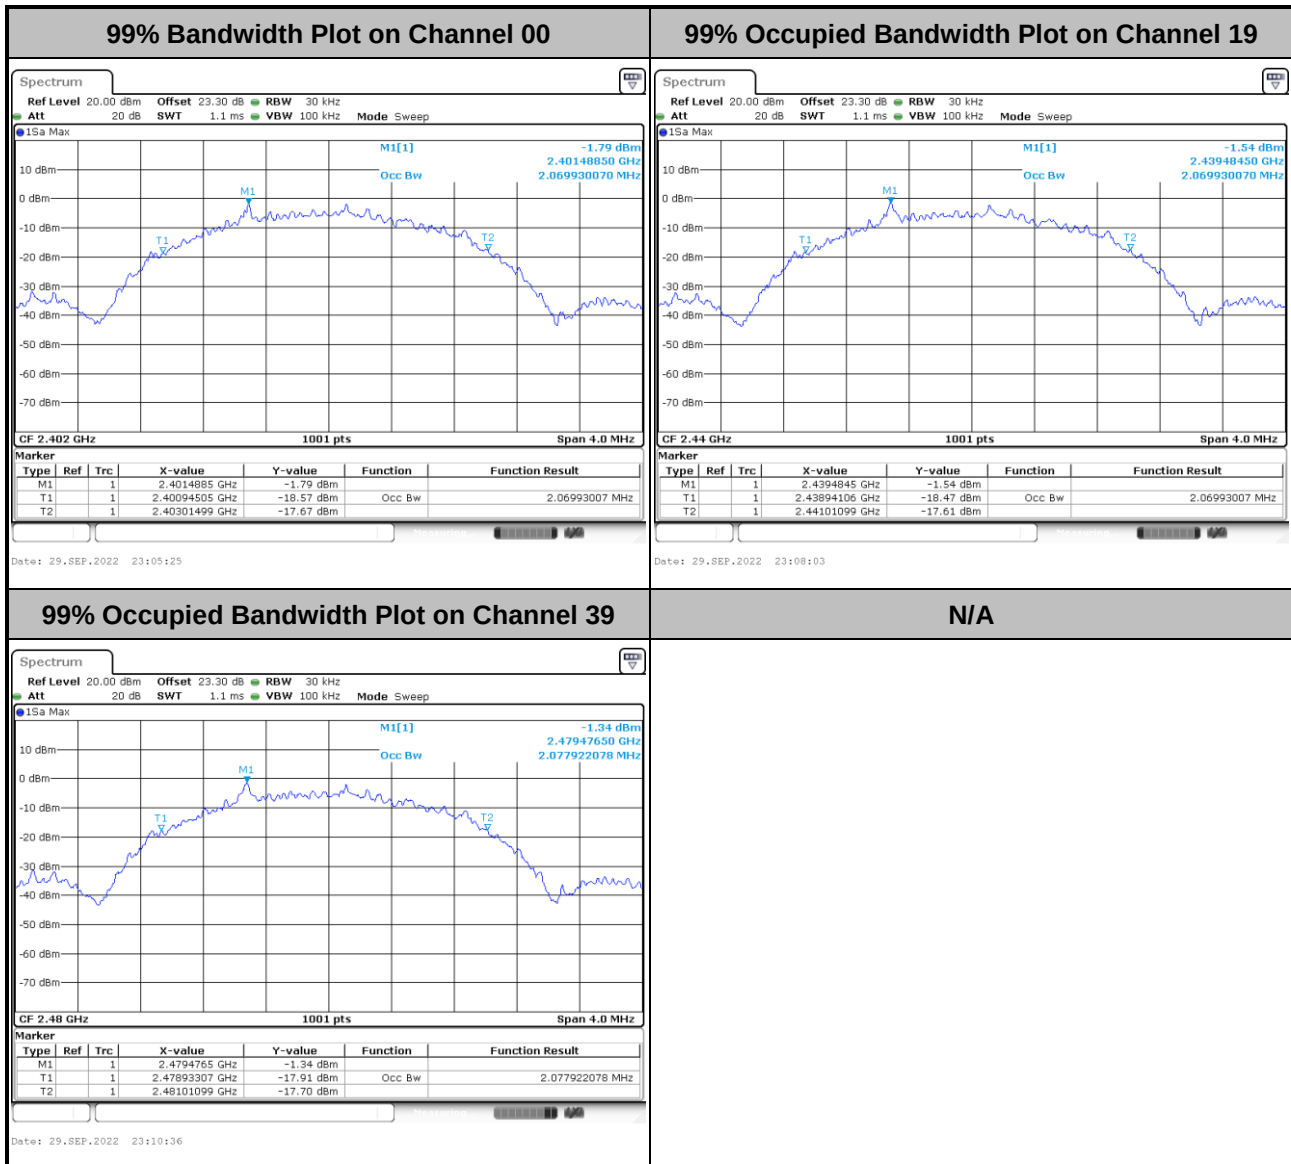

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

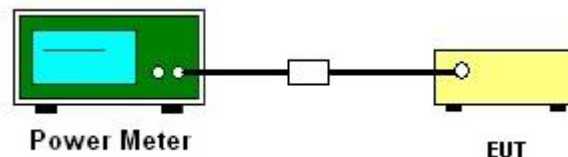

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

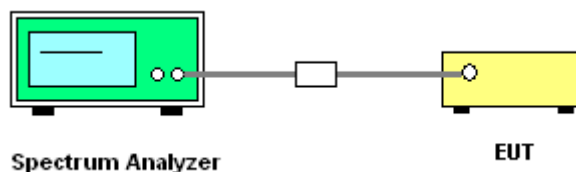


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

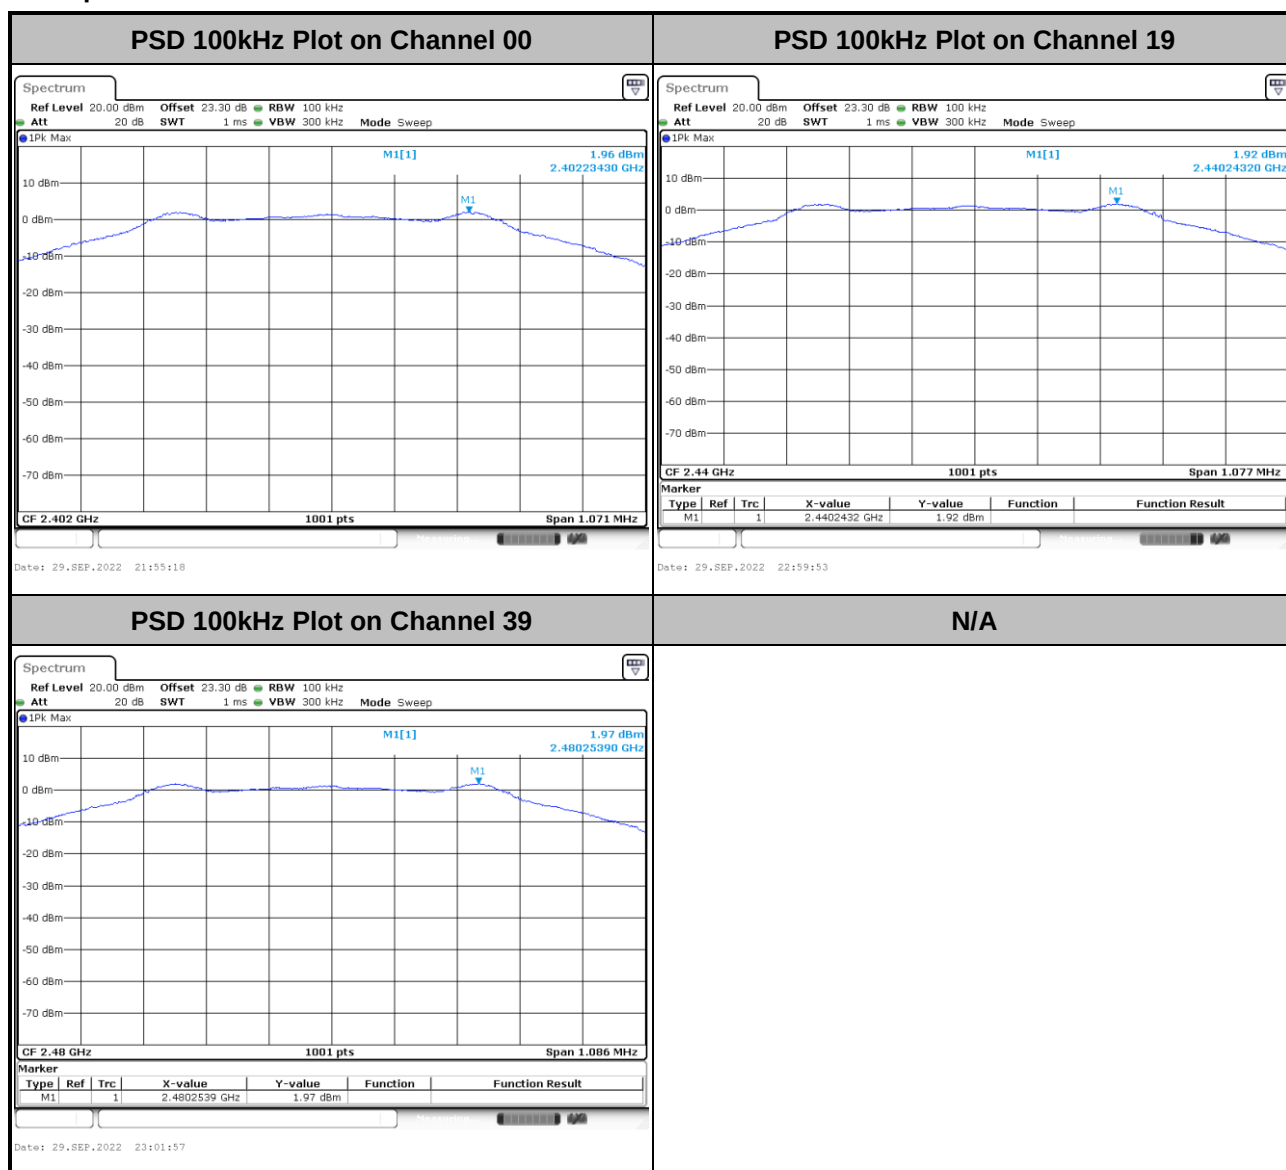




<2Mbps>

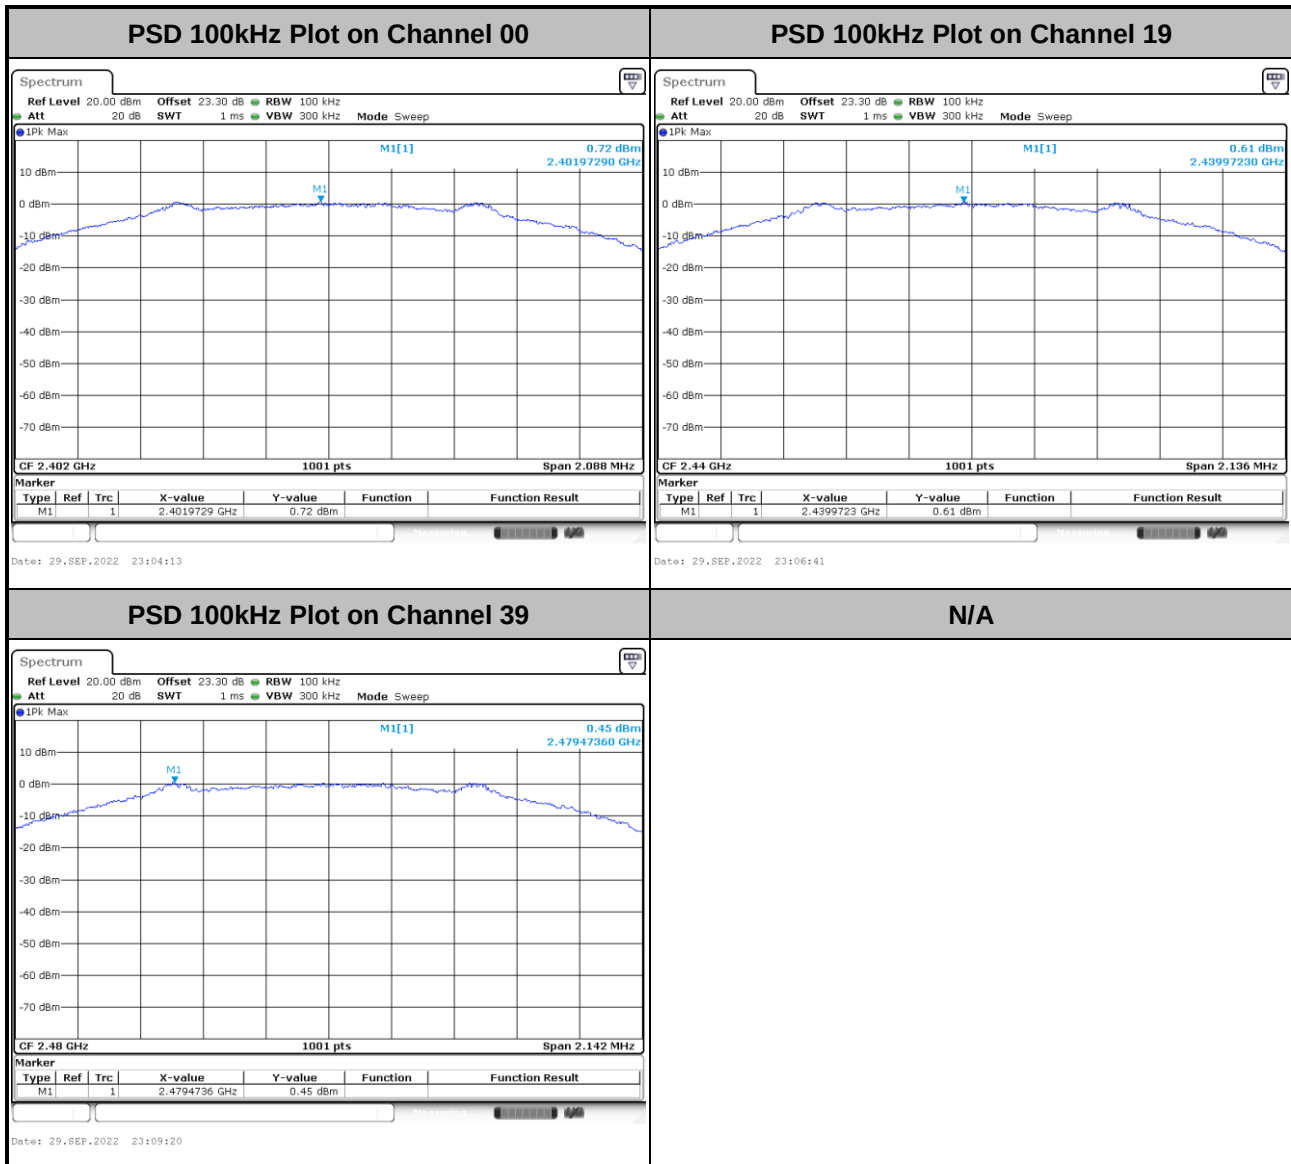




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

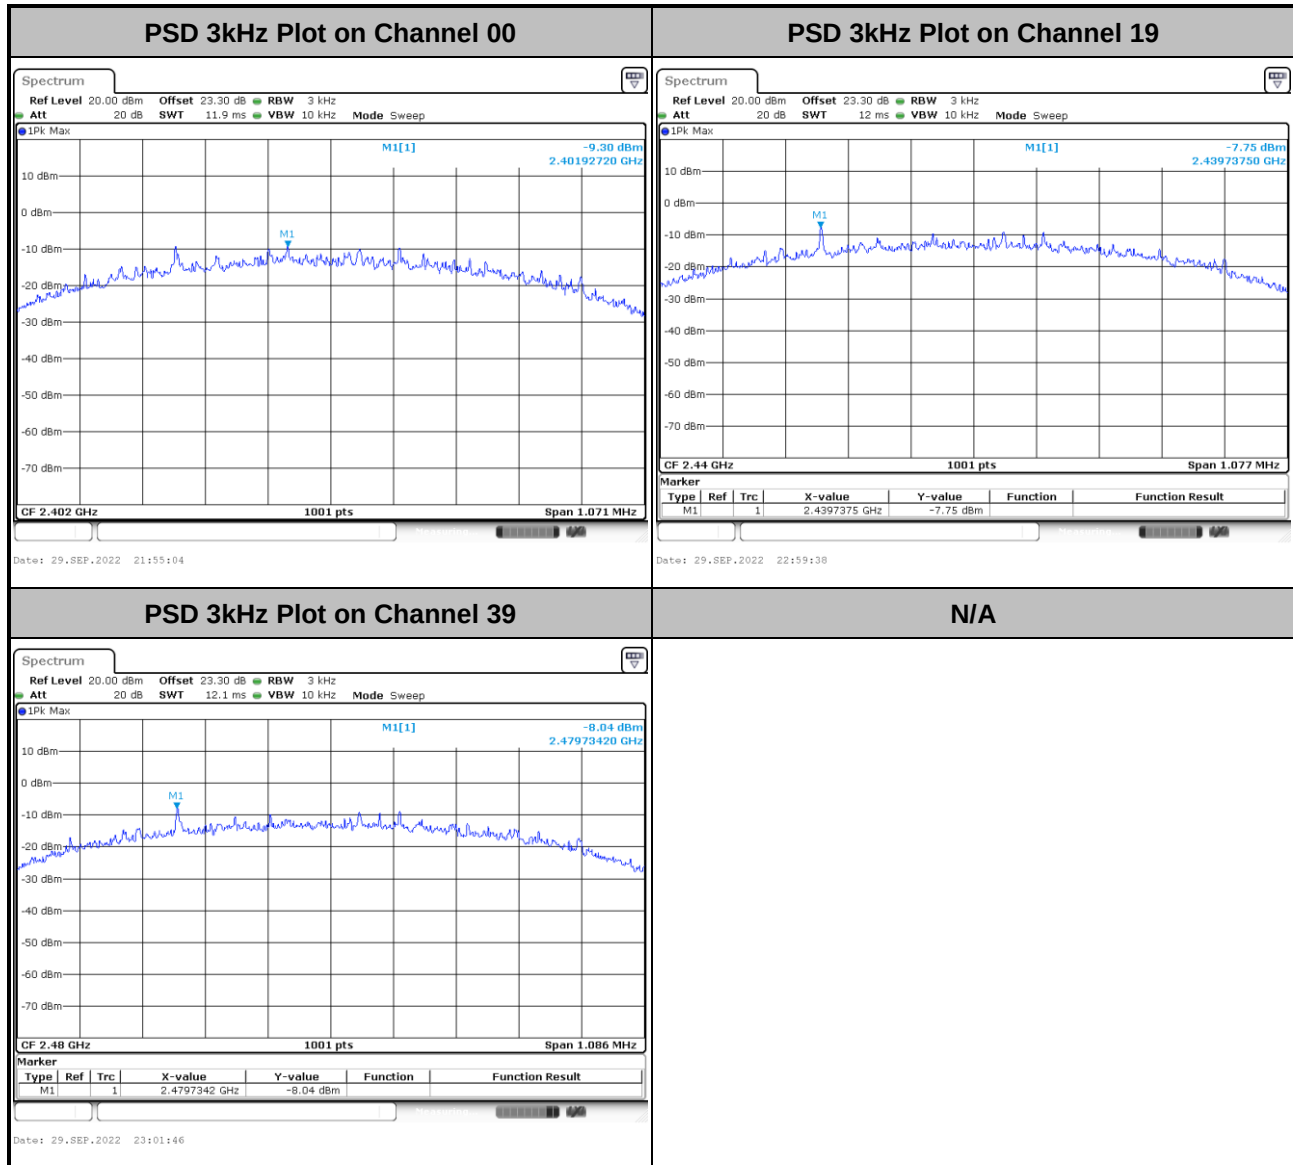



<2Mbps>

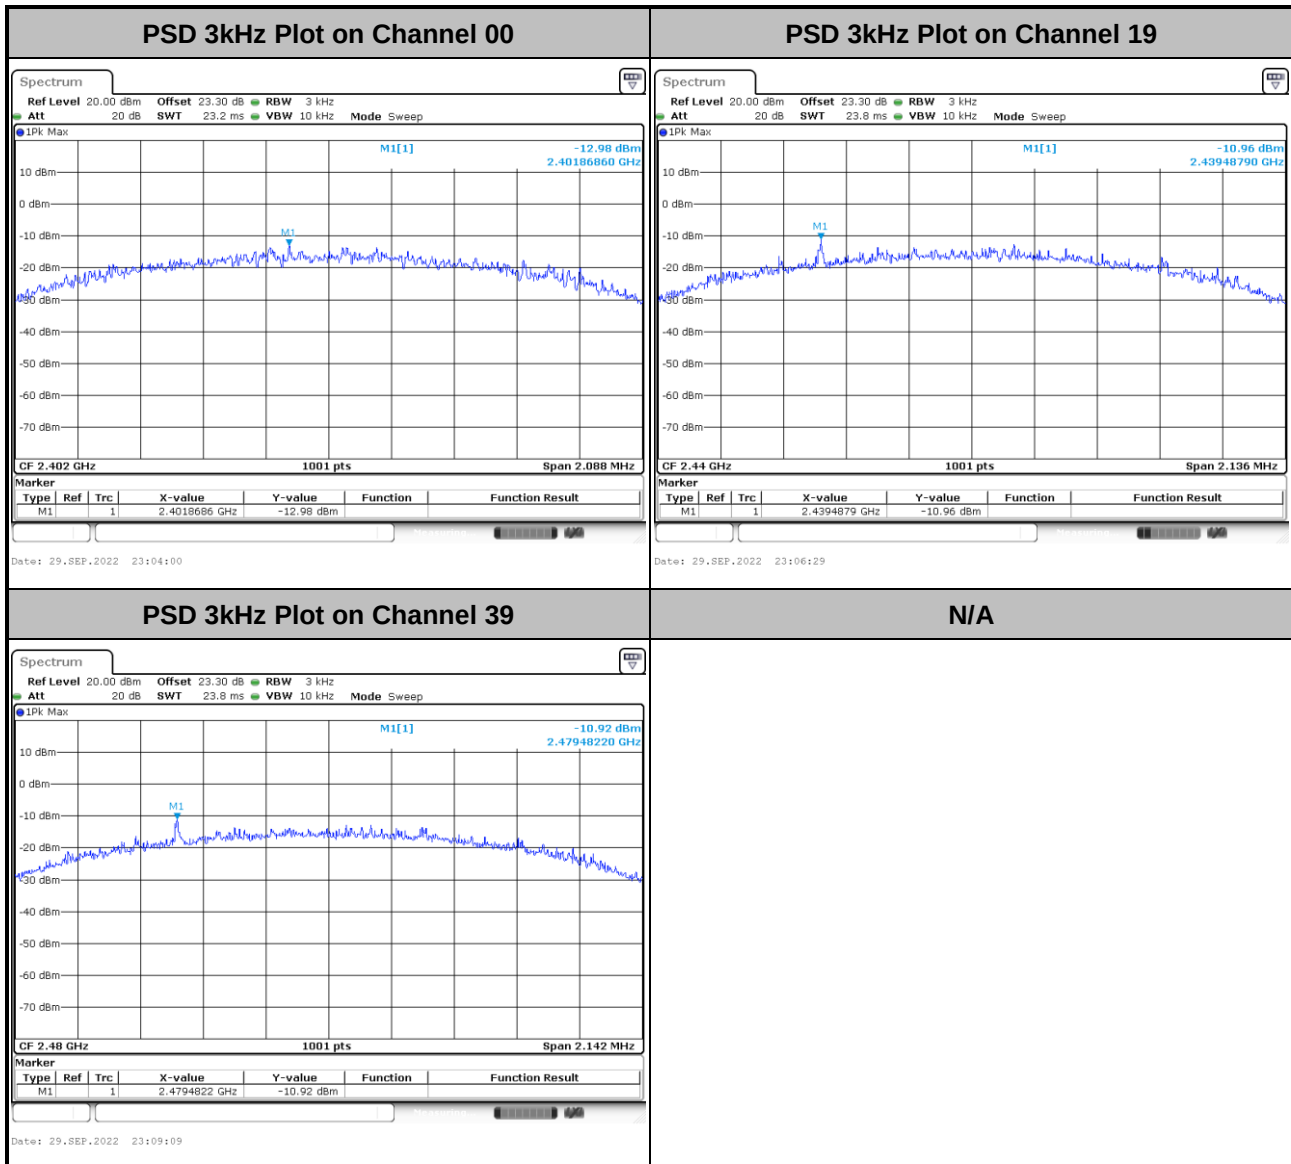

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

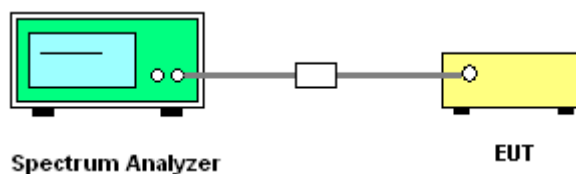




3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

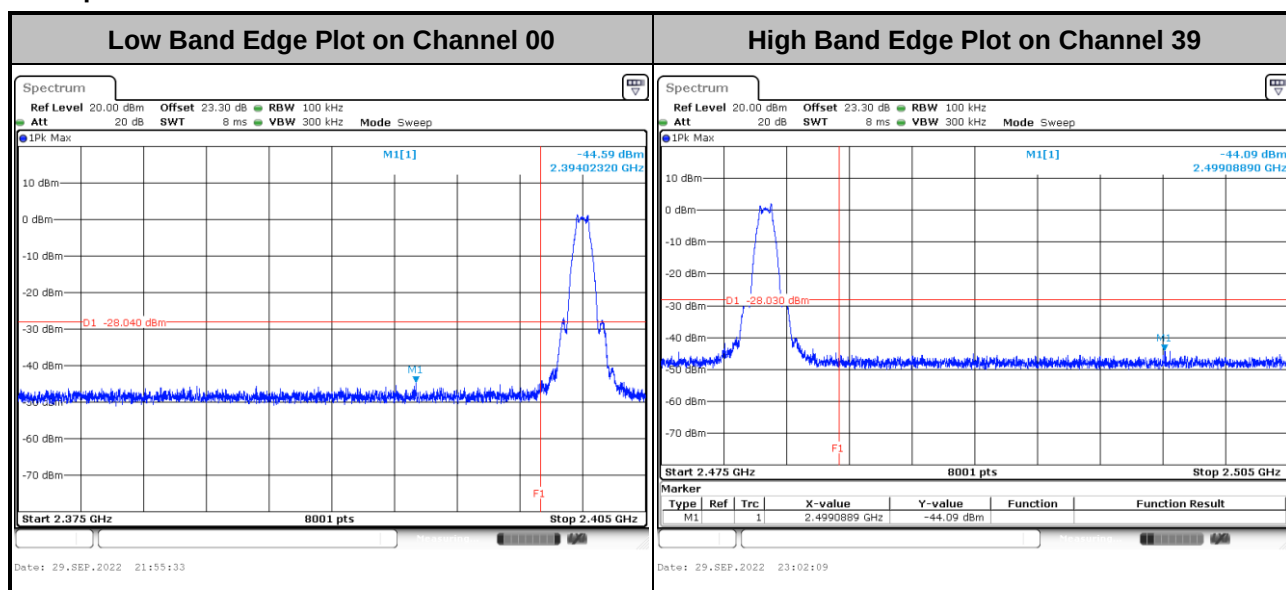


<2Mbps>


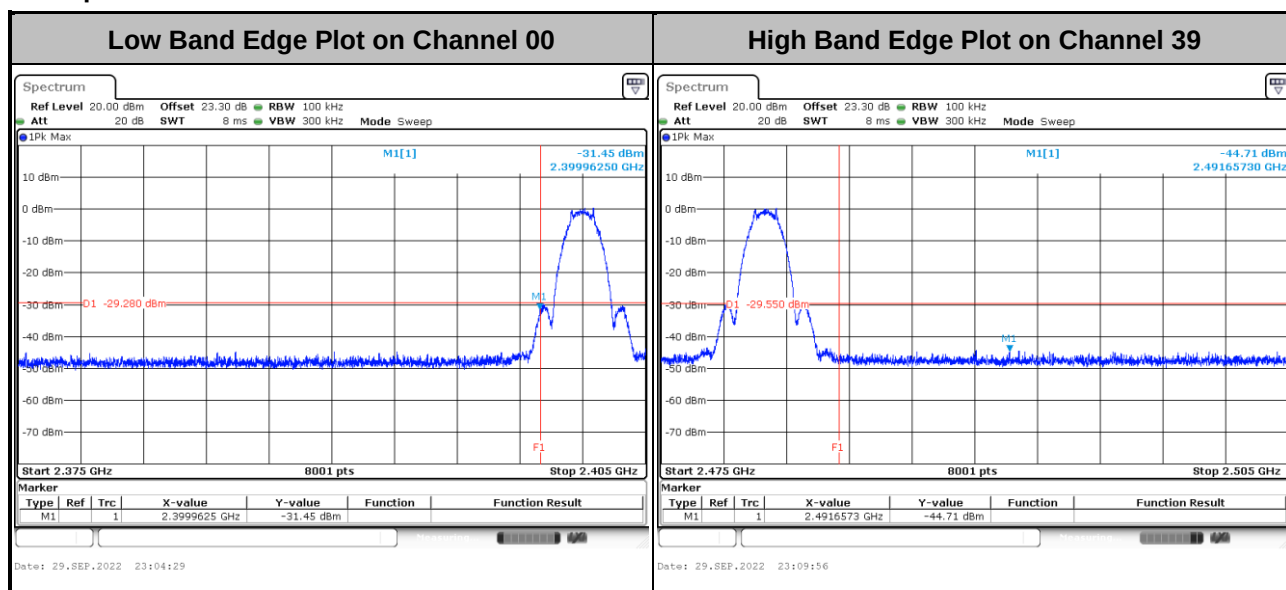




3.4.6 Test Result of Conducted Spurious Emission Plots





<1Mbps>


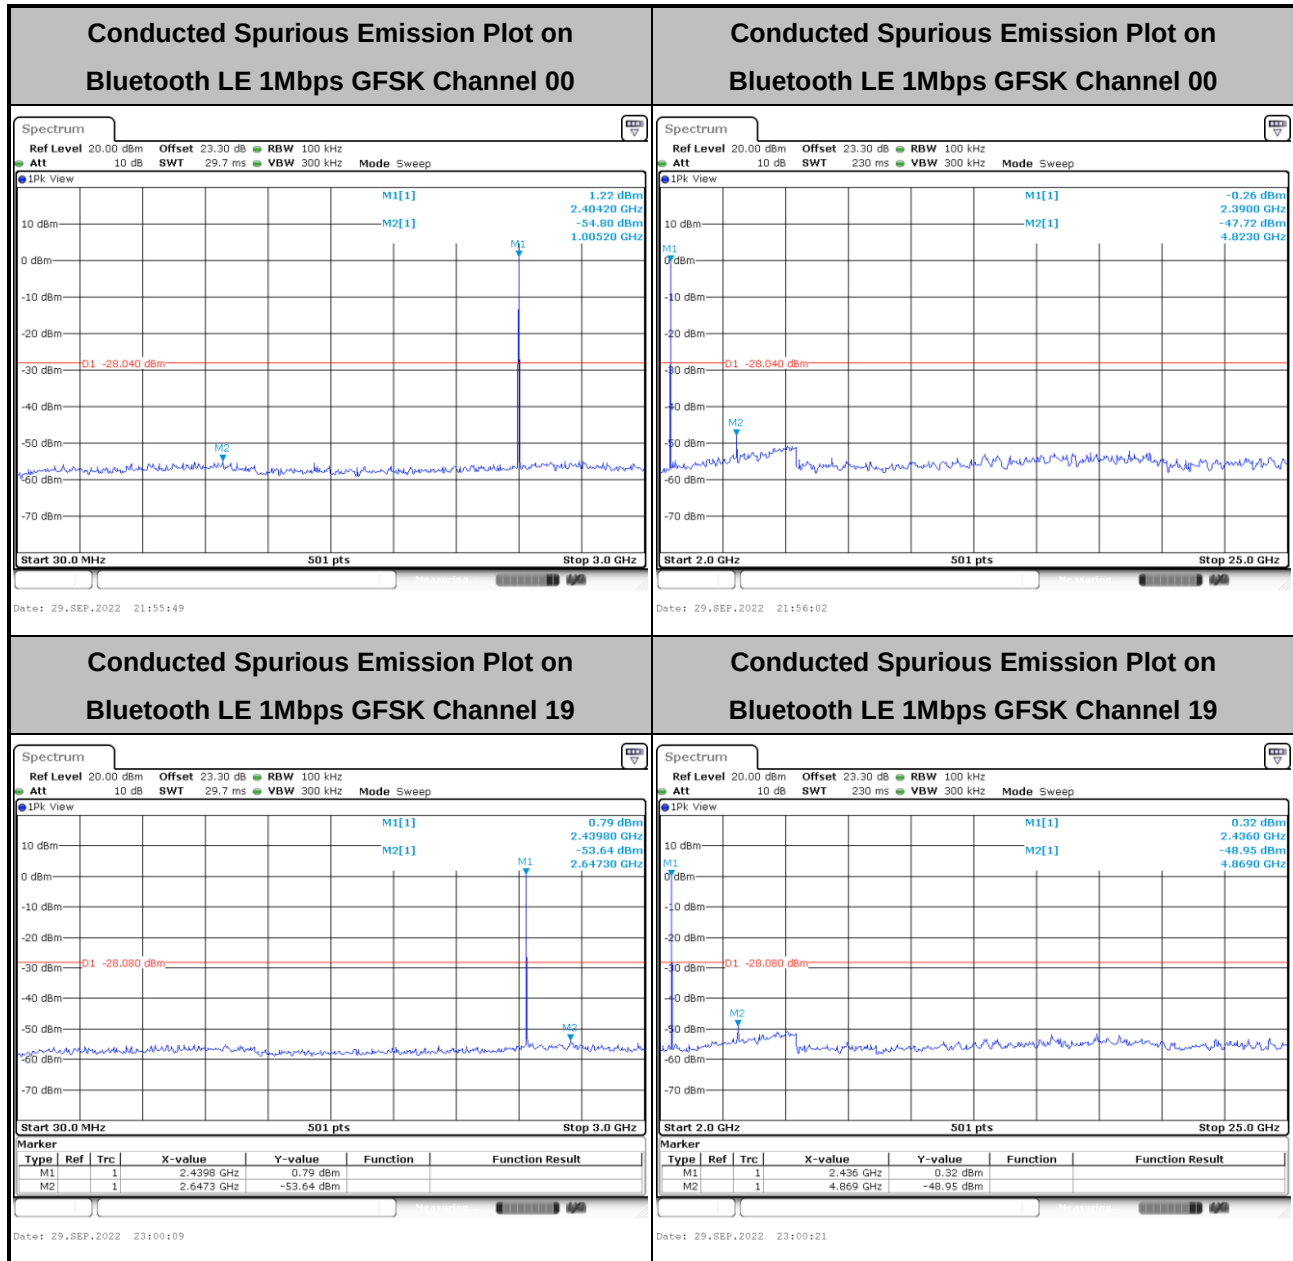


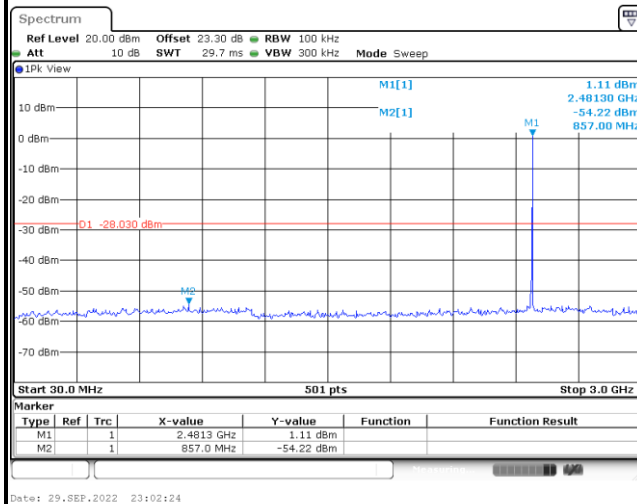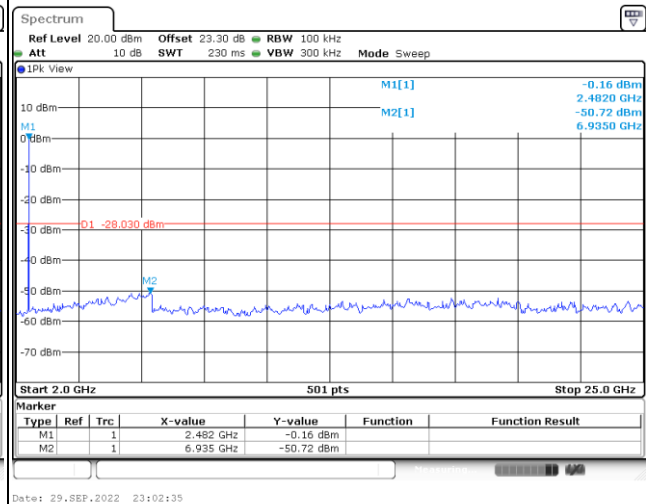**Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39****Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39**



<2Mbps>

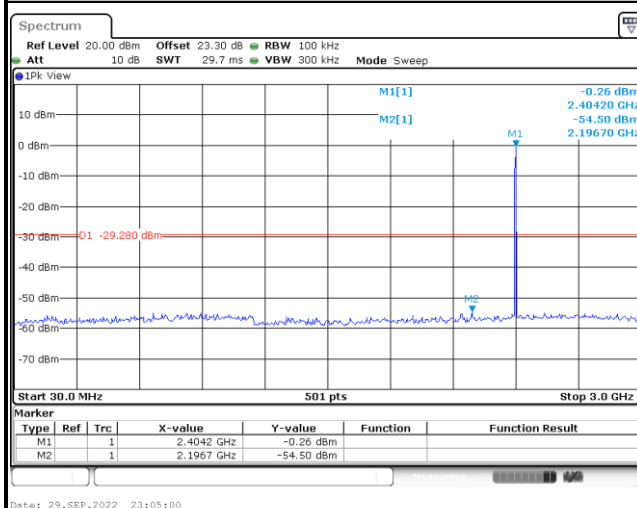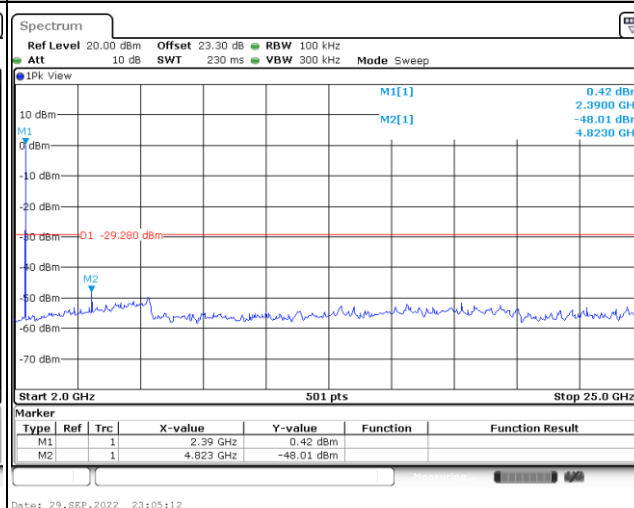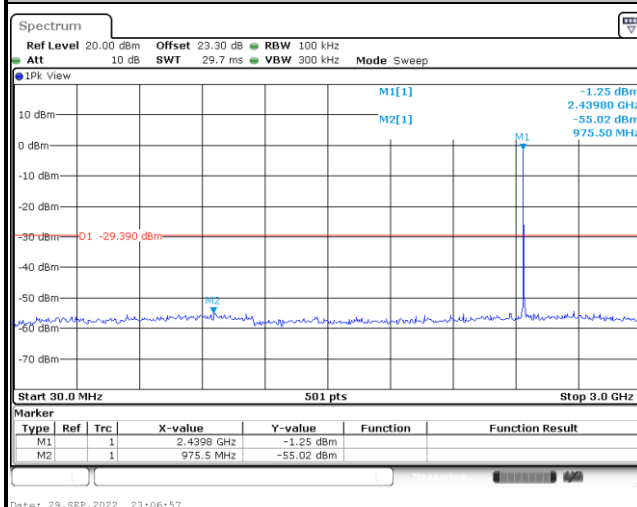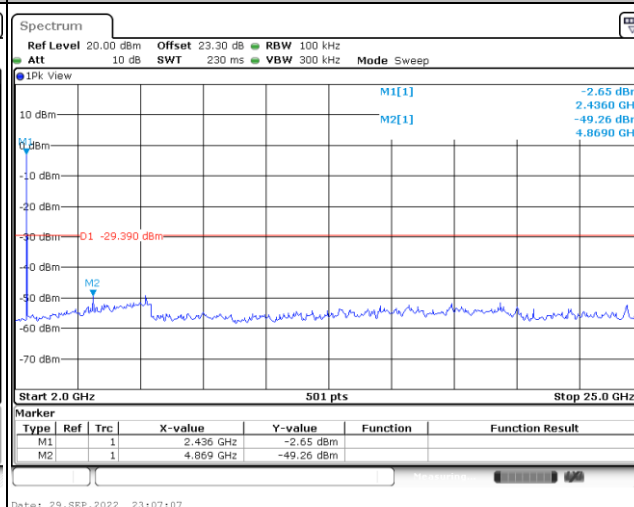**Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19**

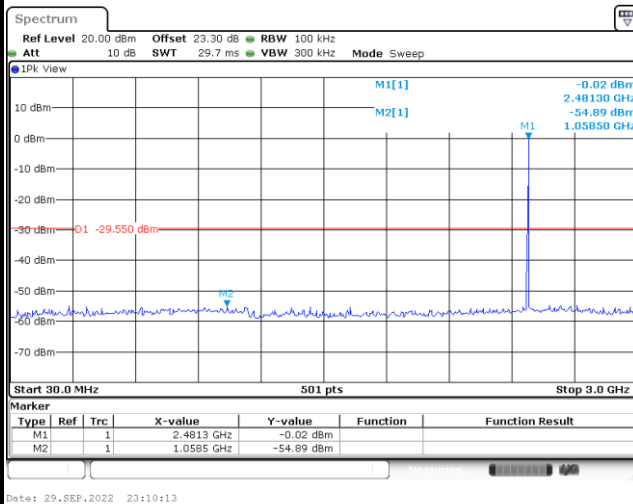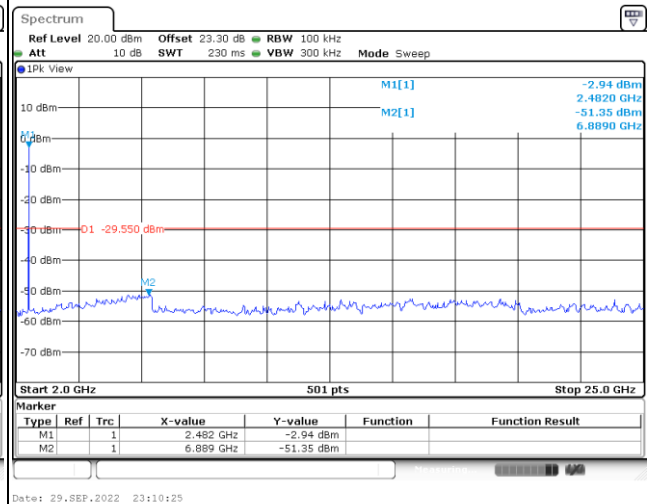**Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39**



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

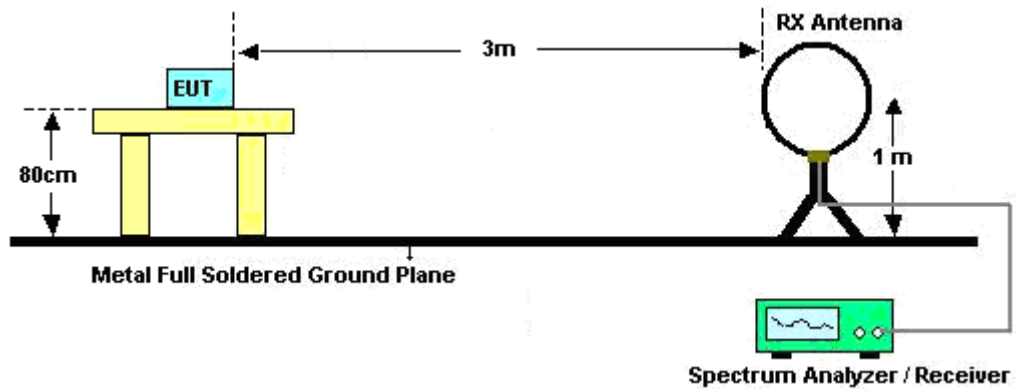


For radiated test from 30MHz to 1GHz

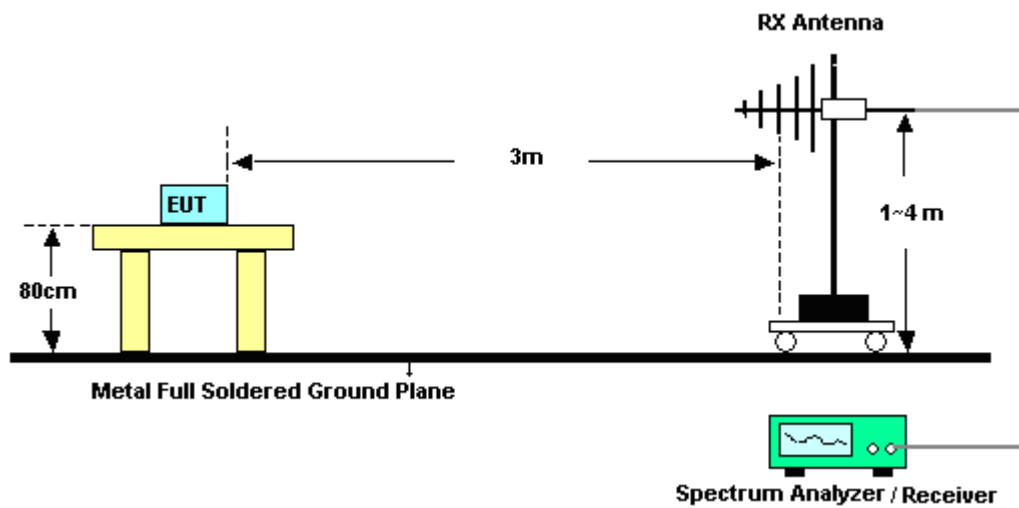

For radiated test from 1GHz to 18GHz

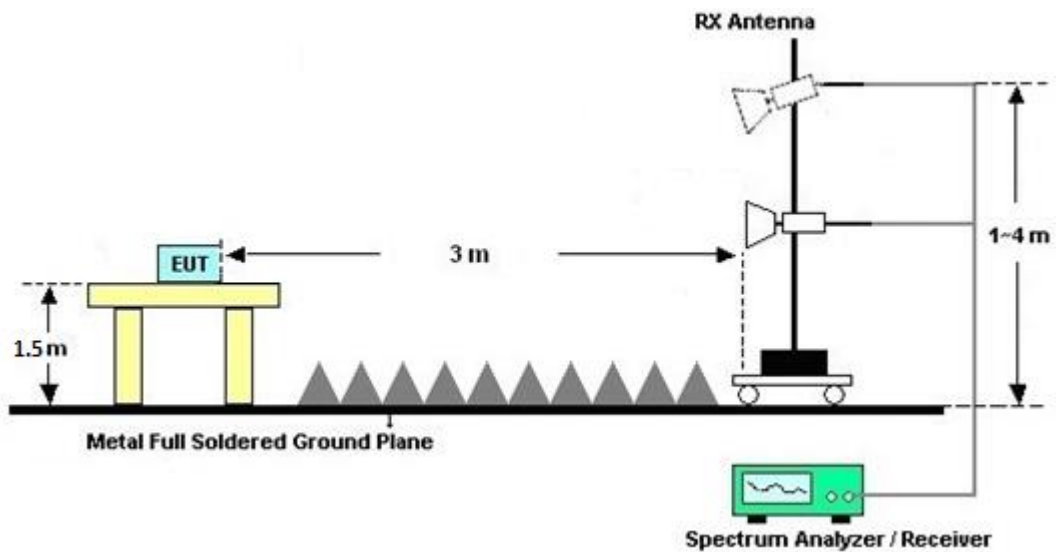

For radiated test above 18GHz

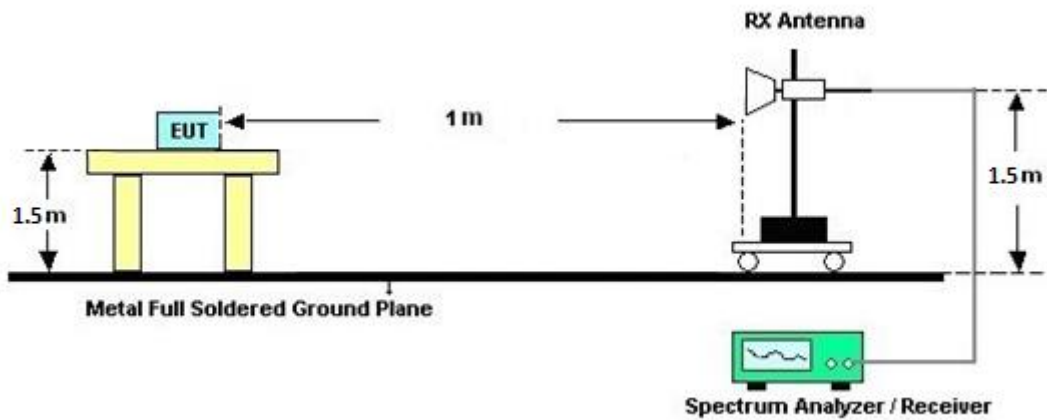

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

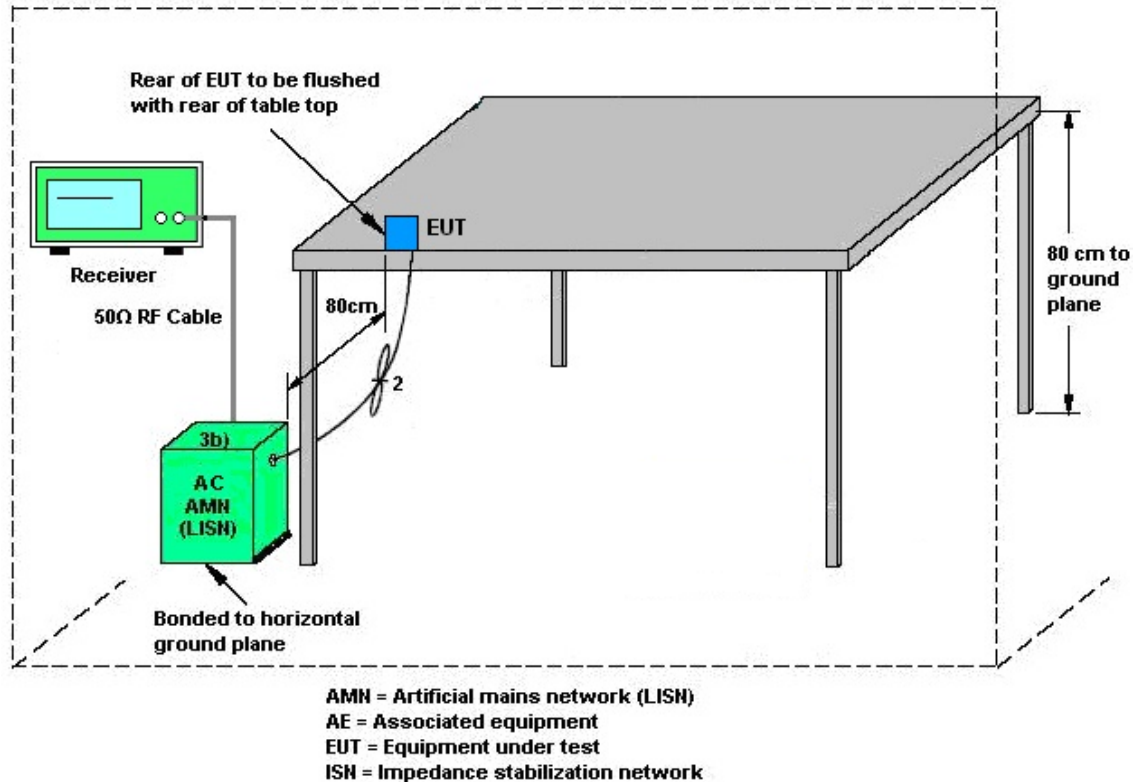

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY59053012	10Hz~44GHz	Nov. 18, 2021	Oct. 05, 2022~ Nov. 07, 2022	Nov. 17, 2022	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz~1000MHz	Jan. 03, 2022	Oct. 05, 2022~ Nov. 07, 2022	Jan. 02, 2023	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 15, 2021	Oct. 05, 2022~ Nov. 07, 2022	Nov. 14, 2022	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 28, 2022	Oct. 05, 2022~ Nov. 07, 2022	Jun. 27, 2023	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	Oct. 05, 2022~ Nov. 07, 2022	Jan. 06, 2023	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802 N1D01N-06	54682 & AT-N0603	30MHz~1GHz	Sep. 18, 2022	Oct. 05, 2022~ Nov. 07, 2022	Sep. 17, 2023	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz~18GHz	Nov. 02, 2021	Oct. 05, 2022~ Oct. 31, 2022	Nov. 01, 2022	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz~18GHz	Nov. 04, 2022	Nov. 04, 2022~ Nov. 07, 2022	Nov. 03, 2023	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Aug. 09, 2022	Oct. 05, 2022~ Nov. 07, 2022	Aug. 08, 2023	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00994	18GHz~40GHz	Nov. 04, 2021	Oct. 05, 2022~ Nov. 02, 2022	Nov. 03, 2022	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00994	18GHz~40GHz	Nov. 04, 2022	Nov. 04, 2022~ Nov. 07, 2022	Nov. 03, 2023	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303B	TP200879	N/A	Mar. 22, 2022	Oct. 05, 2022~ Nov. 07, 2022	Mar. 21, 2023	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 19, 2022	Oct. 05, 2022~ Nov. 07, 2022	Jan. 18, 2023	Radiation (03CH20-HY)
Software	Audix	E3 6.2009-8-24	RK-002156	N/A	N/A	Oct. 05, 2022~ Nov. 07, 2022	N/A	Radiation (03CH20-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Oct. 05, 2022~ Nov. 07, 2022	N/A	Radiation (03CH20-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Oct. 05, 2022~ Nov. 07, 2022	N/A	Radiation (03CH20-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Oct. 05, 2022~ Nov. 07, 2022	N/A	Radiation (03CH20-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 15, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Sep. 15, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Sep. 15, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2021	Sep. 15, 2022	Nov. 15, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Sep. 15, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Aug. 01, 2022	Sep. 15, 2022	Jul. 31, 2023	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Sep. 15, 2022	Dec. 29, 2022	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Sep. 13, 2022~ Sep. 30, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Dec. 29, 2021	Sep. 13, 2022~ Sep. 30, 2022	Dec. 28, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz	Aug. 03, 2022	Sep. 13, 2022~ Sep. 30, 2022	Aug. 02, 2023	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Dec. 30, 2022	Sep. 13, 2022~ Sep. 30, 2022	Dec. 29, 2023	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.50 dB
--	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70 dB
--	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Paul Lin	Temperature:	21~25	°C
Test Date:	2022/09/13~2022/09/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.048	0.714	0.50	Pass
BLE	1Mbps	1	19	2440	1.052	0.718	0.50	Pass
BLE	1Mbps	1	39	2480	1.058	0.724	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.70	30.00	1.53	4.23	36.00	Pass
BLE	1Mbps	1	19	2440	2.50	30.00	1.53	4.03	36.00	Pass
BLE	1Mbps	1	39	2480	2.40	30.00	1.53	3.93	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.96	-9.30	1.53	8.00	Pass
BLE	1Mbps	1	19	2440	1.92	-7.75	1.53	8.00	Pass
BLE	1Mbps	1	39	2480	1.97	-8.04	1.53	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.069	1.392	0.50	Pass
BLE	2Mbps	1	19	2440	2.069	1.424	0.50	Pass
BLE	2Mbps	1	39	2480	2.077	1.428	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.60	30.00	1.53	4.13	36.00	Pass
BLE	2Mbps	1	19	2440	2.50	30.00	1.53	4.03	36.00	Pass
BLE	2Mbps	1	39	2480	2.40	30.00	1.53	3.93	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	0.72	-12.98	1.53	8.00	Pass
BLE	2Mbps	1	19	2440	0.61	-10.96	1.53	8.00	Pass
BLE	2Mbps	1	39	2480	0.45	-10.92	1.53	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 281818
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

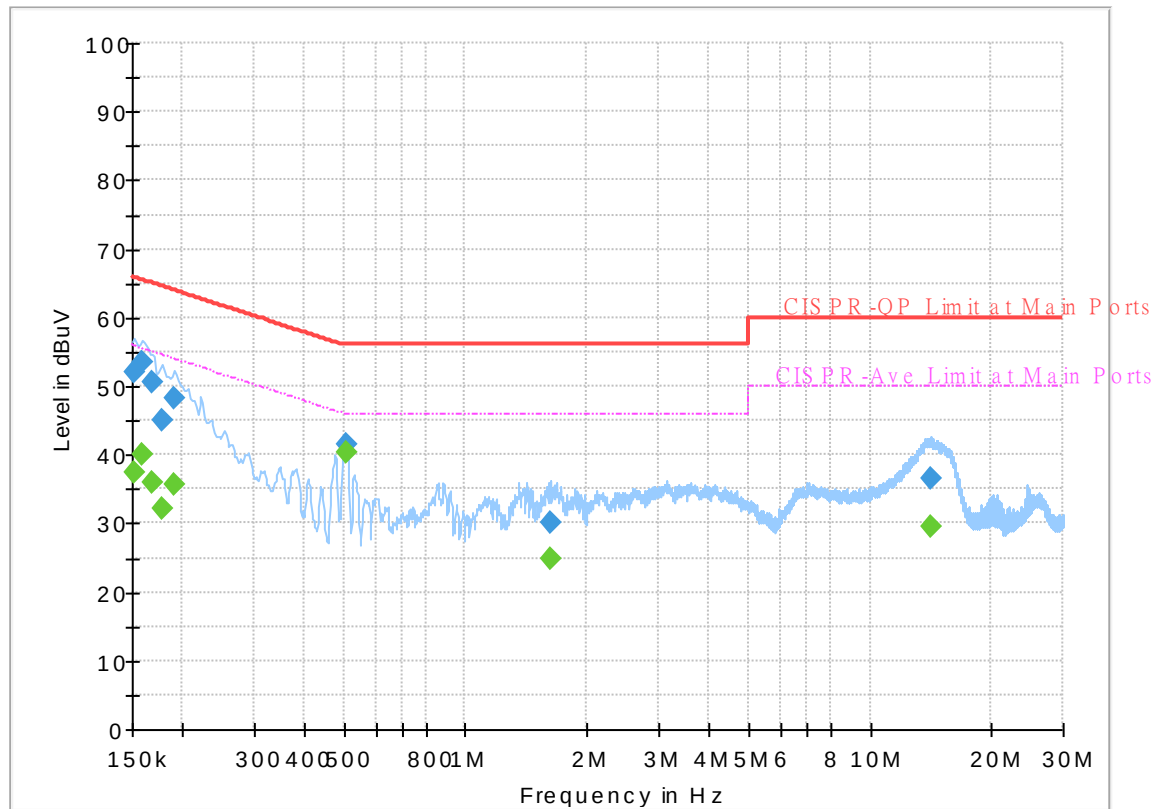


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.32	55.88	18.56	L1	OFF	19.8
0.152250	51.98	---	65.88	13.90	L1	OFF	19.8
0.159000	---	40.17	55.52	15.35	L1	OFF	19.8
0.159000	53.51	---	65.52	12.01	L1	OFF	19.8
0.168000	---	36.03	55.06	19.03	L1	OFF	19.8
0.168000	50.55	---	65.06	14.51	L1	OFF	19.8
0.177000	---	32.15	54.63	22.48	L1	OFF	19.8
0.177000	45.17	---	64.63	19.46	L1	OFF	19.8
0.190500	---	35.53	54.02	18.49	L1	OFF	19.8
0.190500	48.21	---	64.02	15.81	L1	OFF	19.8
0.505500	---	40.23	46.00	5.77	L1	OFF	19.8
0.505500	41.49	---	56.00	14.51	L1	OFF	19.8
1.621500	---	24.75	46.00	21.25	L1	OFF	19.8
1.621500	30.07	---	56.00	25.93	L1	OFF	19.8
14.140500	---	29.67	50.00	20.33	L1	OFF	20.0
14.140500	36.55	---	60.00	23.45	L1	OFF	20.0

EUT Information

Report NO : 281818
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

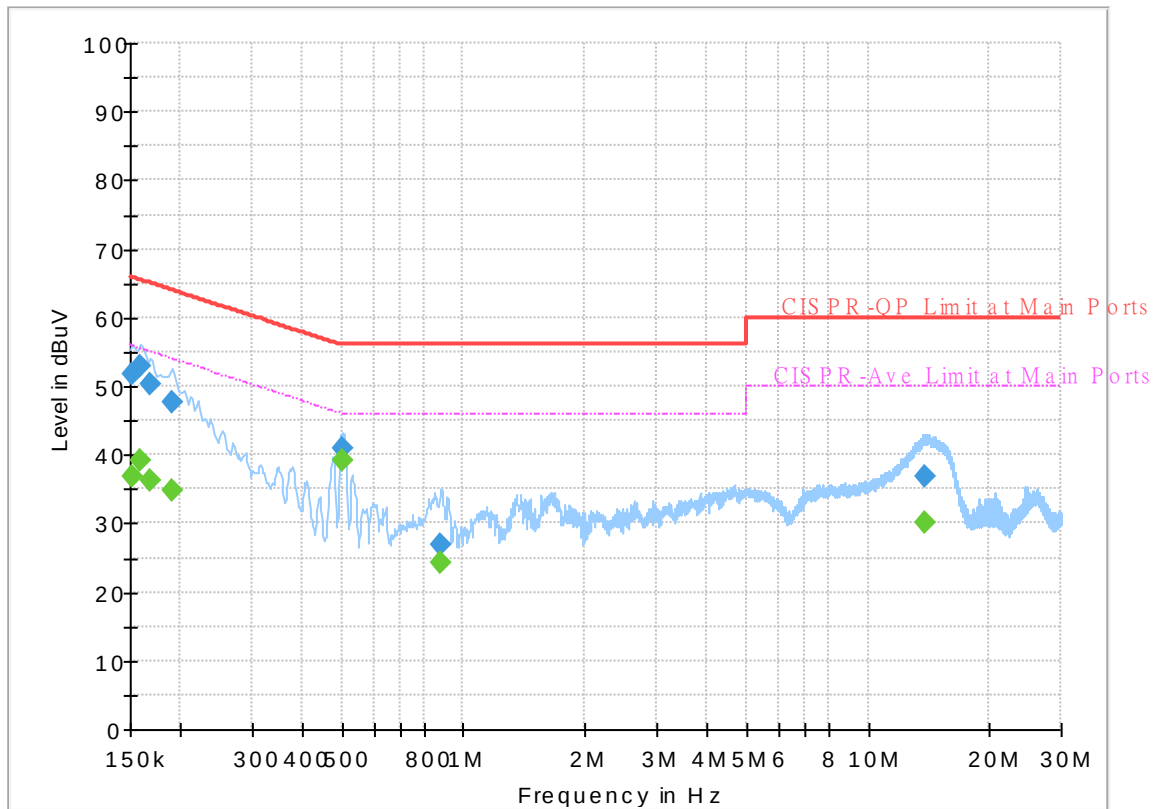

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	36.75	55.88	19.13	N	OFF	19.8
0.152250	51.79	---	65.88	14.09	N	OFF	19.8
0.159000	---	39.09	55.52	16.43	N	OFF	19.8
0.159000	52.78	---	65.52	12.74	N	OFF	19.8
0.168000	---	36.26	55.06	18.80	N	OFF	19.8
0.168000	50.22	---	65.06	14.84	N	OFF	19.8
0.190500	---	34.79	54.02	19.23	N	OFF	19.8
0.190500	47.66	---	64.02	16.36	N	OFF	19.8
0.503250	---	39.10	46.00	6.90	N	OFF	19.8
0.503250	41.07	---	56.00	14.93	N	OFF	19.8
0.879000	---	24.41	46.00	21.59	N	OFF	19.8
0.879000	26.90	---	56.00	29.10	N	OFF	19.8
13.785000	---	30.19	50.00	19.81	N	OFF	20.1
13.785000	36.87	---	60.00	23.13	N	OFF	20.1



Appendix C. Radiated Spurious Emission

Test Engineer :	John Chuang, Leo Li, JC Liang and Steven Wu	Temperature :	22.1~23.1°C
		Relative Humidity :	55~60%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2349.69	49.65	-24.35	74	40.19	27.1	18.61	36.25	114	129	P	H
		2377.935	39.17	-14.83	54	29.57	27.21	18.66	36.27	114	129	A	H
	*	2402	96.02	-	-	86.29	27.31	18.7	36.28	114	129	P	H
	*	2402	95.42	-	-	85.69	27.31	18.7	36.28	114	129	A	H
													H
													H
		2376.045	48.99	-25.01	74	39.4	27.2	18.66	36.27	100	162	P	V
		2377.935	38.8	-15.2	54	29.2	27.21	18.66	36.27	100	162	A	V
	*	2402	92.39	-	-	82.66	27.31	18.7	36.28	100	162	P	V
	*	2402	91.78	-	-	82.05	27.31	18.7	36.28	100	162	A	V
													V
													V
BLE CH 19 2440MHz		2384.72	49.25	-24.75	74	39.61	27.24	18.67	36.27	111	131	P	H
		2368.08	38.34	-15.66	54	28.79	27.17	18.64	36.26	111	131	A	H
	*	2440	97.18	-	-	87.23	27.46	18.78	36.29	111	131	P	H
	*	2440	96.6	-	-	86.65	27.46	18.78	36.29	111	131	A	H
		2495.12	49.74	-24.26	74	39.5	27.68	18.88	36.32	111	131	P	H
		2487.92	38.87	-15.13	54	28.66	27.65	18.87	36.31	111	131	A	H
		2326.64	49.47	-24.53	74	40.04	27.1	18.57	36.24	100	180	P	V
		2386.32	38.26	-15.74	54	28.6	27.25	18.68	36.27	100	180	A	V
	*	2440	92.87	-	-	82.92	27.46	18.78	36.29	100	180	P	V
	*	2440	92.28	-	-	82.33	27.46	18.78	36.29	100	180	A	V
		2497.44	50.49	-23.51	74	40.23	27.69	18.89	36.32	100	180	P	V
		2495.76	38.82	-15.18	54	28.58	27.68	18.88	36.32	100	180	A	V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	96.22	-	-	86.06	27.62	18.85	36.31	100	130	P	H
	*	2480	95.61	-	-	85.45	27.62	18.85	36.31	100	130	A	H
		2494.48	50.29	-23.71	74	40.05	27.68	18.88	36.32	100	130	P	H
		2483.52	39.73	-14.27	54	29.55	27.63	18.86	36.31	100	130	A	H
													H
													H
	*	2480	94.03	-	-	83.87	27.62	18.85	36.31	100	215	P	V
	*	2480	93.46	-	-	83.3	27.62	18.85	36.31	100	215	A	V
		2489.2	50.09	-23.91	74	39.88	27.66	18.87	36.32	100	215	P	V
		2483.52	39.52	-14.48	54	29.34	27.63	18.86	36.31	100	215	A	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.56	-31.44	74	34.65	32.4	13.05	37.54	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	42.21	-31.79	74	34.3	32.4	13.05	37.54	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	42.74	-31.26	74	34.78	32.52	13.04	37.6	-	-	P	H
		7320	47.19	-26.81	74	32.94	36.9	15.88	38.53	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	43.54	-30.46	74	35.58	32.52	13.04	37.6	-	-	P	V
		7320	47.94	-26.06	74	33.69	36.9	15.88	38.53	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	44.2	-29.8	74	35.89	32.94	13.03	37.66	-	-	P	H
		7440	46.91	-27.09	74	33.11	36.52	15.91	38.63	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4960	42.95	-31.05	74	34.64	32.94	13.03	37.66	-	-	P	V
		7440	46.56	-27.44	74	32.76	36.52	15.91	38.63	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												
		3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2389.38	49.11	-24.89	74	39.44	27.26	18.68	36.27	115	128	P	H
		2377.935	38.69	-15.31	54	29.09	27.21	18.66	36.27	115	128	A	H
	*	2402	93.67	-	-	83.94	27.31	18.7	36.28	115	128	P	H
	*	2402	92.2	-	-	82.47	27.31	18.7	36.28	115	128	A	H
													H
													H
		2369.64	49.42	-24.58	74	39.85	27.18	18.65	36.26	100	161	P	V
		2377.725	38.52	-15.48	54	28.92	27.21	18.66	36.27	100	161	A	V
	*	2402	90.31	-	-	80.58	27.31	18.7	36.28	100	161	P	V
	*	2402	88.89	-	-	79.16	27.31	18.7	36.28	100	161	A	V
													V
													V
BLE CH 19 2440MHz		2366.8	49.58	-24.42	74	40.03	27.17	18.64	36.26	111	132	P	H
		2385.52	38.3	-15.7	54	28.66	27.24	18.67	36.27	111	132	A	H
	*	2440	92.98	-	-	83.03	27.46	18.78	36.29	111	132	P	H
	*	2440	91.51	-	-	81.56	27.46	18.78	36.29	111	132	A	H
		2498.4	50.08	-23.92	74	39.82	27.69	18.89	36.32	111	132	P	H
		2498.24	38.82	-15.18	54	28.56	27.69	18.89	36.32	111	132	A	H
		2372.24	49.09	-24.91	74	39.51	27.19	18.65	36.26	100	182	P	V
		2386.32	38.28	-15.72	54	28.62	27.25	18.68	36.27	100	182	A	V
	*	2440	88.61	-	-	78.66	27.46	18.78	36.29	100	182	P	V
	*	2440	87.06	-	-	77.11	27.46	18.78	36.29	100	182	A	V
		2490.72	49.28	-24.72	74	39.07	27.66	18.87	36.32	100	182	P	V
		2500	38.83	-15.17	54	28.56	27.7	18.89	36.32	100	182	A	V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	91.59	-	-	81.43	27.62	18.85	36.31	112	129	P	H
	*	2480	89.01	-	-	78.85	27.62	18.85	36.31	112	129	A	H
		2491.84	49.9	-24.1	74	39.68	27.67	18.87	36.32	112	129	P	H
		2483.52	40.15	-13.85	54	29.97	27.63	18.86	36.31	112	129	A	H
													H
													H
	*	2480	87.89	-	-	77.73	27.62	18.85	36.31	100	215	P	V
	*	2480	86.31	-	-	76.15	27.62	18.85	36.31	100	215	A	V
		2487.48	49.61	-24.39	74	39.4	27.65	18.87	36.31	100	215	P	V
		2483.52	39.64	-14.36	54	29.46	27.63	18.86	36.31	100	215	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	43.06	-30.94	74	35.15	32.4	13.05	37.54	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	43.36	-30.64	74	35.45	32.4	13.05	37.54	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	43.49	-30.51	74	35.53	32.52	13.04	37.6	-	-	P	H
		7320	47.96	-26.04	74	33.71	36.9	15.88	38.53	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	43.12	-30.88	74	35.16	32.52	13.04	37.6	-	-	P	V
		7320	47.77	-26.23	74	33.52	36.9	15.88	38.53	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	43.17	-30.83	74	34.86	32.94	13.03	37.66	-	-	P	H
		7440	47.69	-26.31	74	33.89	36.52	15.91	38.63	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4960	43.49	-30.51	74	35.18	32.94	13.03	37.66	-	-	P	V
		7440	46.97	-27.03	74	33.17	36.52	15.91	38.63	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		24888	42.4	-31.6	74	36.3	39.64	19.63	53.17	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
		</											


Emission below 1GHz
2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF	@	204.6	41.51	-1.99	43.5	58.99	15.06	2.83	35.37	-	-	P	H
	@	268.62	49.64	3.64	46	62.17	19.51	3.2	35.24	-	-	P	H
	@	287.05	49.71	3.71	46	62.48	19.12	3.3	35.19	-	-	P	H
	@	303.54	50.74	4.74	46	63.2	19.3	3.39	35.15	-	-	P	H
	@	316.15	47.47	1.47	46	59.68	19.46	3.44	35.11	-	-	P	H
	@	608.12	44.87	-1.13	46	49.13	25.33	4.75	34.34	-	-	P	H
	@	714.82	39.9	-6.1	46	42.17	26.58	5.03	33.88	-	-	P	H
	@	912.7	40.54	-5.46	46	38.91	29	5.71	33.08	-	-	P	H
		994.18	35.27	-18.73	54	32.18	30.06	5.88	32.85	-	-	P	H
													H
													H
	@	202.66	39.96	-3.54	43.5	57.53	14.99	2.82	35.38	-	-	P	V
	@	270.56	44.5	-1.5	46	57.31	19.22	3.21	35.24	-	-	P	V
	@	287.05	46.43	0.43	46	59.2	19.12	3.3	35.19	-	-	P	V
	@	303.54	49.88	3.88	46	62.34	19.3	3.39	35.15	-	-	P	V
	@	316.15	45.63	-0.37	46	57.84	19.46	3.44	35.11	-	-	P	V
	@	608.12	43.53	-2.47	46	47.79	25.33	4.75	34.34	-	-	P	V
	@	734.22	34.63	-11.37	46	35.89	27.43	5.11	33.8	-	-	P	V
	@	912.7	39.93	-6.07	46	38.3	29	5.71	33.08	-	-	P	V
		980.6	36.18	-17.82	54	32.84	30.37	5.86	32.89	-	-	P	V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. Note "@" is Electromagnetic Interference signal, not intentional radiator. The manufacturer declares that signal complies with ANSI C63.4 requirement can be ignored.												
	4. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Disable RF Function	@	220.12	40.22	-5.78	46	57.25	15.39	2.92	35.34	-	-	P	H
	@	270.56	48.7	2.7	46	61.52	19.21	3.21	35.24	-	-	P	H
	@	287.05	49.81	3.81	46	62.57	19.13	3.3	35.19	-	-	P	H
	@	302.57	50.5	4.5	46	62.93	19.34	3.38	35.15	-	-	P	H
	@	317.12	46.42	0.42	46	58.56	19.52	3.45	35.11	-	-	P	H
	@	608.12	44.18	-1.82	46	48.17	25.6	4.75	34.34	-	-	P	H
	@	746.83	42.56	-3.44	46	43.2	27.96	5.15	33.75	-	-	P	H
	@	910.76	44.13	-1.87	46	42.21	29.3	5.71	33.09	-	-	P	H
													H
													H
	@	212.36	42.71	-0.79	43.5	59.95	15.25	2.87	35.36	-	-	P	V
	@	252.13	44.96	-1.04	46	58.24	18.89	3.11	35.28	-	-	P	V
	@	287.05	47.61	1.61	46	60.37	19.13	3.3	35.19	-	-	P	V
	@	303.54	49.04	3.04	46	61.46	19.34	3.39	35.15	-	-	P	V
	@	316.15	45.61	-0.39	46	57.77	19.51	3.44	35.11	-	-	P	V
	@	609.09	45.01	-0.99	46	48.97	25.62	4.76	34.34	-	-	P	V
	@	740.04	35.75	-10.25	46	36.53	27.88	5.12	33.78	-	-	P	V
	@	912.7	37.22	-8.78	46	35.26	29.33	5.71	33.08	-	-	P	V
													V
													V
Remark	1. No other spurious found. 2. Note "@" is Electromagnetic Interference signal, not intentional radiator. The manufacturer declares that signal complies with ANSI C63.4 requirement can be ignored. 3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	John Chuang, Leo Li, JC Liang and Steven Wu	Temperature :	22.1~23.1°C
		Relative Humidity :	55~60%

Note symbol





-L	Low channel location
-R	High channel location







<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

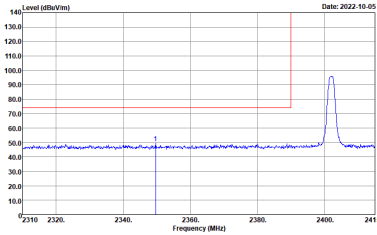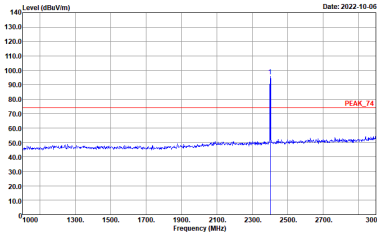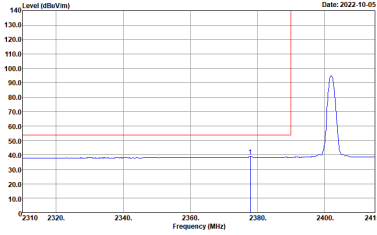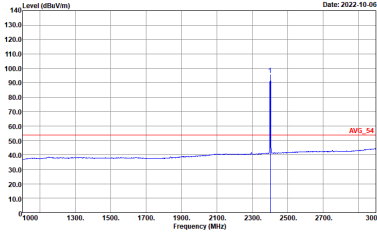BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH20-HV Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HV Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HV Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HV Condition : AVG_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

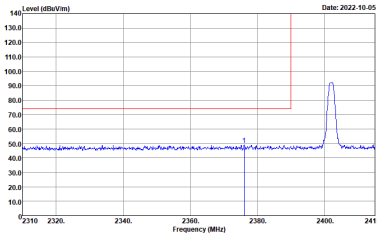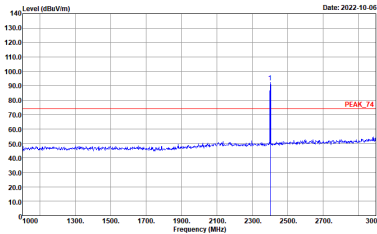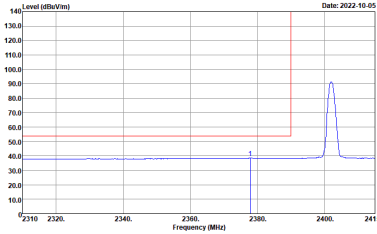
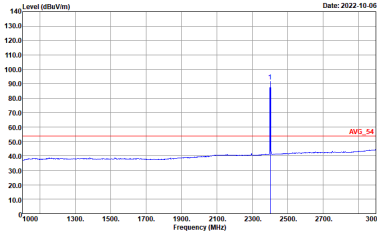


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
Avg.	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto

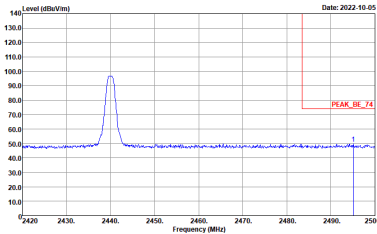
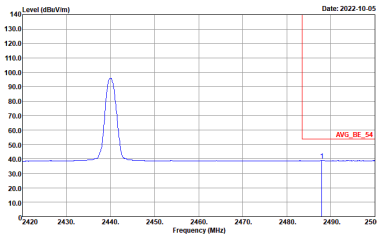


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



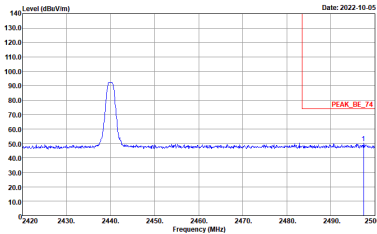
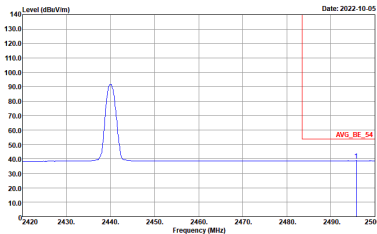


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank

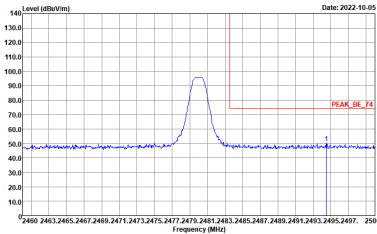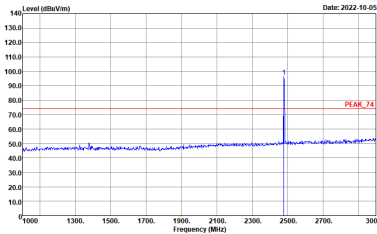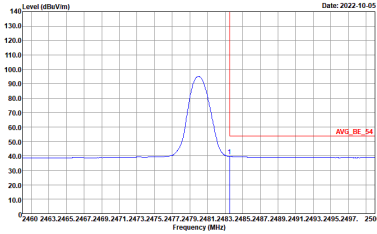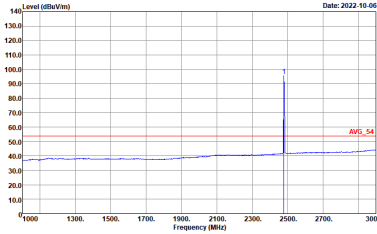

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

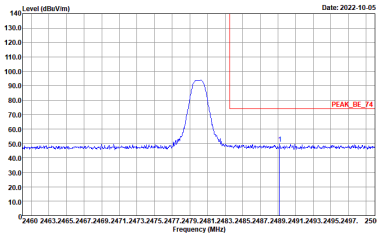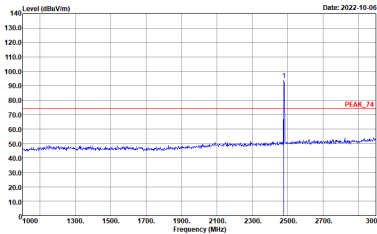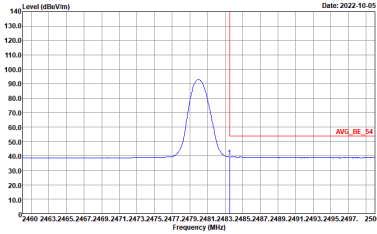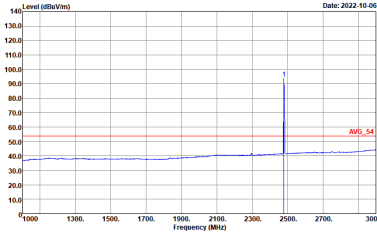

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBu/V/m) Date: 2022-10-06 Site : 03CH20-4Y Condition : PEAK_74 3m 9120D_02360_211102 HORIZONTAL	Level (dBu/V/m) Date: 2022-10-06 Site : 03CH20-4Y Condition : PEAK_74 3m 9120D_02360_211102 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 14.47 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 14.470 to 14.500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 14.47 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 14.470 to 14.500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL
17.7G ~18G Avg	Level (dBuV/m) vs Frequency (MHz) plot for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 17.7 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 17.700 to 18.000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 17.7 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 17.700 to 18.000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2022-10-06 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL :	Level (dBuV/m) Date: 2022-10-06 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL :



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 14470 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 14470 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL
17.7G ~18G Avg	Level (dBuV/m) vs Frequency (MHz) plot for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 17700 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 17700 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2022-10-06 PEAK_74 AVG_54 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) Date: 2022-10-06 PEAK_74 AVG_54 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 14.47 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 14.470 to 14.500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 14.47 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 14.470 to 14.500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL
17.7G ~18G Avg	Level (dBuV/m) vs Frequency (MHz) plot for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 17.7 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 17.700 to 18.000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 17.7 GHz. The average level is around 45 dBuV/m. The x-axis ranges from 17.700 to 18.000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL



<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

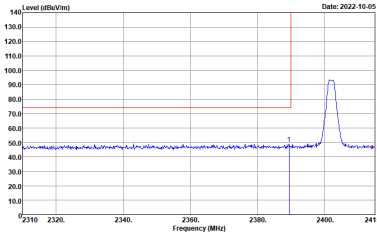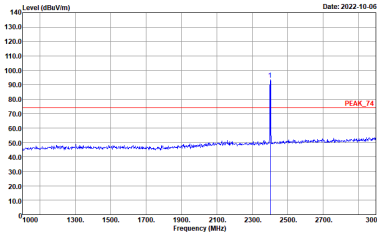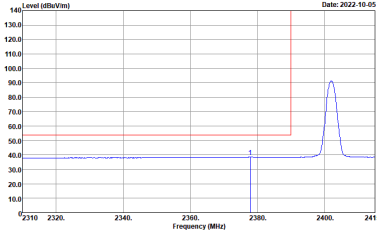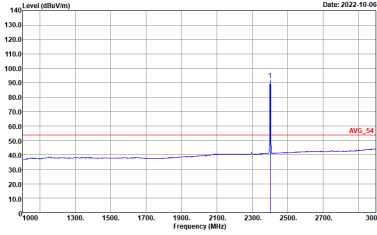BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

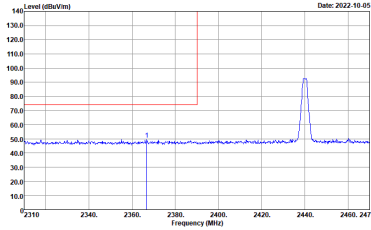
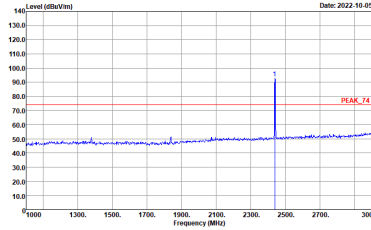
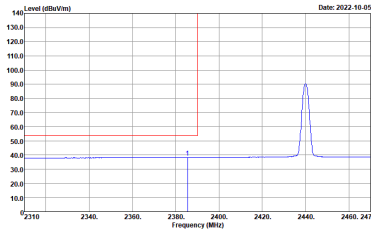
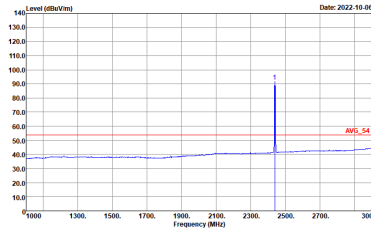


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank

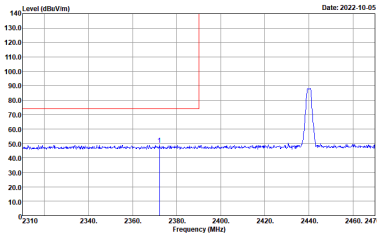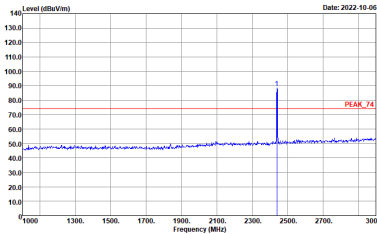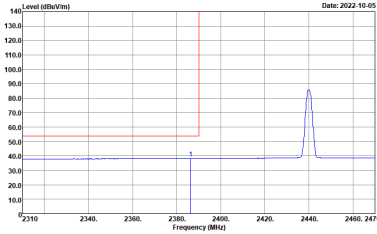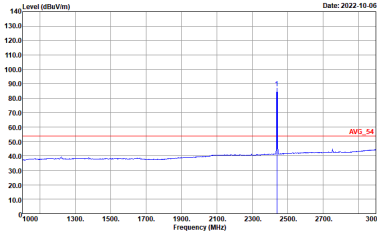

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

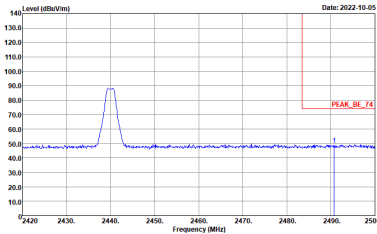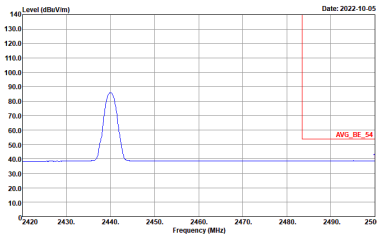

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_211102 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2022-10-06 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_211102 HORIZONTAL	Level (dBuV/m) Date: 2022-10-06 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_211102 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 2402 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a peak level of approximately 75 dBuV/m at 2402 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL
17.7G ~18G Avg	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 2402 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a peak level of approximately 75 dBuV/m at 2402 MHz. The average level is around 45 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL

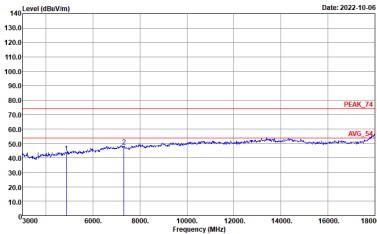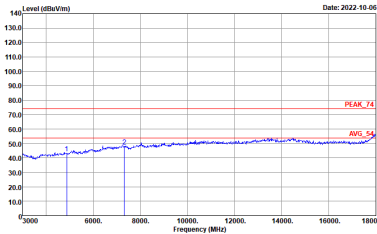

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL :	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL :



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line indicates the Peak level (PEAK_74) at approximately 75 dBuV/m, and a blue line indicates the Average level (AVG_54) at approximately 45 dBuV/m. The date is 2022-10-06. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line indicates the Peak level (PEAK_74) at approximately 75 dBuV/m, and a blue line indicates the Average level (AVG_54) at approximately 45 dBuV/m. The date is 2022-10-06. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL
17.7G ~18G Avg	Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line indicates the Peak level (PEAK_74) at approximately 75 dBuV/m, and a blue line indicates the Average level (AVG_54) at approximately 45 dBuV/m. The date is 2022-10-06. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line indicates the Peak level (PEAK_74) at approximately 75 dBuV/m, and a blue line indicates the Average level (AVG_54) at approximately 45 dBuV/m. The date is 2022-10-06. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2022-10-06 PEAK_74 AVG_54 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) Date: 2022-10-06 PEAK_74 AVG_54 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a peak at 2480 MHz with a level of approximately 75 dBuV/m. The average level is around 45 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a peak at 2480 MHz with a level of approximately 75 dBuV/m. The average level is around 45 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL
17.7G ~18G Avg	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a peak at 2480 MHz with a level of approximately 75 dBuV/m. The average level is around 45 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a peak at 2480 MHz with a level of approximately 75 dBuV/m. The average level is around 45 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_211102 VERTICAL







Emission above 18GHz

2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2022-10-07 Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_Z11104 HORIZONTAL :	Level (dBuV/m) Date: 2022-10-07 Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_Z11104 VERTICAL :

Emission below 1GHz
2.4GHz BLE (LF)

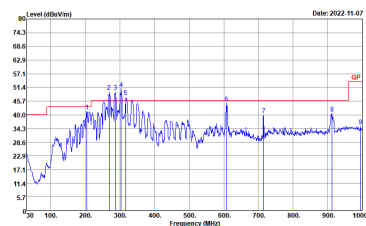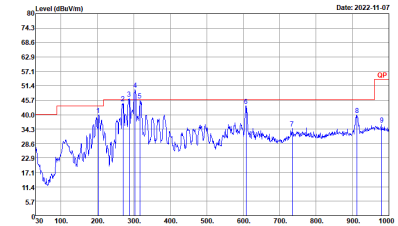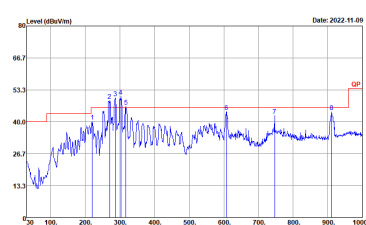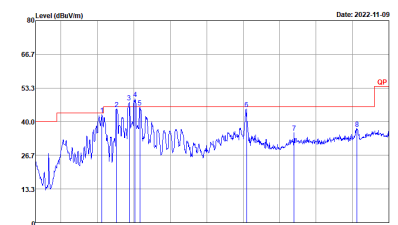BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH20-4FY Condition : QP 3m LF_55606608_1101017 HORIZONTAL	 Site : 03CH20-4FY Condition : QP 3m LF_55606608_1101017 VERTICAL
	 Site : 03CH20-4FY Condition : QP 3m LF_55606608_221022 HORIZONTAL	 Site : 03CH20-4FY Condition : QP 3m LF_55606608_221022 VERTICAL

Remark: #1, #2, #3, #4, #5, #6, #7, #8 is Electromagnetic Interference signal, not intentional radiator. The manufacturer declares that signal complies with ANSI C63.4 requirement can be ignored.



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth –LE for 1Mbps	100.00	-	-	10Hz
Bluetooth –LE for 2Mbps	100.00	-	-	10Hz

