



TEST REPORT

Report Reference No...... : **TRE1803022504** R/C.....: 69648
FCC ID..... : **ZSW-30-054**
Applicant's name..... : **b mobile HK Limited**
Address..... : Flat 18, 14/F Block 1, Golden Industrial Building, 16-26 Kwai Tak Street, Kwai Chung, New Territories, Hong Kong.
Manufacturer..... : b mobile HK Limited
Address..... : Flat 18, 14/F Block 1, Golden Industrial Building, 16-26 Kwai Tak Street, Kwai Chung, New Territories, Hong Kong.
Test item description : **Mobile Phone**
Trade Mark : Bmobile
Model/Type reference..... : AX1091
Listed Model(s) : -
Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Date of receipt of test sample..... : Mar.27,2018
Date of testing..... : Mar.28,2018- Apr.07,2018
Date of issue..... : Apr.08,2018
Result..... : **PASS**

Compiled by
(position+printedname+signature).... : File administrators Candy Liu

Candy Liu

Supervised by
(position+printedname+signature)..... : Project Engineer Edward Pan

Edward Pan

Approved by
(position+printedname+signature)..... : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	22
5.6.	Restricted band	28
5.7.	Band edge and Spurious Emissions (conducted)	37
5.8.	Spurious Emissions (radiated)	54
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>61</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>62</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v04](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

1.2. Report version

Version No.	Date of issue	Description
N/A	Apr.08,2018	Original

2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer
Antenna requirement	15.203/15.247(c)	PASS	Baozhu hu
Line Conducted Emissions (AC Main)	15.207	PASS	Alex Guo
Conducted Peak Output Power	15.247(b)(3)	PASS	Baozhu hu
Power Spectral Density	15.247(e)	PASS	Baozhu hu
6dB Bandwidth	15.247(a)(2)	PASS	Baozhu hu
Restricted band	15.247(d)/15.205	PASS	Baozhu hu
Spurious Emissions	15.247(d)/15.209	PASS	Baozhu hu

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18, 14/F Block 1, Golden Industrial Building,16-26 Kwai Tak Street, Kwai Chung, New Territories, Hong Kong.
Manufacturer:	b mobile HK Limited
Address:	Flat 18, 14/F Block 1, Golden Industrial Building,16-26 Kwai Tak Street, Kwai Chung, New Territories, Hong Kong.

3.2. Product Description

Name of EUT:	Mobile Phone
Trade Mark:	Bmobile
Model No.:	AX1091
Listed Model(s):	-
IMEI:	Conducted: 357729091249915 Radiated: 357729091249790
Power supply:	DC 3.8V
Adapter information:	Input:100-240Va.c.,50/60Hz,0.2A Output: 5.0Vd.c.,1.0A
Hardware version:	V1.3
Software version:	Android 7.0
WIFI	
Supported type:	802.11b/802.11g/802.11n(HT20)/802.11n(HT40)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna type:	Integral antenna
Antenna gain:	1.3dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	01	-
02	2417	02	-
03	2422	03	2422
04	2427	04	2427
05	2432	05	2432
06	2437	06	2437
07	2442	07	2442
08	2447	08	2447
09	2452	09	2452
10	2457	10	-
11	2462	11	-

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

Conducted Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V-Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2018
3	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2020
4	Preamplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018
5	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	11/21/2017	11/20/2018
6	EMI Test Software	R&S	ESK1	N/A	N/A	N/A
7	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
8	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2020
9	Horn Antenna	SCHWARZBECK	BBHA9170	25841	3/27/2017	3/26/2018
10	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018
11	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018
12	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	11/21/2017	11/20/2018
13	EMI Test Software	Audix	E3	N/A	N/A	N/A
14	Turntable	MATURO	TT2.0	/	N/A	N/A
15	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	N/A

RF Conducted Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/22/2017	9/21/2018
3	Power Meter	Anritsu	ML249A	N/A	9/22/2017	9/21/2018
4	OSP	R&S	OSP120	101317	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

REQUIREMENT:

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULTS

☒ Passed ☐ Not Applicable

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)

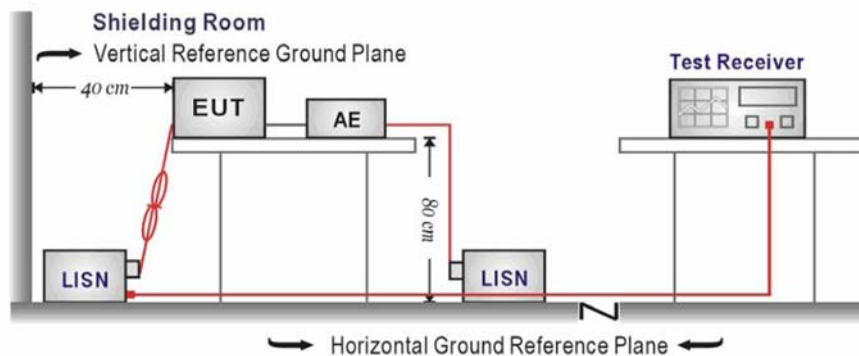
LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

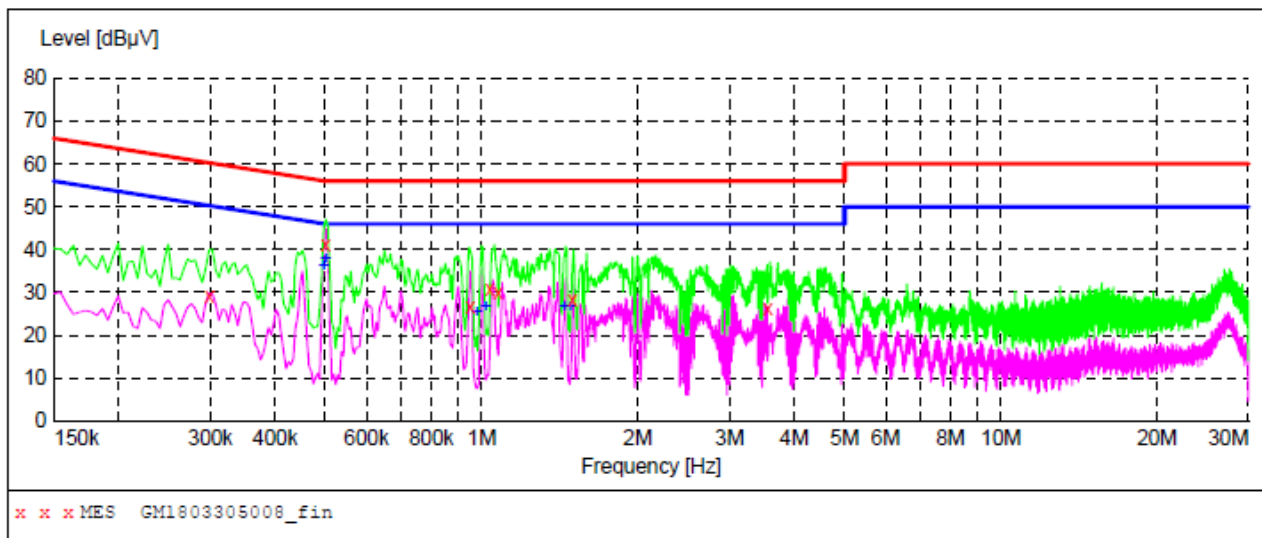
☒ Passed ☐ Not Applicable

Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

Test Line:

L

**MEASUREMENT RESULT: "GM1803305008_fin"**

3/30/2018 9:38AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.298500	29.10	9.9	60	31.2	QP	L1	GND
0.501000	41.20	10.0	56	14.8	QP	L1	GND
0.951000	26.60	10.0	56	29.4	QP	L1	GND
1.036500	30.90	10.1	56	25.1	QP	L1	GND
1.077000	29.80	10.1	56	26.2	QP	L1	GND
1.495500	28.50	10.1	56	27.5	QP	L1	GND
3.561000	26.40	10.1	56	29.6	QP	L1	GND


MEASUREMENT RESULT: "GM1803305008_fin2"

3/30/2018 9:38AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.496500	36.00	9.9	46	10.1	AV	L1	GND
0.501000	37.70	10.0	46	8.3	AV	L1	GND
0.978000	25.20	10.1	46	20.8	AV	L1	GND
1.018500	26.60	10.1	46	19.4	AV	L1	GND
1.441500	26.70	10.1	46	19.3	AV	L1	GND
1.482000	26.80	10.1	46	19.2	AV	L1	GND

Test Line:

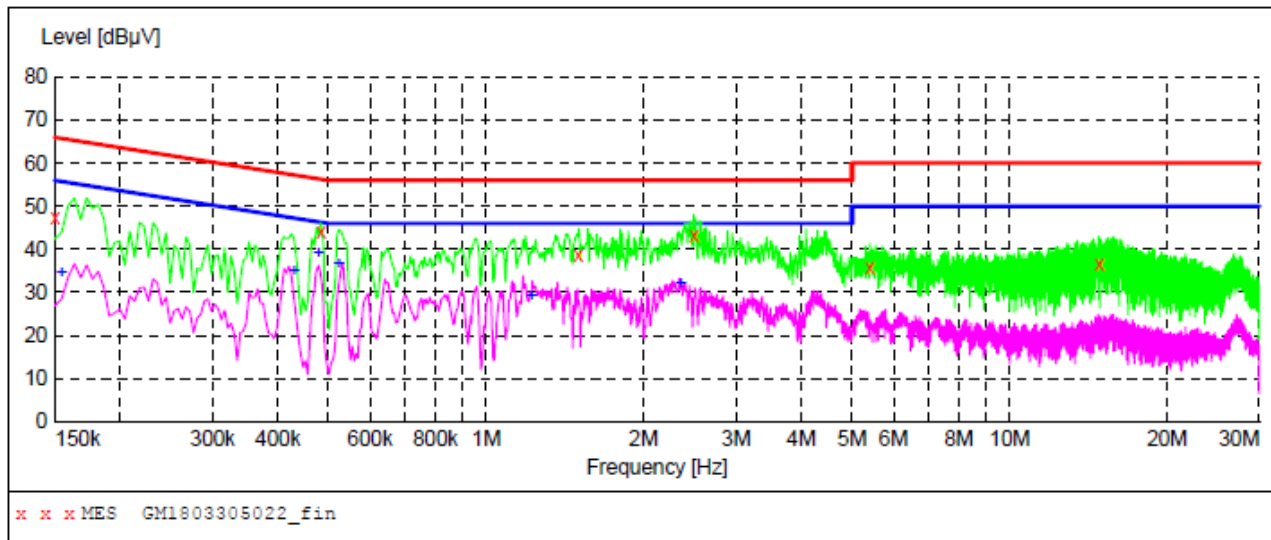N

**MEASUREMENT RESULT: "GM1803305022_fin"**

3/30/2018 11:42AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	47.40	10.0	66	18.6	QP	N	GND
0.483000	44.00	9.9	56	12.3	QP	N	GND
1.500000	38.80	10.1	56	17.2	QP	N	GND
2.499000	43.40	10.1	56	12.6	QP	N	GND
5.410500	35.70	10.2	60	24.3	QP	N	GND
14.833500	36.70	10.5	60	23.3	QP	N	GND

MEASUREMENT RESULT: "GM1803305022_fin2"

3/30/2018 11:42AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	34.40	10.0	56	21.4	AV	N	GND
0.429000	35.00	9.9	47	12.3	AV	N	GND
0.478500	39.00	9.9	46	7.4	AV	N	GND
0.523500	36.40	10.0	46	9.6	AV	N	GND
1.221000	29.20	10.1	46	16.8	AV	N	GND
2.355000	32.20	10.1	46	13.8	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

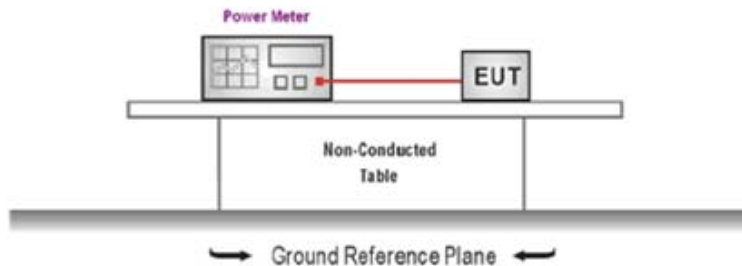TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	16.49	≤30.00	Pass
	06	16.54		
	11	16.47		
802.11g	01	14.65	≤30.00	Pass
	06	14.63		
	11	14.09		
802.11n(HT20)	01	13.80	≤30.00	Pass
	06	13.89		
	11	13.24		
802.11n(HT40)	03	12.05	≤30.00	Pass
	06	12.26		
	09	12.29		

5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

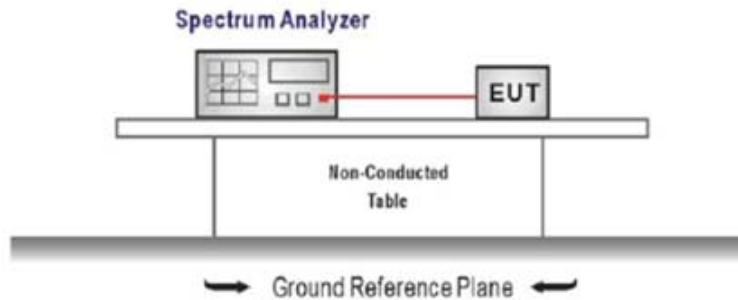TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:




Please refer to the clause 3.3




TEST RESULTS




☒ Passed ☐ Not Applicable




Type	Channel	Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result
802.11b	01	4.63	≤8.00	Pass
	06	5.20		
	11	4.02		
802.11g	01	-8.08	≤8.00	Pass
	06	-7.07		
	11	-7.94		
802.11n(HT20)	01	-9.59	≤8.00	Pass
	06	-8.20		
	11	-8.96		
802.11n(HT40)	03	-13.48	≤8.00	Pass
	06	-12.60		
	09	-12.85		

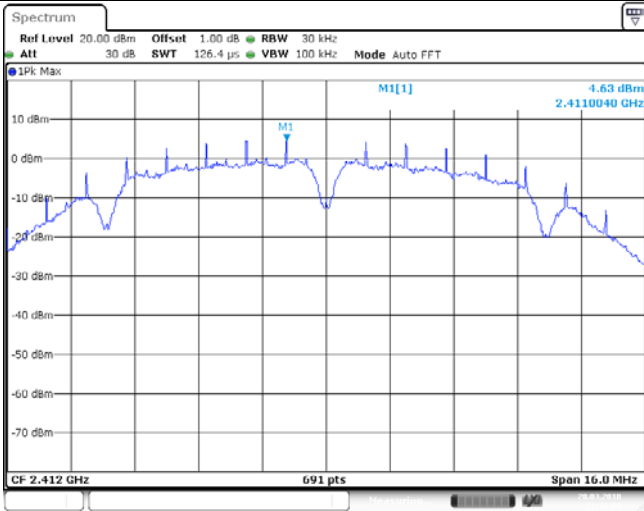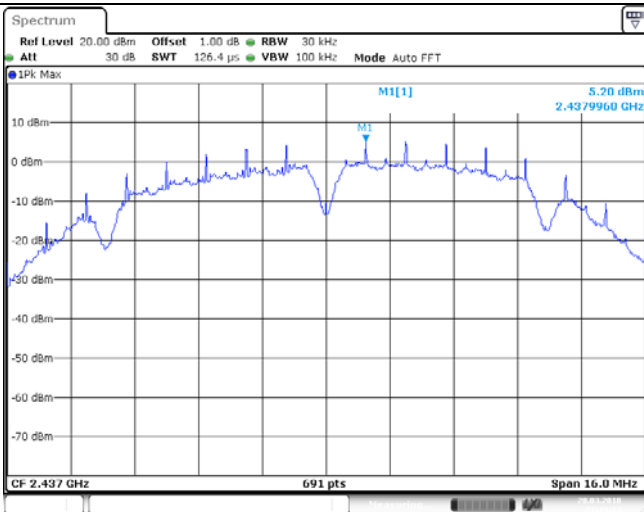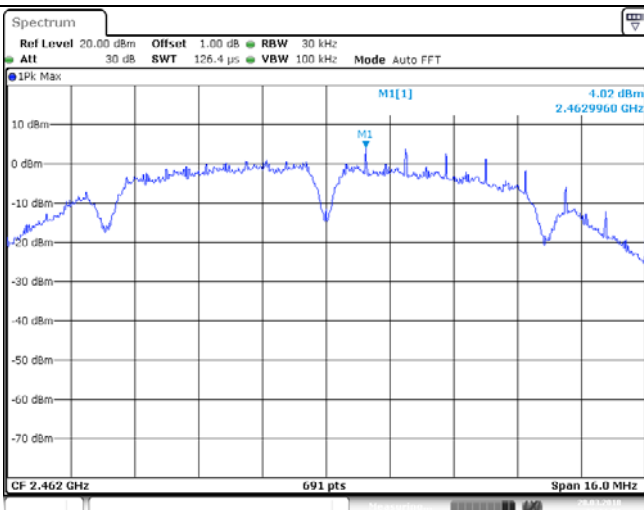Test plot as follows:

Type:	802.11b
CH01	
CH06	
CH11	

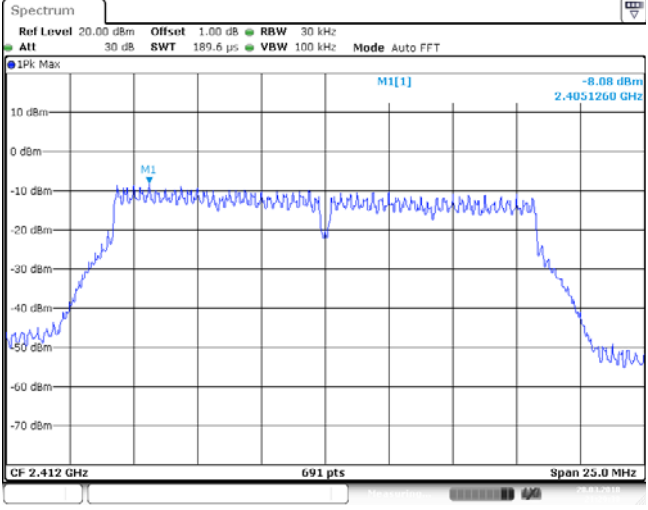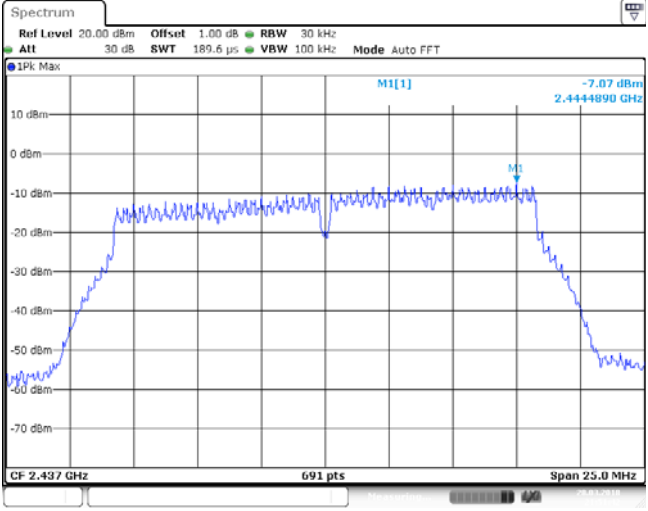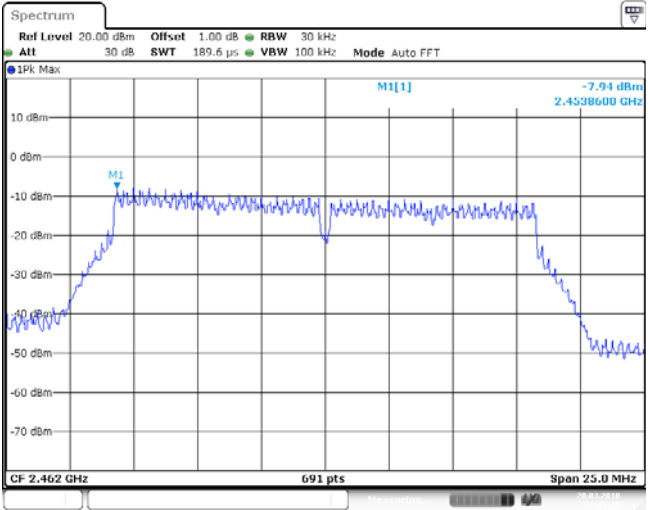Type:	802.11g
CH01	
CH06	
CH11	

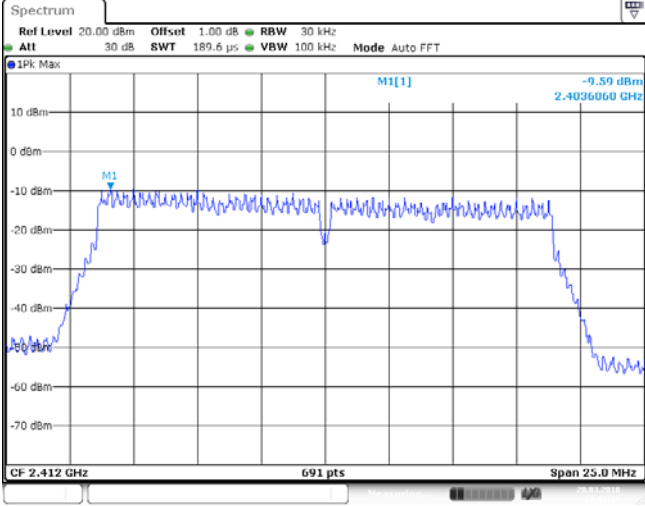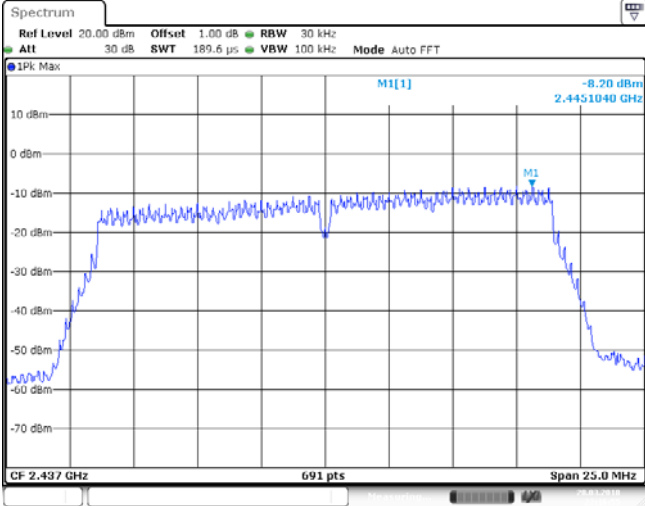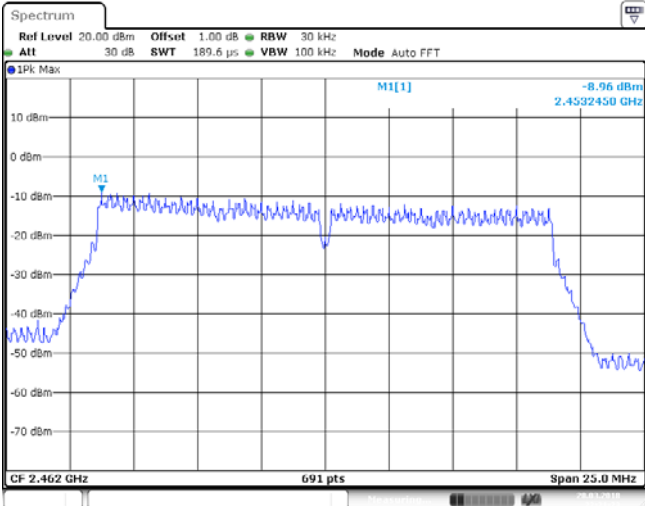Type:	802.11n(HT20)
CH01	
CH06	
CH11	

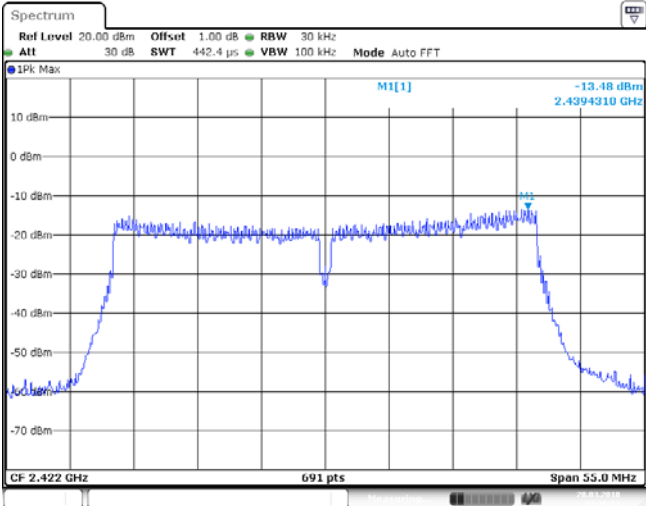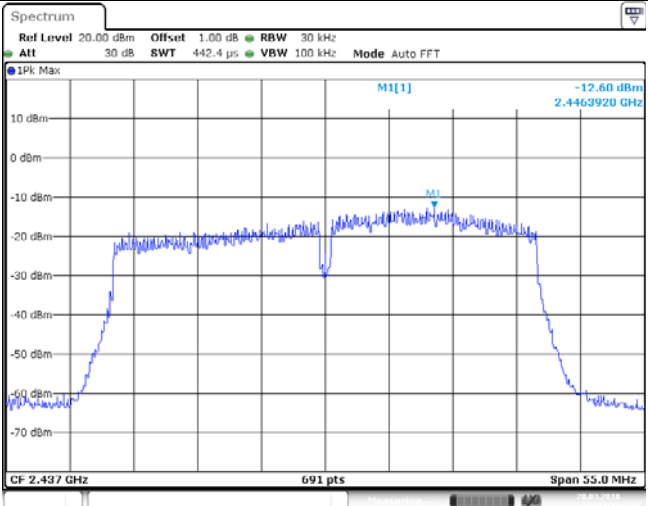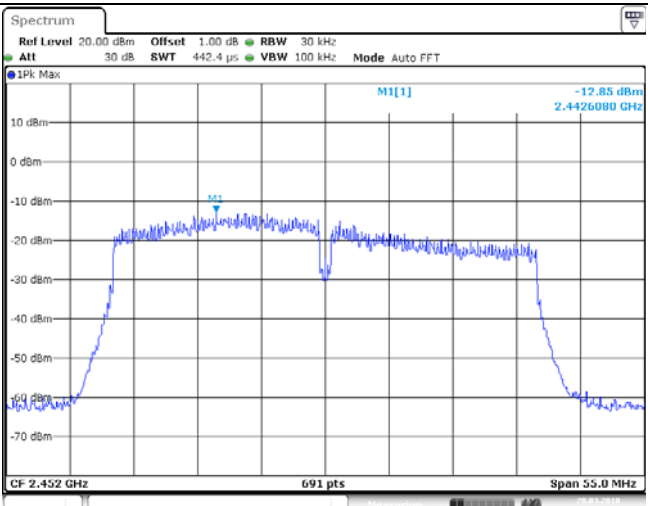Type:	802.11n(HT40)
CH03	
CH06	
CH09	

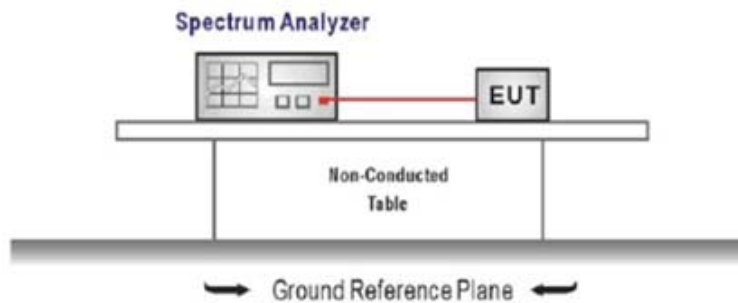
5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq$ 3 x RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:


Please refer to the clause 3.3


TEST RESULTS




☒ Passed ☐ Not Applicable

Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	9.63	≥500	Pass
	06	9.12		
	11	9.63		
802.11g	01	15.81	≥500	Pass
	06	14.61		
	11	16.20		
802.11n(HT20)	01	17.49	≥500	Pass
	06	15.15		
	11	16.50		
802.11n(HT40)	03	35.88	≥500	Pass
	06	26.46		
	09	23.94		

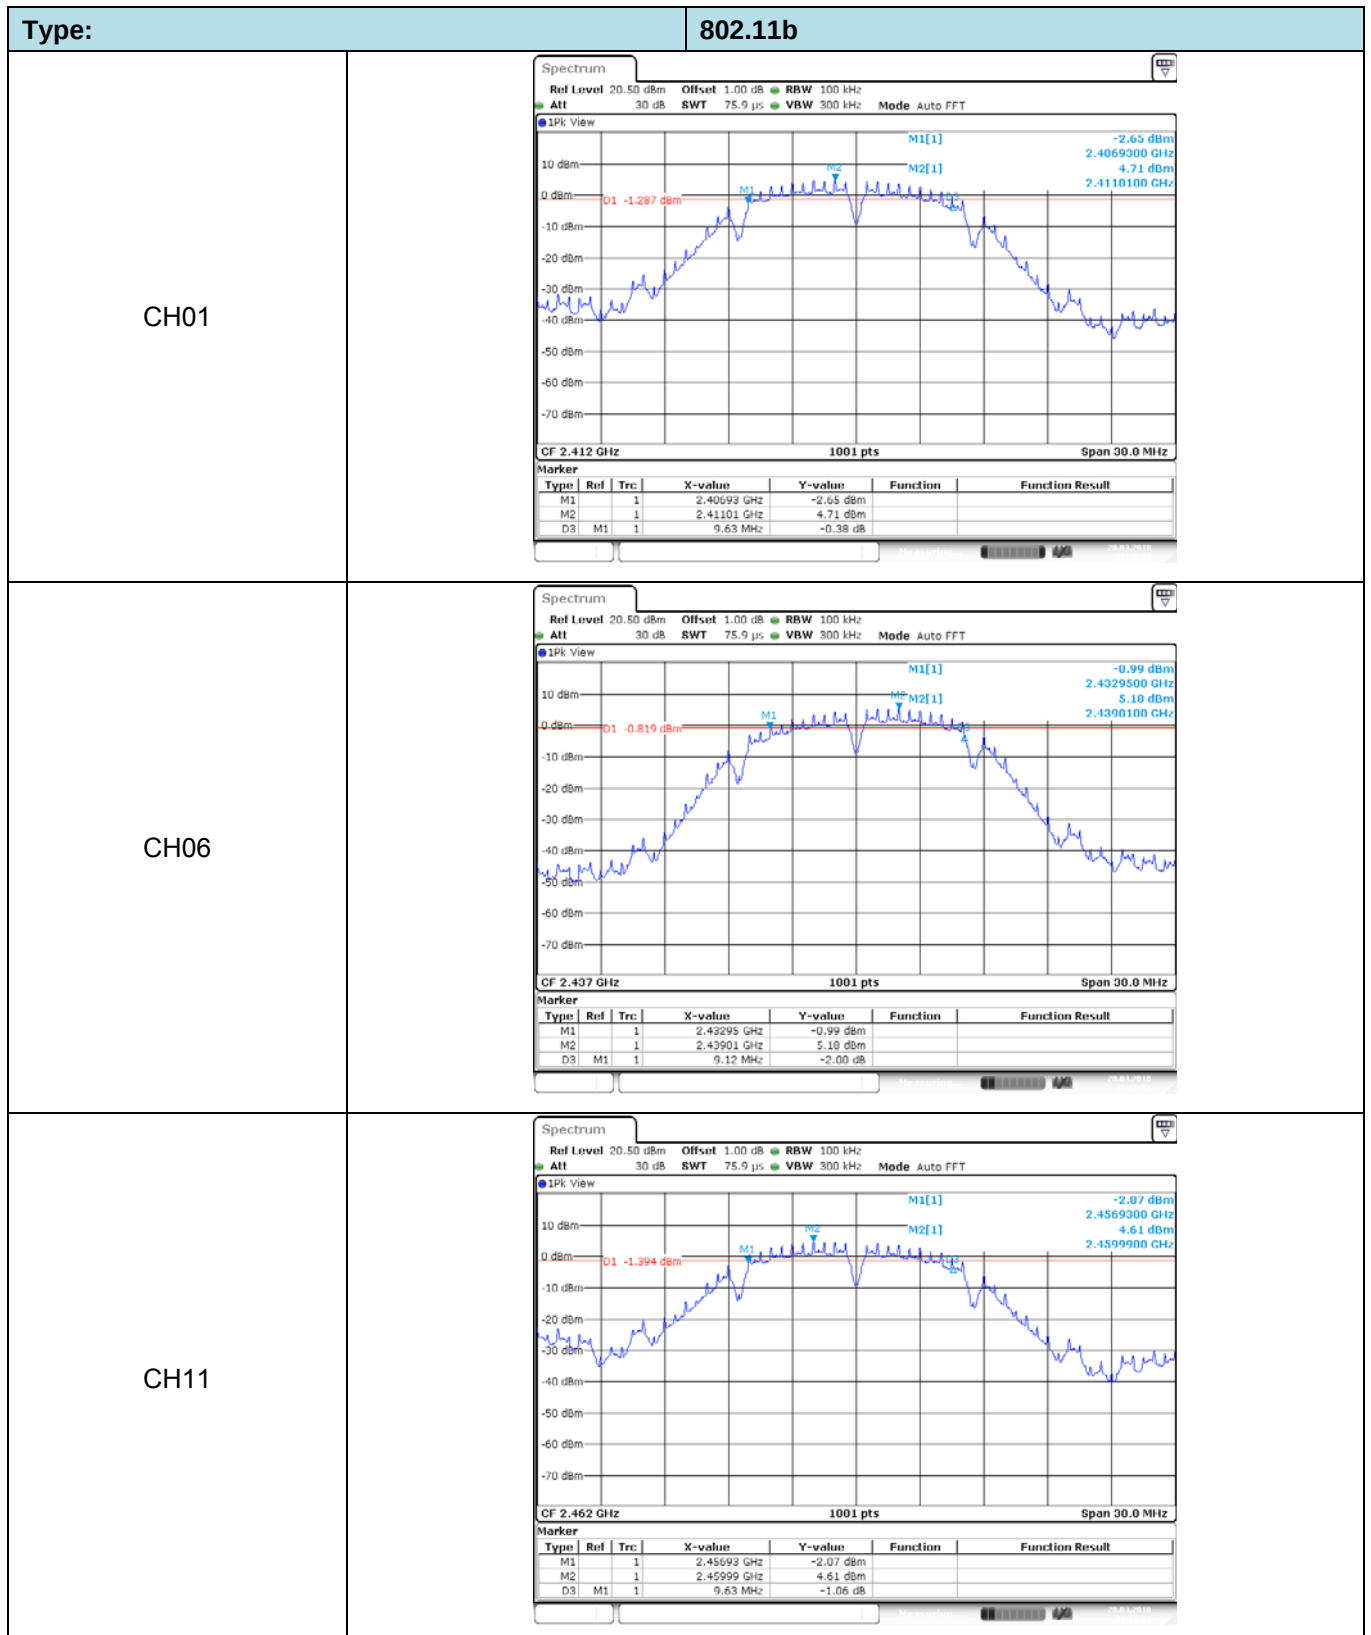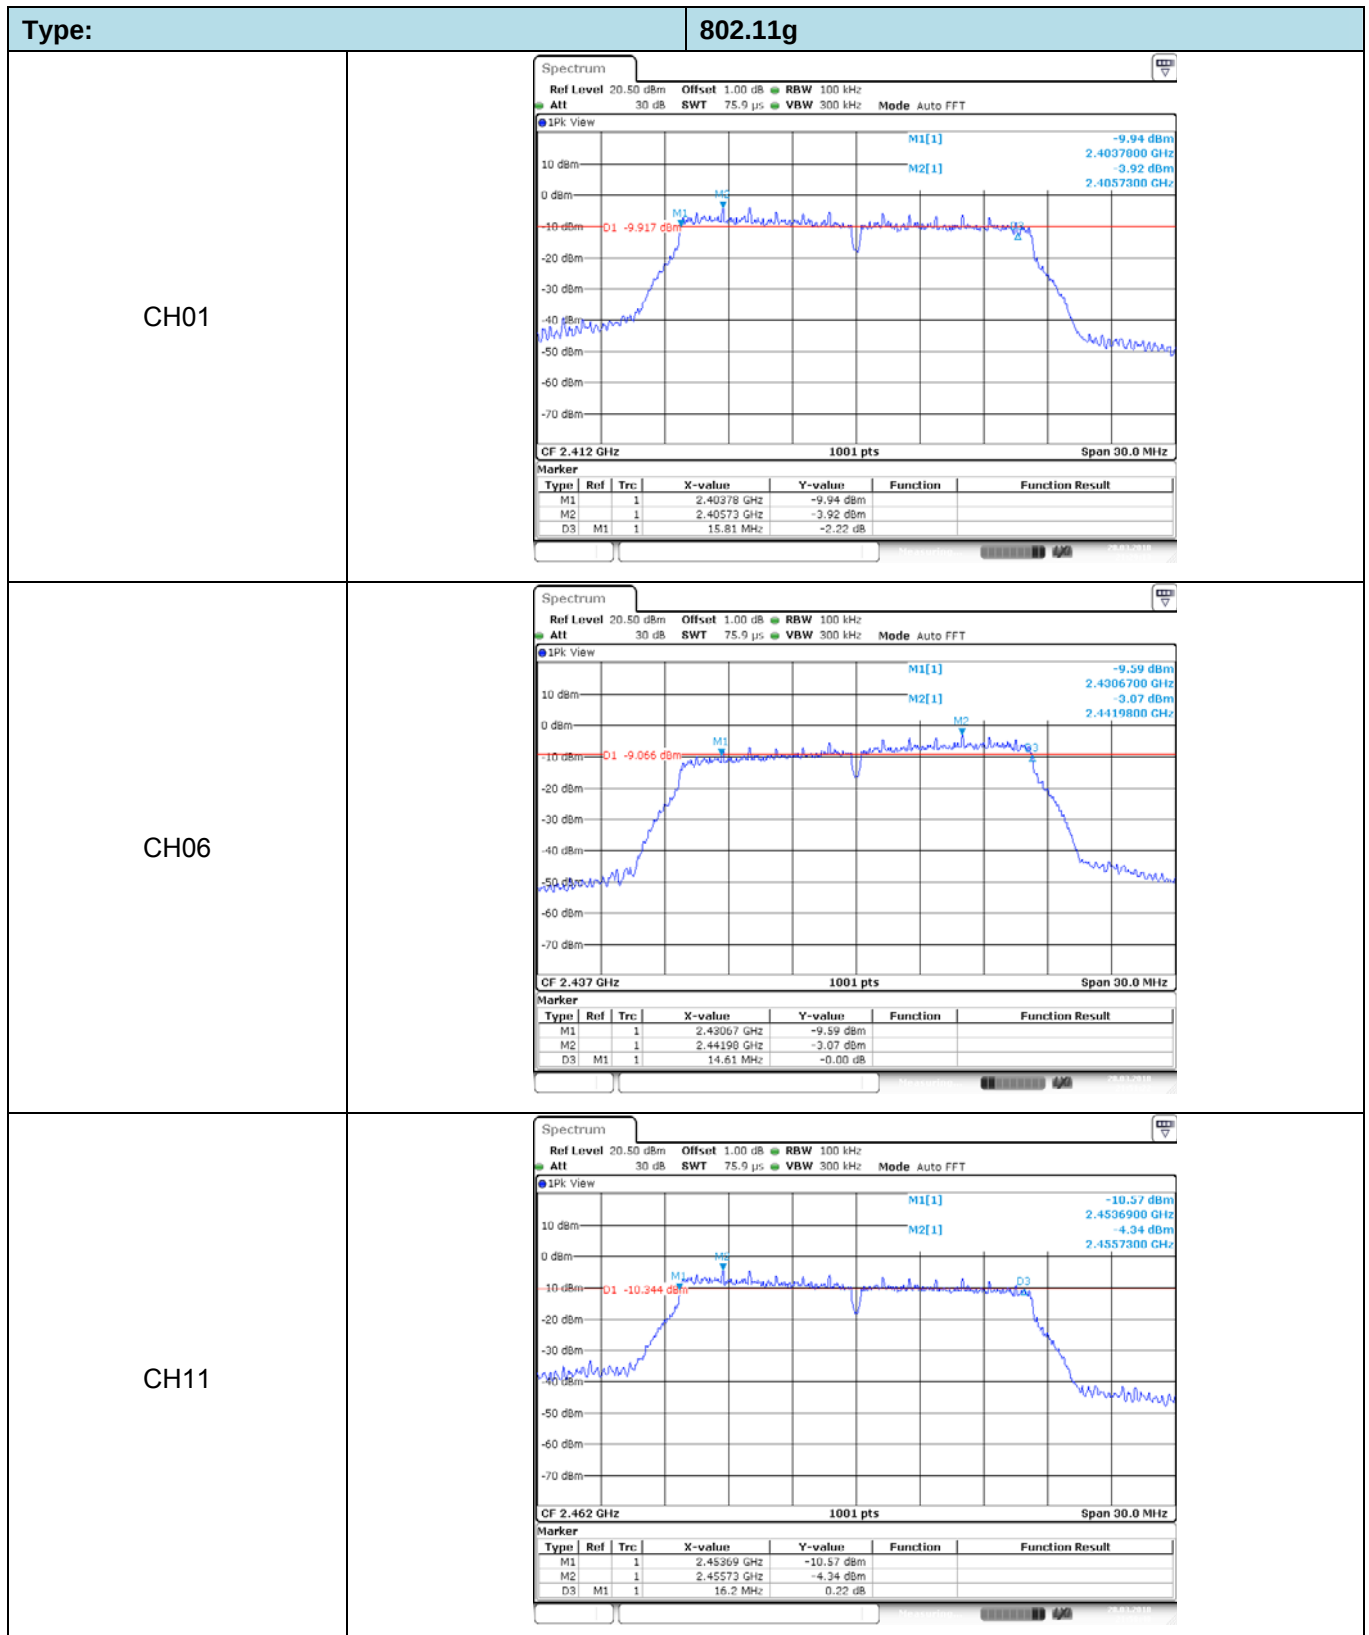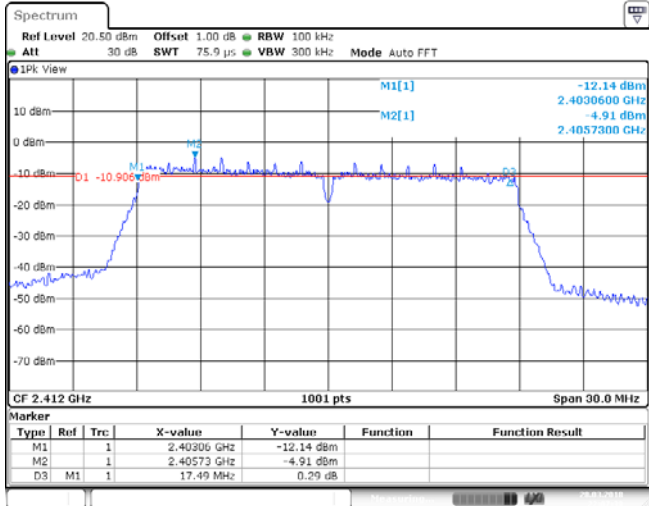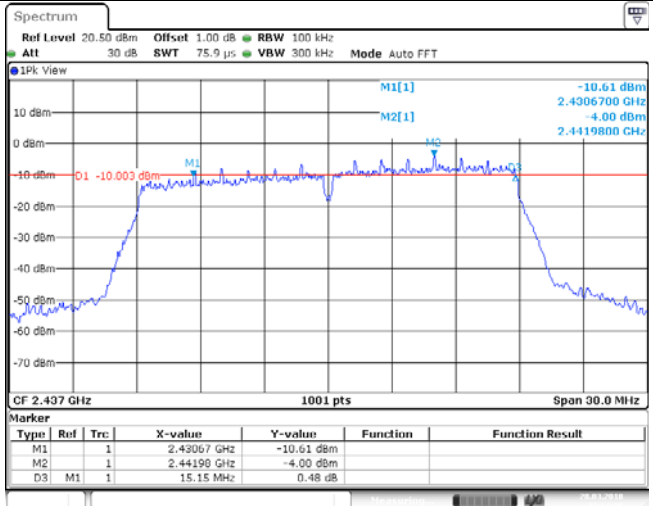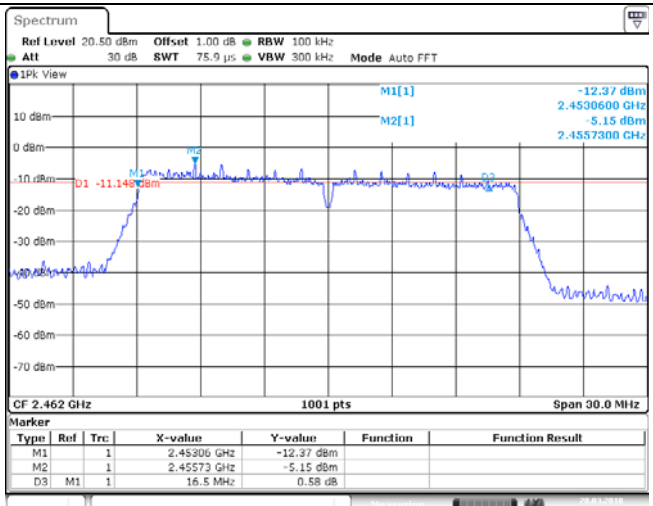Test plot as follows:





Type:	802.11n(HT20)																												
CH01	 Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT IPK View M1[1] -12.14 dBm 2.403060 GHz M2[1] -4.91 dBm 2.405730 GHz D1 -10.90 dBm CF 2.412 GHz 1001 pts Span 30.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.40306 GHz</td><td>-12.14 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.40573 GHz</td><td>-4.91 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>17.49 MHz</td><td>0.29 dB</td><td></td><td></td></tr></table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40306 GHz	-12.14 dBm			M2		1	2.40573 GHz	-4.91 dBm			D3	M1	1	17.49 MHz	0.29 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40306 GHz	-12.14 dBm																									
M2		1	2.40573 GHz	-4.91 dBm																									
D3	M1	1	17.49 MHz	0.29 dB																									
CH06	 Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT IPK View M1[1] -10.61 dBm 2.430670 GHz M2[1] -4.00 dBm 2.441980 GHz D1 -10.00 dBm CF 2.437 GHz 1001 pts Span 30.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.43067 GHz</td><td>-10.61 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.44198 GHz</td><td>-4.00 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>15.15 MHz</td><td>0.48 dB</td><td></td><td></td></tr></table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.43067 GHz	-10.61 dBm			M2		1	2.44198 GHz	-4.00 dBm			D3	M1	1	15.15 MHz	0.48 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.43067 GHz	-10.61 dBm																									
M2		1	2.44198 GHz	-4.00 dBm																									
D3	M1	1	15.15 MHz	0.48 dB																									
CH11	 Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT IPK View M1[1] -12.37 dBm 2.453060 GHz M2[1] -5.15 dBm 2.455730 GHz D1 -11.14 dBm CF 2.462 GHz 1001 pts Span 30.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.45306 GHz</td><td>-12.37 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.45573 GHz</td><td>-5.15 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>16.5 MHz</td><td>0.58 dB</td><td></td><td></td></tr></table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.45306 GHz	-12.37 dBm			M2		1	2.45573 GHz	-5.15 dBm			D3	M1	1	16.5 MHz	0.58 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.45306 GHz	-12.37 dBm																									
M2		1	2.45573 GHz	-5.15 dBm																									
D3	M1	1	16.5 MHz	0.58 dB																									

Type:		802.11n(HT40)																												
CH03	Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT IPk View M1[1] -15.35 dBm 2.4043600 GHz M2[1] -8.37 dBm 2.4395200 GHz D1 -14.374 dBm CF 2.422 GHz 1001 pts Span 60.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.40436 GHz</td><td>-15.35 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.43952 GHz</td><td>-8.37 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>35.88 MHz</td><td>-0.44 dB</td><td></td><td></td></tr></table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40436 GHz	-15.35 dBm			M2		1	2.43952 GHz	-8.37 dBm			D3	M1	1	35.88 MHz	-0.44 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.40436 GHz	-15.35 dBm																										
M2		1	2.43952 GHz	-8.37 dBm																										
D3	M1	1	35.88 MHz	-0.44 dB																										
CH06	Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT IPk View M1[1] -14.43 dBm 2.4201000 GHz M2[1] -8.01 dBm 2.4419800 GHz D1 -14.005 dBm CF 2.437 GHz 1001 pts Span 60.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.42010 GHz</td><td>-14.43 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.44190 GHz</td><td>-8.01 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>26.46 MHz</td><td>-1.93 dB</td><td></td><td></td></tr></table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.42010 GHz	-14.43 dBm			M2		1	2.44190 GHz	-8.01 dBm			D3	M1	1	26.46 MHz	-1.93 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.42010 GHz	-14.43 dBm																										
M2		1	2.44190 GHz	-8.01 dBm																										
D3	M1	1	26.46 MHz	-1.93 dB																										
CH09	Spectrum Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT IPk View M1[1] -16.19 dBm 2.4343600 GHz M2[1] -7.83 dBm 2.4469600 GHz D1 -13.833 dBm CF 2.452 GHz 1001 pts Span 60.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.43436 GHz</td><td>-16.19 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.44696 GHz</td><td>-7.83 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>23.94 MHz</td><td>2.20 dB</td><td></td><td></td></tr></table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.43436 GHz	-16.19 dBm			M2		1	2.44696 GHz	-7.83 dBm			D3	M1	1	23.94 MHz	2.20 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.43436 GHz	-16.19 dBm																										
M2		1	2.44696 GHz	-7.83 dBm																										
D3	M1	1	23.94 MHz	2.20 dB																										

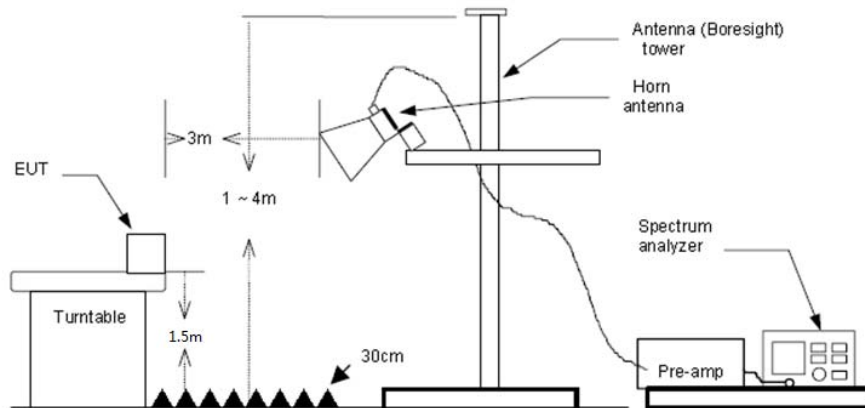
5.6. Restricted band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

- 1) The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

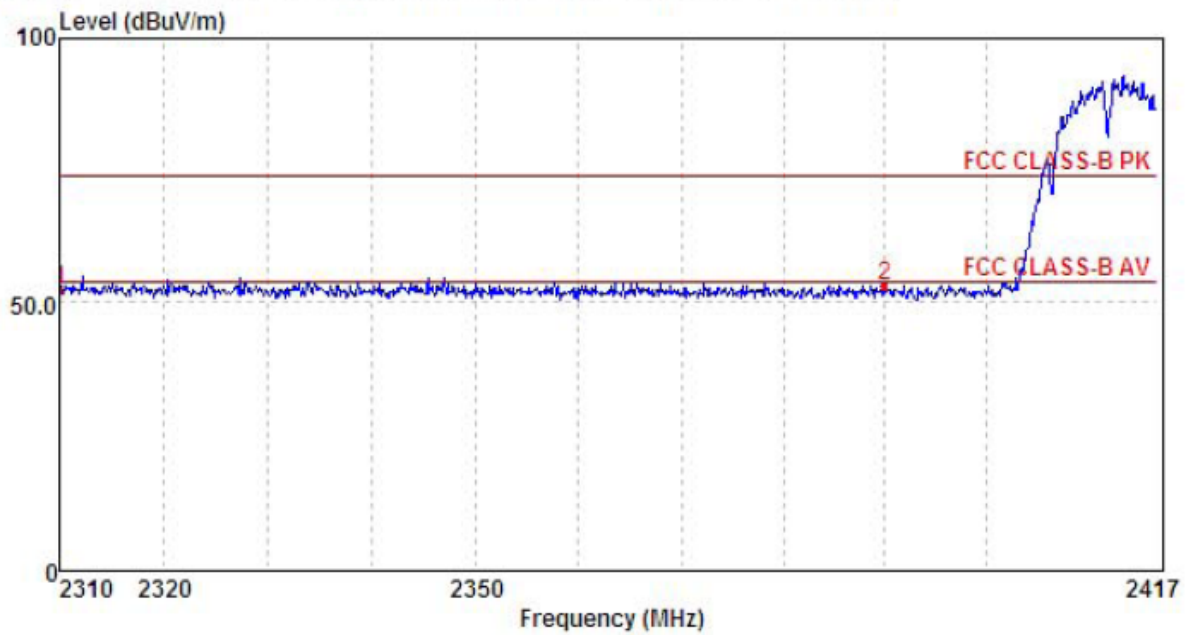
Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor

802.11b-2412MHz Peak:

Polarization:


Vertical



Mark	Frequency MHz	Reading dBUV/m	Antenna dB	Cable dB	Preamp dB	Level dBUV/m	Limit dBUV/m	Over limit	Remark
1	2310.00	17.8	28.0	6.6	0.0	52.4	74.0	-21.6	Peak
2	2390.01	18.9	27.6	6.8	0.0	53.3	74.0	-20.7	Peak

Polarization:

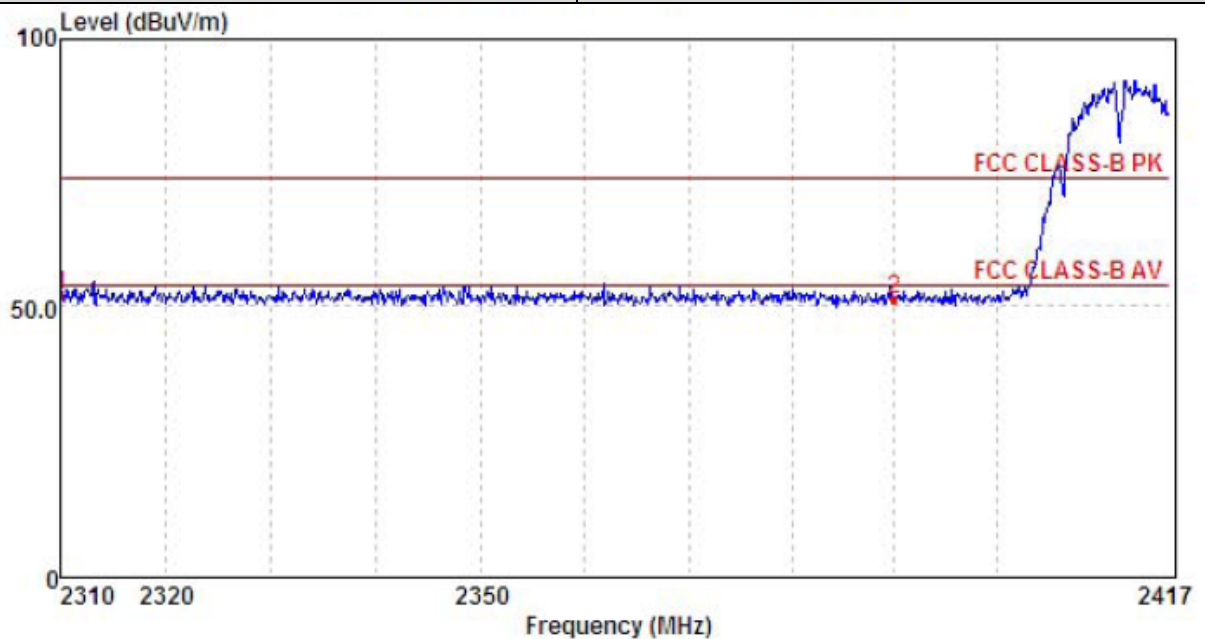Horizontal




Mark	Frequency MHz	Reading dBUV/m	Antenna dB	Cable dB	Preamp dB	Level dBUV/m	Limit dBUV/m	Over limit	Remark
1	2310.00	17.6	28.0	6.6	0.0	52.2	74.0	-21.8	Peak
2	2390.01	16.9	27.6	6.8	0.0	51.3	74.0	-22.7	Peak

802.11b-2462MHz Peak:

Polarization:

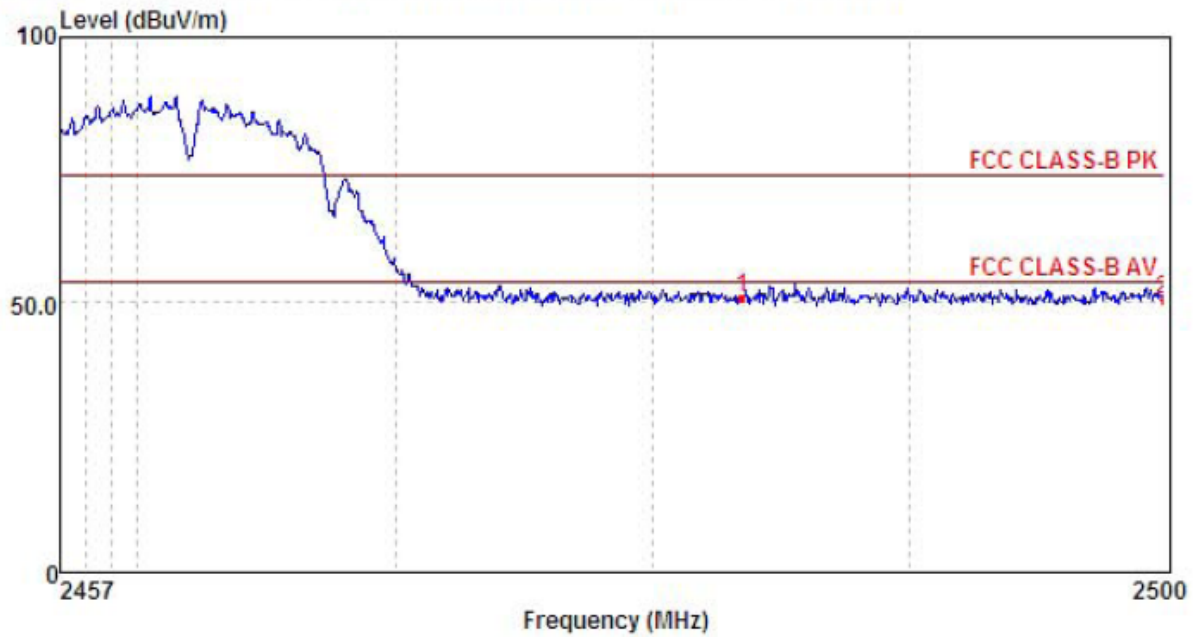
Vertical



Mark	Frequency MHz	Reading dBUV/m	Antenna dB	Cable dB	Preamp dB	Level dBUV/m	Limit dBUV/m	Over limit	Remark
1	2483.49	16.7	27.3	6.8	0.0	50.8	74.0	-23.2	Peak
2	2500.00	16.7	27.2	6.8	0.0	50.7	74.0	-23.3	Peak

Polarization:

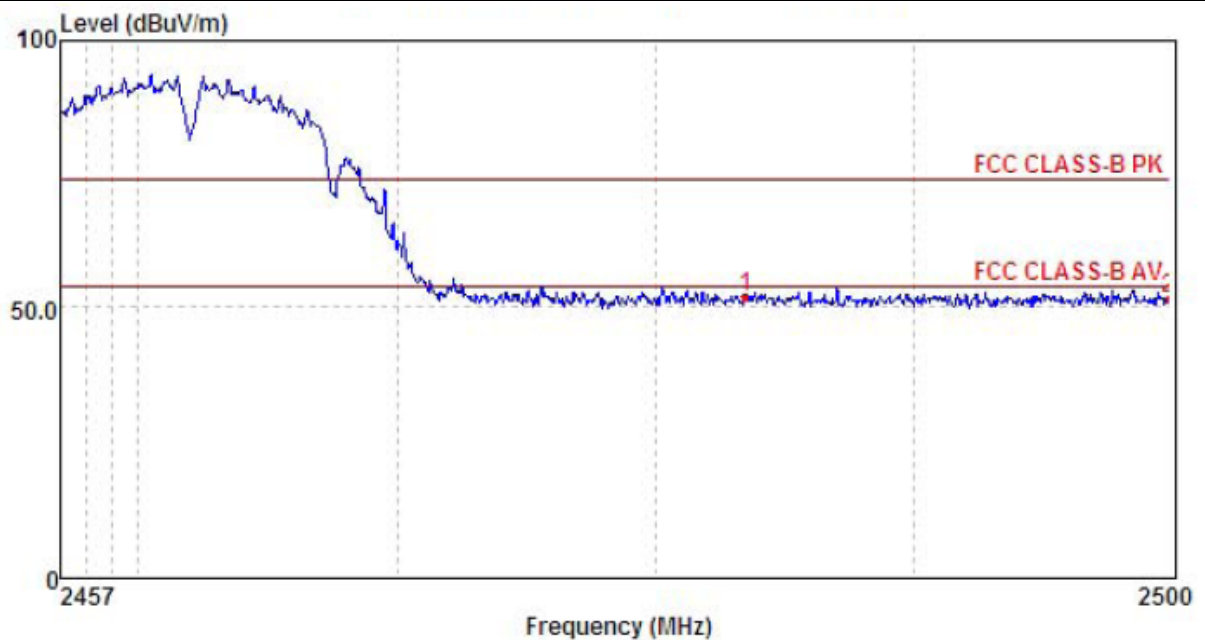Horizontal




Mark	Frequency MHz	Reading dBUV/m	Antenna dB	Cable dB	Preamp dB	Level dBUV/m	Limit dBUV/m	Over limit	Remark
1	2483.49	17.8	27.3	6.8	0.0	51.9	74.0	-22.1	Peak
2	2500.00	17.5	27.2	6.8	0.0	51.5	74.0	-22.5	Peak

802.11g-2412MHz Peak:

Polarization:

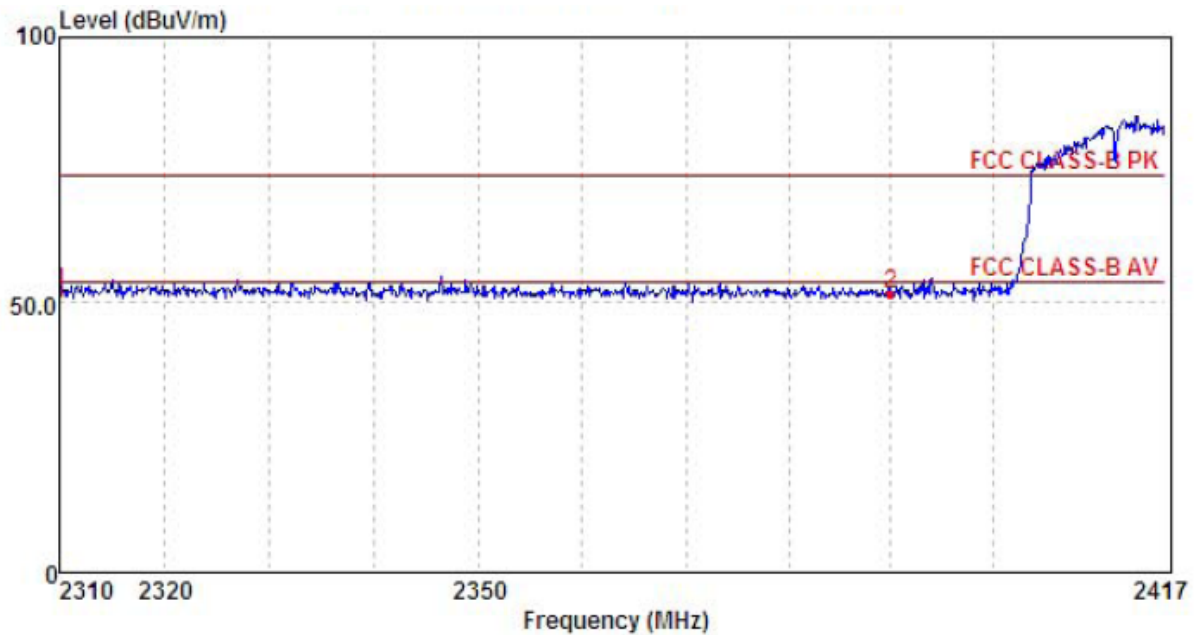
Vertical



Mark	Frequency MHZ	Reading dBUV/m	Antenna dB	Cable dB	Preamp dB	Level dBUV/m	Limit dBUV/m	Over limit	Remark
1	2310.00	17.4	28.0	6.6	0.0	52.0	74.0	-22.0	Peak
2	2390.01	17.4	27.6	6.8	0.0	51.8	74.0	-22.2	Peak

Polarization:

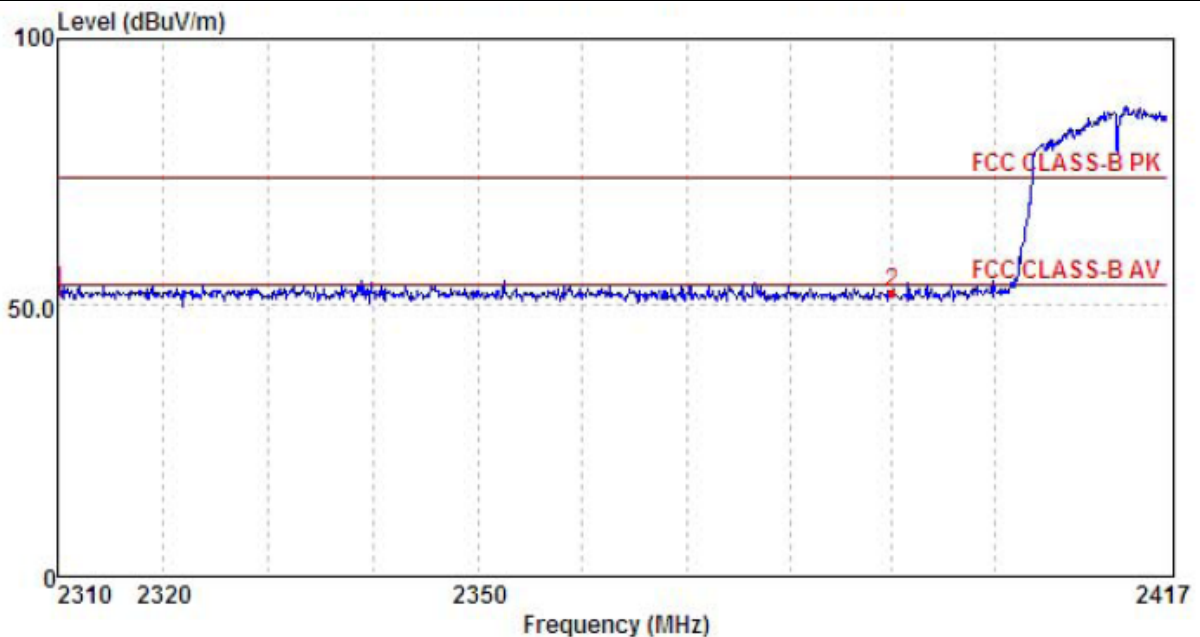Horizontal



Mark	Frequency MHZ	Reading dBUV/m	Antenna dB	Cable dB	Preamp dB	Level dBUV/m	Limit dBUV/m	Over limit	Remark
1	2310.00	18.3	28.0	6.6	0.0	52.9	74.0	-21.1	Peak
2	2390.01	18.2	27.6	6.8	0.0	52.6	74.0	-21.4	Peak