

Test Report

Product: SnowTune Wireless Bluetooth Earpiece

Trade Mark: Unigear

Model Number: SnowTune R

FCC ID: 2A8BL-SNOWTUNER

Prepared for

Guangdong Xin Qian Chao Information Technology Co., Ltd
Nanshan Yungu Innovation Industrial Park, No. 4093, Liuxian Avenue,
Taoyuan Street, Nanshan District, Shenzhen, China

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	6
1.1	DESCRIPTION OF EUT.....	6
1.2	TEST MODE.....	6
1.3	OPERATION CHANNEL LIST	6
1.4	TEST SETUP	7
1.5	ANCILLARY EQUIPMENT	7
2	SUMMARY OF TEST RESULT	8
3	TEST FACILITIES AND ACCREDITATIONS	9
3.1	TEST LABORATORY	9
3.2	ENVIRONMENTAL CONDITIONS	9
3.3	MEASUREMENT UNCERTAINTY	9
3.4	TEST SOFTWARE	9
4	LIST OF TEST EQUIPMENT	10
5	TEST ITEM AND RESULTS.....	12
5.1	ANTENNA REQUIREMENT	12
5.1.1	<i>Standard Requirement</i>	12
5.1.2	<i>Test Result</i>	12
5.2	CONDUCTED EMISSION.....	13
5.2.1	<i>Limits</i>	13
5.2.2	<i>Test Procedures</i>	13
5.2.3	<i>Test Setup</i>	14
5.2.4	<i>Test Result</i>	14
5.3	RADIATED EMISSION	17
5.3.1	<i>Limits</i>	17
5.3.2	<i>Test Procedures</i>	17
5.3.3	<i>Test Setup</i>	17
5.3.4	<i>Test Result</i>	18
5.3.5	<i>Radiated Band Edge</i>	23
5.4	PEAK OUTPUT POWER.....	24
5.4.1	<i>Limit</i>	24
5.4.2	<i>Test Procedure</i>	24
5.4.3	<i>Test Setup</i>	24
5.4.4	<i>Test Results</i>	24
5.5	20dB OCCUPIED CHANNEL BANDWIDTH.....	26
5.5.1	<i>Limit</i>	26
5.5.2	<i>Test Procedure</i>	26
5.5.3	<i>Test Setup</i>	26
5.5.4	<i>Test results</i>	26
5.6	CARRIER FREQUENCY SEPARATION	32
5.6.1	<i>Limit</i>	32
5.6.2	<i>Test Procedure</i>	32
5.6.3	<i>Test Setup</i>	32
5.6.4	<i>Test Results</i>	32
5.7	HOPPING CHANNEL NUMBER	38
5.7.1	<i>Limit</i>	38
5.7.2	<i>Test Procedure</i>	38
5.7.3	<i>Test Setup</i>	38
5.7.4	<i>Test Results</i>	38
5.8	DWELL TIME.....	41
5.8.1	<i>Limit</i>	41
5.8.2	<i>Test Procedure</i>	41

5.8.3	Test Setup	41
5.8.4	Test Results	41
5.9	CONDUCTED BAND EDGE	46
5.9.1	Limit	46
5.9.2	Test Procedure	46
5.9.3	Test Setup	46
5.9.4	Test Results	46
5.10	SPURIOUS RF CONDUCTED EMISSIONS	53
5.10.1	Limit	53
5.10.2	Test Procedure	53
5.10.3	Test Setup	53
5.10.4	Test Results	53
6	PHOTOGRAPHS OF THE TEST SETUP	57
7	PHOTOGRAPHS OF THE EUT	58

TEST RESULT CERTIFICATION

Applicant's Name..... : Guangdong Xin Qian Chao Information Technology Co., Ltd
Address : Nanshan Yungu Innovation Industrial Park, No. 4093, Liuxian Avenue, Taoyuan Street, Nanshan District, Shenzhen, China
Manufacturer's Name : Shenzhen New Qianchao Technology Co., Ltd.
Address : 6/F, Bldg. E, No.7, Dongpo Rd., Bantian St., Longgang Dist., Shenzhen, Guangdong, China, 518000

Product description

Product name : SnowTune Wireless Bluetooth Earpiece

Model Number : SnowTune R

Standards..... : FCC Part 15.247

Test procedure..... : IEEE/ANSI C63.10-2020

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test

Date (s) of performance of tests..... : October 25, 2023 ~ October 31, 2023

Test Result..... : **Pass**

Testing Engineer :

Zoe su

(Z o e S u)

Technical Manager :

Gary Lu

(G a r y L u)

Authorized Signatory :

Leo Su

(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	SnowTune Wireless Bluetooth Earpiece
Model name:	SnowTune R
Series Model:	/
Different of series model:	N/A
Operation frequency:	2402-2480MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Bit Rate of transmitter:	1 Mbps, 2Mbps, 3Mbps
Antenna type:	PCB Antenna
Antenna gain:	1dBi
Max. output power:	0.48dBm
Hardware version:	RTL8763ESE_R_V1.3
Software version:	MP_R_Unigear SnowTune_0017
Battery:	DC 3.7V/165mAh
Power supply:	DC 3.7V by battery, USB 5V charging
Adapter information:	N/A

1.2 Test Mode

Test Mode	Channel	Frequency (MHz)
1	00	2402
2	39	2441
3	78	2480

1.3 Operation Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460

05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	--	--
26	2428	53	2455	--	--

1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.5 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Adapter	HW-100225C00	/	Huawei

Equipment	Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB Cable	100	Unshielded	Without Ferrite

2 Summary of Test Result

No.	Standard Section	Test Item	Result	Remark
1	15.203	Antenna requirement	Pass	
2	15.207	Conducted emission	Pass	
3	15.247(d)	Band edge	Pass	
4	15.205/15.209	Spurious emission	Pass	
5	15.247(b)(1)	Peak output power	Pass	
6	15.247(a)(1)	20dB occupied bandwidth	Pass	
7	15.247(a)(1)	Carrier Frequencies Separation	Pass	
8	15.247(a)(1)	Hopping channel number	Pass	
9	15.247(a)(1)	Dwell time	Pass	
10	15.247(d)	Spurious RF Conducted Emissions	Pass	

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Radiated emission (above 1GHz)	± 4.7 dB	
Temperature	± 1 degree	
Humidity	± 5 %	

3.4 Test Software

Software name	Manufacturer	Model	Version
EMI Measurement	Farad	EZ-EMC	V1.1.4.2
Conducted test system	MWRF-test	MTS 8310	V2.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2022-04-02	2024-04-01
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2022-04-06	2024-04-05
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 91270	01193	2022-04-02	2024-04-01
4	HB-E004	Preamplifier	Noyetec	LAN-0910	NYCM1420101	2023-05-11	2024-05-10
5	HB-E005	Preamplifier	Noyetec	LAN-0118	NYCM1420102	2023-05-12	2024-05-11
6	HB-E006	Preamplifier	Noyetec	LAN-1840	NYCM1420103	2023-06-11	2024-06-10
7	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2023-05-12	2024-05-11
8	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
9	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM1420204	/	/
10	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2023-05-11	2024-05-10
11	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2022-07-24	2024-07-23
Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2023-05-12	2024-05-11
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2023-05-12	2024-05-11
3	HB-E016	ZN23201	Noyetec	ZN23201	N/A	2023-05-11	2024-05-10
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2023-05-12	2024-05-11
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2023-05-12	2024-05-11
RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG AnaioG Signal Generator	Agilent	N5181A	MY47070421	2023-05-11	2024-05-10
2	HB-E042	WIDEBAND RADIO COMMUNICA	R&S	CMW500	132108	2023-05-11	2024-05-10

		TION TESTER					
3	HB-E043	MXG Anaio Signal Generator	Agilent	N5182A	US46240335	2023-05-11	2024-05-10
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2023-05-11	2024-05-10
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	/	/
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1	N/A	/	/
7	HB-E077	PXA Signal Analyzer	Agilent	N9030A	N/A	2023-05-11	2024-05-10

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The EUT antenna is PCB Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted Emission

5.2.1 Limits

Limits – Class B		
Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note: 1. the tighter limit applies at the band edges. 2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.		

5.2.2 Test Procedures

a) EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f) LISN is at least 80 cm from nearest part of EUT chassis.
- g) For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.2.3 Test Setup

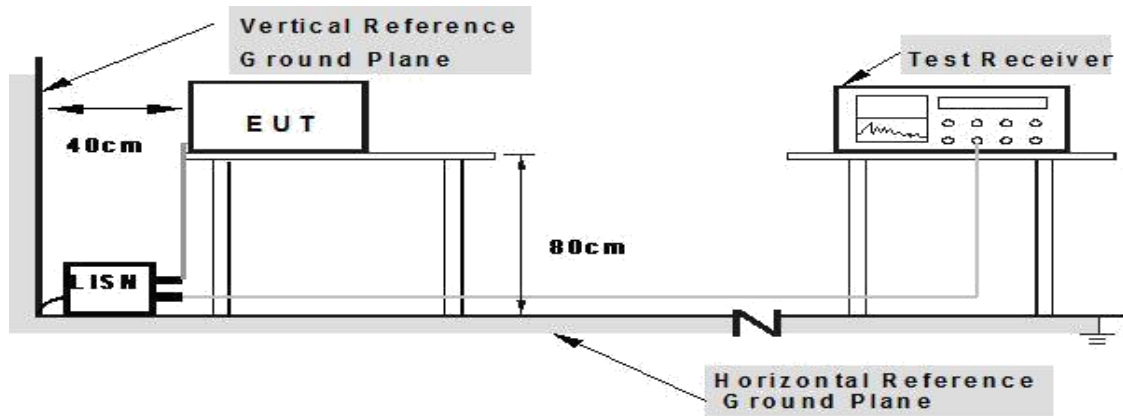

5.2.4 Test Result

EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Test Mode:	Charging+TX	Phase :	L
Test Voltage:	AC 120V/60Hz		

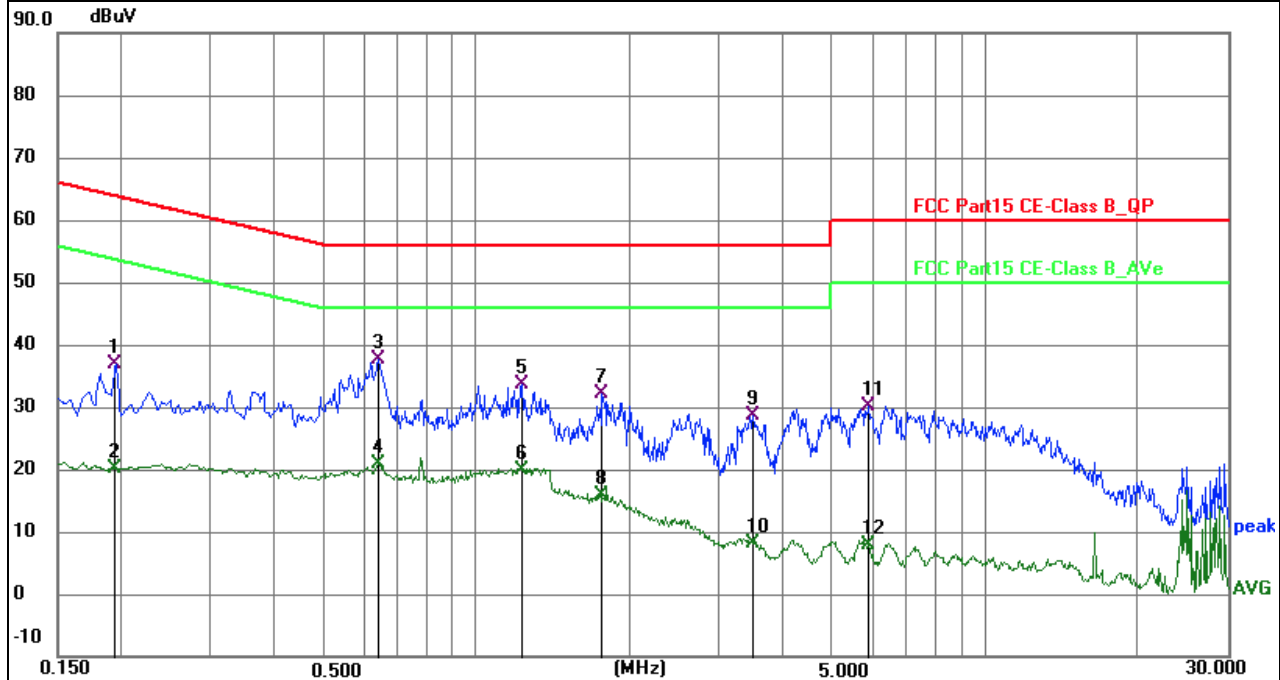


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	27.88	8.97	36.85	63.83	-26.98	QP	P	
2	0.1949	11.05	8.97	20.02	53.83	-33.81	AVG	P	
3 *	0.6405	27.81	9.90	37.71	56.00	-18.29	QP	P	
4	0.6405	10.90	9.90	20.80	46.00	-25.20	AVG	P	
5	1.2300	23.58	10.03	33.61	56.00	-22.39	QP	P	
6	1.2300	9.77	10.03	19.80	46.00	-26.20	AVG	P	
7	1.7700	22.08	10.05	32.13	56.00	-23.87	QP	P	
8	1.7700	5.74	10.05	15.79	46.00	-30.21	AVG	P	
9	3.4980	18.56	10.12	28.68	56.00	-27.32	QP	P	
10	3.4980	-2.00	10.12	8.12	46.00	-37.88	AVG	P	
11	5.9010	19.77	10.25	30.02	60.00	-29.98	QP	P	
12	5.9010	-2.41	10.25	7.84	50.00	-42.16	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. All test modes were pre-tested, but we only recorded the worst case in this report.

EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Test Mode:	Charging+TX	Phase :	N
Test Voltage:	AC 120V/60Hz		

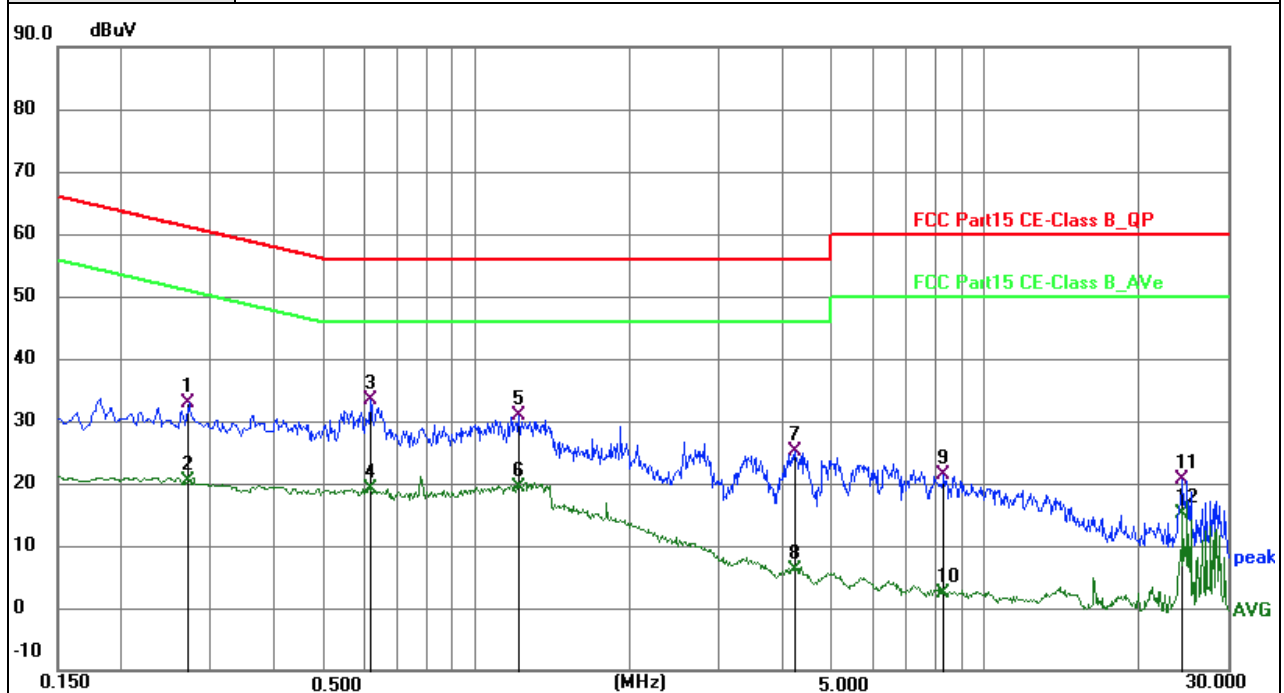

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2714	23.12	9.68	32.80	61.07	-28.27	QP	P	
2	0.2714	10.63	9.68	20.31	51.07	-30.76	AVG	P	
3 *	0.6180	23.58	9.70	33.28	56.00	-22.72	QP	P	
4	0.6180	9.41	9.70	19.11	46.00	-26.89	AVG	P	
5	1.2120	20.91	10.01	30.92	56.00	-25.08	QP	P	
6	1.2120	9.45	10.01	19.46	46.00	-26.54	AVG	P	
7	4.2315	14.97	10.17	25.14	56.00	-30.86	QP	P	
8	4.2315	-3.92	10.17	6.25	46.00	-39.75	AVG	P	
9	8.2995	11.06	10.24	21.30	60.00	-38.70	QP	P	
10	8.2995	-7.95	10.24	2.29	50.00	-47.71	AVG	P	
11	24.4140	10.24	10.43	20.67	60.00	-39.33	QP	P	
12	24.4140	4.73	10.43	15.16	50.00	-34.84	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. All test modes were pre-tested, but we only recorded the worst case in this report.

5.3 Radiated Emission

5.3.1 Limits

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures


- The radiated emission tests were performed in the 3 meters.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- For the actual test configuration, please refer to the related item – EUT test photos.

5.3.3 Test Setup


Radiated Emission Test-Up Frequency Below 30MHz

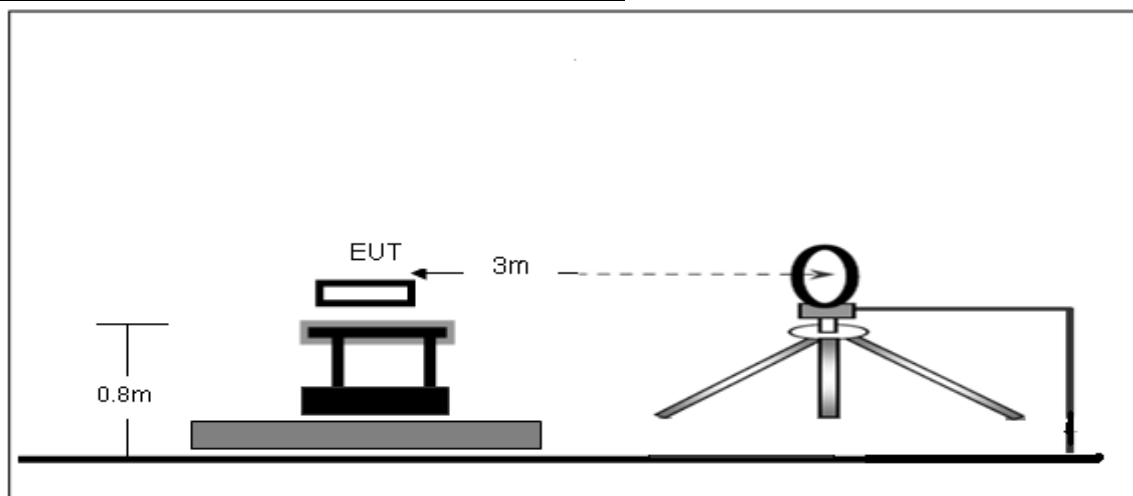

Radiated Emission Test-Up Frequency 30MHz~1GHz

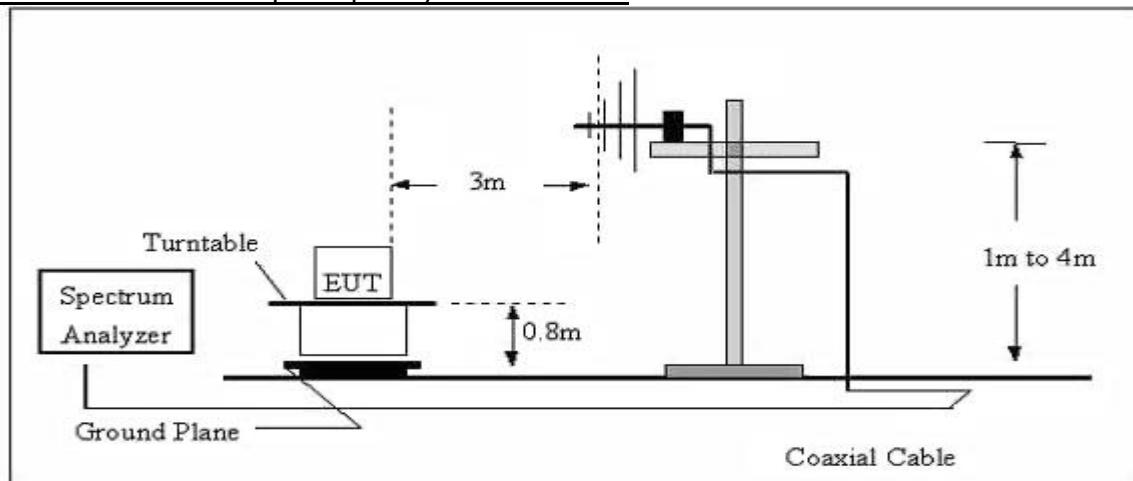

Radiated emission test-up frequency above 1GHz

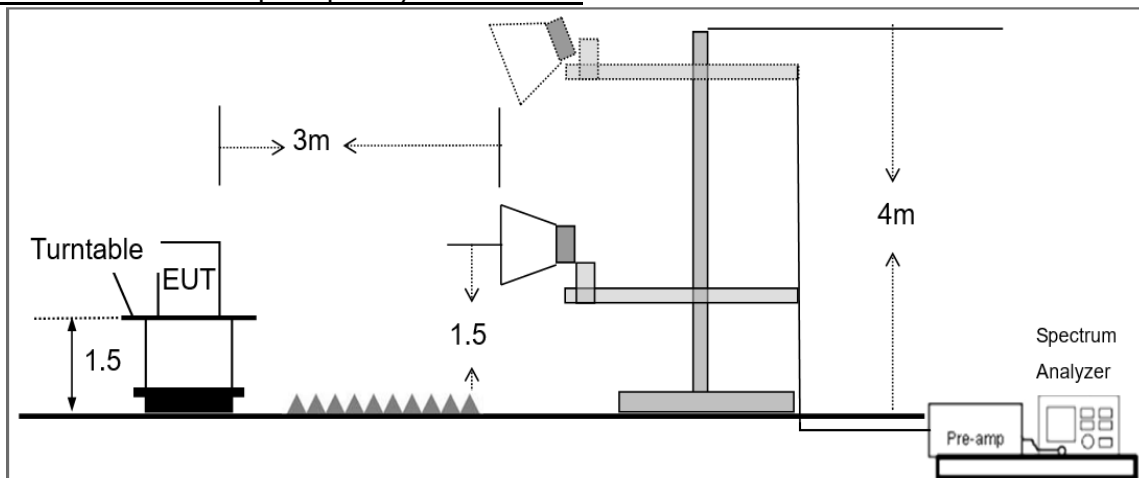

5.3.4 Test Result

Below 30MHz

EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Pressure:	1010 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	TX	Polarization:	--


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	Pass
--	--	--	--	Pass

Note:

1. For 9kHz-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
3. Limit line = specific limits (dBuV) + distance extrapolation factor.

30MHz – 1GHz

EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Test Mode:	TX	Phase :	Horizontal
Test Voltage:	DC 3.7V from battery		

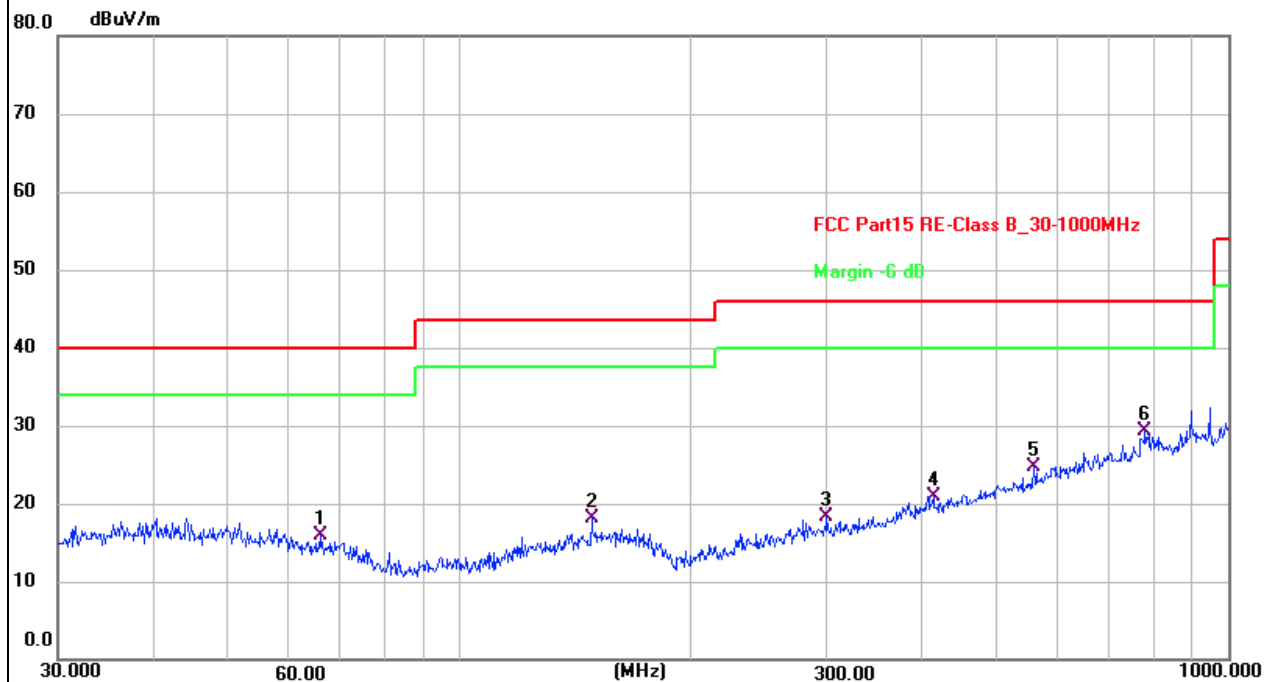


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	65.8030	26.50	-10.51	15.99	40.00	-24.01	QP	100	166	P	
2	148.4410	26.92	-8.83	18.09	43.50	-25.41	QP	100	329	P	
3	300.3672	26.65	-8.33	18.32	46.00	-27.68	QP	100	126	P	
4	413.2706	26.69	-5.73	20.96	46.00	-25.04	QP	100	349	P	
5	558.7301	27.34	-2.57	24.77	46.00	-21.23	QP	100	36	P	
6 *	779.6067	27.52	1.81	29.33	46.00	-16.67	QP	100	116	P	

Remarks:

1. Measurement Level = Reading level + Correct Factor, Margin = Measurement Level – Limit.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. All test modes were pre-tested, but we only recorded the worst case in this report.

EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Test Mode:	TX	Phase :	Vertical
Test Voltage:	DC 3.7V from battery		

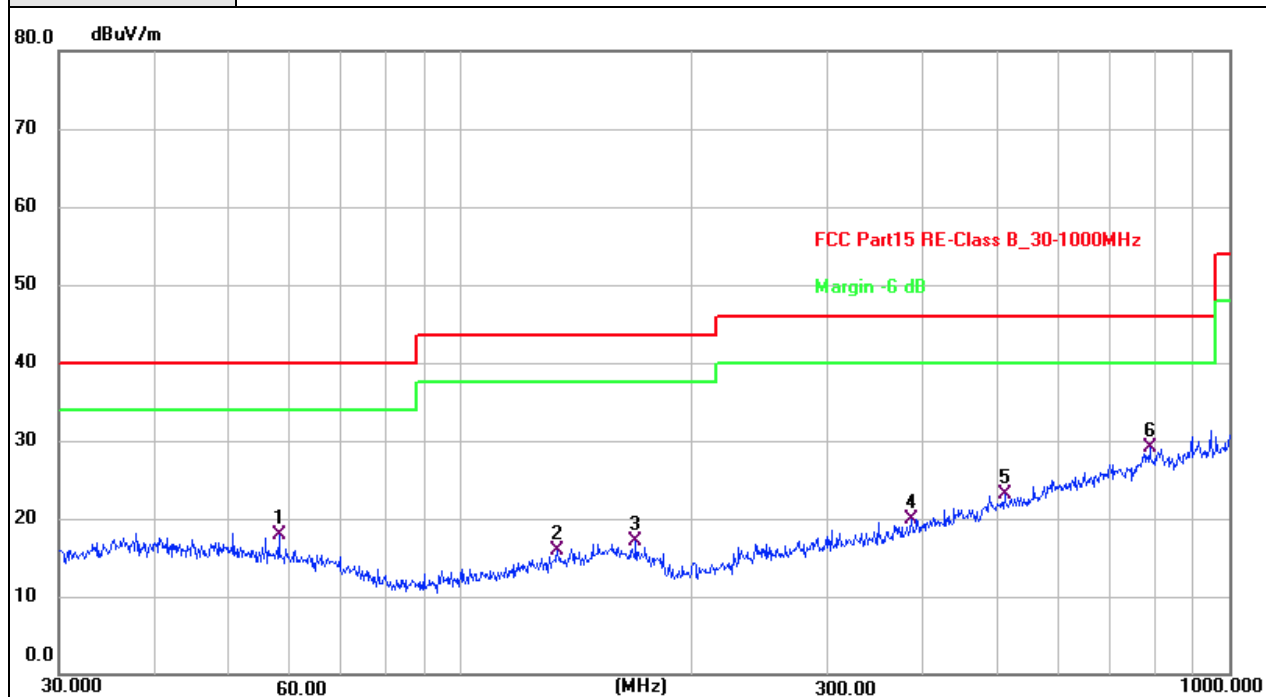

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	57.9993	27.50	-9.69	17.81	40.00	-22.19	QP	100	222	P	
2	133.6188	25.67	-9.76	15.91	43.50	-27.59	QP	100	11	P	
3	169.0054	26.79	-9.59	17.20	43.50	-26.30	QP	100	312	P	
4	385.2805	26.36	-6.48	19.88	46.00	-26.12	QP	100	31	P	
5	510.0436	26.40	-3.36	23.04	46.00	-22.96	QP	100	11	P	
6 *	787.8513	26.96	2.07	29.03	46.00	-16.97	QP	100	42	P	

Remarks:

1. Measurement Level = Reading level + Correct Factor, Margin = Measurement Level – Limit.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. All test modes were pre-tested, but we only recorded the worst case in this report.

1GHz-25GHz

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804	66.94	5.21	35.59	44.30	63.44	74.00	-10.56	Pk	Vertical
4804	51.50	5.21	35.59	44.30	48.00	54.00	-6.00	AV	Vertical
7206	58.86	6.48	36.27	44.60	57.01	74.00	-16.99	Pk	Vertical
7206	45.35	6.48	36.27	44.60	43.50	54.00	-10.50	AV	Vertical
4804	66.16	5.21	35.55	44.30	62.62	74.00	-11.38	Pk	Horizontal
4804	50.99	5.21	35.55	44.30	47.45	54.00	-6.55	AV	Horizontal
7206	58.91	6.48	36.27	44.52	57.14	74.00	-16.86	Pk	Horizontal
7206	45.05	6.48	36.27	44.52	43.28	54.00	-10.72	AV	Horizontal
Mid Channel (2441 MHz)(GFSK)--Above 1G									
4882	68.76	5.21	35.66	44.20	65.43	74.00	-8.57	Pk	Vertical
4882	52.22	5.21	35.66	44.20	48.89	54.00	-5.11	AV	Vertical
7323	60.16	7.10	36.50	44.43	59.33	74.00	-14.67	Pk	Vertical
7323	45.55	7.10	36.50	44.43	44.72	54.00	-9.28	AV	Vertical
4882	66.27	5.21	35.66	44.20	62.94	74.00	-11.06	Pk	Horizontal
4882	49.17	5.21	35.66	44.20	45.84	54.00	-8.16	AV	Horizontal
7323	58.40	7.10	36.50	44.43	57.57	74.00	-16.43	Pk	Horizontal
7323	43.46	7.10	36.50	44.43	42.63	54.00	-11.37	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960	68.91	5.21	35.52	44.21	65.43	74.00	-8.57	Pk	Vertical
4960	52.41	5.21	35.52	44.21	48.93	54.00	-5.07	AV	Vertical
7440	60.47	7.10	36.53	44.60	59.50	74.00	-14.50	Pk	Vertical
7440	43.35	7.10	36.53	44.60	42.38	54.00	-11.62	AV	Vertical
4960	65.50	5.21	35.52	44.21	62.02	74.00	-11.98	Pk	Horizontal
4960	50.26	5.21	35.52	44.21	46.78	54.00	-7.22	AV	Horizontal
7440	59.59	7.10	36.53	44.60	58.62	74.00	-15.38	Pk	Horizontal
7440	43.71	7.10	36.53	44.60	42.74	54.00	-11.26	AV	Horizontal

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor.
3. All the modulation modes have been tested, and only the worst results are reflected in the report.

5.3.5 Radiated Band Edge

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
1Mbps(GFSK)- Non-hopping									
2310.00	59.43	2.40	27.70	40.40	49.13	74.00	-24.87	Pk	Horizontal
2310.00	44.88	2.40	27.70	40.40	34.58	54.00	-19.42	AV	Horizontal
2310.00	59.66	2.40	27.70	40.40	49.36	74.00	-24.64	Pk	Vertical
2310.00	42.47	2.40	27.70	40.40	32.17	54.00	-21.83	AV	Vertical
2390.00	57.59	2.44	28.30	40.10	48.23	74.00	-25.77	Pk	Vertical
2390.00	41.10	2.44	28.30	40.10	31.74	54.00	-22.26	AV	Vertical
2390.00	59.37	2.44	28.30	40.10	50.01	74.00	-23.99	Pk	Horizontal
2390.00	43.19	2.44	28.30	40.10	33.83	54.00	-20.17	AV	Horizontal
2483.50	59.09	2.48	28.70	39.80	50.47	74.00	-23.53	Pk	Vertical
2483.50	42.89	2.48	28.70	39.80	34.27	54.00	-19.73	AV	Vertical
2483.50	59.25	2.48	28.70	39.80	50.63	74.00	-23.37	Pk	Horizontal
2483.50	41.24	2.48	28.70	39.80	32.62	54.00	-21.38	AV	Horizontal
2500.00	58.74	2.48	28.70	39.80	50.12	74.00	-23.88	Pk	Vertical
2500.00	41.82	2.48	28.70	39.80	33.20	54.00	-20.80	AV	Vertical
2500.00	59.51	2.48	28.70	39.80	50.89	74.00	-23.11	Pk	Horizontal
2500.00	42.41	2.48	28.70	39.80	33.79	54.00	-20.21	AV	Horizontal

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor.
3. All the modulation modes have been tested, and only the worst results are reflected in the report.

5.4 Peak Output Power


5.4.1 Limit

FCC Part15 Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(b)(1)	Peak output power	Power<1W(30dBm)	2400-2483.5

5.4.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
 RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤1 MHz)
 RBW=3MHz, VBW=8MHz, Detector=Peak (If 20dB BW > 1 MHz)
- (3) The EUT was set to continuously transmitting in the max power during the test.

5.4.3 Test Setup



5.4.4 Test Results

EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Test Mode:	TX Mode /CH00, CH39, CH78	Test Voltage:	DC 3.7V from battery

GFSK

Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	-2.1	20.97
CH39	2441	-3.34	20.97
CH78	2480	-3.22	20.97

$\pi/4$ -DQPSK

Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	-1.68	20.97
CH39	2441	-2.66	20.97
CH78	2480	-2.54	20.97

8DPSK

Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	0.48	20.97
CH39	2441	0.01	20.97
CH78	2480	-0.52	20.97

5.5 20dB Occupied Channel Bandwidth

5.5.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247a(1)	20dB bandwidth	N/A	2400-2483.5


5.5.2 Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

(2) Spectrum Setting:

Bandwidth: RBW=30 kHz, VBW=100 kHz, detector= Peak

5.5.3 Test Setup




5.5.4 Test results



EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Test Mode:	TX Mode /CH00, CH39, CH78	Test Voltage:	DC 3.7V from battery

Mode	Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
GFSK	2402	0.9469	0.87771	Pass
	2441	0.9581	0.87949	Pass
	2480	0.9556	0.87967	Pass
$\pi/4$ -DQPSK	2402	1.307	1.1779	Pass
	2441	1.282	1.1810	Pass
	2480	1.314	1.1784	Pass
8DPSK	2402	1.304	1.1863	Pass
	2441	1.297	1.1842	Pass
	2480	1.302	1.1807	Pass


Test plots

GFSK mode

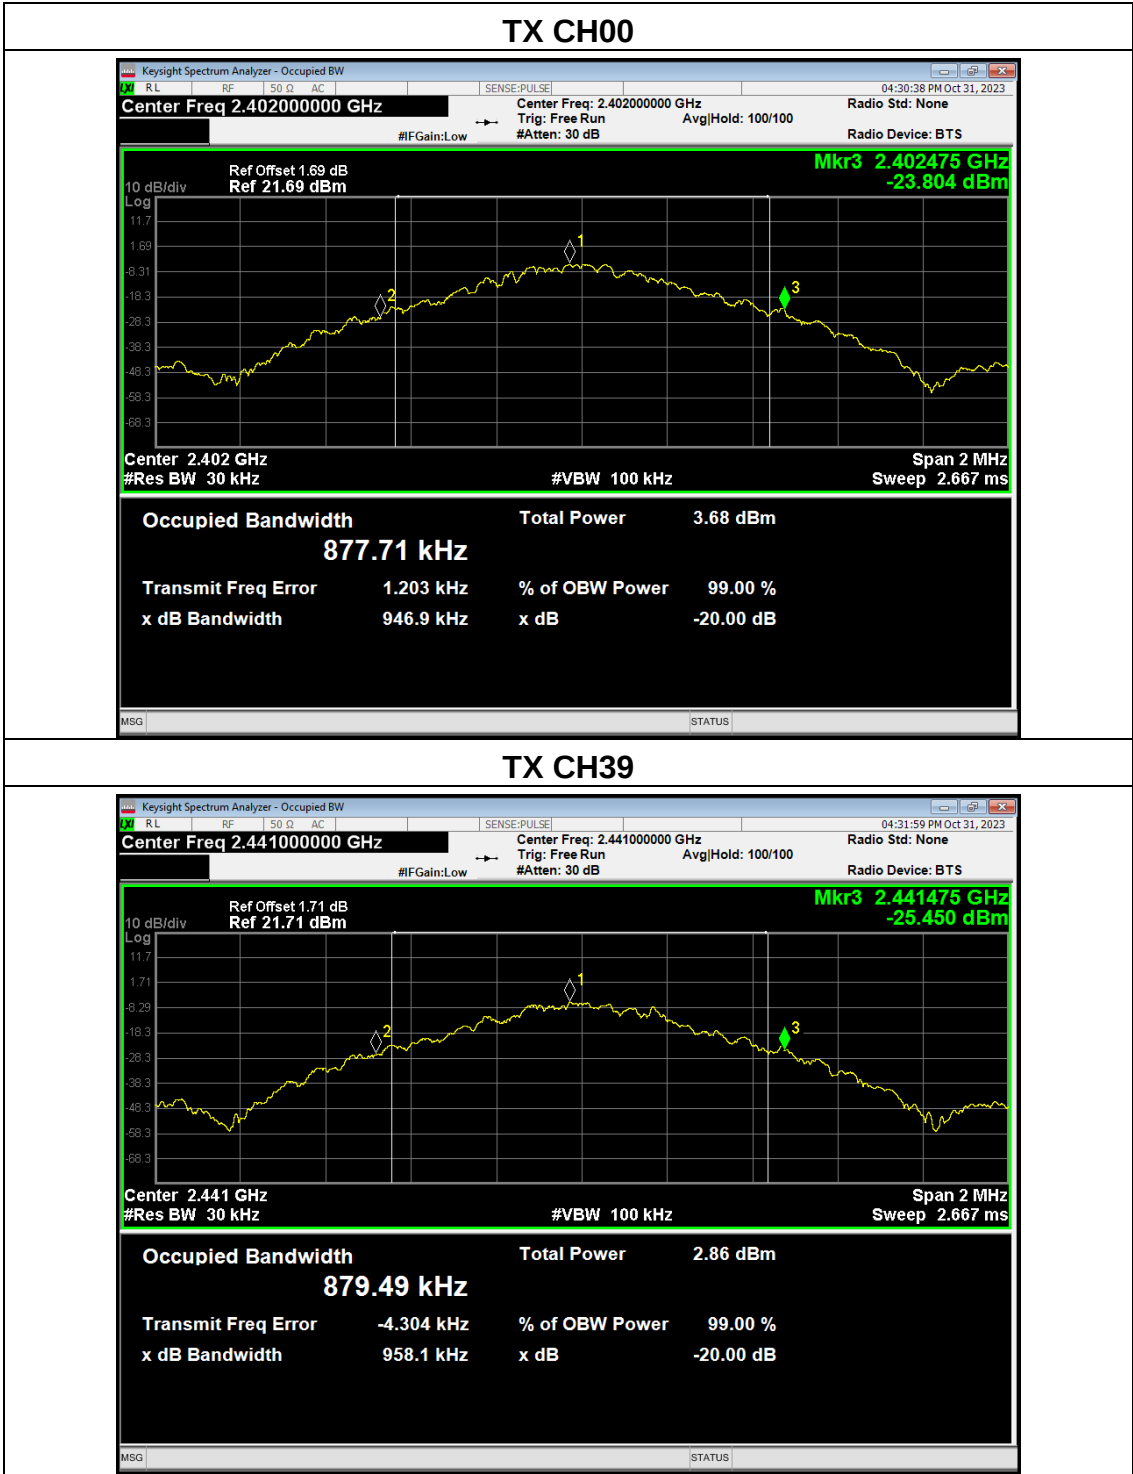


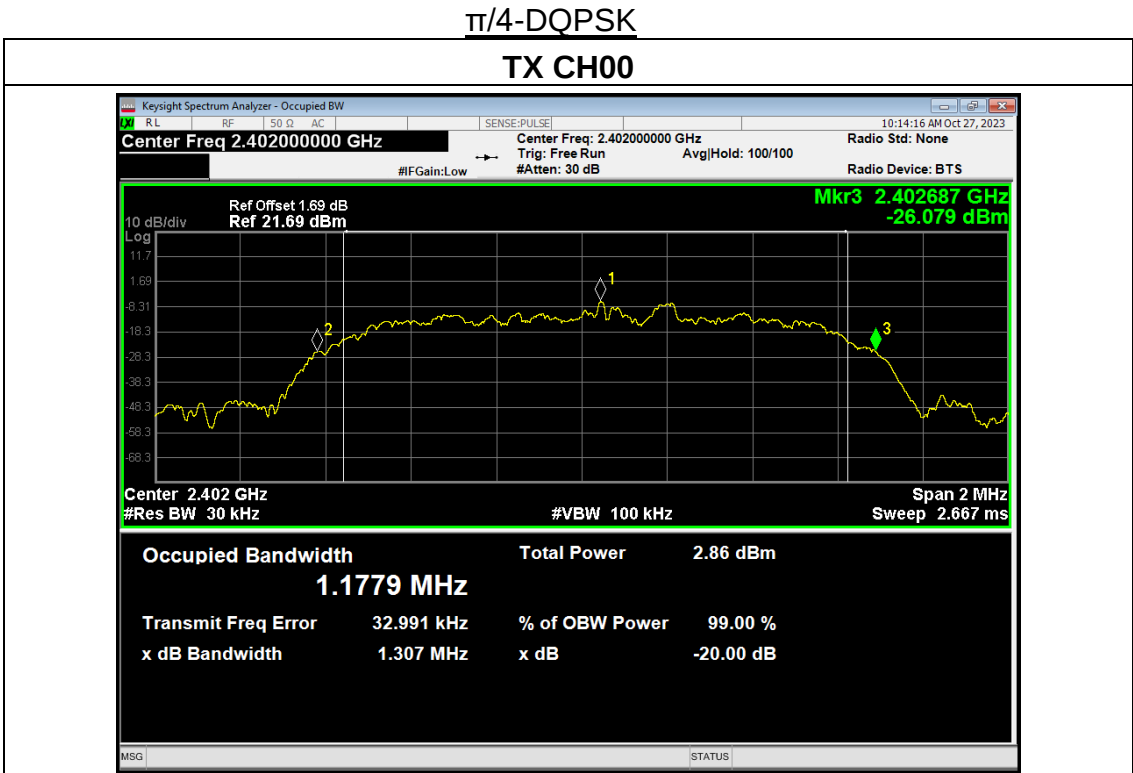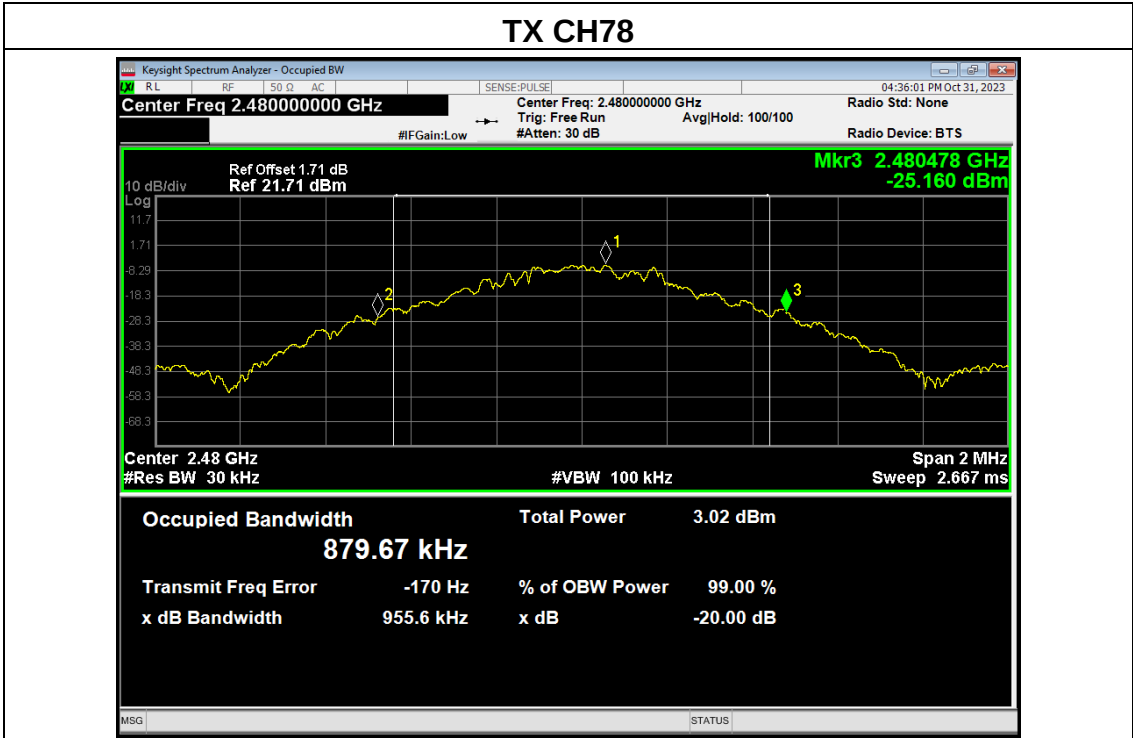

TX CH39

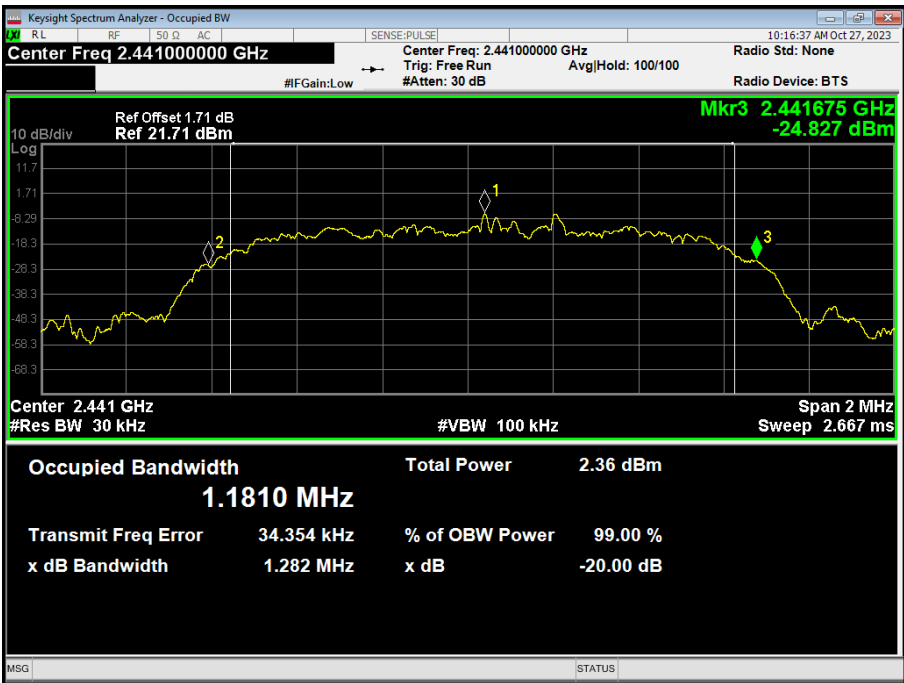


TX CH78

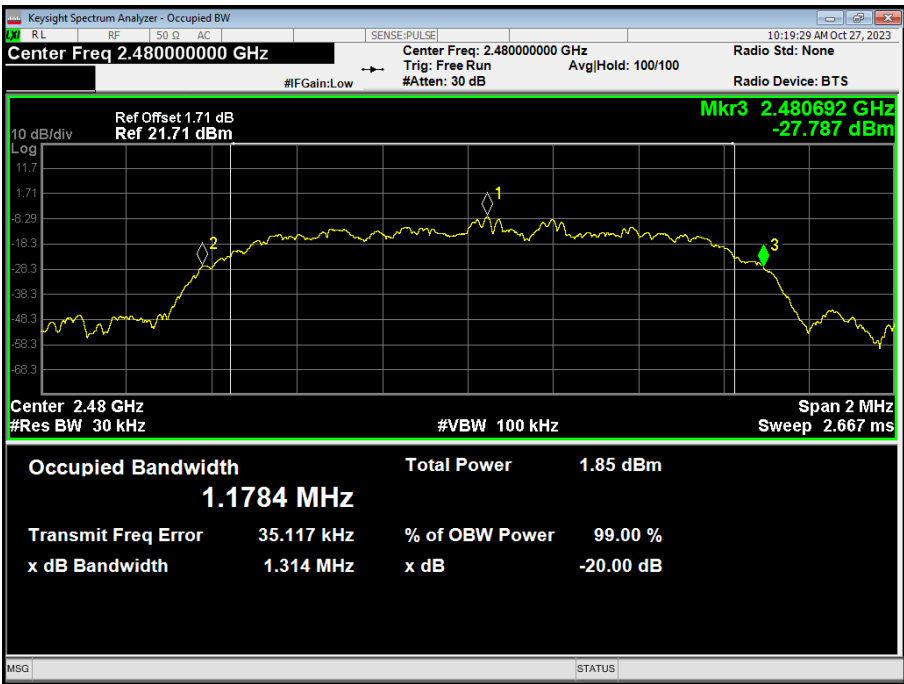



8DPSK mode

TX CH00

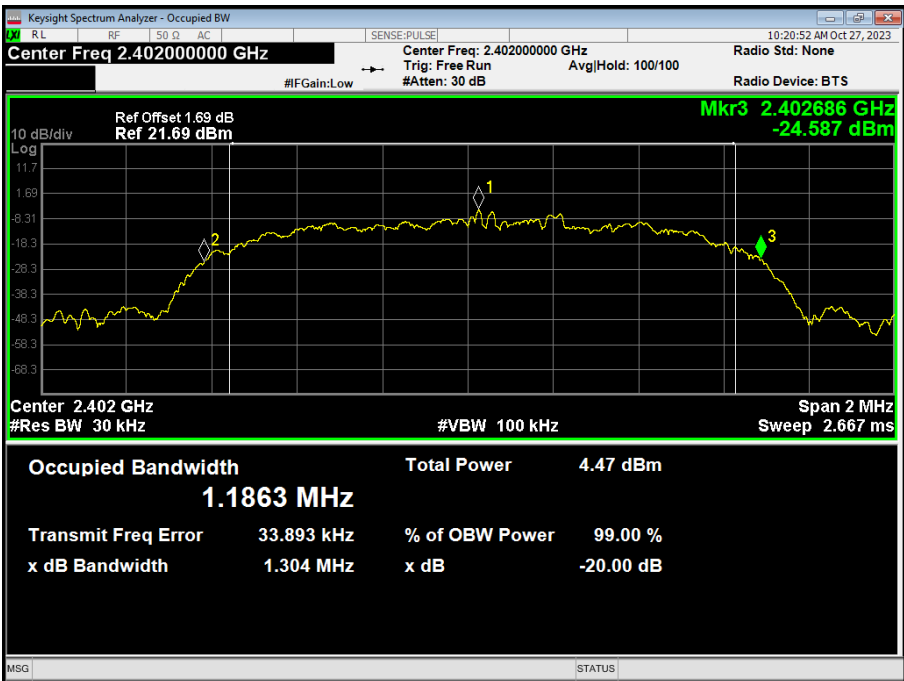

TX CH39

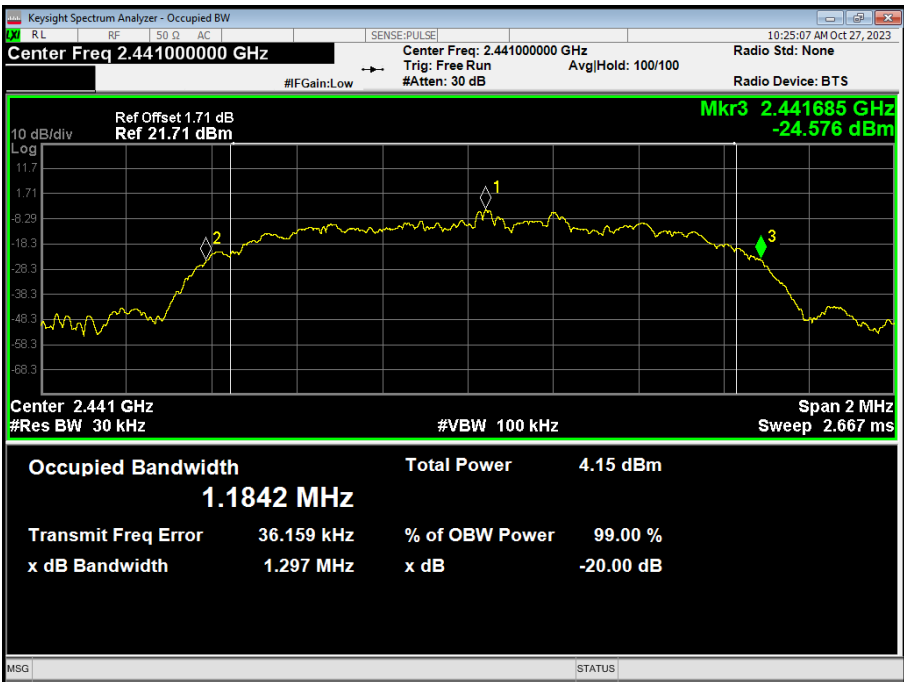

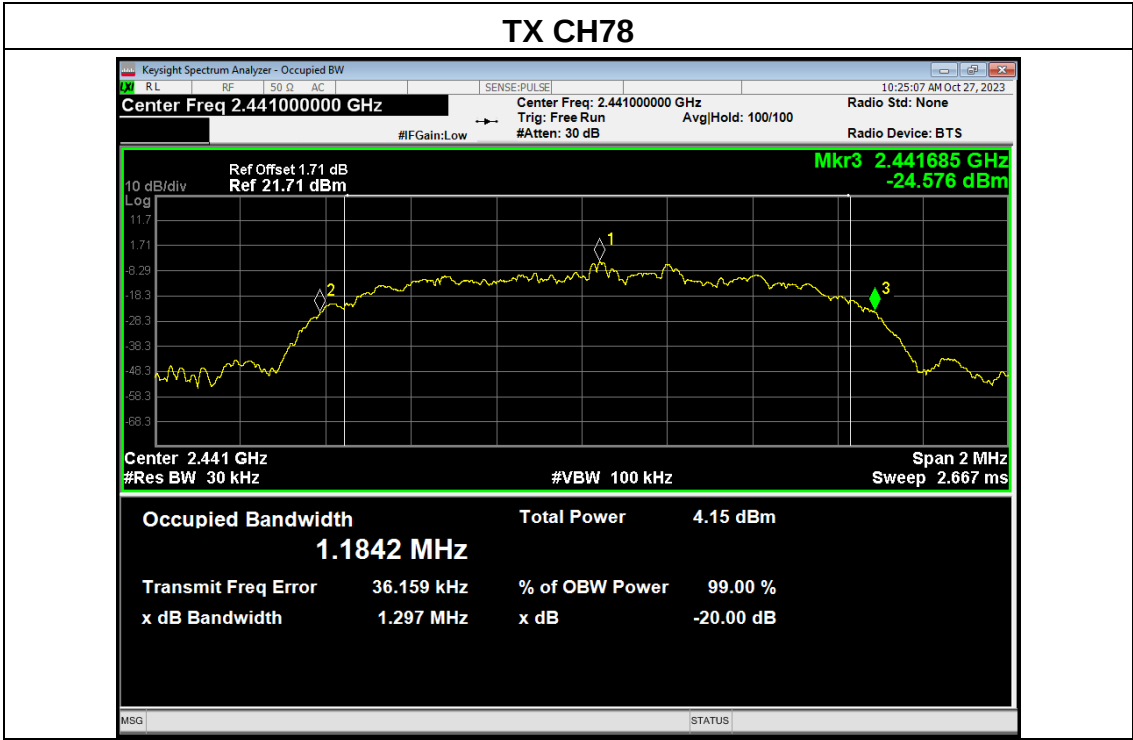

5.6 Carrier Frequency Separation


5.6.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(1)	Channel Separation	>25kHz or >two-thirds of the 20 dB bandwidth (Which is greater)	2400-2483.5

5.6.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=30 kHz, VBW=100 kHz, detector= Peak, Sweep Time =auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

5.6.3 Test Setup




5.6.4 Test Results


EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	GFSK, $\pi/4$ -DQPSK, 8DPSK /CH00, CH39, CH78		

Mode	Channel	Frequency (MHz)	Test Result (MHz)	Limit (MHz)		Result
GFSK	Low	2402	0.81	0.631	2/3 of 20dB BW	Pass
	Middle	2441	0.988	0.639	2/3 of 20dB BW	Pass
	High	2480	1.016	0.637	2/3 of 20dB BW	Pass
$\pi/4$ -DQPSK	Low	2402	1.174	0.871	2/3 of 20dB BW	Pass
	Middle	2441	1.202	0.855	2/3 of 20dB BW	Pass
	High	2480	1	0.876	2/3 of 20dB BW	Pass
8DPSK	Low	2402	1	0.869	2/3 of 20dB BW	Pass
	Middle	2441	0.986	0.865	2/3 of 20dB BW	Pass
	High	2480	1.148	0.868	2/3 of 20dB BW	Pass


Test plots

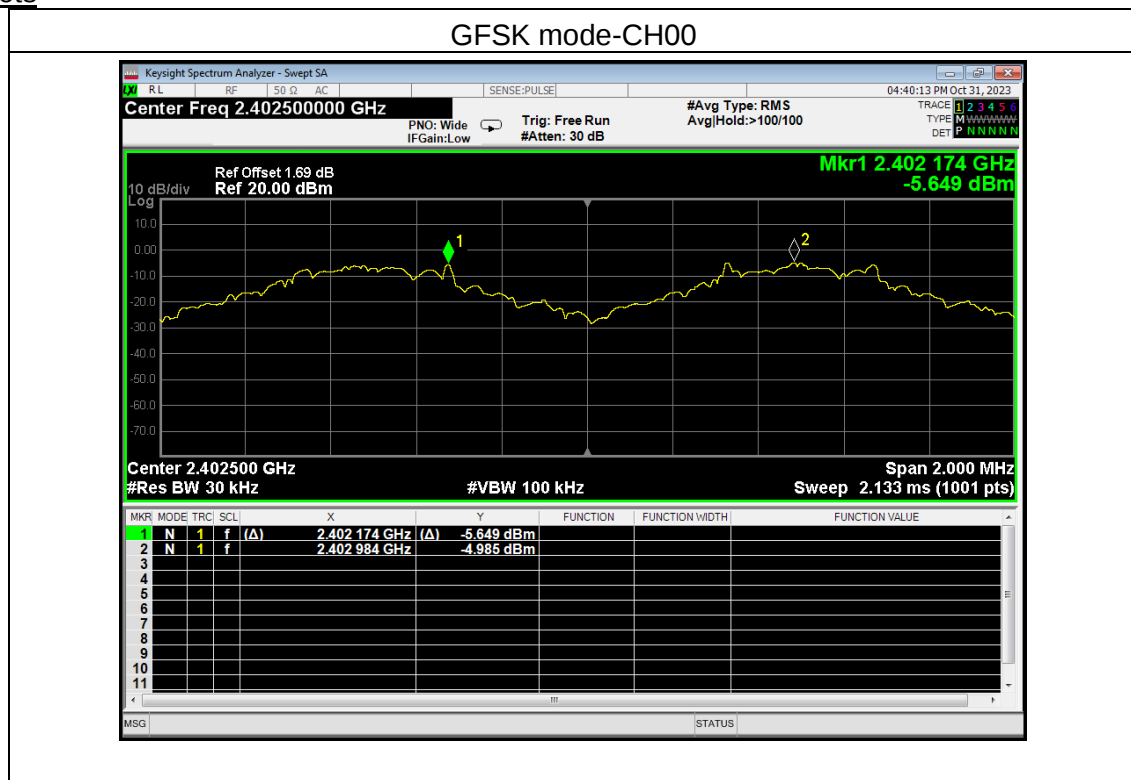


GFSK mode-CH39

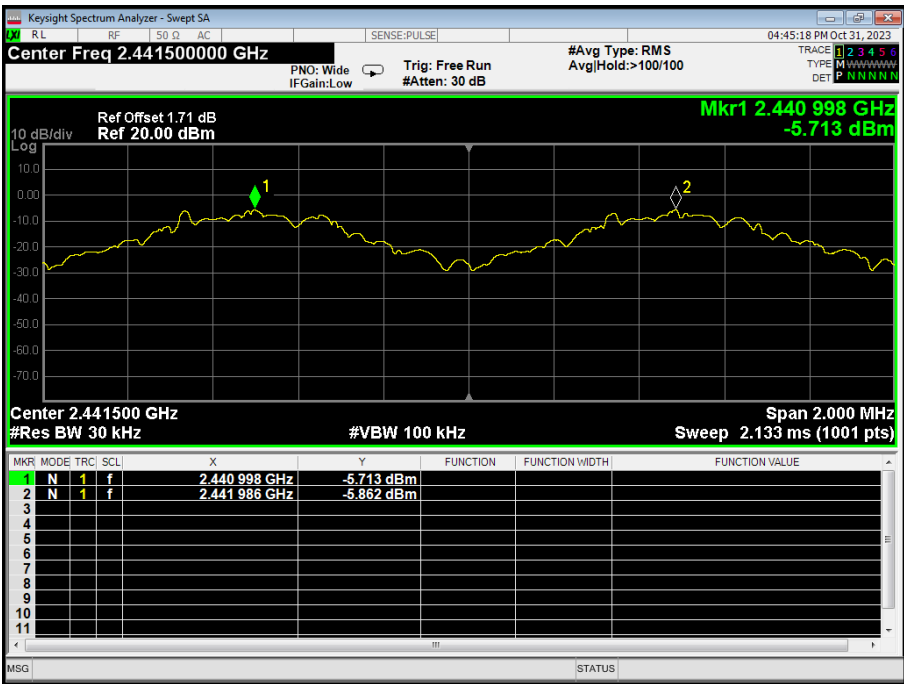


GFSK mode-CH78

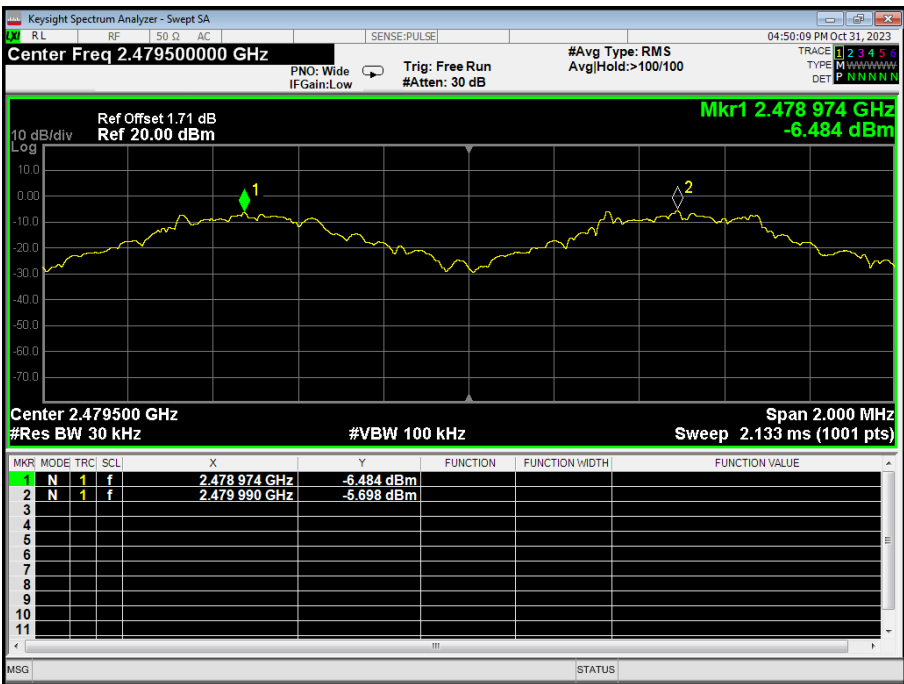


$\pi/4$ -DQPSK mode-CH00

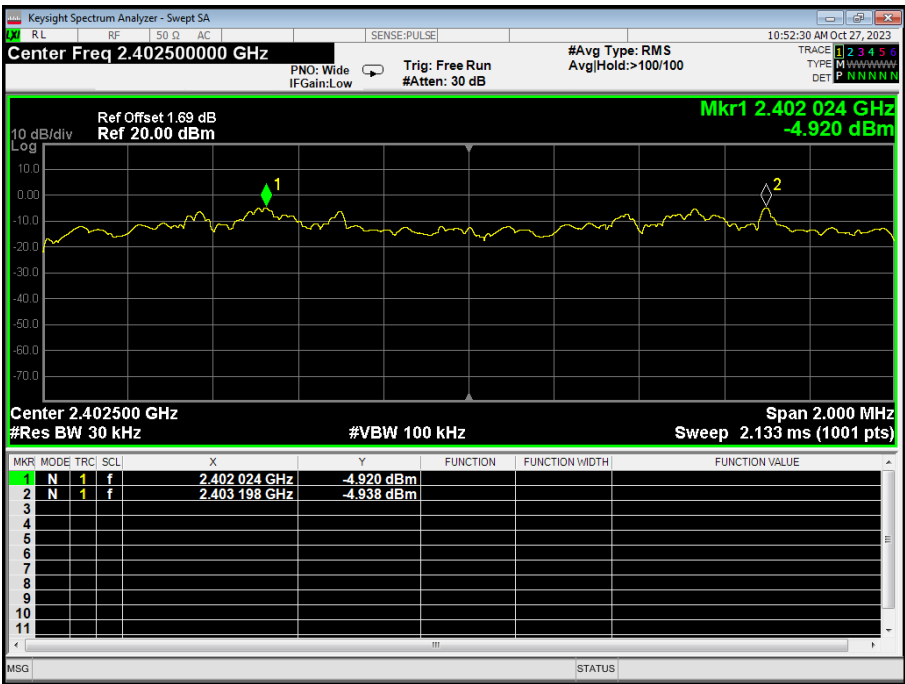


$\pi/4$ -DQPSK mode-CH39

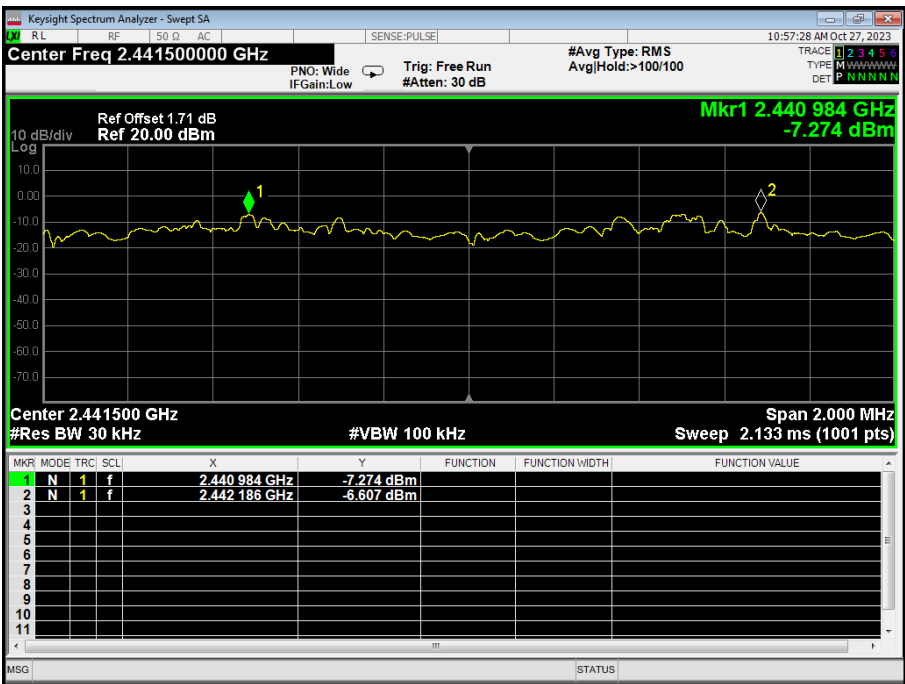


$\pi/4$ -DQPSK mode-CH78

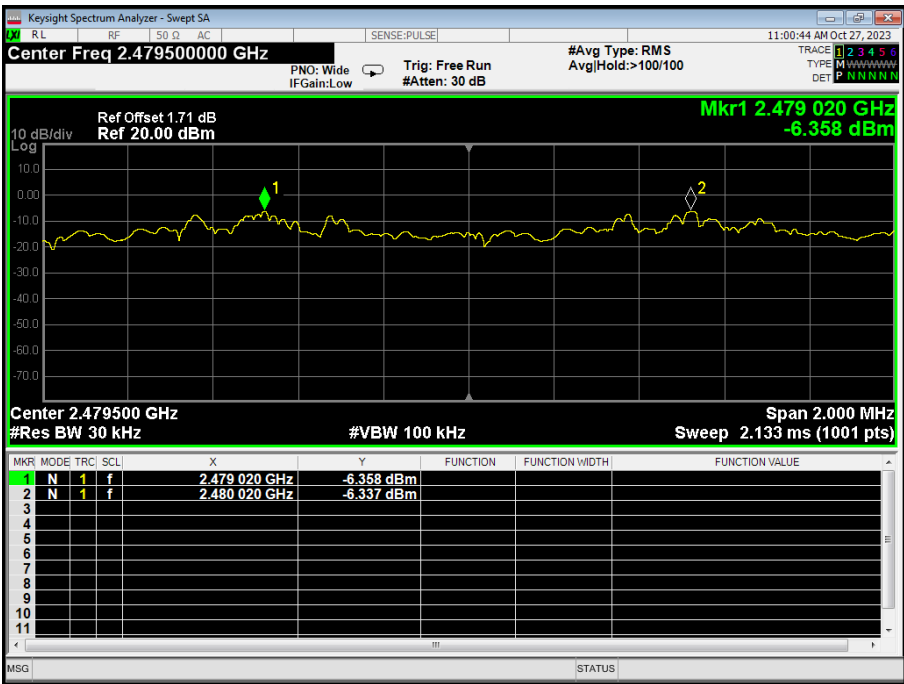


8DPSK mode-CH00

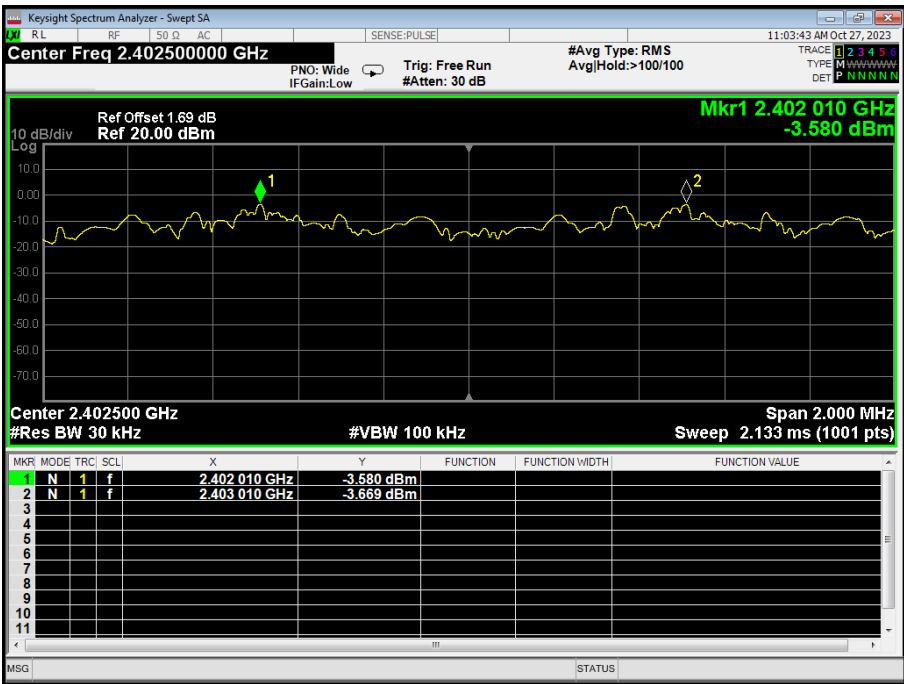

8DPSK mode-CH39

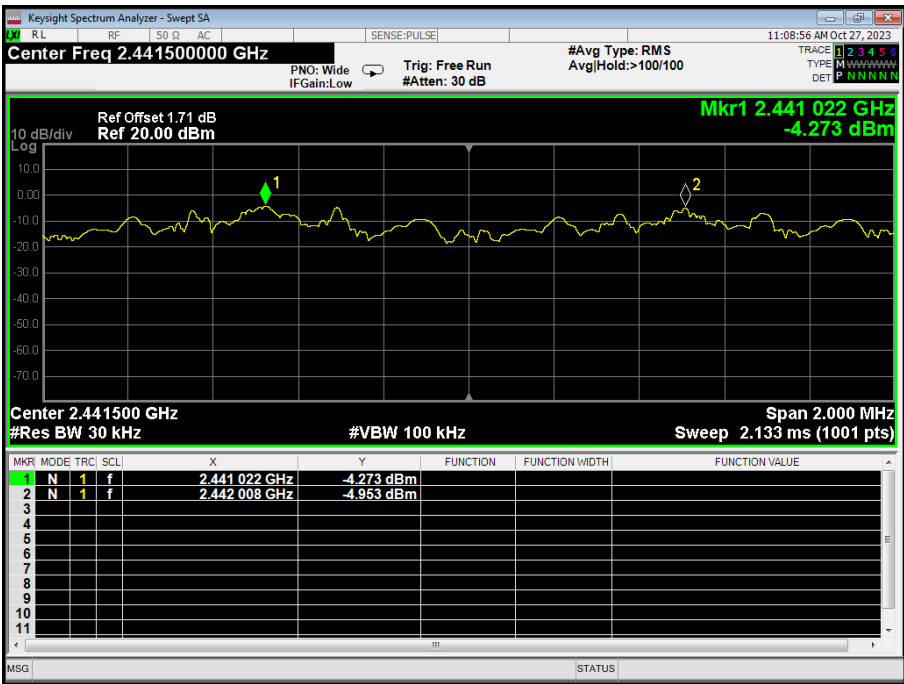

8DPSK mode-CH78

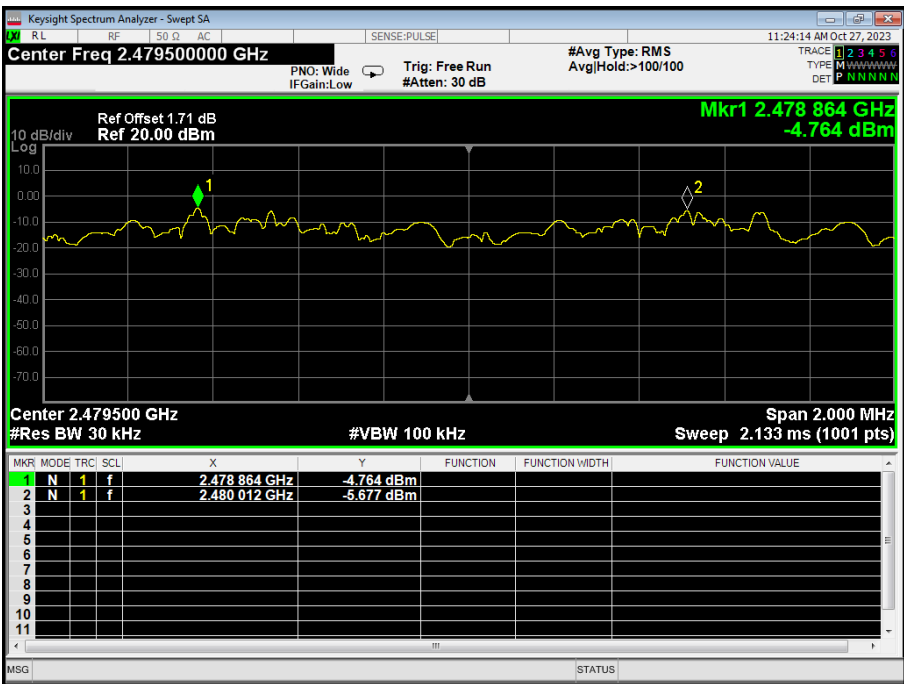

5.7 Hopping Channel Number

5.7.1 Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

5.7.2 Test Procedure

The testing follows IEEE / ANSI C63.10-2020 clause 7.8.3

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW : To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.


VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


5.7.3 Test Setup



5.7.4 Test Results

Mode	Quantity of Hopping Channel	Limit	Results
GFSK, $\pi/4$ -DQPSK, 8DPSK	79	>15	Pass

Test plots

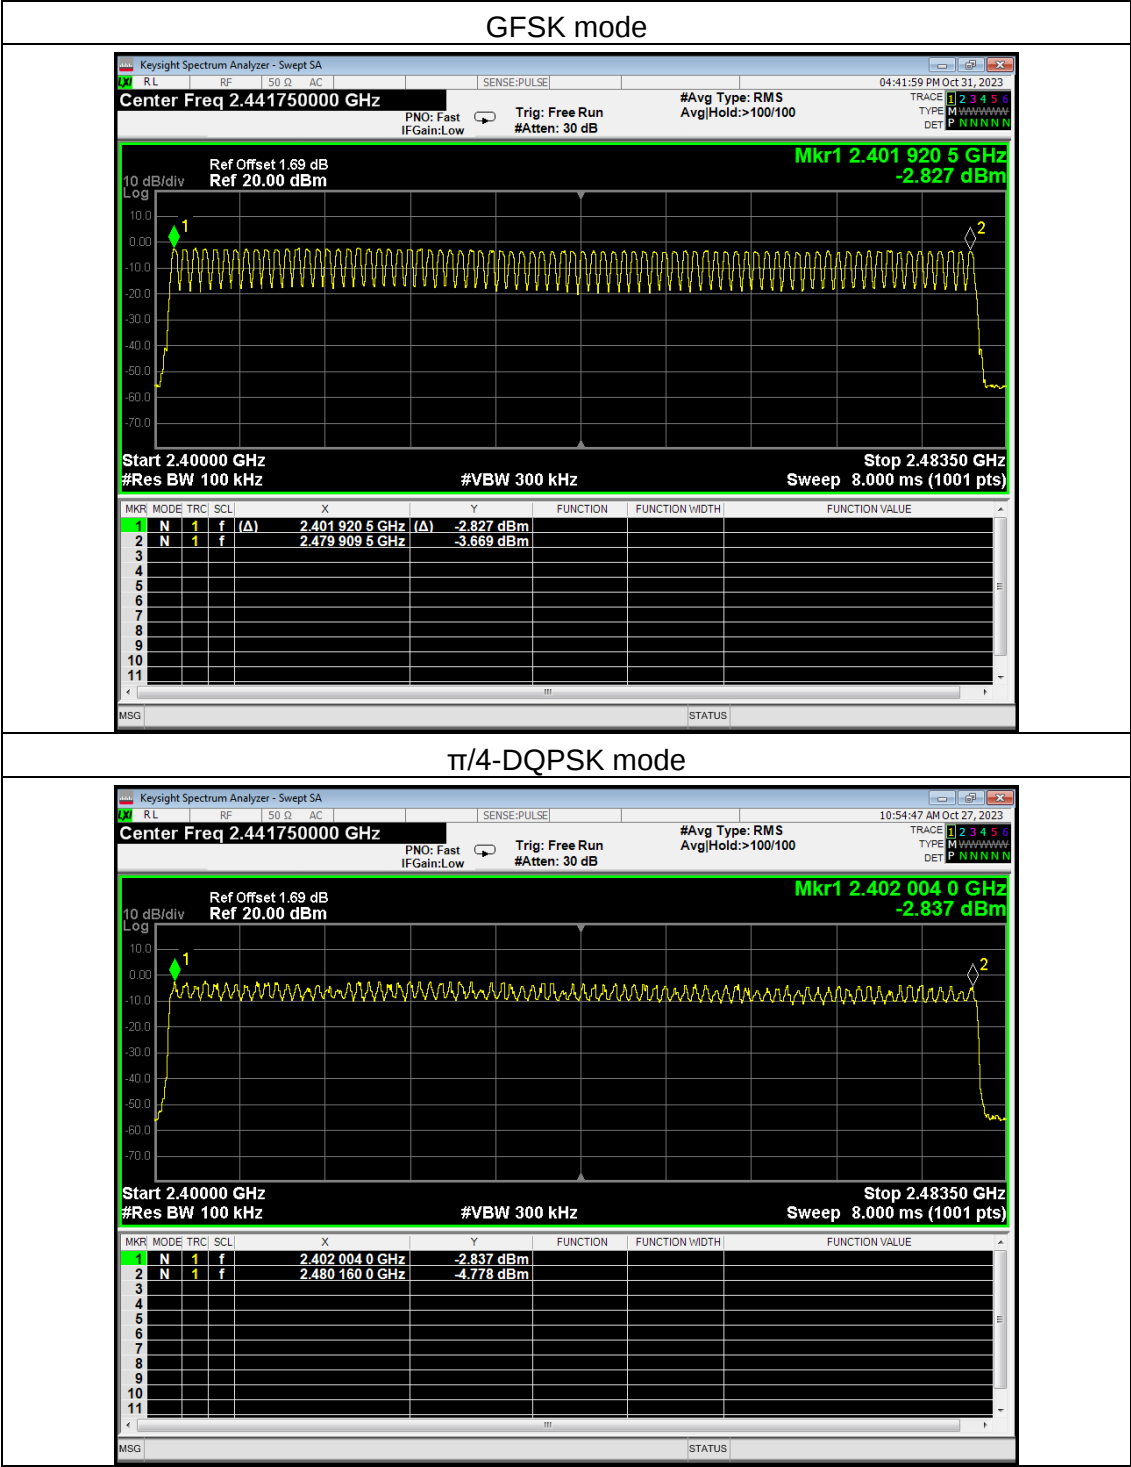

5.8 Dwell Time


5.8.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(1)	Dwell time	0.4 sec	2400-2483.5

5.8.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) The EUT was set to the Hopping Mode for Dwell Time Test.

5.8.3 Test Setup



5.8.4 Test Results

EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	GFSK, $\pi/4$ -DQPSK, 8DPSK /CH39		

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit(s)	Conclusion
GFSK	DH1	2441	0.383	122.56	<0.4	Pass
	DH3	2441	1.639	262.24	<0.4	Pass
	DH5	2441	2.887	307.95	<0.4	Pass
$\pi/4$ DQPSK	2DH1	2441	0.392	125.44	<0.4	Pass
	2DH3	2441	1.643	262.88	<0.4	Pass
	2DH5	2441	2.892	308.48	<0.4	Pass
8DPSK	3DH1	2441	0.391	125.12	<0.4	Pass
	3DH3	2441	1.642	262.72	<0.4	Pass
	3DH5	2441	2.893	308.59	<0.4	Pass

Note:

1. A period time = 0.4 (s) * 79 = 31.6(s)




2. DH1 time slot = Pulse Duration * (1600/(2*79)) * A period time

DH3 time slot = Pulse Duration * (1600/(4*79)) * A period time




DH5 time slot = Pulse Duration * (1600/(6*79)) * A period time

3. For GFSK, $\pi/4$ -DQPSK and 8DPSK: The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

Test plots

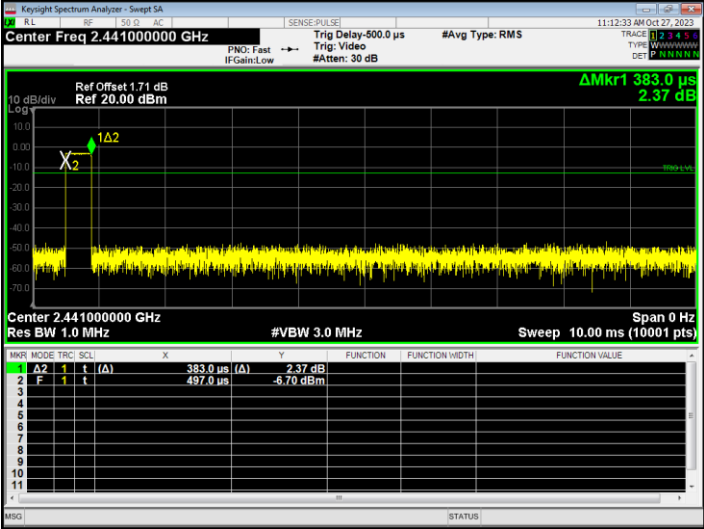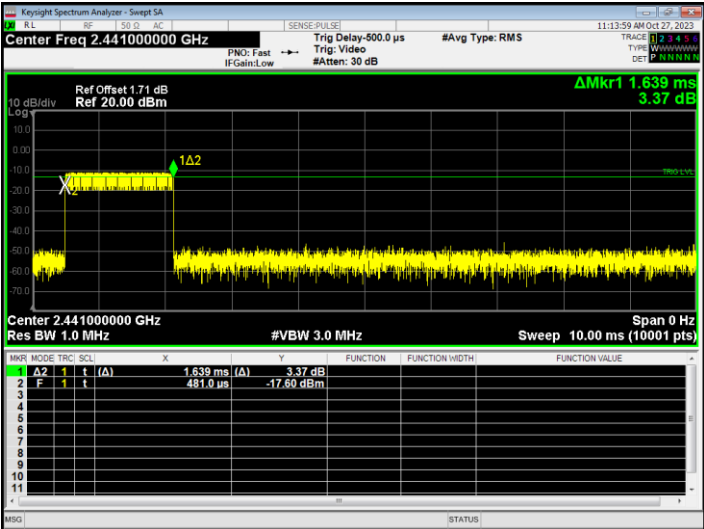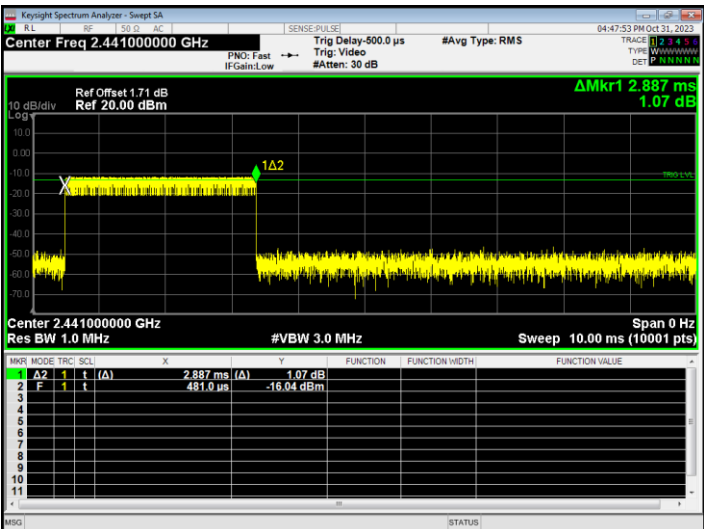Modulation mode	GFSK mode
DH1	
DH3	
DH5	

Modulation mode		$\pi/4$ -DQPSK mode																											
2-DH1	Center Freq 2.441000000 GHz Ref Offset 1.71 dB Ref 20.00 dBm ΔMkr1 392.0 μs -1.10 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>392.0 μs</td><td>(Δ)</td><td></td><td>-1.10 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>474.0 μs</td><td></td><td></td><td>-17.10 dBm</td></tr></table>		MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	392.0 μs	(Δ)		-1.10 dB	2	F	1	t	(Δ)	474.0 μs			-17.10 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	t	(Δ)	392.0 μs	(Δ)		-1.10 dB																					
2	F	1	t	(Δ)	474.0 μs			-17.10 dBm																					
2-DH3	Center Freq 2.441000000 GHz Ref Offset 1.71 dB Ref 20.00 dBm ΔMkr1 1.643 ms 2.02 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.643 ms</td><td>(Δ)</td><td></td><td>2.02 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>481.0 μs</td><td></td><td></td><td>-15.30 dBm</td></tr></table>		MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.643 ms	(Δ)		2.02 dB	2	F	1	t	(Δ)	481.0 μs			-15.30 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	t	(Δ)	1.643 ms	(Δ)		2.02 dB																					
2	F	1	t	(Δ)	481.0 μs			-15.30 dBm																					
2-DH5	Center Freq 2.441000000 GHz Ref Offset 1.71 dB Ref 20.00 dBm ΔMkr1 2.892 ms 0.53 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>2.892 ms</td><td>(Δ)</td><td></td><td>0.53 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>481.0 μs</td><td></td><td></td><td>-17.00 dBm</td></tr></table>		MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.892 ms	(Δ)		0.53 dB	2	F	1	t	(Δ)	481.0 μs			-17.00 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	t	(Δ)	2.892 ms	(Δ)		0.53 dB																					
2	F	1	t	(Δ)	481.0 μs			-17.00 dBm																					

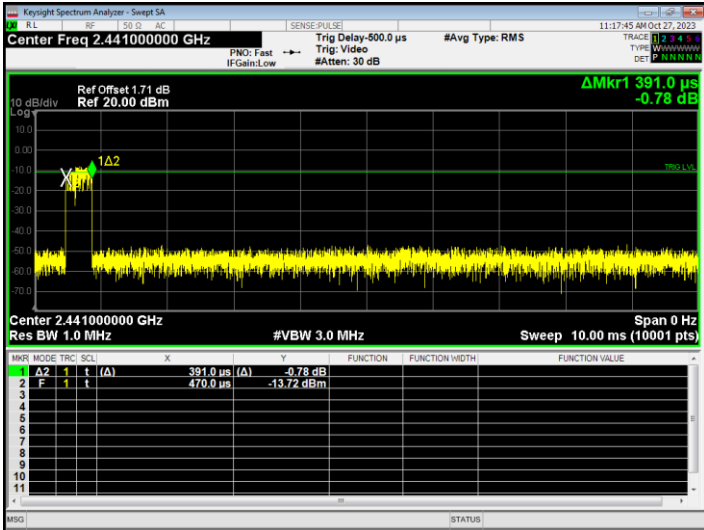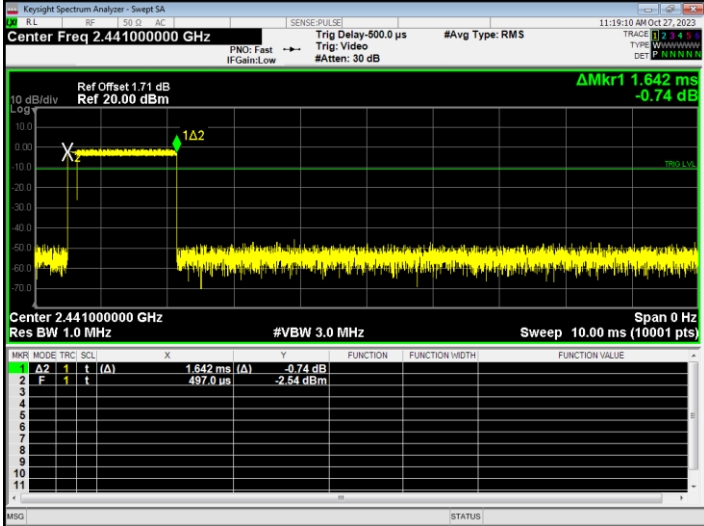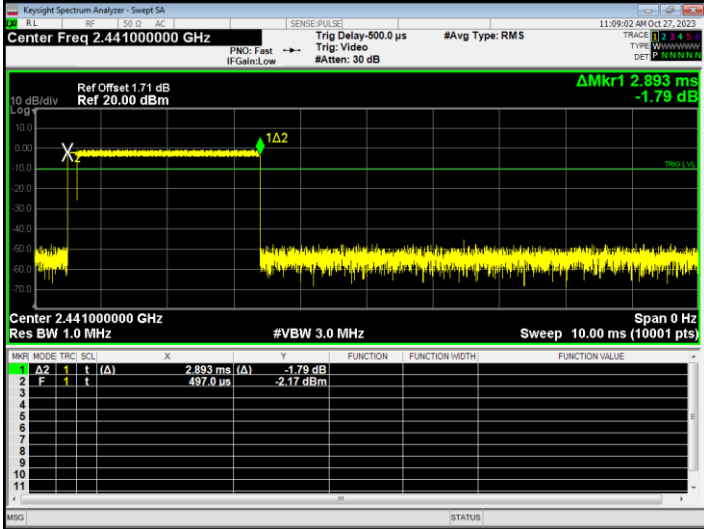Modulation mode		8DPSK mode																												
3-DH1	 Key parameters for 3-DH1: - Center Freq: 2.441000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (10001 pts) - Ref Offset: 1.71 dB - Ref: 20.00 dBm - ΔMkr1: 391.0 μs -0.78 dB <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>391.0 μs</td><td>(Δ)</td><td></td><td>-0.78 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>470.0 μs</td><td>(Δ)</td><td></td><td>-13.72 dBm</td></tr></table>			MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	391.0 μs	(Δ)		-0.78 dB	2	F	1	t	(Δ)	470.0 μs	(Δ)		-13.72 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																						
1	Δ2	1	t	(Δ)	391.0 μs	(Δ)		-0.78 dB																						
2	F	1	t	(Δ)	470.0 μs	(Δ)		-13.72 dBm																						
3-DH3	 Key parameters for 3-DH3: - Center Freq: 2.441000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (10001 pts) - Ref Offset: 1.71 dB - Ref: 20.00 dBm - ΔMkr1: 1.642 ms -0.74 dB <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.642 ms</td><td>(Δ)</td><td></td><td>-0.74 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>497.0 μs</td><td>(Δ)</td><td></td><td>-2.54 dBm</td></tr></table>			MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	1.642 ms	(Δ)		-0.74 dB	2	F	1	t	(Δ)	497.0 μs	(Δ)		-2.54 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																						
1	Δ2	1	t	(Δ)	1.642 ms	(Δ)		-0.74 dB																						
2	F	1	t	(Δ)	497.0 μs	(Δ)		-2.54 dBm																						
3-DH5	 Key parameters for 3-DH5: - Center Freq: 2.441000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (10001 pts) - Ref Offset: 1.71 dB - Ref: 20.00 dBm - ΔMkr1: 2.893 ms -1.79 dB <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>2.893 ms</td><td>(Δ)</td><td></td><td>-1.79 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>497.0 μs</td><td>(Δ)</td><td></td><td>-2.17 dBm</td></tr></table>			MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	2.893 ms	(Δ)		-1.79 dB	2	F	1	t	(Δ)	497.0 μs	(Δ)		-2.17 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																						
1	Δ2	1	t	(Δ)	2.893 ms	(Δ)		-1.79 dB																						
2	F	1	t	(Δ)	497.0 μs	(Δ)		-2.17 dBm																						

5.9 Conducted Band Edge


5.9.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.9.2 Test Procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

5.9.3 Test Setup




5.9.4 Test Results


EUT:	SnowTune Wireless Bluetooth Earpiece	Model Name:	SnowTune R
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery

Test plots


GFSK: Band Edge, Left Side(Non-hopping)

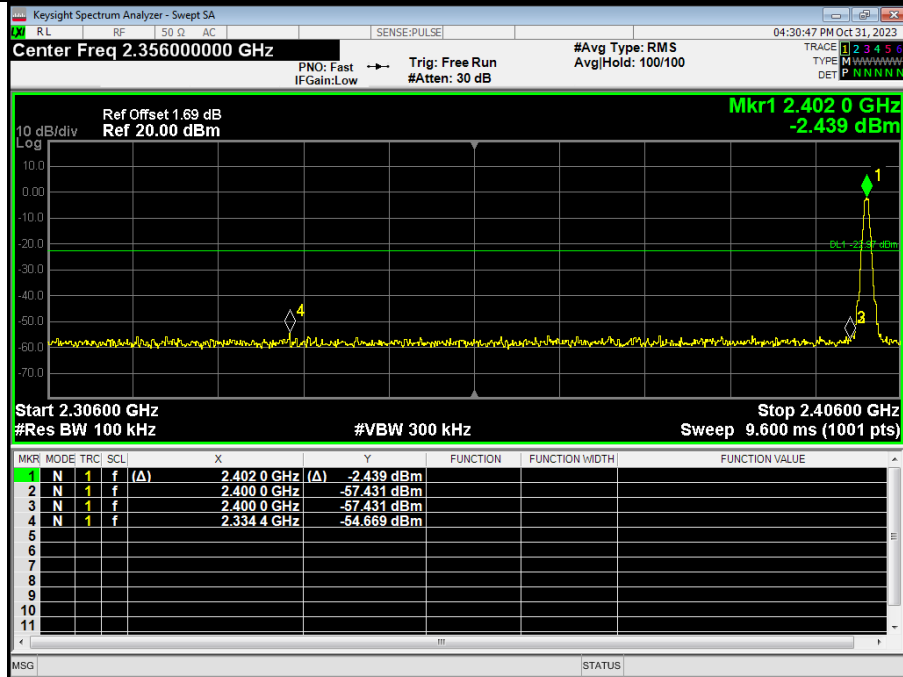


GFSK: Band Edge, Right Side(Non-hopping)

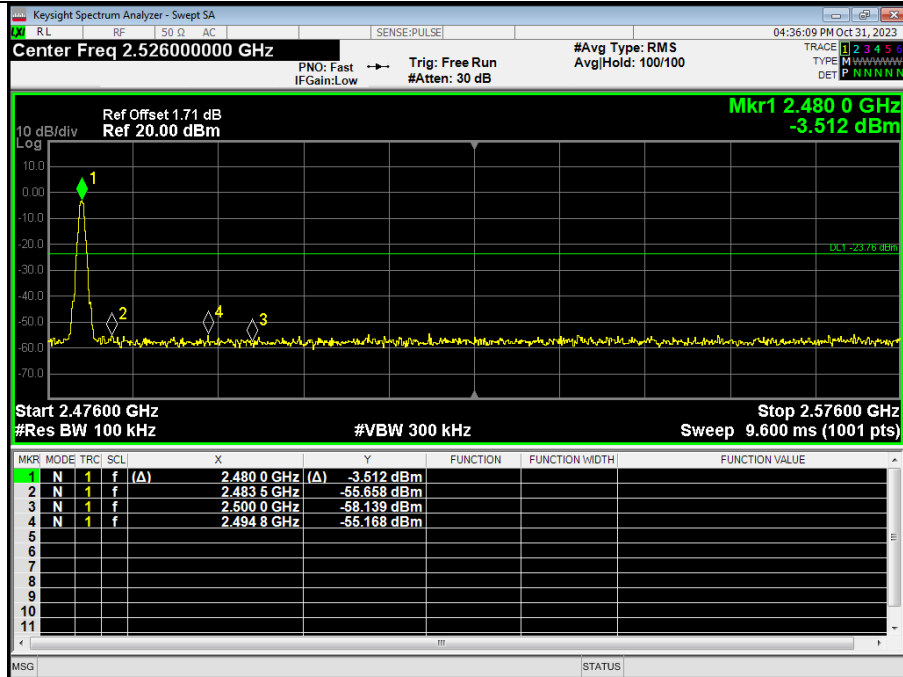


GFSK: Band Edge, Left Side(Hopping)

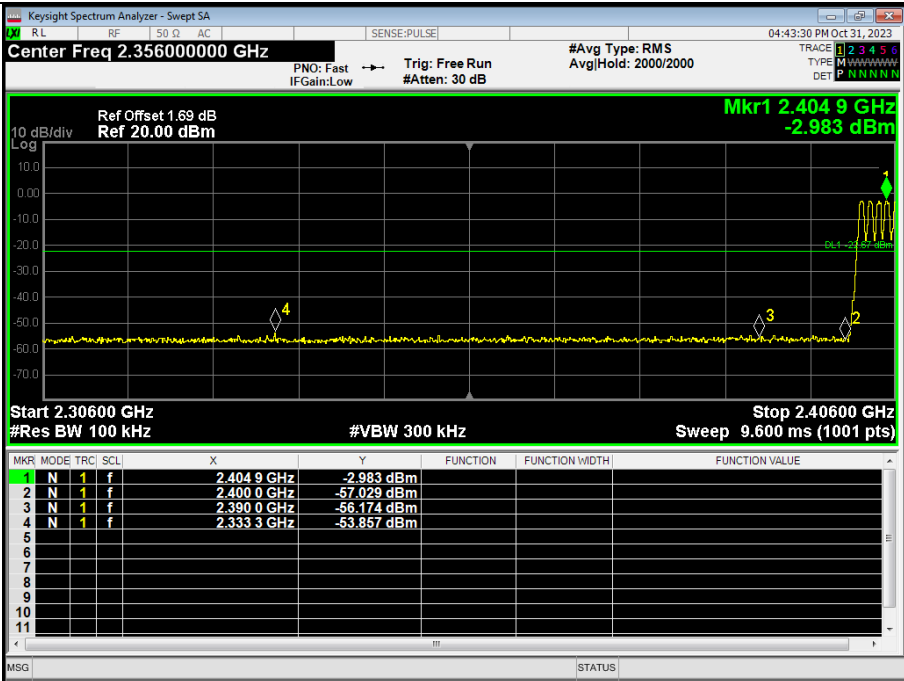


GFSK: Band Edge, Right Side(Hopping)

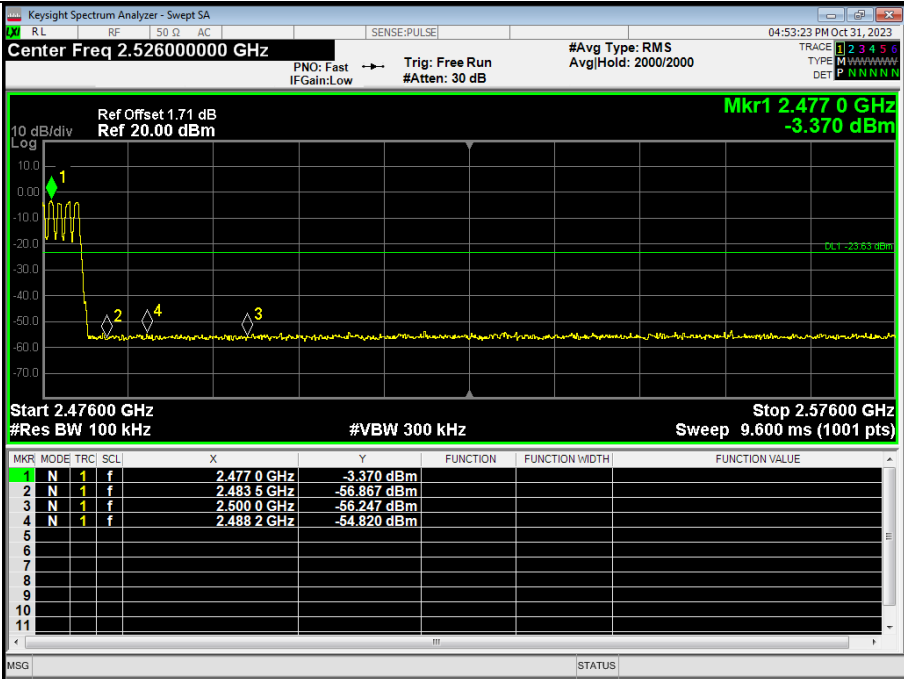


$\pi/4$ -DQPSK: Band Edge, Left Side(Non-hopping)

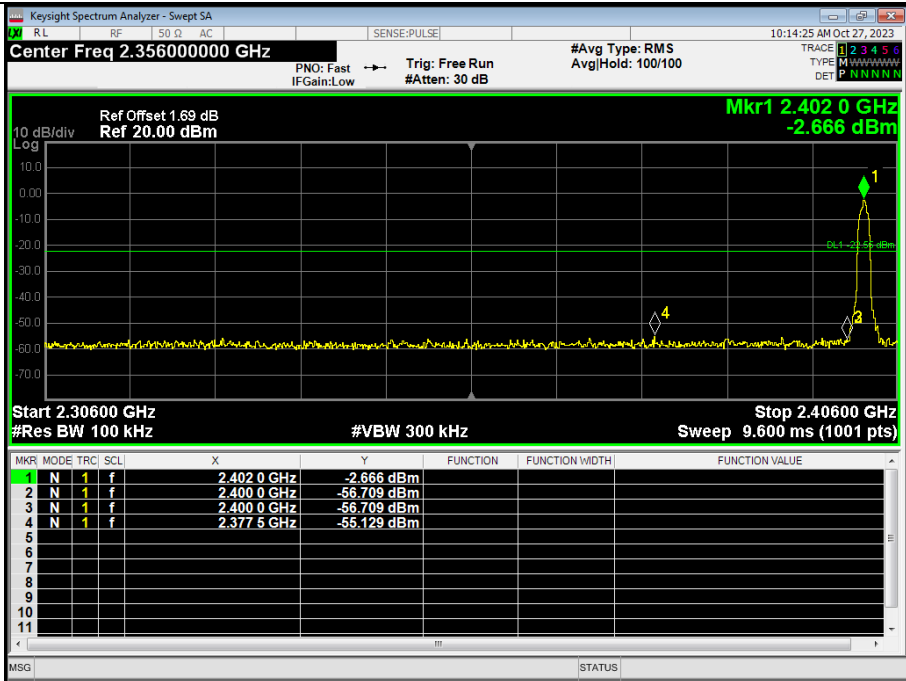


$\pi/4$ -DQPSK: Band Edge, Right Side(Non-hopping)

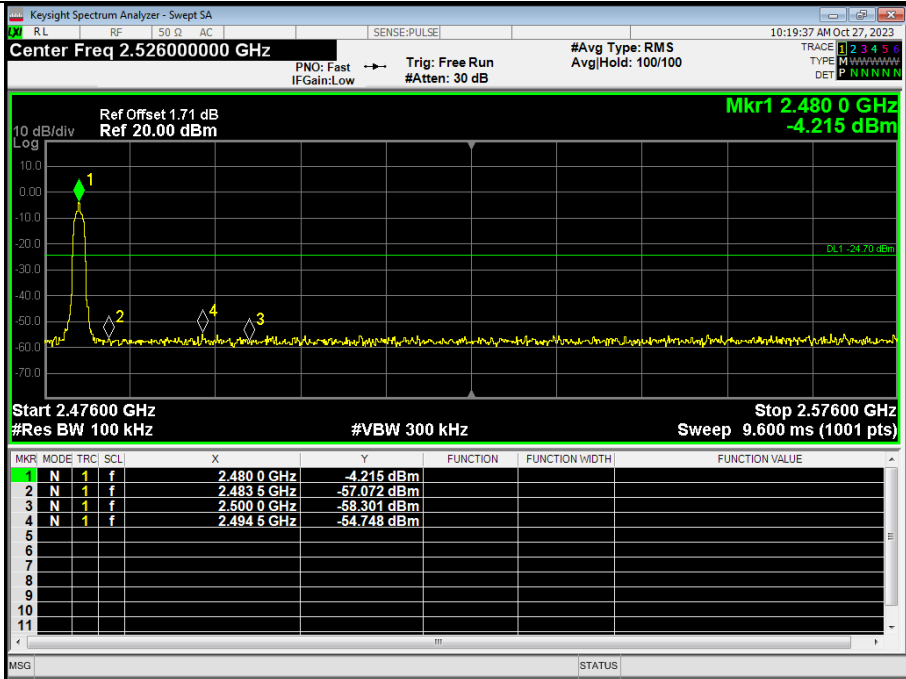


$\pi/4$ -DQPSK: Band Edge, Left Side(Hopping)

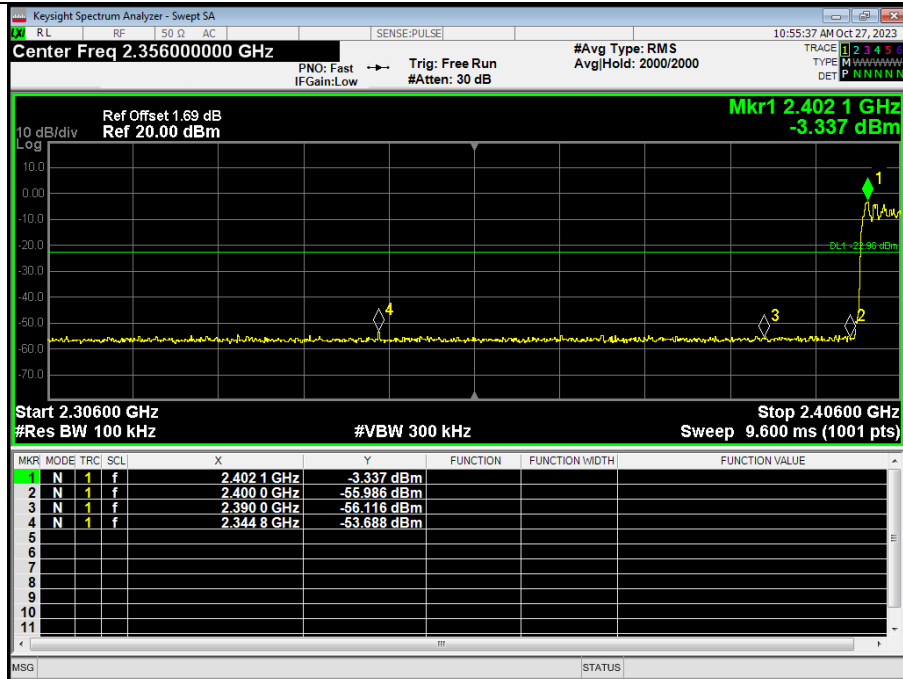


$\pi/4$ -DQPSK: Band Edge, Right Side(Hopping)

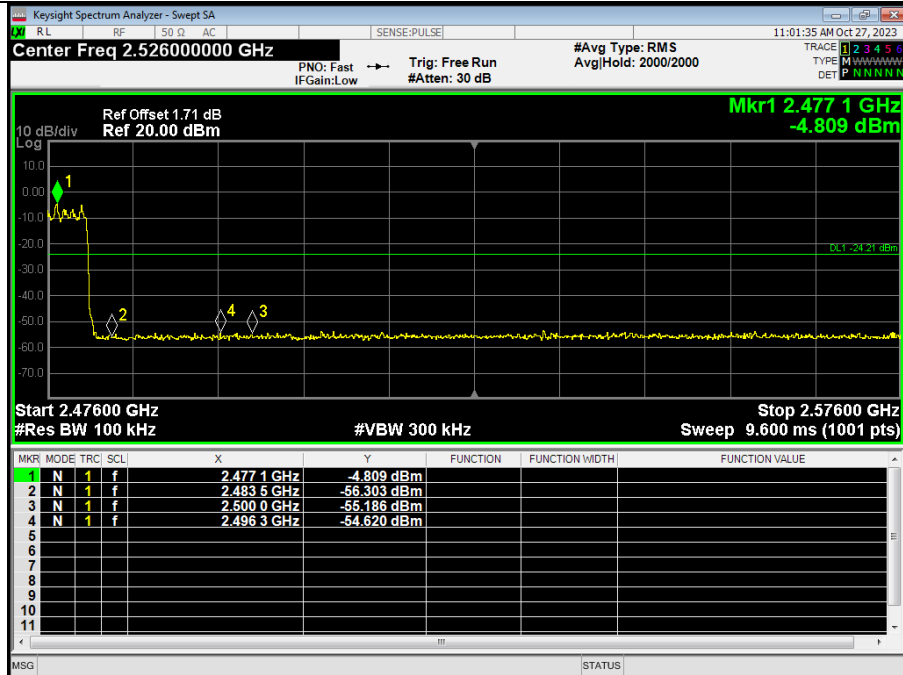


8DPSK: Band Edge, Left Side(Non-hopping)

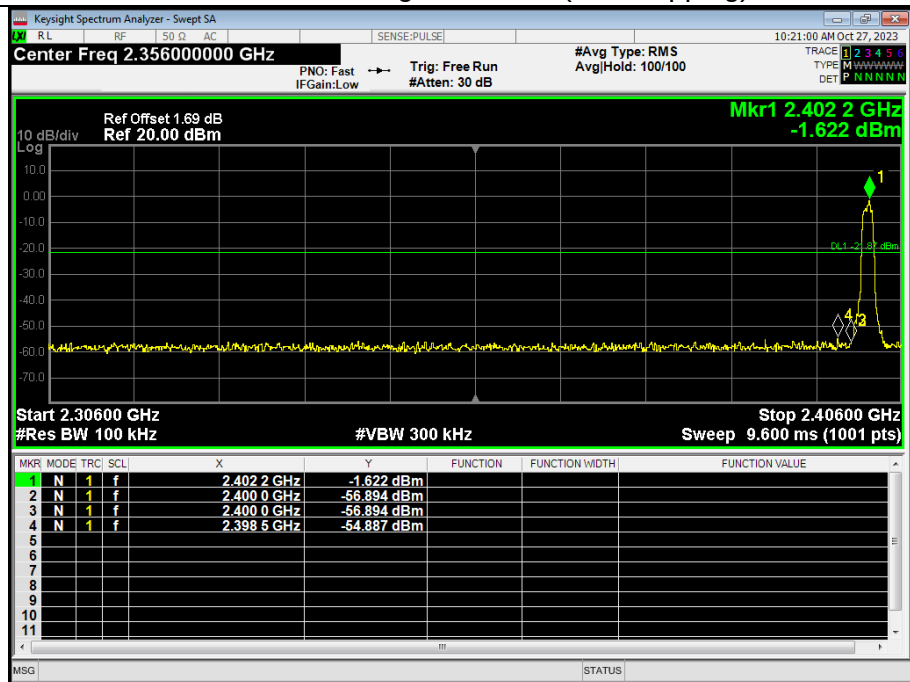


8DPSK: Band Edge, Right Side(Non-hopping)

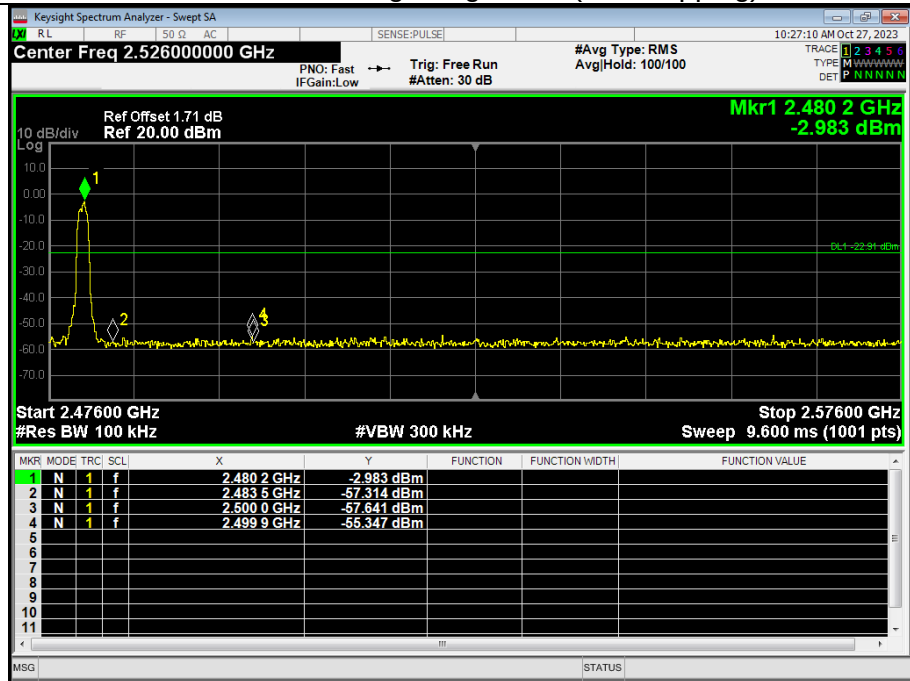

8DPSK: Band Edge, Left Side(Hopping)

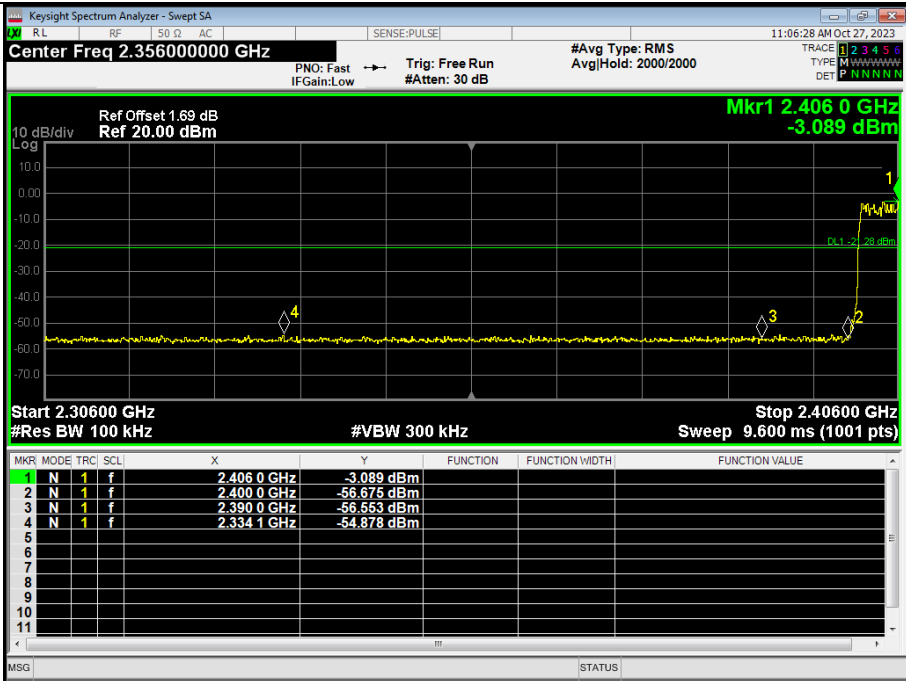

8DPSK: Band Edge, Right Side(Hopping)

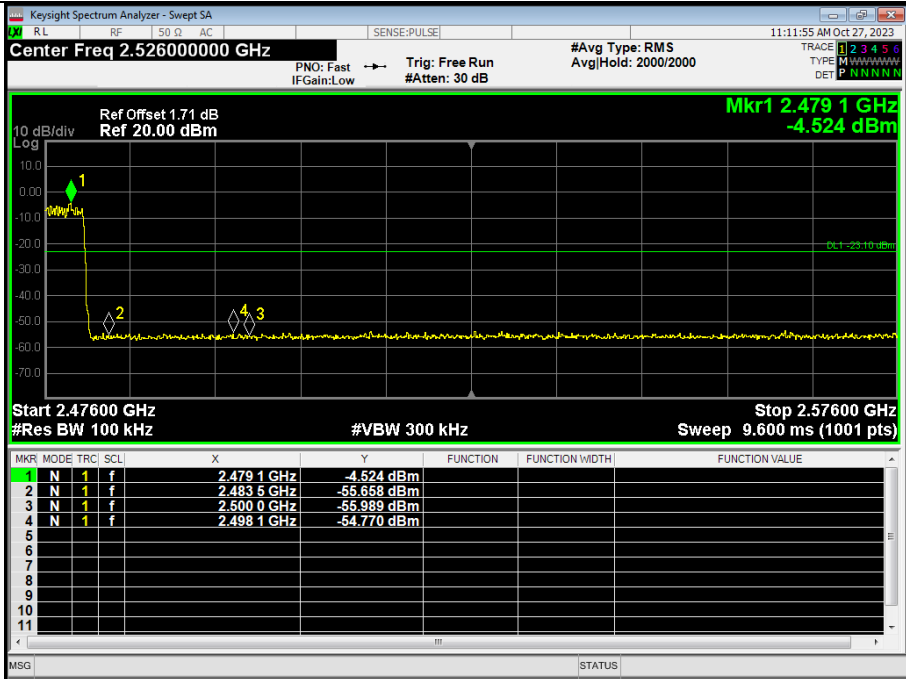

5.10 Spurious RF Conducted Emissions


5.10.1 Limit

Below -20dB of the highest emission level in operating band.

5.10.2 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW=300kHz to measure the peak field strength, and measure frequency range from 9kHz to 26.5GHz.

5.10.3 Test Setup




5.10.4 Test Results


Note:

1: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


GFSK on Channel 00

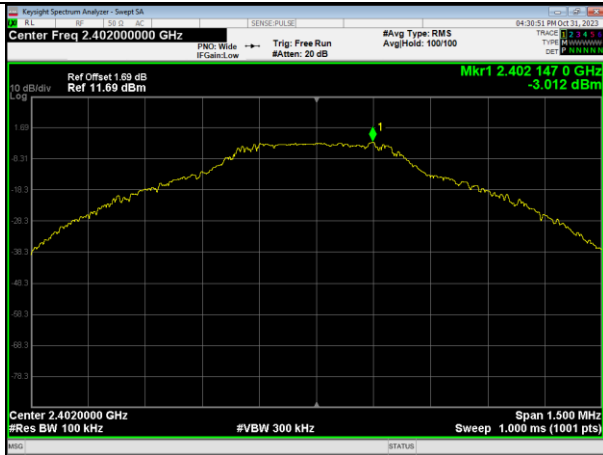


GFSK on Channel 00

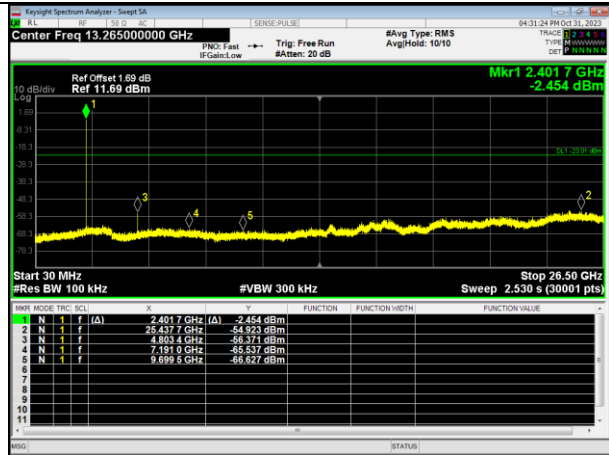


GFSK on Channel 39

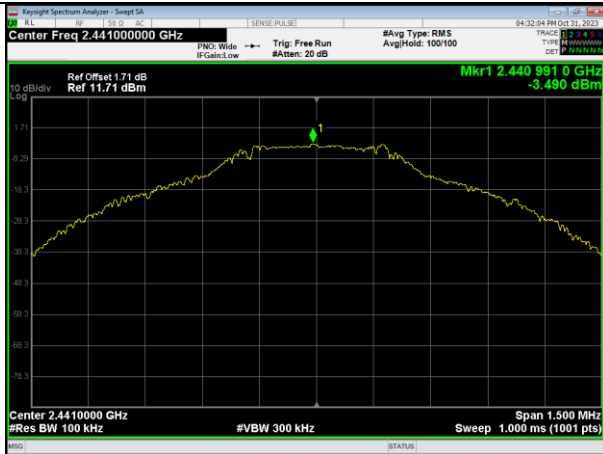


GFSK on Channel 39

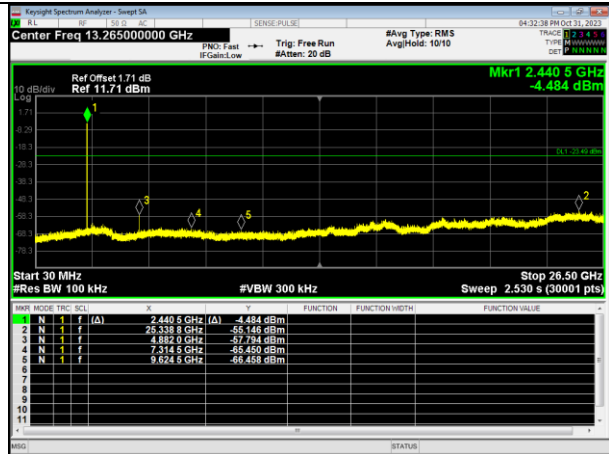

GFSK on Channel 78

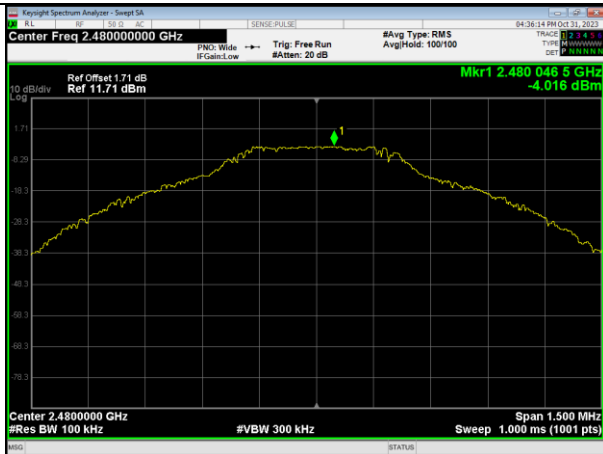


GFSK on Channel 78

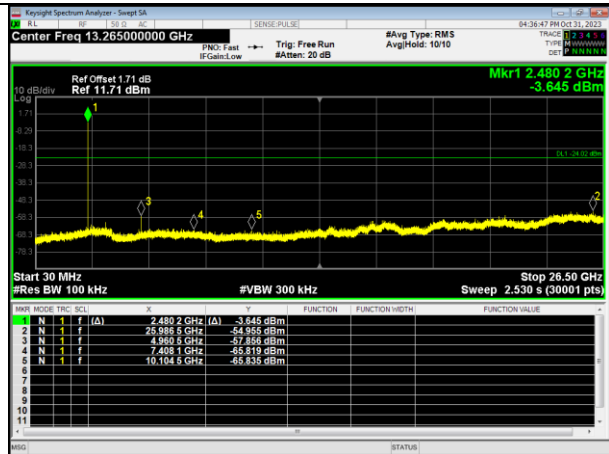


$\pi/4$ -DQPSK on Channel 00




$\pi/4$ -DQPSK on Channel 00

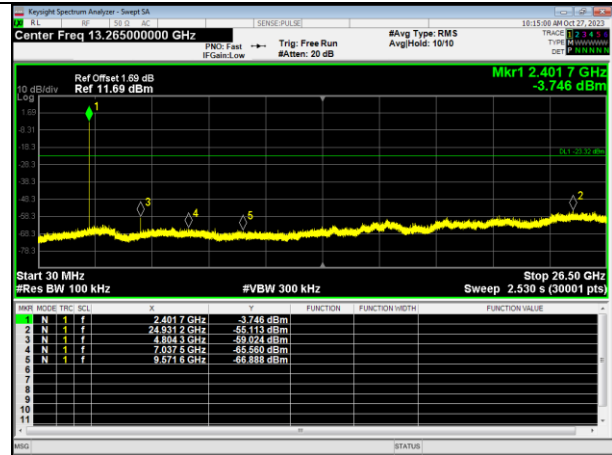


$\pi/4$ -DQPSK on Channel 39

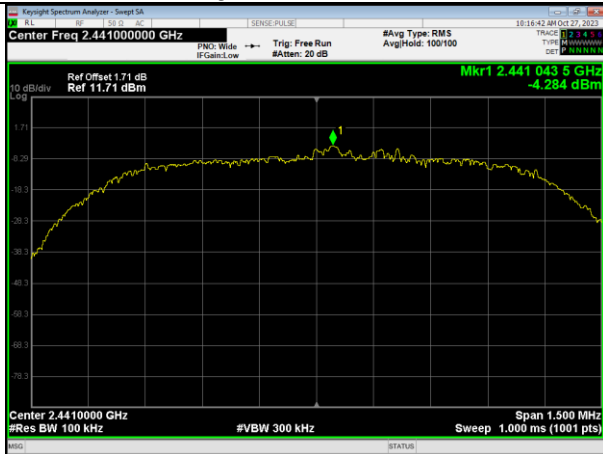


$\pi/4$ -DQPSK on Channel 39

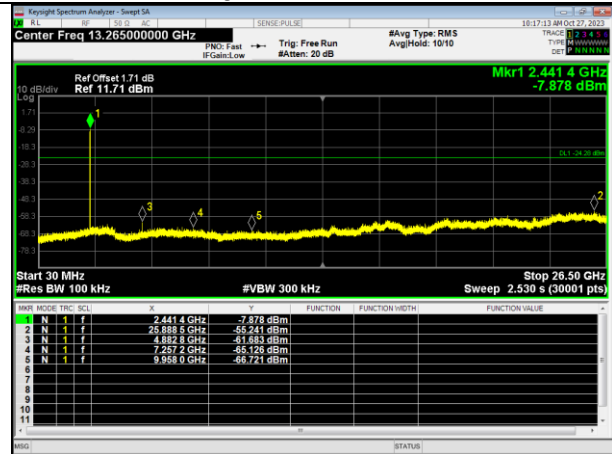


$\pi/4$ -DQPSK on Channel 78

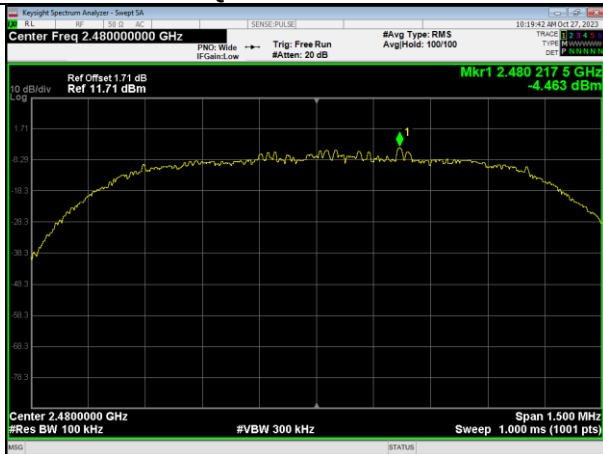


$\pi/4$ -DQPSK on Channel 78

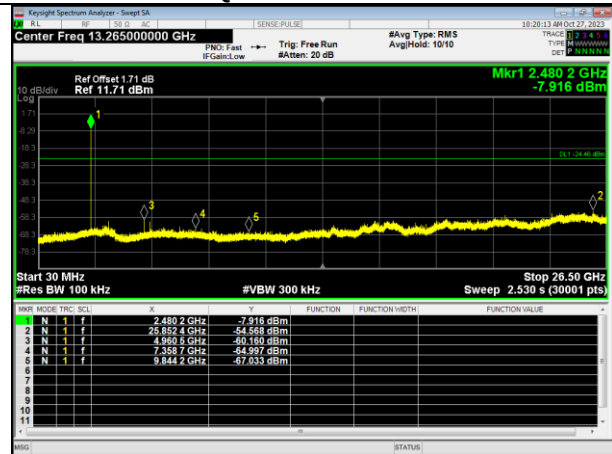


8DPSK on Channel 00

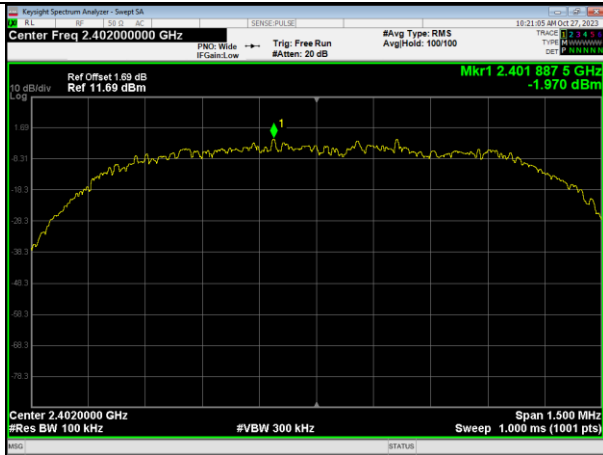


8DPSK on Channel 00

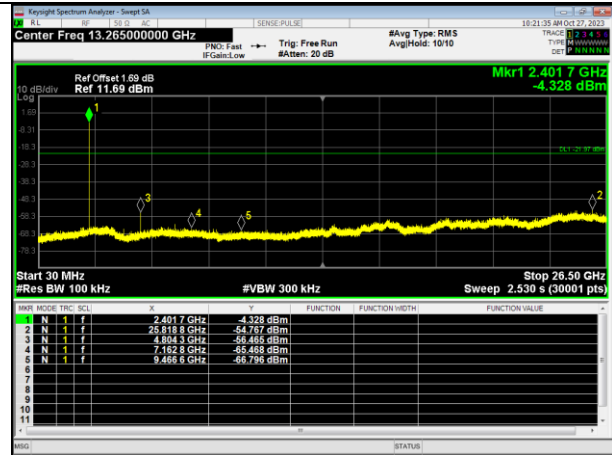


8DPSK on Channel 39

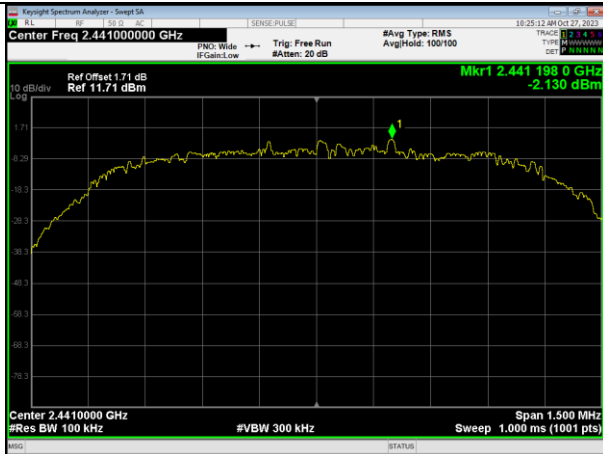


8DPSK on Channel 39

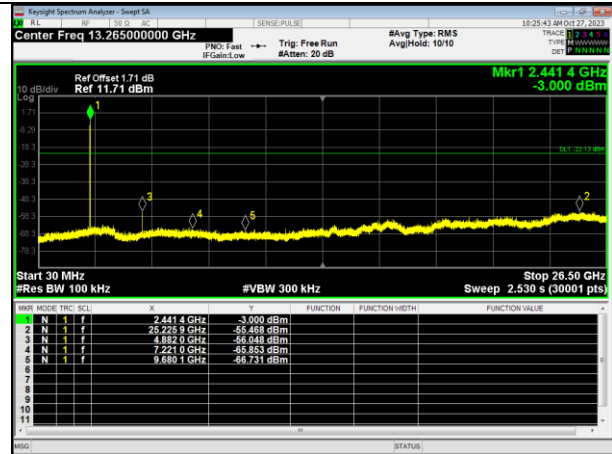

8DPSK on Channel 78

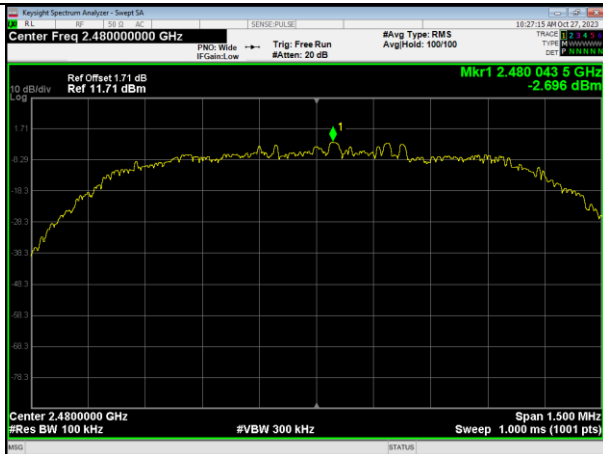

8DPSK on Channel 78

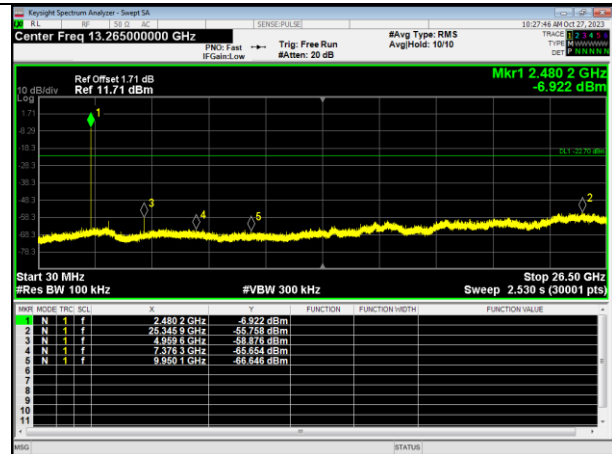

6 Photographs of the Test Setup

Reference to the appendix Test Setup Photos for details.

7 Photographs of the EUT

Reference to the appendix External Photos and Internal Photos for details.

******* END OF REPORT *******