


Electromagnetic Compatibility (EMC) test report for **RM-1**

Report Date: September 1, 2004

Signatures:

Tested by:



Marko Turkkila

Testing Engineer

Contents approved:



Tomi Nyberg

Laboratory Manager

CONTENTS

1	LABORATORY INFORMATION	3
2	CUSTOMER INFORMATION	3
3	SUMMARY OF TEST RESULTS	4
4	EUT INFORMATION	4
4.1	EUT description	4
5	EUT TEST SETUPS	5
6	APPLICABLE STANDARDS	5
7	CONDUCTED EMISSIONS TO AC-MAINS	6
7.1	Test setup	6
7.2	EUT operation mode	6
7.3	Limits	6
7.4	Results	7
7.5	Screen shots	9
8	RADIATED EMISSION	10
8.1	Test setup	10
8.2	Test method	11
8.3	EUT operation mode	11
8.4	Limit	11
8.5	Results	12
9	TEST EQUIPMENT	14
9.1	Radiated measurements	14
10	TEST SETUP PHOTOGRAPHS	15

1 LABORATORY INFORMATION

Test Laboratory	NATLABS OY EMC Laboratory Koneenkatu 12 / K17 05830 Hyvinkää FINLAND Tel: +358 20 475 2600 Fax: +358 20 475 2719 e-mail: firstname.surname@ette.com
FCC registration number: IC file number:	910391 (January 27, 2003) IC 4616 (May 14, 2003)

2 CUSTOMER INFORMATION

Client	Nokia Corporation Keilalahdentie 2-4 02150 Espoo P.O. Box 226 00045 NOKIA GROUP Tel: 07180 08000
Contact person:	Tero Huhtala Nokia Corporation P.O. Box 68 FIN -33721 TAMPERE FINLAND Tel: +358 7180 08000 Fax: +358 7180 44123
Receipt of EUT:	August 30, 2004
Testing date:	August 30 – September 01, 2004
Report date:	September 01, 2004

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 15 and IC standard RS133 and ICES-003.

3 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in ICES-003	RSS 133	Test	Result
§15.107	5.3		Conducted emissions to AC-mains	PASS
§15.109	5.5	9	Radiated emissions	PASS

PASS Pass
 FAIL Fail
 X Measured, but there is no applicable performance criteria
 - Not done

4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Device	Type	S/N	EUT number
EUT	GSM 1900 phone	RM-1	004400/271747/55/0	07701
Accessories	Charger	ACP-12U		07702
	USB cable	DKU-2	JK42083821	07703
	Laptop PC	DELL; PP01L		07704
	Laptop PC power	DELL	AA20031	07705
	Serial mouse	Logitech; M-CQ38	LZB83902452	07706
	Printer	HP Deskjet 890C	SG7811908Z	07707

Notes:

4.1 EUT description

EUT is a GSM 900, GSM 1800 and GSM 1900 mobile phone with WCDMA and BT functions.

The EUT was not modified during the tests.

5 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

The test setup photographs are in the document referenced in section 10.

6 APPLICABLE STANDARDS

The tests were performed in guidance of CFR 47 part 15, ANSI C63.4-2003 and ICES-003.

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.


7 CONDUCTED EMISSIONS TO AC-MAINS

EUT	07701		
Accessories	07702, 07703, 07704, 07705, 07706, 07707		
Temp, Humidity, Air Pressure	24 °C	69 RH%	1011 hPa
Date of measurement	August 31, 2004		
FCC rule part	§15.107		
ICES-003 section	5.3		
Measured by	Marko Turkkila		

7.1 Test setup

The BS simulator was used to provide the common control and broadcasting channel to the EUT to keep the EUT receiver on.

EUT charger was connected to line impedance stabilization network and conducted emissions to AC-mains were measured using measurement receiver.

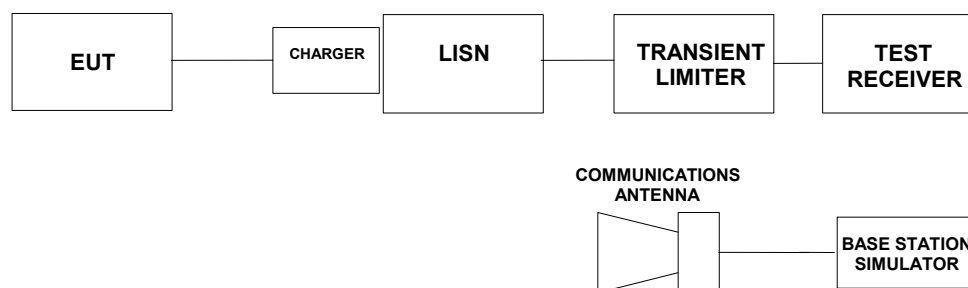

Picture 1: Test setup for measurement of conducted emissions to AC-mains

7.2 EUT operation mode

EUT was set in idle mode so, that EUT receiver and other functions except the transmitter are on. EUT was connected to a charger.

7.3 Limits

Frequency of emission [MHz]	Limit [dBμV] Quasi peak	Limit [dBμV] Average
0,15 – 0,50	66 – 56*	56 – 46*
0,50 – 5	56	46
5 - 30	60	50

* The limit decreases linearly with the logarithm of the frequency

7.4 Results

The measured interference values using peak and average detectors are shown in the pictures 2 and 3 below.

All signals closer than 6 dB to the limit have been measured using Quasi peak and Average detector are reported in the tables 1 to 4.

Table 1: AC-mains conducted RF output power Quasi-peak measurement results, AC line

Frequency	Measured value [dB μ V]	Limit [dB μ V]	Margin to limit [dB]
0.33	34.4	59.6	25.2
1.06	32.1	56.0	23.9
3.32	29.6	56.0	26.4
26.71	39.2	60.0	20.8

Table 2: AC-mains conducted RF output power Average measurement results, AC line

Frequency	Measured value [dB μ V]	Limit [dB μ V]	Margin to limit [dB]
0.33	24.3	49.6	25.3
1.06	22.9	46.0	23.1
3.32	22.3	46.0	23.7
26.71	31.0	50.0	19.0


Table 3: AC-mains conducted RF output power Quasi-peak measurement results, AC neutral

Frequency	Measured value [dBμV]	Limit [dBμV]	Margin to limit [dB]
0.49	28.5	56.2	27.7
1.4	24.5	56.0	31.5
3.15	31.8	56.0	24.2
10.06	36.1	60.0	23.9
27.10	43.1	60.0	16.9


Table 4: AC-mains conducted RF output power Average measurement results, AC neutral

Frequency	Measured value [dBμV]	Limit [dBμV]	Margin to limit [dB]
0.49	22.0	46.2	24.2
1.4	20.2	46.0	25.8
3.15	22.2	46.0	23.8
10.06	27.4	50.0	22.6
27.10	35.3	50.0	14.7

7.5 Screen shots

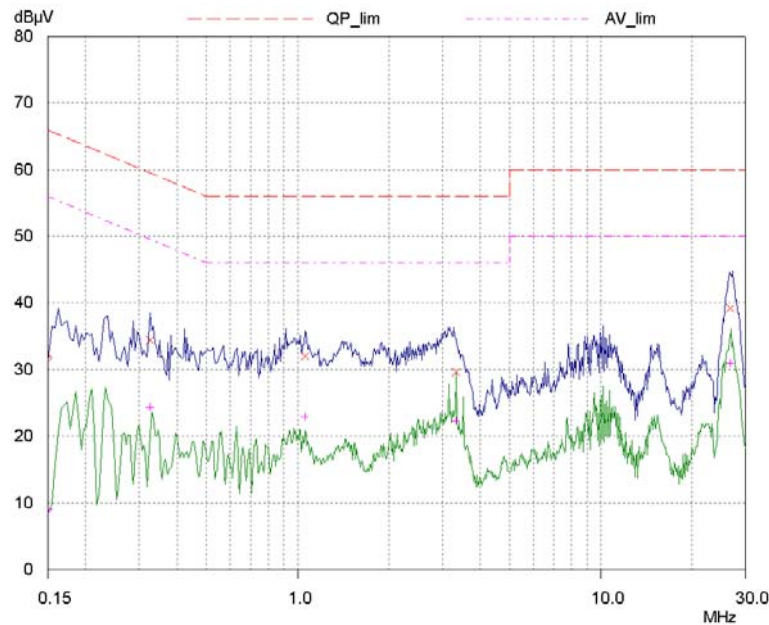

Picture 2: AC-mains conducted RF output power measurement results, AC line, battery charging.

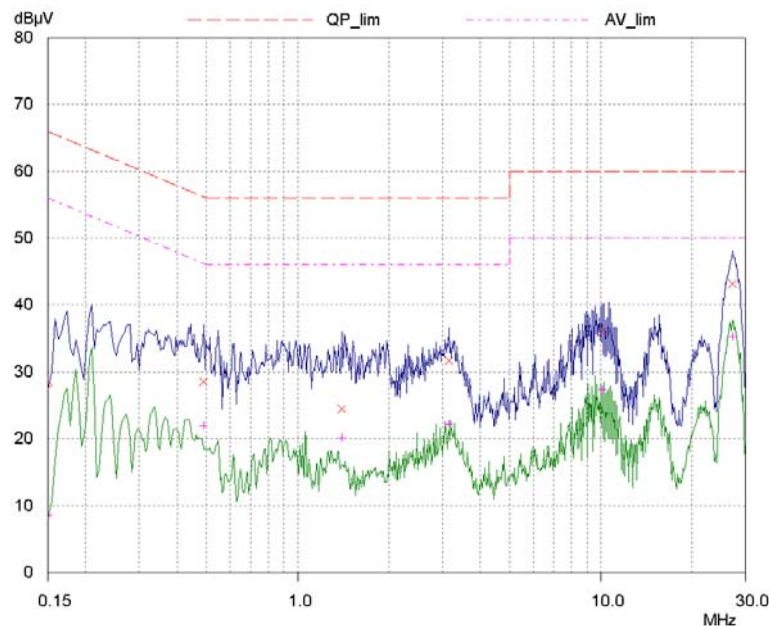

Picture 3: AC-mains conducted RF output power measurement results, AC neutral, battery charging.

8 RADIATED EMISSION

EUT	07701		
Accessories	07702, 07703, 07704, 07705, 07706, 07707		
Temp, Humidity, Air Pressure	24 °C	69 RH%	1011 hPa
Date of measurement	August 31, 2004		
FCC rule part	§15.109		
ICES-003 section	5.5		
Measured by	Jani Kiiski		

8.1 Test setup

Below 1 GHz:


The EUT was set on a non-conductive turntable 0.80m height from reference ground plane in a semi-anechoic chamber.

Above 1 GHz:


The EUT was set on a non-conductive turntable 0.80m height from reference ground plane in a semi-anechoic chamber.

In the corner of the chamber there was a communications antenna, which was connected to the BS simulator located outside the chamber.

The BS simulator was used to provide the common control and broadcasting channel to the EUT to keep the EUT receiver on.

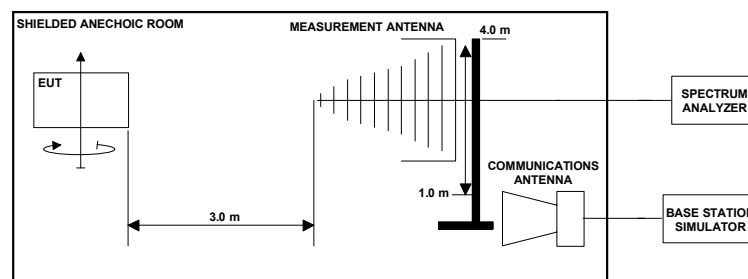

Picture 4: Test setup for radiated emission measurement below 1 GHz

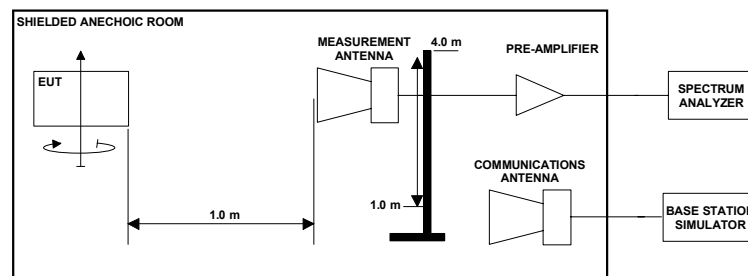

Picture 5: Test setup for radiated emission measurement above 1 GHz

8.2 Test method

The test system used is computer controlled. The measurement antenna calibrated antenna factors and connecting cable losses are added in a computer software to the measured results. The results corrected with antenna factors and cable losses are recorded.

Measurement procedure below 1 GHz frequencies:

1. The maximum emission levels were searched by rotating and manipulating the EUT and by scanning the measurement antenna in height from 1.0 to 4.0 m using peak detector.
2. All signal levels closer to 6 dB to the limit were measured using Quasi peak detector and recorded

Measurement procedure above 1 GHz frequencies:

1. The maximum emission levels were searched by rotating and manipulating the EUT and by scanning the measurement antenna in height from 1.0 to 4.0 m and by using peak detector.
2. All signal levels closer to 6 dB to the limit were measured using peak and average detectors and recorded

8.3 EUT operation mode

EUT was set in idle mode so, that EUT receiver and other functions except the transmitter are on.

8.4 Limit

Table 5: Radiated emission limits for FCC class B and IC class B digital devices, measurement distance 3.0 m

FCC				
Frequency of emission [MHz]	3m Limit [$\mu\text{V} / \text{m}$]	3m Limit [$\text{dB}\mu\text{V}/\text{m}$]	Resolution bandwidth [kHz]	Measurement detector type
30 – 88	100	40	120	Quasi peak
88 – 216	150	43,5	120	Quasi peak
216 – 960	200	46	120	Quasi peak
960 – 1000	500	54	120	Quasi peak
Above 1000	500	54	1000	Average
Above 1000	5000	74	1000	Peak

8.5 Results

The above 1GHz measurements are made from 1-meter measurement distance. The results are corrected by automated measurement system to correspond the 3-meter measurement distance.

The measured interference values using peak detector is shown in the pictures below.

All signals closer than 6 dB to the limit have been measured using quasi peak or average detector and reported in the tables 6, 7 and 8

Table 6: Radiated emissions using Quasi peak detector at measurement distance 3m

Frequency [MHz]	Measured value [dB μ V]	Limit [dB μ V/m]	Margin to limit [dB]
37.38	29.03	40	-10.97
37.92	31.86	40	-8.14
47.94	28.79	40	-11.21
500.64	37.02	46	-8.98


Table 7: Radiated emissions using Peak detector at measurement distance 3m.

Frequency [MHz]	Measured value [dB μ V]	Limit [dB μ V/m]	Margin to limit [dB]
1064	50.8	74	-23.2

Table 8: Radiated emissions using Average detector at measurement distance 3m.

Frequency [MHz]	Measured value [dB μ V]	Limit [dB μ V/m]	Margin to limit [dB]
1064	18.06	54	-35.94


GSM 1900, Ch 661

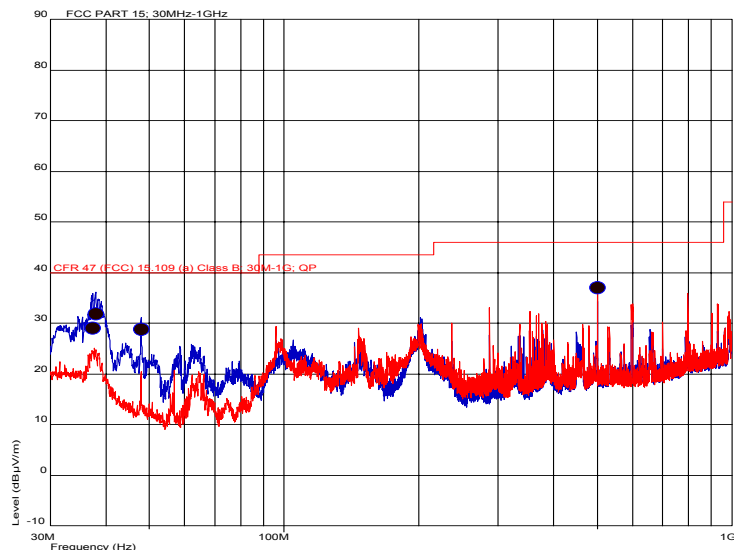

Picture 6: radiated emission results using PEAK detector, 30 – 1000 MHz, EUT vertical.

Prescan: Red = horizontal, Blue = vertical

Final: Blue dot = Peak

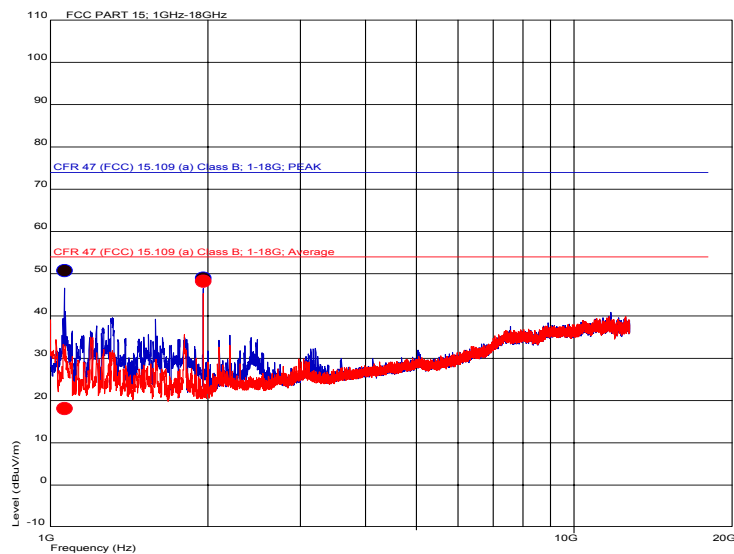

1960 MHz:
Tester downlink
signal

Picture 7: radiated emission results using PEAK detector, 1 – 12.75 GHz, EUT vertical.

Prescan: Red = horizontal, Blue = vertical

Final : Blue dot = Peak, Red dot = Average

9 TEST EQUIPMENT

All testing and measurement equipment has been calibrated once a year, except the antennas that are calibrated every two years.

9.1 Radiated measurements

Equipment	Manufacturer	Model
Spectrum Analyzer	Agilent	E7405A
GSM Base station simulator	HP	8922M + 83220E
GSM Base station simulator	Anritsu	MT8820A
Antenna	Chase	CBL 6141
Antenna	Chase	CBL 6140
Antenna	Schwarzbeck	BBHA 9120D
Pre-amplifier	JCA	118-400
Turn table / antenna mast controller	EMCO	2090
Antenna mast	EMCO	2075-2

10 TEST SETUP PHOTOGRAPHS

Test setup photograph can be found in a separate document

T04-077A-EMC_PHOTOS.doc