



FCC TEST REPORT

REPORT NO.: RF90032807

MODEL NO.: PA307OU-1MPC

RECEIVED: March 28, 2001

TESTED: April 9, 2001

APPLICANT: COMPAL ELECTRONICS, INC.

ADDRESS: No.581, Juikuang Road, Neihu, Taipei
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 13-1, Lane 19, Wen Shan 3rd St., Kweishan,
Taoyuan Hsien, Taiwan, R.O.C.

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



Accredited Laboratory

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	7
4	TEST PROCEDURES AND RESULTS	8
4.1	CONDUCTED EMISSION MEASUREMENT.....	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	8
4.1.2	TEST INSTRUMENTS.....	8
4.1.3	TEST PROCEDURES.....	9
4.1.4	TEST SETUP	10
4.1.5	TEST RESULTS.....	11
4.2	RADIATED EMISSION MEASUREMENT.....	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2	TEST INSTRUMENTS.....	18
4.2.3	TEST PROCEDURES.....	19
4.2.4	TEST SETUP	20
4.2.5	TEST RESULTS.....	21
4.3	6dB BANDWIDTH MEASUREMENT	25
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	25
4.3.2	TEST INSTRUMENTS.....	25
4.3.3	TEST PROCEDURE	26
4.3.4	TEST SETUP	26
4.3.5	EUT OPERATING CONDITION.....	26
4.3.6	TEST RESULTS.....	27
4.4	MAXIMUM PEAK OUTPUT POWER.....	31
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	31
4.4.2	INSTRUMENTS	31
4.4.3	TEST PROCEDURES.....	32
4.4.4	TEST SETUP	32
4.4.5	EUT OPERATING CONDITION.....	32
4.4.6	TEST RESULTS.....	33
4.5	POWER SPECTRAL DENSITY MEASUREMENT	34
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	34

4.5.2	TEST INSTRUMENTS	34
4.5.3	TEST PROCEDURE	35
4.5.4	TEST SETUP	35
4.5.5	EUT OPERATING CONDITION	35
4.5.6	TEST RESULTS	36
4.6	BAND EDGES MEASUREMENT	40
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	40
4.6.2	TEST INSTRUMENTS	40
4.6.3	TEST PROCEDURE	40
4.6.4	EUT OPERATING CONDITION	41
4.6.5	TEST RESULTS	41
4.6.6	NOTE ON BAND EDGE EMISSION	42
4.7	ANTENNA REQUIREMENT	45
4.7.1	STANDARD APPLICABLE	45
4.7.2	ANTENNA CONNECTED CONSTRUCTION	45
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	46
6	INFORMATION ON THE TESTING LABORATORIES	48
ANNEX 1	PROCESSING GAIN OF DIRECT SEQUENCE SPREAD SPECTRUM MEASUREMENT	
ANNEX 2	PHOTOGRAPHS OF EUT	



1 CERTIFICATION

PRODUCT : 802.11b mini-pci card
BRAND NAME : Toshiba
MODEL NO. : PA307OU-1MPC
APPLICANT : COMPAL ELECTRONICS, INC.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992
SITE REGISTRATION NO. : 90422 (FCC)
IC 3789-5 (Canada IC)

We, **Advance Data Technology Corporation**, hereby certify that one sample PA307OU-1MPC of the designation has been tested in our facility on April 9, 2001.

The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by : Steven Lu , Date: April 18, 2001
Steven Lu

Prepared by : Demi Chen , Date: April 18, 2001
Demi Chen

Approved by : Alan Lane , Date: April 18, 2001
Dr. Alan Lane, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST REQUIREMENTS	RESULT	REMARK
15.107	AC Power Conducted Emissions Spec.: 48 dBuV	Yes	Minimum passing margin is -12.17dBuV At 0.48000 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Spec.: min. 500 KHz	Yes	10.18 MHz > 500 kHz
15.247(b)	Maximum Peak Output Power Spec.: max. 30 dBm	Yes	21.15 dBm < 30 dBm
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	Yes	Minimum passing margin is -3.5dBuV At 499.44 MHz
15.247(d)	Power Spectral Density Spec.: max. 8dBm	Yes	-6.75 dBm < 8 dBm
15.247(c)	Band Edge Measurement	Yes	N/A
15.247(e)	Processing Gain of Direct Sequence Spread Spectrum System Spec.: min. 10 dB	Yes	11.4dB ≥ 10dB

NOTE:

The receiver portion of the EUT has been tested in ADT. The test result has been verified to comply with FCC Part 15, Subpart B, Class B – Computing Devices (FCC DoC). The engineering test report can be provided upon FCC requests.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11b mini-pci card
MODEL NO.	PA307OU-1MPC
POWER SUPPLY	5VDC from Notebook
DATA CABLE	NA
BANDWIDTH OF EACH CHANNEL	22MHz
MODULATION TYPE	CCK, BPSK, QPSK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	15dBm
ANTENNA TYPE	Inverted-F Antenna
ASSOCIATED DEVICES	NA
DESCRIPTION OF MODELS	The Network Interface Card is capable to operate in quasi-static indoor environments. It functions as an interface between the mini-PCI Host bus and the Wireless Local Area Network (WLAN) transport medium (free space). The Network Interface Card covers 1Mbit/s DBPSK and 2Mbit/s DQPSK modulation as defined in the IEEE802.11 PHY standard for Direct Sequence Spread Spectrum (DSSS). As enhanced functionality, is also covers 5.5Mbit/s and 11Mbit/s Complementary Code Keying (CCK). These Physical Layer characteristics comply with the regulations of the Federal Communication Committee (FCC) Part15, Japanese MPT and European ETS regulations. The 2.4GHz ISM band is used for information transmission in compliance with government regulations.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 802.11b mini-pci card, according to the specifications of the manufacturers, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

All tests have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	TOSHIBA	Satellite3000	1000989200025	NA
2	PRINTER	HP	225C+	3123S92730	DSI6XU2225
3	600 Load	NA	NA	NA	NA

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.45 – 30	48	-	48	-

Notes:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 6, 2001
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 9, 2001
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 28, 2001
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 3, 2001
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 9, 2001
Software	Cond-V2e	NA	NA
RF cable (JYEBAO)	RG-58A/U	Cable-C02.01	July 9, 2001
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA


Notes:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST PROCEDURES

1. Place the EUT at 0.4 meter away from the conduction wall of the shielded room.
2. Connect the EUT to the power mains through a Line Impedance Stabilization Network (LISN).
3. Connect the other support units to the other LISN too.
4. Make sure the $50\Omega/ 50\mu\text{H}$ coupling impedance is provided to the measurement instrument by the LISNs.
5. Measure the maximum conducted interference on both lines of the power mains connects to the EUT, within frequency range 450KHz ~ 30MHz.
6. The emission level under limit by 10dB is not needed to be reported.

4.1.4 TEST SETUP

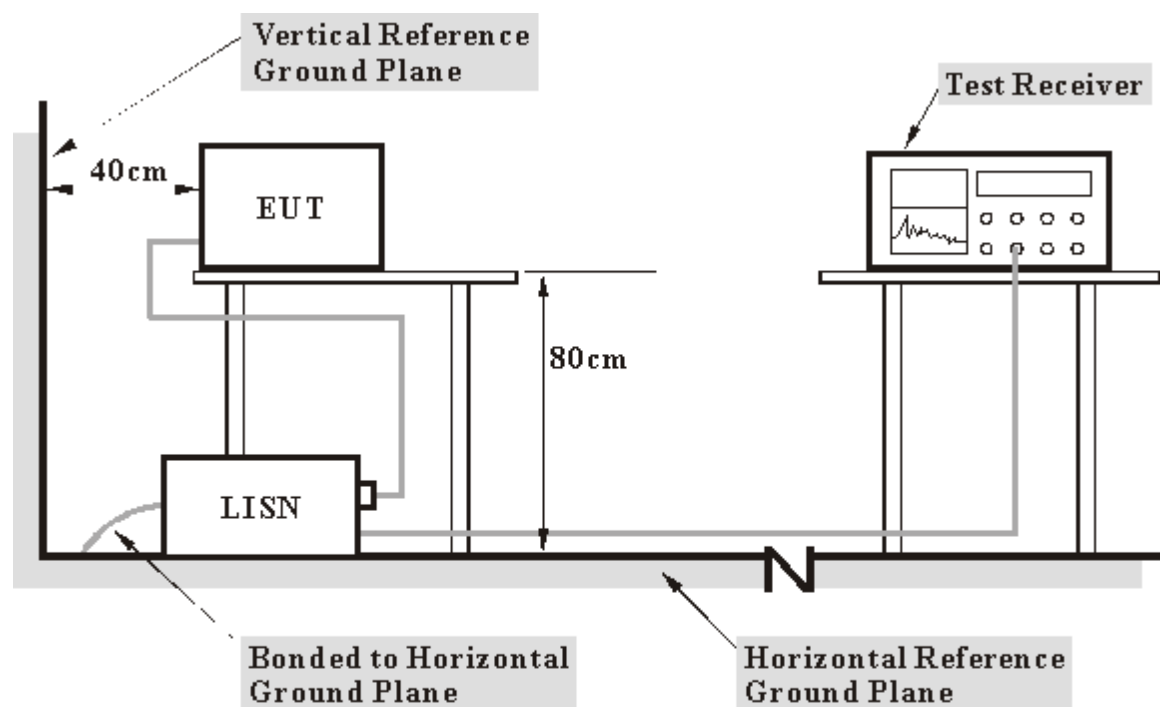


- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related Item in this test report (**Photographs of the Test Configuration**).

4.1.5 TEST RESULTS

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Channel	Channel 1	Phase	L
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.48000	0.20	35.29	-	35.49	-	48.00	-	-12.51	-
2	0.75600	0.20	33.45	-	33.65	-	48.00	-	-14.35	-
3	1.24066	0.20	33.84	-	34.04	-	48.00	-	-13.96	-
4	1.93312	0.20	29.91	-	30.11	-	48.00	-	-17.89	-
5	3.93118	0.39	25.98	-	26.37	-	48.00	-	-21.63	-
6	9.65498	0.68	33.41	-	34.09	-	48.00	-	-13.91	-

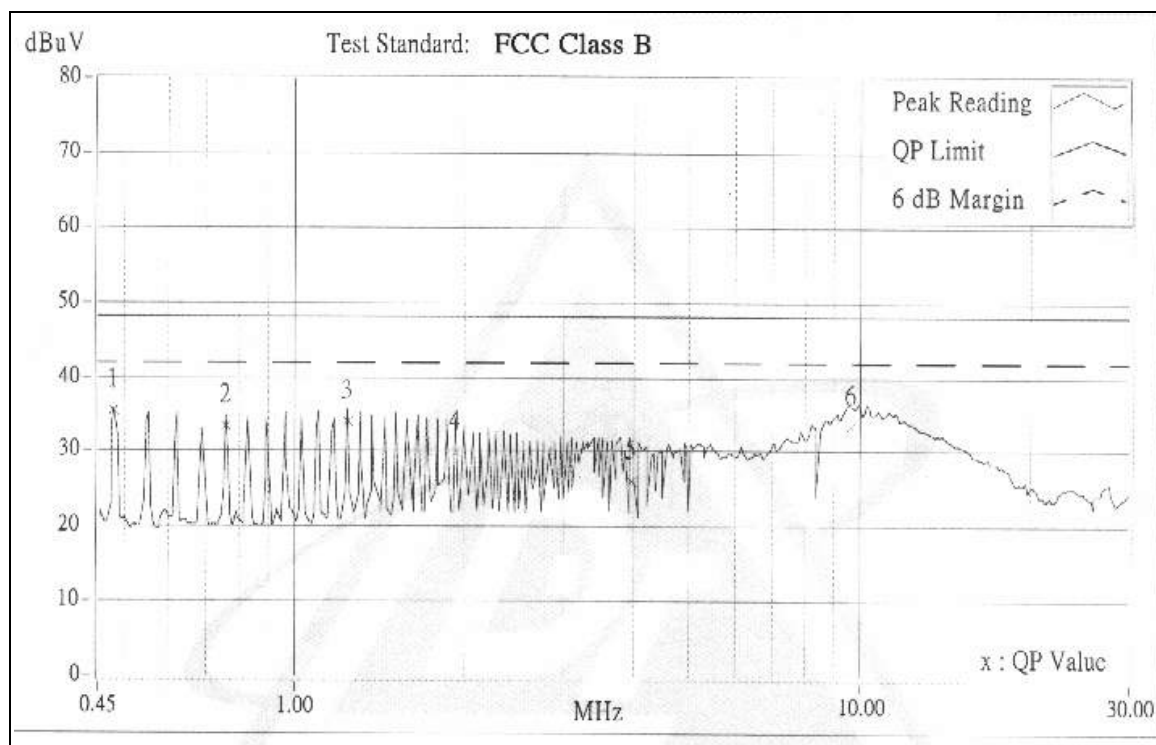

- Remarks:
1. "x": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Channel	Channel 1	Phase	N
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu


No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.55282	0.20	30.67	-	30.87	-	48.00	-	-17.13	-
2	0.89700	0.20	33.39	-	33.59	-	48.00	-	-14.41	-
3	1.72608	0.20	33.56	-	33.76	-	48.00	-	-14.24	-
4	3.58846	0.36	34.67	-	35.03	-	48.00	-	-12.97	-
5	5.24000	0.44	23.28	-	23.72	-	48.00	-	-24.28	-
6	9.87678	0.60	30.23	-	30.83	-	48.00	-	-17.17	-

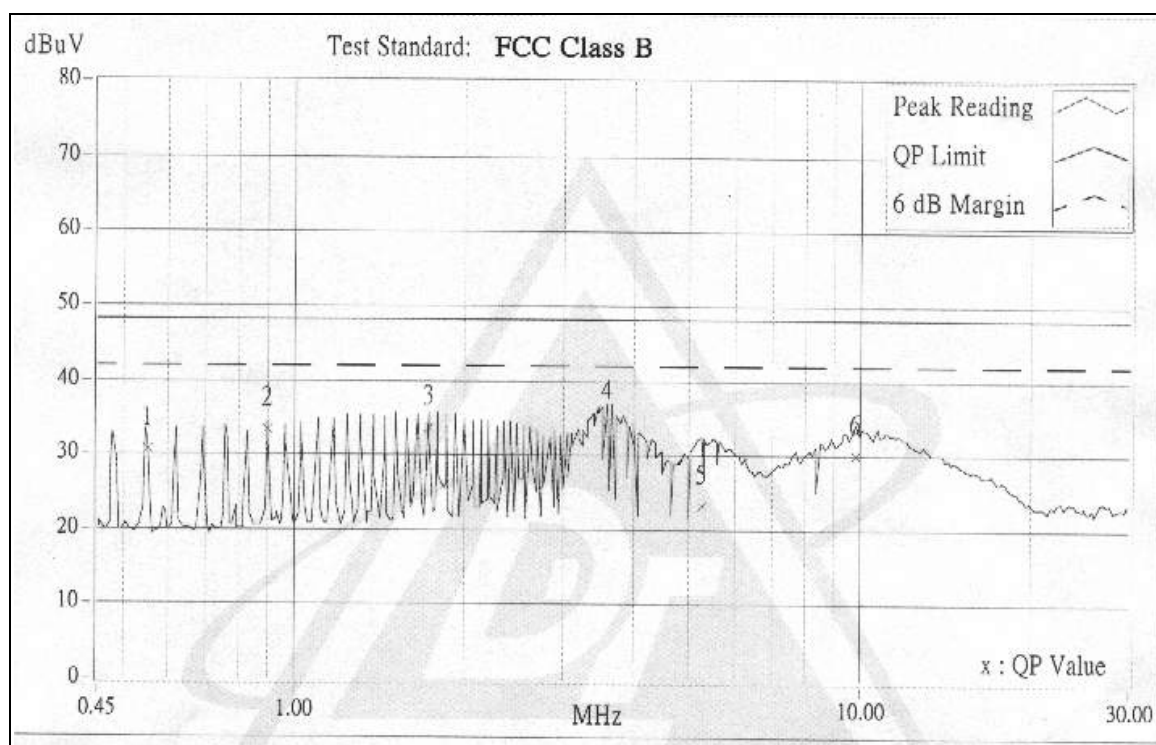

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Channel	Channel 6	Phase	L
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.48000	0.20	35.63	-	35.83	-	48.00	-	-12.17	-
2	0.89100	0.20	32.89	-	33.09	-	48.00	-	-14.91	-
3	1.37278	0.20	33.41	-	33.61	-	48.00	-	-14.39	-
4	3.36554	0.34	27.64	-	27.89	-	48.00	-	-20.02	-
5	5.08909	0.45	27.64	-	28.09	-	48.00	-	-19.91	-
6	9.76806	0.69	34.03	-	34.72	-	48.00	-	-13.28	-

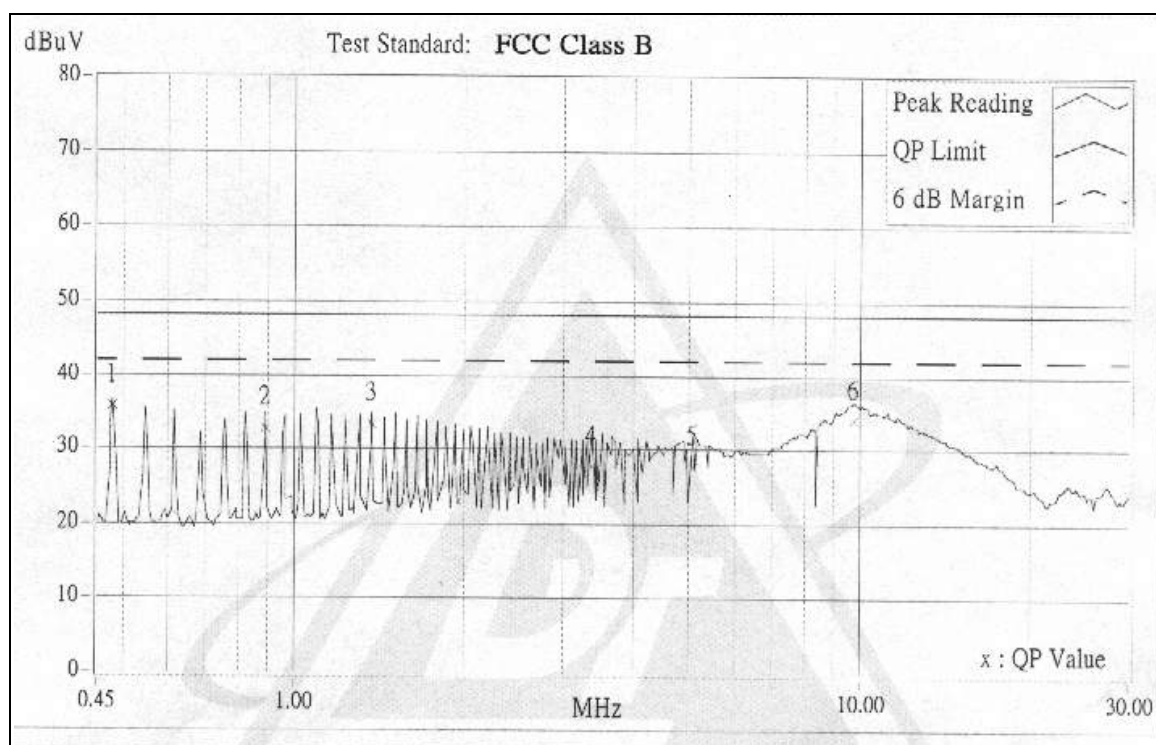

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Channel	Channel 6	Phase	N
Environmental Conditions	20, 70%RH	Tested By	Steven Lu


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.47649	0.20	30.16	-	30.36	-	48.00	-	-17.64	-
2	0.88800	0.20	32.41	-	32.61	-	48.00	-	-15.39	-
3	1.16227	0.20	32.11	-	32.31	-	48.00	-	-15.69	-
4	3.56516	0.36	34.75	-	35.11	-	48.00	-	-12.89	-
5	5.69090	0.46	27.95	-	28.41	-	48.00	-	-19.59	-
6	10.08480	0.61	30.22	-	30.83	-	48.00	-	-17.17	-

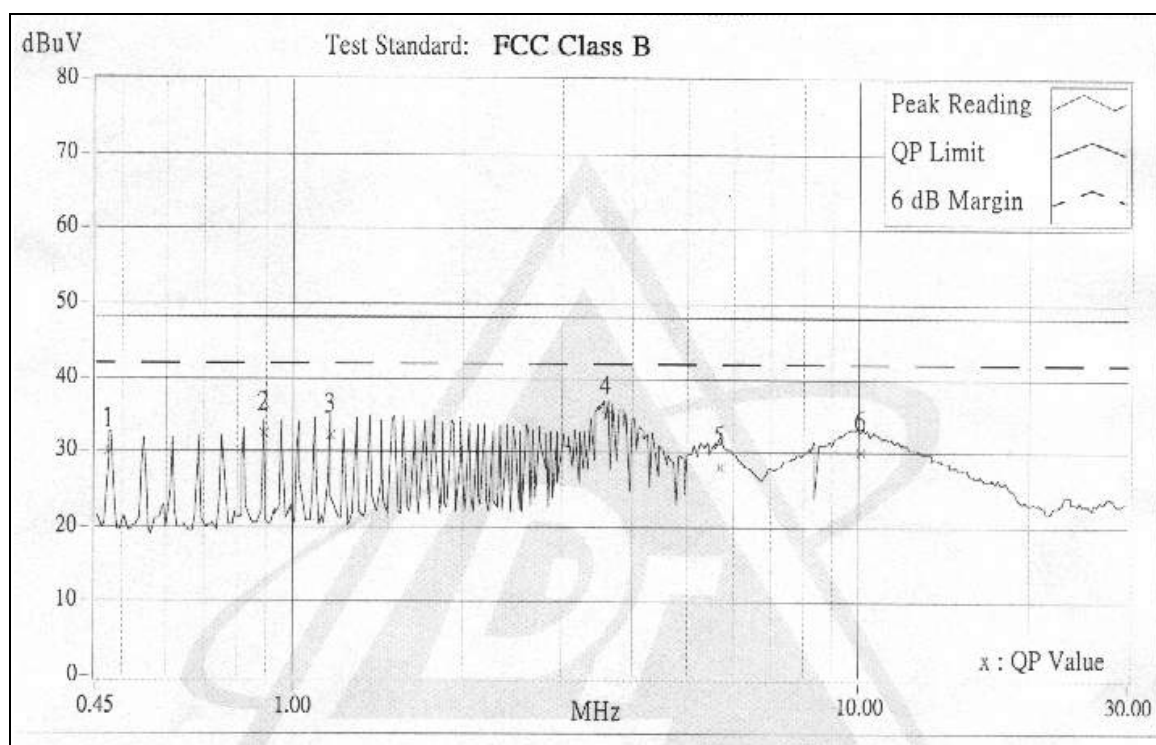

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Channel	Channel 11	Phase	L
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.47100	0.20	34.47	-	34.67	-	48.00	-	-13.33	-
2	0.74100	0.20	31.51	-	31.71	-	48.00	-	-16.29	-
3	1.21200	0.20	29.22	-	29.42	-	48.00	-	-18.58	-
4	2.29917	0.23	27.98	-	28.21	-	48.00	-	-19.79	-
5	5.19617	0.46	19.66	-	20.12	-	48.00	-	-27.88	-
6	10.48997	0.73	31.72	-	32.45	-	48.00	-	-15.55	-

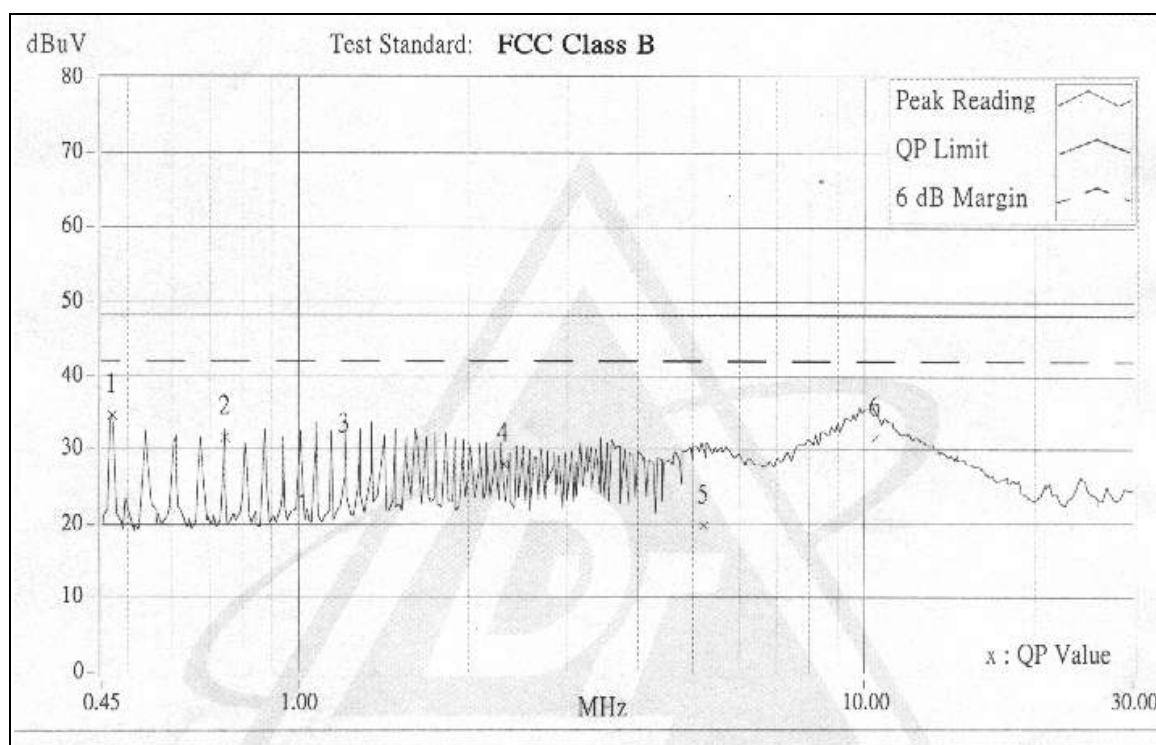

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Channel	Channel 11	Phase	N
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.54732	0.20	28.94	-	29.14	-	48.00	-	-18.86	-
2	1.09317	0.20	29.73	-	29.93	-	48.00	-	-18.07	-
3	1.62900	0.20	24.13	-	24.33	-	48.00	-	-23.67	-
4	3.61353	0.36	34.48	-	34.84	-	48.00	-	-13.16	-
5	5.66689	0.46	27.34	-	27.80	-	48.00	-	-20.20	-
6	9.97503	0.60	30.35	-	30.95	-	48.00	-	-17.05	-

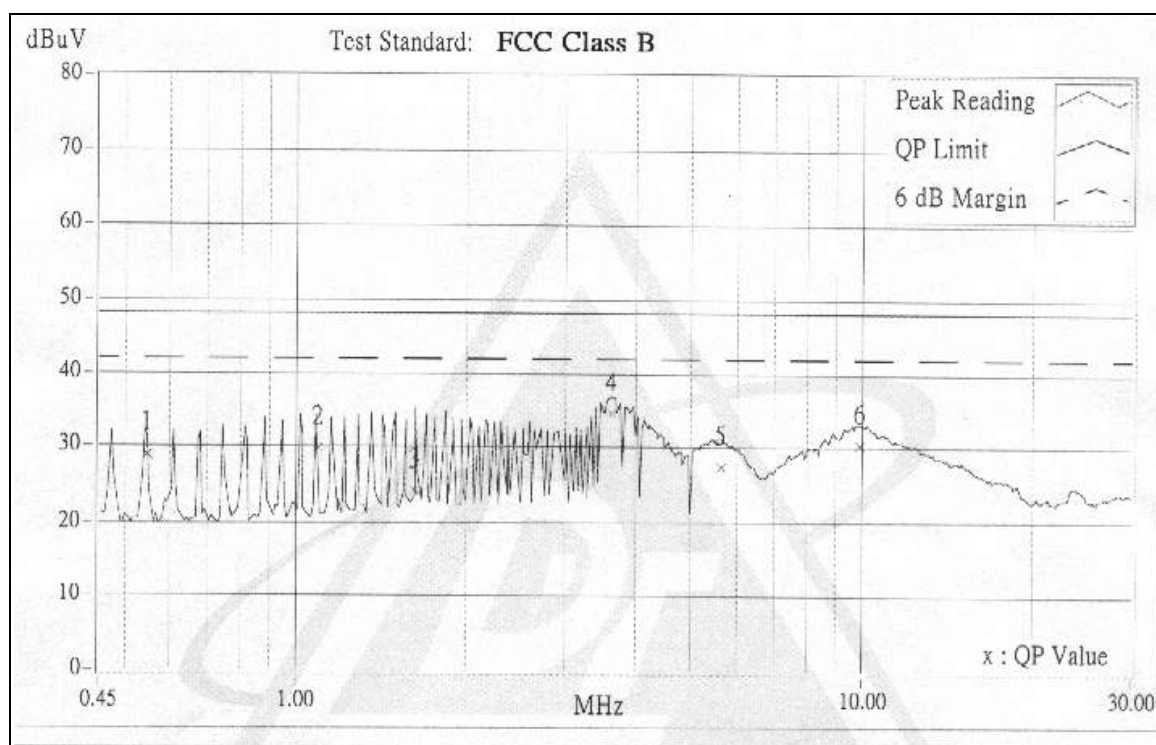

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter}$
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$
Above 1000	300	49.5	500	54.0

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. Emission level ($\text{dB}\mu\text{V}/\text{m}$) = $20 \log$ Emission level ($\mu\text{V}/\text{m}$).
 3. All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3544A01176	April 18, 2001
HP Preamplifier	8447D	2944A08485	April 26, 2001
* HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2001
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 4, 2001
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 4, 2001
Open Field Test Site	Site 5	ADT-R05	July 28, 2001
VCCI Site Registration No.	Site 5	R-1039	NA

NOTE: 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


3. "*" = These equipments are used for the final measurement.

4.2.3 TEST PROCEDURES

1. The EUT was placed on the turn table 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 120KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turn table and stop at the angle where the measurement device has maximum reading
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak function, set the resolution bandwidth to 100kHz and repeat the procedures C ~ F. If the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.
8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures C ~ F for frequency band from 1 GHz to 10 times carrier frequency.
9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 300Hz. Repeat procedures C ~ F. If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.

- Note:
1. The frequency range of verification is either from 30 MHz to 1GHz or from 30 MHz up to 10 times carrier frequency of EUT (whichever is the highest frequency range).
 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for frequency below 1GHz.
 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for frequency above 1GHz.

4.2.4 TEST SETUP

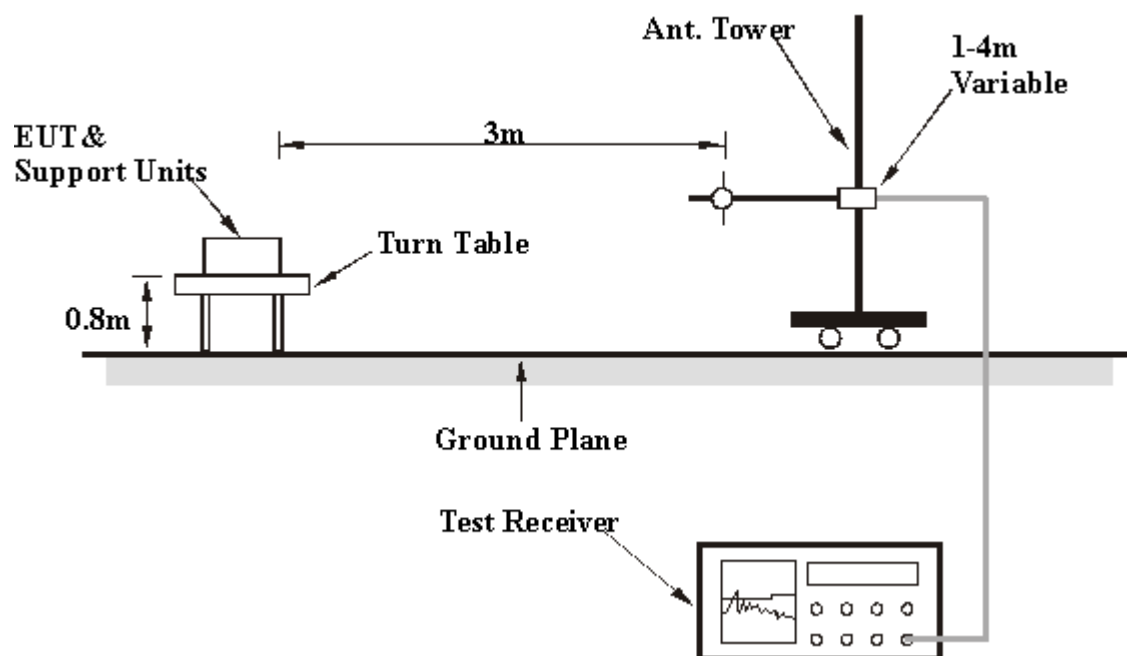

For the actual test configuration, please refer to the related Item in this test report **(Photographs of the Test Configuration)**.

4.2.5 TEST RESULTS

Digital Portion

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Mode	Channel 1	Detector Function	Quasi-Peak
Frequency Range	30-1000 MHz	Test Distance	3M
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu

ANTENNA POLARITY: VERTICAL

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
298.27	11.37	21.63	33.0	46.0	-13.0	177	329
396.01	8.32	13.18	21.5	46.0	-24.5	183	252
499.44	6.36	36.14	42.5	46.0	-3.5	100	120
528.07	6.29	25.91	32.2	46.0	-13.8	237	48
699.90	4.54	32.06	36.6	46.0	-9.4	102	285
704.02	4.47	24.23	28.7	46.0	-17.3	214	135
795.23	3.77	33.03	36.8	46.0	-9.2	101	249
880.12	2.83	25.57	28.4	46.0	-17.6	156	71

ANTENNA POLARITY: HORIZONTAL

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
399.91	11.37	30.63	42.0	46.0	-4.0	100	52
396.00	8.32	19.68	28.0	46.0	-18.0	100	291
499.90	6.36	36.04	42.4	46.0	-3.6	105	73
528.08	6.29	30.41	36.7	46.0	-9.3	100	39
700.01	4.54	32.26	36.8	46.0	-9.2	197	195
704.01	4.47	24.93	29.4	46.0	-16.6	162	255
795.23	3.77	28.33	32.1	46.0	-13.9	151	144
879.54	2.85	26.15	29.0	46.0	-17.0	137	349

- NOTES: 1 Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2 Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3 The other emission levels were very low against the limit.
 4 Margin value = Emission level - Limit value

RF Portion

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Mode	Channel 1	Detector Function	Peak,Average
Frequency Range	Above 1000 MHz	Test Distance	3M
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu

ANTENNA POLARITY: Vertical		Detector Function :				6dB Bandwidth : 1MHz				Frequency Range : Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2060.0	31.26	9.6	-	40.9	-	74.0	54.0	-33.1	-	102	115
*2412.3	32.40	69.2	63.2	101.6	95.6	-	-	-	-	106	226
4120.0	37.13	10.36	-	47.5	-	74.0	54.0	-26.5	-	105	246
4824.3	38.05	8.69	-	46.7	-	74.0	54.0	-27.3	-	101	322

ANTENNA POLARITY: Horizontal		Detector Function :				6dB Bandwidth:1MHz				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2060.5	31.26	8.90	-	40.2	-	74.0	54.0	-33.8	-	105	354
*2412.5	32.40	70.0	64.9	102.4	97.3	-	-	-	-	109	230
4120.0	37.13	9.60	-	46.7	-	74.0	54.0	-27.3	-	100	195
4824.3	38.05	8.90	-	46.9	-	74.0	54.0	-27.1	-	100	90

- NOTES: 1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Mode	Channel 6	Detector Function	Peak, Average
Frequency Range	Above 1000 MHz	Test Distance	3M
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu

ANTENNA POLARITY: Vertical		Detector Function :				6dB Bandwidth:1MHz				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2085.0	31.32	8.22	-	39.5	-	74.0	54.0	-34.5	-	103	164
*2436.3	32.49	70.20	65.10	102.7	97.6	-	-	-	-	111	30
4170.3	37.14	8.22	-	45.4	-	74.0	54.0	-28.6	-	101	320
4874.2	38.19	9.60	-	47.8	-	74.0	54.0	-26.2	-	103	96

ANTENNA POLARITY: Horizontal		Detector Function :				6dB Bandwidth:1MHz.				Frequency Range: Above 1GHz.	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2085.2	31.35	10.23	-	41.6	-	74.0	54.0	-32.4	-	104	160
*2436.2	32.49	71.89	66.20	104.4	98.7	-	-	-	-	105	273
4170.3	37.14	9.22	-	46.4	-	74.0	54.0	-27.6	-	108	283
4874.2	38.19	10.20	-	48.4	-	74.0	54.0	-25.6	-	111	171

- NOTES: 1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Mode	Channel 11	Detector Function	Peak, Average
Frequency Range	Above 1000MHz	Test Distance	3M
Environmental Conditions	20°C, 75%RH	Tested By	Steven Lu

ANTENNA POLARITY: Vertical		Detector Function :				6dB Bandwidth:1MHz.				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2110.5	31.42	9.60	-	41.0	-	74.0	54.0	-23.0	-	102	322
*2460.9	32.56	74.84	67.50	107.4	100.1	-	-	-	-	116	124
2483.5	32.62	17.90	-	50.5	-	74.0	54.0	-23.5	-	112	315
4220.0	37.14	9.89	-	47.0	-	74.0	54.0	-27.0	-	100	285
4924.5	38.33	6.34	-	44.7	-	74.0	54.0	-29.3	-	107	353

ANTENNA POLARITY: Horizontal		Detector Function :				6dB Bandwidth:1MHz.				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2110.0	31.42	11.20	-	42.6	-	74.0	54.0	-31.4	-	102	97
*2461.4	32.56	72.20	63.90	104.8	96.5	-	-	-	-	100	188
4220.0	37.14	10.30	-	47.4	-	74.0	54.0	-26.6	-	107	194
4176.0	37.14	9.16	-	46.3	-	74.0	54.0	-27.7	-	104	227
4924.5	38.33	7.38	-	45.7	-	74.0	54.0	-28.3	-	100	246

- NOTES: 1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value
5. The limit value is defined as per 15.247
6. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The Limit of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Aug. 04, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A


Notes:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS


EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.20	0.5	PASS
6	2437	10.24	0.5	PASS
11	2462	10.18	0.5	PASS


CH1

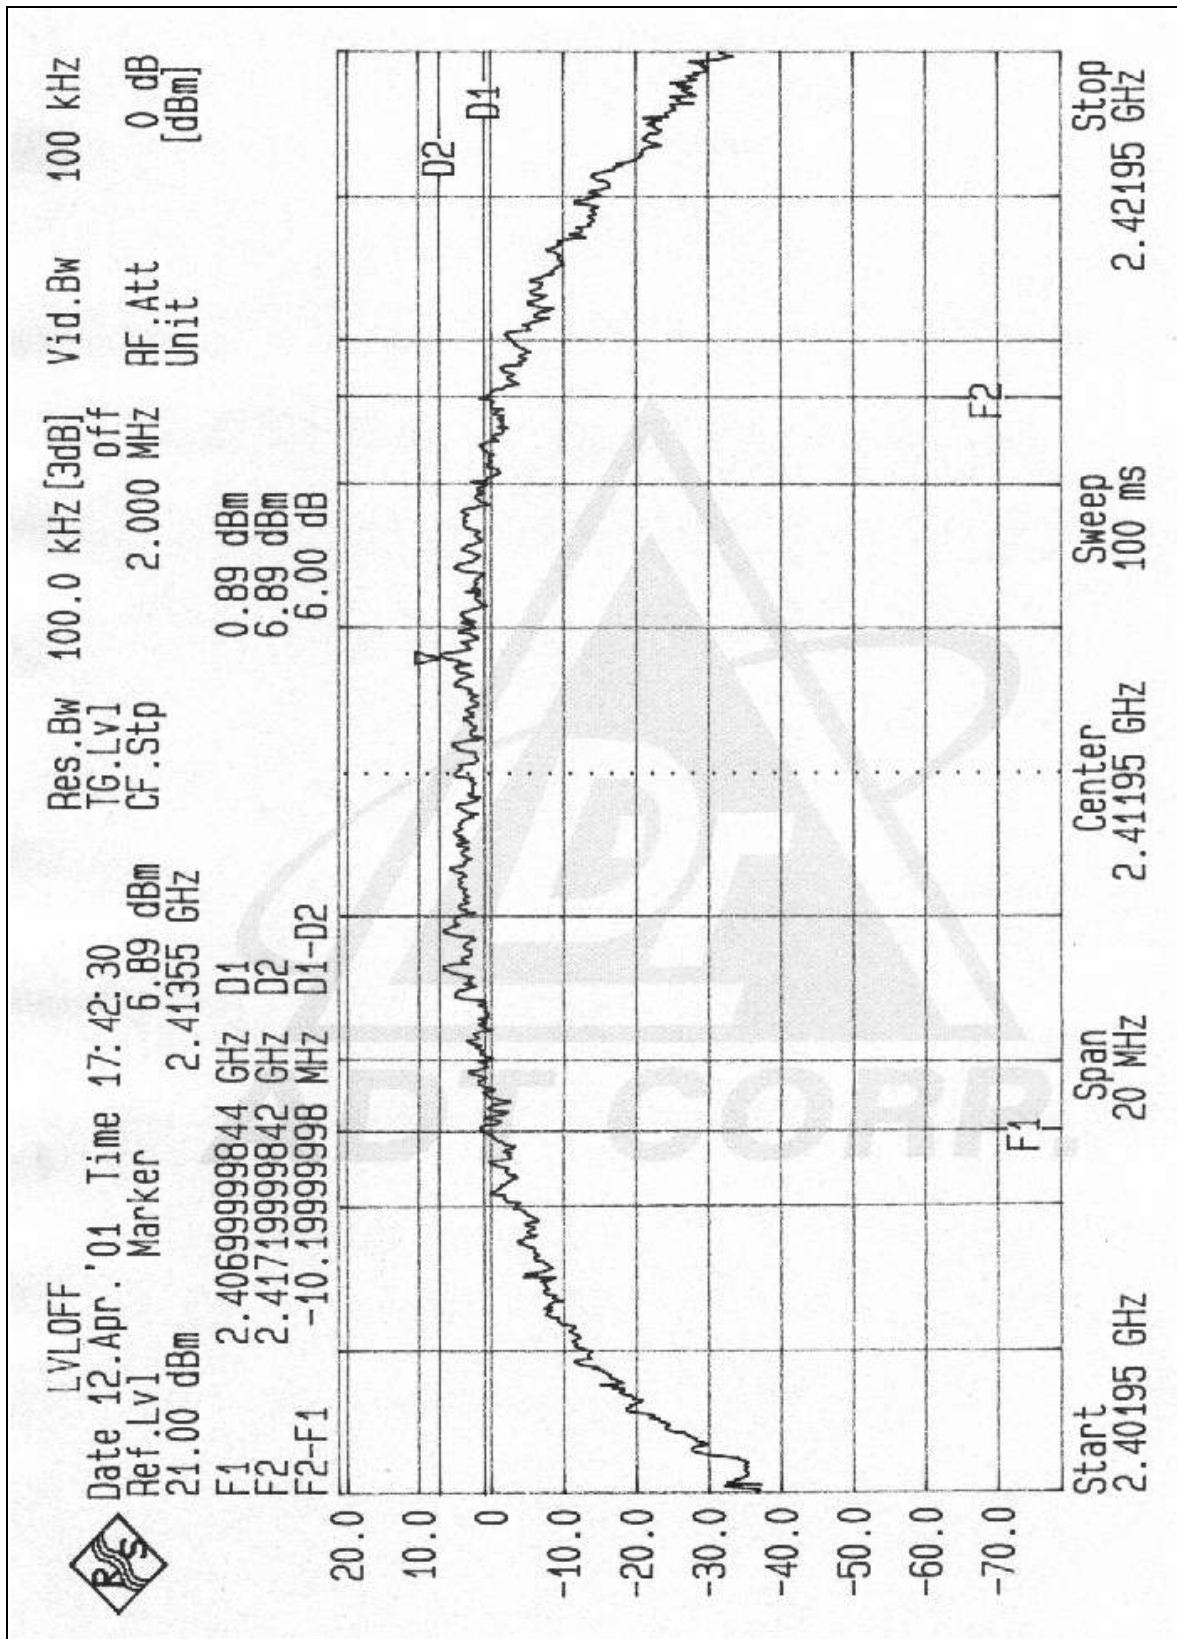

CH6

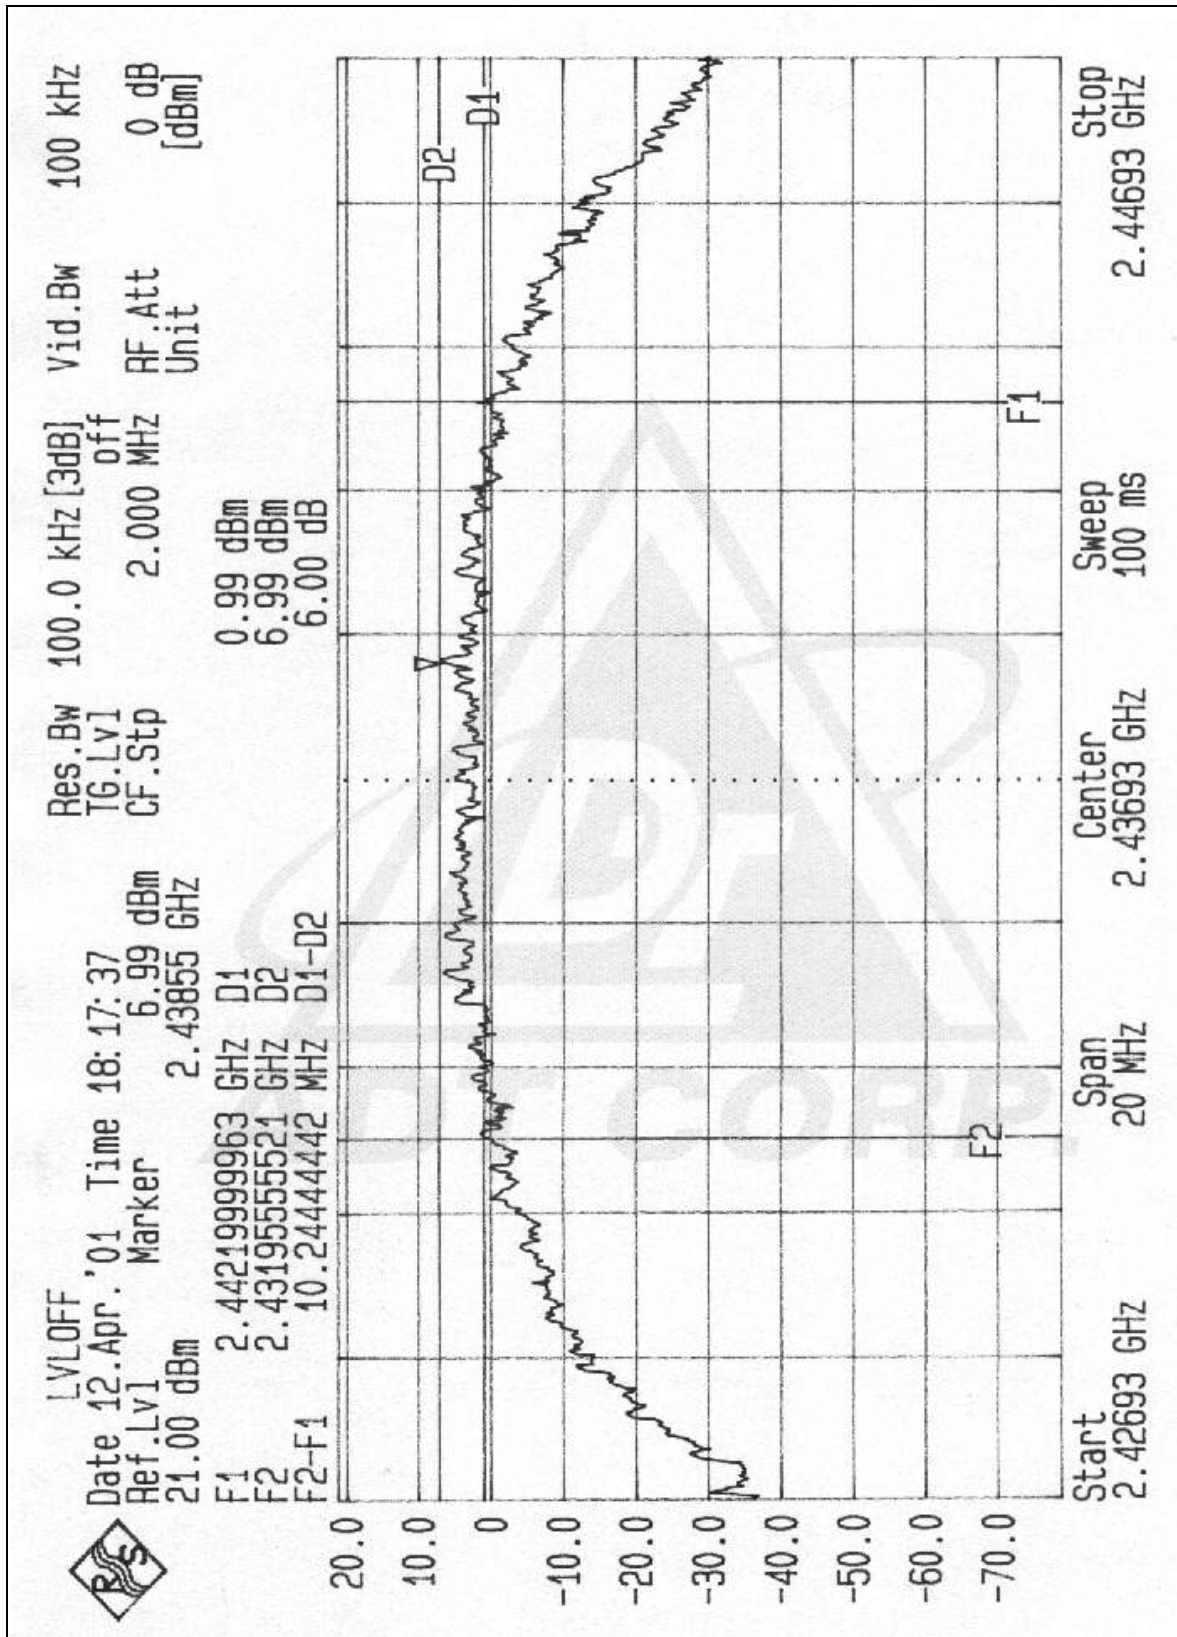

CH11

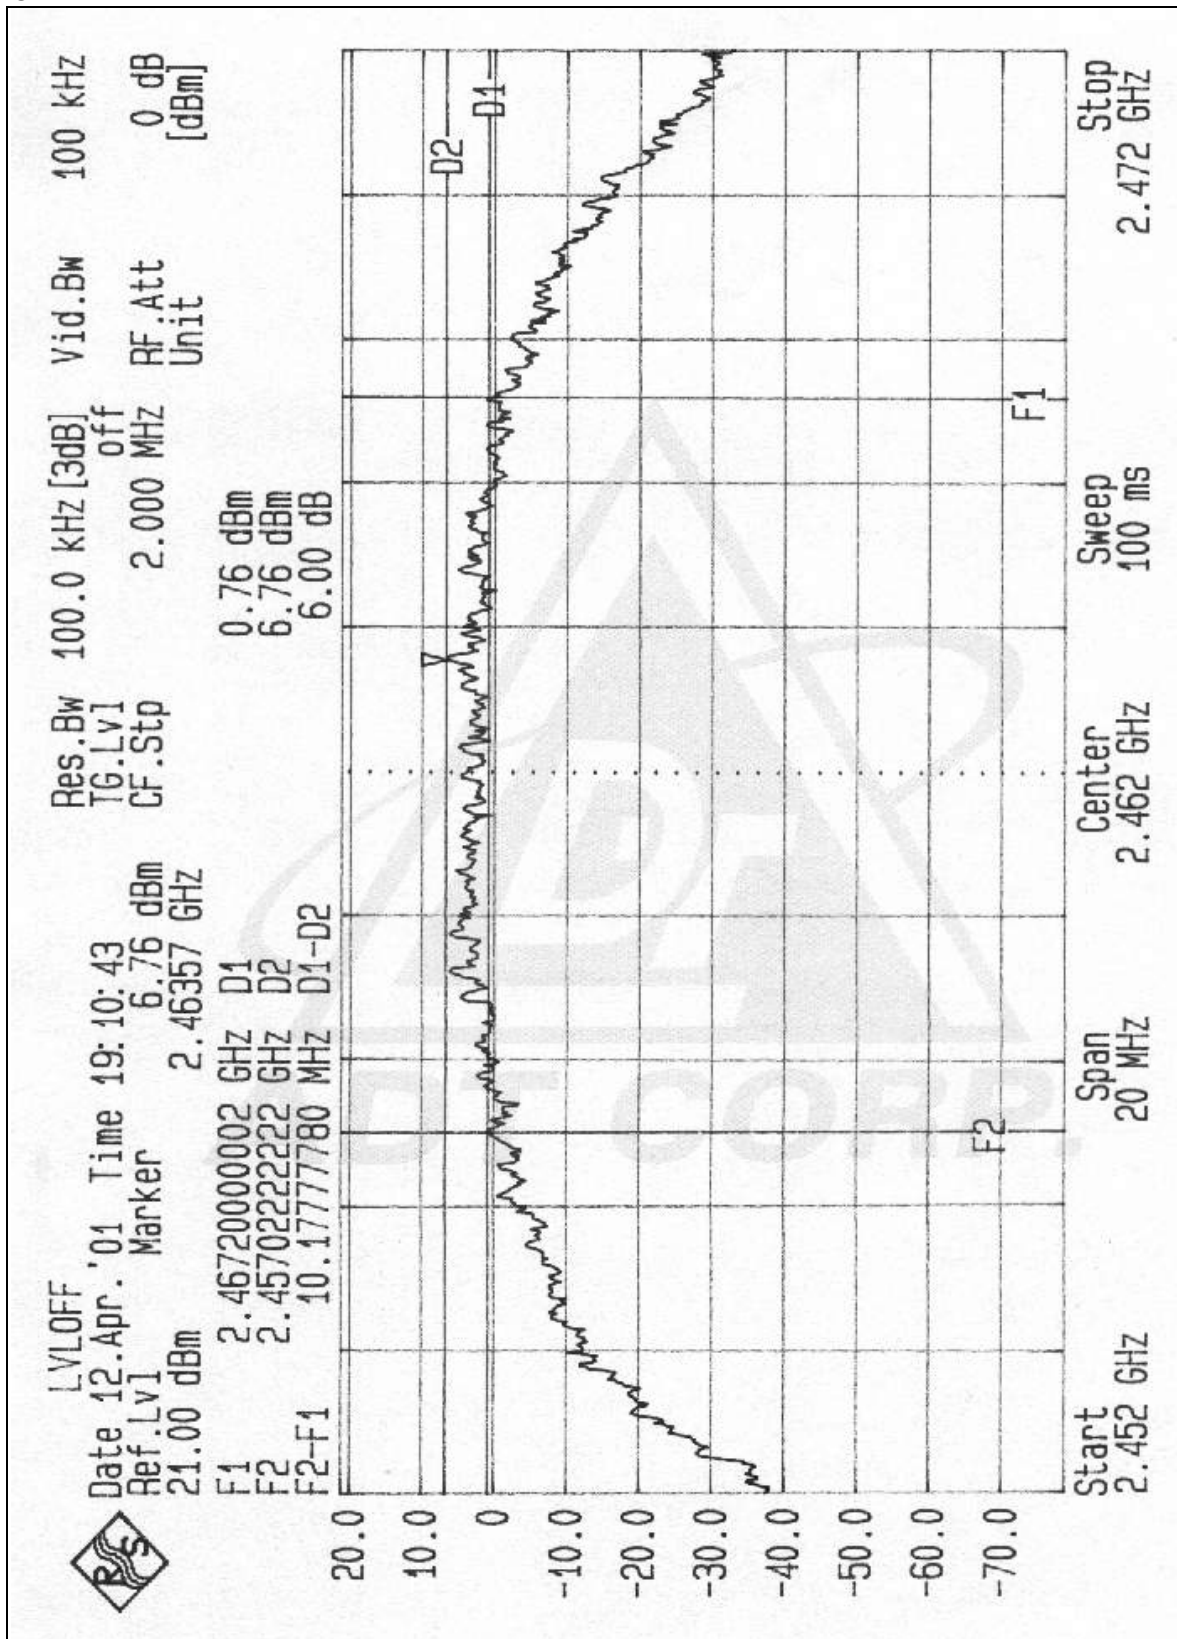

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Limit of Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Aug. 04, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A

Notes:


- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
3. The span of the spectrum analyzer should be larger than 6dB BandWidth plus 10MHz.
4. Use Peak Search to read the peak power after Maximum Hold function is activated.
5. Shift the marker to +/- 3MHz and +/-6MHz, and record the reading.
6. The Maximum Peak Output Power is the linear summation of the 5 readings in (4) and (5).

Note: This measurement is the total power of 15MHz bandwidth which is far more wider than 6dB bandwidth.

4.4.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.4.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.6 TEST RESULTS

Output Power Into Antenna:

EUT	802.11b mini-pci card	Model	PA307OU-1MPC
Environmental Conditions	20°C, 70%RH	Tested By	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	21.12	30	PASS
6	2437	21.15	30	PASS
11	2462	21.15	30	PASS