

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10520.000	12.930	37.590	50.520	-23.480	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
105210.000	13.724	37.980	51.704	-22.296	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz) (Internal Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10600.000	14.550	37.590	52.139	-21.861	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10600.000	14.881	38.150	53.031	-20.969	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10640.000	14.690	37.890	52.580	-21.420	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	15.083	37.560	52.643	-21.357	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11000.000	16.399	37.390	53.789	-20.211	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	17.132	36.810	53.942	-20.058	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11160.000	16.664	37.180	53.845	-20.155	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11160.000	17.643	36.350	53.993	-20.007	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11400.000	16.530	37.410	53.941	-20.059	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11400.000	17.138	36.710	53.848	-20.152	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5180MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10360.000	12.930	36.150	49.080	-24.920	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10360.000	13.724	37.040	50.764	-23.236	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz) (Internal Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10440.000	13.322	37.150	50.472	-23.528	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10440.000	14.245	37.140	51.385	-22.615	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5240MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10480.000	13.693	36.480	50.174	-23.826	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10480.000	14.620	37.150	51.771	-22.229	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5260MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10520.000	14.015	37.260	51.275	-22.725	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10520.000	14.818	37.290	52.108	-21.892	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz) (Internal Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10600.000	14.550	37.260	51.809	-22.191	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10600.000	14.881	38.140	53.021	-20.979	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5320MHz) (Internal Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10640.000	14.690	37.150	51.840	-22.160	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	15.083	37.140	52.223	-21.777	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5500MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11000.000	16.399	36.150	52.549	-21.451	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	17.132	36.760	53.892	-20.108	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5580MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11160.000	16.664	36.890	53.555	-20.445	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11160.000	17.643	36.210	53.853	-20.147	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5700MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11400.000	16.530	36.020	52.551	-21.449	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11400.000	17.138	36.060	53.198	-20.802	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz) (Internal Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10380.000	12.939	37.290	50.229	-23.771	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10380.000	13.796	37.530	51.326	-22.674	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5230MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10460.000	13.508	37.150	50.658	-23.342	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10460.000	14.433	37.140	51.573	-22.427	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
10360.000	12.930	39.030	51.960	-22.040	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10360.000	13.724	38.460	52.184	-21.816	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10440.000	13.322	39.620	52.942	-21.058	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10440.000	14.245	38.640	52.885	-21.115	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10480.000	13.693	39.330	53.024	-20.976	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10480.000	14.620	43.590	58.211	-15.789	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
10480.000	14.620	28.880	43.501	-10.499	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10520.000	14.015	38.270	52.285	-21.715	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10520.000	14.818	37.250	52.068	-21.932	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10600.000	14.550	36.890	51.439	-22.561	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10600.000	14.881	36.810	51.691	-22.309	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10640.000	14.690	37.560	52.250	-21.750	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	15.083	36.890	51.973	-22.027	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5500MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11000.000	16.399	36.300	52.699	-21.301	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	17.132	36.290	53.422	-20.578	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11160.000	16.664	35.910	52.575	-21.425	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11160.000	17.643	36.230	53.873	-20.127	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5700MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11400.000	16.530	35.780	52.311	-21.689	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11400.000	17.138	36.040	53.178	-20.822	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5180MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10360.000	12.930	37.660	50.590	-23.410	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10360.000	13.724	37.470	51.194	-22.806	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10440.000	13.322	37.760	51.082	-22.918	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10440.000	14.245	36.980	51.225	-22.775	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5240MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10480.000	13.693	37.210	50.904	-23.096	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10480.000	14.620	36.940	51.561	-22.439	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5260MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10520.000	14.015	36.700	50.715	-23.285	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10520.000	14.818	36.890	51.708	-22.292	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10600.000	14.550	37.020	51.569	-22.431	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10600.000	14.881	36.580	51.461	-22.539	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5320MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10640.000	14.690	37.050	51.740	-22.260	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10640.000	15.083	36.540	51.623	-22.377	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5500MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11000.000	16.399	36.050	52.449	-21.551	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11000.000	17.132	36.550	53.682	-20.318	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5580MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11160.000	16.664	35.170	51.835	-22.165	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11160.000	17.643	35.230	52.873	-21.127	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5700MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11400.000	16.530	35.670	52.201	-21.799	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11400.000	17.138	35.480	52.618	-21.382	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
10380.000	12.939	36.910	49.849	-24.151	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10380.000	13.796	36.590	50.386	-23.614	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5230MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10460.000	13.508	36.790	50.298	-23.702	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10460.000	14.433	36.710	51.143	-22.857	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10540.000	14.151	36.720	50.870	-23.130	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10540.000	14.829	36.680	51.508	-22.492	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5310MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
10620.000	14.623	36.320	50.943	-23.057	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10620.000	14.970	36.010	50.980	-23.020	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5510MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11020.000	16.474	35.800	52.273	-21.727	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11020.000	46.058	36.300	53.524	-20.476	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5550MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
11100.000	16.681	34.720	51.401	-22.599	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11100.000	17.523	34.930	52.453	-21.547	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5670MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
11340.000	16.408	34.760	51.167	-22.833	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11340.000	17.167	35.130	52.297	-21.703	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
Average Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5720MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11440.000	16.779	34.500	51.279	-22.721	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11440.000	17.519	34.410	51.929	-22.071	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) (5710MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11420.000	16.648	35.160	51.807	-22.193	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11420.000	17.311	35.280	52.590	-21.410	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5210MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
10420.000	13.135	36.640	49.775	-24.225	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10420.000	14.057	36.900	50.957	-23.043	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5290MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10580.000	14.423	36.090	50.513	-23.487	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
10580.000	14.849	36.380	51.229	-22.771	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5530MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11060.000	16.580	35.480	52.060	-21.940	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11060.000	17.375	35.430	52.805	-21.195	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5610MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11220.000	16.589	35.280	51.870	-22.130	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11220.000	17.620	35.020	52.640	-21.360	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5690MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11380.000	16.480	34.930	51.411	-22.589	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*
Vertical					
Peak Detector:					
11380.000	17.125	34.810	51.936	-22.064	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
111.480	-7.489	38.479	30.991	-12.509	43.500
225.940	-9.647	41.838	32.191	-13.809	46.000
365.620	0.382	34.910	35.292	-10.708	46.000
577.080	3.221	26.373	29.594	-16.406	46.000
800.180	6.417	24.352	30.769	-15.231	46.000
932.100	7.270	23.566	30.836	-15.164	46.000
Vertical					
Peak Detector					
111.480	-3.439	36.529	33.091	-10.409	43.500
225.940	-6.267	30.340	24.073	-21.927	46.000
365.620	0.282	26.684	26.966	-19.034	46.000
538.280	1.996	24.274	26.270	-19.730	46.000
689.600	2.302	23.109	25.411	-20.589	46.000
842.860	2.378	23.165	25.543	-20.457	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
103.720	-8.230	39.354	31.123	-12.377	43.500
225.940	-9.647	40.542	30.895	-15.105	46.000
365.620	0.382	35.933	36.315	-9.685	46.000
633.340	1.530	28.524	30.054	-15.946	46.000
767.200	5.099	25.170	30.270	-15.730	46.000
932.100	7.270	23.581	30.851	-15.149	46.000
Vertical					
Peak Detector					
107.600	-4.027	39.753	35.726	-7.774	43.500
260.860	-4.870	29.444	24.574	-21.426	46.000
460.680	-1.930	23.479	21.549	-24.451	46.000
674.080	0.003	23.737	23.740	-22.260	46.000
838.980	1.961	23.554	25.515	-20.485	46.000
947.620	3.231	23.136	26.367	-19.633	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
128.940	-7.390	35.248	27.858	-15.642	43.500
266.680	-5.510	35.396	29.886	-16.114	46.000
365.620	0.382	35.317	35.699	-10.301	46.000
577.080	3.221	25.751	28.972	-17.028	46.000
767.200	5.099	24.822	29.922	-16.078	46.000
901.060	5.878	23.852	29.730	-16.270	46.000
Vertical					
Peak Detector					
107.600	-4.027	37.659	33.632	-9.868	43.500
229.820	-6.141	31.313	25.172	-20.828	46.000
390.840	-0.768	25.402	24.634	-21.366	46.000
606.180	2.246	22.612	24.858	-21.142	46.000
782.720	2.757	24.759	27.516	-18.484	46.000
920.460	3.272	22.667	25.939	-20.061	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
103.720	-8.230	38.413	30.182	-13.318	43.500
262.800	-5.484	36.472	30.988	-15.012	46.000
365.620	0.382	35.060	35.442	-10.558	46.000
546.040	4.386	23.852	28.238	-17.762	46.000
701.240	2.759	26.176	28.935	-17.065	46.000
862.260	6.327	24.488	30.815	-15.185	46.000
Vertical					
Peak Detector					
107.600	-4.027	37.668	33.641	-9.859	43.500
225.940	-6.267	29.959	23.692	-22.308	46.000
388.900	-0.726	24.730	24.004	-21.996	46.000
612.000	1.943	24.032	25.974	-20.026	46.000
786.600	2.724	24.166	26.891	-19.109	46.000
928.220	3.640	23.392	27.032	-18.968	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
107.600	-7.597	38.653	31.056	-12.444	43.500
258.920	-5.440	34.701	29.261	-16.739	46.000
365.620	0.382	35.092	35.474	-10.526	46.000
547.980	4.028	24.491	28.519	-17.481	46.000
701.240	2.759	26.994	29.753	-16.247	46.000
903.000	5.938	23.853	29.791	-16.209	46.000
Vertical					
Peak Detector					
107.600	-4.027	38.446	34.419	-9.081	43.500
253.100	-5.039	26.538	21.499	-24.501	46.000
472.320	-3.508	24.800	21.292	-24.708	46.000
687.660	2.292	23.148	25.440	-20.560	46.000
817.640	2.966	23.413	26.379	-19.621	46.000
889.420	1.224	23.232	24.456	-21.544	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5580MHz) (Internal Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
117.300	-7.350	33.898	26.548	-16.952	43.500
225.940	-9.647	39.718	30.071	-15.929	46.000
365.620	0.382	35.835	36.217	-9.783	46.000
577.080	3.221	27.521	30.742	-15.258	46.000
800.180	6.417	25.174	31.591	-14.409	46.000
930.160	7.530	22.574	30.104	-15.896	46.000
Vertical					
Peak Detector					
43.580	-10.919	43.395	32.476	-7.524	40.000
192.960	-5.655	33.477	27.822	-15.678	43.500
379.200	0.881	23.710	24.591	-21.409	46.000
598.420	1.114	23.324	24.438	-21.562	46.000
784.660	2.736	24.840	27.576	-18.424	46.000
930.160	3.830	23.126	26.956	-19.044	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz) (Internal Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
107.600	-7.597	35.415	27.818	-15.682	43.500
264.740	-5.501	36.047	30.547	-15.453	46.000
365.620	0.382	35.055	35.437	-10.563	46.000
522.760	3.176	26.050	29.226	-16.774	46.000
701.240	2.759	27.265	30.024	-15.976	46.000
862.260	6.327	24.986	31.313	-14.687	46.000
Vertical					
Peak Detector					
43.580	-10.919	43.530	32.611	-7.389	40.000
192.960	-5.655	33.185	27.530	-15.970	43.500
379.200	0.881	23.269	24.150	-21.850	46.000
604.240	2.199	22.259	24.459	-21.541	46.000
784.660	2.736	25.001	27.737	-18.263	46.000
908.820	0.730	24.298	25.028	-20.972	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
145.430	-7.730	36.913	29.183	-14.317	43.500
241.460	-6.590	35.427	28.837	-17.163	46.000
445.160	-0.432	37.977	37.545	-8.455	46.000
593.570	3.492	33.119	36.611	-9.389	46.000
741.980	3.892	33.271	37.163	-8.837	46.000
890.390	6.515	28.112	34.627	-11.373	46.000
Vertical					
Peak Detector					
102.750	-5.326	33.693	28.367	-15.133	43.500
161.920	-4.964	32.259	27.295	-16.205	43.500
365.620	0.282	25.641	25.923	-20.077	46.000
593.570	-0.388	31.421	31.033	-14.967	46.000
741.980	-0.358	33.461	33.103	-12.897	46.000
920.460	3.272	23.324	26.596	-19.404	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz) (External Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector					
34.850	-0.978	30.569	29.591	-10.409	40.000
145.430	-7.730	34.236	26.506	-16.994	43.500
445.160	-0.432	37.915	37.483	-8.517	46.000
593.570	3.492	33.007	36.499	-9.501	46.000
741.980	3.892	30.197	34.089	-11.911	46.000
891.360	6.265	29.632	35.897	-10.103	46.000
Vertical					
Peak Detector					
44.550	-10.527	41.280	30.753	-9.247	40.000
161.920	-4.964	32.207	27.243	-16.257	43.500
216.240	-6.051	37.220	31.169	-14.831	46.000
593.570	-0.388	30.270	29.882	-16.118	46.000
741.980	-0.358	33.627	33.269	-12.731	46.000
890.390	1.095	29.244	30.339	-15.661	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5580MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
144.460	-7.703	34.653	26.950	-16.550	43.500
216.240	-10.271	37.192	26.921	-19.079	46.000
445.160	-0.432	37.043	36.611	-9.389	46.000
593.570	3.492	34.326	37.818	-8.182	46.000
741.980	3.892	32.178	36.070	-9.930	46.000
891.360	6.265	27.545	33.810	-12.190	46.000
Vertical					
Peak Detector					
44.550	-10.527	41.990	31.463	-8.537	40.000
216.240	-6.051	38.143	32.092	-13.908	46.000
380.170	0.962	24.243	25.205	-20.795	46.000
614.910	1.701	28.672	30.373	-15.627	46.000
741.980	-0.358	33.918	33.560	-12.440	46.000
891.360	0.905	27.729	28.634	-17.366	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5220MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
144.460	-7.703	34.773	27.070	-16.430	43.500
288.990	-5.513	33.335	27.822	-18.178	46.000
445.160	-0.432	38.121	37.689	-8.311	46.000
593.570	3.492	31.038	34.530	-11.470	46.000
741.980	3.892	33.612	37.504	-8.496	46.000
891.360	6.265	28.819	35.084	-10.916	46.000
Vertical					
Peak Detector					
44.550	-10.527	42.290	31.763	-8.237	40.000
108.570	-3.762	32.460	28.698	-14.802	43.500
216.240	-6.051	37.947	31.896	-14.104	46.000
614.910	1.701	28.722	30.423	-15.577	46.000
741.980	-0.358	34.128	33.770	-12.230	46.000
891.360	0.905	30.080	30.985	-15.015	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5300MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
42.610	-7.561	42.379	34.818	-5.182	40.000
216.240	-10.271	37.947	27.676	-18.324	46.000
445.160	-0.432	36.090	35.658	-10.342	46.000
593.570	3.492	27.862	31.354	-14.646	46.000
741.980	3.892	34.544	38.436	-7.564	46.000
891.360	6.265	30.080	36.345	-9.655	46.000
Vertical					
Peak Detector					
62.980	-11.979	39.763	27.784	-12.216	40.000
216.240	-6.051	37.947	31.896	-14.104	46.000
445.160	-6.402	36.941	30.539	-15.461	46.000
593.570	-0.388	32.413	32.025	-13.975	46.000
692.510	1.917	28.843	30.760	-15.240	46.000
891.360	0.905	30.080	30.985	-15.015	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) (5580MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m

Horizontal

Peak Detector

144.460	-7.703	37.123	29.420	-14.080	43.500
241.460	-6.590	35.733	29.143	-16.857	46.000
445.160	-0.432	34.418	33.986	-12.014	46.000
593.570	3.492	31.808	35.300	-10.700	46.000
741.980	3.892	34.541	38.433	-7.567	46.000
890.390	6.515	29.238	35.753	-10.247	46.000

Vertical

Peak Detector

44.550	-10.527	40.833	30.306	-9.694	40.000
216.240	-6.051	35.646	29.595	-16.405	46.000
504.330	-0.055	28.707	28.652	-17.348	46.000
614.910	1.701	28.200	29.901	-16.099	46.000
741.980	-0.358	31.421	31.063	-14.937	46.000
890.390	1.095	28.982	30.077	-15.923	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5190MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
144.460	-7.703	39.028	31.325	-12.175	43.500
241.460	-6.590	37.311	30.721	-15.279	46.000
445.160	-0.432	37.453	37.021	-8.979	46.000
593.570	3.492	33.950	37.442	-8.558	46.000
741.980	3.892	33.667	37.559	-8.441	46.000
890.390	6.515	27.826	34.341	-11.659	46.000
Vertical					
Peak Detector					
40.670	-12.130	45.984	33.854	-6.146	40.000
103.720	-5.090	30.585	25.494	-18.006	43.500
216.240	-6.051	31.295	25.244	-20.756	46.000
405.390	-4.436	33.185	28.749	-17.251	46.000
614.910	1.701	29.565	31.266	-14.734	46.000
741.980	-0.358	38.351	37.993	-8.007	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5270MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
42.610	-7.561	40.194	32.633	-7.367	40.000
216.240	-10.271	34.759	24.488	-21.512	46.000
364.650	0.281	26.384	26.665	-19.335	46.000
593.570	3.492	27.744	31.236	-14.764	46.000
741.980	3.892	25.608	29.500	-16.500	46.000
890.390	6.515	23.843	30.358	-15.642	46.000
Vertical					
Peak Detector					
43.580	-10.919	41.530	30.611	-9.389	40.000
216.240	-6.051	36.008	29.957	-16.043	46.000
370.470	-0.431	24.151	23.720	-22.280	46.000
614.910	1.701	27.371	29.072	-16.928	46.000
837.040	1.606	26.560	28.166	-17.834	46.000
950.530	3.124	24.089	27.212	-18.788	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (5550MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m

Horizontal

Peak Detector

41.640	-6.175	40.862	34.688	-5.312	40.000
216.240	-10.271	36.130	25.859	-20.141	46.000
405.390	0.794	26.800	27.594	-18.406	46.000
576.110	3.127	25.293	28.420	-17.580	46.000
741.980	3.892	33.280	37.172	-8.828	46.000
891.360	6.265	28.383	34.648	-11.352	46.000

Vertical

Peak Detector

84.320	-4.204	31.874	27.670	-12.330	40.000
216.240	-6.051	37.206	31.155	-14.845	46.000
511.120	0.783	26.979	27.762	-18.238	46.000
741.980	-0.358	31.313	30.955	-15.045	46.000
890.390	1.095	26.644	27.739	-18.261	46.000
940.830	3.480	27.003	30.483	-15.517	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5720MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
103.720	-8.230	33.748	25.517	-17.983	43.500
241.460	-6.590	35.990	29.400	-16.600	46.000
445.160	-0.432	37.184	36.752	-9.248	46.000
593.570	3.492	34.900	38.392	-7.608	46.000
741.980	3.892	31.077	34.969	-11.031	46.000
890.390	6.515	30.232	36.747	-9.253	46.000
Vertical					
Peak Detector					
84.320	-4.204	32.854	28.650	-11.350	40.000
216.240	-6.051	37.313	31.262	-14.738	46.000
378.230	0.769	24.459	25.228	-20.772	46.000
593.570	-0.388	30.578	30.190	-15.810	46.000
741.980	-0.358	32.363	32.005	-13.995	46.000
940.830	3.480	26.738	30.218	-15.782	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) (5710MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
103.720	-8.230	33.292	25.061	-18.439	43.500
241.460	-6.590	36.001	29.411	-16.589	46.000
445.160	-0.432	38.900	38.468	-7.532	46.000
593.570	3.492	35.533	39.025	-6.975	46.000
741.980	3.892	34.004	37.896	-8.104	46.000
935.010	6.813	25.099	31.912	-14.088	46.000
Vertical					
Peak Detector					
102.750	-5.326	32.941	27.615	-15.885	43.500
216.240	-6.051	37.548	31.497	-14.503	46.000
374.350	0.224	26.101	26.325	-19.675	46.000
593.570	-0.388	29.926	29.538	-16.462	46.000
787.570	2.719	24.742	27.461	-18.539	46.000
890.390	1.095	29.445	30.540	-15.460	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5210MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector					
145.430	-7.730	35.217	27.487	-16.013	43.500
288.990	-5.513	34.018	28.505	-17.495	46.000
445.160	-0.432	35.396	34.964	-11.036	46.000
593.570	3.492	36.997	40.489	-5.511	46.000
741.980	3.892	33.645	37.537	-8.463	46.000
890.390	6.515	28.174	34.689	-11.311	46.000
Vertical					
Peak Detector					
84.320	-4.204	34.902	30.698	-9.302	40.000
126.030	-3.719	31.069	27.351	-16.149	43.500
296.750	-4.521	32.887	28.366	-17.634	46.000
445.160	-6.402	37.550	31.148	-14.852	46.000
682.810	1.817	25.857	27.674	-18.326	46.000
844.800	2.462	23.074	25.536	-20.464	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5290MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
143.490	-7.665	25.649	17.984	-25.516	43.500
276.380	-6.526	35.418	28.892	-17.108	46.000
445.160	-0.432	37.276	36.844	-9.156	46.000
593.570	3.492	33.767	37.259	-8.741	46.000
741.980	3.892	33.804	37.696	-8.304	46.000
884.570	6.531	22.533	29.064	-16.936	46.000
Vertical					
Peak Detector					
82.380	-4.523	33.515	28.992	-11.008	40.000
126.030	-3.719	34.442	30.724	-12.776	43.500
288.990	-5.523	33.467	27.944	-18.056	46.000
505.300	0.056	27.333	27.389	-18.611	46.000
741.980	-0.358	33.804	33.446	-12.554	46.000
891.360	0.905	30.118	31.023	-14.977	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Access Point
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5690MHz) (External Antenna)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector					
126.030	-7.349	34.894	27.546	-15.954	43.500
288.990	-5.513	34.904	29.391	-16.609	46.000
445.160	-0.432	37.913	37.481	-8.519	46.000
593.570	3.492	34.947	38.439	-7.561	46.000
741.980	3.892	34.283	38.175	-7.825	46.000
891.360	6.265	28.993	35.258	-10.742	46.000
Vertical					
Peak Detector					
126.030	-3.719	34.894	31.176	-12.324	43.500
241.460	-6.000	38.481	32.481	-13.519	46.000
445.160	-6.402	38.227	31.825	-14.175	46.000
593.570	-0.388	34.947	34.559	-11.441	46.000
692.510	1.917	29.661	31.578	-14.422	46.000
891.360	0.905	29.746	30.651	-15.349	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan., 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement:

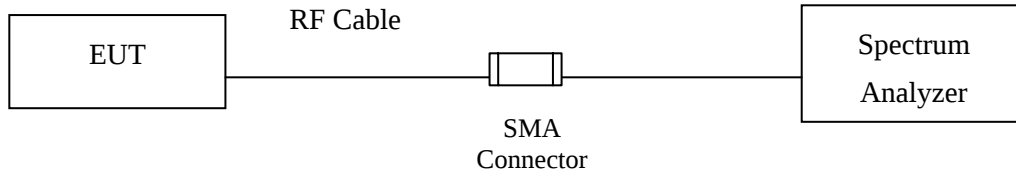

RF Radiated Measurement:

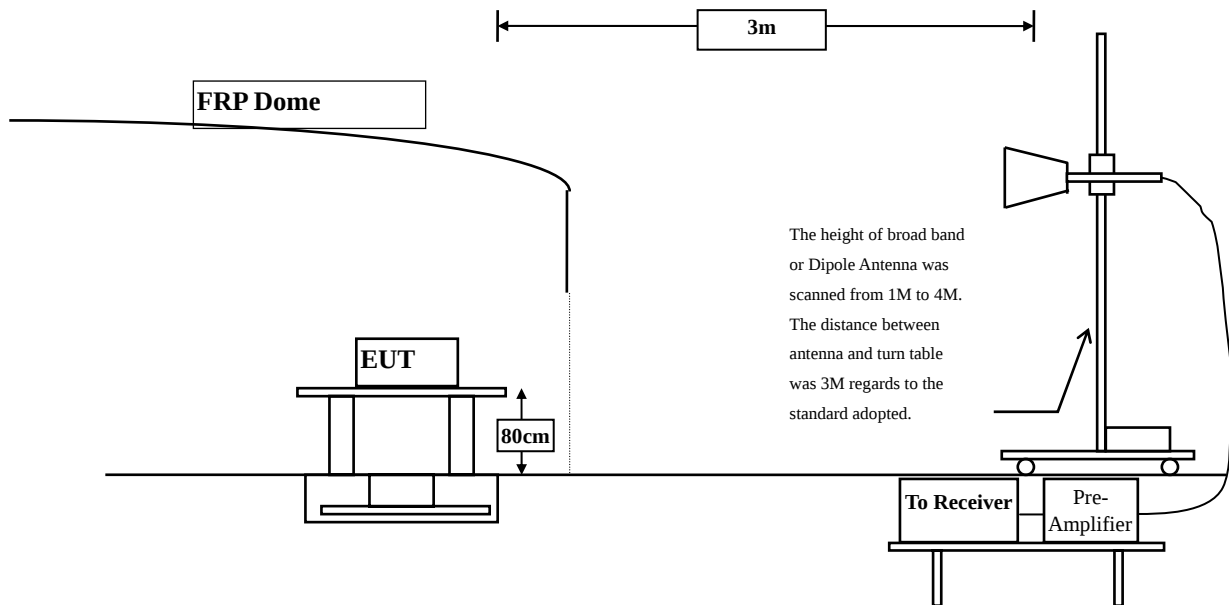

6.3. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBµV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBµV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.4. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

6.5. Uncertainty

± 3.8 dB below 1GHz
± 3.9 dB above 1GHz

6.6. Test Result of Band Edge

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (5180MHz) (Internal Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.600	2.798	54.730	57.528	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	53.886	56.682	74.00	54.00	Pass
36 (Peak)	5182.800	2.686	100.214	102.900	--	--	--
36 (Average)	5150.000	2.796	40.906	43.702	74.00	54.00	Pass
36 (Average)	5185.800	2.677	88.215	90.891	--	--	--

Figure Channel 36: Horizontal (Peak)


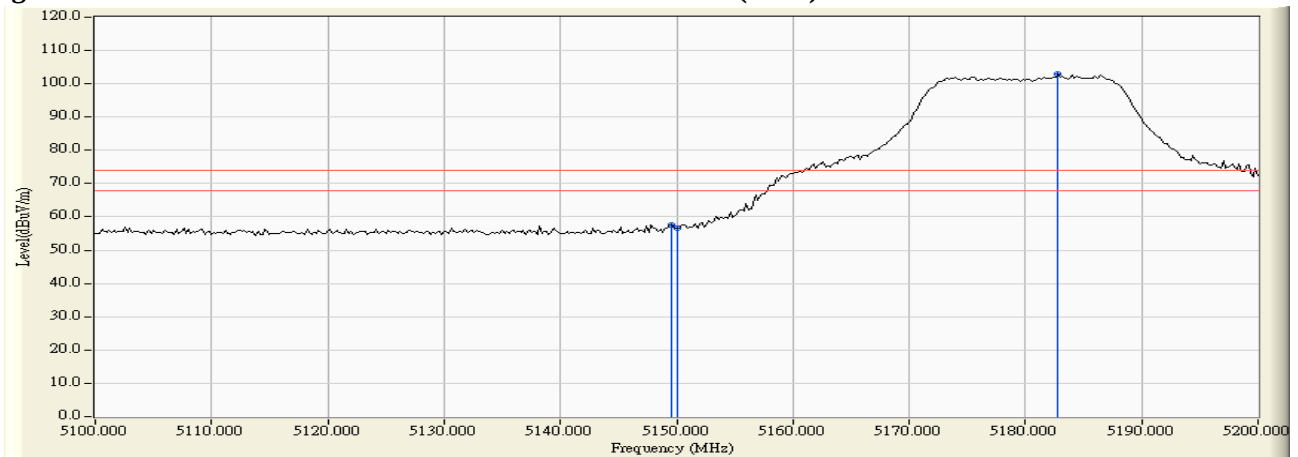


Figure Channel 36: Horizontal (Average)

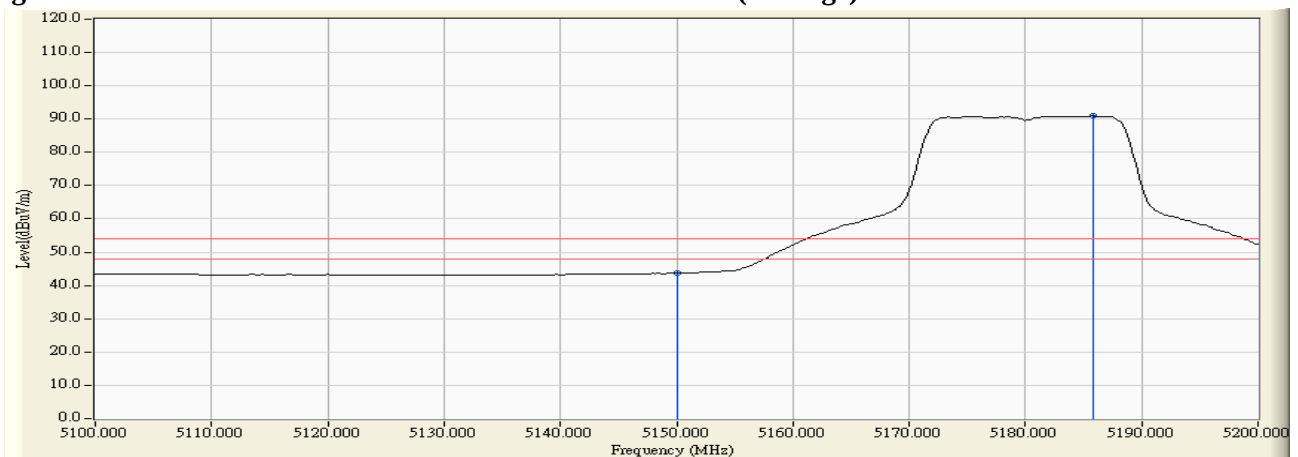

- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (5180MHz) (Internal Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5150.000	3.331	58.094	61.426	74.00	54.00	Pass
36 (Peak)	5184.600	3.494	102.421	105.915	--	--	--
36 (Average)	5150.000	3.331	41.609	44.941	74.00	54.00	Pass
36 (Average)	5184.400	3.493	90.874	94.368	--	--	--

Figure Channel 36: Vertical (Peak)


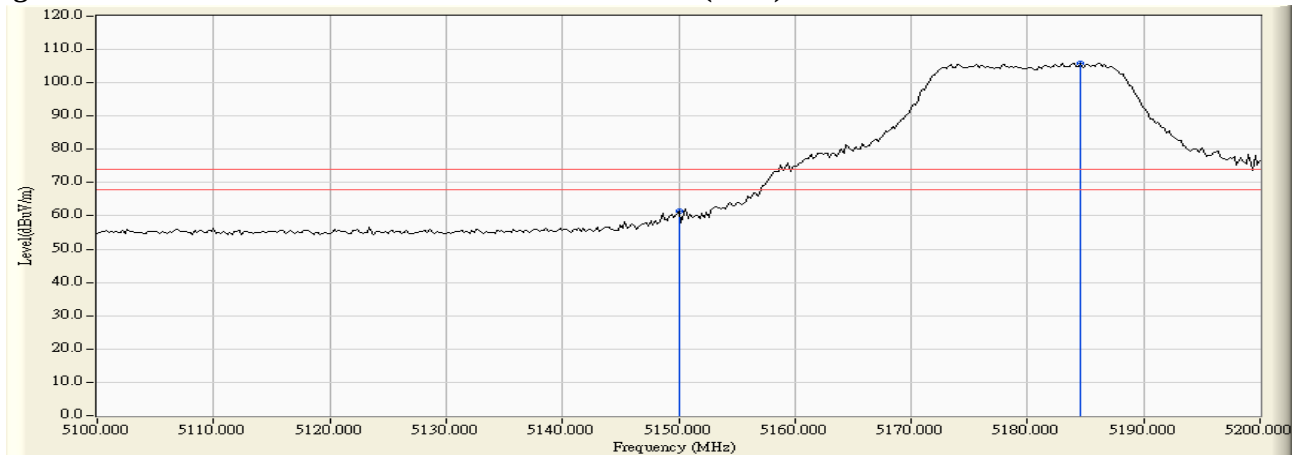


Figure Channel 36: Vertical (Average)

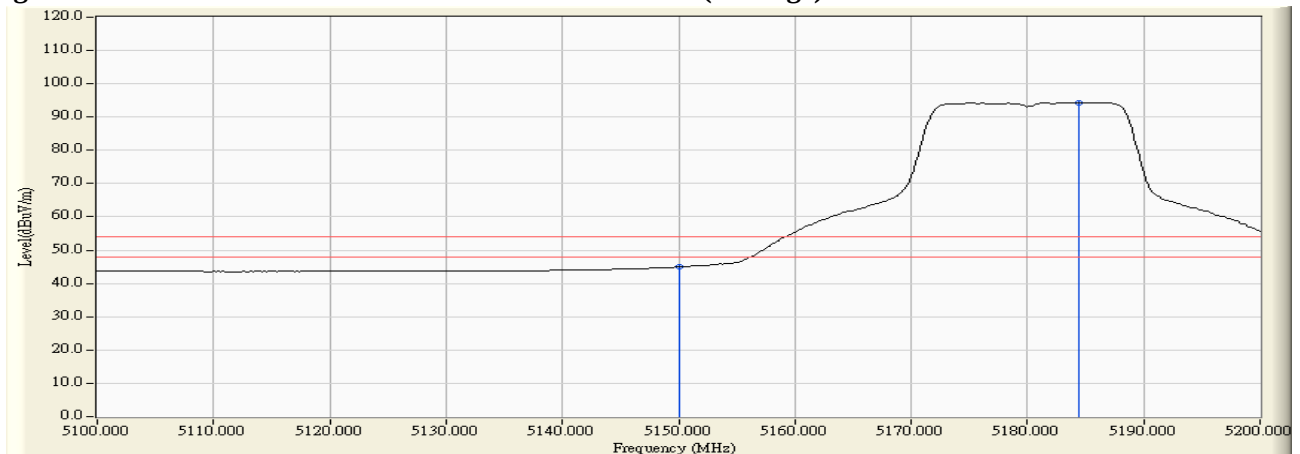

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 64 (5320MHz) (Internal Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5322.800	3.638	96.033	99.670	--	--	--
64 (Peak)	5350.000	3.575	52.234	55.809	74.00	54.00	Pass
64 (Peak)	5369.000	3.436	53.246	56.682	74.00	54.00	Pass
64 (Average)	5325.400	3.633	84.097	87.729	--	--	--
64 (Average)	5350.000	3.575	39.383	42.958	74.00	54.00	Pass

Figure Channel 64: Horizontal (Peak)


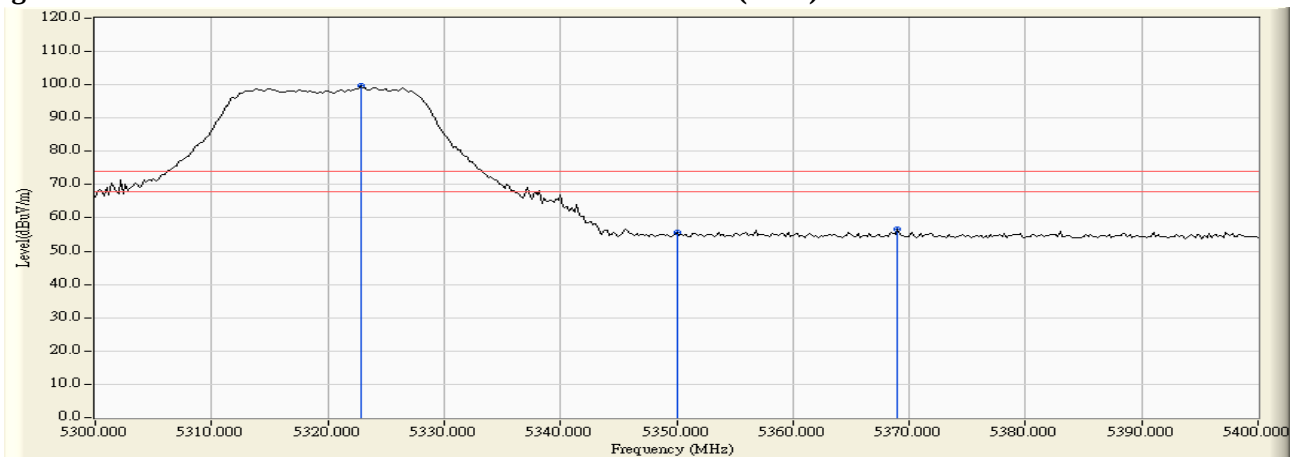


Figure Channel 64: Horizontal (Average)

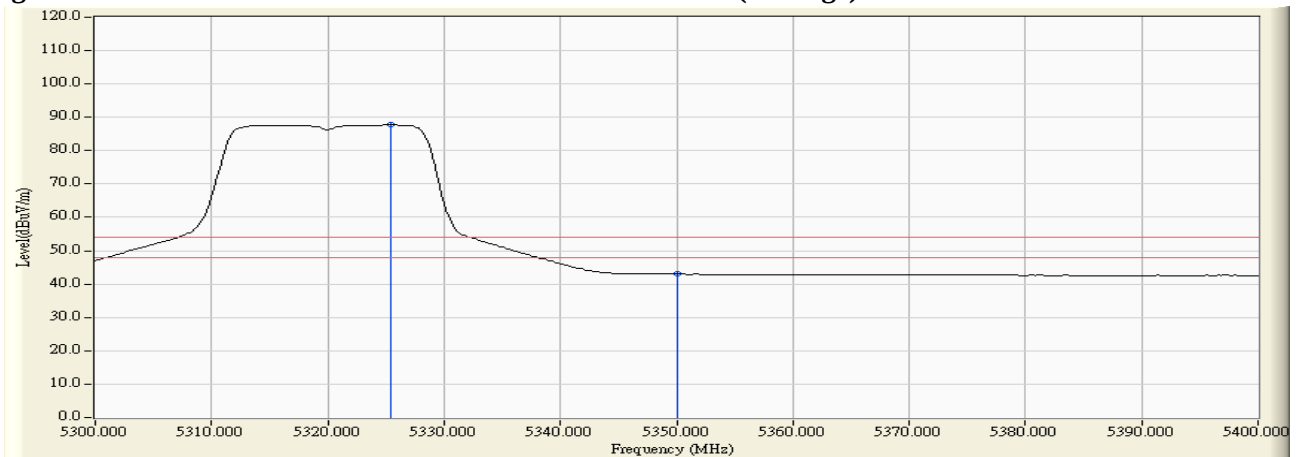

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 64 (5320MHz) (Internal Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5323.000	3.889	100.624	104.513	--	--	--
64 (Peak)	5350.000	3.900	51.350	55.250	74.00	54.00	Pass
64 (Peak)	5351.200	3.901	53.638	57.538	74.00	54.00	Pass
64 (Average)	5324.800	3.890	88.484	92.375	--	--	--
64 (Average)	5350.000	3.900	39.683	43.583	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


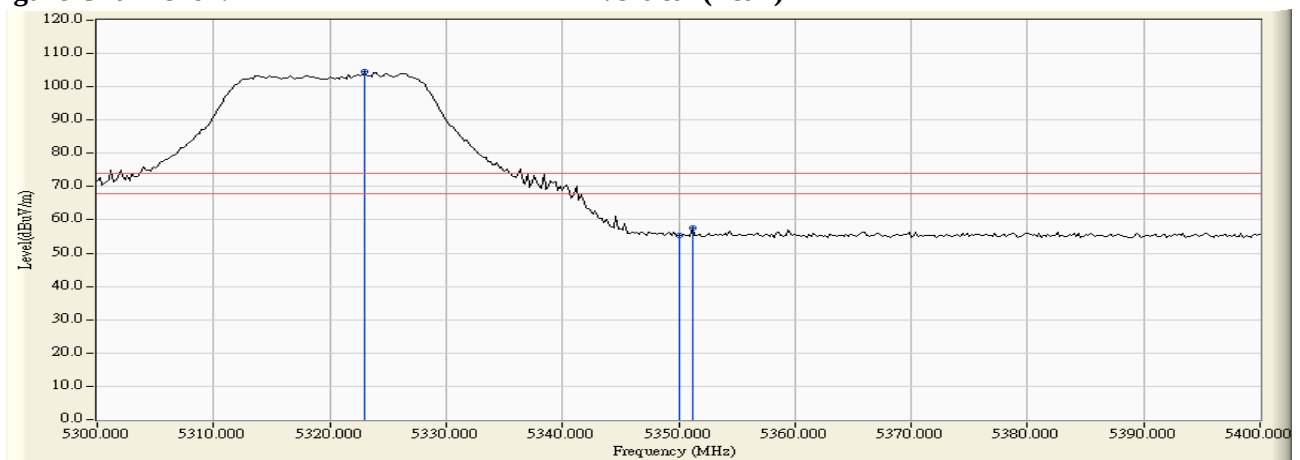


Figure Channel 64: Vertical (Average)

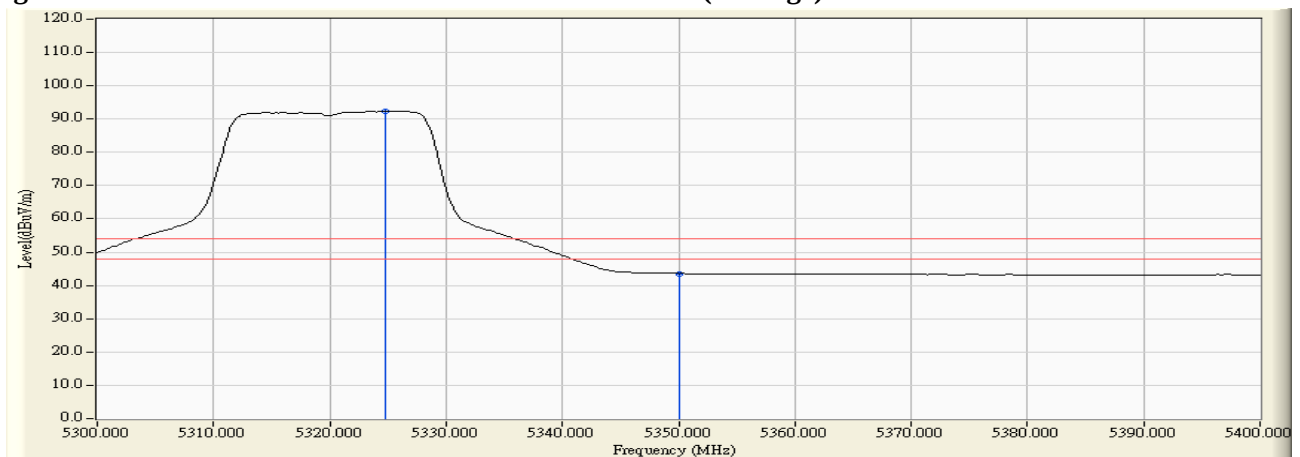

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100 (5500MHz) (Internal Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5460.000	3.775	52.227	56.002	74.00	54.00	Pass
100 (Peak)	5502.600	4.513	99.463	103.977	--	--	--
100 (Average)	5460.000	3.775	39.725	43.500	74.00	54.00	Pass
100 (Average)	5506.000	4.545	87.481	92.026	--	--	--

Figure Channel 100: Horizontal (Peak)


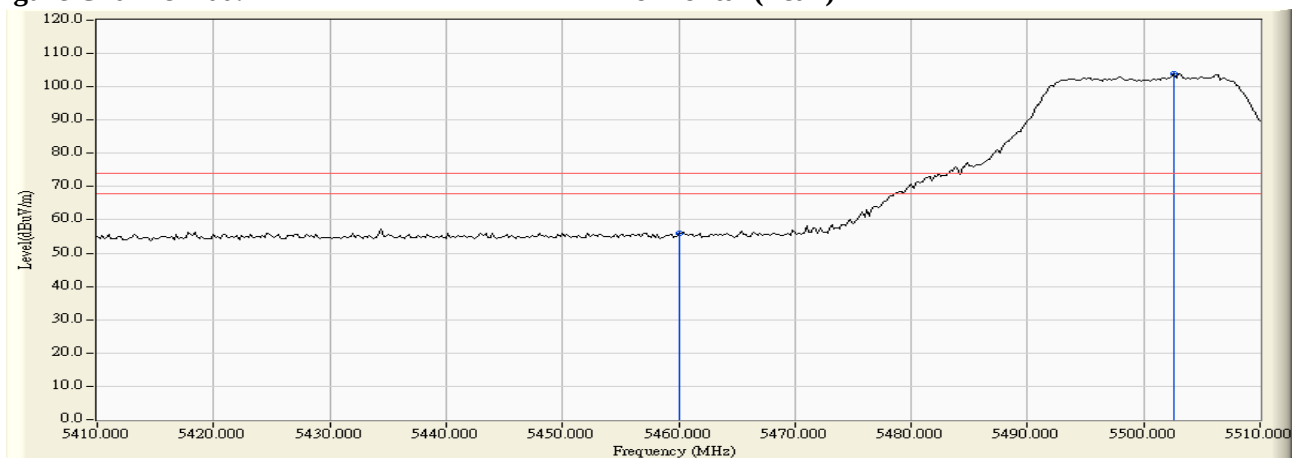


Figure Channel 100: Horizontal (Average)

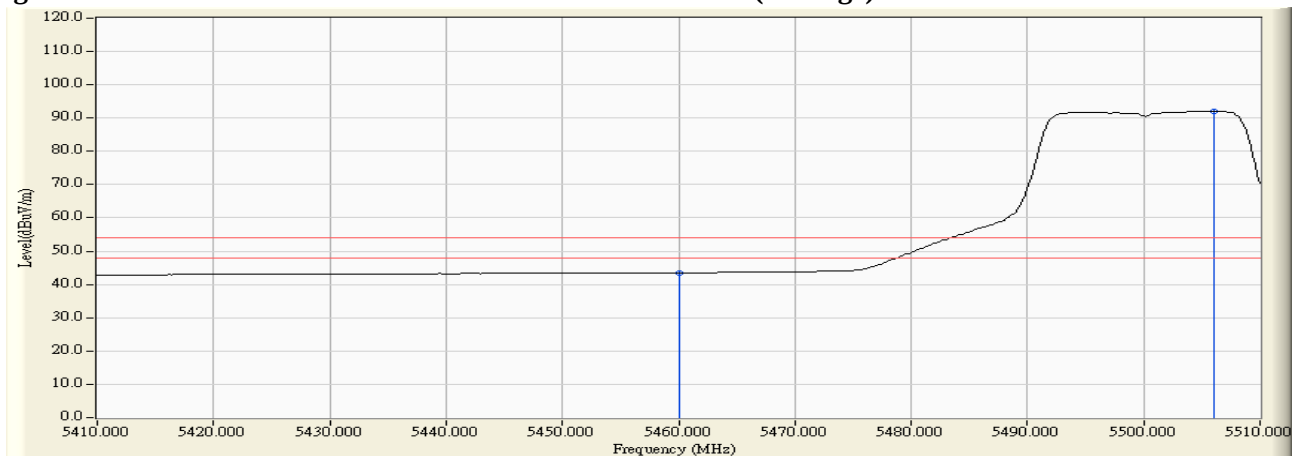

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100 (5500MHz) (Internal Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5460.000	3.934	51.115	55.050	74.00	54.00	Pass
100 (Peak)	5505.000	4.511	102.689	107.200	--	--	--
100 (Average)	5460.000	3.934	40.006	43.941	74.00	54.00	Pass
100 (Average)	5505.400	4.512	91.759	96.270	--	--	--

Figure Channel 100: Vertical (Peak)


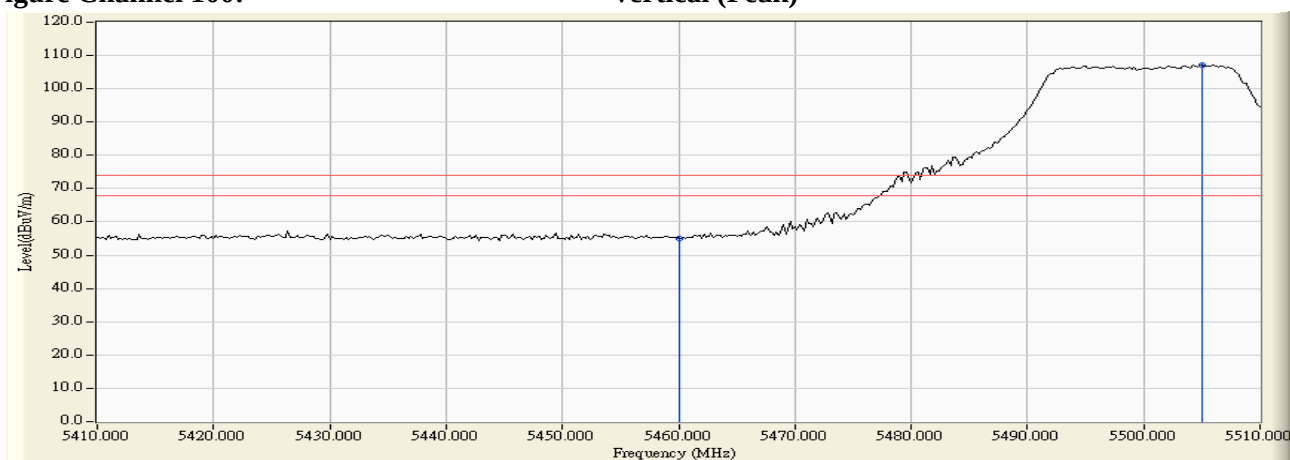


Figure Channel 100: Vertical (Average)

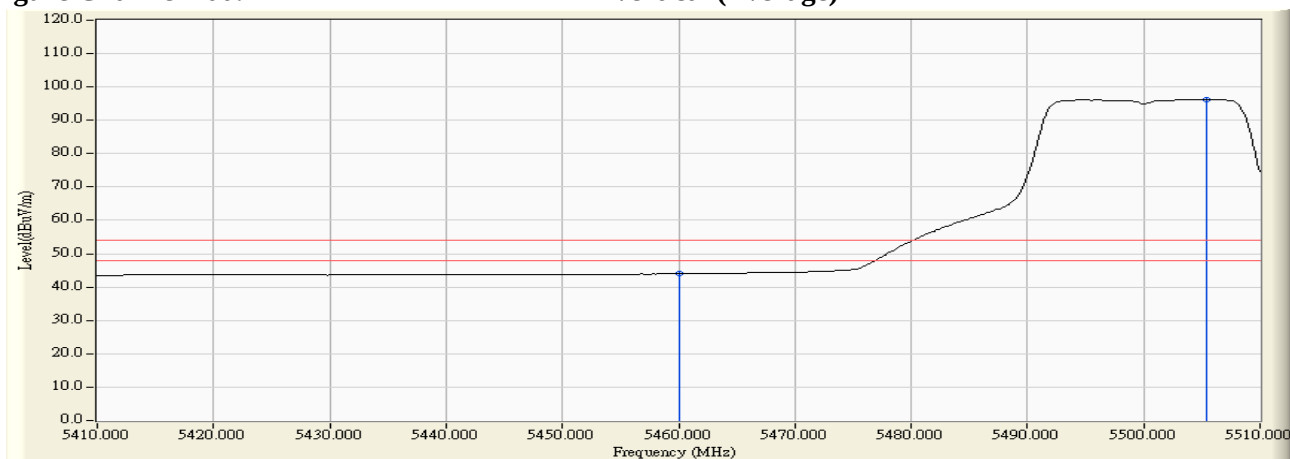

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100 (Internal Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5470.000	18.334	-66.930	-48.596	-21.596	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5470.000	19.335	-64.400	-45.065	-18.065	-27.000	Pass

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 140 (Internal Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5725.000	18.649	-68.490	-49.841	-22.841	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5725.000	19.372	-65.020	-45.648	-18.648	-27.000	Pass

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 36 (5180MHz) (Internal Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.000	2.803	54.169	56.972	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	53.422	56.218	74.00	54.00	Pass
36 (Peak)	5185.800	2.677	101.864	104.540	--	--	--
36 (Average)	5150.000	2.796	41.076	43.872	74.00	54.00	Pass
36 (Average)	5186.400	2.673	87.687	90.361	--	--	--

Figure Channel 36: Horizontal (Peak)


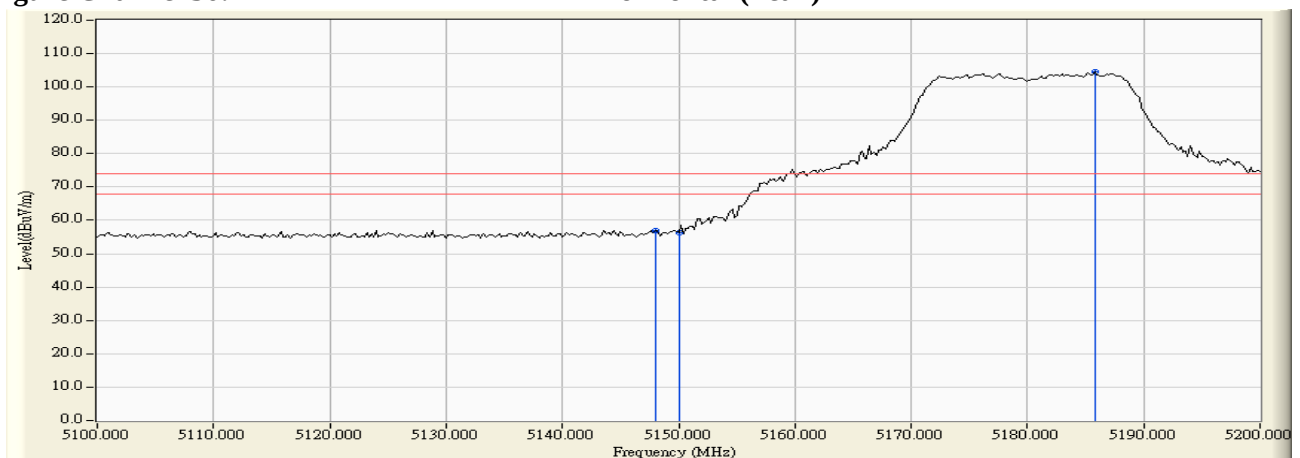


Figure Channel 36: Horizontal (Average)

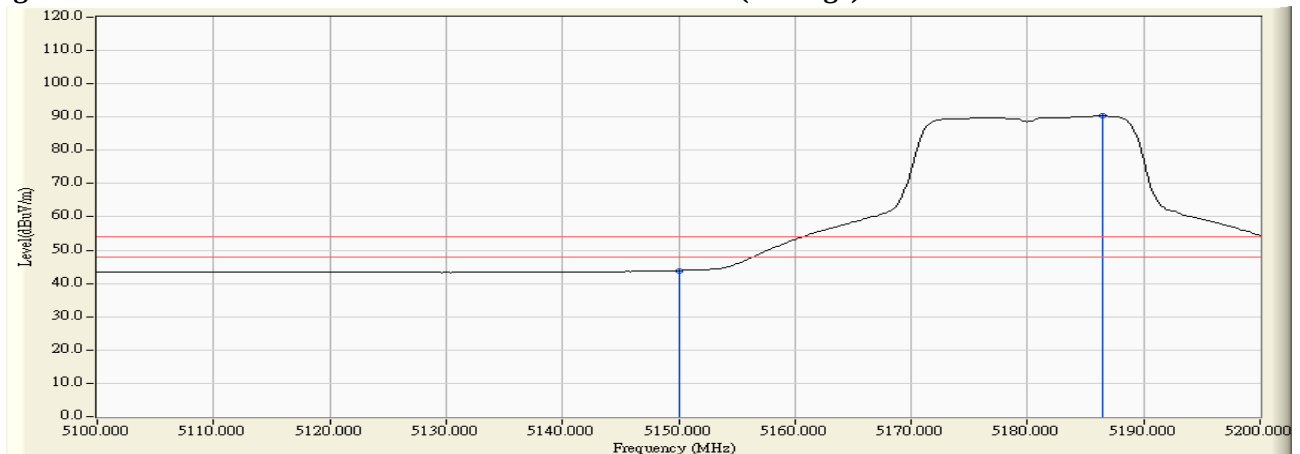

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 36 (5180MHz) (Internal Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
36 (Peak)	5149.600	3.330	63.153	66.483	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	58.302	61.634	74.00	54.00	Pass
36 (Peak)	5185.000	3.497	105.909	109.405	--	--	--
36 (Average)	5150.000	36.316	42.767	46.099	74.00	54.00	Pass
36 (Average)	5184.400	36.481	91.913	95.407	--	--	--

Figure Channel 36: Vertical (Peak)


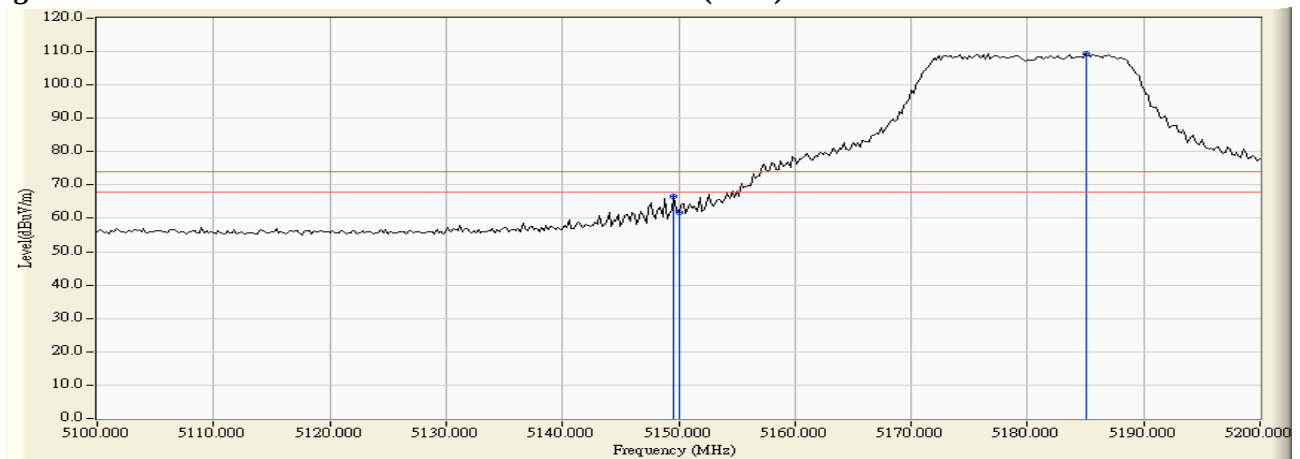


Figure Channel 36: Vertical (Average)

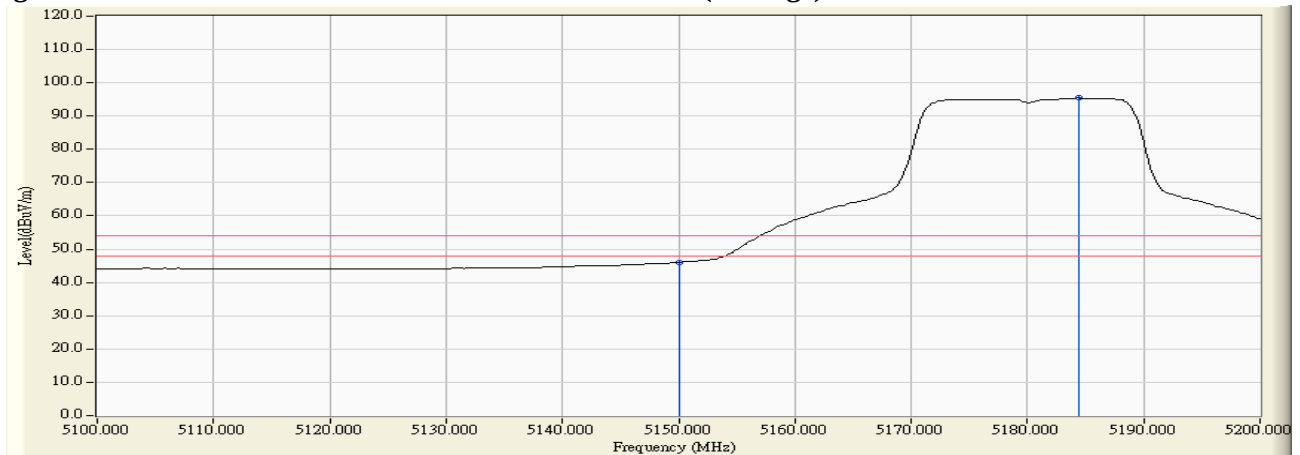

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 64 (5320MHz) (Internal Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5326.200	3.632	98.999	102.630	--	--	--
64 (Peak)	5350.000	3.575	51.340	54.915	74.00	54.00	Pass
64 (Peak)	5356.600	3.534	52.361	55.894	74.00	54.00	Pass
64 (Average)	5325.000	3.634	84.976	88.609	--	--	--
64 (Average)	5350.000	3.575	39.483	43.058	74.00	54.00	Pass

Figure Channel 64: Horizontal (Peak)


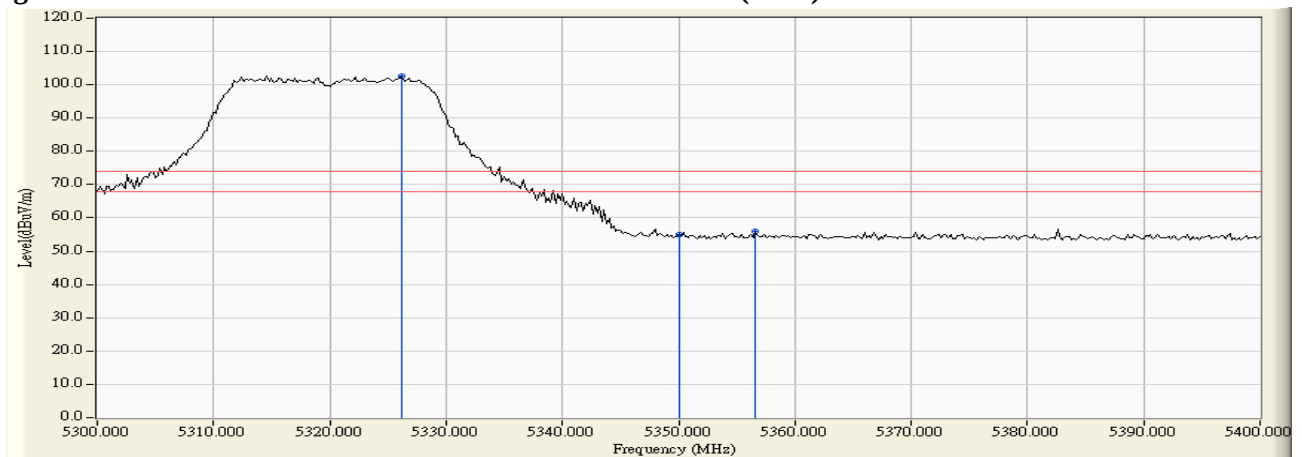


Figure Channel 64: Horizontal (Average)

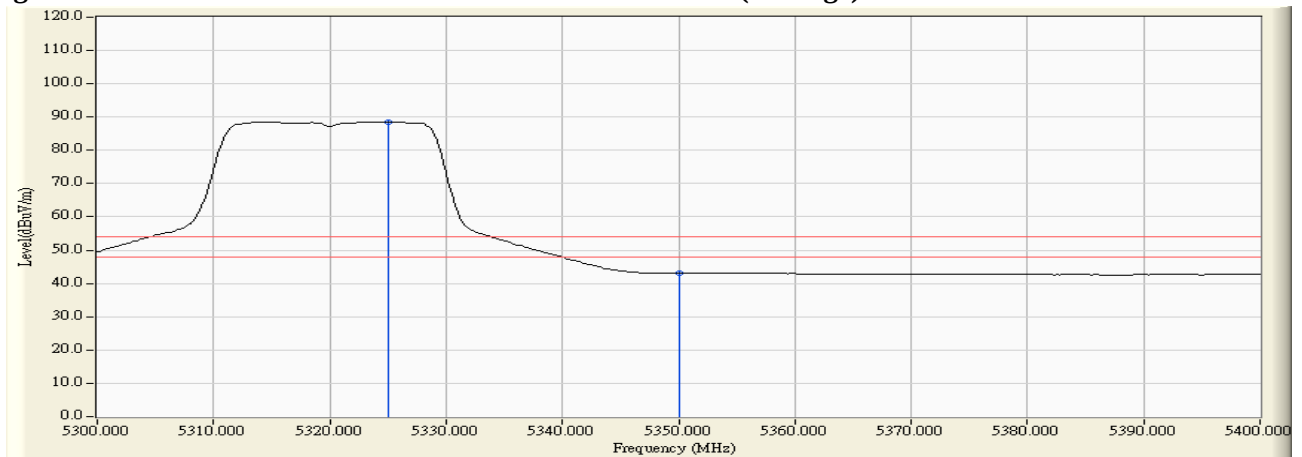

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 64 (5320MHz) (Internal Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5327.400	3.893	103.585	107.478	--	--	--
64 (Peak)	5350.000	3.900	52.028	55.928	74.00	54.00	Pass
64 (Peak)	5354.200	3.889	52.740	56.629	74.00	54.00	Pass
64 (Average)	5326.200	3.892	89.796	93.688	--	--	--
64 (Average)	5350.000	3.900	40.255	44.155	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


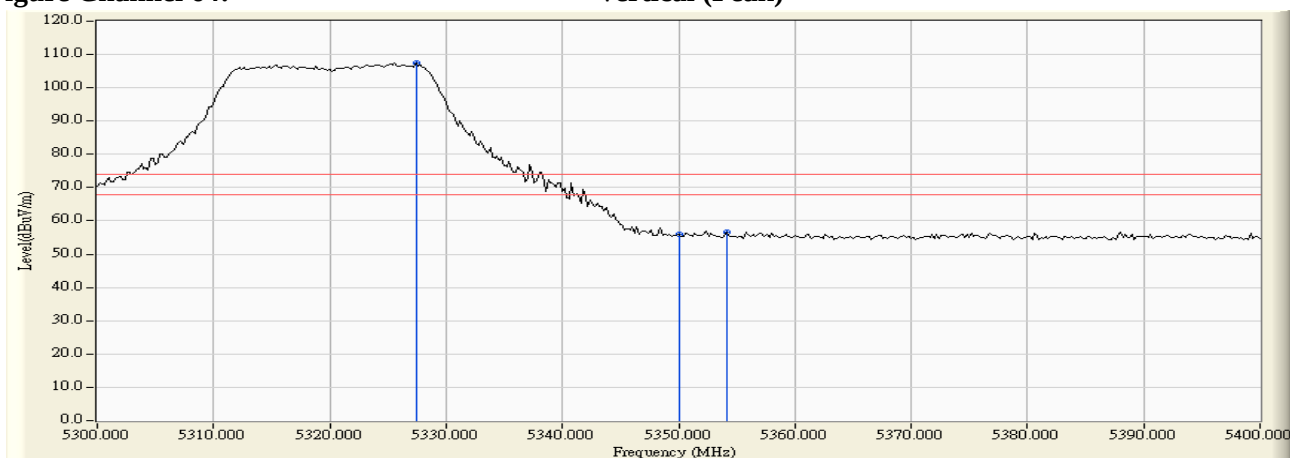


Figure Channel 64: Vertical (Average)

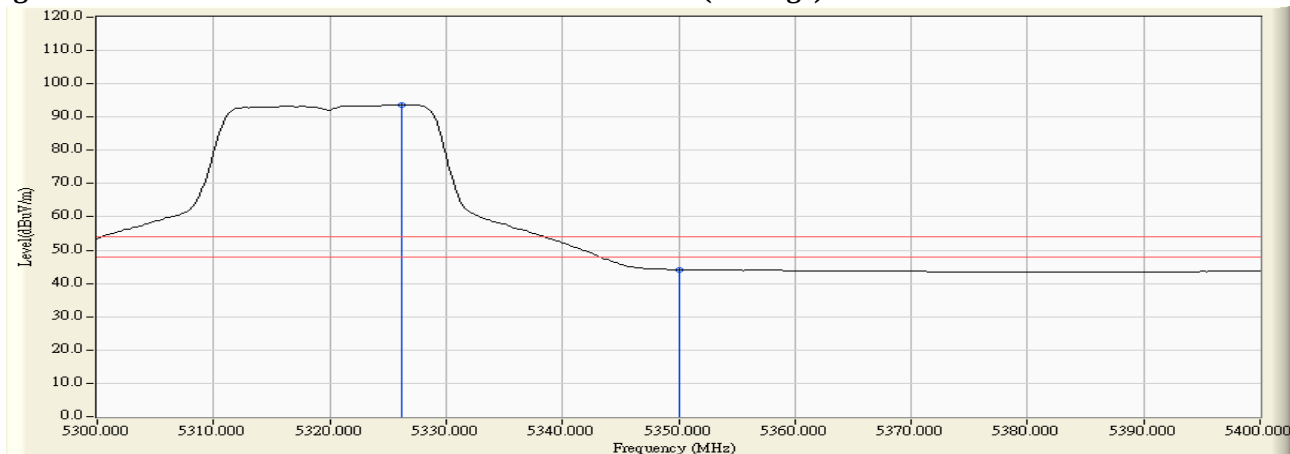

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100 (5500MHz) (Internal Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5458.400	3.745	52.717	56.461	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	51.463	55.238	74.00	54.00	Pass
100 (Peak)	5506.200	4.545	101.467	106.012	--	--	--
100 (Average)	5460.000	3.775	39.859	43.634	74.00	54.00	Pass
100 (Average)	5506.200	4.545	87.780	92.325	--	--	--

Figure Channel 100: Horizontal (Peak)


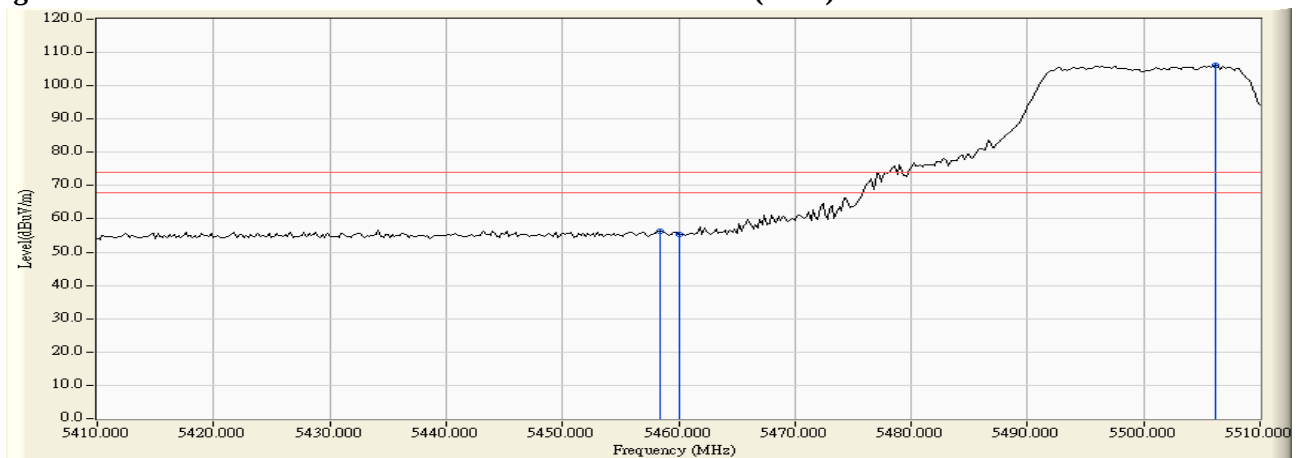


Figure Channel 100: Horizontal (Average)

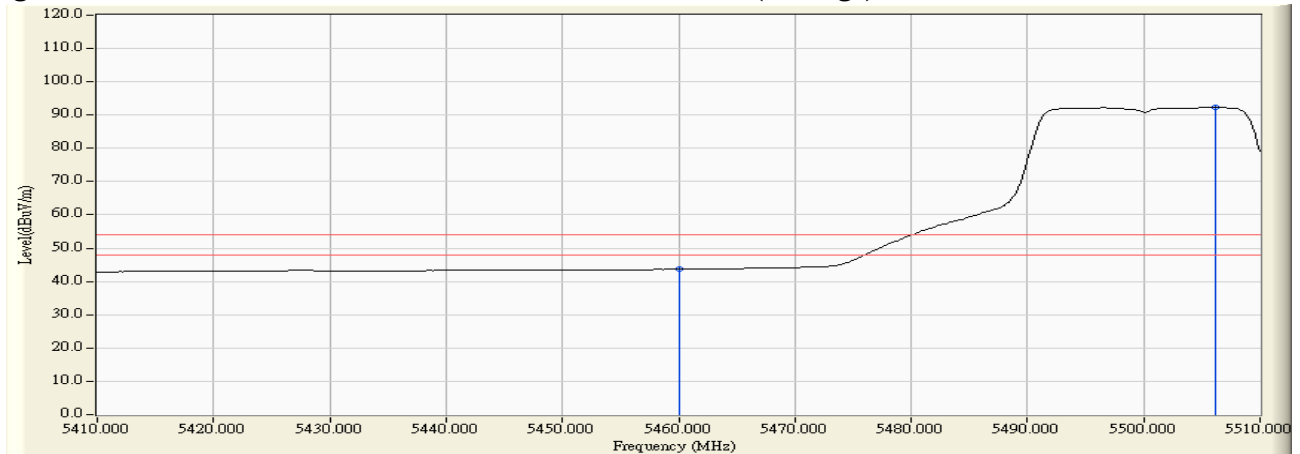

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100 (5500MHz) (Internal Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5456.600	3.885	57.051	60.937	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	55.362	59.297	74.00	54.00	Pass
100 (Peak)	5493.200	4.390	108.802	113.192	--	--	--
100 (Average)	5460.000	3.934	40.844	44.779	74.00	54.00	Pass
100 (Average)	5505.200	4.511	94.621	99.132	--	--	--

Figure Channel 100: Vertical (Peak)


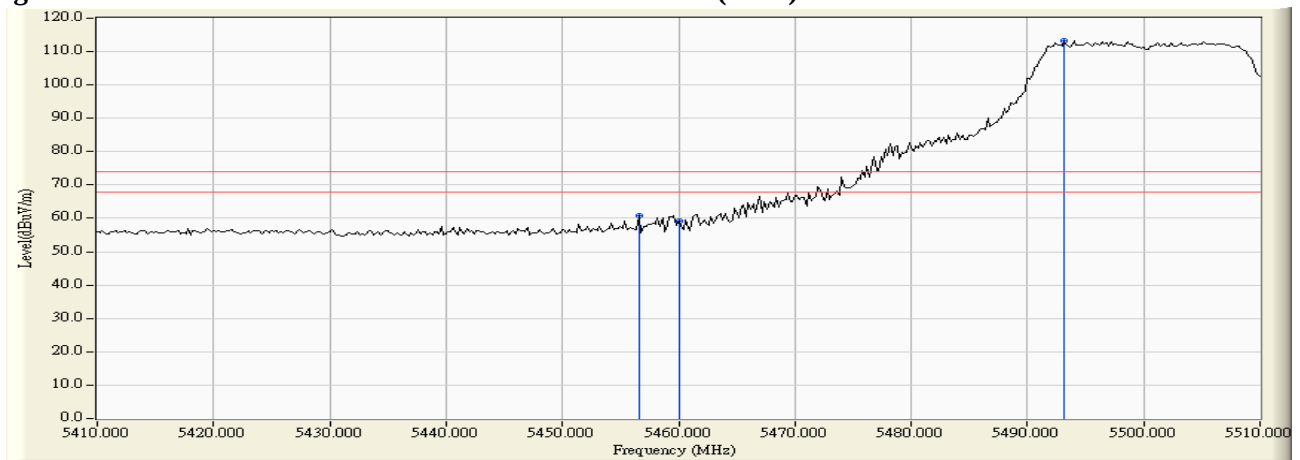


Figure Channel 100: Vertical (Average)

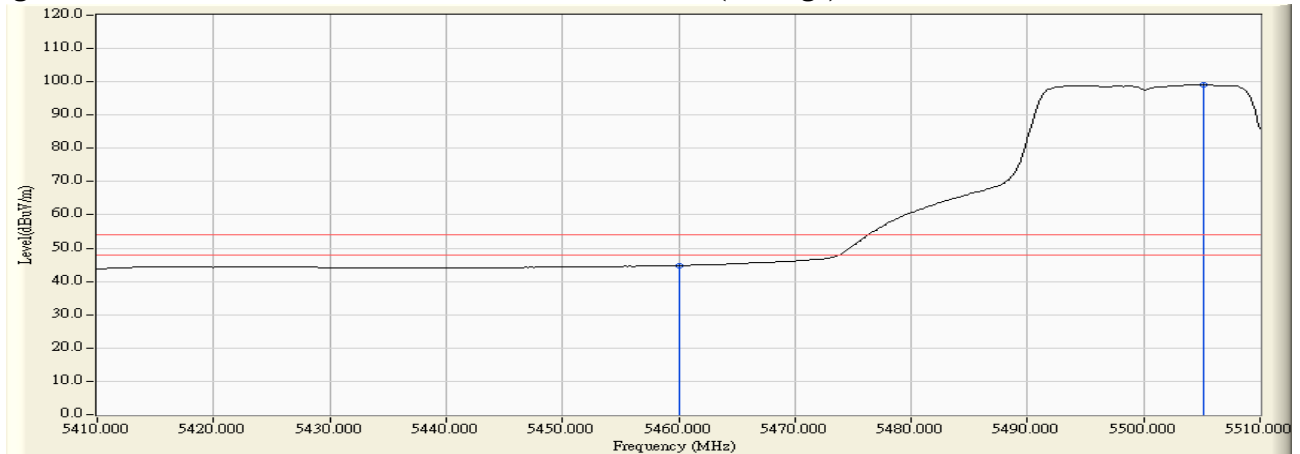

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100 (Internal Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5470.000	18.334	-68.410	-50.076	-23.076	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5470.000	19.335	-64.530	-45.195	-18.195	-27.000	Pass

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 140 (Internal Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5725.000	18.649	-67.580	-48.931	-21.931	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5725.000	19.372	-62.540	-43.168	-16.168	-27.000	Pass

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 38 (5190MHz) (Internal Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
38 (Peak)	5150.000	3.340	57.762	61.102	74.00	54.00	Pass
38 (Peak)	5172.400	3.262	94.645	97.907	--	--	--
38 (Average)	5150.000	3.340	38.394	41.734	74.00	54.00	Pass
38 (Average)	5195.200	3.172	74.250	77.423	--	--	--

Figure Channel 38: Horizontal (Peak)


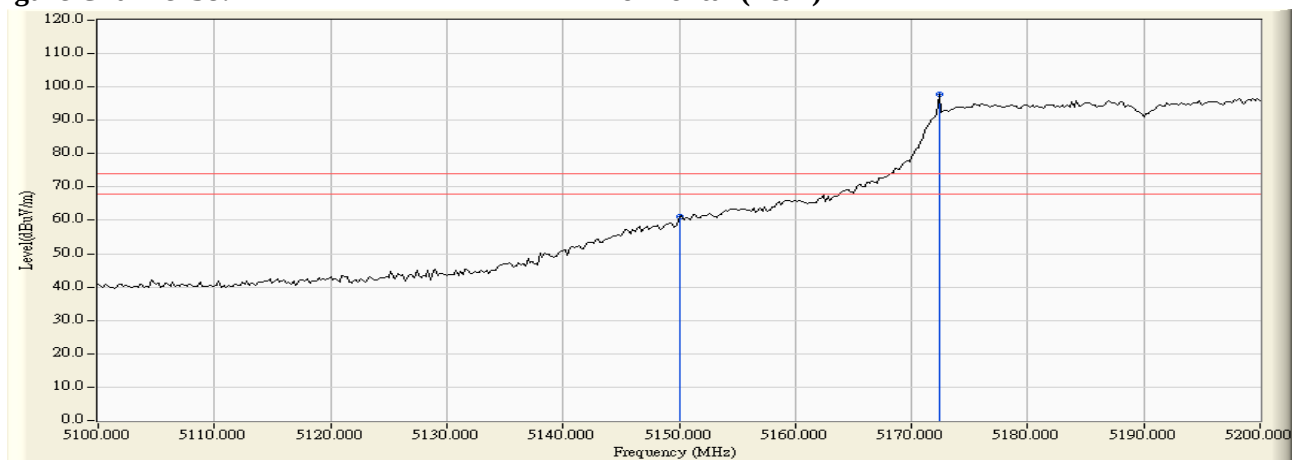


Figure Channel 38: Horizontal (Average)

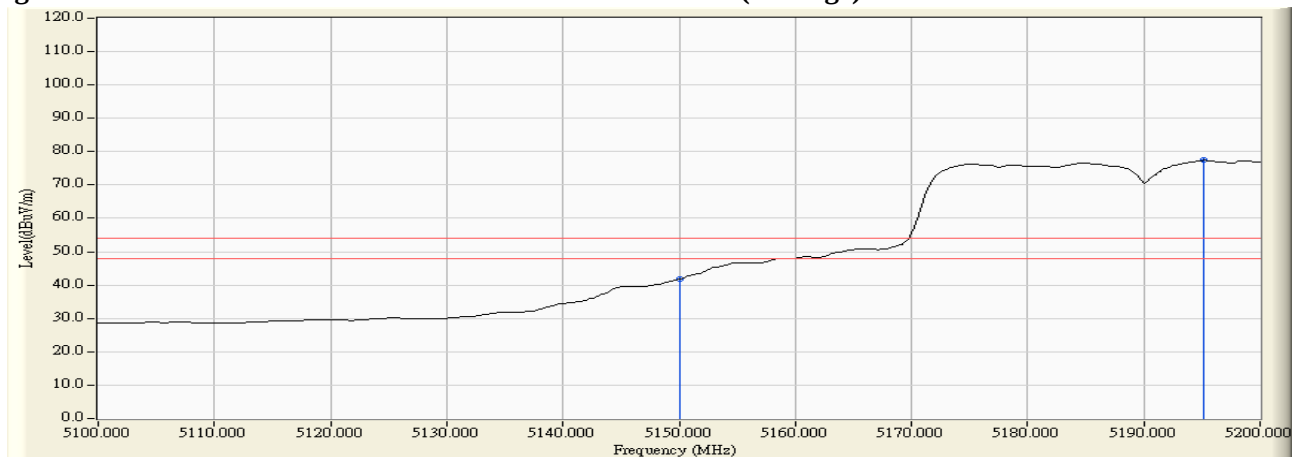

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 38 (5190MHz) (Internal Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5149.800	5.260	62.144	67.403	74.00	54.00	Pass
38 (Peak)	5150.000	5.260	60.068	65.328	74.00	54.00	Pass
38 (Peak)	5199.600	5.387	97.188	102.574	--	--	--
38 (Average)	5150.000	5.260	41.586	46.846	74.00	54.00	Pass
38 (Average)	5195.200	5.375	77.490	82.866	--	--	--

Figure Channel 38: Vertical (Peak)


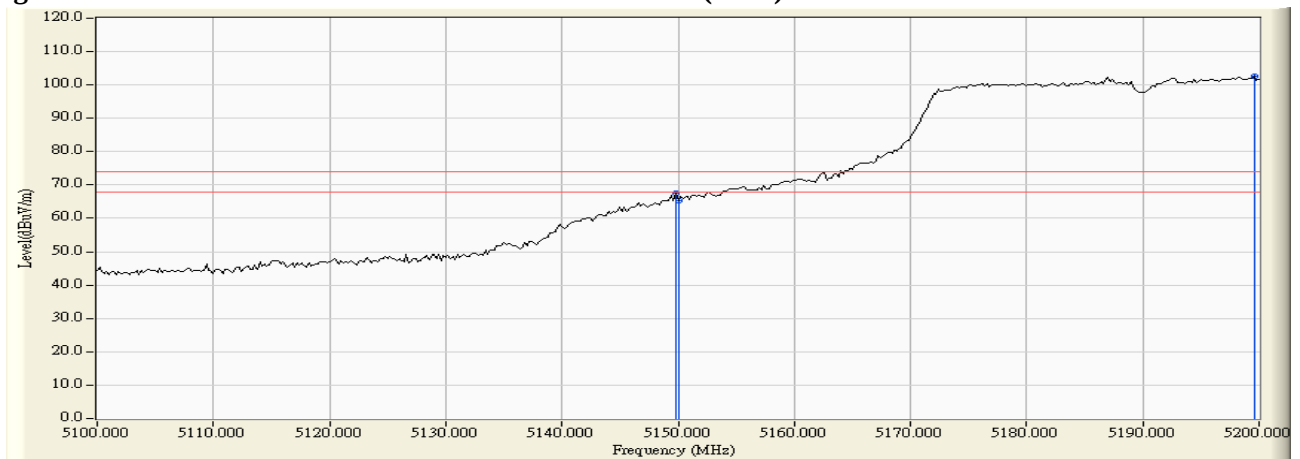


Figure Channel 38: Vertical (Average)

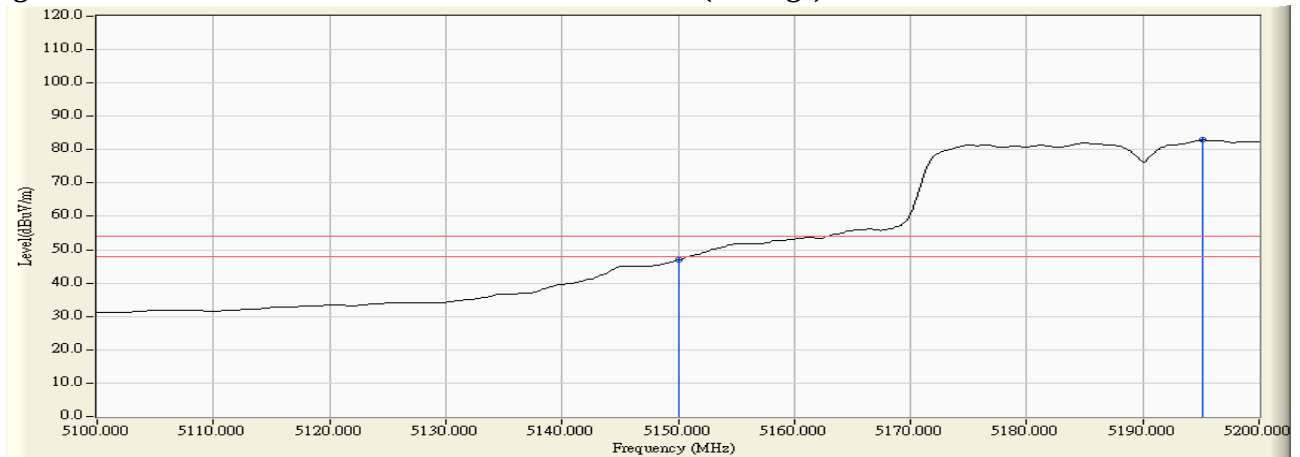

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (5180MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.000	2.800	52.904	55.704	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	51.890	54.686	74.00	54.00	Pass
36 (Peak)	5183.200	2.685	92.938	95.623	--	--	--
36 (Average)	5150.000	2.796	40.185	42.981	74.00	54.00	Pass
36 (Average)	5175.000	2.712	82.605	85.317	--	--	--

Figure Channel 36: Horizontal (Peak)


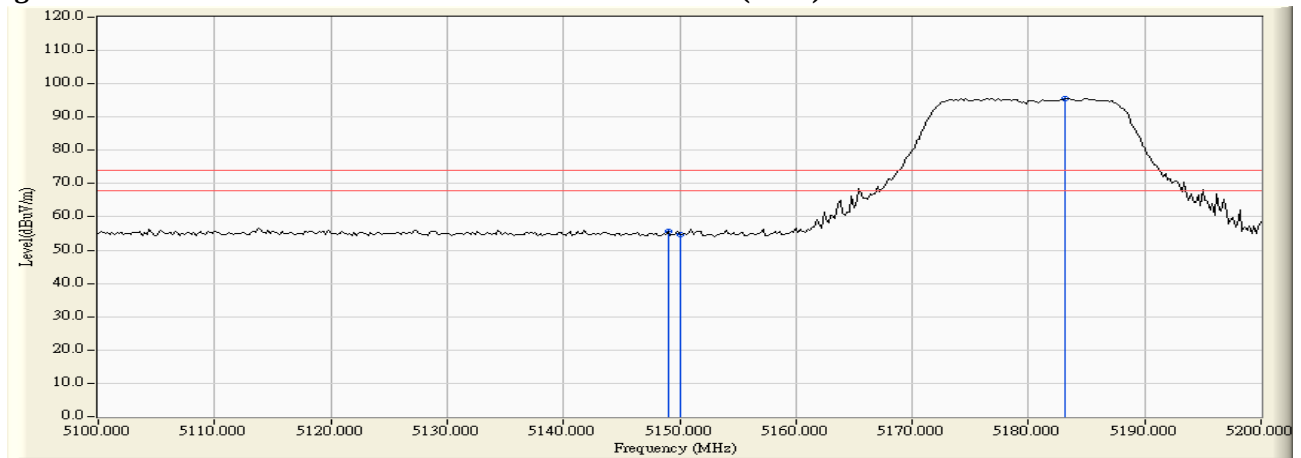


Figure Channel 36: Horizontal (Average)

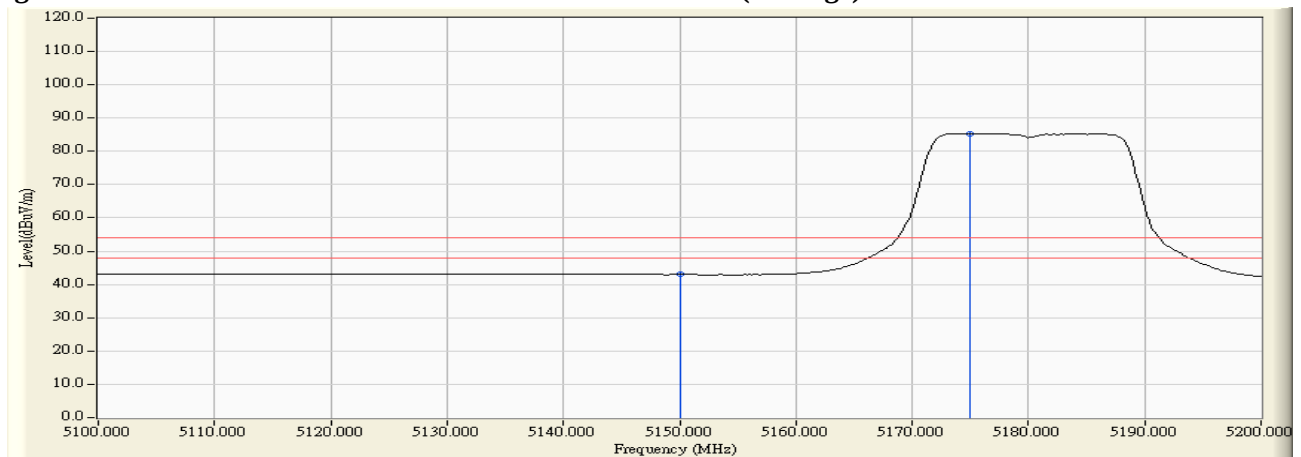

- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (5180MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.000	3.322	53.939	57.261	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	52.961	56.293	74.00	54.00	Pass
36 (Peak)	5175.600	3.452	103.769	107.221	--	--	--
36 (Average)	5150.000	3.331	41.723	45.055	74.00	54.00	Pass
36 (Average)	5184.600	3.494	93.160	96.654	--	--	--

Figure Channel 36: Vertical (Peak)


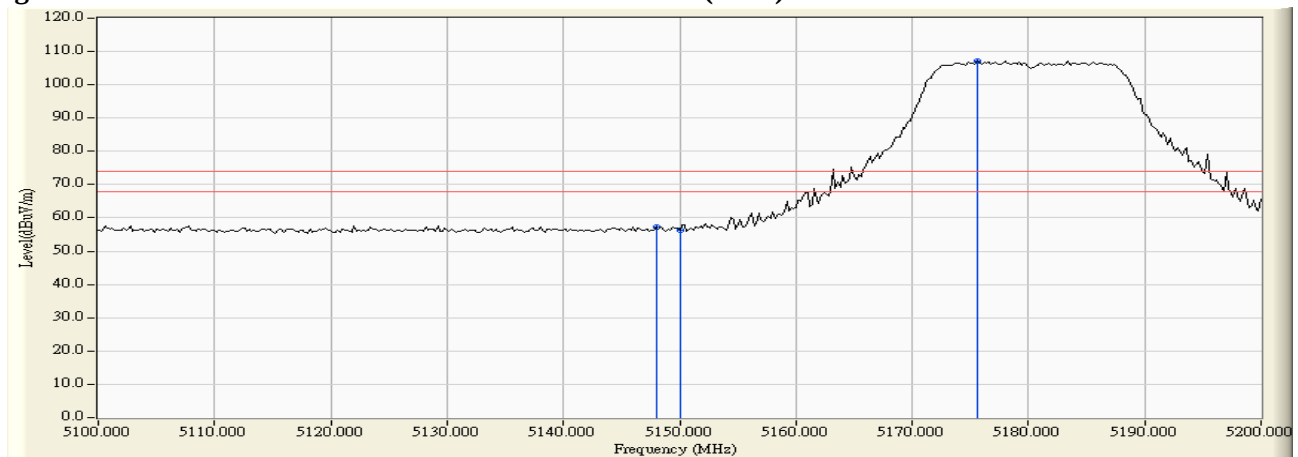


Figure Channel 36: Vertical (Average)

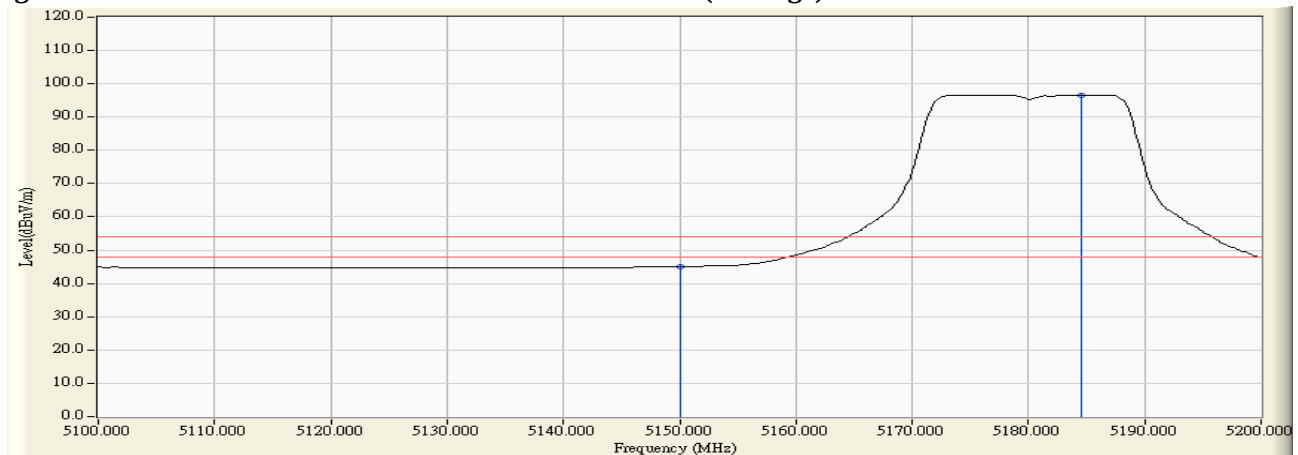

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 64 (5320MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5317.400	3.648	93.390	97.037	--	--	--
64 (Peak)	5350.000	3.575	51.102	54.677	74.00	54.00	Pass
64 (Peak)	5351.800	3.570	53.178	56.748	74.00	54.00	Pass
64 (Average)	5314.000	3.654	82.921	86.575	--	--	--
64 (Average)	5350.000	3.575	39.380	42.955	74.00	54.00	Pass

Figure Channel 64: Horizontal (Peak)


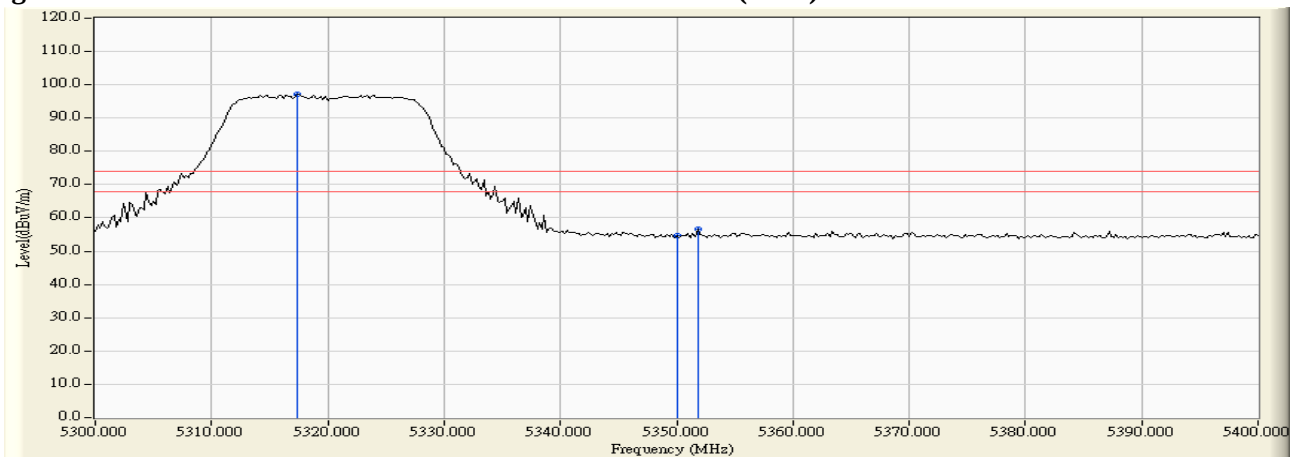


Figure Channel 64: Horizontal (Average)

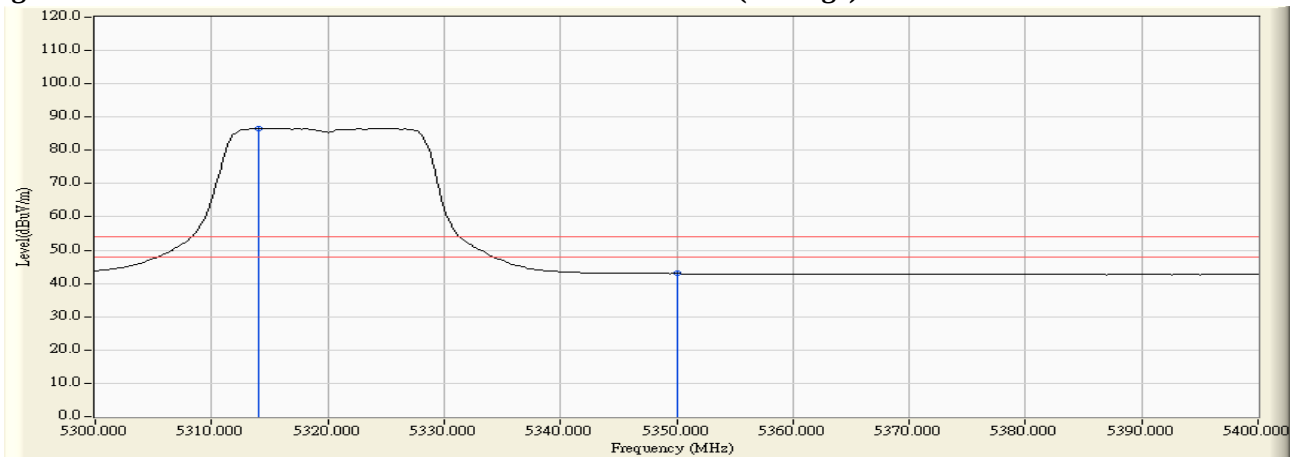

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 64 (5320MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5314.600	3.882	101.507	105.389	--	--	--
64 (Peak)	5350.000	3.900	52.464	56.364	74.00	54.00	Pass
64 (Peak)	5363.600	3.840	52.942	56.782	74.00	54.00	Pass
64 (Average)	5325.800	3.891	91.513	95.404	--	--	--
64 (Average)	5350.000	3.900	40.569	44.469	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


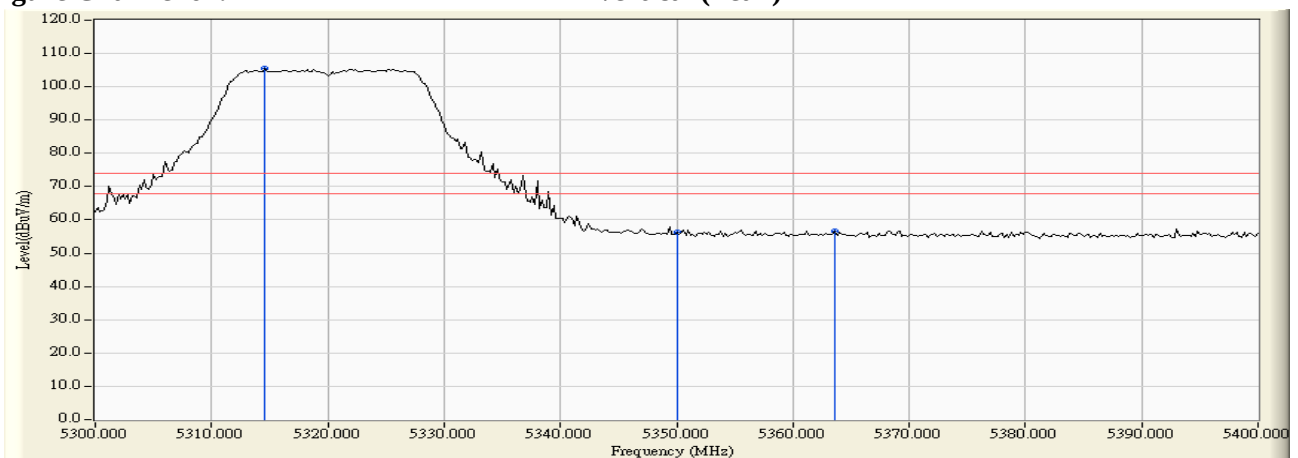


Figure Channel 64: Vertical (Average)

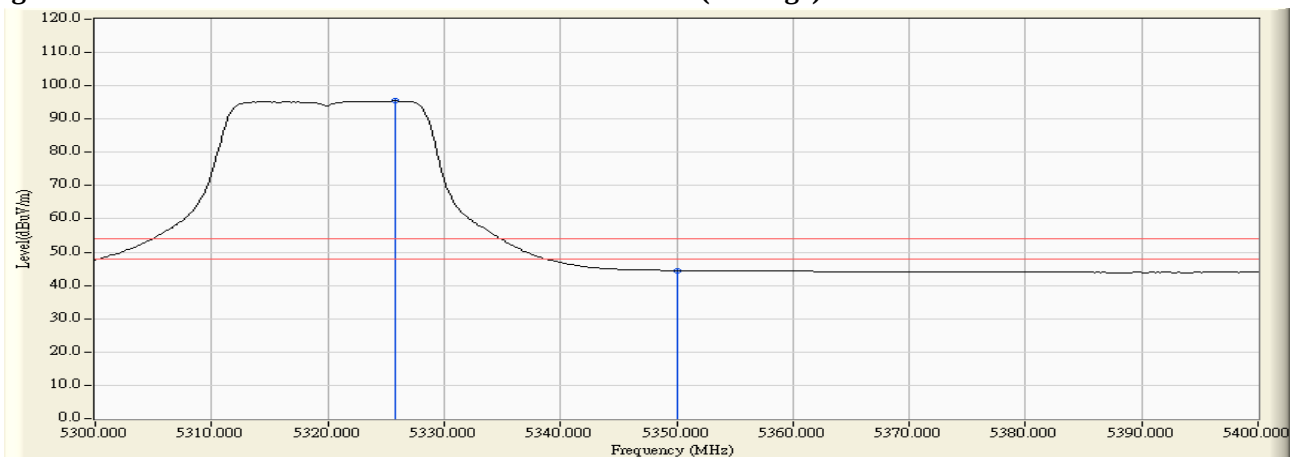

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100 (5500MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5460.000	3.775	51.913	55.688	74.00	54.00	Pass
100 (Peak)	5496.200	4.427	95.918	100.345	--	--	--
100 (Average)	5460.000	3.775	39.783	43.558	74.00	54.00	Pass
100 (Average)	5493.600	4.392	85.602	89.994	--	--	--

Figure Channel 100: Horizontal (Peak)


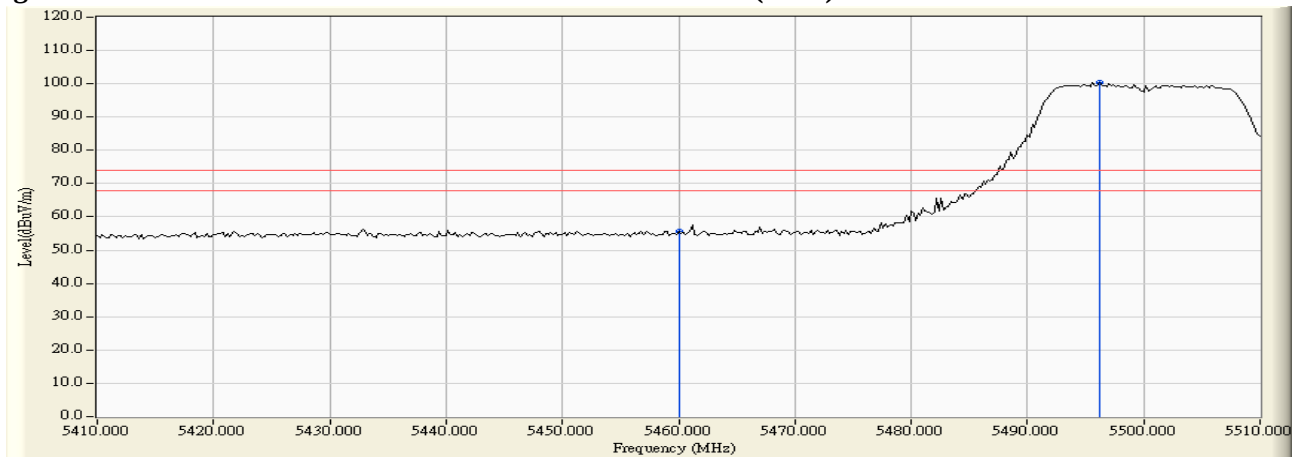


Figure Channel 100: Horizontal (Average)

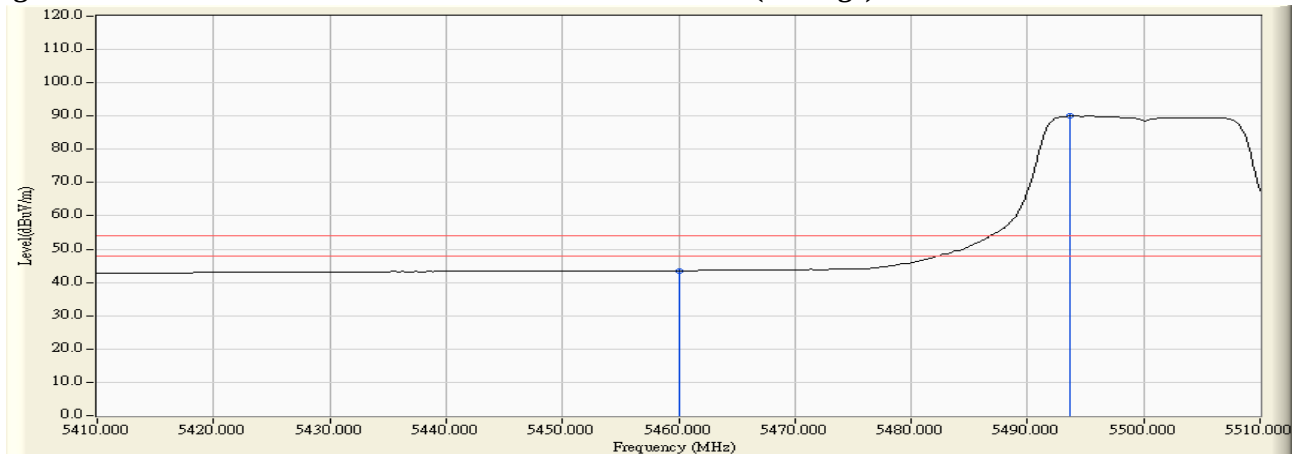

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100 (5500MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5446.000	3.804	53.636	57.440	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	52.229	56.164	74.00	54.00	Pass
100 (Peak)	5503.400	4.495	103.280	107.775	--	--	--
100 (Average)	5460.000	3.934	40.916	44.851	74.00	54.00	Pass
100 (Average)	5505.800	4.511	92.797	97.308	--	--	--

Figure Channel 100: Vertical (Peak)


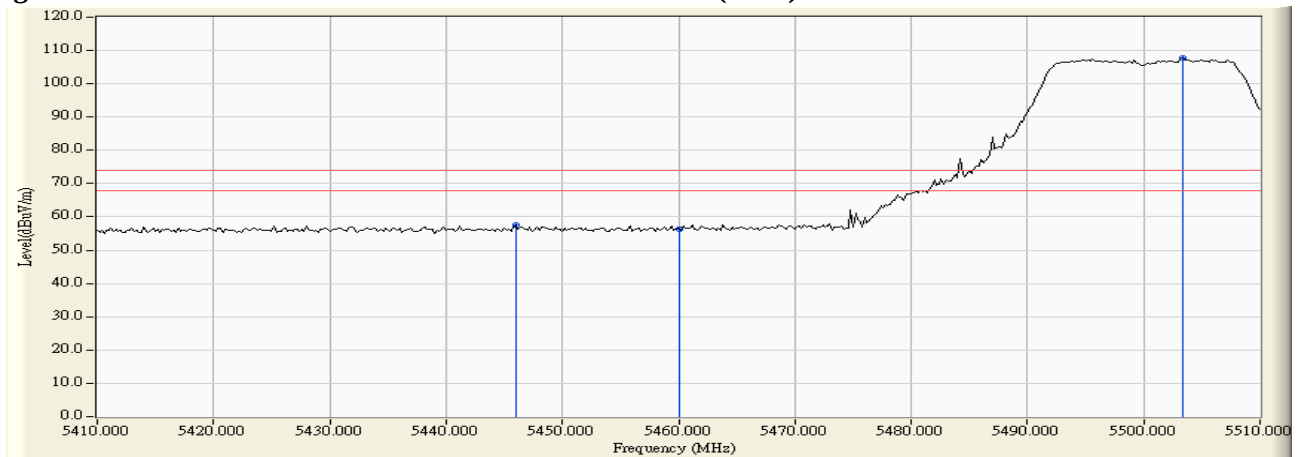


Figure Channel 100: Vertical (Average)

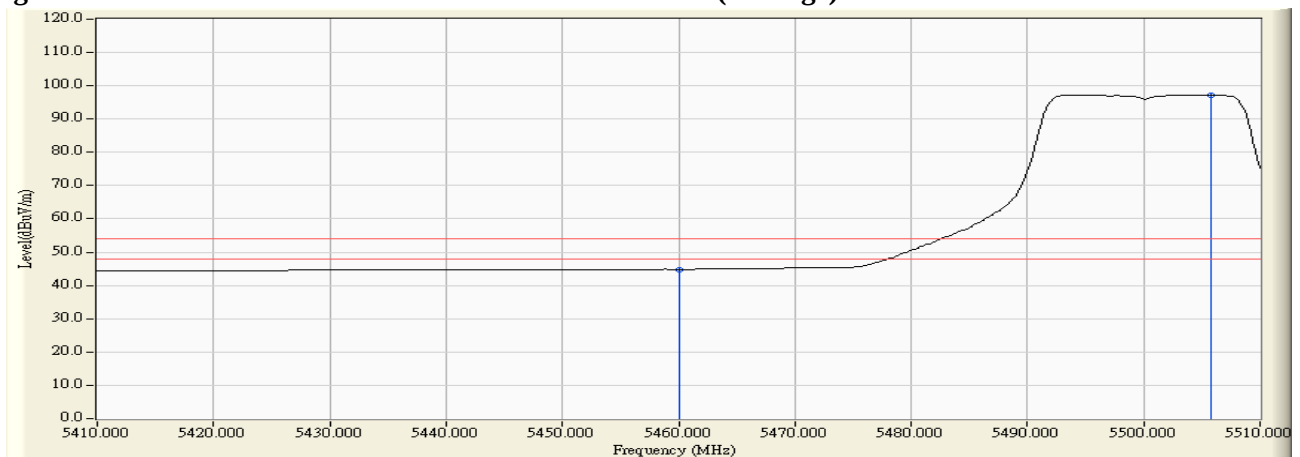

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 100 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5470.000	18.334	-77.760	-59.426	-32.426	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5470.000	19.335	-77.460	-58.125	-31.125	-27.000	Pass

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11a-6Mbps) -Channel 140 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5725.000	18.649	-77.960	-59.311	-32.311	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5725.000	19.372	-77.070	-57.698	-30.698	-27.000	Pass

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 36 (5180MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.200	2.802	53.492	56.294	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	52.774	55.570	74.00	54.00	Pass
36 (Peak)	5178.400	2.701	96.617	99.318	--	--	--
36 (Average)	5150.000	2.796	40.438	43.234	74.00	54.00	Pass
36 (Average)	5175.800	2.710	84.152	86.862	--	--	--

Figure Channel 36: Horizontal (Peak)


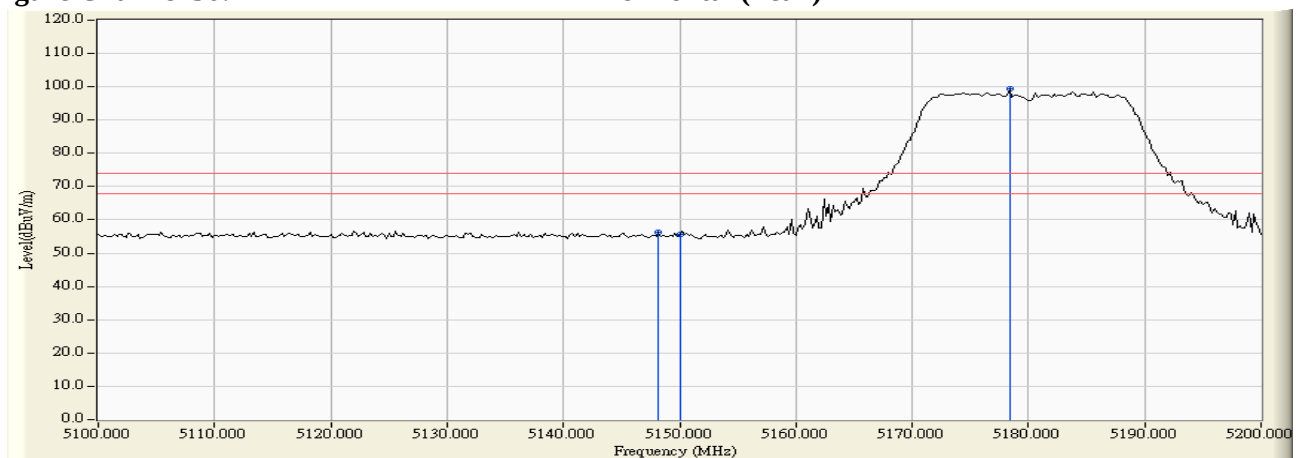


Figure Channel 36: Horizontal (Average)

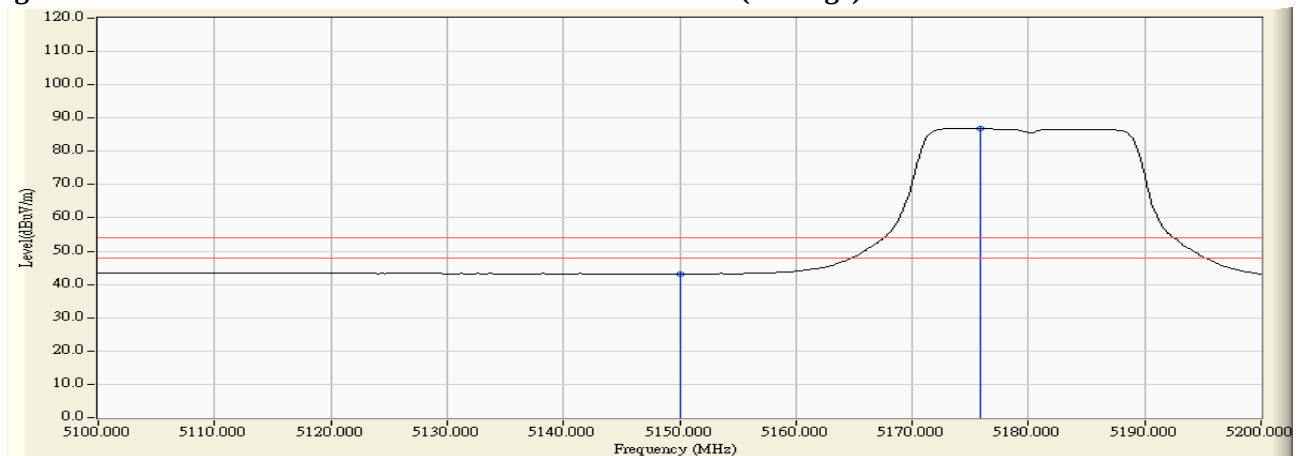

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 36 (5180MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5147.600	3.320	55.581	58.901	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	54.796	58.128	74.00	54.00	Pass
36 (Peak)	5174.000	3.445	105.838	109.283	--	--	--
36 (Average)	5150.000	3.331	42.908	46.240	74.00	54.00	Pass
36 (Average)	5174.800	3.449	93.944	97.392	--	--	--

Figure Channel 36: Vertical (Peak)


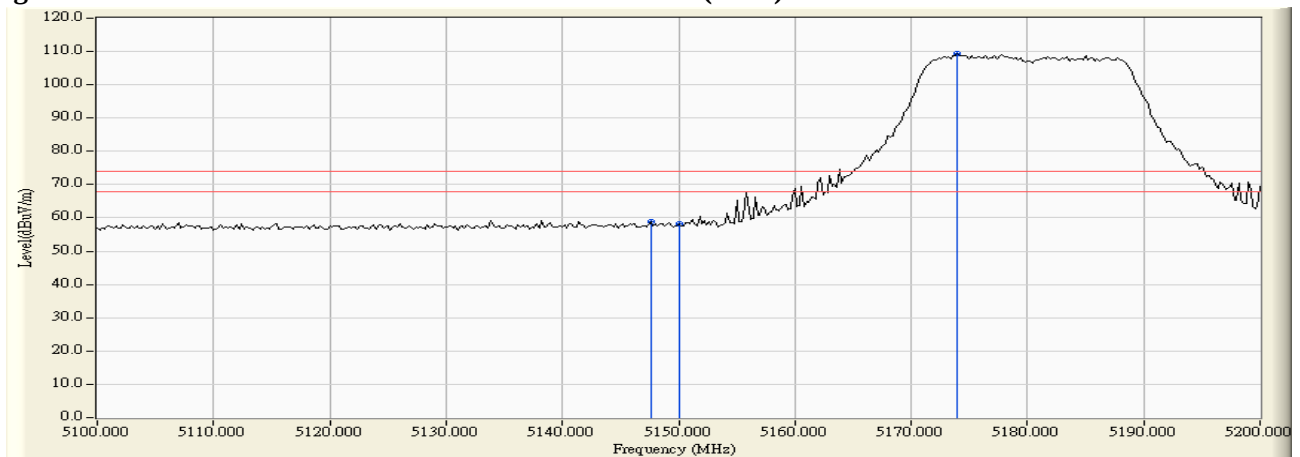


Figure Channel 36: Vertical (Average)

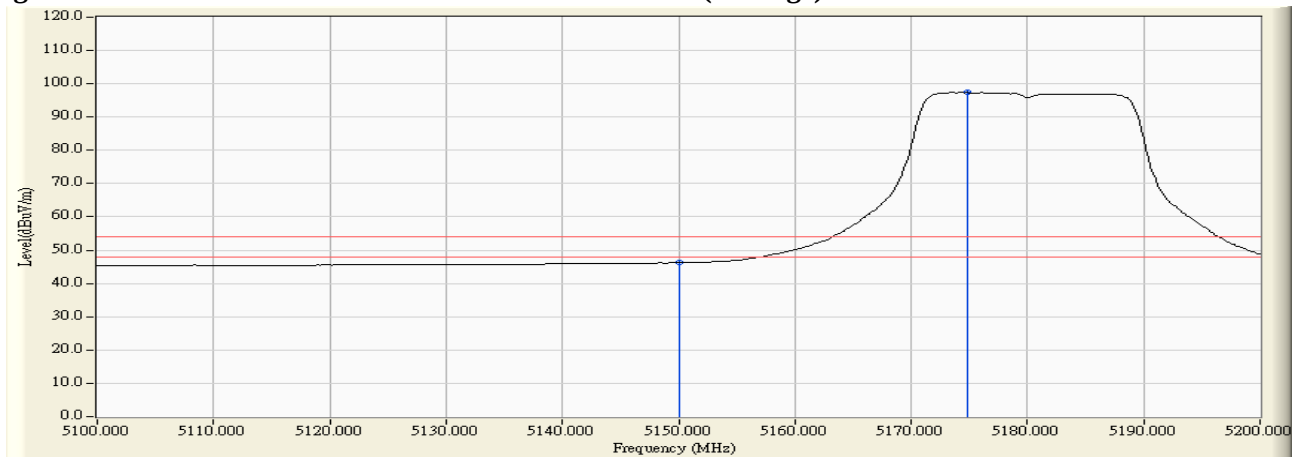

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 64 (5320MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5325.200	3.633	97.481	101.114	--	--	--
64 (Peak)	5350.000	3.575	51.864	55.439	74.00	54.00	Pass
64 (Peak)	5355.800	3.540	52.989	56.529	74.00	54.00	Pass
64 (Average)	5325.800	3.632	85.223	88.855	--	--	--
64 (Average)	5350.000	3.575	39.746	43.321	74.00	54.00	Pass

Figure Channel 64: Horizontal (Peak)


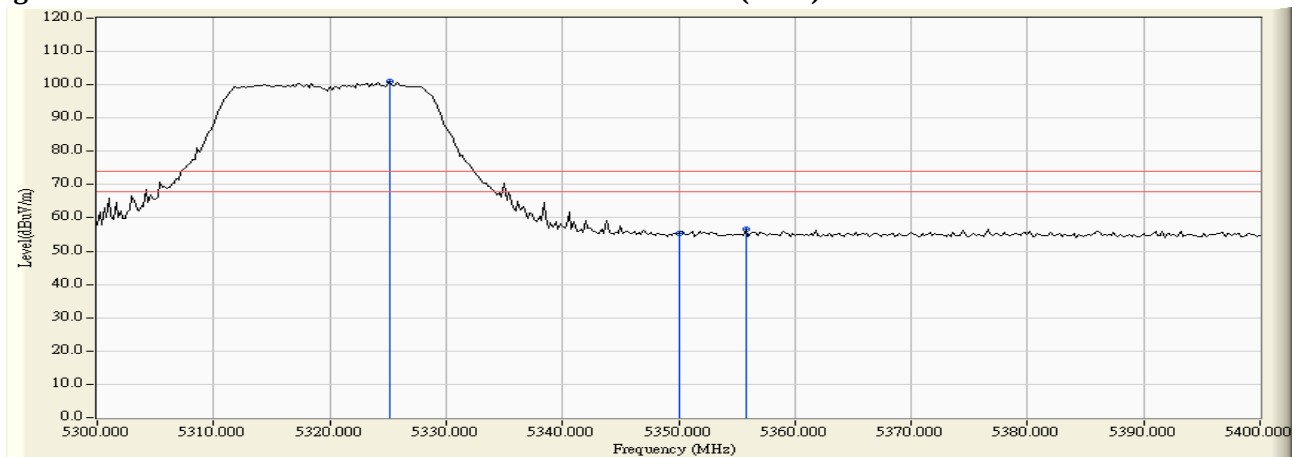


Figure Channel 64: Horizontal (Average)

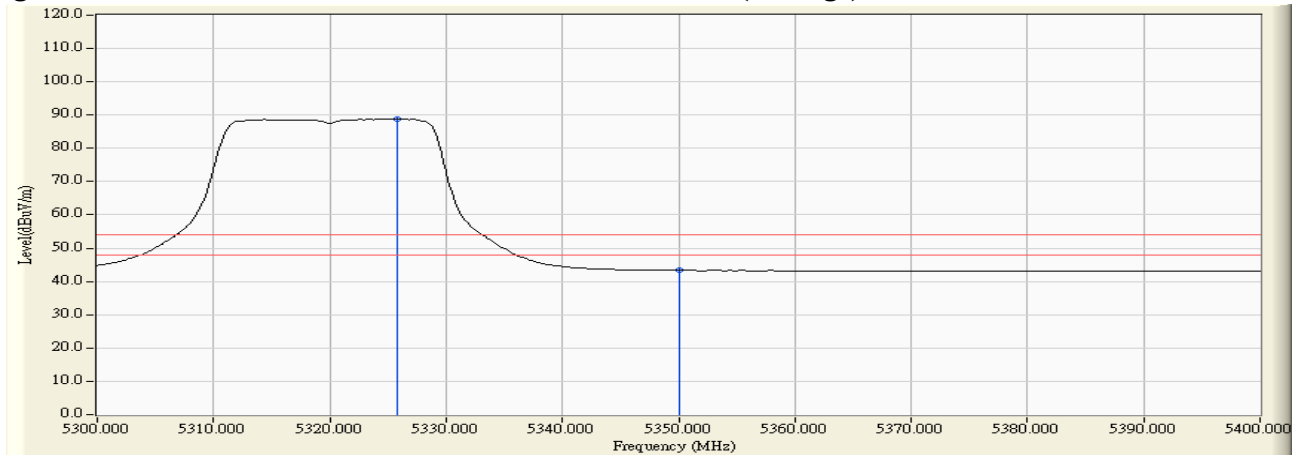

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 64 (5320MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5317.000	3.884	104.556	108.440	--	--	--
64 (Peak)	5350.000	3.900	52.797	56.697	74.00	54.00	Pass
64 (Peak)	5350.800	3.900	53.479	57.379	74.00	54.00	Pass
64 (Average)	5325.800	3.891	92.434	96.325	--	--	--
64 (Average)	5350.000	3.900	41.289	45.189	74.00	54.00	Pass

Figure Channel 64: Vertical (Peak)


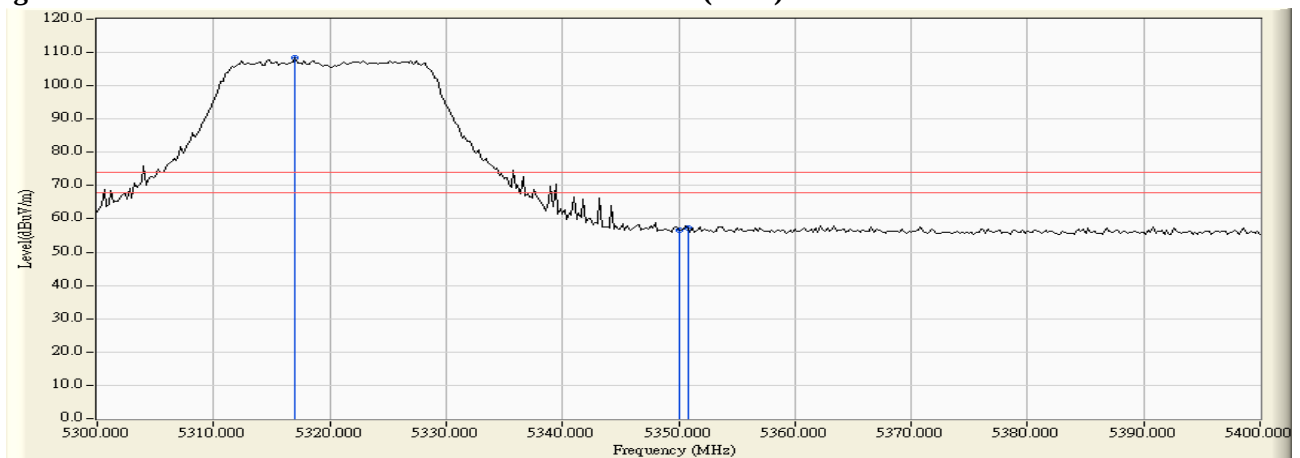


Figure Channel 64: Vertical (Average)

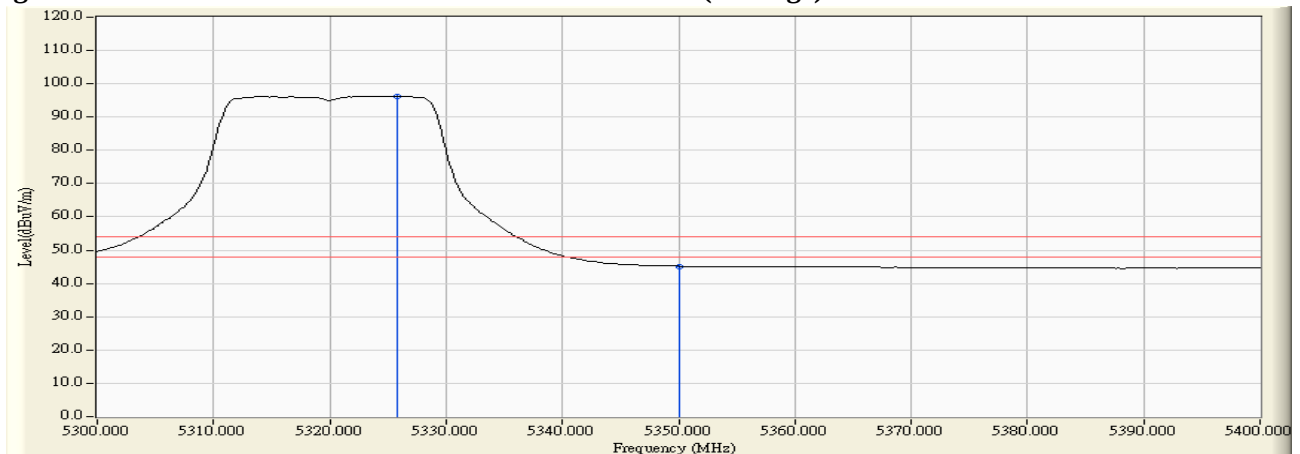

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100 (5500MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5458.800	3.751	52.859	56.611	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	51.487	55.262	74.00	54.00	Pass
100 (Peak)	5502.800	4.516	99.560	104.076	--	--	--
100 (Average)	5460.000	3.775	40.374	44.149	74.00	54.00	Pass
100 (Average)	5494.400	4.403	88.327	92.730	--	--	--

Figure Channel 100: Horizontal (Peak)


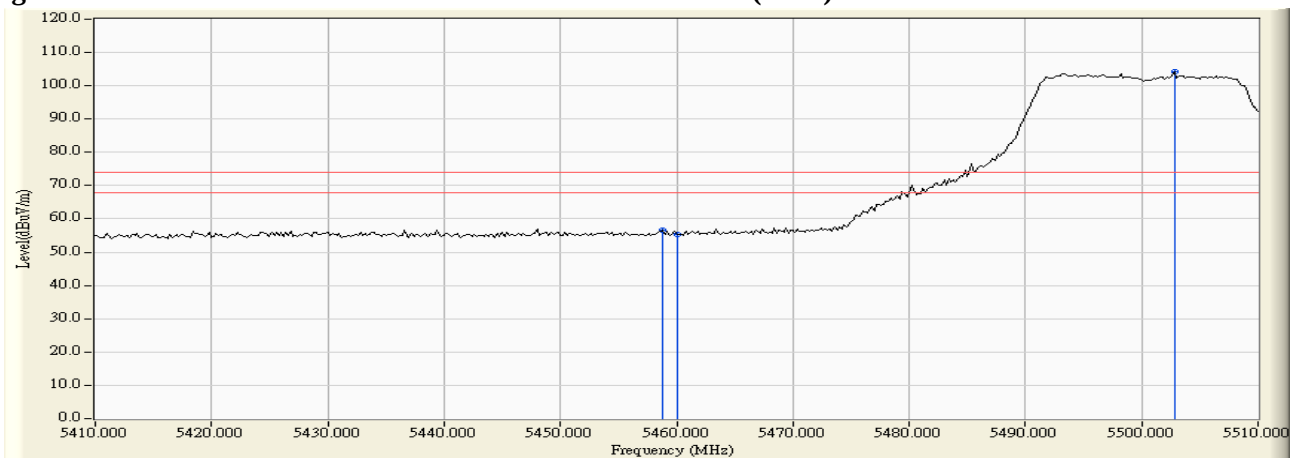


Figure Channel 100: Horizontal (Average)

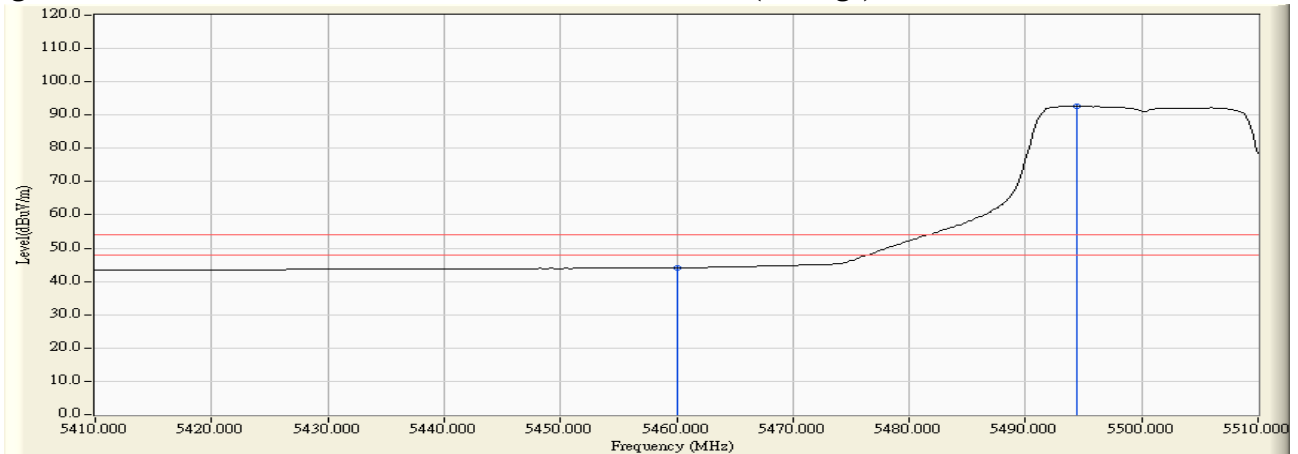

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100 (5500MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5459.800	3.932	55.340	59.272	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	53.884	57.819	74.00	54.00	Pass
100 (Peak)	5506.200	4.511	107.836	112.347	--	--	--
100 (Average)	5460.000	3.934	42.511	46.446	74.00	54.00	Pass
100 (Average)	5505.600	4.511	95.613	100.124	--	--	--

Figure Channel 100: Vertical (Peak)


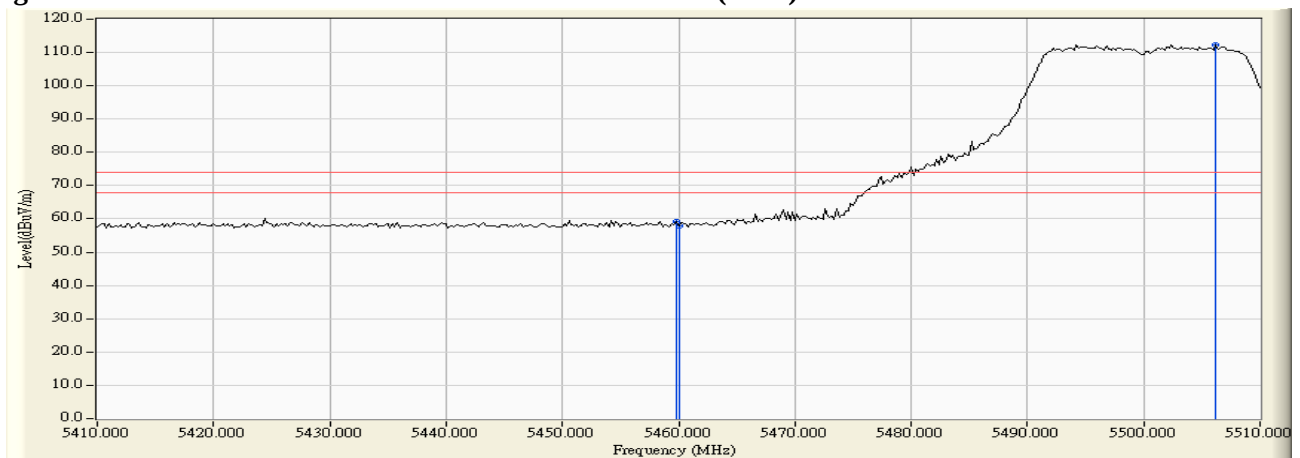


Figure Channel 100: Vertical (Average)

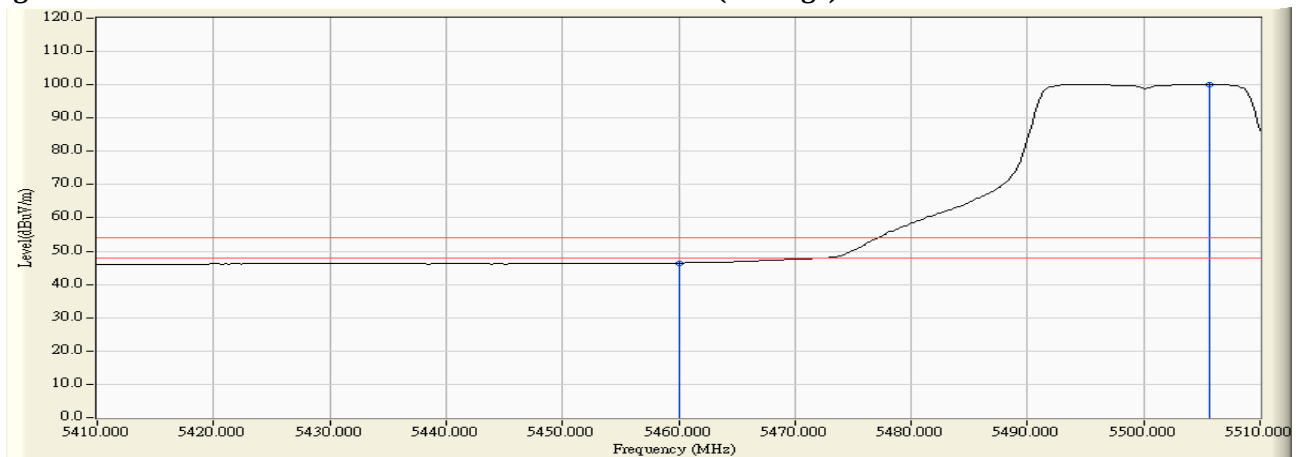

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 100 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5470.000	18.334	-77.990	-59.656	-32.656	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5470.000	19.335	-77.200	-57.865	-30.865	-27.000	Pass

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 14.4Mbps) -Channel 140 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5725.000	18.649	-77.000	-58.351	-31.351	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5725.000	19.372	-77.200	-57.828	-30.828	-27.000	Pass

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 38 (5190MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5149.600	2.798	54.179	56.977	74.00	54.00	Pass
38 (Peak)	5150.000	2.796	52.341	55.137	74.00	54.00	Pass
38 (Peak)	5179.200	2.698	94.331	97.029	--	--	--
38 (Average)	5150.000	2.796	40.979	43.775	74.00	54.00	Pass
38 (Average)	5178.400	2.701	81.891	84.592	--	--	--

Figure Channel 38: Horizontal (Peak)


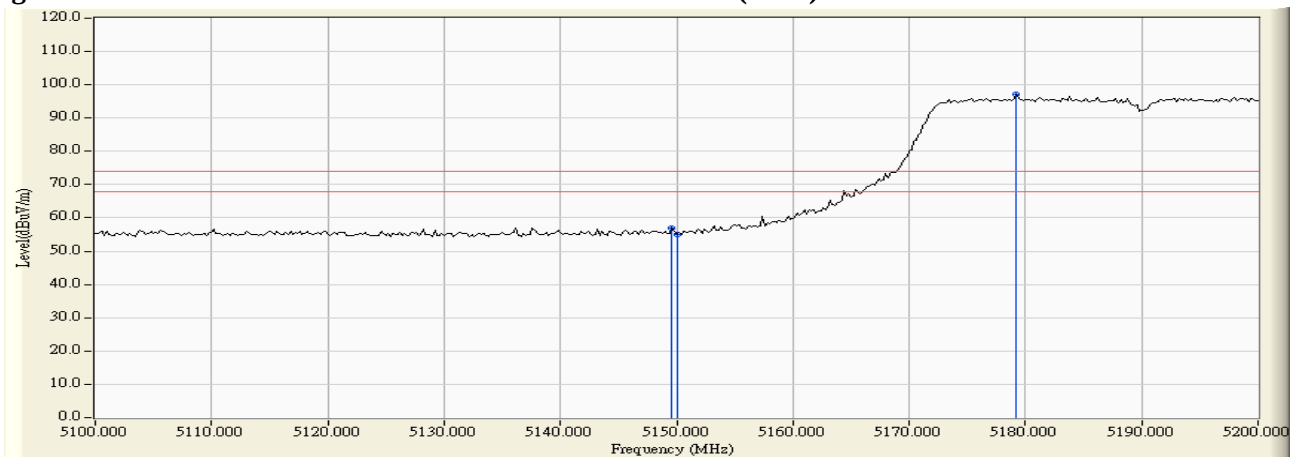


Figure Channel 38: Horizontal (Average)

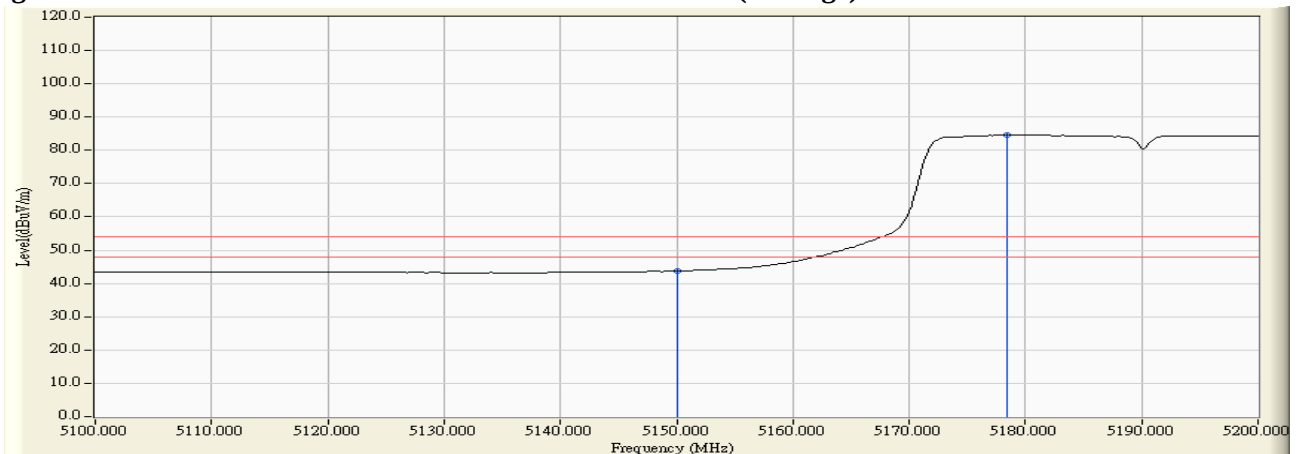

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 38 (5190MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5150.000	3.331	59.958	63.290	74.00	54.00	Pass
38 (Peak)	5196.600	3.553	103.714	107.267	--	--	--
38 (Average)	5150.000	3.331	46.309	49.641	74.00	54.00	Pass
38 (Average)	5197.800	3.559	91.649	95.208	--	--	--

Figure Channel 38:

Vertical (Peak)


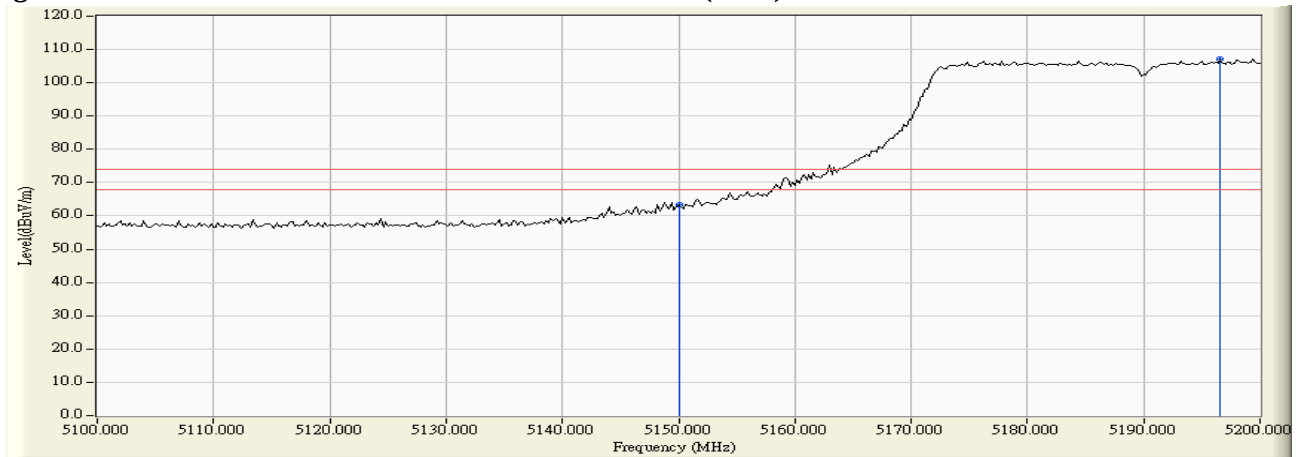


Figure Channel 38:

Vertical (Average)

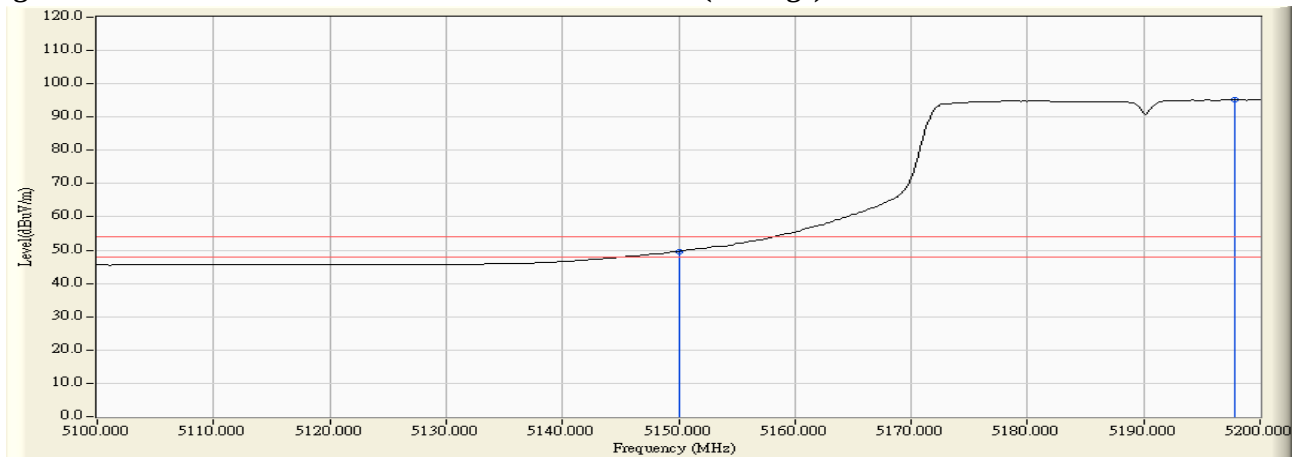

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 62 (5310MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5322.400	3.638	98.851	102.489	--	--	--
62 (Peak)	5350.000	3.575	55.066	58.641	74.00	54.00	Pass
62 (Peak)	5350.800	3.572	55.284	58.857	74.00	54.00	Pass
62 (Average)	5300.400	3.674	86.718	90.392	--	--	--
62 (Average)	5350.000	3.575	42.020	45.595	74.00	54.00	Pass

Figure Channel 62: Horizontal (Peak)


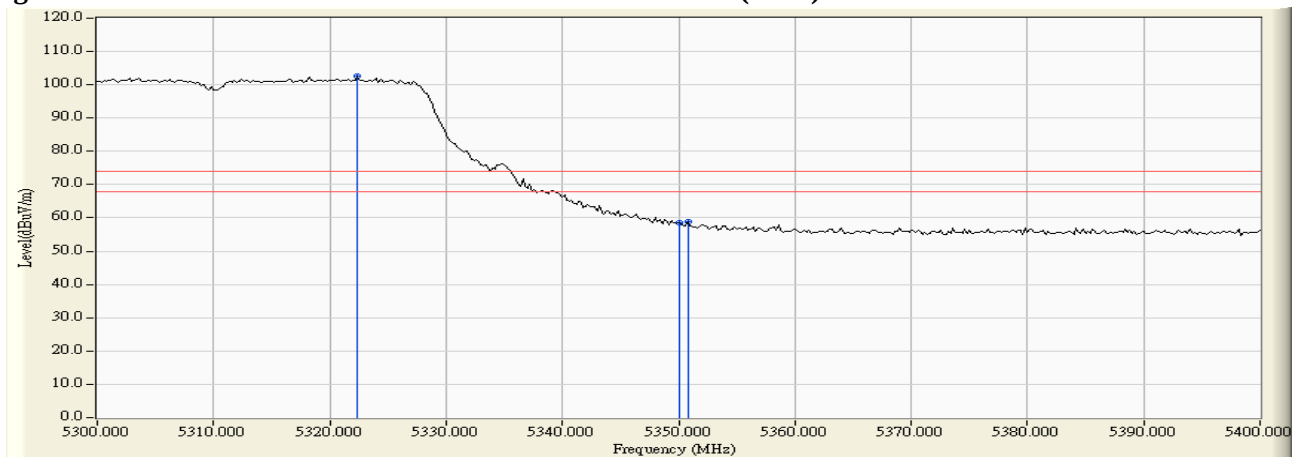


Figure Channel 62: Horizontal (Average)

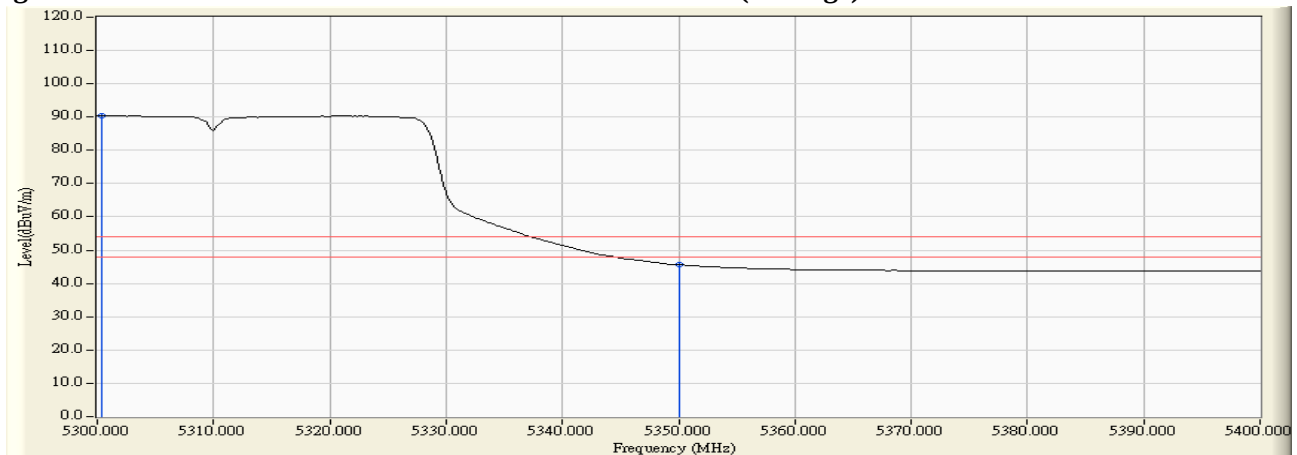

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 62 (5310MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5319.600	3.887	102.821	106.708	--	--	--
62 (Peak)	5350.000	3.900	56.567	60.467	74.00	54.00	Pass
62 (Average)	5300.000	3.869	90.850	94.719	--	--	--
62 (Average)	5350.000	3.900	43.905	47.805	74.00	54.00	Pass

Figure Channel 62: Vertical (Peak)


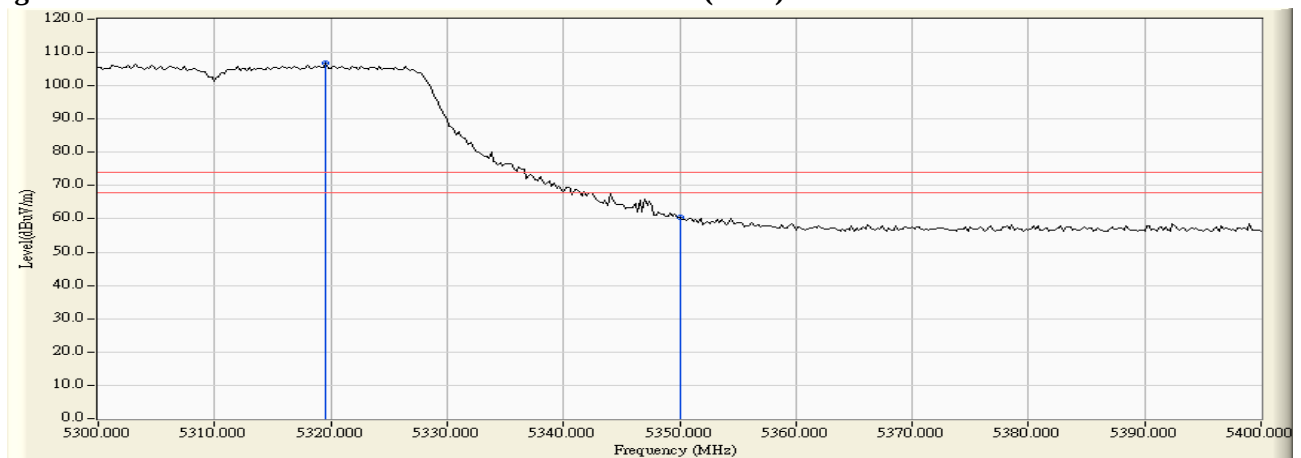


Figure Channel 62: Vertical (Average)

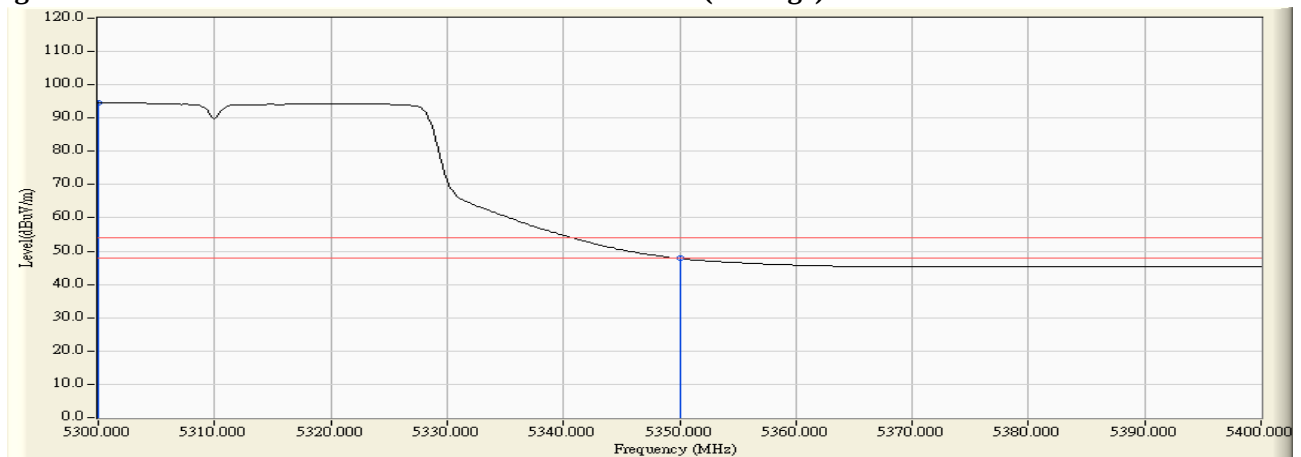

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 102 (5510MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5459.000	3.755	54.945	58.701	74.00	54.00	Pass
102 (Peak)	5460.000	3.775	54.544	58.319	74.00	54.00	Pass
102 (Peak)	5500.400	4.483	96.895	101.379	--	--	--
102 (Average)	5460.000	3.775	41.383	45.158	74.00	54.00	Pass
102 (Average)	5497.600	4.446	85.192	89.638	--	--	--

Figure Channel 102: Horizontal (Peak)


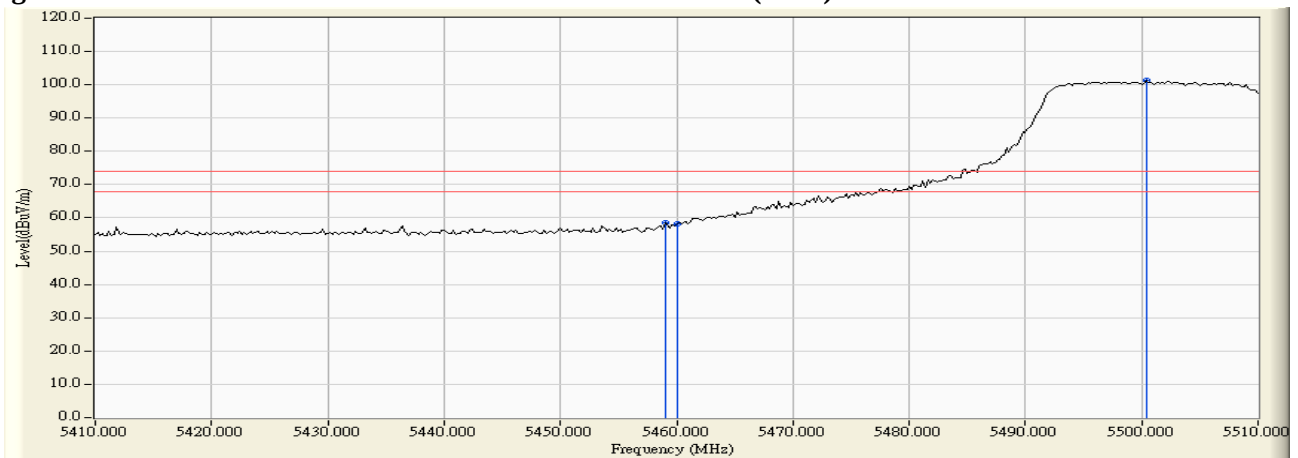


Figure Channel 102: Horizontal (Average)

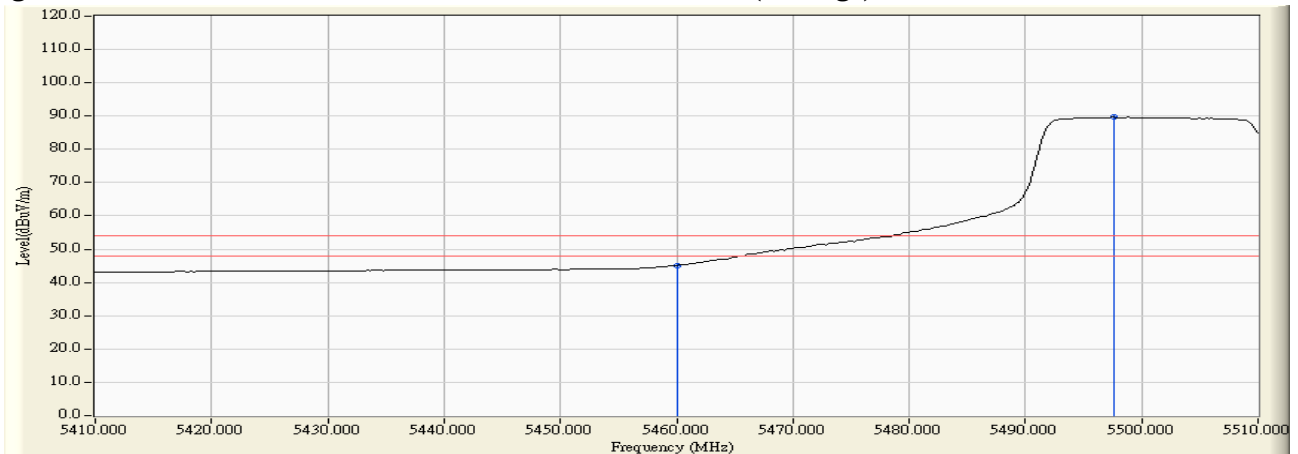

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 102 (5510MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5459.400	3.927	58.450	62.376	74.00	54.00	Pass
102 (Peak)	5460.000	3.934	57.715	61.650	74.00	54.00	Pass
102 (Peak)	5495.800	4.417	104.513	108.930	--	--	--
102 (Average)	5460.000	3.934	44.897	48.832	74.00	54.00	Pass
102 (Average)	5500.600	4.466	92.500	96.966	--	--	--

Figure Channel 102: Vertical (Peak)


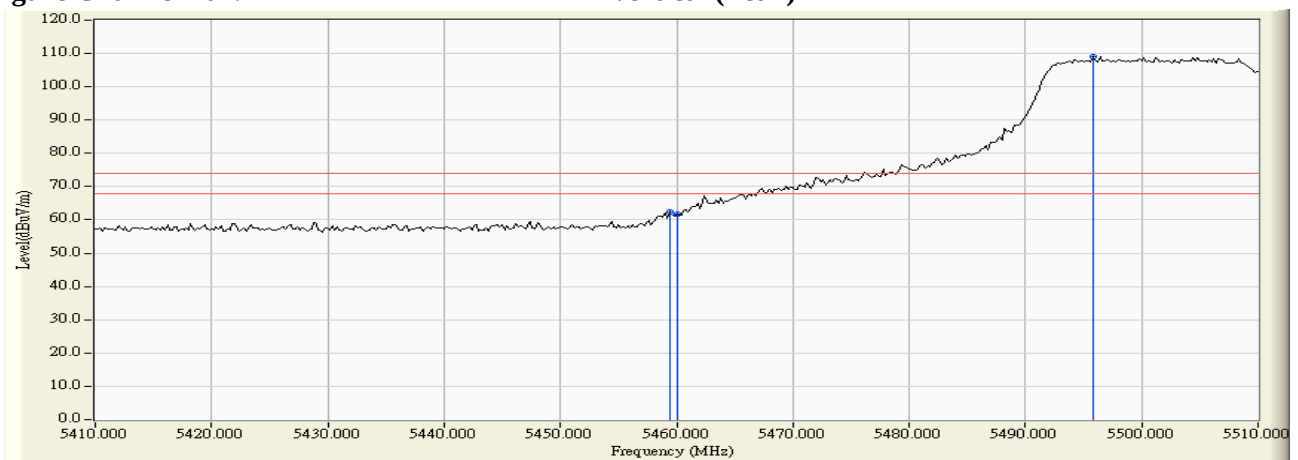


Figure Channel 102: Vertical (Average)

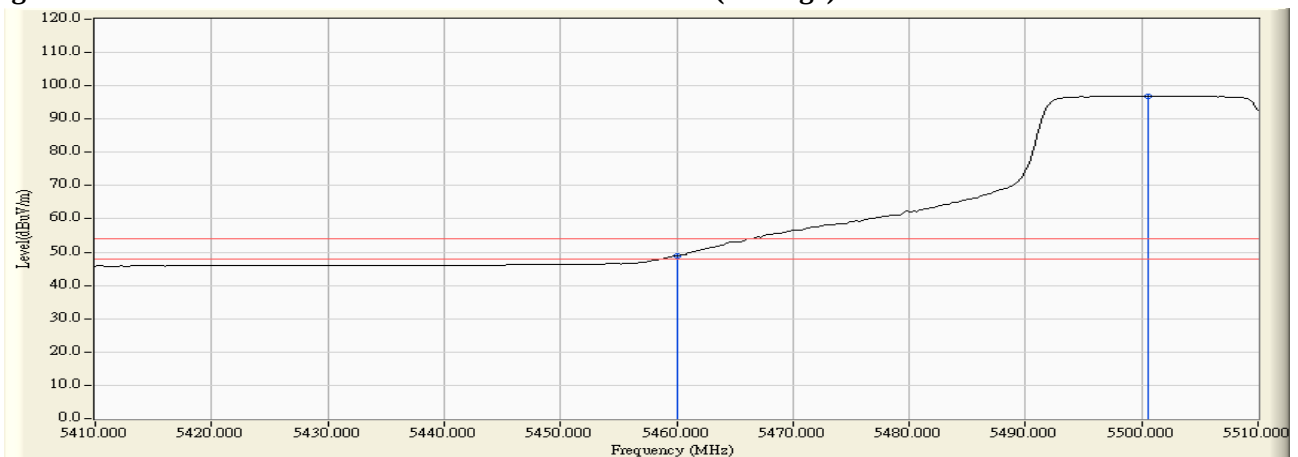

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 102 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5470.000	18.334	-75.140	-56.806	-29.806	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5470.000	19.335	-74.420	-55.085	-28.085	-27.000	Pass

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) -Channel 134 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5725.000	18.649	-75.310	-56.661	-29.661	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5725.000	19.372	-75.270	-55.898	-28.898	-27.000	Pass

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 42 (5210MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5150.000	3.340	50.094	53.434	74.00	54.00	Pass
42 (Peak)	5195.200	3.172	87.477	90.650	--	--	--
42 (Average)	5150.000	3.340	35.189	38.529	74.00	54.00	Pass
42 (Average)	5198.000	3.160	74.174	77.334	--	--	--

Figure Channel 42: Horizontal (Peak)


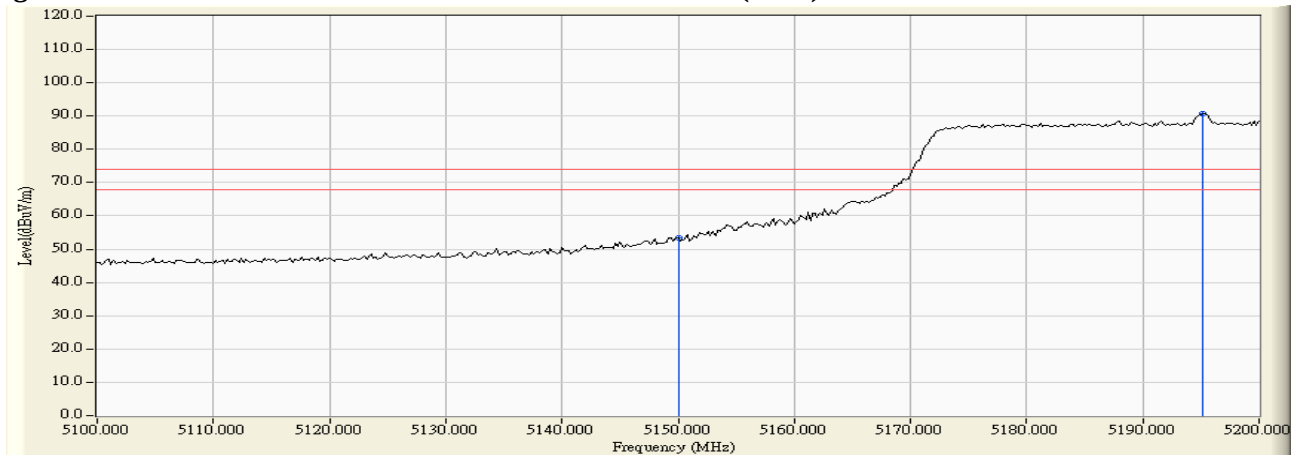


Figure Channel 42: Horizontal (Average)

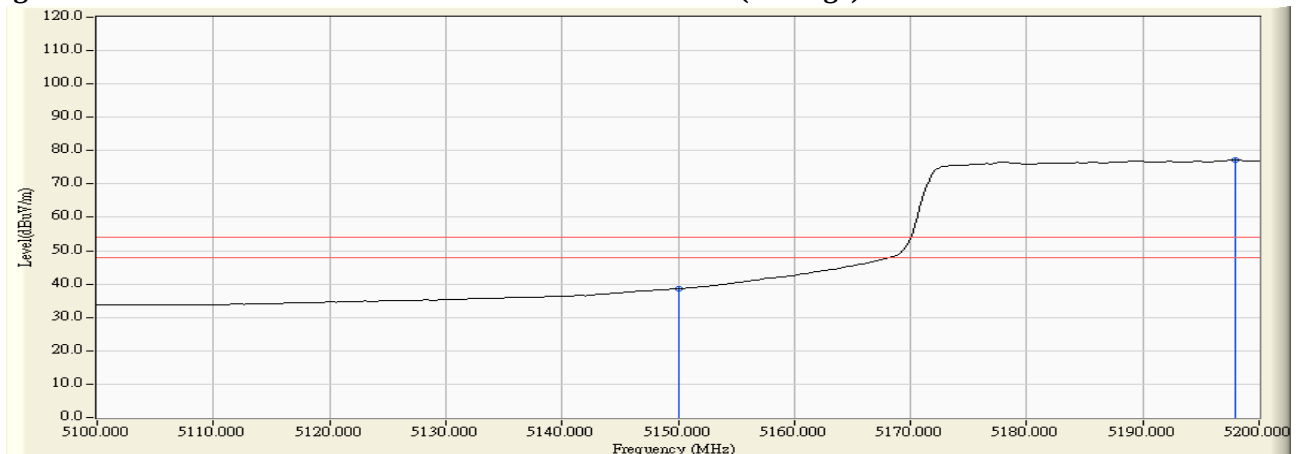

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 42 (5210MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5143.800	5.243	59.441	64.684	74.00	54.00	Pass
102 (Peak)	5150.000	5.260	58.342	63.602	74.00	54.00	Pass
102 (Peak)	5197.400	5.380	97.278	102.658	--	--	--
102 (Average)	5150.000	5.260	45.464	50.724	74.00	54.00	Pass
102 (Average)	5186.800	5.360	84.221	89.582	--	--	--

Figure Channel 102: Vertical (Peak)


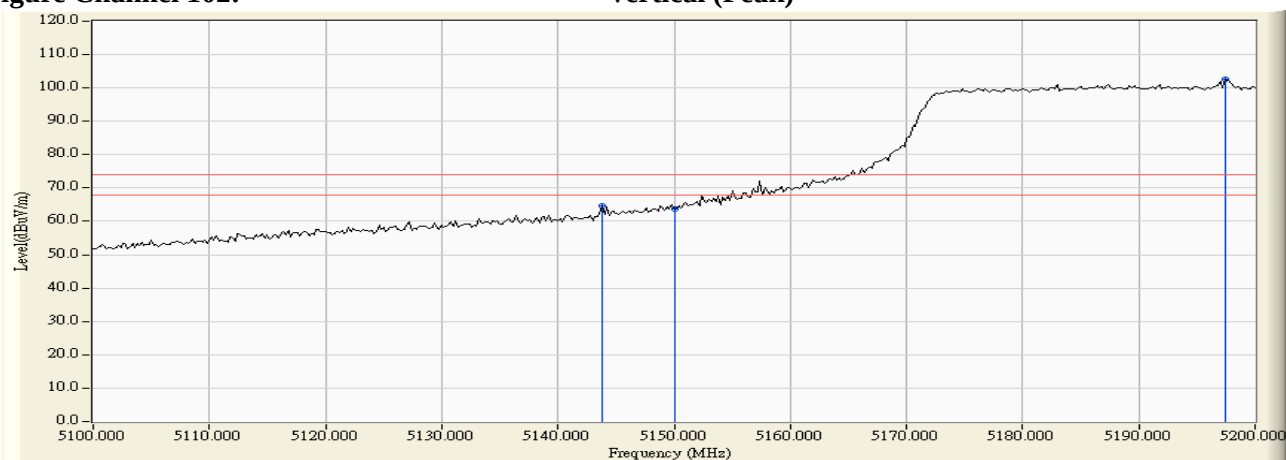


Figure Channel 102: Vertical (Average)

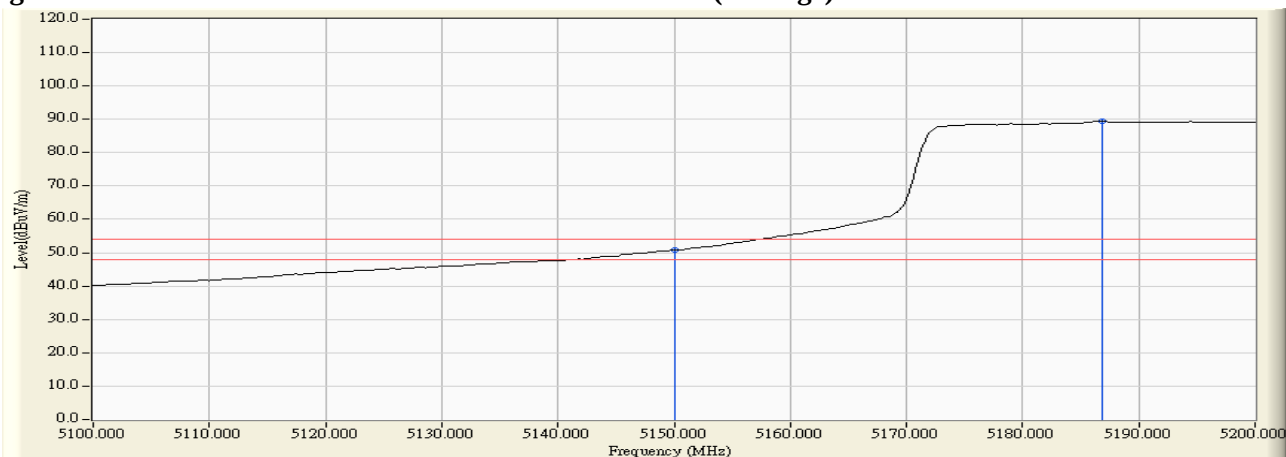

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 58 (5290MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
58 (Peak)	5315.200	3.827	82.824	86.652	--	--	--
58 (Peak)	5350.000	3.716	50.470	54.187	74.00	54.00	Pass
58 (Average)	5306.400	3.856	71.344	75.200	--	--	--
58 (Average)	5350.000	3.716	34.414	38.131	74.00	54.00	Pass

Figure Channel 58: Horizontal (Peak)


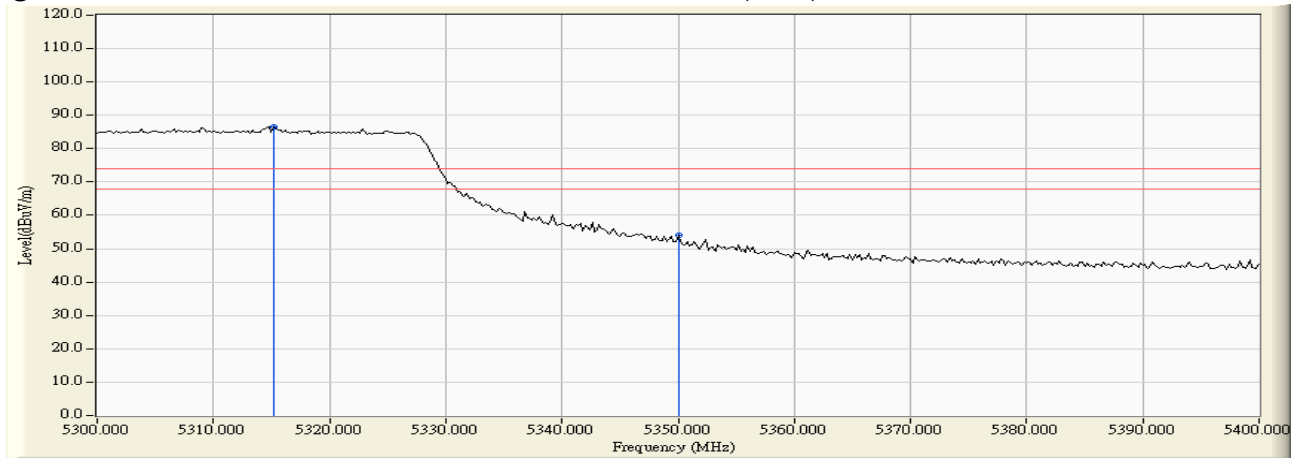


Figure Channel 58: Horizontal (Average)

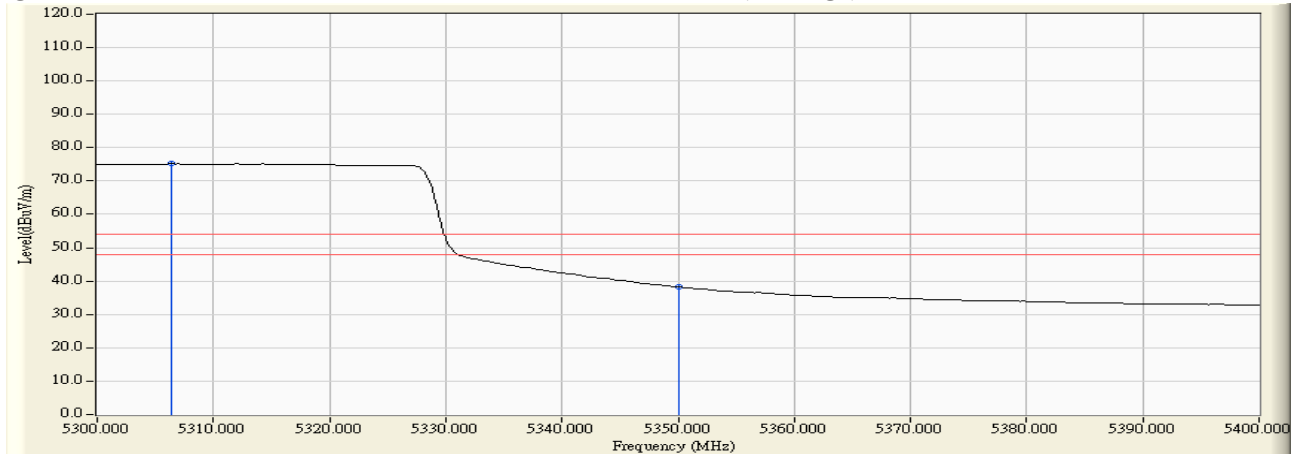

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 58 (5290MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5314.800	5.736	94.842	100.578	--	--	--
58 (Peak)	5350.000	5.691	59.544	65.236	74.00	54.00	Pass
58 (Peak)	5350.800	5.690	60.329	66.020	74.00	54.00	Pass
58 (Average)	5302.200	5.753	82.905	88.657	--	--	--
58 (Average)	5350.000	5.691	44.878	50.570	74.00	54.00	Pass

Figure Channel 58: Vertical (Peak)


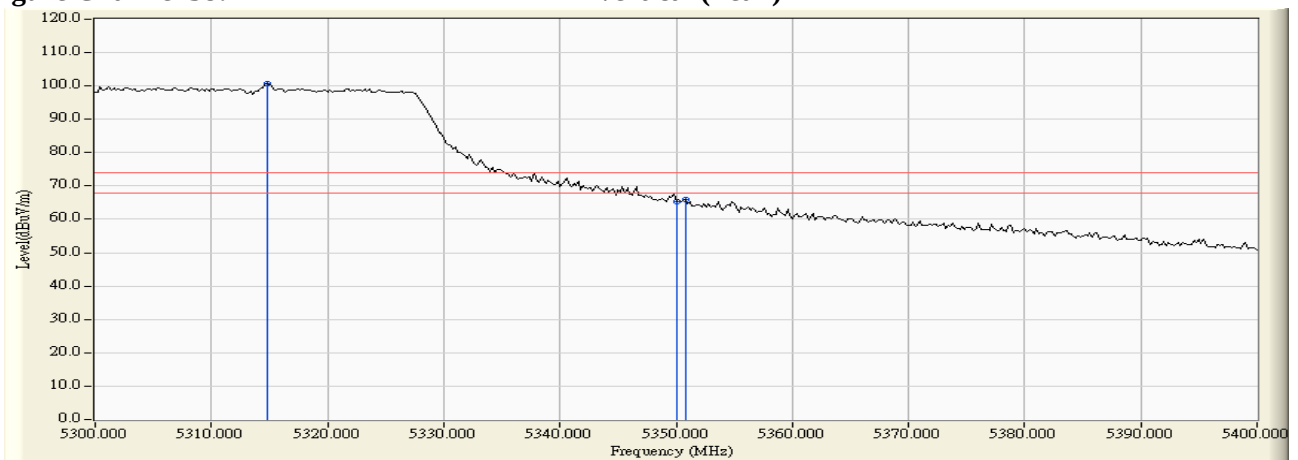


Figure Channel 58: Vertical (Average)

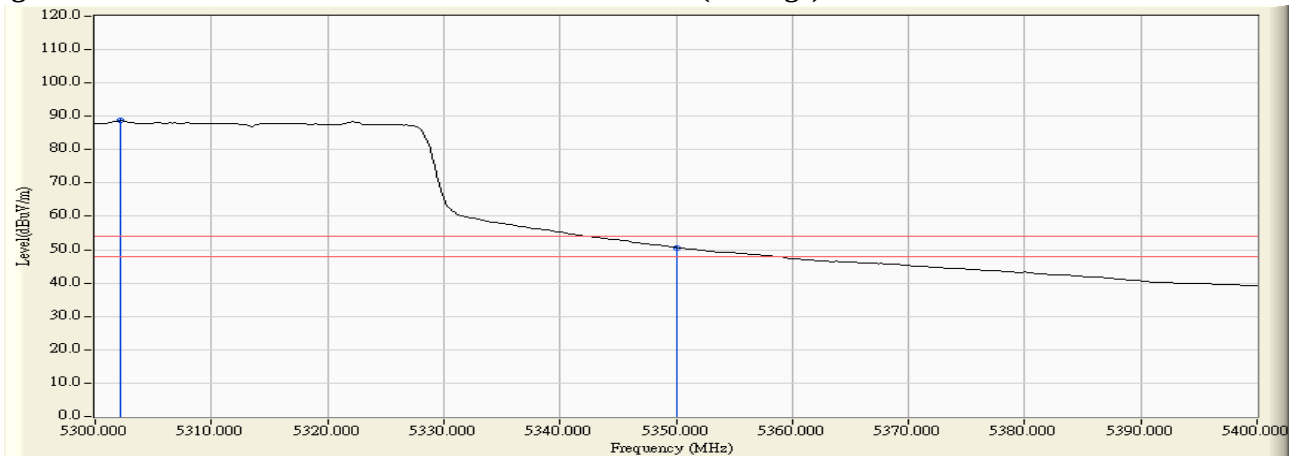

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 106 (5530MHz) (External Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5460.000	4.354	59.141	63.495	74.00	54.00	Pass
106 (Peak)	5505.600	4.844	87.473	92.317	--	--	--
106 (Average)	5460.000	4.354	44.155	48.509	74.00	54.00	Pass
106 (Average)	5509.600	4.812	74.979	79.791	--	--	--

Figure Channel 106: Horizontal (Peak)


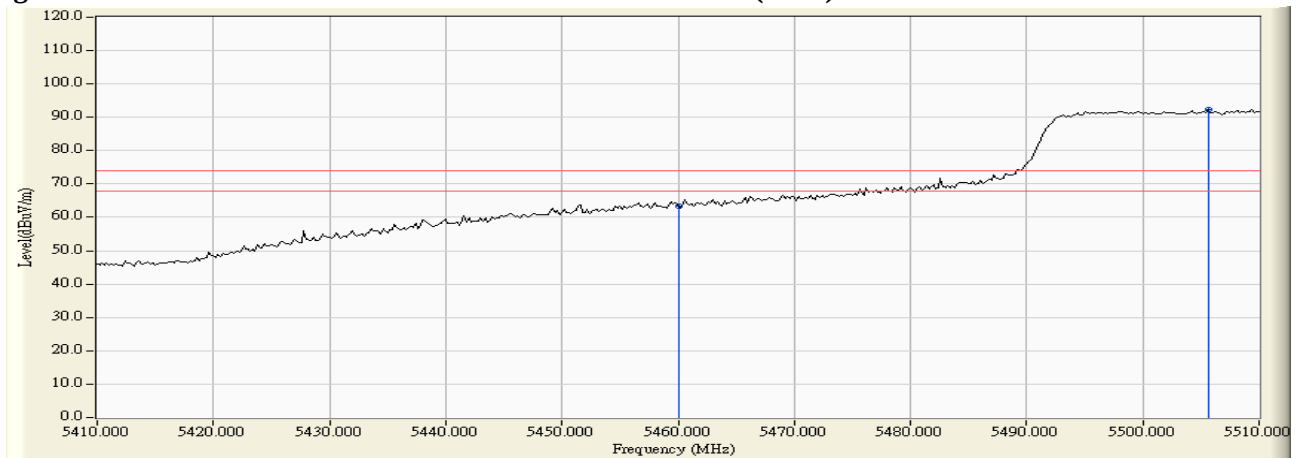


Figure Channel 106: Horizontal (Average)

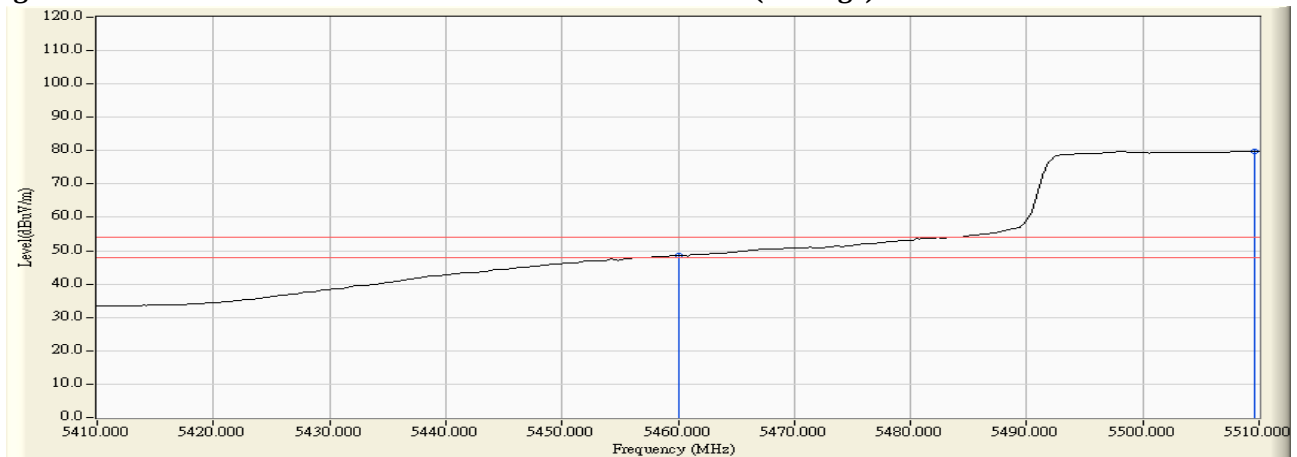

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 106 (5530MHz) (External Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5459.600	6.039	63.328	69.366	74.00	54.00	Pass
106 (Peak)	5460.000	6.041	61.735	67.776	74.00	54.00	Pass
106 (Peak)	5499.200	6.273	97.597	103.869	--	--	--
106 (Average)	5460.000	6.041	46.863	52.904	74.00	54.00	Pass
106 (Average)	5498.000	6.268	85.867	92.136	--	--	--

Figure Channel 106: Vertical (Peak)


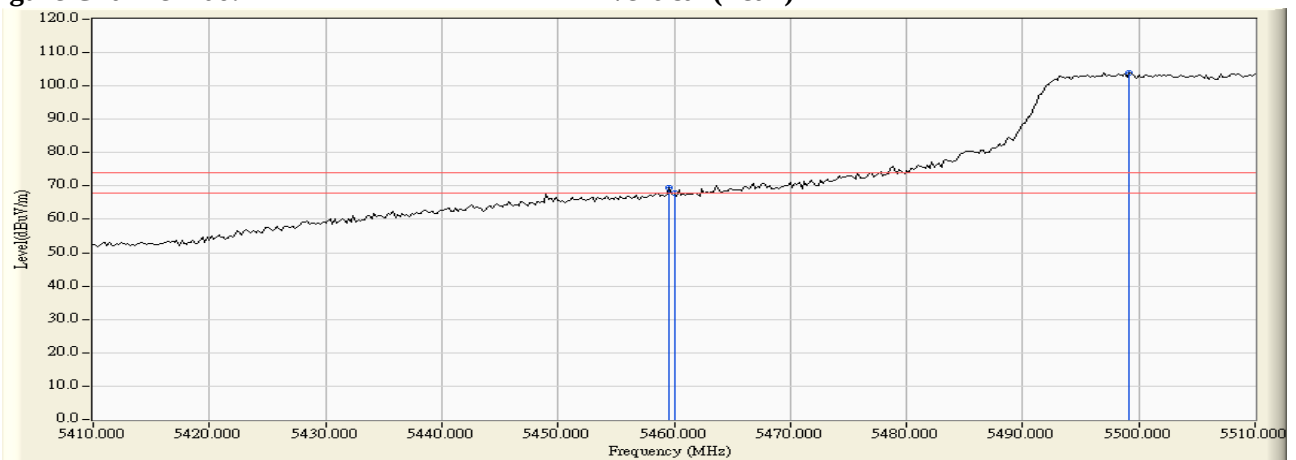


Figure Channel 106: Vertical (Average)

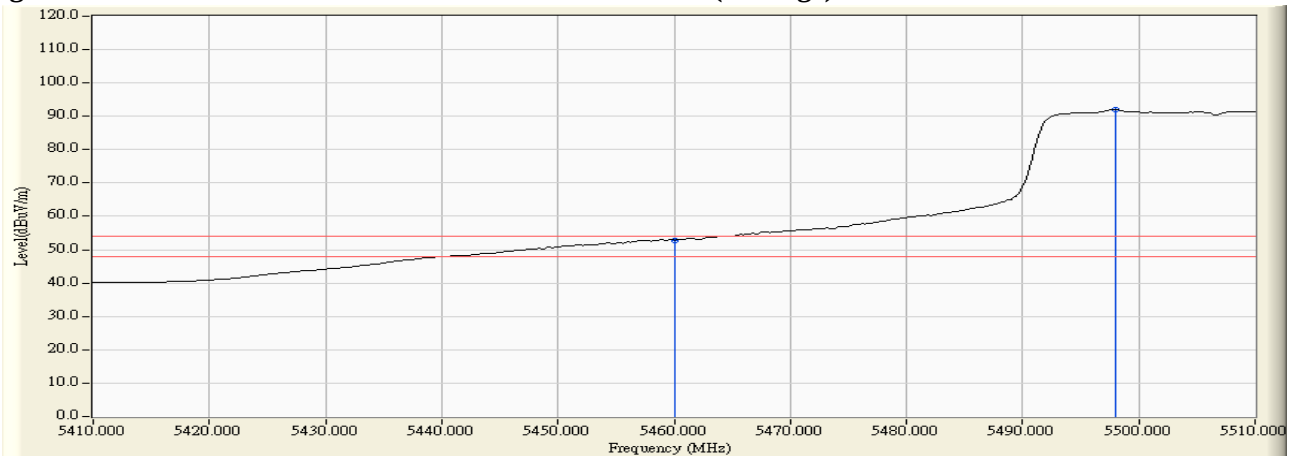

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) -Channel 44 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5825.000	18.983	-78.550	-59.567	-42.567	-17.000	Pass
Horizontal	5835.000	19.106	-78.650	-59.544	-32.544	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5825.000	20.205	-67.920	-47.715	-30.715	-17.000	Pass
Vertical	5835.000	20.326	-78.780	-58.454	-31.454	-27.000	Pass

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) -Channel 42 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5825.000	18.983	-66.330	-47.347	-30.347	-17.000	Pass
Horizontal	5835.000	19.106	-78.670	-59.564	-32.564	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5825.000	20.205	-78.220	-58.015	-41.015	-17.000	Pass
Vertical	5835.000	20.326	-78.050	-57.724	-30.724	-27.000	Pass

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 106 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5470.000	18.334	-74.380	-56.046	-29.046	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5470.000	19.335	-74.070	-54.735	-27.735	-27.000	Pass

Product : Wireless Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) -Channel 138 (External Antenna)

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5825.000	18.983	-75.980	-56.997	-39.997	-17.000	Pass
Horizontal	5835.000	19.106	-77.060	-57.954	-30.954	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5825.000	20.205	-76.020	-55.815	-38.815	-17.000	Pass
Vertical	5835.000	20.326	-77.080	-56.754	-29.754	-27.000	Pass


Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (Internal Antenna)

Chain A

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5230	5249.10	<5250	PASS

NOTE: The 5600~5650MHz band is not used in accordance with 15.215 requirement.

5230MHz

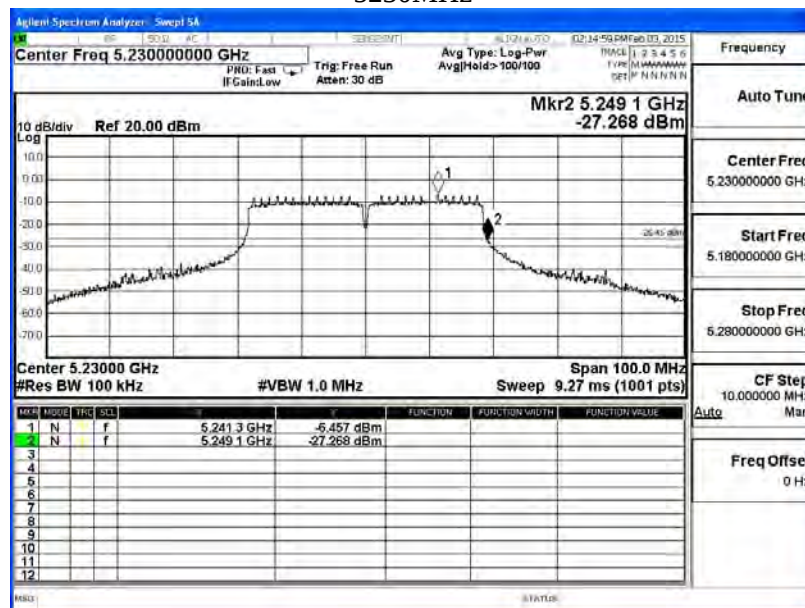


Product : Wireless Access Point
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 30Mbps) (Internal Antenna)

Chain B

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5230	5249.00	<5250	PASS

NOTE: The 5600~5650MHz band is not used in accordance with 15.215 requirement.

5230MHz

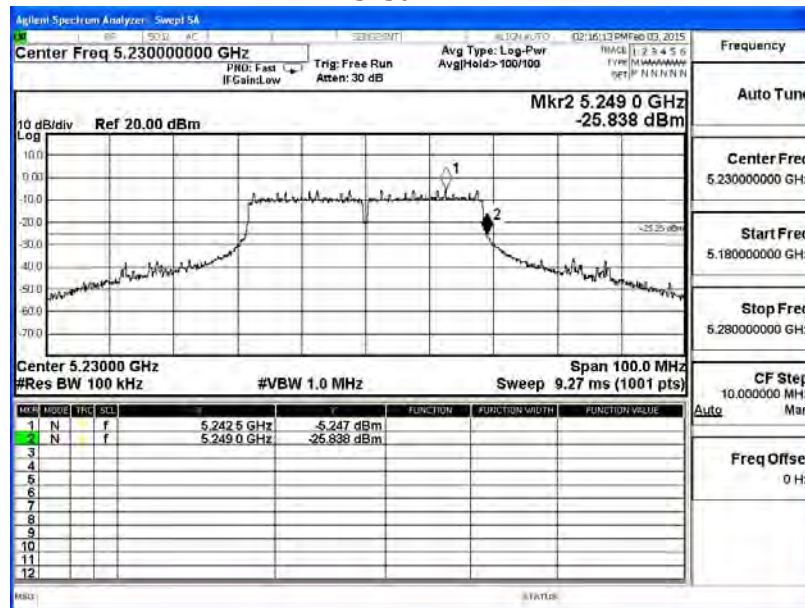

7. Frequency Stability


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

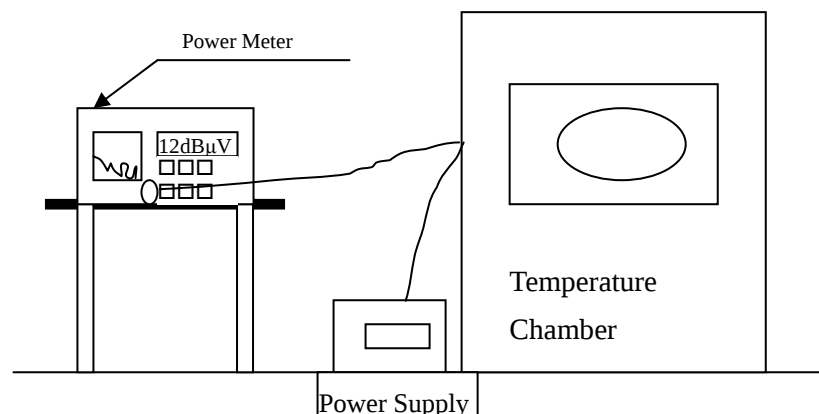

7.3. Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified

7.4. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

7.5. Uncertainty

± 150 Hz

7.6. Test Result of Frequency Stability

Product : Wireless Access Point
Test Item : Frequency Stability
Test Site : Temperature Chamber
Test Mode : Carrier Wave (Internal Antenna)

Chain A

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (120)V	36	5180.0000	5180.1400	-0.1400
		38	5190.0000	5190.0060	-0.0060
		44	5220.0000	5220.0080	-0.0080
		46	5230.0000	5230.0060	-0.0060
		48	5240.0000	5240.0060	-0.0060
		52	5260.0000	5260.1200	-0.1200
		60	5300.0000	5300.0080	-0.0080
		64	5320.0000	5320.1200	-0.1200
		100	5500.0000	5500.1100	-0.1100
		116	5580.0000	5580.0080	-0.0080
		140	5700.0000	5700.0110	-0.0110
Tmax (50) °C	Vmax (138)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9860	0.0140
		44	5220.0000	5219.9880	0.0120
		46	5230.0000	5229.9840	0.0160
		48	5240.0000	5239.9840	0.0160
		52	5260.0000	5259.9860	0.0140
		60	5300.0000	5299.9880	0.0120
		64	5320.0000	5319.9840	0.0160
		100	5500.0000	5499.9880	0.0120
		116	5580.0000	5579.9860	0.0140
		140	5700.0000	5699.9840	0.0160

Tmax (50) °C	Vmin (102)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9860	0.0140
		44	5220.0000	5219.9880	0.0120
		46	5230.0000	5229.9840	0.0160
		48	5240.0000	5239.9840	0.0160
		52	5260.0000	5259.9860	0.0140
		60	5300.0000	5299.9880	0.0120
		64	5320.0000	5319.9840	0.0160
		100	5500.0000	5499.9880	0.0120
		116	5580.0000	5579.9860	0.0140
		140	5700.0000	5699.9840	0.0160
Tmin (-10) °C	Vmax (138)V	36	5180.0000	5180.0110	-0.0110
		38	5190.0000	5190.0120	-0.0120
		44	5220.0000	5220.0110	-0.0110
		46	5230.0000	5230.0120	-0.0120
		48	5240.0000	5240.0130	-0.0130
		52	5260.0000	5260.0110	-0.0110
		60	5300.0000	5300.0120	-0.0120
		64	5320.0000	5320.0120	-0.0120
		100	5500.0000	5500.0120	-0.0120
		116	5580.0000	5580.0120	-0.0120
		140	5700.0000	5700.0120	-0.0120

Tmin (-10) °C	Vmin (102)V	36	5180.0000	5180.0120	-0.0120
		38	5190.0000	5190.0120	-0.0120
		44	5220.0000	5220.0110	-0.0110
		46	5230.0000	5230.0120	-0.0120
		48	5240.0000	5240.0130	-0.0130
		52	5260.0000	5260.0110	-0.0110
		60	5300.0000	5300.0120	-0.0120
		64	5320.0000	5320.0120	-0.0120
		100	5500.0000	5500.0120	-0.0120
		116	5580.0000	5580.0120	-0.0120
		140	5700.0000	5700.0120	-0.0120

Product : Wireless Access Point
 Test Item : Frequency Stability
 Test Site : Temperature Chamber
 Test Mode : Carrier Wave (External Antenna)

Chain A

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) oC	Vnom (120)V	36	5180.0000	5180.0120	-0.0120
		38	5190.0000	5190.0130	-0.0130
		44	5220.0000	5220.0110	-0.0110
		46	5230.0000	5230.0090	-0.0090
		48	5240.0000	5240.0110	-0.0110
		52	5260.0000	5260.0080	-0.0080
		54	5270.0000	5270.0120	-0.0120
		60	5300.0000	5300.0090	-0.0090
		62	5310.0000	5310.0060	-0.0060
		64	5320.0000	5320.0080	-0.0080
		100	5500.0000	5500.0090	-0.0090
		102	5510.0000	5510.0110	-0.0110
		110	5550.0000	5550.0120	-0.0120
		116	5580.0000	5580.0060	-0.0060
		134	5670.0000	5670.0080	-0.0080
		140	5700.0000	5700.0110	-0.0110
Tmax (50) oC	Vmax (138)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9860	0.0140
		44	5220.0000	5219.9840	0.0160
		46	5230.0000	5229.9830	0.0170
		48	5240.0000	5239.9860	0.0140
		52	5260.0000	5259.9840	0.0160
		54	5270.0000	5269.9820	0.0180
		60	5300.0000	5299.9860	0.0140
		62	5310.0000	5309.9840	0.0160
		64	5320.0000	5319.9850	0.0150
		100	5500.0000	5499.9860	0.0140
		102	5510.0000	5509.9840	0.0160
		110	5550.0000	5549.9860	0.0140
		116	5580.0000	5579.9840	0.0160
		134	5670.0000	5669.9860	0.0140
		140	5700.0000	5699.9850	0.0150

Tmax (50) °C	Vmin (102)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9860	0.0140
		44	5220.0000	5219.9840	0.0160
		46	5230.0000	5229.9830	0.0170
		48	5240.0000	5239.9860	0.0140
		52	5260.0000	5259.9840	0.0160
		54	5270.0000	5269.9840	0.0160
		60	5300.0000	5299.9860	0.0140
		62	5310.0000	5309.9840	0.0160
		64	5320.0000	5319.9850	0.0150
		100	5500.0000	5499.9840	0.0160
		102	5510.0000	5509.9840	0.0160
		110	5550.0000	5549.9860	0.0140
		116	5580.0000	5579.9840	0.0160
		134	5670.0000	5669.9860	0.0140
		140	5700.0000	5699.9840	0.0160
Tmin (-10) °C	Vmax (138)V	36	5180.0000	5180.1600	-0.1600
		38	5190.0000	5190.1500	-0.1500
		44	5220.0000	5220.1700	-0.1700
		46	5230.0000	5230.1600	-0.1600
		48	5240.0000	5240.1500	-0.1500
		52	5260.0000	5260.1600	-0.1600
		54	5270.0000	5270.1700	-0.1700
		60	5300.0000	5300.1800	-0.1800
		62	5310.0000	5310.1600	-0.1600
		64	5320.0000	5320.1500	-0.1500
		100	5500.0000	5500.1600	-0.1600
		102	5510.0000	5510.1800	-0.1800
		110	5550.0000	5550.1600	-0.1600
		116	5580.0000	5580.1800	-0.1800
		134	5670.0000	5670.1500	-0.1500
		140	5700.0000	5700.1600	-0.1600

Tmin (-10) °C	Vmin (102)V	36	5180.0000	5180.1600	-0.1600
		38	5190.0000	5190.1500	-0.1500
		44	5220.0000	5220.1700	-0.1700
		46	5230.0000	5230.1600	-0.1600
		48	5240.0000	5240.1500	-0.1500
		52	5260.0000	5260.1600	-0.1600
		54	5270.0000	5270.1700	-0.1700
		60	5300.0000	5300.1800	-0.1800
		62	5310.0000	5310.1600	-0.1600
		64	5320.0000	5320.1500	-0.1500
		100	5500.0000	5500.1600	-0.1600
		102	5510.0000	5510.1800	-0.1800
		110	5550.0000	5550.1600	-0.1600
		116	5580.0000	5580.1800	-0.1800
		134	5670.0000	5670.1500	-0.1500
		140	5700.0000	5700.1600	-0.1600

Product : Wireless Access Point
Test Item : Frequency Stability
Test Site : Temperature Chamber
Test Mode : Carrier Wave (External Antenna)

Chain A

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tnom (20) °C	Vnom (120)V	42ac80	5210.0000	5210.0120	-0.0120
		58ac80	5290.0000	5290.0080	-0.0080
		106ac80	5530.0000	5530.0080	-0.0080
		138ac80	5690.0000	5690.0100	-0.0100
		142F	5710.0000	5710.0080	-0.0080
		144	5720.0000	5720.0060	-0.0060
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmax (50) °C	Vmax (138)V	42ac80	5210.0000	5209.9840	0.0160
		58ac80	5290.0000	5289.9860	0.0140
		106ac80	5530.0000	5529.9840	0.0160
		138ac80	5690.0000	5689.9840	0.0160
		142	5710.0000	5709.9860	0.0140
		144	5720.0000	5719.9840	0.0160
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmax (50) °C	Vmin (102)V	42ac80	5210.0000	5209.9840	0.0160
		58ac80	5290.0000	5289.9860	0.0140
		106ac80	5530.0000	5529.9840	0.0160
		138ac80	5690.0000	5689.9840	0.0160
		142	5710.0000	5709.9860	0.0140
		144	5720.0000	5719.9840	0.0160

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmin (-10) °C	Vmax (138)V	42ac80	5210.0000	5210.0160	-0.0160
		58ac80	5290.0000	5290.0170	-0.0170
		106ac80	5530.0000	5530.0170	-0.0170
		138ac80	5690.0000	5690.0170	-0.0170
		142F	5710.0000	5710.0160	-0.0160
		144	5720.0000	5720.0150	-0.0150
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmin (-10) °C	Vmin (102)V	42ac80	5210.0000	5210.0160	-0.0160
		58ac80	5290.0000	5290.0170	-0.0170
		106ac80	5530.0000	5530.0170	-0.0170
		138ac80	5690.0000	5690.0170	-0.0170
		142F	5710.0000	5710.0160	-0.0160
		144	5720.0000	5720.0150	-0.0150

Product : Wireless Access Point
 Test Item : Frequency Stability
 Test Site : Temperature Chamber
 Test Mode : Carrier Wave (Internal Antenna)

Chain B

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (120)V	36	5180.0000	5180.0120	-0.0120
		38	5190.0000	5190.0110	-0.0110
		44	5220.0000	5220.0130	-0.0130
		46	5230.0000	5230.0130	-0.0130
		48	5240.0000	5240.0110	-0.0110
		52	5260.0000	5260.0160	-0.0160
		60	5300.0000	5300.0160	-0.0160
		64	5320.0000	5320.0080	-0.0080
		100	5500.0000	5500.0120	-0.0120
		116	5580.0000	5580.0060	-0.0060
		140	5700.0000	5700.0110	-0.0110
Tmax (50) °C	Vmax (138)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9880	0.0120
		44	5220.0000	5219.9860	0.0140
		46	5230.0000	5229.9840	0.0160
		48	5240.0000	5239.9840	0.0160
		52	5260.0000	5259.9860	0.0140
		60	5300.0000	5299.9880	0.0120
		64	5320.0000	5319.9840	0.0160
		100	5500.0000	5499.9860	0.0140
		116	5580.0000	5579.9860	0.0140
		140	5700.0000	5699.9880	0.0120

Tmax (50) °C	Vmin (102)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9840	0.0160
		44	5220.0000	5219.9860	0.0140
		46	5230.0000	5229.9840	0.0160
		48	5240.0000	5239.9840	0.0160
		52	5260.0000	5259.9860	0.0140
		60	5300.0000	5299.9880	0.0120
		64	5320.0000	5319.9840	0.0160
		100	5500.0000	5499.9860	0.0140
		116	5580.0000	5579.9880	0.0120
		140	5700.0000	5699.9880	0.0120
Tmin (-10) °C	Vmax (138)V	36	5180.0000	5180.0110	-0.0110
		38	5190.0000	5190.0120	-0.0120
		44	5220.0000	5220.0110	-0.0110
		46	5230.0000	5230.0110	-0.0110
		48	5240.0000	5240.0120	-0.0120
		52	5260.0000	5260.0120	-0.0120
		60	5300.0000	5300.0110	-0.0110
		64	5320.0000	5320.0110	-0.0110
		100	5500.0000	5500.0120	-0.0120
		116	5580.0000	5580.0110	-0.0110
		140	5700.0000	5700.0120	-0.0120

Tmin (-10) °C	Vmin (102)V	36	5180.0000	5180.0110	-0.0110
		38	5190.0000	5190.0110	-0.0110
		44	5220.0000	5220.0110	-0.0110
		46	5230.0000	5230.0110	-0.0110
		48	5240.0000	5240.0120	-0.0120
		52	5260.0000	5260.0120	-0.0120
		60	5300.0000	5300.0110	-0.0110
		64	5320.0000	5320.0110	-0.0110
		100	5500.0000	5500.0120	-0.0120
		116	5580.0000	5580.0120	-0.0120
		140	5700.0000	5700.0110	-0.0110

Product : Wireless Access Point
 Test Item : Frequency Stability
 Test Site : Temperature Chamber
 Test Mode : Carrier Wave (External Antenna)

Chain B

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (120)V	36	5180.0000	5180.0100	-0.0100
		38	5190.0000	5190.0100	-0.0100
		44	5220.0000	5220.0060	-0.0060
		46	5230.0000	5230.0080	-0.0080
		48	5240.0000	5240.0080	-0.0080
		52	5260.0000	5260.0100	-0.0100
		54	5270.0000	5270.0060	-0.0060
		60	5300.0000	5300.0050	-0.0050
		62	5310.0000	5310.0060	-0.0060
		64	5320.0000	5320.0080	-0.0080
		100	5500.0000	5500.0100	-0.0100
		102	5510.0000	5510.0080	-0.0080
		110	5550.0000	5550.0060	-0.0060
		116	5580.0000	5580.0070	-0.0070
		134	5670.0000	5670.0060	-0.0060
		140	5700.0000	5700.0080	-0.0080
Tmax (50) °C	Vmax (138)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9860	0.0140
		44	5220.0000	5219.9880	0.0120
		46	5230.0000	5229.9840	0.0160
		48	5240.0000	5239.9860	0.0140
		52	5260.0000	5259.9840	0.0160
		54	5270.0000	5269.9880	0.0120
		60	5300.0000	5299.9860	0.0140
		62	5310.0000	5309.9860	0.0140
		64	5320.0000	5319.9840	0.0160
		100	5500.0000	5499.9880	0.0120
		102	5510.0000	5509.9860	0.0140
		110	5550.0000	5549.9860	0.0140
		116	5580.0000	5579.9840	0.0160
		134	5670.0000	5669.9840	0.0160
		140	5700.0000	5699.9840	0.0160

Tmax (50) °C	Vmin (102)V	36	5180.0000	5179.9840	0.0160
		38	5190.0000	5189.9860	0.0140
		44	5220.0000	5219.9880	0.0120
		46	5230.0000	5229.9840	0.0160
		48	5240.0000	5239.9860	0.0140
		52	5260.0000	5259.9840	0.0160
		54	5270.0000	5269.9880	0.0120
		60	5300.0000	5299.9860	0.0140
		62	5310.0000	5309.9860	0.0140
		64	5320.0000	5319.9840	0.0160
		100	5500.0000	5499.9880	0.0120
		102	5510.0000	5509.9860	0.0140
		110	5550.0000	5549.9860	0.0140
		116	5580.0000	5579.9840	0.0160
		134	5670.0000	5669.9840	0.0160
		140	5700.0000	5699.9840	0.0160
Tmin (-10) °C	Vmax (138)V	36	5180.0000	5180.1500	-0.1500
		38	5190.0000	5190.1600	-0.1600
		44	5220.0000	5220.1500	-0.1500
		46	5230.0000	5230.1400	-0.1400
		48	5240.0000	5240.1600	-0.1600
		52	5260.0000	5260.1500	-0.1500
		54	5270.0000	5270.1800	-0.1800
		60	5300.0000	5300.1600	-0.1600
		62	5310.0000	5310.1800	-0.1800
		64	5320.0000	5320.1500	-0.1500
		100	5500.0000	5500.1600	-0.1600
		102	5510.0000	5510.1800	-0.1800
		110	5550.0000	5550.1800	-0.1800
		116	5580.0000	5580.1600	-0.1600
		134	5670.0000	5670.1800	-0.1800
		140	5700.0000	5700.1500	-0.1500

Tmin (-10) °C	Vmin (102)V	36	5180.0000	5180.1500	-0.1500
		38	5190.0000	5190.1600	-0.1600
		44	5220.0000	5220.1500	-0.1500
		46	5230.0000	5230.1400	-0.1400
		48	5240.0000	5240.1600	-0.1600
		52	5260.0000	5260.1500	-0.1500
		54	5270.0000	5270.1800	-0.1800
		60	5300.0000	5300.1600	-0.1600
		62	5310.0000	5310.1800	-0.1800
		64	5320.0000	5320.1500	-0.1500
		100	5500.0000	5500.1600	-0.1600
		102	5510.0000	5510.1800	-0.1800
		110	5550.0000	5550.1800	-0.1800
		116	5580.0000	5580.1600	-0.1600
		134	5670.0000	5670.1800	-0.1800
		140	5700.0000	5700.1500	-0.1500

Product : Wireless Access Point
Test Item : Frequency Stability
Test Site : Temperature Chamber
Test Mode : Carrier Wave (External Antenna)

Chain B

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tnom (20) °C	Vnom (120)V	42ac80	5210.0000	5210.0080	-0.0080
		58ac80	5290.0000	5290.0120	-0.0120
		106ac80	5530.0000	5530.0120	-0.0120
		138ac80	5690.0000	5690.0080	-0.0080
		142F	5710.0000	5710.0060	-0.0060
		144	5720.0000	5720.0060	-0.0060
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmax (50) °C	Vmax (138)V	42ac80	5210.0000	5209.9840	0.0160
		58ac80	5290.0000	5289.9860	0.0140
		106ac80	5530.0000	5529.9860	0.0140
		138ac80	5690.0000	5689.9840	0.0160
		142F	5710.0000	5709.9840	0.0160
		144	5720.0000	5719.9860	0.0140
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmax (50) °C	Vmin (102)V	42ac80	5210.0000	5209.9840	0.0160
		58ac80	5290.0000	5289.9860	0.0140
		106ac80	5530.0000	5529.9860	0.0140
		138ac80	5690.0000	5689.9840	0.0160
		142F	5710.0000	5709.9840	0.0160
		144	5720.0000	5719.9860	0.0140

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmin (-10) °C	Vmax (138)V	42ac80	5210.0000	5210.1600	-0.1600
		58ac80	5290.0000	5290.1400	-0.1400
		106ac80	5530.0000	5530.1600	-0.1600
		138ac80	5690.0000	5690.1600	-0.1600
		142F	5710.0000	5710.1400	-0.1400
		144	5720.0000	5720.1700	-0.1700
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\triangle$ F (MHz)
Tmin (-10) °C	Vmin (102)V	42ac80	5210.0000	5210.1600	-0.1600
		58ac80	5290.0000	5290.1400	-0.1400
		106ac80	5530.0000	5530.1600	-0.1600
		138ac80	5690.0000	5690.1600	-0.1600
		142F	5710.0000	5710.1400	-0.1400
		144	5720.0000	5720.1700	-0.1700

8. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs