10082- CAB IS-54 / IS-136 FDD (TDMA/IDQPSK, Fullrate) 10090- DAC GPRS-FDD (TDMA, GMSK, DAC 10097- CAB UMTS-FDD (HSDPA) 10098- CAB UMTS-FDD (HSUPA, Subte CAB 10099- DAC EDGE-FDD (TDMA, 8PSK, DAC 10100- CAE MHz, QPSK) 10101- CAE MHz, G4-QAM) 10103- CAF MHz, G4-QAM) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, G4-QAM) 10105- CAF MHz, G4-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF MHz, G4-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, G4-QAM) 10109- CAF MHz, G4-QAM)	Z FDM, PI/4- X Y Z TN 0-4) X	Y Z X Y	0.64 0.51	64.39 61.51	10.26		· · · · · · · · · · · · · · · · · · ·	
10090- DAC GPRS-FDD (TDMA, GMSK, DAC 10097- CAB UMTS-FDD (HSDPA) 10098- CAB UMTS-FDD (HSUPA, Subte CAB 10100- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- CAE LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- CAF MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10106- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10107- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM)	FDM, PI/4- X Z Z TN 0-4) X	X	0.51				150.0	
10090- DAC GPRS-FDD (TDMA, GMSK, 10097- CAB UMTS-FDD (HSDPA) 10098- CAB UMTS-FDD (HSUPA, Subte CAB 10100- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- CAE LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- CAF MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10106- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10107- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 16-QAM)	TN 0-4) >			01.01	8.28		150.0	
10097- CAB 10098- CAB 10099- DAC 10100- CAE 10101- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10103- CAE LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10109- LTE-FDD (SC-FDMA, 100% MHz, 64-QAM)	TN 0-4) >	γΤ	6.37	60.67	1.90	4.77	80.0	± 9.6 %
10097- CAB 10098- CAB 10099- DAC 10100- CAE 10101- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- CAE LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10103- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM)	TN 0-4) >		0.58	60.00	3.05	***************************************	80.0	
10097- CAB 10098- CAB 10099- DAC 10100- CAE 10101- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- CAE LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10103- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM)	Y	Z	0.60	60.00	3.10	V.	80.0	
10098- CAB 10099- DAC EDGE-FDD (TDMA, 8PSK, DAC 10100- CAE LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10101- CAE MHz, 16-QAM) 10102- CAE LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- CAF MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10109- LTE-FDD (SC-FDMA, 100% MHz, QPSK)		Х	100.00	103.19	20.57	6.56	60.0	± 9.6 %
10098- CAB 10098- CAB 10099- DAC EDGE-FDD (TDMA, 8PSK, DAC 10100- CAE MHz, QPSK) 10101- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- CAE LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- CAF MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM)		<u>Y</u>	100.00	106.40	21.88		60.0	
10098- CAB 10098- CAB 10099- DAC EDGE-FDD (TDMA, 8PSK, DAC 10100- CAE MHz, QPSK) 10101- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- CAE LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- CAF MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM)		Z	100.00	108.67	23.14		60.0	
10099-DAC 10100-LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10101-LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102-LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103-LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104-LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105-LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108-LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108-CAF MHz, QPSK)		X	1.61	66.98	14.45	0.00	150.0	± 9.6 %
10099-DAC 10100-LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10101-LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102-LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103-LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104-LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105-LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108-LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108-LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109-LTE-FDD (SC-FDMA, 100% MHz, QPSK)	Y	Y	1.83	68.94	15.87		150.0	
10099-DAC 10100-LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10101-LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102-LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103-LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104-LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105-LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108-LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108-CAF MHz, QPSK)		<u> </u>	1.61	66.33	14.36	0.00	150.0	
10100- CAE 10101- CAE MHz, QPSK) 10101- CAE MHz, 16-QAM) 10102- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10103- CAF MHz, 64-QAM) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, QPSK)	,	^ Y	1.57	66.91	14.41	0.00	150.0	± 9.6 %
10100- CAE 10101- CAE MHz, QPSK) 10101- CAE MHz, 16-QAM) 10102- CAE LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10103- CAF MHz, 64-QAM) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, QPSK)		z Z	1.80	68.88	15.85		150.0	*******
10100- CAE 10101- CAE 10101- CAE 10101- CAE 10102- CAE 10103- CAF 10104- CAF 10104- CAF 10105- CAF 10105- CAF 10105- CAF 10108- CAF 10108- CAF 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, QPSK)		$\frac{2}{x}$	1.57 5.11	66.26	14.32	0.50	150.0	1000
CAE MHz, QPSK) 10101- LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100% MHz, QPSK)	Y			79.85	27.95	9.56	60.0	± 9.6 %
CAE MHz, QPSK) 10101- LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100% MHz, QPSK)			6.18	86.42	31.49		60.0	
CAE MHz, QPSK) 10101- LTE-FDD (SC-FDMA, 100% MHz, 16-QAM) 10102- LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100% MHz, QPSK)		Z	5.66 2.72	82.29 68.86	29,29 15,96	0.00	60.0	1000
CAE MHz, 16-QAM) 10102- LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100% MHz, QPSK)		^ Y	2.72	70.42		0.00	150.0	± 9.6 %
CAE MHz, 16-QAM) 10102- LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100% MHz, QPSK)			2.77	68.66	16.85		150.0	
CAE MHz, 16-QAM) 10102- LTE-FDD (SC-FDMA, 100% MHz, 64-QAM) 10103- LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100% MHz, QPSK)		- +	2.77	66.71	15.78 15.42	0.00	150.0	1069/
10103- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, QPSK)	NB, 20 X					0.00	150.0	± 9.6 %
10103- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, QPSK)			3.09	67.54	15.94		150.0	
10103- CAF LTE-TDD (SC-FDMA, 100% MHz, QPSK) 10104- CAF LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- CAF LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- CAF LTE-FDD (SC-FDMA, 100% MHz, QPSK)	RB, 20 X		3.00 3.05	66.60 66.78	15.35 15.55	0.00	150.0 150.0	± 9.6 %
CAF MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%	Y	+		07.54	40.04		1500	
CAF MHz, QPSK) 10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%			3.19	67.54	16.04		150.0	***************************************
10104- LTE-TDD (SC-FDMA, 100% MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%			3.11 4.63	66.65 72,33	15.49 19.10	3.98	150.0 65.0	± 9.6 %
CAF MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%	Y	7	5.31	74.95	20.40		65.0	· · · · · · · · · · · · · · · · · · ·
CAF MHz, 16-QAM) 10105- LTE-TDD (SC-FDMA, 100% MHz, 64-QAM) 10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%	Z	z	5.01	73.33	19.72		65.0	
10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%	RB, 20 X	X	4.71	70.15	18.78	3.98	65.0	± 9.6 %
10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%	Y	′	5.12	71.87	19.74		65.0	
10108- LTE-FDD (SC-FDMA, 100% MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%	Z	<u> </u>	4.99	70.84	19.32		65.0	
CAF MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%			4.62	69.52	18.79	3.98	65.0	± 9.6 %
CAF MHz, QPSK) 10109- LTE-FDD (SC-FDMA, 100%	Y		4.98	71.08	19.67		65.0	
10109- LTE-FDD (SC-FDMA, 100%	RB, 10 X		4.89 2.32	70.18 68.23	19.31 15.74	0.00	65.0 150.0	± 9.6 %
1 = (= + 1	Y	, +	2.50	60.77	40.00		450.0	
1 = (= +	Y		2.56	69.77	16.68		150.0	
1 = (= +	RB, 10 X		2.39	67.99	15.57	A 00	150.0	1000
1111	Y Y		2.57	66.62	15.17	0.00	150.0	± 9.6 %
			2.73	67.56	15.82		150.0	
10110- LTE-FDD (SC-FDMA, 100% CAF QPSK)	RB, 5 MHz, X		2.64 1.82	66.42 67.31	15.13 15.00	0.00	150.0 150.0	± 9.6 %
	Y	7 +	2.06	69.08	16.19		150.0	
	Z		1.89	67.03	14.94		150.0	
10111- LTE-FDD (SC-FDMA, 100% CAF 16-QAM)	RB, 5 MHz, X		2.27	67.56	15.11	0.00	150.0	± 9.6 %
	Y	7	2.50	68.95	16.11		150.0	
	1 Y	2	2.32	67.14	15.12		150.0	

10112- CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.70	66.75	15.29	0.00	150.0	± 9.6 %
		Υ	2.86	67.62	15.89		150.0	
		Ζ	2.77	66.52	15.24		150.0	
10113- CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	Х	2.41	67.80	15.29	0.00	150.0	± 9.6 %
		Y	2.64	69.12	16.24		150.0	
		Z	2.47	67.38	15.32		150.0	
10114- CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	Х	4.85	66.91	16.28	0.00	150.0	± 9.6 %
		Υ	4.92	67.20	16.42		150.0	
		Z	4.93	66.80	16.23		150.0	
10115- CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.08	66.97	16.31	0.00	150.0	± 9.6 %
		Υ	5.16	67.24	16.44		150.0	
		Z	5.19	66.91	16.30		150.0	
10116- CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	Х	4.91	67.06	16.28	0.00	150.0	± 9.6 %
		Y	5.00	67.37	16.44		150.0	
404.		Z	5.02	67.01	16.26		150.0	
10117- CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.82	66.80	16.24	0.00	150.0	± 9.6 %
		Y	4.91	67.14	16.41		150.0	
10::5		Z	4.92	66.75	16.22		150.0	
10118- CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.15	67.18	16.42	0.00	150.0	± 9.6 %
		Υ	5.23	67.42	16.54		150.0	
		Z	5.28	67.15	16.43		150.0	
10119- CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	×	4.92	67.09	16.30	0.00	150.0	± 9.6 %
		Y	5.00	67.37	16.45		150.0	
		Z	5.02	67.00	16.27		150.0	
10140- CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	Х	3.06	66.79	15.45	0.00	150.0	± 9.6 %
		Υ	3.21	67.57	15.95		150.0	
		Z	3.13	66.66	15.40		150.0	
10141- CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.19	67.01	15.68	0.00	150.0	± 9.6 %
		Υ	3.34	67.73	16.14		150.0	
		Z	3.26	66.83	15.61		150.0	
10142- CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	Х	1.53	66.71	13.85	0.00	150.0	± 9.6 %
		Υ	1.82	69.13	15.54		150.0	
		Z	1.62	66.60	14.09		150.0	
10143- CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	1.93	66.97	13.55	0.00	150.0	± 9.6 %
		Υ	2.31	69.49	15.29	<u></u>	150.0	
		Z	2.06	67.05	14.07	<u> </u>	150.0	
10144- CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.68	64.38	11.67	0.00	150.0	± 9.6 %
		Υ	1.94	66.13	13.09		150.0	
		Z	1.85	64.82	12,42	<u> </u>	150.0	
10145- CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.61	60.00	6.25	0.00	150.0	± 9.6 %
		Υ	0.75	61.41	7.98	ļ	150.0	
10146-	LTE-FDD (SC-FDMA, 100% RB, 1.4	Z X	0.75 0.82	60.75 60.00	7.63 5.83	0.00	150.0 150.0	± 9.6 %
CAF	MHz, 16-QAM)			 			1	1
		Y	0.92	60.25	6.35	ļ	150.0	
4.00.4.45***		Z	1.12	61.59	7.98		150.0	1000
10147- CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	0.84	60.00	5.89	0.00	150.0	±9.6 %
		Υ	0.96	60.55	6.61	 	150.0	
		Z	1.20	62.21	8.43]	150.0	

10149- CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.58	66.69	15.22	0.00	150,0	± 9.6 %
		Υ	2.74	67.63	15.87		150.0	
		Z	2.65	66.49	15.18		150.0	
10150- CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	Х	2.71	66.82	15.33	0.00	150.0	±9.6 %
		Y	2.87	67.69	15.94		150.0	
		Z	2.78	66.58	15.28		150.0	
10151- CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	4.58	74.10	19.83	3.98	65.0	± 9.6 %
		Y	5.45	77.40	21.46		65.0	
		Z	5.00	75.19	20.56		65.0	
10152- CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	Х	4.21	69.89	18.16	3.98	65.0	± 9.6 %
		Υ	4.65	71.84	19.30		65.0	
		Z	4.51	70.68	18.85		65.0	
10153- CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	Х	4.55	71.06	19.09	3.98	65.0	± 9.6 %
		Υ	5.01	72.96	20.18		65.0	
		Ζ	4.85	71.76	19.74		65.0	
10154- CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	1.85	67.65	15.22	0.00	150.0	± 9.6 %
		Υ	2.10	69.48	16.44		150.0	
		Ζ	1.92	67.37	15.16		150.0	
10155- CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	Х	2.27	67.61	15.14	0.00	150.0	± 9.6 %
		Υ	2.50	69.00	16.15		150.0	
		Z	2.33	67.17	15.15		150.0	
10156- CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	Х	1.31	65.90	12.85	0.00	150.0	± 9.6 %
		Υ	1.64	68.88	14.94		150.0	
		Ζ	1.43	66.11	13.38		150.0	
10157- CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	Х	1.43	63.96	10.91	0.00	150.0	± 9.6 %
		Y	1.74	66.31	12.74		150.0	
		Z	1.63	64.73	11.94		150.0	
10158- CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	Х	2.42	67.89	15.35	0.00	150.0	± 9.6 %
		Υ	2.65	69.22	16.31		150.0	
		Z	2.48	67.46	15.37		150.0	<u> </u>
10159- CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	Х	1.49	64.13	11.04	0.00	150.0	± 9.6 %
		Y	1.82	66.66	12.95		150.0	
		Z	1.70	65.00	12.13		150.0	
10160- CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	Х	2.41	67.89	15.65	0.00	150.0	± 9.6 %
		Υ	2.60	69.05	16.44		150.0	
4.6.7		Z	2.48	67.64	15.56		150.0	
10161- CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	Х	2.59	66.74	15.14	0.00	150.0	± 9.6 %
		Υ	2.76	67.68	15.82		150.0	
		Ζ	2.66	66.50	15.14		150.0	
10162- CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	Х	2.70	67.00	15.31	0.00	150.0	± 9.6 %
		Υ	2.87	67.91	15.97		150.0	
		Z	2.77	66.73	15.29		150.0	
10166- CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	Х	2.91	67.87	18.41	3.01	150.0	± 9.6 %
		Υ	3.09	68.81	18.75		150.0	
		Ζ	3.17	68.75	19.02		150.0	
			0.11	00110				
10167- CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	3.24	69.92	18.52	3.01	150.0	± 9.6 %
						3.01		± 9.6 %

10168- CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	Х	3.66	72.66	20.22	3.01	150.0	± 9.6 %
		Υ	4.14	74.51	20.83		150.0	
		Z	4.11	73.91	20.95		150.0	
10169- CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	Х	2.32	65.83	17.44	3.01	150.0	± 9.6 %
		Υ	2.49	67.28	18.07		150.0	
		Z	2.46	66.70	18.14		150.0	
10170- CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	2.74	70.01	19.35	3.01	150.0	± 9.6 %
		Y	3.21	72.95	20.48		150.0	
10171-	LTE-FDD (SC-FDMA, 1 RB, 20 MHz,	Z	3.00	71.51	20.32 16.58	3.01	150.0	1000
AAE	64-QAM)	Ŷ	2.31	66.53 68.93		3.01	150.0	± 9.6 %
		Z	2.50	67.67	17.60 17.42		150.0 150.0	
10172-	LTE-TDD (SC-FDMA, 1 RB, 20 MHz,	X	2.90	74.23	22.35	6.02	65.0	± 9.6 %
CAF	QPSK)	Ŷ	3.68	79.90	24.98	0.02	65.0	19.0 %
		Z	3.06	80.19	25.56		65.0	
10173-	LTE-TDD (SC-FDMA, 1 RB, 20 MHz,	X	3.91	78.79	25.56	6.02	65.0	± 9,6 %
CAF	16-QAM)	Y		89.50	26.38	0.02	65.0	T 2'O 40
		Z	6,85 6.70	89.50	26.38		65.0	
10174-	LTE-TDD (SC-FDMA, 1 RB, 20 MHz,	X	2.90	73.28	19.67	6.02	65.0	± 9.6 %
CAF	64-QAM)	Y	5.51	84.77	24.11	0.02	65.0	1 9.0 %
		Z	4.93	82.66	24.11		65.0	
10175- CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.30	65.58	17.20	3.01	150.0	± 9.6 %
OAI	- Qi Oily	Y	2.47	67.02	17.83		150.0	
		Z	2.44	66.43	17.89		150.0	
10176- CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	2.74	70.03	19.36	3.01	150.0	± 9.6 %
0,11	10 00 1111	Y	3.21	72.97	20.49		150.0	
		Z	3.00	71.53	20.33		150.0	
10177- CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.31	65.68	17.27	3.01	150.0	± 9.6 %
		Υ	2.48	67.13	17.91		150.0	
		Z	2.45	66.56	17.98		150.0	
10178- CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	Х	2.73	69.91	19.28	3.01	150.0	± 9.6 %
		Υ	3.19	72.83	20.41		150.0	
		Z	2.98	71.36	20.23		150.0	
10179- CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	Х	2.50	68.14	17.82	3.01	150.0	± 9.6 %
		Υ	2.89	70.84	18.91		150.0	
		Z	2.72	69.48	18.74		150.0	
10180- CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	2.31	66.50	16.56	3.01	150.0	± 9.6 %
		Y	2.63	68.90	17.57		150.0	
40	1 TT CDD (00 TT)	Z	2.50	67.63	17.39		150.0	1000
10181- CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	Х	2.31	65.67	17.27	3.01	150.0	± 9.6 %
		Y	2.48	67.11	17.90		150.0	
10182-	LTE-FDD (SC-FDMA, 1 RB, 15 MHz,	Z X	2.45 2.73	66.54 69.88	17.97 19.27	3.01	150.0 150.0	± 9.6 %
CAE	16-QAM)	+	2.40	70.04	20.40		150.0	
~		Y	3.19	72.81	20.40	-	150.0	
10183-	LTE-FDD (SC-FDMA, 1 RB, 15 MHz,	Z	2.98 2.31	71.34 66.48	20.21 16.55	3.01	150.0	± 9.6 %
AAD	64-QAM)			_1				
		Y	2.63	68.87	17.56	ļ	150.0	
		Z	2.49	67.61	17.37		150.0	1

10184- CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.32	65.70	17.29	3.01	150.0	± 9.6 %
		Y	2.49	67.15	17.92	1	150.0	
·······		Z	2.46	66.58	17.99		150.0	
10185- CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	Х	2.74	69.95	19.31	3.01	150.0	± 9.6 %
		Υ	3.20	72.88	20.43		150.0	
		Z	2,99	71.41	20.26		150.0	
10186- AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	2.32	66.53	16.58	3.01	150.0	± 9.6 %
	~	Υ	2.64	68.94	17.60		150.0	
40407	1. T	Z	2.51	67.67	17.41		150.0	
10187- CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	Х	2.33	65.78	17.37	3.01	150.0	± 9.6 %
		Υ	2.50	67.22	18.00		150.0	
40400	LTE FOR (OG FORM) (FOR A SHIP)	Z	2.47	66.64	18.07		150.0	
10188- CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	2.80	70.47	19.65	3.01	150.0	± 9.6 %
		Υ	3.29	73.46	20.79		150.0	
10100	LTE EDD (OC EDMA 4 ED	Z	3.07	72.01	20.64		150.0	
10189- AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	Х	2.35	66.85	16.82	3.01	150.0	± 9.6 %
		Y	2.69	69.31	17.86		150.0	
10193-	1555 000 44 (1550)	Z	2.55	68.03	17.68		150.0	
CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.23	66.54	15.90	0.00	150.0	± 9.6 %
		Y	4.33	66.90	16.14		150.0	
10194-	FEET 900 44- /UT O 5 11 00 NII	Z	4.32	66.32	15.87		150.0	
CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	Х	4.36	66.75	16.04	0.00	150.0	± 9.6 %
		Υ	4.47	67.12	16.27		150.0	
40405		Z	4.47	66.58	16.01		150.0	
10195- CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	Х	4.39	66.76	16.05	0.00	150.0	± 9.6 %
		Υ	4.50	67.13	16.28		150.0	
40400	IEEE 000 (4 (UE)	Z	4.50	66.61	16.03		150.0	
10196- CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	Х	4.21	66.52	15.87	0.00	150.0	± 9.6 %
		Υ	4.32	66.89	16.12		150.0	
40407	JEEE 000 44 WEAR	Z	4.31	66.33	15.87		150.0	
10197- CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	Х	4.37	66.75	16.04	0.00	150.0	± 9.6 %
	1	Y	4.48	67.12	16.28		150.0	
10100	JEET 900 44- (UTAP)	Z	4.48	66.59	16.02		150.0	
10198- CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.38	66.75	16.05	0.00	150.0	± 9.6 %
		Y	4.50	67.13	16.28		150.0	
10219-	DEEE 900 440 /UTAN L TOOM	Z	4.50	66.62	16.04		150.0	
CAC CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	×	4.16	66.56	15.85	0.00	150.0	± 9.6 %
		Y	4.27	66.93	16.10		150.0	
10220	IEEE 900 44- (UT by 1 10 0 0)	Z	4.26	66.35	15.83		150.0	
10220- CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	Х	4.36	66.72	16.03	0.00	150.0	± 9.6 %
······································		Υ	4.47	67.08	16.26		150.0	
10224	IEEE 000 44- (I)T M	Z	4.47	66.56	16.01		150.0	
10221- CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.40	66.71	16.04	0.00	150.0	± 9.6 %
		Υ	4.51	67.07	16.27		150.0	
10000	IEEE 900 445 (UTAE - 1 45 A	Ζ	4.51	66.56	16.03		150.0	
10222- CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	Х	4.80	66.80	16.23	0.00	150.0	± 9.6 %
		Y	4.88	67.12	16.39		150.0	
		Ζ	4.89	66.72			100.0	

10223- CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.04	66.95	16.32	0.00	150.0	± 9.6 %
		Y	5.14	67.29	16.49		150.0	
		Ż	5.18	66.99	16.36		150.0	
10224- CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.84	66.92	16,22	0.00	150.0	± 9.6 %
		Υ	4.92	67.24	16.38		150.0	
		Z	4.93	66.82	16.18		150.0	
10225- CAB	UMTS-FDD (HSPA+)	Х	2.46	65.56	14.20	0.00	150.0	± 9.6 %
		Y	2.62	66.44	14.96		150.0	
		Z	2.55	65.41	14.45		150.0	
10226- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	4.12	79.74	22.87	6.02	65.0	± 9.6 %
		Υ	7.38	90.96	26.97		65.0	
		Z	7.19	90.56	27.66		65.0	
10227- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	4.10	78.95	21.90	6.02	65.0	± 9.6 %
		Y	7.43	89.71	25.78		65.0	
		Z	7.75	90.70	26.99		65.0	
10228- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	3.12	75.94	23.15	6.02	65.0	± 9.6 %
		Υ	4.06	82.01	25.85		65.0	
		Z	4.25	82.24	26.47		65.0	
10229- CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.94	78.88	22.44	6.02	65.0	± 9.6 %
		Y	6.91	89.62	26.42		65.0	
		Z	6.76	89.24	27.11		65.0	
10230- CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	3.89	78.03	21.47	6.02	65.0	± 9.6 %
		Y	6.86	88.27	25.23		65.0	
		Z	7.16	89.19	26.40		65.0	
10231- CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	3.03	75.32	22.81	6.02	65.0	± 9.6 %
		Υ	3.92	81.25	25.48		65.0	
		Z	4.10	81.44	26.07		65.0	
10232- CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	Х	3.94	78.86	22.44	6.02	65.0	± 9.6 %
		Υ	6.89	89.60	26.42		65.0	
		Z	6.74	89.21	27,10		65.0	
10233- CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	3.88	77.99	21.46	6.02	65.0	± 9.6 %
		Υ	6.83	88.22	25.21		65.0	
		Z	7.13	89.13	26.38		65.0	
10234- CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.96	74.84	22.48	6.02	65.0	± 9.6 %
		Υ	3.82	80.66	25.12		65.0	
		Z	4.00	80.82	25.70		65.0	
10235- CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	Х	3.94	78.87	22.44	6.02	65.0	± 9.6 %
		Υ	6.90	89.63	26.43		65.0	
		Z	6.75	89.23	27.11	ļ <u>.</u>	65.0	
10236- CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.92	78.11	21.50	6.02	65.0	± 9.6 %
		Υ	6.93	88.43	25.27		65.0	
10237-	LTE-TDD (SC-FDMA, 1 RB, 10 MHz,	Z	7.23 3.03	89.34 75.32	26.44 22.81	6.02	65.0 65.0	± 9.6 %
CAE	QPSK)	+-;	2 00	04.07	25.40		650	
		Y	3.92	81.27	25,49		65.0	
10000	LITE TOD /CC EDMA 4 DD 45 MU-	Z	4.10	81.45	26.08	6.00	65.0	1060/
10238- CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.93	78.83	22.43	6.02	65.0	± 9.6 %
		Y	6.87	89.57	26.41		65.0	
		Z	6.72	89.17	27.08	I	65.0	

10239- CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	Х	3.87	77.95	21.45	6.02	65.0	± 9,6 %
		Y	6.80	88.17	25.20		65.0	
		Z	7.10	89.08	26.37		65.0	
10240- CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	Х	3.02	75.30	22.81	6.02	65.0	± 9.6 %
		Υ	3.91	81.25	25.48		65.0	
		Z	4.09	81.42	26.07		65.0	
10241- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	Х	5.47	76.60	23.52	6.98	65.0	± 9.6 %
		Υ	6.28	79.70	24.95		65.0	
		Ζ	6.08	77.98	24.56		65.0	
10242- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	Х	5.17	75.55	22.99	6.98	65.0	± 9.6 %
~		Υ	5.96	78.71	24.47		65.0	
		Ζ	5.82	77.10	24.09		65.0	
10243- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	Х	4.47	72.66	22.57	6.98	65.0	± 9.6 %
		Υ	4.85	74.66	23.64		65.0	
		Z	4.89	73.70	23.43		65.0	
10244- CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	Х	2.59	65.60	11.95	3.98	65.0	± 9.6 %
		Υ	3.16	68.30	13.59		65.0	
		Z	3.94	71.58	16.14]	65.0	
10245- CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	2.56	65.23	11.69	3.98	65.0	± 9,6 %
		Υ	3.08	67.71	13.25		65.0	
		Ζ	3.80	70.75	15.70		65.0	
10246- CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	Х	2.30	67.33	13.29	3.98	65.0	± 9.6 %
		Υ	3.40	73.14	16.55		65.0	
		Ζ	3.20	71.92	16.41		65.0	
10247- CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	Х	2.93	67.28	14.07	3.98	65.0	± 9.6 %
		Υ	3.57	70.51	16.14	****	65.0	
		Z	3.50	69.72	16.15		65.0	
10248- CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	Х	2.93	66.83	13.84	3.98	65.0	± 9.6 %
		Υ	3.51	69.74	15.76		65.0	
		Z	3,49	69.17	15.87		65.0	
10249- CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	Х	3.40	72.89	17.31	3,98	65.0	± 9.6 %
		Υ	5.05	79.62	20.60		65.0	
		Ζ	4.35	76.73	19.72		65.0	
10250- CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	Х	4.07	71.77	18.68	3.98	65.0	± 9.6 %
		Υ	4.65	74.35	20.17		65.0	
40054	LITE TOP (OC TOTAL)	Z	4,43	72.91	19.73		65.0	
10251- CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	Х	3.86	69.66	17.25	3,98	65.0	± 9.6 %
		Υ	4.37	71.98	18.68		65.0	
40000		Z	4.24	70.85	18.35		65.0	
10252- CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	4.28	75.56	20.13	3.98	65.0	±9.6 %
		Υ	5.50	80.28	22.41		65.0	
40050	LTE TOP (OC TOTAL)	Ζ	4.84	77.34	21.32		65.0	
10253- CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	Х	4.17	69.62	17.88	3.98	65.0	±9.6 %
		Υ	4.59	71.50	19.03		65.0	
100		Z	4.46	70.34	18.61		65.0	
10254- CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	Х	4.46	70.60	18.66	3.98	65.0	± 9.6 %
		Υ	4.90	72.45	19.77		65.0	
		Ż	1,00	12,70	10.11		: 00.0	

10255- CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	Х	4.40	73.51	19.69	3.98	65.0	± 9.6 %
		Y	5.16	76.59	21.27		65.0	
		Ż	4.77	74.49	20.43		65.0	
10256- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.88	62.21	8.80	3.98	65.0	± 9.6 %
		Y	2.16	63.72	9.95		65.0	
		Z	2.68	66.18	12.27	***************************************	65.0	
10257- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	Х	1.87	61.92	8.53	3.98	65.0	± 9.6 %
		Υ	2.13	63.28	9.61		65.0	
		Z	2.60	65.47	11.78		65.0	
10258- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	Х	1.63	62.98	9.76	3.98	65.0	± 9.6 %
		Y	2.11	66.24	12.11		65.0	
		Z	2.20	66.42	12.68		65.0	
10259- CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	3.37	69.09	15.81	3.98	65.0	± 9.6 %
		Υ	4.03	72.21	17.73		65.0	
		Z	3.88	71.08	17.53		65.0	
10260- CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	Х	3.41	68.89	15.70	3.98	65.0	±9.6%
		Υ	4.05	71.86	17.55		65.0	
		Z	3.92	70.83	17.40		65.0	
10261- CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	3.65	73.54	18.24	3.98	65.0	± 9.6 %
		Υ	4.99	79.08	21.01		65.0	
		Z	4.36	76.25	20.08		65.0	
10262- CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	Х	4.05	71.68	18.62	3.98	65.0	± 9.6 %
		Υ	4.63	74.27	20.11		65.0	
		Z	4.42	72.84	19.67		65.0	
10263- CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	Х	3.85	69.65	17.25	3.98	65.0	± 9.6 %
		Y	4.36	71.96	18.67		65.0	
		Z	4.23	70.83	18.35		65.0	
10264- CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	4.23	75.35	20.01	3.98	65.0	± 9.6 %
		Υ	5.43	80.04	22.29		65.0	
		Z	4.79	77.13	21.21		65.0	
10265- CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	Х	4.21	69.90	18.16	3.98	65.0	± 9.6 %
	·	Υ	4.65	71.84	19.30		65.0	
		Z	4.51	70.68	18.86		65.0	
10266- CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	Х	4.55	71.05	19.08	3.98	65.0	± 9.6 %
		Υ	5.00	72.95	20.16		65.0	
		Z	4.85	71.75	19.72		65.0	
10267- CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	4.57	74.06	19.81	3.98	65.0	± 9.6 %
		Υ	5.43	77.35	21.43		65.0	
		Z	4.99	75.14	20.54		65.0	
10268- CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	Х	4.89	70.28	18.92	3.98	65.0	± 9.6 %
		Υ	5.29	71.90	19.82		65.0	
		Ζ	5.16	70.86	19.41		65.0	
10269- CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	Х	4.93	70.03	18.82	3.98	65.0	± 9.6 %
		Υ	5.31	71.54	19.69		65.0	
		Z	5.18	70.53	19.29		65.0	
10270- CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	4.82	72.26	19.25	3.98	65.0	± 9.6 %
CAL		Υ	5.40	74.50	20.39	T	65.0	
		Ż	3,40	14.00	20.00	1	0.00	

10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.30	66.08	14.21	0.00	150.0	± 9.6 %
		Y	2.48	67,13	15.07		150.0	
		Z	2.37	65.78	14.35		150.0	
10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.33	66.42	14.09	0.00	150.0	± 9.6 %
		Υ	1.55	68.66	15.67		150.0	
		Z	1.35	65.99	13.99		150.0	
10277- CAA	PHS (QPSK)	X	1.44	58.96	4.35	9.03	50.0	± 9.6 %
		Υ	1.29	58.94	4.16		50.0	
40070		Z	1.60	59.77	5.29		50.0	
10278- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	Х	2.42	63.55	9.32	9.03	50.0	± 9.6 %
		Υ	2.50	65.00	10.23		50.0	
40070	DUO (ODOK DW OO WILL DU KO OO)	Z	3.00	66.61	11.73		50.0	
10279- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	2.47	63.72	9.48	9.03	50.0	± 9.6 %
		Υ	2.58	65.28	10.45		50.0	
10200	CDMA2000 DOL COST 5 25	Z	3.09	66.89	11.94		50.0	
10290- AAB	CDMA2000, RC1, SO55, Full Rate	X	0.64	61.56	7.87	0.00	150.0	± 9.6 %
		Y	0.98	65.79	11.09		150.0	
10291-	CDMACOCO DOS COSE E II D 4	Z	0.84	63.19	9.57		150.0	
AAB	CDMA2000, RC3, SO55, Full Rate	X	0.41	60.33	6.79	0.00	150.0	± 9.6 %
		Y	0.62	64.18	10.12		150.0	
10292-	CDM42000 DC2 CO20 F. # D-4	Z	0.50	61.40	8.20		150.0	
AAB	CDMA2000, RC3, SO32, Full Rate	Х	0.46	61.89	7.99	0.00	150.0	± 9.6 %
		Υ	1.01	70.37	13.40		150.0	
40000		Z	0.57	63.19	9.51		150.0	
10293- AAB	CDMA2000, RC3, SO3, Full Rate	Х	0.64	65.03	10.07	0.00	150.0	± 9.6 %
		Υ	4.97	89.66	20.54		150.0	
40005	ODIMAGOS DOLOGO VICE	Z	0.76	66.38	11.57		150.0	
10295- AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	Х	14.73	88.54	22.30	9.03	50.0	± 9.6 %
		Υ	21.95	97.75	26.07		50.0	
40007		Z	14.97	91.80	24.79		50.0	
10297- AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.34	68.34	15.82	0.00	150.0	±9.6 %
		<u> Y</u>	2.58	69.89	16.76		150.0	
10298-	LTE EDD (CO EDMA CON ED O MIL		2.40	68.08	15.64		150.0	
AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	Х	0.86	62.29	9.16	0.00	150.0	± 9.6 %
		Y	1.16	65.45	11.69		150.0	
10299-	LTE EDD (SC EDMA 500) DD 3 MUL	Z	1.05	63.56	10.60		150.0	
AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	Х	1.14	61.76	8.21	0.00	150.0	± 9.6 %
		Y	1.41	63.51	9.50		150.0	
10300-	LTE EDD (CC EDMA FOR DD CAN)	Z	1.73	65.72	11.49		150.0	
AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	0.97	60.07	6.55	0.00	150.0	±9.6 %
	<u> </u>	Y	1.14	61.11	7.49		150.0	****
10301- AAA	IEEE 802.16e WIMAX (29:18, 5ms,	Z X	1.33 4.13	62.21 64.55	8.89 16.56	4.17	150.0 50.0	± 9.6 %
///	10MHz, QPSK, PUSC)	 	4.00	05.00	4			
		Y	4.26	65.00	16.97	·	50.0	
10302-	IEEE 802.16e WIMAX (29:18, 5ms,	Z	4.39	64.86	16.90	4	50.0	
AAA	10MHz, QPSK, PUSC, 3 CTRL symbols)	Х	4.66	65.38	17.39	4.96	50.0	±9.6 %
		Y	4.76	65.70	17.72		50.0	
		Ζ	4.88	65.46	17.59		50.0	

10303-	IEEE 802.16e WiMAX (31:15, 5ms,	T V T	A AE	65.06	47.40	4.00	E0.0	1000
AAA	10MHz, 64QAM, PUSC)	X	4.45	65.36	17.40	4.96	50.0	± 9.6 %
		Υ	4.51	65.30	17.48		50.0	
		Z	4.62	65.06	17.37		50.0	
10304- AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.25	64.98	16.73	4.17	50.0	± 9.6 %
		Y	4.36	65.33	17.07		50.0	
		Z	4.45	64.98	16.90		50.0	
10305- AAA	IEEE 802.16e WIMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	Х	3.81	66.28	17.81	6.02	35.0	± 9.6 %
		Y	3.76	65.91	18.03		35.0	
10306- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.04 4.18	66.66 65.73	18.48 17.92	6.02	35.0 35.0	± 9.6 %
		Y	4.17	65.55	18.11		35.0	
		Z	4.39	65.94	18.38		35.0	
10307- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	Х	4.05	65.69	17.78	6.02	35.0	± 9.6 %
		Υ	4.04	65.48	17.96		35.0	
40000		Z	4.27	65.96	18.27		35.0	
10308- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.03	65.87	17.91	6.02	35.0	± 9.6 %
		Y	4.01	65.64	18.09		35.0	
10200	IEEE 802.16e WIMAX (29:18, 10ms,	Z	4.25	66.15	18.40	6.00	35.0	1000
10309- AAA	10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.18	65.77	18.00	6.02	35.0	± 9.6 %
		Y Z	4.19 4.42	65.61	18.20 18.49		35.0 35.0	
10310- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.13	66.06 65.78	17.90	6.02	35.0	± 9.6 %
7001	TOWNIE, QUOIN, MINO EXO, TO SYMBOIS	Y	4.12	65.57	18.08		35.0	
		Z	4.34	65.98	18.35		35.0	
10311- AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	2.69	67.62	15.56	0.00	150.0	± 9.6 %
		Υ	2.94	69.08	16.39		150.0	
		Z	2.75	67.40	15.38		150.0	
10313- AAA	iDEN 1:3	X	1.80	67.21	13.40	6.99	70.0	± 9.6 %
		Υ	2.78	73.35	16.36		70.0	
		Z	2.09	69.09	14.51		70.0	
10314- AAA	IDEN 1:6	X	3.26	75.39	19.57	10.00	30.0	± 9.6 %
		Y	5.56	85.97	24.05		30.0	
10315- AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	4.04 0.96	79.23 62.72	21.39 14.16	0.17	30.0 150.0	± 9.6 %
	C-1	Y	1.05 0.96	63.94 62.45	15.22 14.04		150.0 150.0	
10316- AAB	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	X	4.24	66.42	15.96	0.17	150.0	± 9.6 %
		Υ	4.35	66.80	16.22		150.0	
		Z	4.36	66.32	16.01		150.0	
10317- AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	Х	4.24	66.42	15.96	0.17	150.0	± 9.6 %
		Y	4.35	66.80	16.22		150.0	
10400- AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	Z X	4.36 4.31	66.32 66.71	16.01 15.99	0.00	150.0 150.0	± 9.6 %
ヘヘレ	oope duty cyole)	Y	4.43	67.11	16.24		150.0	
		Z	4.43	66.60	15.99		150.0	
10401- AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	4.98	66.52	16.05	0.00	150.0	±9.6 %
	1	Υ	5.08	66.87	16.24		150.0	
		Z	5.16	66.70	16.18		150.0	

10402- AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	Х	5.36	67.14	16.28	0.00	150.0	± 9.6 %
		Υ	5.44	67.45	16.42		150.0	
		Z	5.45	67.07	16.25		150.0	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	Х	0.64	61.56	7.87	0.00	115.0	± 9.6 %
		Υ	0.98	65.79	11.09		115.0	
		Z	0.84	63.19	9.57		115.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	Х	0.64	61.56	7.87	0.00	115.0	± 9.6 %
		Υ	0.98	65.79	11.09		115.0	
40400	001440000 000 0000 0044 0	Z	0.84	63.19	9.57		115.0	
10406- AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	Х	100.00	119.53	28.08	0.00	100.0	± 9.6 %
		Y	100.00	115.68	26.57		100.0	
10410-	LTC TDD (CC FDMA 4 DD 40 ML)	Z	100.00	126.19	31.47		100.0	
AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	X	2.86	79.80	18.70	3,23	80.0	± 9.6 %
		Υ	25.09	107.33	26,44		80.0	
40445		Z	100.00	133.23	34.42		80.0	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	0.92	62.32	13.80	0.00	150.0	± 9.6 %
		Υ	1.00	63.42	14.80		150.0	
40440	JEEF 000 44 MET 0 4 OUT (EDD	Z	0.91	61.96	13.60		150.0	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	X	4.22	66.50	15.96	0.00	150.0	± 9.6 %
		Y	4.32	66.87	16.21		150.0	
40447	SEEE 000 44 % INSELS OUT 40EDA 4	Z	4.32	66.33	15.95		150.0	
10417- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	Х	4.22	66.50	15.96	0.00	150.0	± 9.6 %
		Υ	4.32	66.87	16.21		150.0	
10418-	JEEE 902 41 - MIE 2 4 OLL- (D000	Z	4.32	66.33	15.95		150.0	
AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	Х	4.21	66.71	16.02	0.00	150.0	± 9.6 %
		Υ	4.32	67.09	16.27		150.0	
		Ζ	4.31	66.51	15.99		150.0	
10419- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	X	4.23	66.64	16.01	0.00	150.0	± 9.6 %
		Υ	4.34	67.01	16.25		150.0	
		Z	4.33	66.45	15.98	· · · · · · · · · · · · · · · · · · ·	150.0	
10422- AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.33	66.62	16.03	0.00	150.0	± 9.6 %
·		Υ	4.44	66.98	16.26		150.0	
40400	IEEE 000 44. 2 m o	Z	4.44	66.45	16.00		150.0	
10423- AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	Х	4.45	66.86	16.11	0.00	150.0	± 9.6 %
· · · · · · · · · · · · · · · · · · ·		Y	4.56	67.23	16.34		150.0	
10424-	IEEE 900 445 /UT 0 5-11 70 0	Z	4.57	66.72	16.10		150.0	
AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	Х	4.38	66.81	16.08	0.00	150.0	± 9.6 %
		Y	4.50	67.18	16.32		150.0	
10425-	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	Z X	4.50 5.03	66.66 67.03	16.07 16.34	0.00	150.0 150.0	± 9.6 %
AAB			F 44	077.00	40.40		150.0	
AAB	·	Υ	511 1	n/ 1/	In au			
AAB	·	Y Z	5.11 5.14	67.32 66.98	16.49 16.33			
10426- AAB	IEEE 802.11n (HT Greenfield, 90 Mbps,	Z X	5.14 5.06	66.98 67.16	16.49 16.33 16.40	0.00	150.0 150.0	± 9.6 %
10426-	·	Z	5.14	66.98	16.33	0.00	150.0	± 9.6 %

10427- AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	Х	5.01	66.91	16.27	0.00	150.0	± 9.6 %
		Υ	5.09	67.19	16.41		150.0	
		Ζ	5.13	66.90	16.28		150.0	
10430- AAC	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	Х	4.07	72.07	17.91	0.00	150.0	± 9.6 %
		Υ	4.24	72.56	18.40		150.0	
		Z	4.04	71.02	17.78		150.0	
10431- AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	Х	3.79	66.99	15.69	0.00	150.0	± 9.6 %
		Υ	3.94	67.49	16.09		150.0	
		Z	3.92	66.79	15.76	***************************************	150.0	
10432- AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.13	66.89	15.96	0.00	150.0	± 9.6 %
		Y	4.26	67.30	16.25		150.0	
40400	LTE EDD (OFDIA) COLUMN	Z	4.25	66.71	15.96		150.0	
10433- AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.40	66.85	16.11	0.00	150.0	± 9.6 %
		Y	4.51	67.22	16.34		150.0	
10434-	IM CDMA (BC Tool Madel 4, 04 DDOL'S	Z	4.51	66.70	16.09	A 00	150.0	
AAA 	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.05	72.38	17.35	0.00	150.0	± 9.6 %
			4.37	73.48	18.19		150.0	
10435-	LITE TOD (OC FOMA 4 DD COARL)	Z	4.07	71.60	17.46		150.0	
AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.72	79.05	18.38	3.23	80.0	± 9.6 %
		Y	21.44	105.07	25.81		80.0	
40447	LTE EDD (OFDIA) CALL E THO	Z	100.00	132.91	34.27		80.0	
10447- AAC	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	Х	2.96	66.34	14.12	0.00	150.0	± 9.6 %
		Υ	3,18	67.31	14.92		150.0	
		Z	3.13	66.39	14.53		150.0	
10448- AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	X	3.67	66.79	15.57	0.00	150.0	± 9.6 %
		Υ	3.81	67.30	15.97		150.0	
		Z	3.78	66.58	15,62		150.0	
10449- AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	X	3.98	66.71	15.86	0.00	150.0	± 9.6 %
		Υ	4.10	67.14	16.16		150.0	
		Z	4.09	66.52	15.85		150.0	
10450- AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.21	66.62	15.96	0.00	150.0	± 9.6 %
		Υ	4.32	67.01	16.21		150.0	
		Z	4.30	66.46	15.93		150.0	
10451- AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	Х	2.70	65.75	13.11	0.00	150.0	± 9.6 %
		Υ	2.96	67.00	14.12		150.0	
		Z	2.94	66.14	13.79		150.0	
10456- AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	Х	5.99	67.61	16.55	0,00	150.0	± 9.6 %
	4-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2	Y	6.02	67.80	16.61		150.0	
		Z	6.11	67.72	16.61		150.0	
10457- AAA	UMTS-FDD (DC-HSDPA)	X	3.61	65.32	15.70	0.00	150.0	± 9.6 %
		Υ	3.69	65.64	15.94		150.0	
10458- AAA	CDMA2000 (1xEV-DO, Rev. B, 2	Z X	3.65 3.19	65.04 69.07	15.66 15.08	0.00	150.0 150.0	± 9.6 %
/\/\\\	carriers)	Y	3.69	71.30	16.62		150.0	1
		Z	3.53	69.92			·	
10459-	CDMA2000 (1vEV DO Pov P 2	X			16.16	0.00	150.0	+06%
AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)		4.69	69.03	17.48	0.00	150.0	± 9.6 %
		Y	4.79	69.11	17.75	 	150.0	ļ
		Z	4.84	68.73	17.83	<u> </u>	150.0	<u>l</u>

10460- AAA	UMTS-FDD (WCDMA, AMR)	X	0.72	66.02	14.12	0.00	150.0	± 9.6 %
		Υ	0.91	69.57	16.66		150.0	
		Z	0.71	65.26	13.72		150.0	
10461- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.93	75.92	18.31	3.29	80.0	±9.6%
		Υ	6.83	93.43	24.06		80,0	
		Z	100.00	137.66	36.58		80.0	
10462- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	0.63	60.00	7.27	3.23	80.0	± 9.6 %
·		Υ	0.63	60.00	7.19		80.0	
10.00		Z	1.15	65.31	10.99		80.0	
10463- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	0.65	60.00	6.55	3.23	80.0	± 9.6 %
***************************************		Y	0.66	60.00	6.45		80.0	
40404	LTE TOD (OG FDM) 4 DD G MIL	Z	0.67	60.00	7.76		80.0	
10464- AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.38	71.32	15.83	3.23	80.0	± 9.6 %
		Y	4.54	86.66	21.20		80.0	
10465-	LTC TDD (CO CDAMA 4 DD CAMA 4	Z	100.00	134.26	34.80		80.0	
AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	0.63	60.00	7.20	3.23	80.0	± 9.6 %
		Y	0.63	60.00	7.11		80.0	
40400	LTE TOD (OC TOM 4 DD CAM)	Z	0.94	63.37	10.05		80.0	
10466- AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	Х	0.65	60.00	6.50	3.23	80.0	±9.6 %
		Y	0.66	60.00	6.41		80.0	
10467-	LTE TOD (CC CDMA 4 DD 5 MH-	Z	0.68	60.00	7.70		80.0	
AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	1.47	72.19	16.22	3.23	80.0	± 9.6 %
		Υ	5.30	88.83	21.91		80.0	
40400	LITE TOD (OO FDIAL LOD SINGLE)	Z	100.00	134.76	35.02		80.0	
10468- AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	0.63	60.00	7.22	3.23	80.0	± 9.6 %
		Υ	0.63	60.00	7.14		80.0	
40400	LTE TOD (OO FOLM) 4 DD FAMIL OF	Z	0.99	63.90	10.32		80.0	
10469- AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	0.65	60.00	6.51	3.23	80.0	± 9.6 %
		Υ	0.66	60.00	6.41		80.0	
40.470	LTE TRR (OR ERM)	Z	0.68	60.00	7.70		80.0	
10470- AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	1.46	72.21	16.22	3.23	80.0	± 9.6 %
		Υ	5.35	88.98	21.94		80.0	
10471-	LTE TDD (OC EDMA 4 DD 40 ML) 40	Z	100.00	134.82	35.03		80.0	
AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	0.63	60.00	7.21	3.23	80.0	± 9.6 %
		Υ	0.63	60.00	7.12		80.0	
10472-	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-	Z	0.98	63.79	10.26		80.0	
AAD	QAM, UL Subframe=2,3,4,7,8,9)		0.65	60.00	6.49	3,23	80.0	± 9.6 %
		Y	0.66	60.00	6.39		80.0	
10473-	LTE-TDD (SC-FDMA, 1 RB, 15 MHz,	Z	0.67	60.00	7.68		80.0	
AAD	QPSK, UL Subframe=2,3,4,7,8,9)	X	1.46	72.15	16.20	3.23	80.0	± 9.6 %
		Y	5.31	88.87	21.90		80.0	
10474- AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Z X	100.00 0.63	134.77 60.00	35.01 7.20	3.23	80.0 80.0	± 9.6 %
· • • •	= 101, 02 000Hame=2,0,4,1,0,5)	Υ	0.63	60.00	7 40		00.0	····
		Z	0.63	63.74	7.12	· · · · · · · · · · · · · · · · · · ·	80.0	
10475-	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-	X	0.65	60.00	10.23	2 22	80.0	1.0.0.0
AAD	QAM, UL Subframe=2,3,4,7,8,9)				6.49	3.23	80.0	± 9.6 %
		Y	0.66	60.00	6.39		80.0	
		Ζ	0.67	60.00	7.69		80.0	

10477- AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	0.63	60.00	7.17	3.23	80.0	± 9.6 %
//\L	QAIVI, OL OUDITAINS-2,0,4,7,0,9)	Y	0.63	60.00	7.08		80.0	
		ż	0.93	63.31	10.01		80.0	
10478- AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	0.65	60.00	6.47	3.23	80.0	± 9.6 %
		Υ	0.66	60.00	6.37	***************************************	80.0	
		Z	0.67	60,00	7.67		80.0	
10479- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	4.26	80.69	20.19	3.23	80.0	± 9.6 %
		Υ	7.01	87.70	22.71		80.0	
		Z	21.27	105.57	28.88		80.0	
10480- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.88	66.39	12,32	3.23	80.0	± 9.6 %
		Y	3.13	71.95	14.74		80.0	
40404	1.TE TDD (00 ED) (0.00 ED) (1.4.4.4.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1	Z	13.52	90.52	21.87	0.00	80.0	
10481- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.43	63.16	10.40	3.23	80.0	± 9.6 %
		Υ	2.06	66.80	12.23		80.0	
40400	LITE TOD (CO EDMA 500) SD CAN	Z	6.11	79.62	18.02		80.0	1.000
10482- AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.06	61.11	9.78	2.23	80.0	± 9.6 %
		Y	1.73	66.89	13.39		80.0	
40400	LTT TDD (OO EDIM COOK DD OAK)	Z	1.53	64.78	12.61	0.00	80.0	
10483- AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.23	60.00	8.50	2.23	80.0	± 9.6 %
		Y	1.57	62.45	10.22		80.0	
40404	LTE TOD (CO FOLM FOR DD O MIL	Z	2.78	68.98	14.19	0.00	80.0	1000
10484- AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.26	60.00	8.49	2.23	80.0	± 9.6 %
		Υ	1.54	61.98	9.97		80.0	
/n /n=		Z	2.53	67.57	13.58		80.0	
10485- AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	1.66	65.74	13.74	2.23	80.0	± 9.6 %
		Υ	2.52	71.78	17.06		80.0	
		Z	2.10	68.47	15.70		80.0	
10486- AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	×	1.66	62.56	11.27	2.23	80.0	± 9.6 %
		Y	2.26	66.58	13.85		80.0	
4040=		Z	2.12	65.12	13.38		80.0	
10487- AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.67	62.33	11.12	2.23	80.0	± 9.6 %
		Y	2.24	66.10	13.59		80.0	
40400	LITE TOP (OO FOLIA FOO) DD 40 MIL	Z	2.14	64.83	13.21	0.00	80.0	
10488- AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.26	67.65	16.13	2.23	80.0	± 9.6 %
***************************************		Y	2.82	71.24	18.12		80.0	
40400	LTE TOD (CO EDMA EOV DD 40 MI)	Z	2.57	69.00	17.08	0.00	80.0	+06%
10489- AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	***************************************	2.49	65.85	15.07	2.23	80.0	± 9.6 %
		Y	2.90	68.21	16.54	 	80.0	-
40400	LTE-TDD (SC-FDMA, 50% RB, 10 MHz,	Z	2.74	66.70 65.79	15.91	2 22	80.0	± 9.6 %
10490- AAD	64-QAM, UL Subframe=2,3,4,7,8,9)		2.57		15.03	2.23	80.0	£ 9,0 %
	<u> </u>	Y	2.97	68.04	16.46	 	80.0	-
10491-	LTE-TDD (SC-FDMA, 50% RB, 15 MHz,	X	2.83 2.64	66.63 67.24	15.88 16.30	2.23	80.0 80.0	± 9.6 %
AAD	QPSK, UL Subframe=2,3,4,7,8,9)	Y	3.09	69.79	17.74	-	80.0	
		Z	2.92	68.21	16.96		80.0	-
10492-	LTE-TDD (SC-FDMA, 50% RB, 15 MHz,	 _	2.92	65.80	15.66	2.23	80.0	± 9.6 %
10492- AAD	16-QAM, UL Subframe=2,3,4,7,8,9)					2.23		2 3.0 70
		Y	3.24	67.45	16.69	-	80.0	
		j Z	3.14	66.35	16.22	1	80.0	<u> </u>

10493-	LTE-TDD (SC-FDMA, 50% RB, 15 MHz,	T V	2.00	00.74	45.00	T 0.00	T 000	1
AAD	64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.99	65.74	15.62	2.23	80.0	± 9.6 %
	2,0,1,7,0,0)	Υ	3.29	67.32	16.63		80.0	
		Z	3,21	66.28	16.18		80.0	
10494- AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.77	68.16	16.65	2.23	80.0	± 9.6 %
		Υ	3.31	71.10	18.21	<u> </u>	80.0	
		Z	3.09	69.31	17.33		80.0	
10495- AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	2.95	66.01	15.89	2.23	80.0	± 9.6 %
···		Υ	3.25	67.67	16.91		80.0	
40400		Z	3.16	66.59	16.41		80.0	
10496- AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	3.04	65.92	15.89	2.23	80.0	± 9.6 %
******		Υ	3.34	67.48	16.84		80.0	
40407	LTE TOP (OG FRAM (OG) TO	Z	3.25	66.45	16.38		80.0	
10497- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.90	60.00	7.56	2.23	80.0	± 9.6 %
		Y	0.94	60.22	8.59		80.0	
10400	LTE TOD (DO FDMA 4000) DO 4 :	Z	0.98	60.00	8.77		80.0	
10498- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	1.09	60.00	6.33	2.23	80.0	± 9.6 %
		Υ	1.09	60.00	7.12		80.0	
40.400		Z	1.16	60.00	7.58		80.0	
10499- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.11	60.00	6.17	2.23	80.0	±9.6 %
		Υ	1.11	60.00	6.94		80.0	
		Z	1.17	60.00	7.42		80.0	
10500- AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	1.91	66,68	14.78	2.23	80.0	±9.6%
		Υ	2.64	71.54	17.49		80.0	
40504		Ζ	2.29	68.68	16.26		80.0	
10501- AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.02	64.23	12.91	2.23	80.0	± 9.6 %
		Y	2.60	67.75	15.11		80.0	
40500	LTE TOD (OC FOLK) 1000(DE CLU	Ζ	2.42	66.09	14.51		80.0	
10502- AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.05	64.07	12.75	2.23	80.0	±9.6 %
		Y	2.63	67.51	14.92		80.0	
10502	LTE TOP (SO FINAL ASSOCIATION	Ζ	2.46	65.95	14.37		80.0	
10503- AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	2.23	67.47	16.03	2.23	80.0	± 9.6 %
		Y	2.79	71.03	18.01		80.0	
10504-	LITE TOD (SC EDMA 1000/ DD EMIL	Ζ	2.54	68.82	16.98		80.0	
AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.48	65.75	15.00	2.23	80.0	± 9.6 %
		Y	2.88	68.10	16.48		80.0	
10505-	LTE-TDD (SC-FDMA, 100% RB, 5 MHz,	Z X	2.73	66.60	15.85		80.0	
AAD	64-QAM, UL Subframe=2,3,4,7,8,9)		2.55	65.70	14.97	2.23	80.0	± 9.6 %
		Y	2.95	67.94	16.40		80.0	
10506-	LTE-TDD (SC-FDMA, 100% RB, 10	Z	2.81	66.54	15.82		80.0	
AAD	MHz, QPSK, UL Subframe=2,3,4,7,8,9)		2.76	68.04	16.58	2.23	80.0	± 9.6 %
		Y	3.29	70.96	18.14		80.0	
10507-	LTE-TDD (SC-FDMA, 100% RB, 10	Z	3.07	69.18	17.26		80.0	
10507- \AD	MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.93	65.95	15.85	2.23	80.0	± 9.6 %
	<u> </u>							
	Sacratile 2,0,4,1,0,0)	Y	3.24	67.61	16.87		80.0	

10508- AAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.03	65.86	15.84	2.23	80.0	± 9.6 %
		Υ	3.33	67.40	16.79		80.0	
		Z	3.24	66.38	16.33		0.08	
10509- AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	3.24	67.72	16.53	2.23	80.0	± 9.6 %
		Υ	3.69	69.96	17.72		80.0	
		Z	3.51	68.56	17.03		80.0	
10510- AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	3.43	65.97	16.12	2.23	80,0	± 9.6 %
		Υ	3.71	67.32	16.91		80.0	
		Z	3.64	66.47	16.52		80.0	
10511- AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.52	65.89	16.12	2.23	80.0	± 9.6 %
		Y	3.78	67.15	16.86		80.0	
		Ζ	3.71	66.32	16.49		80.0	
10512- AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	3.22	68.47	16.72	2.23	80.0	± 9.6 %
		Y	3.79	71.22	18.12		80.0	
105/-		Z	3.54	69.57	17.32		80.0	
10513- AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.32	66.00	16.15	2.23	80.0	± 9.6 %
		Υ	3.60	67.43	16.98		80.0	
		Z	3.52	66.56	16.56		80.0	
10514- AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.39	65.79	16.10	2.23	80.0	± 9.6 %
		Y	3.64	67.11	16.88		80.0	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
		Z	3.57	66.28	16.49		80.0	
10515- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	Х	0.88	62.44	13.81	0.00	150.0	± 9.6 %
		Υ	0.96	63.62	14.88		150.0	
		Z	0.87	62.07	13.59		150.0	
10516- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.45	66.98	14.48	0.00	150.0	± 9.6 %
***************************************		Y	0.65	72.72	18.47		150.0	
40547	IEEE 000 44h WIELO 4 OH- (D000 44	Z	0.42	65.95	13.66	0.00	150.0	1000
10517- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.70	63.68	13.97	0.00	150.0 150.0	± 9.6 %
		Z	0.81 0.69	65.65 63.23	15.62 13.65	ļ	150.0	
10518- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.21	66.61	15.96	0.00	150.0	± 9.6 %
		Y	4.32	66.98	16.20		150.0	
, ,		Z	4.31	66.42	15.93		150.0	
10519- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	Х	4.34	66.77	16.04	0.00	150.0	± 9.6 %
,,,,,		Y	4.46	67.14	16.28		150.0	
40000	JEEE 000 44 # WEST COLL (OFFICE)	Z	4.46	66.61	16.03	<u> </u>	150.0	1000
10520- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.20	66.68	15.95	0.00	150.0	± 9.6 %
		Z	4.32 4.31	67.07 66.53	16.20 15.94	-	150.0 150.0	
10521- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.13	66.63	15.92	0.00	150.0	± 9.6 %
······································		Υ	4.25	67.04	16.18		150.0	
		Z	4.24	66.49	15.91		150.0	
10522- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.17	66.72	15.99	0.00	150.0	±9.6%
		Υ	4.29	67.14	16.26		150.0	
		Z	4.30	66.63	16.02		150.0	

10523- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	Х	4.12	66.80	15.96	0.00	150.0	± 9.6 %
		Υ	4.24	67.19	16.22		150.0	
		Z	4.21	66.57	15.90		150.0	
10524- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	Х	4.13	66.73	16.01	0.00	150.0	± 9.6 %
		Υ	4.25	67.13	16.27		150.0	
40505		Z	4.25	66.57	15.99		150.0	
10525- AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.18	65.86	15.65	0.00	150.0	± 9.6 %
		Y	4.29	66.26	15.91		150.0	
10526-	IEEE 802.11ac WiFi (20MHz, MCS1,	Z	4.27	65.65	15.61		150.0	
AAB	99pc duty cycle)	X	4.28	66.10	15.76	0.00	150.0	±9.6 %
		Y	4.41	66.52	16.01		150.0	
10527-	IEEE 802.11ac WiFi (20MHz, MCS2,	Z	4.40	65.94	15.73	0.00	150.0	
AAB	99pc duty cycle)	X	4.22	66.07	15.69	0.00	150.0	± 9.6 %
		Y	4.34	66.49	15.96		150.0	
10528-	IEEE 802.11ac WiFi (20MHz, MCS3,	Z	4.33	65.90	15.66	0.00	150.0	l
AAB	99pc duty cycle)	X	4.23	66.08	15.73	0.00	150.0	± 9.6 %
	<u> </u>	Y	4.36	66.51	15.99		150.0	
10529-	IEEE 802.11ac WiFi (20MHz, MCS4,	Z	4.34	65.91	15.70		150.0	
AAB	99pc duty cycle)	X	4.23	66.08	15.73	0.00	150.0	± 9.6 %
		Υ	4.36	66.51	15.99		150.0	
10531-	IEEE 902 44oc M/Ei (20MI IIII MCCC	Z	4.34	65.91	15.70		150.0	
AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	Х	4.19	66.07	15.68	0.00	150.0	± 9.6 %
		Υ	4.32	66.52	15.96		150.0	
40500		Z	4.31	65.94	15.68		150.0	
10532- AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.08	65.93	15.61	0.00	150.0	± 9.6 %
		Υ	4.20	66.39	15.90		150.0	
40500		Z	4.19	65.79	15.60		150.0	
10533- AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	Х	4.23	66.16	15.73	0.00	150.0	±9.6 %
		Υ	4.36	66.60	16.00		150.0	
40504		Z	4.35	65.98	15.69		150.0	
10534- AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	Х	4.82	66.10	15.85	0.00	150.0	± 9.6 %
		Y	4.91	66.46	16.04		150.0	
40505	IEEE 000 dd Alleidau dd Al	Z	4.91	66.02	15.83		150.0	
10535- AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	Х	4.85	66.20	15.91	0.00	150.0	± 9.6 %
		Y	4.94	66.56	16.09		150.0	
10526	IEEE 000 44a- MIEI (404)	Z	4.97	66.17	15.90		150.0	
10536- AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.74	66.19	15.87	0.00	150.0	± 9.6 %
		Y	4.84	66.58	16.08		150.0	
10527	IEEE 000 44- 34070 (1035)	Z	4.85	66.14	15.86		150.0	
10537- AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.82	66.26	15.91	0.00	150.0	±9.6 %
		Υ	4.91	66.59	16.08		150.0	
40520	1555 000 44 M/5/ (100 m)	Z	4.91	66.13	15.86		150.0	
10538- AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	Х	4.87	66.17	15.91	0.00	150,0	± 9.6 %
		Y	4.97	66.52	16.09		150.0	
10540	IEEE 000 44 MEET (1011)	Z	4.98	66.12	15.90		150.0	
10540- AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	Х	4.80	66.12	15.90	0.00	150.0	± 9.6 %
		Υ	4.90	66.49	16.09		150.0	
		Ζ	4.91	66.07	15.89		150.0	

10541- AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	Х	4.79	66.06	15.85	0.00	150.0	± 9.6 %
	sopo daty cycloy	Υ	4.89	66.43	16.04		150.0	
		Ż	4.89	65.96	15.82		150.0	
10542- AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	4.94	66.17	15.92	0.00	150.0	± 9.6 %
		Y	5.04	66.51	16.10		150.0	
		Z	5.05	66.09	15.90		150.0	
10543- AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.03	66.31	16.03	0.00	150.0	± 9.6 %
:		Υ	5.11	66.60	16.17		150.0	
		Z	5.12	66.17	15.97		150.0	
10544- AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.18	66.16	15.86	0.00	150.0	±9.6%
		Υ	5.26	66.52	16.02		150.0	
		Z	5.26	66.12	15.84		150.0	
10545- AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.36	66.65	16.06	0.00	150.0	± 9.6 %
		Υ	5.42	66.93	16.19		150.0	
		Z	5.45	66.61	16.04		150.0	
10546- AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	Х	5.20	66.27	15.88	0.00	150.0	±9.6%
		Υ	5.29	66.63	16.05		150.0	
		Z	5.29	66.25	15.87		150.0	
10547- AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.31	66.50	15.99	0.00	150.0	± 9.6 %
		Y	5.37	66.75	16.11		150.0	
		Z	5.38	66.37	15.93		150.0	
10548- AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	Х	5.41	66.98	16.21	0.00	150.0	± 9.6 %
		Υ	5.49	67.30	16.36		150.0	
		Z	5.57	67.13	16.28		150.0	
10550- AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	Х	5.30	66.60	16.06	0.00	150.0	± 9.6 %
		Y	5.35	66.83	16.16		150.0	
		Ž	5.37	66.46	15,99		150.0	
10551- AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.19	66.21	15.83	0.00	150.0	± 9.6 %
		Y	5.28	66.60	16.01		150.0	
		Z	5.30	66.24	15.84		150.0	
10552- AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	Х	5.18	66.29	15.86	0.00	150.0	± 9.6 %
		Υ	5.27	66.65	16.04		150.0	
		Z	5.26	66.20	15.82		150.0	
10553- AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.23	66.22	15.86	0.00	150.0	± 9.6 %
		Υ	5.32	66.58	16.03		150.0	
		Z	5.32	66.18	15.85		150.0	
10554- AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	Х	5.62	66,51	15.95	0.00	150.0	± 9.6 %
		Y	5.68	66.84	16.09		150.0	
		Z	5.69	66.48	15.94		150.0	
10555- AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	Х	5.69	66.71	16.04	0.00	150.0	±9.6%
		Υ	5.76	67.04	16.18		150.0	
		Z	5.79	66.75	16.05		150.0	
10556- AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	Х	5.75	66.88	16.11	0.00	150.0	± 9.6 %
		Υ	5.80	67.16	16.23		150.0	
		Z	5.83	66.85	16.10		150.0	
10557- AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	Х	5.69	66.70	16.04	0.00	150.0	±9.6%
		Υ	5.76	67.04	16.19		150.0	
		Z.	5.77	66.69	16.03		150.0	

10558- AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.67	66.68	16.05	0.00	150.0	± 9.6 %
		Υ	5.76	67.07	16.22		150.0	
	Value Va	Ż	5.80	66.79	16.10		150.0	
10560- AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.71	66.66	16.07	0.00	150.0	± 9.6 %
		Υ	5.79	67.02	16.23		150.0	
		Z	5.81	66.69	16.09		150.0	1
10561- AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	Х	5.65	66.65	16.10	0.00	150.0	± 9.6 %
		Υ	5.72	67.00	16.25		150.0	
		Z	5.75	66.69	16.12		150.0	
10562- AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	Х	5.68	66.77	16.16	0.00	150.0	± 9.6 %
		Υ	5.77	67.15	16.33		150.0	1
		Z	5.80	66,87	16.21		150.0	
10563- AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	Х	5.80	66.82	16.15	0.00	150.0	± 9.6 %
***		Y	5.88	67.15	16.29		150.0	
		Z	5.91	66.85	16.17		150.0	
10564- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 99pc duty cycle)	Х	4.52	66.62	16.09	0.46	150.0	± 9.6 %
		Υ	4.63	66.97	16.32		150.0	· · · · · · · · · · · · · · · · · · ·
		Z	4.63	66.48	16.09		150.0	
10565- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 99pc duty cycle)	Х	4.71	67.05	16.42	0.46	150.0	±9.6 %
		Υ	4.82	67.38	16.63		150.0	
		Z	4.83	66.91	16.42		150.0	
10566- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 99pc duty cycle)	Х	4.54	66.82	16.20	0.46	150.0	± 9.6 %
		Υ	4.65	67.19	16.43		150.0	
		Z	4.66	66.71	16.22		150.0	
10567- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 99pc duty cycle)	Х	4.58	67.25	16.61	0.46	150.0	± 9.6 %
·		Υ	4.69	67.60	16.82		150.0	
		Z	4.69	67.12	16.60		150.0	·····
10568- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle)	Х	4.42	66.46	15.88	0.46	150.0	± 9.6 %
		Υ	4.54	66.88	16.15		150.0	
		Z	4.56	66.45	15.95		150.0	
10569- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle)	Х	4.58	67.53	16.78	0.46	150.0	± 9.6 %
		Υ	4.68	67.86	16.97		150.0	
		Z	4.68	67.31	16.72		150.0	
10570- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle)	Х	4.57	67.27	16.64	0.46	150.0	± 9.6 %
		Υ	4.68	67.61	16.85		150.0	
405**		Z	4.69	67.12	16.62		150.0	
10571- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	Х	0.99	62.81	14.23	0.46	130.0	± 9.6 %
		Y	1.09	64.12	15.35		130.0	
		Z	1.00	62.69	14.25		130.0	
10572- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.00	63.25	14.53	0.46	130.0	± 9.6 %
		Υ	1.10	64.66	15.71		130.0	
40550		Z	1.00	63.12	14.54		130.0	
10573- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	Х	0.77	71.94	17.18	0.46	130.0	± 9.6 %
		Y	1.53	83.79	23.08		130.0	
	***************************************	Z	0.78	71.84	17.05		130.0	
10574- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11	X	0.97	67.27	16.73	0.46	130.0	± 9.6 %
AAA	Mbps, 90pc duty cycle)						į į	'
AAA	Mbps, 90pc duty cycle)	Y	1.16	70.12	18.67		130.0	

10575-	IEEE 802.11g WiFi 2.4 GHz (DSSS-	T V T	4.00	66.00	40.00	0.40	14000	1000
AAA	OFDM, 6 Mbps, 90pc duty cycle)	X	4.29	66.33	16.06	0.46	130.0	± 9.6 %
		Υ	4.40	66.70	16.31		130.0	
		Z	4.41	66.24	16.12		130.0	
10576- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 90pc duty cycle)	X	4.32	66.56	16.16	0.46	130.0	± 9.6 %
		Υ	4.43	66.92	16.41		130.0	
		Z	4.43	66.43	16.20		130.0	
10577- AAA	IEEE 802.11g WIFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 90pc duty cycle)	Х	4.47	66.78	16.31	0.46	130,0	± 9.6 %
		Υ	4.58	67.14	16.55		130.0	
40570		Z	4.60	66.69	16.36		130.0	
10578- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 90pc duty cycle)	X	4.38	66.93	16.42	0.46	130.0	± 9.6 %
***************************************		Y	4.49	67.29	16.66	,,,,	130.0	
40570	JEEE 000 44 - MEEL 0 4 OLL (DOOG	Z	4.50	66.83	16.46		130.0	
10579- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle)	Х	4.12	66.01	15.59	0.46	130.0	± 9.6 %
		Y	4.24	66.44	15.89		130.0	
10000	IEEE 000 44 - 1200 0 4 0 1 10 0 0	Z	4.26	65.99	15.69		130.0	
10580- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle)	X	4.14	66.03	15.59	0.46	130.0	± 9.6 %
		Y	4.27	66.48	15.90		130.0	
40504		Z	4.30	66.06	15.72		130.0	
10581- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle)	X	4.29	67.01	16.39	0.46	130.0	±9.6 %
		Y	4.41	67.39	16.65		130.0	
10582-	IEEE 802.11g WiFi 2.4 GHz (DSSS-	Z	4.41 4.04	66.87 65.76	16.41 15.35	0.46	130.0 130.0	± 9.6 %
AAA	OFDM, 54 Mbps, 90pc duty cycle)	Y	4.17	66.20	15.67		130.0	
		Z	4.19	65.76	15.46		130.0	
10583- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.29	66.33	16.06	0.46	130.0	± 9.6 %
	impo, oopo daty ojotoj	Y	4.40	66.70	16.31		130.0	
		Z	4.41	66.24	16.12		130.0	
10584- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.32	66.56	16.16	0.46	130.0	± 9.6 %
		Y	4.43	66.92	16.41		130.0	
		Z	4.43	66.43	16.20		130.0	
10585- AAB	IEEE 802.11a/h WiFl 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	Х	4.47	66.78	16.31	0.46	130.0	± 9.6 %
		Y	4.58	67.14	16.55		130.0	
		Z	4.60	66.69	16.36		130.0	
10586- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	Х	4.38	66.93	16.42	0.46	130.0	±9.6%
		Υ	4.49	67.29	16.66		130.0	
		Z	4.50	66.83	16.46		130.0	
10587- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	Х	4.12	66.01	15.59	0.46	130.0	± 9.6 %
		Υ	4.24	66.44	15.89		130.0	
		Z	4.26	65.99	15.69		130.0	
10588- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.14	66.03	15.59	0.46	130.0	± 9.6 %
	<u> </u>	Υ	4.27	66.48	15.90		130.0	
		Z	4.30	66.06	15.72		130.0	
10589- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	Х	4.29	67.01	16.39	0.46	130.0	± 9.6 %
		Υ	4.41	67.39	16.65		130.0	
		Z	4.41	66.87	16.41		130.0	
10590- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	Х	4.04	65.76	15.35	0.46	130.0	±9.6%
		Υ	4.17	66.20	15.67		130.0	
		Z	4.19	65.76	15.46		130.0	

10591- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.45	66.46	16.22	0.46	130.0	± 9.6 %
		Υ	4.56	66.80	16.44		130.0	
		Z	4.57	66.34	16.25		130.0	
10592- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	Х	4.56	66.73	16.33	0.46	130.0	± 9.6 %
		Y	4.67	67.08	16.56		130.0	
		Z	4.69	66.64	16.38		130.0	
10593- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	Х	4.47	66.59	16.17	0.46	130.0	±9.6%
		Υ	4.59	66.95	16.42		130.0	
		Z	4.60	66.51	16.23		130.0	
10594- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.53	66.78	16.36	0.46	130.0	± 9.6 %
		Y	4.64	67.13	16.59		130.0	
40505	1555 000 44 415 4	Z	4.66	66.69	16.40		130.0	
10595- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.49	66.75	16.26	0.46	130.0	±9.6 %
		Υ	4.61	67.12	16.50		130.0	
		Z	4.62	66.66	16.30		130.0	
10596- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.42	66.68	16.23	0.46	130.0	± 9.6 %
		Υ	4.53	67.07	16.49		130.0	
		Z	4.55	66.62	16.29		130.0	
10597- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.37	66.54	16.07	0.46	130.0	± 9.6 %
		Υ	4.49	66.93	16.34		130.0	
		Z	4.51	66.49	16.14		130.0	
10598- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	Х	4.38	66.81	16.37	0.46	130.0	± 9.6 %
		Υ	4.49	67.18	16.61		130.0	
		Z	4.50	66.72	16.41		130.0	
10599- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.17	67.00	16.56	0.46	130.0	± 9.6 %
		Y	5.23	67.23	16.68		130.0	
		Z	5.27	66.93	16.57		130.0	
10600- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.26	67.35	16.71	0.46	130.0	± 9.6 %
		Υ	5.31	67.52	16,80		130.0	
		Z	5.40	67.37	16.76		130.0	
10601- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	Х	5.19	67.20	16.65	0.46	130.0	± 9.6 %
		Υ	5.24	67.37	16.74		130.0	
		Z	5.28	67.08	16.63		130.0	
10602- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	Х	5.24	67.11	16.52	0.46	130.0	± 9.6 %
		Υ	5.31	67.34	16.64		130.0	
/25		Z	5.41	67.24	16.63		130.0	
10603- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.29	67.35	16.79	0.46	130.0	± 9.6 %
		Υ	5.38	67.63	16.93		130.0	
		Z	5.49	67.59	16.94		130.0	
10604- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	Х	5.15	66.85	16.51	0.46	130.0	± 9.6 %
		Υ	5.25	67.21	16.70		130.0	
1005-		Z	5.37	67.21	16.74	·	130.0	
10605- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	Х	5.23	67.14	16.65	0.46	130.0	± 9.6 %
		Y	5.30	67.39	16.79		130.0	
		Z	5.38	67.23	16.74		130.0	······
10606- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	Х	5.05	66.67	16.26	0.46	130.0	±9.6 %
		Y	5.11	66.89	16.39		130.0	
		Z	5.14	66.57	16.26		130.0	

10607- AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.30	65.79	15.85	0.46	130.0	± 9.6 %
	- sopodaty oyotoj	Y	4.41	66.18	16.11	 	130.0	
		l ż	4.41	65.65	15.87		130.0	
10608- AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.42	66.08	15.98	0.46	130.0	± 9.6 %
		Y	4.54	66.48	16.24		130.0	
		Z	4.55	65.99	16.03		130,0	
10609- AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	Х	4.32	65.89	15.79	0.46	130.0	± 9.6 %
		Y	4.44	66.32	16.07		130.0	
10010		Z	4.44	65.81	15.84		130.0	
10610- AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.37	66.08	15.98	0.46	130.0	± 9.6 %
		Y	4.49	66.49	16.24		130.0	
10611	IEEE 900 44 co Wiff: /OOMIL- MOOA	Z	4.49	65.99	16.01	0.40	130.0	
10611- AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.28	65.85	15.80	0.46	130.0	± 9.6 %
			4.40	66.28	16.08		130.0	
10612	IEEE 802.11ac WiFi (20MHz, MCS5,	Z	4.41	65.78	15.85	0.40	130.0	1000
10612- AAB	90pc duty cycle)	X	4.26	65.94	15.82 16.11	0.46	130.0	± 9.6 %
		l z	4.40	65.90	15.88		130.0	
10613-	IEEE 802.11ac WiFi (20MHz, MCS6,	$\frac{1}{x}$	4.25	65.75	15.65	0.46	130.0	± 9.6 %
AAB	90pc duty cycle)	Y	4.38	66.20	15.95	0.40	130.0	I 9.0 %
		Ż	4.40	65.73	15.73		130.0	
10614- AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.24	66.02	15.94	0.46	130.0	± 9.6 %
		Y	4.36	66.46	16.22		130.0	
		Ż	4.36	65.95	15.99	····	130.0	
10615- AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.26	65.66	15.54	0,46	130.0	± 9.6 %
		Y	4.39	66.11	15.84		130.0	
		Z	4.40	65.60	15.61	,,,,,	130.0	
10616- AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	4.95	66.09	16.09	0.46	130.0	± 9.6 %
		Υ	5.04	66.42	16.27		130.0	
		Z	5.06	66.06	16.12		130.0	
10617- AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	4.98	66.18	16.11	0.46	130.0	± 9.6 %
· · · · · · · · · · · · · · · · · · ·		Υ	5.07	66.52	16.29		130.0	
10015	Imperior of the state of the st	Z	5.13	66.25	16.19		130.0	
10618- AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	4.89	66.22	16.14	0.46	130.0	± 9.6 %
		Y	4.99	66.61	16.35	<u> </u>	130.0	
10619- AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	Z X	5.02 4.94	66.28 66.16	16.21 16.04	0.46	130.0 130.0	± 9.6 %
		Y	5.01	66.45	16.21		130.0	
		Ż	5.04	66.09	16.05	†	130.0	
10620- AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	4.98	66.07	16.05	0.46	130.0	± 9.6 %
		Y	5.08	66.42	16.24		130.0	
		Z	5.12	66.10	16.11		130.0	
10621- AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	Х	5.00	66.21	16.25	0.46	130.0	± 9.6 %
		Υ	5.09	66.55	16.43		130.0	
		Z	5.12	66.22	16.29		130.0	
10622- AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	×	4.98	66.29	16.29	0.46	130.0	± 9.6 %
		Υ	5,08	66.63	16.46		130.0	
		Z	5.11	66.32	16.34		130.0	

10623- AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	Х	4.88	65.86	15.92	0.46	130.0	± 9.6 %
		Y	4.97	66.20	16.11		130.0	
		Z	4.99	65.82	15.95		130.0	
10624- AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	Х	5.07	66.13	16.12	0.46	130.0	± 9.6 %
		Y	5.16	66.45	16.30		130.0	
		Z	5.20	66.12	16.17		130.0	
10625- AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.18	66.36	16.31	0.46	130.0	± 9.6 %
		Y	5.24	66.57	16.42		130.0	
40000	1555 000 44 NATE: (00141 14000	Z	5.32	66.38	16.36		130.0	
10626- AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.30	66.10	16.05	0.46	130.0	± 9.6 %
		Y	5.38	66.44	16.22		130.0	
40007		Z	5.40	66.12	16.09		130.0	
10627- AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	Х	5.53	66.77	16.36	0.46	130.0	± 9.6 %
		Y	5.59	67.01	16.48		130.0	
40000	IEEE 000 44 MEE' (OOM) MOOO	Z	5.65	66.81	16.41	A 15	130.0	
10628- AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.29	66.06	15.93	0.46	130.0	± 9.6 %
	_	Y	5.37	66.41	16.10		130.0	
40000	IEEE 000 44 - 180E: (00MH - 14000	Z	5.40	66.11	15.98		130.0	
10629- AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.43	66.42	16.11	0.46	130.0	± 9.6 %
		Y	5.47	66.61	16.20		130.0	
10020	IEEE 000 dd oo MEE (00MH - MOCA	Z	5.50	66.31	16.08	0.40	130.0	
10630- AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	Х	5.59	67.09	16.45	0.46	130.0	± 9.6 %
		Y	5.66	67.38	16.59		130.0	
40004		Z	5.82	67.46	16.66		130.0	ļ
10631- AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.58	67.18	16.70	0.46	130.0	±9.6%
		Y	5.66	67.50	16.84		130.0	
40000	JEET COS 44 MINISTRA	Z	5.74	67.33	16.79		130.0	
10632- AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	Х	5.57	67.09	16.67	0.46	130.0	± 9.6 %
		Y	5.60	67.22	16.72		130.0	
10000	1555 000 11 10/51 1001 11	Z	5.64	66.96	16.63		130.0	
10633- AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.30	66.12	16.00	0.46	130.0	± 9.6 %
		Y	5.39	66.49	16.18		130.0	
40004	LEEE 000 (4 MIE) (00) III MOOO	Z	5.45	66.28	16.11		130.0	
10634- AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	Х	5.34	66.35	16.17	0.46	130.0	± 9.6 %
		Y	5.43	66.70	16.34		130.0	
10635-	IEEE 900 14 oo MUE! (OOM! III AAOOO	Z	5.44	66.35	16.20		130.0	
AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.19	65.54	15.47	0.46	130.0	± 9.6 %
		Y	5.28	65.93	15.68		130.0	
10636-	IEEE 902 44cc Wirt: /4ccMU - MOCC	Z	5.31	65.62	15.55	A 1-	130.0	
AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	Х	5.75	66.48	16.16	0.46	130.0	± 9.6 %
		Y	5.81	66.78	16.30		130.0	
10637- AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	Z X	5.84 5.86	66.50 66.76	16.20 16.29	0.46	130.0 130.0	± 9.6 %
	oopo daty cycle)	Y	5.91	67.05	16.40		120.0	
		$\frac{1}{Z}$	5.98		16.42		130.0	
10638-	IEEE 802.11ac WiFi (160MHz, MCS2,	X	5.90	66.87 66.89	16.37 16.33	0.46	130.0	+0.6.9/
AAC	90pc duty cycle)]		0.46	130.0	± 9.6 %
		Y	5.95	67.16	16.45		130.0	
		Z	5.98	66.88	16.35		130.0	<u> </u>

10639- AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	Х	5,83	66.70	16.28	0.46	130.0	± 9.6 %
70.0	Jope daty cycle/	Υ	5.90	67.02	16.42		130.0	
		Z	5.94	66.76	16.33		130.0	
10640- AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	5.77	66.49	16.12	0.46	130.0	± 9.6 %
		Υ	5.85	66.88	16.30		130.0	
		Z	5.92	66.69	16.24		130.0	
10641- AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	Х	5.90	66.70	16.24	0.46	130.0	± 9.6 %
		Y	5.96	66.97	16.37		130.0	
		Z	6.02	66.77	16.30		130.0	
10642- AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	Х	5.91	66.85	16.49	0.46	130.0	± 9.6 %
		Υ	5.98	67.18	16.64		130.0	
10010		Z	6.03	66.94	16.56		130.0	
10643- AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.75	66.52	16.20	0.46	130.0	± 9.6 %
		Υ	5.83	66.86	16.37	·····	130.0	
40044	[PPPP 000 11 11PP //2021	Z	5.88	66.65	16.30		130.0	
10644- AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	5.80	66.66	16.30	0.46	130.0	± 9.6 %
		Y	5.88	67.03	16.47		130.0	
40045	HEEF OOD 44 - MANEY (400) HE MANEY	Z	5.94	66.85	16.42		130.0	
10645- AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	5.94	66.78	16.33	0.46	130.0	± 9.6 %
		Y	6.00	67.06	16.46		130.0	
40040	LITE TOO (OO FOM) A DO FAMIL	Z	6.15	67.15	16.54	0.00	130.0	
10646- AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	5.05	83.78	28.65	9.30	60.0	± 9.6 %
		Y	6.98	93.27	32,89		60.0	
40047	LTE TOP (OR EDIA (DD COAR)	Z	7.15	91.85	32.42		60.0	
10647- AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	4.54	81.82	27.99	9.30	60,0	± 9.6 %
		Y	5.99	90.07	31.84		60.0	
10010		Z	6.33	89.46	31.67		60.0	
10648- AAA	CDMA2000 (1x Advanced)	X	0.37	60.00	6.05	0.00	150.0	± 9.6 %
		Υ	0.48	61.63	8.16		150.0	
		Z	0.43	60.11	6.90		150.0	
10652- AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	2.93	65.21	15.11	2.23	80.0	± 9.6 %
		Y	3.20	66.58	16.05		80.0	
40050		<u> Z</u>	3.10	65.44	15.57		80.0	
10653- AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3,55	64.93	15.73	2.23	80.0	± 9.6 %
		Y	3.74	65.80	16.31		80.0	
10654- AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1,	X	3.68 3.60	65.02 64.60	15.99 15.83	2.23	80.0 80.0	± 9.6 %
71710	Clipping 44%)	Y	3.76	65.39	16.34		80.0	
		Z	3.70	64.69	16.04		80.0	
10655- AAD	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	3.69	64.52	15.89	2.23	80.0	± 9.6 %
		TY	3.83	65.30	16.38		80.0	
		Ż	3.78	64.64	16.09		80.0	
10658- AAA	Pulse Waveform (200Hz, 10%)	X	3.48	68.63	11.85	10.00	50.0	± 9.6 %
		Υ	5.65	74.45	13.80		50.0	
		Z	7.21	77.53	15.77		50.0	
10659- AAA	Pulse Waveform (200Hz, 20%)	X	2.03	66.95	10.03	6.99	60.0	±9.6%
		Y	100.00	101.12	19.79		60.0	
		Z	100.00	104.10	21.38		60.0	

10660- AAA	Pulse Waveform (200Hz, 40%)	X	0.68	62.61	6.79	3.98	80.0	± 9.6 %
		Y	100.00	101.16	18.64		80.0	
		Z	100.00	99.78	18.10		80.0	
10661- AAA	Pulse Waveform (200Hz, 60%)	Х	0.25	60.00	4.25	2.22	100.0	± 9.6 %
		Υ	100.00	102.31	18.13		100.0	
		Z	0.28	60.39	4.93		100.0	
10662- AAA	Pulse Waveform (200Hz, 80%)	X	6.06	60.21	1.38	0.97	120.0	± 9.6 %
		Υ	100.00	96.37	14.68		120.0	
		Z	9.95	60.38	1.42		120.0	

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\varepsilon_{r}\varepsilon_{0}}{\left[\ln(b/a)\right]^{2}} \int_{a}^{b} \int_{a}^{b} \int_{0}^{\pi} \cos\phi' \frac{\exp\left[-j\omega r(\mu_{0}\varepsilon_{r}'\varepsilon_{0})^{1/2}\right]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

Table D-I
Composition of the Tissue Equivalent Matter

Frequency (MHz)	750	750	835	835	1750	1750	1900	1900	2450	2450	5200 - 5800	5200 - 5800
Tissue	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Ingredients (% by weight)												
Bactericide			0.1	0.1								
DGBE					47	31	44.92	29.44		26.7		
HEC	C		1	1								
NaCl	See page 2-3	See page 2	1.45	0.94	0.4	0.2	0.18	0.39	See page 4	0.1	See page 5	See page 6
Sucrose			57	44.9								
Polysorbate (Tween) 80												
Water			40.45	53.06	52.6	68.8	54.9	70.17		73.2		

FCC ID: ZNFQ850QM	<u> PCTEST</u>	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
12/07/18 - 01/21/19	Portable Handset			Page 1 of 6

The Item is composed of the following ingredients:

Water, 35 - 58% H₂O

Sucrose Sugar, white, refined, 40 - 60% NaCl Sodium Chloride, 0 - 6%

Hydroxyethyl-cellulose

Medium Viscosity (CAS# 9004-62-0), <0.3%

Preservative: aqueous preparation, (CAS# 55965-84-9), containing Preventol-D7 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyyl-3(2H)-isothiazolone,

0.1 - 0.7%

Relevant for safety; Refer to the respective Safety Data Sheet*.

Figure D-1 Composition of 750 MHz Head and Body Tissue Equivalent Matter

Note: 750MHz liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

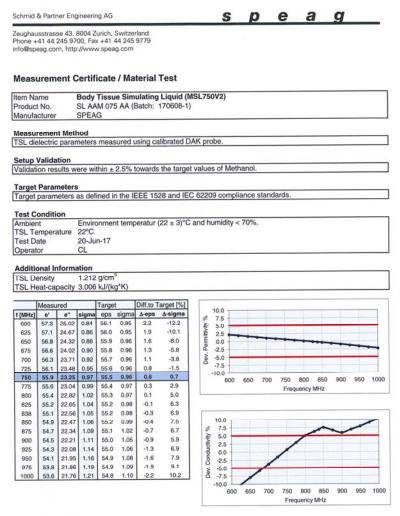


Figure D-2 750MHz Body Tissue Equivalent Matter

	FCC ID: ZNFQ850QM	PCTEST*	SAR EVALUATION REPORT	€ LG	Approved by: Quality Manager
	Test Dates:	DUT Type:			APPENDIX D:
	12/07/18 - 01/21/19	Portable Handset			Page 2 of 6
201	9 PCTEST Engineering Laboratory,	Înc.			REV 21.2 M



Zeughausstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 9700, Fax +41 44 245 9779 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name Head Tissue Simulating Liquid (HSL750V2) Product No.

SL AAH 075 AA (Batch: 170612-4) Manufacturer SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters


Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.


Test Condition

Ambient Environment Environmen Environment temperatur (22 ± 3)°C and humidity < 70%. Test Date 20-Jun-17 Operator CL

Additional Information

TSL Density 1.284 g/cm³ TSL Heat-capacity 2.701 kJ/(kg*K)








Figure D-3 750MHz Head Tissue Equivalent Matter

	FCC ID: ZNFQ850QM	PCTEST'	SAR EVALUATION REPORT	(†) LG	Approved by: Quality Manager
	Test Dates:	DUT Type:			APPENDIX D:
	12/07/18 - 01/21/19	Portable Handset			Page 3 of 6
201	9 PCTEST Engineering Laboratory,	Înc.			REV 21.2 M

The Item is composed of the following ingredients:

Water

50 – 73 % 25 – 50 % polyoxyethylenesorbitan monolaurate Non-ionic detergents

NaCl

0.05 - 0.1% Preventol-D7 Preservative

Safety relevant ingredients:

aqueous preparation, containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyyl-3(2H)-isothiazolone CAS-No. 55965-84-9 < 0.1 %

CAS-No. 9005-64-5 <50 % polyoxyethylenesorbitan monolaurate
According to international guidelines, the product is not a dangerous mixture and therefore not required to be

marked by symbols.

Figure D-4 Composition of 2.4 GHz Head Tissue Equivalent Matter

Note: 2.4 GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

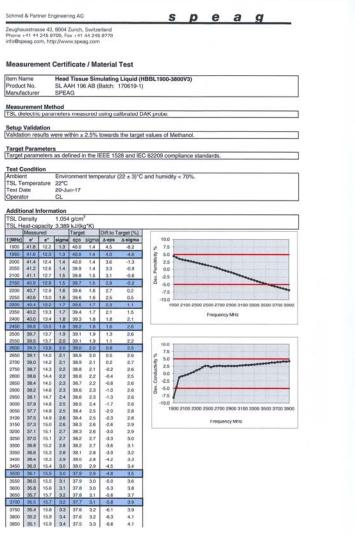


Figure D-5 2.4 GHz Head Tissue Equivalent Matter

FCC ID: ZNFQ850QM	PCTEST	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
12/07/18 - 01/21/19	Portable Handset			Page 4 of 6

The Item is composed of the following ingredients:

 $\begin{array}{lll} \text{Water} & 50-65\% \\ \text{Mineral oil} & 10-30\% \\ \text{Emulsifiers} & 8-25\% \\ \text{Sodium salt} & 0-1.5\% \\ \end{array}$

Figure D-6

Composition of 5 GHz Head Tissue Equivalent Matter

Note: 5 GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

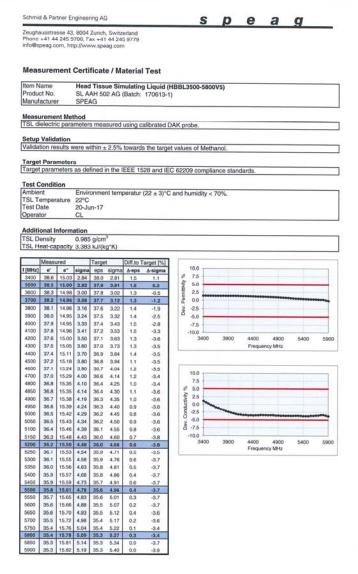


Figure D-7
5 GHz Head Tissue Equivalent Matter

FCC ID: ZNFQ850QM	PCTEST*	SAR EVALUATION REPORT	(LG	Approved by: Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
12/07/18 - 01/21/19	Portable Handset			Page 5 of 6

The Item is composed of the following ingredients:

Figure D-8 Composition of 5 GHz Body Tissue Equivalent Matter

Note: 5 GHz Body liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

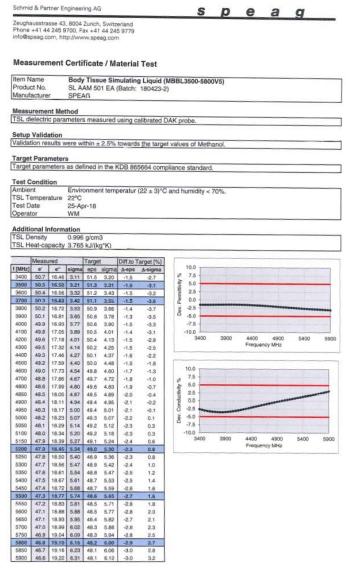


Figure D-9
5 GHz Body Tissue Equivalent Matter

FCC ID: ZNFQ850QM	PCTEST*	SAR EVALUATION REPORT	(t) LG	Approved by: Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
12/07/18 - 01/21/19	Portable Handset			Page 6 of 6

APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-1
SAR System Validation Summary – 1g

SAR	EDEO		DDODE			COND.	PERM.	C'	W VALIDATION	١	MOD.	VALIDATIO	N
SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE C	AL. POINT	(σ)	(er)	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
M	750	11/2/2018	3287	750	Head	0.908	42.190	PASS	PASS	PASS	N/A	N/A	N/A
G	835	8/9/2018	7410	835	Head	0.889	40.915	PASS	PASS	PASS	GMSK	PASS	N/A
M	1750	11/5/2018	3287	1750	Head	1.342	39.217	PASS	PASS	PASS	N/A	N/A	N/A
M	1900	11/5/2018	3287	1900	Head	1.430	39.014	PASS	PASS	PASS	GMSK	PASS	N/A
G	2450	8/7/2018	7410	2450	Head	1.865	39.618	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
I	2450	12/24/2018	7406	2450	Head	1.797	38.399	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
I	2600	12/24/2018	7406	2600	Head	1.961	37.812	PASS	PASS	PASS	TDD	PASS	N/A
Н	5250	7/5/2018	7409	5250	Head	4.492	34.994	PASS	PASS	PASS	OFDM	N/A	PASS
Н	5600	7/5/2018	7409	5600	Head	4.839	34.496	PASS	PASS	PASS	OFDM	N/A	PASS
Н	5750	7/5/2018	7409	5750	Head	4.995	34.288	PASS	PASS	PASS	OFDM	N/A	PASS
	750	7/19/2018	7406	750	Body	0.969	53.451	PASS	PASS	PASS	N/A	N/A	N/A
J	835	9/11/2018	3347	835	Body	0.984	54.197	PASS	PASS	PASS	GMSK	PASS	N/A
Н	835	11/1/2018	7409	835	Body	0.955	53.843	PASS	PASS	PASS	GMSK	PASS	N/A
D	1750	8/15/2018	7357	1750	Body	1.475	51.784	PASS	PASS	PASS	N/A	N/A	N/A
E	1900	12/3/2018	3332	1900	Body	1.518	51.796	PASS	PASS	PASS	GMSK	PASS	N/A
J	2450	10/15/2018	3347	2450	Body	2.025	51.090	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
J	2600	10/15/2018	3347	2600	Body	2.159	50.830	PASS	PASS	PASS	TDD	PASS	N/A
K	2450	4/3/2018	3319	2450	Body	2.043	51.13	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
L	5250	10/29/2018	7308	5250	Body	5.511	48.770	PASS	PASS	PASS	OFDM	N/A	PASS
L	5600	10/29/2018	7308	5600	Body	5.994	48.200	PASS	PASS	PASS	OFDM	N/A	PASS
L	5750	10/29/2018	7308	5750	Body	6.219	47.960	PASS	PASS	PASS	OFDM	N/A	PASS

Table E-2
SAR System Validation Summary – 10q

-					<u> </u>	-,		<u> </u>	a	. • 9				
I	SAR	FREQ.		PROBE			COND.	PERM.	CW	VALIDATION	٧	MO	D. VALIDAT	TON
	SYSTEM #	[MHz]	DATE	SN	PROBE C.	AL. POINT	(σ)	(er)	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
ſ	L	5250	10/29/2018	7308	5250	Body	5.511	48.770	PASS	PASS	PASS	OFDM	N/A	PASS
	L	5600	10/29/2018	7308	5600	Body	5.994	48.200	PASS	PASS	PASS	OFDM	N/A	PASS
ſ	٦	5750	10/29/2018	7308	5750	Body	6.219	47.960	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

FCC ID: ZNFQ850QM	PCTEST SECRETARY INC.	SAR EVALUATION REPORT	(LG	Approved by: Quality Manager
Test Dates:	DUT Type:			APPENDIX E:
12/07/18 - 01/21/19	Portable Handset			Page 1 of 1
10 DCTCCT Engineering Leberatory	la	•		DEV/ 24 2 M


APPENDIX G: DOWNLINK LTE CA RF CONDUCTED POWERS

1.1 LTE Downlink Only Carrier Aggregation Test Reduction Methodology

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. Per April 2018 TCBC Workshop Notes, the following test reduction methodology was applied to determine the combinations required for conducted power measurements.

LTE DLCA Test Reduction Methodology:

- The supported combinations were arranged by the number of component carriers in columns.
- Any limitations on the PCC or SCC for each combination were identified alongside the combination (e.g. CA 2A-2A-4A-12A, but B12 can only be configured as a SCC).
- Power measurements were performed for "supersets" (LTE CA combinations with multiple components carriers) and any "subsets" (LTE CA combinations with fewer component carriers) that were not completely covered by the supersets.
- Only subsets that have the exact same components as a superset were excluded for measurement.
- When there were certain restrictions on component carriers that existed in the superset that were not applied for the subset, the subset configuration was additionally evaluated.
- Both inter-band and intra-band downlink carrier aggregation scenarios were considered.



1.2 LTE Downlink Only Carrier Aggregation Test Selection and Setup

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number component carriers (CCs) supported by the product implementation. For those configurations required by April 2018 TCBC Workshop Notes, conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the maximum average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive. All bands required for SAR testing per FCC KDB procedures were considered. Based on the measured maximum powers below, no additional SAR tests were required for DLCA SAR configurations.

FCC ID: ZNFQ850QM	SAR EVALUATION REPORT	LG	Reviewed by: Quality Manager
Test Dates:	DUT Type:		APPENDIX G:
12/07/18 - 01/21/19	Portable Handset		Page 1 of 3

General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KBD 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
- All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.




Figure 1
DL CA Power Measurement Setup

1.3 Downlink Carrier Aggregation RF Conducted Powers

1.3.1 **LTE Band 13 as PCC**

Table 1
Maximum Output Powers

	Maximum Output i Owers																				
		PCC									SCC 1					SCC 2					
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)		
CA_13A-66A-66A	LTE B13	10	23230	782	QPSK	- 1	25	5230	751	LTE B66	20	66786	2145	LTE B66	20	67236	2190	25.16	25.10		
CA_13A-66C	LTE B13	10	23230	782	QPSK	- 1	25	5230	751	LTE B66	20	66786	2145	LTE B66	20	66984	2164.8	25.19	25.10		
CA_2A-13A-66A	LTE B13	10	23230	782	QPSK	- 1	25	5230	751	LTE B2	20	900	1960	LTE B66	20	66786	2145	25.09	25.10		
CA_2A-2A-13A	LTE B13	10	23230	782	QPSK	1	25	5230	751	LTE B2	20	900	1960	LTE B2	20	700	1940	25.18	25.10		
CA_2A-4A-13A	LTE B13	10	23230	782	QPSK	1	25	5230	751	LTE B2	20	900	1960	LTE B4	20	2175	2132.5	25.03	25.10		
CA 4A-4A-13A	LTF B13	10	23230	782	OPSK	1	25	5230	751	LTF B4	20	2175	2132.5	LTF B4	10	2350	2150	25.13	25.10		

1.3.2 **LTE Band 26 as PCC**

Table 2
Maximum Output Powers

		PCC									SCC 1					Power			
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_25A-26A	LTE B26	10	26865	831.5	QPSK	1	0	8865	876.5	LTE B25	20	8365	1962.5	-		-	-	25.43	25.49
CA_26A-41A	LTE B26	10	26865	831.5	QPSK	1	0	8865	876.5	LTE B41	20	40620	2593		-	-	-	25.35	25.49
CA_26A-41C	LTE B26	10	26865	831.5	QPSK	1	0	8865	876.5	LTE B41	20	40620	2593	LTE B41	20	40422	2573.2	25.43	25.49

1.3.3 LTE Band 66 as PCC

Table 3 **Maximum Output Powers**

	maximum output: on oil																		
		PCC									S	CC 1				Power			
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL#	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-66A	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B2	20	900	1960		-	-	-	24.49	24.48
CA_66B	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	5	66968	2163.2		-	-	-	24.49	24.48
CA_13A-66A-66A	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	20	66536	2120	LTE B13	10	5230	751	24.30	24.48
CA_13A-66C	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	20	66890	2155.4	LTE B13	10	5230	751	24.46	24.48
CA_2A-13A-66A	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B2	20	900	1960	LTE B13	10	5230	751	24.50	24.48
CA_2A-5A-66A	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B2	20	900	1960	LTE B5	10	2525	881.5	24.50	24.48
CA_2A-66C	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	20	66890	2155.4	LTE B2	20	900	1960	24.48	24.48
CA_5A-66A-66A	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	20	66536	2120	LTE B5	10	2525	881.5	24.48	24.48
CA_5A-66C	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	20	66890	2155.4	LTE B5	10	2525	881.5	24.41	24.48
CA_66A-66C	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	20	66734	2139.8	LTE B66	20	66536	2120	24.42	24.48
CA_66C-66A	LTE B66	15	132597	1772.5	QPSK	1	36	67061	2172.5	LTE B66	20	66890	2155.4	LTE B66	20	66536	2120	24.41	24.48

1.3.4 LTE Band 25 as PCC

Table 4 **Maximum Output Powers**

		PCC								SCC 1						Power			
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL#	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_25A-25A (1)	LTE B25	5	26365	1882.5	QPSK	1	0	8365	1962.5	LTE B25	20	8140	1940		-	-	-	24.41	24.48
CA_25A-26A	LTE B25	5	26365	1882.5	QPSK	1	0	8365	1962.5	LTE B26	15	8865	876.5		-	-	-	24.45	24.48
CA_25A-41A	LTE B25	5	26365	1882.5	QPSK	1	0	8365	1962.5	LTE B41	20	40620	2593	-	-	-	-	24.43	24.48
CA_25A-41C	LTE B25	5	26365	1882.5	QPSK	- 1	0	8365	1962.5	LTE B41	20	40620	2593	LTE B41	20	40422	2573.2	24.35	24.48

1.3.5 **LTE Band 41 as PCC**

Table 5 **Maximum Output Powers**

			PCC									CC 1				Power				
	Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
	CA_41A-41A (1)	LTE B41	15	39750	2506	256QAM	1	36	39750	2506	LTE B41	20	41490	2680	-	-	-		25.20	25.20
ı	CA_41A-41C	LTE B41	15	39750	2506	256QAM	1	36	39750	2506	LTE B41	20	41292	2660.2	LTE B41	20	41490	2680	25.19	25.20
	CA_41D	LTE B41	15	39750	2506	256QAM	1	36	39750	2506	LTE B41	20	39921	2523.1	LTE B41	20	40119	2542.9	25.17	25.20
	CA_41C-41A	LTE B41	15	39750	2506	256QAM	1	36	39750	2506	LTE B41	20	39921	2523.1	LTE B41	20	41490	2680	25.19	25.20

1.3.6 LTE Band 41 PC2 as PCC

Table 6 **Maximum Output Powers**

										•									
		PCC									SC	C 1			S	Power			
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset		PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41A-41A (1)	LTE B41 PC2	20	41055	2636.5	QPSK	1	0	41055	2636.5	LTE B41 PC2	20	39750	2506	-	-	-		27.19	27.20
CA_41A-41C	LTE B41 PC2	20	41055	2636.5	QPSK	1	0	41055	2636.5	LTE B41 PC2	20	39948	2525.8	LTE B41 PC2	20	39750	2506	27.18	27.20
CA_41D	LTE B41 PC2	20	41055	2636.5	QPSK	1	0	41055	2636.5	LTE B41 PC2	20	40857	2616.7	LTE B41 PC2	20	40659	2596.9	27.16	27.20
CA_41C-41A	LTE B41 PC2	20	41055	2636.5	QPSK	1	0	41055	2636.5	LTE B41 PC2	20	40857	2616.7	LTE B41 PC2	20	39750	2506	27.18	27.20

FCC ID: ZNFQ850QM	SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates:	DUT Type:	APPENDIX G:
12/07/18 - 01/21/19	Portable Handset	Page 3 of 3