

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND RSS 247 REQUIREMENT

	OF
Product Name:	Mobile Computer
Brand Name:	Honeywell
Model No.:	EDA50-011
Model Difference:	N/A
FCC ID:	HD5-EDA50011
IC:	1693B-EDA50011
Report No.:	ER/2017/10013
Issue Date:	Jan. 10, 2017
FCC Rule Part:	§15.247, Cat: DTS
IC Rule:	RSS-247 issue 2 Feb 2017
Prepared for:	Honeywell International Inc Honeywell Sensing & Productivity Solutions 9680 OLD BAILES RD FORT MILL SC 29707 UNITED STATES
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industri- al Park, Wuku District, New Taipei City, Tai- wan 24803
TAF)	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd.



ищен арр This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



VERIFICATION OF COMPLIANCE

Applicant:	Honeywell International Inc Honeywell Sensing & Productivity Solutions 9680 OLD BAILES RD FORT MILL SC 29707 UNITED STATES
Product Name:	Mobile Computer
Brand Name:	Honeywell
Marketing Name:	Glory50; ScanPal EDA50
Model No.:	EDA50-011
Model Difference:	N/A
FCC ID:	HD5-EDA50011
IC :	1693B-EDA50011
Report Number:	ER/2017/10013
Date of test:	Mar. 16, 2016 (Conducted), Mar. 22, 2016 (Conduction) Nov. 02, 2016 (Radiated & Conducted Bandedge)
Data of EUIT Passivad	Dog 04 2015

Date of EUT Received: Dec. 04, 2015

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Curry Chen	Date	Jan. 10, 2017
Prepared By:	Curry Chen / Engineer Allon Tsai	Date	Jan. 10, 2017
Approved By:	Allen Tsai / Engineer Jim Chang	Date	Jan. 10, 2017
除非另有說明,此報告結果僅對測試之樣 This document is issued by the Compan	Jim Chang / Asst. Manager wn in this test report refer only to the sample(s) tested and such sample, 高負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可 y subject to its General Conditions of Service printed overleaf, availa is and Conditions for Electronic Documents at www.sqs.com/terms	部份複製。 ble on request or a	ccessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec

tronic fo jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Revision History

Report Number	Revision	Description	Issue Date
ER/2017/10013	Rev.00	Initial creation of document	Jan. 10, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Table of Contents

1	GENERAL INFORMATION
2	SYSTEM TEST CONFIGURATION7
3	SUMMARY OF TEST RESULTS9
4	DESCRIPTION OF TEST MODES9
5	MEASUREMENT UNCERTAINTY11
6	CONDUCTED EMISSION TEST12
7	PEAK OUTPUT POWER MEASUREMENT16
8	6dB & 99% BANDWIDTH MEASUREMENT19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT22
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT
11	PEAK POWER SPECTRAL DENSITY
12	ANTENNA REQUIREMENT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Mobile Computer			
Brand Name:	Honeywe	Honeywell		
Model No.:	EDA50-0)11		
Model Difference:	N/A			
Product SW/HW version:	N/A/ N/A			
Radio SW/HW version:	N/A / N/A			
Test SW Version:	N/A			
RF power setting in TEST SW:	: N/A			
Data Cable (USB):	Model No.:CBL-500-120-S00-03; Supplier: PRiMAX			
Cradle (Optional):	Model No.:EDA50-HB; Supplier: N/A			
	3.8Vdc from Rechargeable Li-ion Battery or 5Vdc from AC/DC Adapter			
Power Supply:	Battery:	Model No.: BAT-DEA50US; Supplier: SCUD		
	Adapter:	Model No.: ADS-12B-06 05010E; Supplier: HOHOR		

Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	Bluetooth V4.0 Dual Mode
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	1.66 dBm
Antenna Designation:	PIFA Antenna, Antenna Gain: 2.55dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance

Canada RSS-247 issue 2: 2017

Canada RSS-Gen issue 4: 2014

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Numbers are: 509634

Canada Registration Number: 4620A-5

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of a state of the results state the results state of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss 1.1dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipiziAa, MukuDistrict, NewTaipieiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: ER/2017/10013 Page 8 of 54

2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission Conducted (Antenna Port) Configuration



Fig 2-2 Conducted (AC power line) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	L412	LR-957X7	Shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF TEST RESULTS 3

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.2 (1) RSS-Gen §6.6	6dB & 99% Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Peak Power Density	Compliant
§15.203 §15.247(b)	RSS- Gen §8.3	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	
0	2402 MHz	14	2430 MHz	28	2458 MHz	
1	2404 MHz	15	2432 MHz	29	2460 MHz	
2	2406 MHz	16	2434 MHz	30	2462 MHz	
3	2408 MHz	17	2436 MHz	31	2464 MHz	
4	2410 MHz	18	2438 MHz	32	2466 MHz	
5	2412 MHz	19	2440 MHz	33	2468 MHz	
6	2414 MHz	20	2442 MHz	34	2470 MHz	
7	2416MHz	21	2444 MHz	35	2472 MHz	
8	2418 MHz	22	2446 MHz	36	2474 MHz	
9	2420 MHz	23	2448 MHz	37	2476 MHz	
10	2422 MHz	24	2450 MHz	38	2478 MHz	
11	2424 MHz	25	2452 MHz	39	2480 MHz	
12	2426 MHz	26	2454 MHz			
13	2428 MHz	27	2456 MHz			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	
Bluetooth LE	0 to 39	0,20,39	GFSK	1	
	RADIATED EMISSION TEST (ABOVE 1 GHz)				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	
Bluetooth LE	0 to 39	0,20,39	GFSK	1	

Note:


The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST					
MODE AVAILABLE TESTED MODULATION DATA RATE (Mbps)					
Bluetooth LE	0 to 39	0,20,39	GFSK	1	

WeifS of a state of the results state the results state of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak Average					
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50						

6.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
EMI Test Receiver	R&S	ESCI7	100760	05/04/2015	05/03/2016			
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/15/2015	05/14/2016			
LISN	FCC	FCC-LISN-50/250 -25-2-01	4034	03/12/2016	03/11/2017			
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2015	11/25/2016			

6.3 EUT Setup:

MHz.


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



6.4 Test SET-UP (Block Diagram of Configuration)

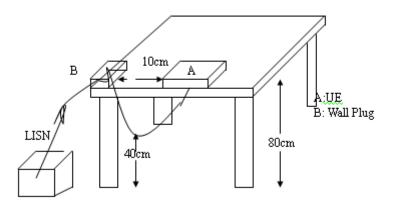

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of a state of the results state the results state of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode: Operation mode Temperature: 20

Test By: Tin

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Site Conduction Room Limit: FCC Class B Conduction(QP) Mode: Operation Note: Adapter: ADS-12B-06

Phase: N AC 120V/60Hz Power:

Temperature: 20 °C Humidity: 58 %

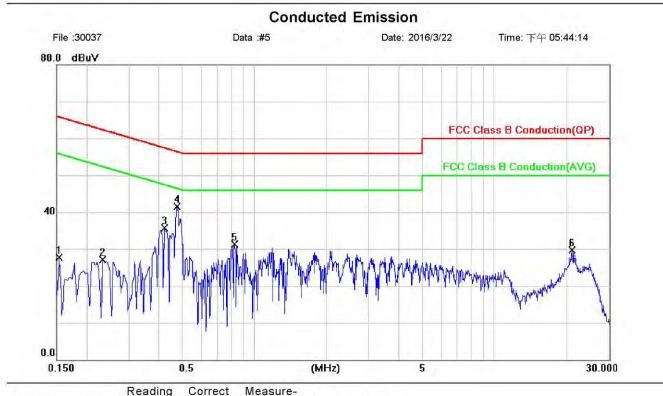


No. Mk.	Freq.	Level	Factor	ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1540	27.54	0.07	27.61	65.78	-38.17	peak	
2	0.2340	27.07	0.08	27.15	62.31	-35.16	peak	
3	0.4220	35.67	0.10	35.77	57.41	-21.64	peak	
4 *	0.4780	41.47	0.10	41.57	56.37	-14.80	peak	
5	0.8300	31.10	0.11	31.21	56.00	-24.79	peak	
6	20.9860	29.23	0.46	29.69	60.00	-30.31	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.





PEAK OUTPUT POWER MEASUREMENT 7

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt and the e.i.r.p. shall not exceed 4 W.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Power Meter	Anritsu	ML2495A	1005007	12/09/2015	12/08/2016			
Power Sensor	Anritsu	MA2411B	917032	12/09/2015	12/08/2016			
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2016	01/01/2017			
Coaxial Cable	HUBER+SUHN ER	SUCOFLEX 102	23670/2	01/02/2016	01/01/2017			
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2016	01/01/2017			
Splitter	Agilent	11636B	N/A	01/02/2016	01/01/2017			

7.2 Measurement Equipment Used:

7.3 Test Set-up:



Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.


Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Duty Factor:

	Duty Cycle (%)	Duty Factor (dB)
BLE	62.59	2.03

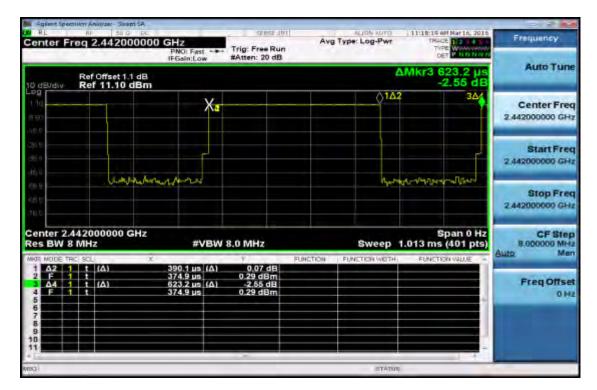

Duty Cycle Factor:10*log(1/62.59/100)=2.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.5 Measurement Result:

BLE mode:

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
0	2402	-0.35	1 Watt = 30 dBm
20	2442	1.66	1 Watt = 30 dBm
39	2480	0.36	1 Watt = 30 dBm
BLE mo	de:		
СН	Frequency (MHz)	Max. Output include tune up tolerance Power (dBm)	Required Limit
0	2402	-2.77	1 Watt = 30 dBm
20	2442	-0.79	1 Watt = 30 dBm
39	2480	-2.04	1 Watt = 30 dBm

*Note: Measured by power meter, cable loss as 1.1 dB that offsets on the power meter in Peak *Note: Measured by power meter, as cable loss + Duty cycle factor that offsets on the power meter

EIRP

сн	Frequency (MHz)	Max. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit	
0	2402	-2.77	2.55	-0.22	4W= 36 dBi	m
20	2442	-0.79	2.55	1.76	4W= 36 dBi	m
39	2480	-2.04	2.55	0.51	4W= 36 dBi	m

* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6DB & 99% BANDWIDTH MEASUREMENT 8


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz .

8.2 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MFR MODEL SERIA NUMBER NUMB		LAST CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY50420195	12/21/2015	12/20/2016			
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2016	01/01/2017			
Coaxial Cable	HUBER+SUHN ER	SUCOFLEX 102	23670/2	01/02/2016	01/01/2017			
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2016	01/01/2017			
Splitter	Agilent	11636B	N/A	01/02/2016	01/01/2017			

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.
- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. Turn on the 99% bandwidth function, max reading.
- 7. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8.5 Measurement Result:


RI E mode

BLE MODE		BLEMOGe			
Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result	Frequency (MHz)	99% BW (MHz)
2402	0.6723	> 0.5	PASS	2402	1.0877
2442	0.6721	> 0.5	PASS	2442	1.0861
2480	0.6761	> 0.5	PASS	2480	1.0868

DI E mada

Note: Refer to next page for plots.

BT4.0 mode 6dB Band Width Test Data CH-Low

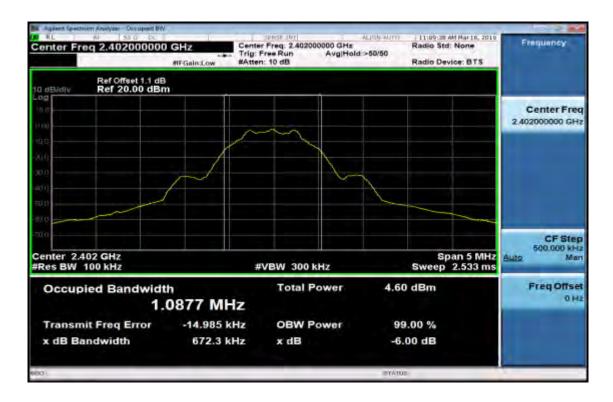

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentions otherwise stated the results shown in this test report refer only to the sample(s) tested and store statistic (or so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



6dB Band Width Test Data CH-Mid



6dB Band Width Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9

9.1 Standard Applicable

As per KDB 558074 D01 11.1 a)


If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.10 Table 6.

9.2 Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.					
Spectrum Analyzer	Agilent	N9010A	MY50420195	12/21/2015	12/20/2016					
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2016	01/01/2017					
Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	23670/2	01/02/2016	01/01/2017					
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2016	01/01/2017					
Splitter	Agilent	11636B	N/A	01/02/2016	01/01/2017					

9.3 Test SET-UP:



除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



9.4 Measurement Procedure

Conducted Band Edge Limit

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Chieddo data and a constraint and a condition of the and a conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

Band Edge Limit							
Frequency (MHz)	RF Power Density (dBm)	Bandedge Limit = PSD - 20dB					
2402	-1.25	-21.25					
2480	-0.95	-20.95					

NOTE: cable loss as dB that offsets in the spectrum NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of a state of the results state the results state of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Power Spectral Density for Bandedge Limit (CH-Low)



Power Spectral Density for Bandedge Limit (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ourierwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Band Edges Test Data CH-Low

Agilant Spectrum Analyzer - Sirept SA					5 P M
Center Freq 2.360000000	GHz PNO: Fast G	Trig: Free Run #Atten: 10 dB	Avg Type: Log-Pwr	11:12:34 MM Martin, 2016 TRADE 1 2 4 5 1 TVPE NUMBER	Frequency
10 dB/div Ref 0ffset 1.1 dB	Pisani,Low	AVELOIL TO UD	Mkr	1 2.402 1 GHz -2.16 dBm	Auto Tune
0 80 All 8				27.16 dBm	Center Freq 2.360000000 GHz
.36.9 -40.0					Start Freq 2.310000000 GHz
68 9 176 9 186 5		- Marta Strate a strate			Stop Freq 2.41000000 GHz
Start 2.31000 GHz #Res BW 100 kHz	#VBI	V 300 kHz	Sweep 1.0	top 2.41000 GHz 00 ms (1001 pts)	CF Step 10.000000 MHz Auto Man
2 N 1 T 2.	402 1 GHz 199 9 GHz 190 0 GHz	-2.15 dBm -60.36 dBm -79.04 dBm	INCTION OF FUNCTION WRITH,	FUNCTION VALUE	Freq Offset 0 Hz
11 Million Million		-	STATUS	-	e

Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Contentions otherwise stated the results shown in this test report refer only to the sample(s) tested and store statistic (or so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Spurious Emission Measurement Result CH-Low 30MHz - 3GHz


Runninght Spectreen Analyzer - Skrept SA		SENSE JUT	ALIGN AUTO	(05:06:52 PM Nov 02, 2016	10.00
Start Freq 30.000000 MHz	PNO: Fast		Avg Type: Log-Pwr		Frequency
Ref Offset 1.1 dB Ref 11.10 dBm			MK	r1 2.403 0 GHz -1.16 dBm	Auto Tun
99 1 10 6 80					Center Fre 1 51500000 GH
2019 2010 代40					Start Fre 30.000000 MH
8 8	utude bare priorie faite	anan (maanana maran (maana maran (maana maran (maana maran maran maran maran maran maran maran maran maran mar	مربو القرار مراجع المراجع المرجوع	R-Hapananga dan internetara dar	Stop Fre 3,000000000 Gi
Res BW 100 kHz	#VBW	300 kHz	Sweep 9	Stop 3.000 GHz .667 ms (1001 pts)	CF Ste 297.000000 Mit Auto Mit
1 N 1 f 2/ 2 3 4 5	103 0 GHz	-1.16 dBm			Freq Offs 01
6 7 8 9 9 10					Scale Typ
13) 			STATUS		

CH-Low 3GHz – 26.5GHz

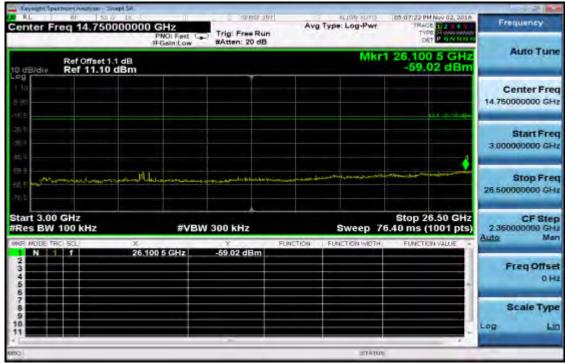

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contensises otherwise stated the results shown in this test report refer only to the sample(s) are related and such sample(s) are related for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





CH-Mid 30MHz - 3GHz

RL R/ 55 C DC		SPRSP JWT	ALIGN BUTO	00:08:25 PM Nev 02:2016	21.20
enter Freq 1.51500000	PNO: Fast		Avg Type: Log-Pwr	TYPE NIN NIN N	Frequency
Ref Offset 1.1 dB			Mki	1 2.441 6 GHz -1.32 dBm	Auto Tune
9 H0					Center Fred 1.515000000 GH:
から 第19 前 U					Start Fred 30,000000 MHz
B B	ورواحك والأول فيلاحيه	والمحادث ومسترور والمراجع		and the second	Stop Free 3.000000000 GH
tart 0.030 GHz Res BW 100 kHz	#VBW	300 kHz	Sweep 9.	Stop 3.000 GHz 567 ms (1001 pts)	CF Step 297,000000 MHz Auto Man
1 N 1 f 2 2 3 4 5	.441 6 GHz	-1.32 dBm			Freq Offset 0 Hz
6 7 8 9 9 10					Scale Type
83 -			stytus		-

CH-Mid 3GHz – 26.5GHz

		and the second second					Harri Anullyzer - Sile	
Frequency	CB:d9:48 PM Nov 02, 2018 TRACE 2 2 4 9 1 TYPE Noncommon	g Type: Log-Pwr	un	Trig: Free R #Atten: 20 d	HZ IO: Fast Cal	00000 G	ng 14.7500	anter Fr
Auto Tune	26,406 0 GHz -58,45 dBm	Mkr1		HY10011. 20 0	din Low	dB	Ref Offset 1. Ref 11.10 d	dEVdiv
Center Freq 14.750000000 GHz								9 10 30
Start Freq 3.000000000 GHz								(9 0
Stop Freq 26 50000000 GHz	- Andre Strands- Angres	والاشرية الارتباع المراجع المر			ومدينية والمراجع المراجع المراجع	يدريد الأوتيني	un praising	8 8
CF Step 2.350000000 GHz Auto Man	Stop 26.50 GHz 40 ms (1001 pts)	Sweep 76	FUNCTION	300 kHz	#VBW	¥	00 kHz	art 3.00 Res BW
Freq Offset 0 Hz				-58,45 dBm) GHz	26,406 (N 1
Scale Type								
		STATUS						1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CH-High 30MHz – 3GHz

AL RISSION STRUCTURE STRUCT SE	A contract of the	Trig: Free Run #Atten: 20 dB	Avg Type: Log-Pwr	65:10:31 PM Nov 02, 2016 TRACE 2 3 4 5 1 TYPE PLOTON OF PLOTON OF	Frequency
Ref Offset 1.1 dB			Mk	1 2.480 3 GHz -1.64 dBm	Auto Tune
110 040				1	Center Fred 1.515000000 GHz
.25.9 38.0 -th.0					Start Free 30,000000 MHz
EB 9 Ed E 176.9	an kanan di san di s	۲۵۹۹ میرونوالارومید. معدومی ا			Stop Free 3.000000000 GH
Start 0.030 GHz #Res BW 100 kHz	#VBV	V 300 kHz Y FU	Sweep 9.	Stop 3.000 GHz 567 ms (1001 pts) FUNCTION VALUE	CF Step 297.000000 MHz Auto Man
1 N 1 T 2 3 4 5	2.480 3 GHz	-1.64 dBm		+	Freq Offset 0 Hz
6 7 8 9 9 10 11					Scale Type
MBQ			STATUS		

CH- High 3GHz – 26.5GHz

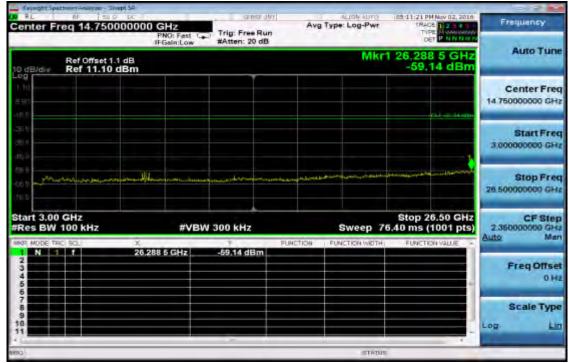

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentions otherwise stated the results shown in this test report refer only to the sample(s) tested and store statistic (or so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 & RSS-Gen §8.10 Table 6 limit as below.

And according to §15.33(a) (1) & RSS-Gen §8.9 Table 4 & 5, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.2 Measurement Equipment Used


966 Chamber									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017				
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2016	01/28/2017				
Loop Antenna	ETS-Lindgren	6502	148045	09/20/2016	09/19/2017				
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/20/2015	12/19/2016				
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/01/2016	07/31/2017				
Pre-Amplifier	Agilent	8447D	2944A07676	01/06/2016	01/05/2017				
Pre-Amplifier	EMC Instruments Corp.	EMC0126530	980038	01/06/2016	01/05/2017				
Turn Table	HD	DT420	N/A	N.C.R	N.C.R				
Antenna Tower	ChamPro	AM-BS-4500-B	060776-ABS	N.C.R	N.C.R				
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R				
Low Loss Cable	Huber Suhner	966_RX	9	01/06/2016	01/05/2017				
3m Site NSA	SGS	966 chamber	N/A	07/01/2016	06/30/2017				
Low Loss Cable	Huber Suhner	966 TX	1	01/06/2016	01/05/2017				
Horn Antenna	Schwarzbeck	BBHA9170	184	12/13/2015	12/12/2016				
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/06/2016	01/05/2017				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INo.134.WuKungRoad.NewTaipein(Ustrin)</u> <u>SGS Taiwan Ltd.</u> <u>INo.134.WuKungRoad.NewTaipein(Ustrin)</u> <u>No.134.WuKungRoad.NewTaipein(Ustrin)</u> <u>No.134.WuKungRoad.NewTaipein(Ustrin)</u> <u>SGS Taiwan Ltd.</u> <u>INo.134.WuKungRoad.NewTaipein(Ustrin)</u> <u>No.134.WuKungRoad.NewTaipein(Ustrin)</u> <u>No</u>




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

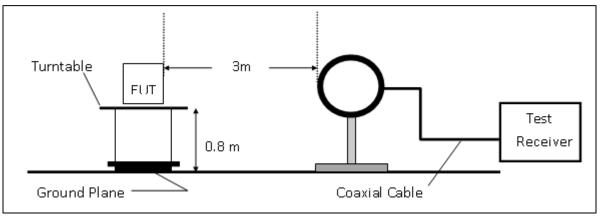

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

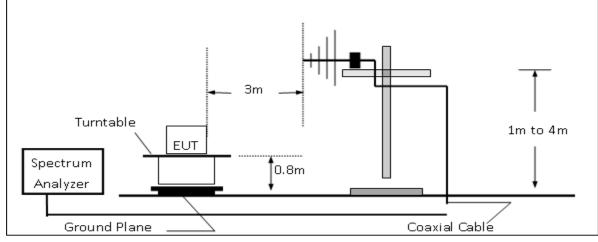

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

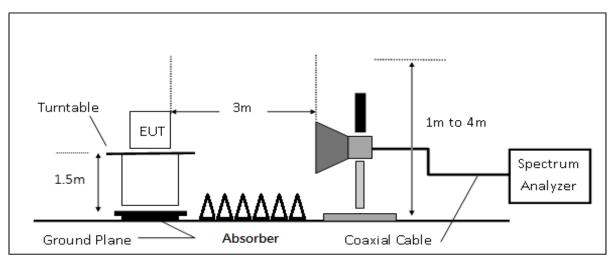

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentions otherwise stated the results shown in this test report refer only to the sample(s) tested and store statistic (or so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



10.4 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. 1. Guidance.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequen-2. cy> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission level. 3.
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the 4. highest emissions.
- Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) 5. and Quasi-peak (QP) at frequency below 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency 6. above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW \geq 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- When measurement procedures for electric field radiated emissions above 1 GHz the EUT 8. measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- Maximum procedure was performed on the six highest emissions to ensure EUT compli-9. ance.
- And also, each emission was to be maximized by changing the polarization of receiving an-10. tenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



10.5 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	0	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of a state of the results state the results state of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Band Edge Measurement Result (BT4.0 mode)

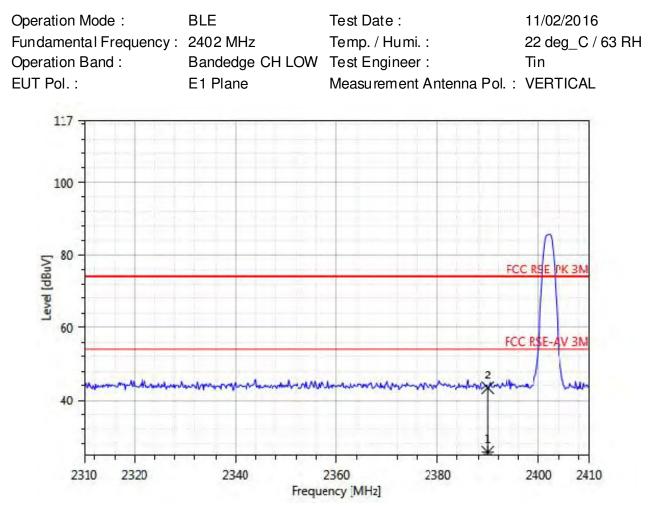


Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
2390.00	Е	Average	25.79	27.53	-1.74	54.00	-28.21
2390.00	Е	Peak	43.39	45.13	-1.74	74.00	-30.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentions otherwise stated the results shown in this test report refer only to the sample(s) tested and store statistic (or so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



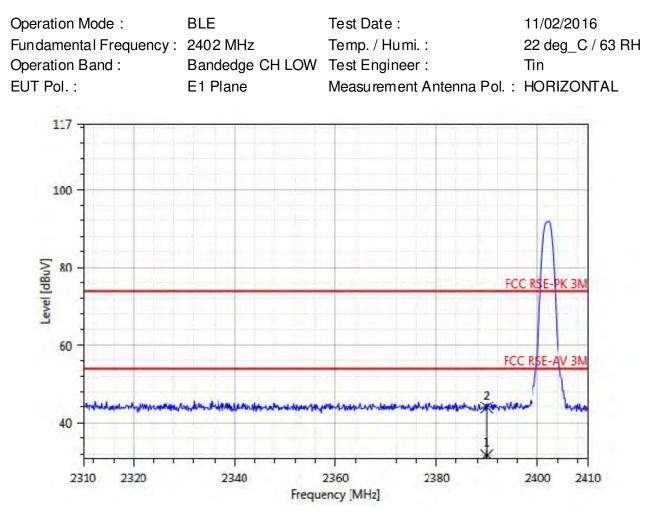


Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
2390.00	Е	Average	31.68	33.42	-1.74	54.00	-22.32
2390.00	Е	Peak	43.96	45.70	-1.74	74.00	-30.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is environed to the fullest evaluated to the Company. Any unauthorized alteration, forgery or falsification of the context or ap-responses of this document is unsufficient and this back evaluated to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



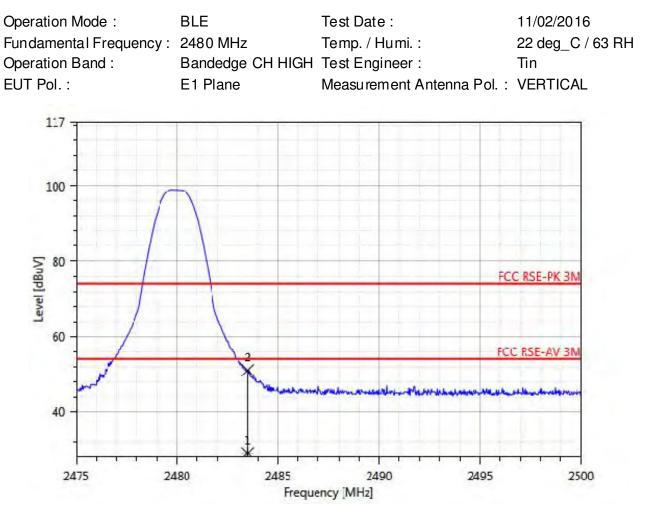

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
2483.50	Е	Average	28.96	30.58	-1.62	54.00	-25.04
2483.50	Е	Peak	51.03	52.65	-1.62	74.00	-22.97



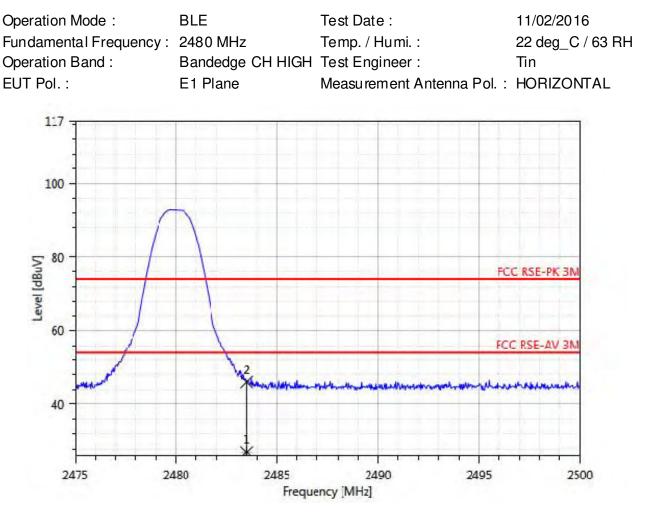

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
2483.50	Е	Average	27.00	28.62	-1.62	54.00	-27.00
2483.50	Е	Peak	46.04	47.65	-1.62	74.00	-27.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is environed to the fullest evaluated to the Company. Any unauthorized alteration, forgery or falsification of the context or ap-responses of this document is unsufficient and this back evaluated to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Spurious Emission Measurement Result (BT4.0 mode) For Frequency form 30MHz to 1000MHz

Operation N	lode :	BLE		Test Da	te:		11/02/2	2016
Fundamenta	al Frequency :	2402 MHz		Temp. /	Humi. :		22 deg	_C / 63 RH
Operation B	and :	Tx CH LOV	V	Test En	gineer :		Tin	
EUT Pol. :		E1 Plane		Measure	ement An	tenna Po	I. : VERTI	CAL
97 T								
-								
-								
-	1							222
80 -								
1								
			-					
[/ng								
Level [dBuV]							tal.	
eve							FCC RSE-QP	3M
- 1								
	_							
40 -			_					
-	X							6
-	1	3	-	4		5		\uparrow
-		2		×				
1		2 X						
30	200)	400	60	00	800		1000
			Frequ	ency [MHz]				

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
61.04	S	Peak	34.70	42.95	-8.25	40.00	-5.30
280.26	S	Peak	22.28	28.63	-6.35	46.00	-23.72
296.75	S	Peak	29.65	35.63	-5.98	46.00	-16.35
556.71	S	Peak	26.47	27.82	-1.34	46.00	-19.53
749.74	S	Peak	30.17	27.45	2.72	46.00	-15.83
977.69	S	Peak	33.50	27.20	6.30	54.00	-20.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.




Operation Mode : BLE Test Date : 11/02/2016 Fundamental Frequency: 2402 MHz Temp. / Humi. : 22 deg C / 63 RH **Operation Band :** Tx CH LOW Test Engineer : Tin EUT Pol. : E1 Plane Measurement Antenna Pol. : HORIZONTAL 97 80 Level [dBuV] FCC RSE-QP 3M 40 3 ж 6 5 200 400 600 800 30 1000 Frequency [MHz] Actual Spectrum Fred Note Decetor Eactor l im it Margin

⊢req.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin	
		Mode	Reading Level	FS		@3m		
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB	
61.04	S	Peak	25.91	34.15	-8.25	40.00	-14.09	
197.81	S	Peak	26.97	36.55	-9.58	43.50	-16.53	
319.06	S	Peak	36.22	41.65	-5.42	46.00	-9.78	
553.80	S	Peak	28.29	29.67	-1.38	46.00	-17.71	
757.50	S	Peak	30.18	27.17	3.01	46.00	-15.82	
968.96	S	Peak	33.46	27.25	6.21	54.00	-20.54	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



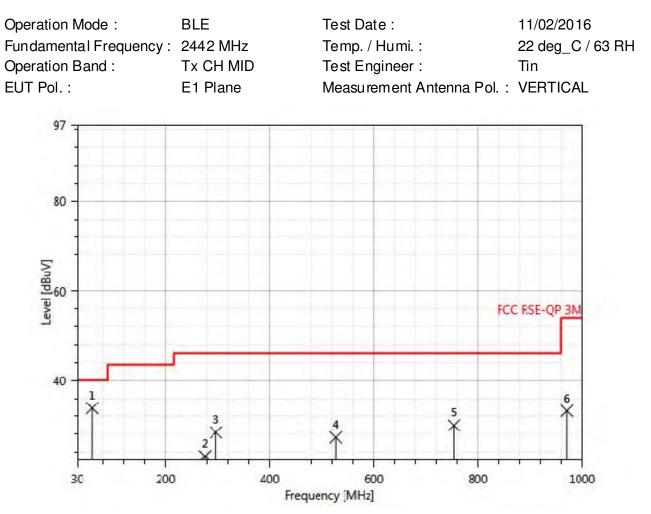

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
59.10	S	Peak	33.83	41.85	-8.03	40.00	-6.17
275.41	S	Peak	23.12	29.75	-6.63	46.00	-22.88
296.75	S	Peak	28.44	34.42	-5.98	46.00	-17.56
526.64	S	Peak	27.30	28.74	-1.44	46.00	-18.70
754.59	S	Peak	30.03	27.33	2.70	46.00	-15.97
970.90	S	Peak	33.23	26.95	6.28	54.00	-20.77



Operation Mode : BLE Test Date : 11/02/2016 Fundamental Frequency: 2442 MHz Temp. / Humi. : 22 deg C / 63 RH **Operation Band :** Tx CH MID Test Engineer : Tin EUT Pol. : E1 Plane Measurement Antenna Pol. : HORIZONTAL 97 80 Level [dBuV] FCC RSE-QP 3M 40 b 5 200 400 600 800 30 1000 Frequency [MHz]

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
62.01	S	Peak	24.95	33.42	-8.47	40.00	-15.05
197.81	S	Peak	27.27	36.85	-9.58	43.50	-16.23
294.81	S	Peak	37.18	43.20	-6.02	46.00	-8.82
556.71	S	Peak	26.93	28.27	-1.34	46.00	-19.07
744.89	S	Peak	30.06	27.81	2.25	46.00	-15.94
964.11	S	Peak	32.89	26.87	6.02	54.00	-21.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode : BLE Test Date : 11/02/2016 Fundamental Frequency: 2480 MHz Temp. / Humi. : 22 deg C / 63 RH **Operation Band :** Tx CH HIGH Test Engineer : Tin EUT Pol. : E1 Plane Measurement Antenna Pol. : VERTICAL 97 80 Level [dBuV] FCC RSE-QP 3N 40 1 6 5 200 400 600 800 1000 30 Frequency [MHz]

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
61.04	S	Peak	34.07	42.32	-8.25	40.00	-5.93
280.26	S	Peak	22.30	28.65	-6.35	46.00	-23.70
319.06	S	Peak	29.24	34.67	-5.42	46.00	-16.76
556.71	S	Peak	26.85	28.19	-1.34	46.00	-19.15
754.59	S	Peak	30.28	27.58	2.70	46.00	-15.72
980.60	S	Peak	33.41	27.30	6.11	54.00	-20.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is environed to the fullest evaluated to the Company. Any unauthorized alteration, forgery or falsification of the context or ap-responses of this document is unsufficient and this back evaluated to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Operation Mode : BLE Fundamental Frequency: 2480 MHz **Operation Band :** Tx CH HIGH EUT Pol. : E1 Plane

Test Date : 11/02/2016 Temp. / Humi. : 22 deg C / 63 RH Test Engineer : Tin Measurement Antenna Pol. : HORIZONTAL

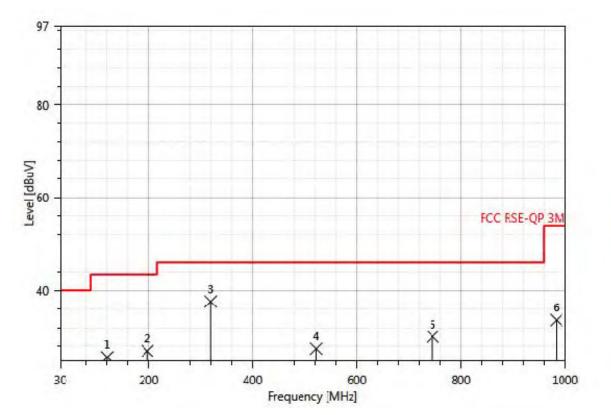

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
120.21	S	Peak	25.61	36.06	-10.45	43.50	-17.89
197.81	S	Peak	26.96	36.54	-9.58	43.50	-16.54
319.06	S	Peak	37.60	43.03	-5.42	46.00	-8.40
521.79	S	Peak	27.46	29.06	-1.60	46.00	-18.54
745.86	S	Peak	30.03	27.73	2.30	46.00	-15.97
983.51	S	Peak	33.62	27.61	6.01	54.00	-20.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (BT4.0 mode) For Frequency above 1GHz

Operation Mode :	l	BLE	•	Test Date :		11/02/2016
Fundamental Free	quency:	2402 MHz	-	Temp. / Hu	mi. :	22 deg_C / 63 RH
Operation Band :	-	Tx CH LOW	-	Test Engin	eer:	Tin
EUT Pol. :		E1 Plane	I	Measurem	ent Antenna P	ol. : VERTICAL
97				1		
-						
						1 1 1 1
80 -						
						FCC RSE-PK 3M
-						
level [dBuV]						
0 0 60						
Lev						FCC RSE-AV 3M
-				-		
	.2					
40 -						
	1			1		
1						
1000	5000	10000	Frequer	15000 ncy [MHz]	20000	2500@6500
			ricquei	and tunnet		


Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
4804.00	Н	Average	28.10	23.18	4.92	54.00	-25.90
4804.00	Н	Peak	39.40	34.48	4.92	74.00	-34.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



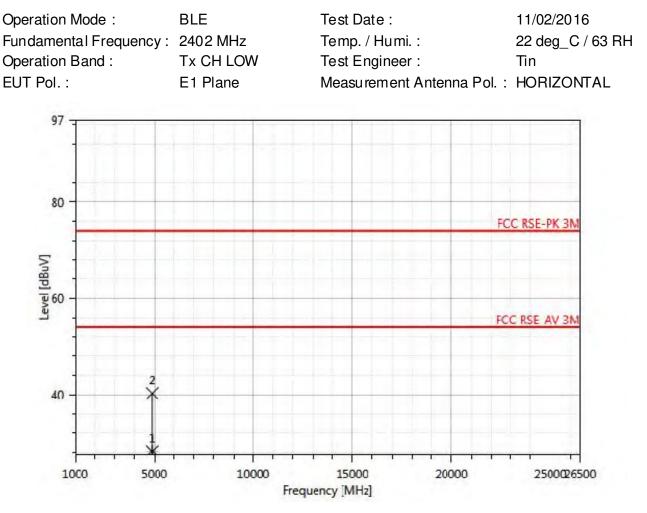

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
4804.00	Н	Average	28.19	23.27	4.92	54.00	-25.81
4804.00	Н	Peak	40.21	35.29	4.92	74.00	-33.79



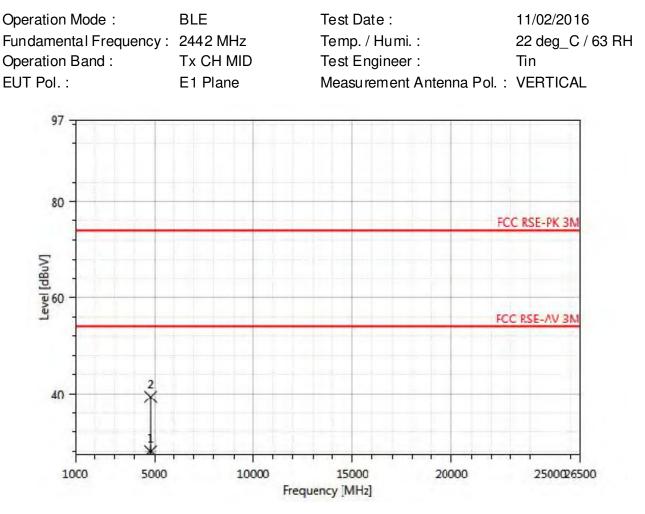

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
4884.00	Н	Average	28.25	23.06	5.19	54.00	-25.75
4884.00	Н	Peak	40.74	35.54	5.19	74.00	-33.26



Operation Mode : BLE Test Date : 11/02/2016 Fundamental Frequency: 2442 MHz Temp. / Humi. : 22 deg C / 63 RH **Operation Band :** Tx CH MID Test Engineer : Tin EUT Pol. : E1 Plane Measurement Antenna Pol. : HORIZONTAL 97 80 FCC RSE-PK 3N Level [dBuV] FCC RSE AV 3N 2 40 10000 20000 1000 5000 15000 2500@6500 Frequency [MHz]

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
4884.00	Н	Average	28.29	23.10	5.19	54.00	-25.71
4884.00	Н	Peak	40.31	35.12	5.19	74.00	-33.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode : BLE Test Date : 11/02/2016 Fundamental Frequency: 2480 MHz Temp. / Humi. : 22 deg C / 63 RH **Operation Band :** Tx CH HIGH Test Engineer : Tin EUT Pol. : E1 Plane Measurement Antenna Pol. : VERTICAL 97 80 FCC RSE-PK 3N Level [dBuV] FCC RSE-AV 3N 40 10000 20000 1000 5000 15000 2500@6500 Frequency [MHz]

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
4960.00	Н	Average	28.50	23.21	5.29	54.00	-25.50
4960.00	Н	Peak	39.96	34.67	5.29	74.00	-34.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is environed to the fullest evaluated to the Company. Any unauthorized alteration, forgery or falsification of the context or ap-responses of this document is unsufficient and this back evaluated to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Operation Mode : BLE Test Date : 11/02/2016 Fundamental Frequency: 2480 MHz Temp. / Humi. : 22 deg C / 63 RH **Operation Band :** Tx CH HIGH Test Engineer : Tin EUT Pol. : E1 Plane Measurement Antenna Pol. : HORIZONTAL 97 80 FCC RSE-PK 3N Level [dBuV] FCC RSE-AV 3M 10 10000 20000 1000 5000 15000 2500@6500 Frequency [MHz]

Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
4960.00	Н	Average	28.60	23.31	5.29	54.00	-25.40
4960.00	Н	Peak	39.61	34.33	5.29	74.00	-34.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11 PEAK POWER SPECTRAL DENSITY


11.1 **Standard Applicable:**

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 **Measurement Equipment Used:**

Conducted Emission Test Site									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Spectrum Analyzer	Agilent	N9010A	MY50420195	12/21/2015	12/20/2016				
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2016	01/01/2017				
Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	23670/2	01/02/2016	01/01/2017				
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2016	01/01/2017				
Splitter	Agilent	11636B	N/A	01/02/2016	01/01/2017				

11.3 **Test Set-up:**



11.4 **Measurement Procedure:**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



11.5 Measurement Result:

BT4.0 mode

BLE mode			
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-15.82	8	PASS
2442	-16.03	8	PASS
2480	-15.56	8	PASS

NOTE: cable loss as 1.1dB that offsets in the spectrum

BT4.0 mode Power Spectral Density Test Plot (CH-Low)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Contentions otherwise stated the results shown in this test report refer only to the sample(s) tested and store statistic (or so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)

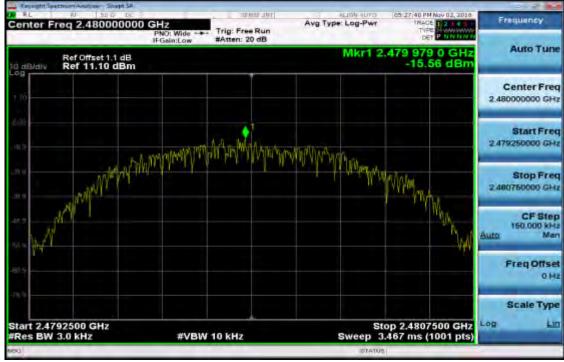

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna is designed as permanently attached and has no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Rink J f action in the second of the secon

jurisdiction issues defined therein. Any holder of this document is advectorial and this document is document is document is advectorial and official therein and the limits and official therein and therein and