



TEST REPORT

Date: 2014-10-13

Report No.: 60.870.14.008.05F

Applicant: Sensitech Inc.
800 Cummings Center, Suite 258X Beverly, MA 01915-6197, USA

Description of Samples: Model name: TempTale RF² Gateway, Communications Gateway
Brand name: Sensitech
Model no.: TempTale RF² Gateway
FCCID: SRMT11012280

Date Samples Received: 2014-09-01

Date Tested: 2014-09-05 to 2014-09-30

Investigation Requested: FCC Part 15 Subpart C, Section 15.249

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks: ----

Checked by:

Approved by:-

Ray Cheung
Project Engineer
Wireless & Telecom department

Jeff Pong
Operation Manager
Wireless & Telecom department



Report No.: 60.870.14.008.05F

CONTENT:

Cover		Page 1 of 26
Content		Page 2 of 26
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 3 of 26
1.2	Applicant Details	Page 3 of 26
1.3	Equipment Under Test [EUT]	Page 4 of 26
1.4	Equipment Modification	Page 4 of 26
1.5	Related Submittal(s) Grants	Page 4 of 26
<u>2.0</u>	<u>Technical Details</u>	
2.1	Investigations Requested	Page 5 of 26
2.2	Test Standards and Results Summary	Page 5 of 26
<u>3.0</u>	<u>Test Methodology</u>	
3.1	Radiated Emission	Page 6 of 26
3.2	Field Strength Calculation	Page 6 of 26
3.3	Conducted Emission	Page 6 of 26
<u>4.0</u>	<u>Test Results</u>	
4.1	Field Strength of Fundamental and Harmonics	Page 7-9 of 26
4.2	Spurious Radiated Emission	Page 10-14 of 26
4.3	Out of Band Emissions	Page 15-17 of 26
4.4	Bandwidth Measurement	Page 18-22 of 26
4.5	Conducted Emission	Page 23-25 of 26
<u>5.0</u>	<u>List of Measurement Equipments</u>	Page 26 of 26
<u>Appendix A</u>		
Photos of Test Setup		
<u>Appendix B</u>		
External EUT Photos		
<u>Appendix C</u>		
Internal EUT Photos		



Report No.: 60.870.14.008.05F

1.0 General Details

1.1 Test Laboratory

Attestation of Global Compliance Co., Ltd
1&2F, No. 2 Building, Huafeng No.1 Industrial Park, Gushu
Community Xixiang Street, Bao'an District, Shenzhen,
China
Registration Number: 259865

Tested by:



John Zhi

**1.2 Applicant Details
Applicant**

Sensitech INC.
800 Cummings Center, Suite 258X Beverly, MA
01915-6197, USA.

Manufacturer

Logic Supply Inc.
35 Thompson St., South Burlington, VT 05403, USA.

Report No.: 60.870.14.008.05F

1.3 Equipment Under Test [EUT]

Description of EUT

Model Name:	TempTale RF ² Gateway, Communication Gateway
Brand Name:	Sensitech
Model Number:	TempTale RF ² Gateway
FCCID:	SRMT11012280
Rating:	DC12.0V, 5A powered by AC/DC power adaptor
Antenna Type:	Integral
Antenna Gain:	1.9 dBi (921.5MHz to 924.5 MHz) 3.0 dBi (2442 MHz to 2454 MHz)
Operated Frequency:	921.5MHz to 924.5 MHz 2442 MHz to 2454 MHz
No. of Channel:	3 (923 MHz, 924 MHz and 924.5 MHz) 6 (2442 MHz, 2443 MHz, 2444 MHz, 2445 MHz, 2446 MHz and 2454 MHz)
Accessories and Auxiliary Equipment:	AC/DC Adaptor
EUT Exercising Software:	None

General Operation of EUT

The Equipment Under Test (EUT) is a Gateway of RF Temperature System operated at 921.5 MHz to 924.5 MHz which communicate with RF Temperature Sensor and 2442 MHz to 2454 MHz which communicate with the Repeater.

1.4 Equipment Modification

No modification was made to the tested unit by TÜV SÜD Hong Kong Ltd.

1.5 Related Submittal(s) Grants

This is a single application of certification for this transmitter.



Report No.: 60.870.14.008.05F

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 and ANSI C63.4: 2009.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary				
Test Condition	FCC Test Requirement	Test Result		
		Pass	Failed	N/A
Field Strength of Fundamental and Harmonics	Part 15.249 (a),(e)	☒	☐	☐
Spurious Radiated Emission	Part 15.249 (d) Part 15.209 Part 15.205	☒	☐	☐
Out of Band Emissions	Part 15.249 (d)	☒	☐	☐
Bandwidth Measurement	Part 15.215 (c)	☒	☐	☐
Conducted Emission	Part 15.207	☐	☐	☒

Note: N/A - Not Applicable

3.0 Test Methodology

3.1 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.2 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$FS = R + \text{System Factor}$

$\text{System Factor} = AF + CF + FA - PA$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

3.3 Conducted Emissions

The EUT was placed on a non-metallic table 0.8m above the horizontal metal reference place and 0.4m from a vertical ground plane which is connected to the horizontal metal ground plane. Meanwhile, the AC main of EUT was connected to the distance of 0.8m line impedance stabilization network (LISN) during measurement.

Initial measurements were performed in quasi-peak and average detection modes by the test receiver, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.


Report No.: 60.870.14.008.05F

4.0 Test Results

4.1 Field Strength of Fundamental and Harmonics

Test Requirement:	FCC part 15 section 15.249(a)(e)
Test Method:	ANSI C63.4:2009
Test Date:	2014-09-10
Mode of Operation:	Transmitting mode.
Detector Function:	Quasi-peak (Below 1000 MHz) Average and Peak (Above 1000 MHz)
Measurement BW:	120 kHz (Below 1000 MHz) 1 MHz (Above 1000 MHz)

Test Setup:

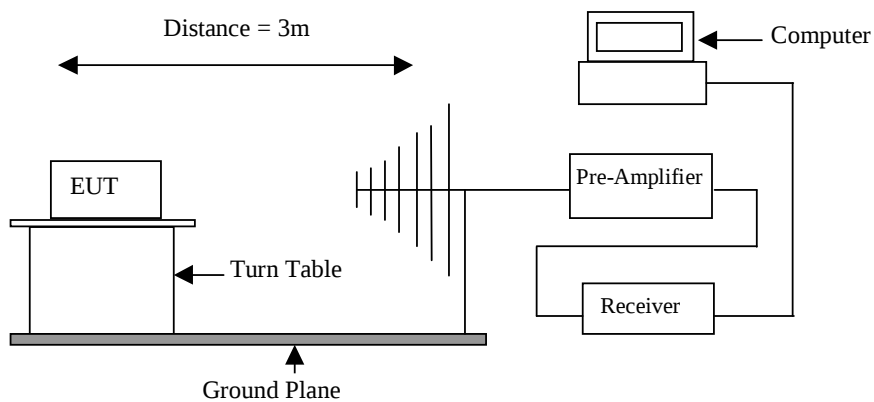

Report No.: 60.870.14.008.05F

Results: PASS

Field Strength of Fundamental and Harmonics									
Antenna Port	Value	Emissions Frequency	E-Field Polarity	Reading	System Factor	Field Strength at 3m	Limit	Delta to Limit	Remarks
		MHz		dBµV/m	dB	dBµV/m	dBµV/m	dBµV/m	
J1	QP	923.00	H	49.50	27.50	77.00	94.00	-17.00	Fund.
	QP		V	55.80	27.50	83.30	94.00	-10.70	Fund.
J1	QP	924.00	H	46.70	27.50	74.20	94.00	-19.80	Fund.
	QP		V	55.50	27.50	83.00	94.00	-11.00	Fund.
J2	QP	924.50	H	44.40	27.50	71.90	94.00	-22.10	Fund.
	QP		V	53.10	27.50	80.60	94.00	-13.40	Fund.
J1	PK	1846.00	H	43.58	2.20	45.78	74.00	-28.22	Harmonic
	PK		V	42.34	2.20	44.54	74.00	-29.46	Harmonic
J2	PK	1849.00	H	42.31	2.30	44.61	74.00	-29.39	Harmonic
	PK		V	43.23	2.30	45.53	74.00	-28.47	Harmonic

Field Strength of Fundamental and Harmonics									
Antenna Port	Value	Emissions Frequency	E-Field Polarity	Reading	System Factor	Field Strength at 3m	Limit	Delta to Limit	Remarks
		MHz		dBµV/m	dB	dBµV/m	dBµV/m	dBµV/m	
J2	PK	2442.00	H	88.77	2.20	90.97	114.00	-23.03	Fund.
	AV			83.20	2.20	85.40	94.00	-8.60	Fund.
	PK	2442.00	V	87.28	2.00	89.28	114.00	-24.72	Fund.
	AV			82.40	2.20	84.60	94.00	-9.40	Fund.
J2	PK	2444.00	H	90.64	2.20	92.84	114.00	-21.16	Fund.
	AV			81.30	2.20	83.50	94.00	-10.50	Fund.
	PK	2444.00	V	90.57	2.20	92.77	114.00	-21.23	Fund.
	AV			81.10	2.20	83.30	94.00	-10.70	Fund.
J2	PK	2446.00	H	89.97	2.30	92.27	114.00	-21.73	Fund.
	AV			81.90	2.30	84.20	94.00	-9.80	Fund.
	PK	2446.00	V	90.96	2.30	93.26	114.00	-20.74	Fund.
	AV			82.40	2.30	84.70	94.00	-9.30	Fund.
J1	PK	2454.00	H	90.61	2.40	93.01	114.00	-20.99	Fund.
	AV			80.59	2.40	82.99	94.00	-11.01	Fund.
	PK	2454.00	V	90.41	2.40	92.81	114.00	-21.19	Fund.
	AV			81.50	2.40	83.90	94.00	-10.10	Fund.
J2	PK	4884.00	H	41.27	3.60	44.87	74.00	-29.13	Harmonic
	PK		V	41.44	3.60	45.04	74.00	-28.96	Harmonic
J1	PK	4908.00	H	43.27	3.60	46.87	74.00	-27.13	Harmonic
	PK		V	43.12	3.60	46.72	74.00	-27.28	Harmonic

Report No.: 60.870.14.008.05F

Remark : - (*) Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).

- All emission more than 20 below the limit which does not be mentioned in the report
- Calculated measurement uncertainty: $\pm 3.5\text{dB}$

Limits of Field Strength for Fundamental and Harmonics Frequency [Section 15.249 (a)]:

Fundamental Frequency [MHz]	Field Strength of Fundamental		Field Strength of Harmonics	
	[mV/m]	[dB μ V/m]	[μ V/m]	[dB μ V/m]
902 – 928	50	94	500	54
2400 – 2483.5	50	94	500	54

Compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.

Limit Requirement under Section 15.249 (e) :

According to section 15.249 (e), for frequencies above 1000MHz, the above field strength limits is based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Limit for Radiated Emission [Section 15.209]:

Frequency (MHz)	Field Strength [μ V/m]	Field Strength [dB μ V/m]
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.


The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Report No.: 60.870.14.008.05F

4.2 Spurious Radiated Emission

Test Requirement:	FCC part 15 section 15.249(d), 15.209
Test Method:	ANSI C63.4:2009
Test Date:	2014-09-10
Mode of Operation:	Transmitting Mode
Detector Function:	Quasi-peak (Below 1000 MHz) Average and Peak (Above 1000 MHz)
Measurement BW:	120 kHz (Below 1000 MHz) 1 MHz (Above 1000 MHz)

Test Setup:

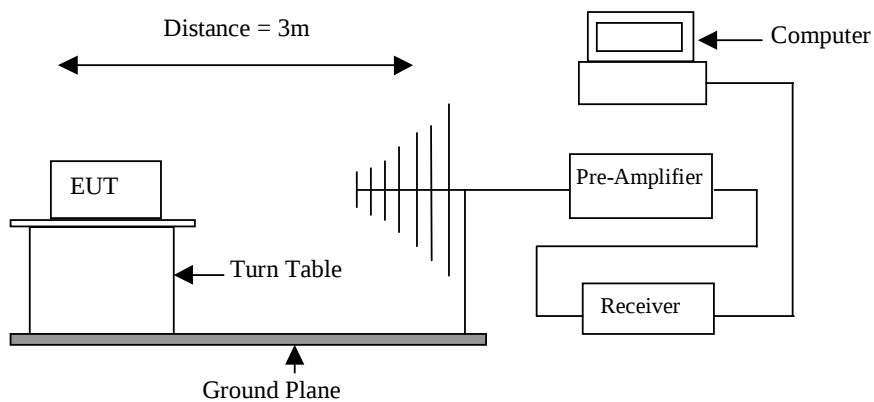

Report No.: 60.870.14.008.05F

Results: PASS

Transmitter Range: 921.5MHz to 924.5 MHz

Spurious Radiated Emissions							
Frequency MHz	Polarity	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBmV/m	Margin dB	Detector
49.400	V	15.9	12.7	28.6	40.0	-11.4	QP
70.740	V	19.2	10.3	29.5	40.0	-10.5	QP
101.780	V	26.8	10.9	37.7	43.5	-5.8	QP
152.220	V	18.2	15.0	33.2	43.5	-10.3	QP
191.020	V	20.0	12.8	32.8	43.5	-10.7	QP
95.960	H	25.9	9.6	35.5	43.5	-8.0	QP
101.780	H	31.3	10.9	42.2	43.5	-1.3	QP
152.220	H	22.5	15.0	37.5	43.5	-6.0	QP
191.020	H	23.7	12.8	36.5	43.5	-7.0	QP
202.660	H	24.2	11.4	35.6	43.5	-7.9	QP

Transmitter Range: 2442 MHz to 2454 MHz

Spurious Radiated Emissions							
Frequency MHz	Polarity	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBmV/m	Margin dB	Detector
35.820	V	12.0	18.9	30.9	40.0	-9.1	QP
158.040	V	9.1	15.1	24.2	43.5	-19.3	QP
200.720	V	11.2	11.6	22.8	43.5	-20.7	QP
299.660	V	10.4	15.1	25.5	46.0	-20.5	QP
571.260	V	5.9	22.2	28.1	46.0	-17.9	QP
992.240	V	7.9	28.4	36.3	54.0	-17.7	QP
35.820	H	10.5	18.9	29.4	40.0	-10.6	QP
130.880	H	11.8	14.2	26.0	43.5	-17.5	QP
156.100	H	13.3	15.2	28.5	43.5	-15.0	QP
299.660	H	12.2	15.1	27.3	46.0	-18.7	QP
683.780	H	7.7	24.4	32.1	46.0	-13.9	QP
988.360	H	11.2	28.3	39.5	54.0	-14.5	QP

Report No.: 60.870.14.008.05F

- Note:
- No further spurious emissions found between 30MHz and lowest internal used / generated frequency.
 - The result shown the worst case of the operating frequency.
 - All emission more than 20 below the limit which does not be mentioned in the report.
 - Result data graph is shown at the next pages for reference.

- Remark :
- (*) Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).
 - Calculated measurement uncertainty: $\pm 3.5\text{dB}$.

Limit of Outside of the Specified Bands [Section 15.249 (d)]

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation

Limit for Radiated Emission [Section 15.209]:


Frequency (MHz)	Field Strength [$\mu\text{V/m}$]	Field Strength [dB $\mu\text{V/m}$]
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.


Report No.: 60.870.14.008.05F

Vertical (Transmitter Range 921.5 MHz to 924.5 MHz)

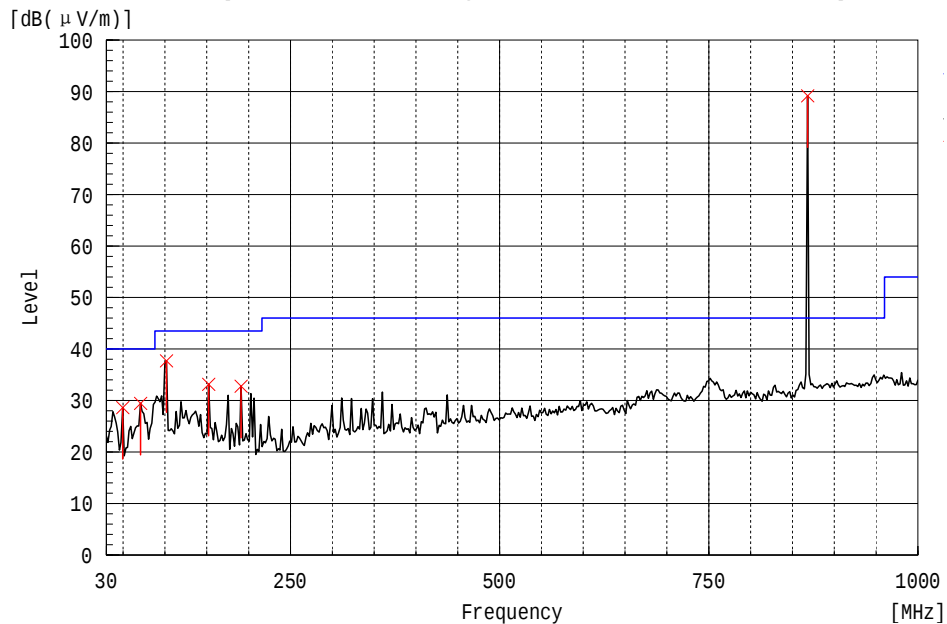

Remark: No significant emissions were detected above 1 GHz except the related operating frequency.


Horizontal (Transmitter Range 921.5 MHz to 924.5 MHz)

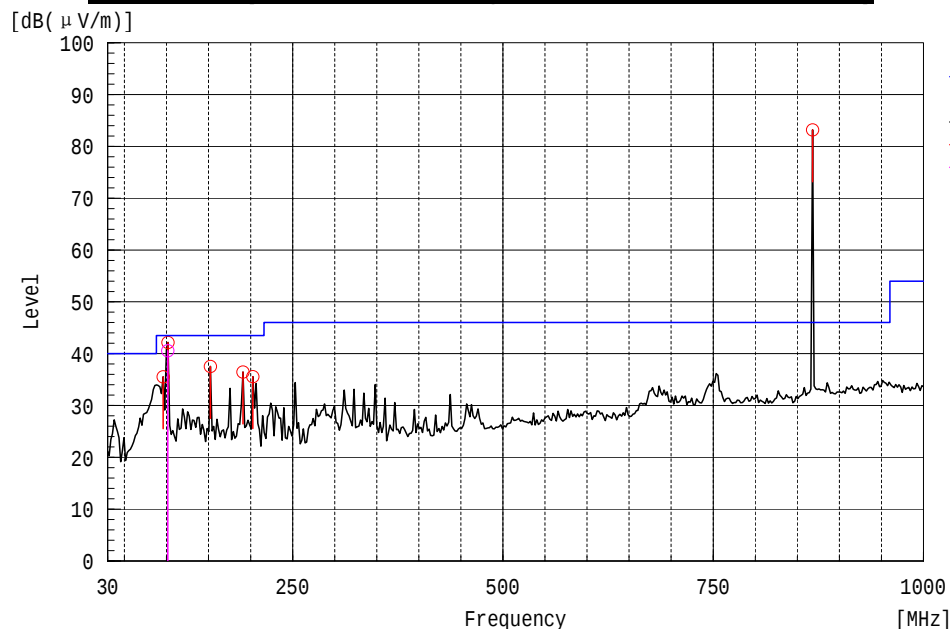

Remark: No significant emissions were detected above 1 GHz except the related operating frequency.


Report No.: 60.870.14.008.05F

Vertical (Transmitter Range 2442 to 2454 MHz)

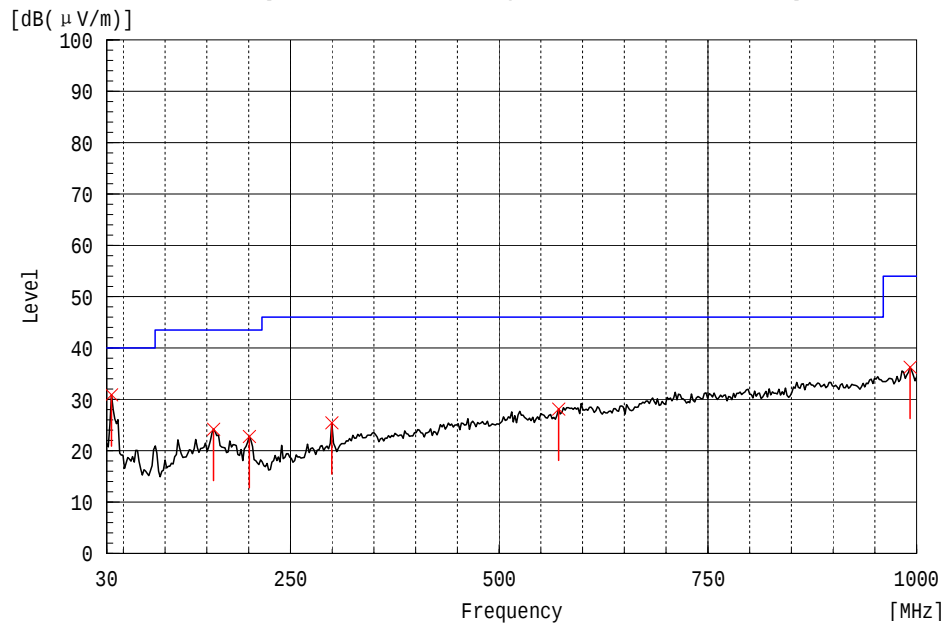

Remark: No significant emissions were detected above 1 GHz except the related operating frequency.

Horizontal (Transmitter Range 2442 to 2454 MHz)

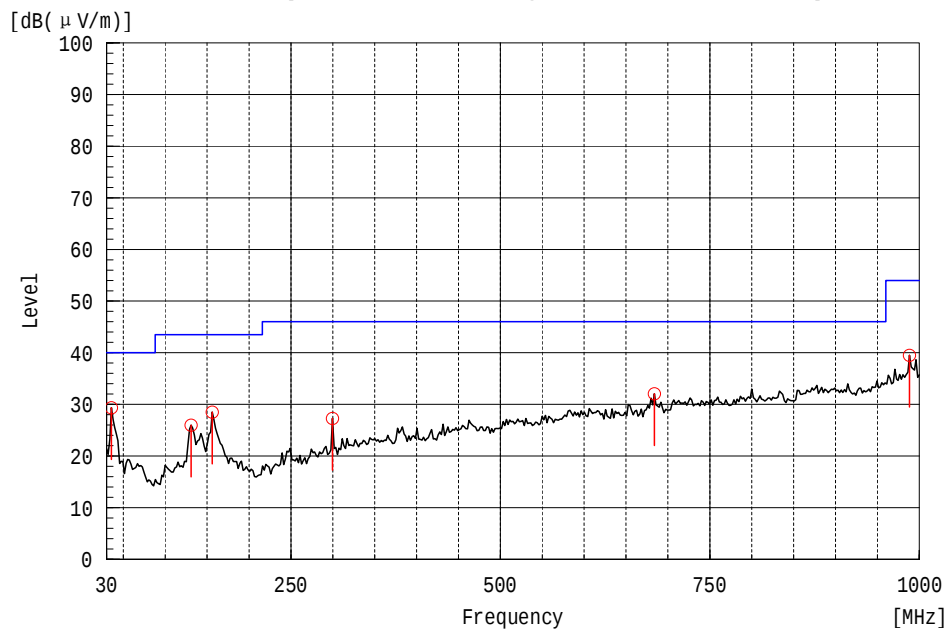

Remark: No significant emissions were detected above 1 GHz except the related operating frequency.



Report No.: 60.870.14.008.05F

4.3 Out of Band Emissions

Test Requirement:	FCC part 15 section 15.249 (d)
Test Method:	ANSI C63.4:2009
Test Date:	2014-09-10
Mode of Operation:	Transmitting mode.
Detector Function:	Peak

Results: PASS

Refer to the data graph, the lower and higher edge of the specified frequency bands fulfill the general radiated emission limits in section 15.209. Therefore, the EUT meets the requirement of section 15.249 (d).


Limit for Out of Band Emissions [Section 15.249 (d)]

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.


Test Result: Result data graph is shown at the next pages for reference.

Report No.: 60.870.14.008.05F

Lowest Channel (902 – 928 MHz Range)

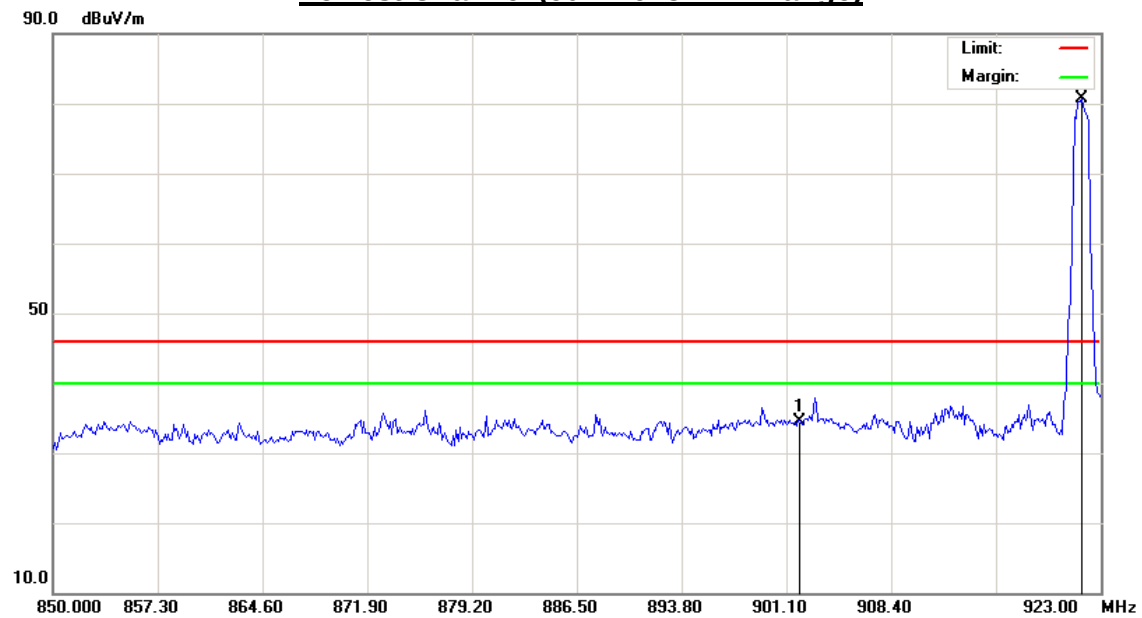


Highest Channel (902 – 928 MHz Range)

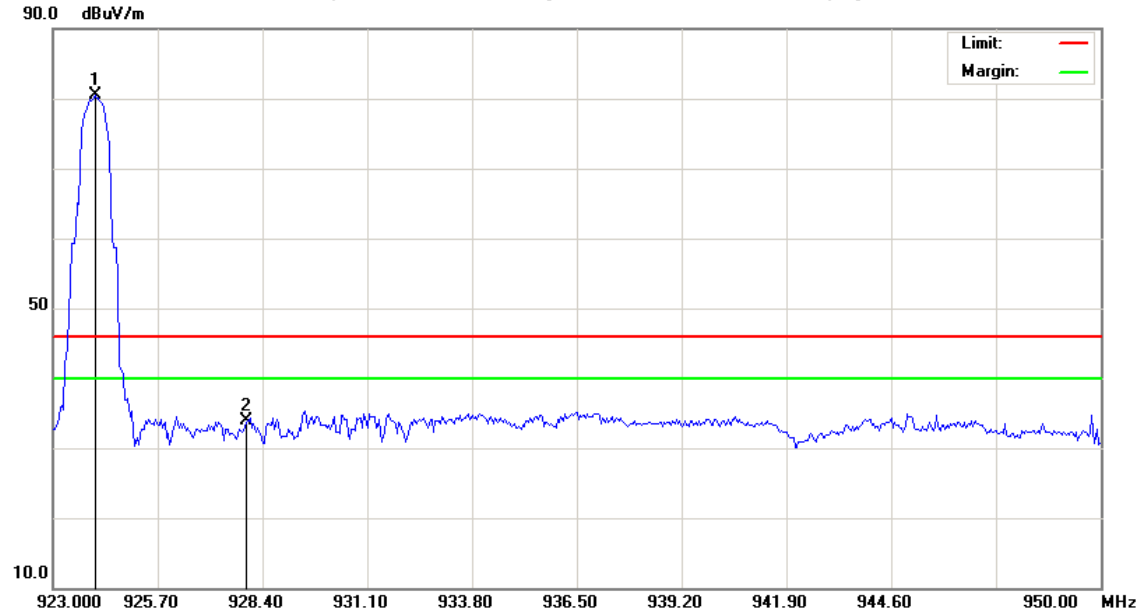


Report No.: 60.870.14.008.05F

Lowest Channel (2400 – 2483.5 MHz Range)

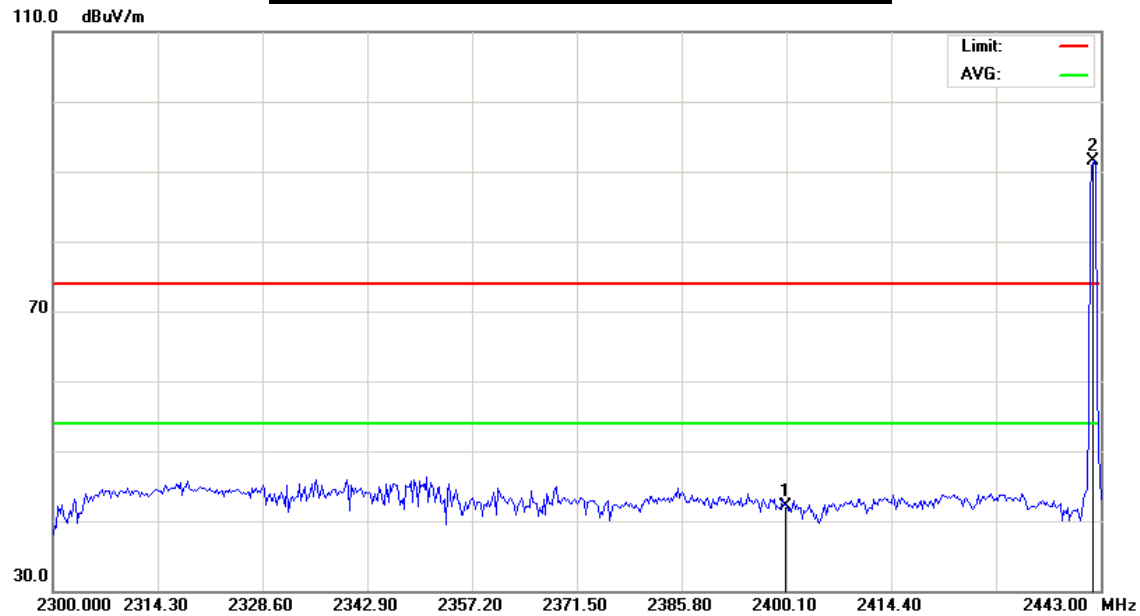

Highest Channel (2400 – 2483.5 MHz Range)

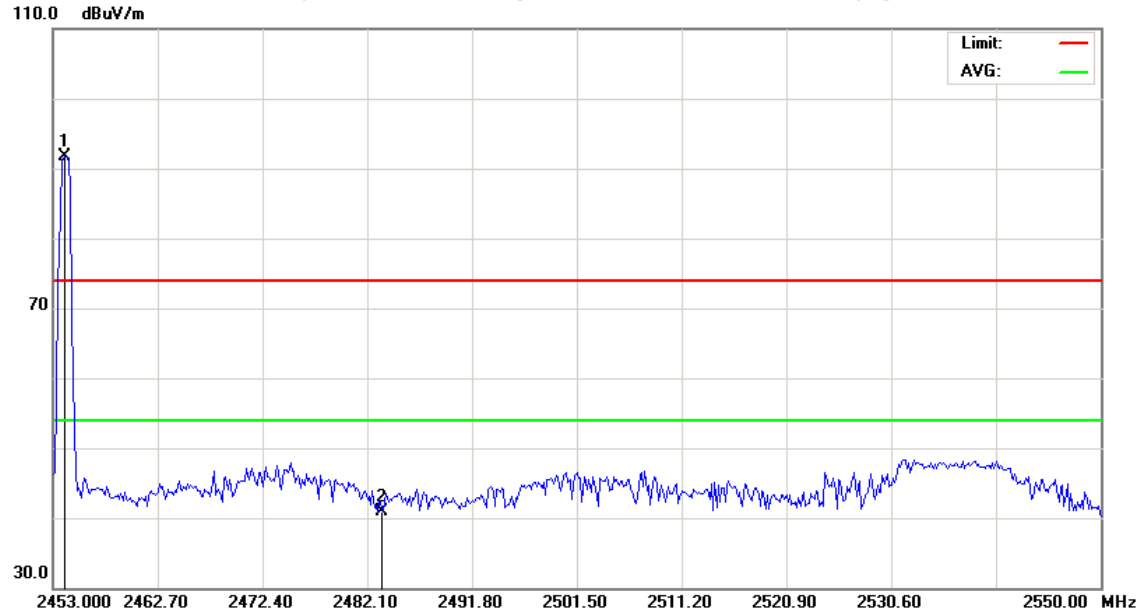



Report No.: 60.870.14.008.05F

4.4 Bandwidth Measurement

Test Requirement:	FCC part 15 section 15.215 (c)
Test Method:	ANSI C63.4:2009
Test Date:	2014-09-20
Mode of Operation:	Transmitting mode.
Detector Function:	Peak

Results: PASS


Refer to the data graph, the 20dB points of Low Channel, Mid Channel and High Channel. All channels within the operation bandwidth when equipment is operated. Therefore, the EUT meets the requirement of section 15.215(c).

Limit for Bandwidth [Section 15.215 (c)]


The 20dB bandwidth of the emission shall be within the frequency band designated in the rule section under which the equipment is operated.

Test Result: Result data graph is shown at the next pages for reference.

Report No.: 60.870.14.008.05F

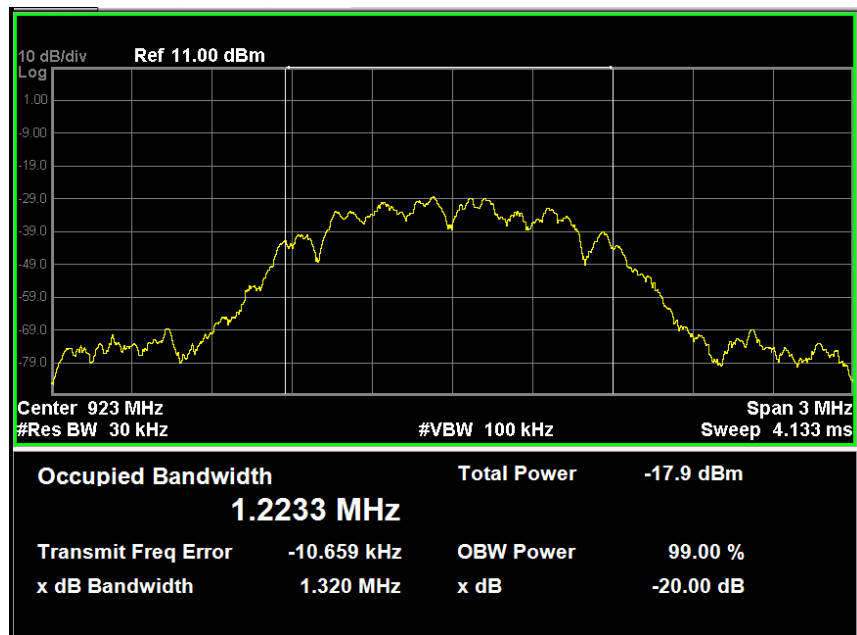


Low Channel – Bandwidth 1.320 MHz

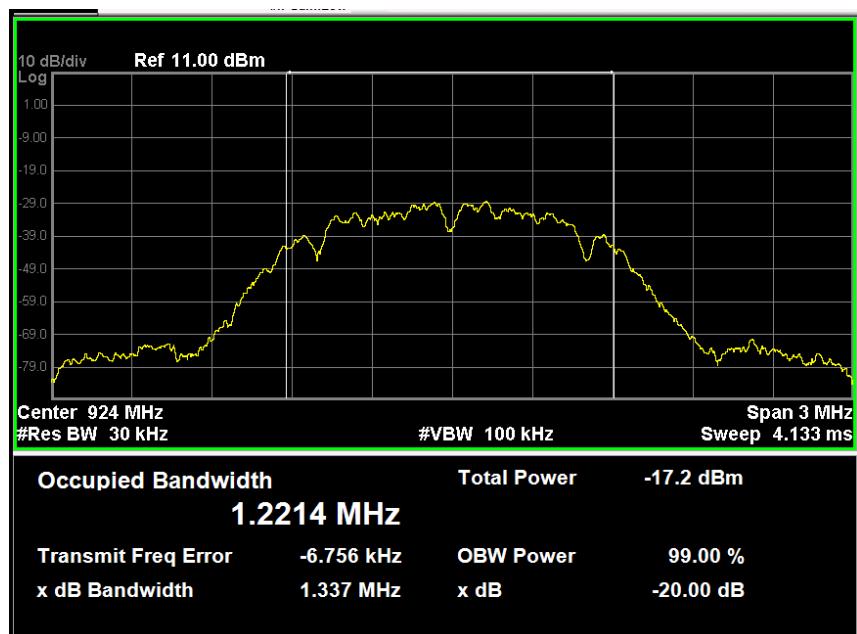


Mid Channel – Bandwidth 1.337 MHz

Report No.: 60.870.14.008.05F

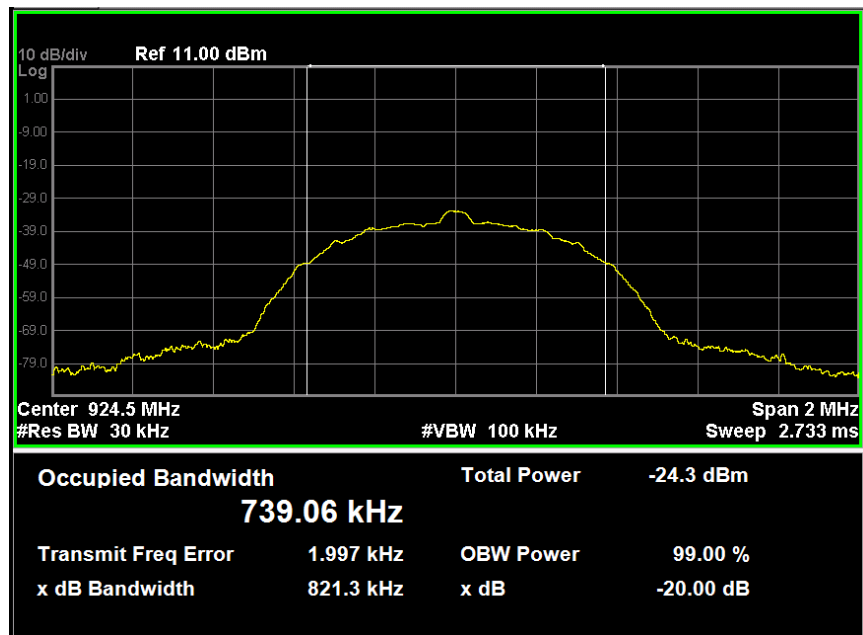


High Channel – Bandwidth 821.3 kHz

Report No.: 60.870.14.008.05F

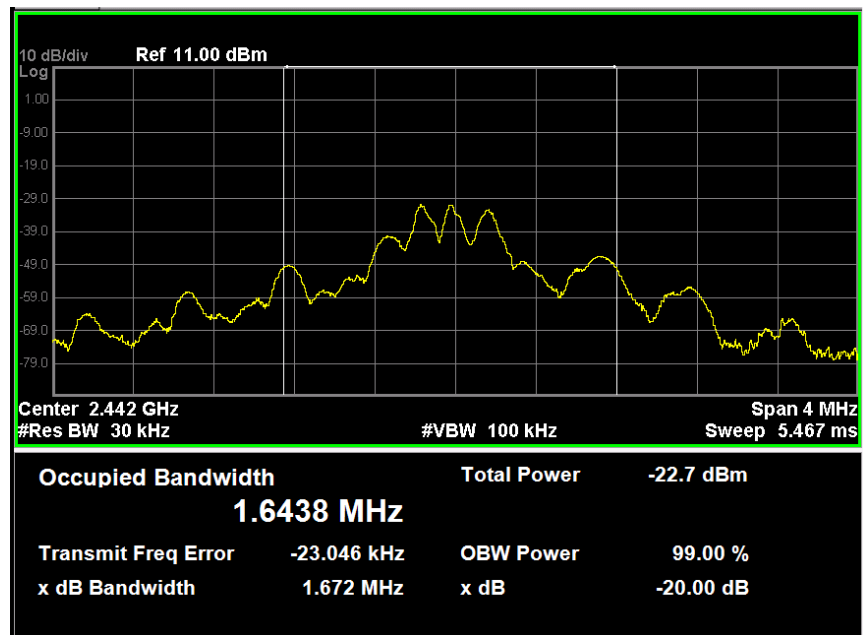


Low Channel – Bandwidth 1.672 MHz

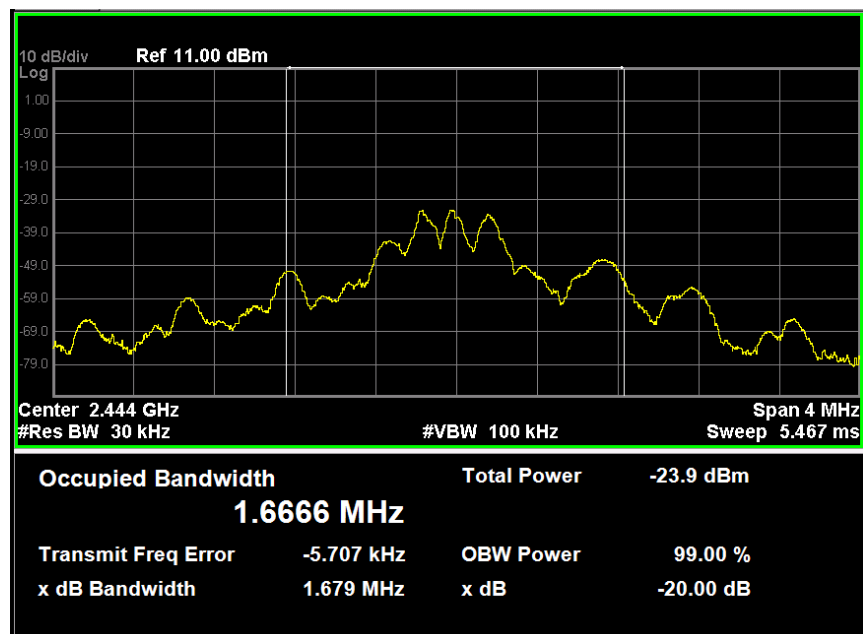


Mid Channel – Bandwidth 1.679 MHz

Report No.: 60.870.14.008.05F

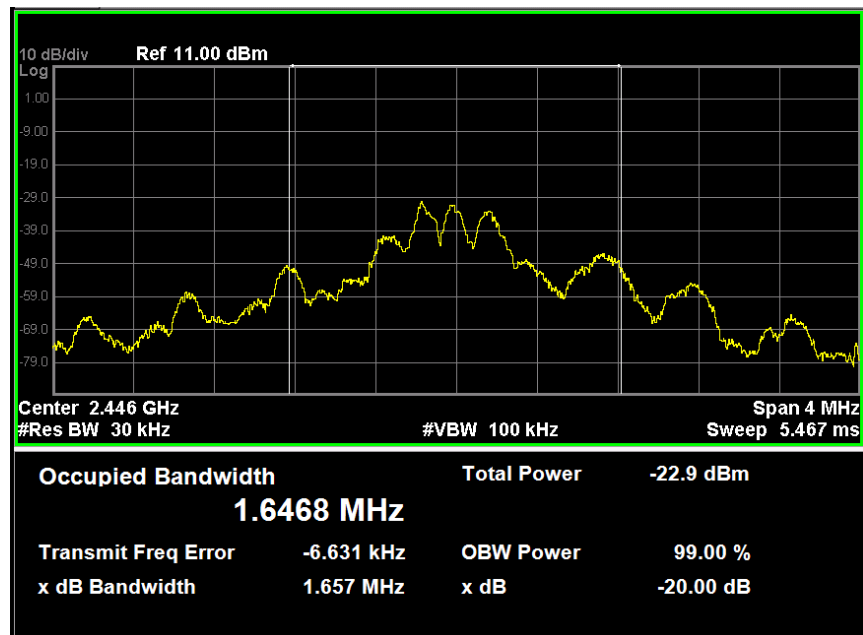

High Channel – Bandwidth 1.657 MHz

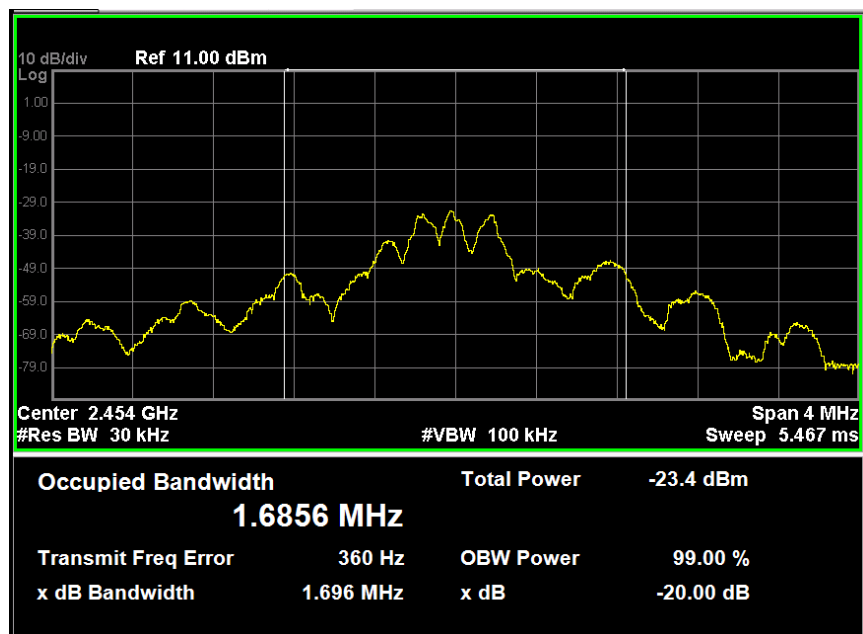

Last Channel – Bandwidth 1.696 MHz


Report No.: 60.870.14.008.05F

4.5 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC part 15 Section 15.207 Class B
Test Method:	ANSI C63.4:2009
Test Date:	2014-09-24
Mode of Operation:	Transmitting
Detector Function:	Quasi-peak, average
Measurement BW:	9 kHz

Remark : ---

Test Setup:

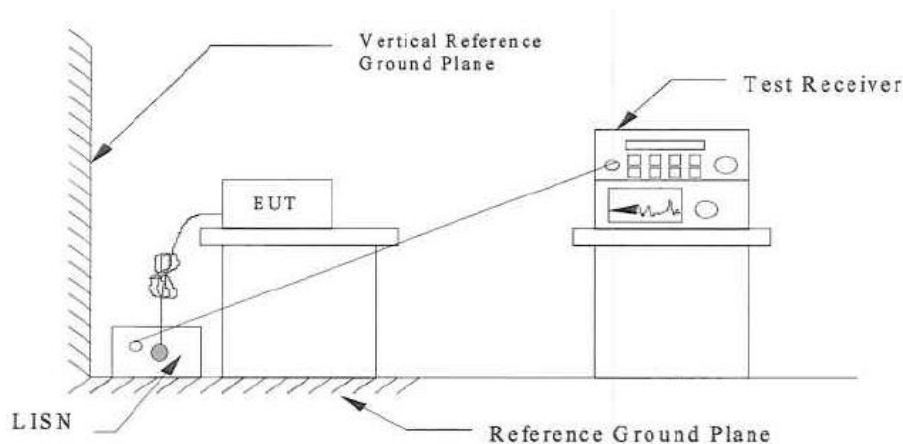

Results: PASS

- Refer Figures and tables for the result.

Limits for Conducted Emission [Section 15.207]:

Frequency Range [MHz]	Quasi-Peak Limit [dBμV]	Average Limit [dBμV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50


* Decreases with the logarithm of the frequency.

Remarks:

Calculated measurement uncertainty: $\pm 2.8\text{dB}$

Report No.: 60.870.14.008.05F

Result data graph shows the conducted emission (Live).

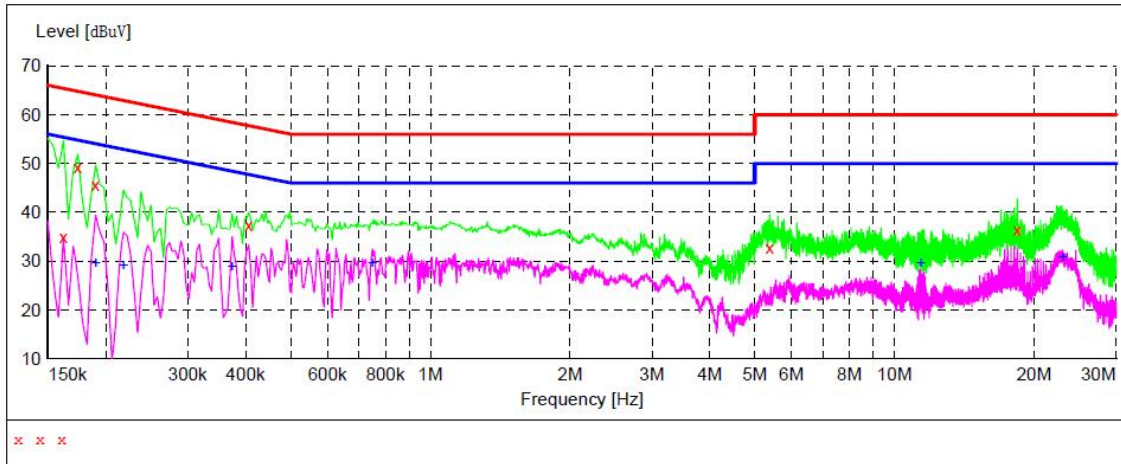


Refer to the following table for the result details:

Conducted Emission					
Frequency (MHz)	Detector (QP/AV)	Phase	Result (dB μ V)	Limit (dB μ V)	Margin
0.162	QP	L	35.00	65.40	-30.40
0.174	QP	L	49.20	64.80	-15.60
0.190	QP	L	45.60	64.00	-18.40
0.400	QP	L	37.40	57.70	-20.30
5.382	QP	L	32.80	60.00	-27.20
18.390	QP	L	36.30	60.00	-23.70

Report No.: 60.870.14.008.05F

Result data graph shows the conducted emission (Neutral).

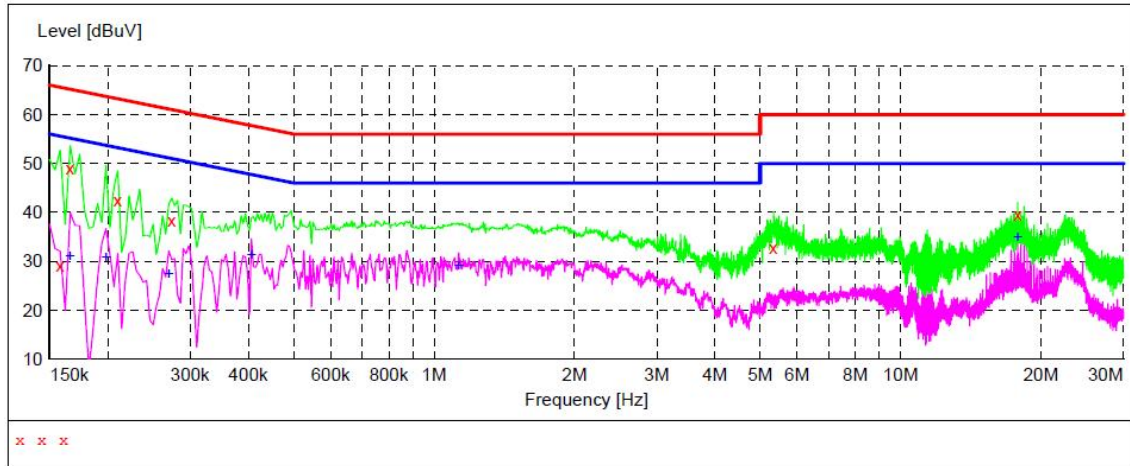

Refer to the following table for the result details:

Conducted Emission					
Frequency (MHz)	Detector (QP/AV)	Phase	Result (dB μ V)	Limit (dB μ V)	Margin
0.158	QP	N	29.10	65.60	-36.50
0.166	QP	N	48.90	65.20	-16.30
0.210	QP	N	42.50	63.20	-20.70
0.274	QP	N	0.20	23.00	-22.80
5.338	QP	N	32.70	60.00	-27.30
17.818	QP	N	39.50	60.00	-20.50

Report No.: 60.870.14.008.05F

5.0 List of Measurement Equipment

Radiated Emission and Bandwidth Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
N/A	3m Semi- Anechoic Chamber	9.0(L)*6.0(W)*6.0(H)	N/A	Jul. 16 2015
Agilent	Spectrum Analyzer	E4440A	US41421290	Jul. 16 2015
R&S	EMI Test Receiver	ESCI	100694	Jul. 16 2015
A.H.	Wideband Antenna	SAS-521-4	26	Jul. 16 2015
EMCO	Antenna	3142C	60447	Jul. 16 2015
EM	Horn Antenna	EM-AH-10180	67	Jul. 16 2015
EM	Power Amplifier	EM30180	0607030	Jul. 16 2015
MF	Position Controller	MF-7802	MF780208138	N/A

Conducted Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
N/A	Shielding Room	7.(L)x4(W)x3(H)	N/A	Jul. 16 2015
R&S	EMI Test Receiver	ESCI	100694	Jul. 16 2015
R&S	LISN	ESH3-Z5	8389791009	Jul. 16 2015

N/A Not Applicable or Not Available