






Modulation	be EHT40	Test Freq. (MHz)	6405																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8540.00</td><td>39.13</td><td>68.20</td><td>-29.07</td><td>33.62</td><td>5.51</td><td>Average</td><td>100</td><td>239</td></tr><tr><td>2</td><td>8540.00</td><td>52.31</td><td>88.20</td><td>-35.89</td><td>46.80</td><td>5.51</td><td>Peak</td><td>100</td><td>239</td></tr><tr><td>3</td><td>10675.00</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>35.07</td><td>7.50</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>4</td><td>10675.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>47.66</td><td>7.50</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>5</td><td>12810.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>36.59</td><td>6.12</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>12810.00</td><td>56.23</td><td>88.20</td><td>-31.97</td><td>50.11</td><td>6.12</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8540.00	39.13	68.20	-29.07	33.62	5.51	Average	100	239	2	8540.00	52.31	88.20	-35.89	46.80	5.51	Peak	100	239	3	10675.00	42.57	54.00	-11.43	35.07	7.50	Average	100	115	4	10675.00	55.16	74.00	-18.84	47.66	7.50	Peak	100	115	5	12810.00	42.71	68.20	-25.49	36.59	6.12	Average	100	60	6	12810.00	56.23	88.20	-31.97	50.11	6.12	Peak	100	60
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	8540.00	39.13	68.20	-29.07	33.62	5.51	Average	100	239																																																																																				
2	8540.00	52.31	88.20	-35.89	46.80	5.51	Peak	100	239																																																																																				
3	10675.00	42.57	54.00	-11.43	35.07	7.50	Average	100	115																																																																																				
4	10675.00	55.16	74.00	-18.84	47.66	7.50	Peak	100	115																																																																																				
5	12810.00	42.71	68.20	-25.49	36.59	6.12	Average	100	60																																																																																				
6	12810.00	56.23	88.20	-31.97	50.11	6.12	Peak	100	60																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

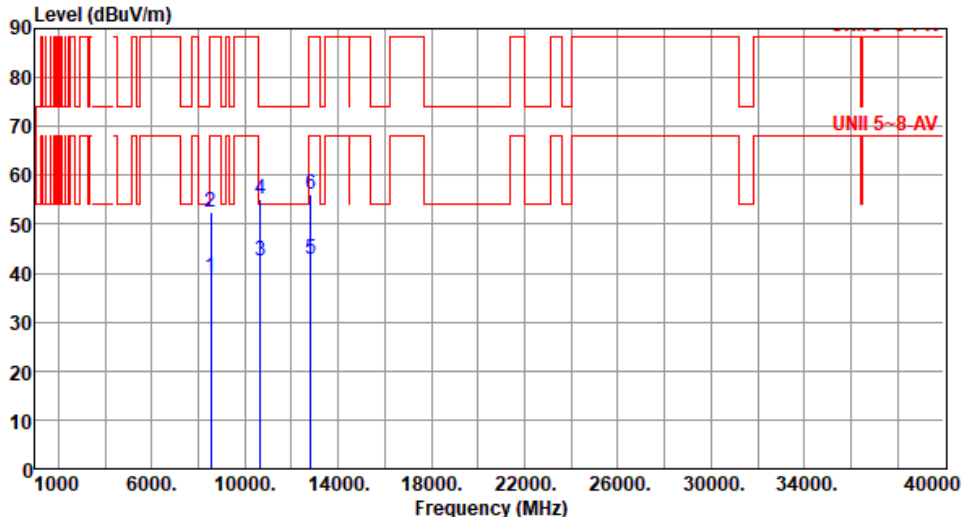


Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8593.30	39.14	68.20	-29.06	33.45	5.69	Average	100	122
2	8593.30	52.27	88.20	-35.93	46.58	5.69	Peak	100	122
3	10741.60	42.46	54.00	-11.54	35.08	7.38	Average	100	274
4	10741.60	55.96	74.00	-18.04	48.58	7.38	Peak	100	274
5	12890.00	42.48	68.20	-25.72	36.50	5.98	Average	100	64
6	12890.00	55.82	88.20	-32.38	49.84	5.98	Peak	100	64
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

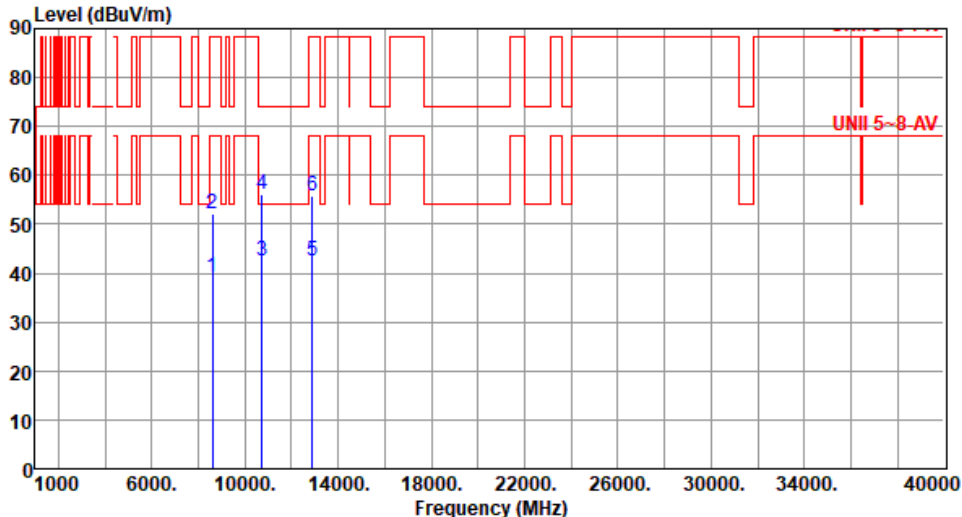

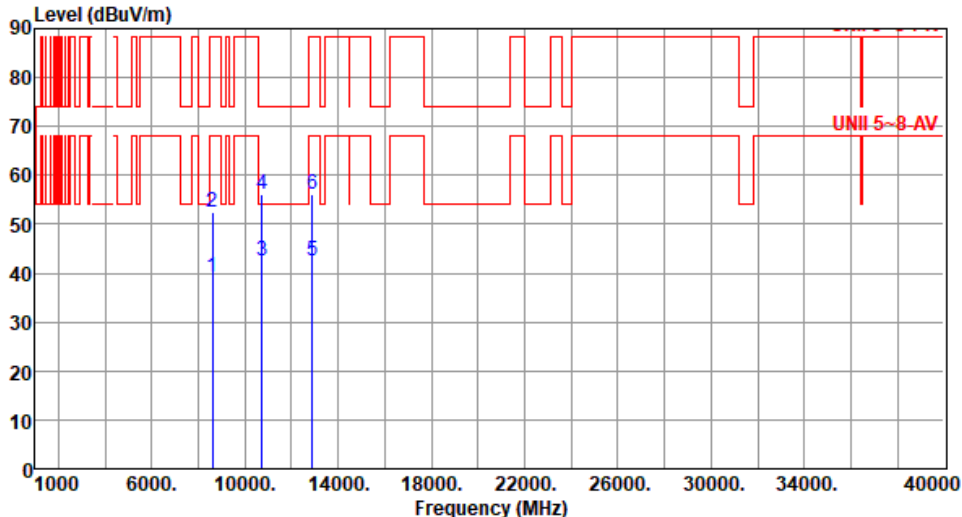Modulation	be EHT40	Test Freq. (MHz)	6445																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8593.30</td><td>39.19</td><td>68.20</td><td>-29.01</td><td>33.50</td><td>5.69</td><td>Average</td><td>100</td><td>239</td></tr><tr><td>2</td><td>8593.30</td><td>52.42</td><td>88.20</td><td>-35.78</td><td>46.73</td><td>5.69</td><td>Peak</td><td>100</td><td>239</td></tr><tr><td>3</td><td>10741.60</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>35.10</td><td>7.38</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>4</td><td>10741.60</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>48.75</td><td>7.38</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>5</td><td>12890.00</td><td>42.50</td><td>68.20</td><td>-25.70</td><td>36.52</td><td>5.98</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>12890.00</td><td>56.04</td><td>88.20</td><td>-32.16</td><td>50.06</td><td>5.98</td><td>Peak</td><td>100</td><td>90</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8593.30	39.19	68.20	-29.01	33.50	5.69	Average	100	239	2	8593.30	52.42	88.20	-35.78	46.73	5.69	Peak	100	239	3	10741.60	42.48	54.00	-11.52	35.10	7.38	Average	100	128	4	10741.60	56.13	74.00	-17.87	48.75	7.38	Peak	100	128	5	12890.00	42.50	68.20	-25.70	36.52	5.98	Average	100	90	6	12890.00	56.04	88.20	-32.16	50.06	5.98	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8593.30	39.19	68.20	-29.01	33.50	5.69	Average	100	239																																																																
2	8593.30	52.42	88.20	-35.78	46.73	5.69	Peak	100	239																																																																
3	10741.60	42.48	54.00	-11.52	35.10	7.38	Average	100	128																																																																
4	10741.60	56.13	74.00	-17.87	48.75	7.38	Peak	100	128																																																																
5	12890.00	42.50	68.20	-25.70	36.52	5.98	Average	100	90																																																																
6	12890.00	56.04	88.20	-32.16	50.06	5.98	Peak	100	90																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

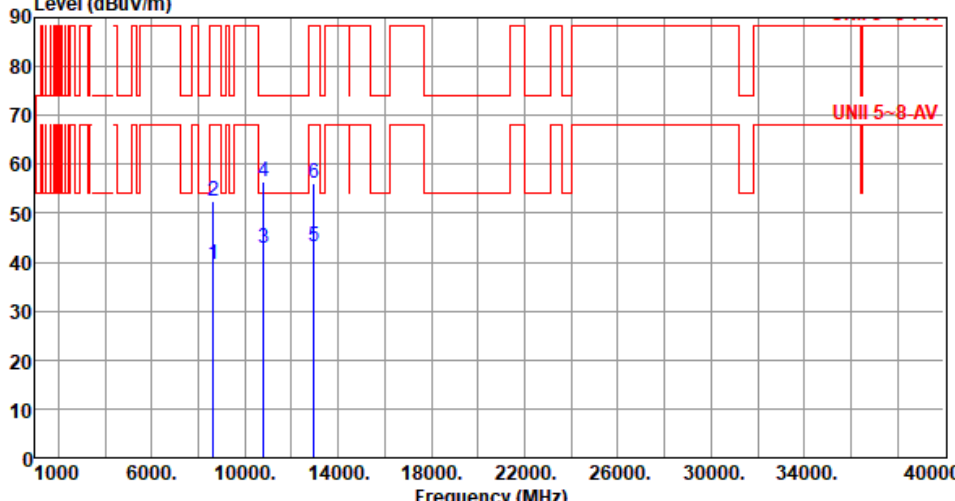


Modulation	be EHT40	Test Freq. (MHz)	6485																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8646.60</td><td>39.47</td><td>68.20</td><td>-28.73</td><td>33.59</td><td>5.88</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>2</td><td>8646.60</td><td>52.49</td><td>88.20</td><td>-35.71</td><td>46.61</td><td>5.88</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>3</td><td>10808.30</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>35.35</td><td>7.46</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>4</td><td>10808.30</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>49.10</td><td>7.46</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>5</td><td>12970.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>37.01</td><td>6.12</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>6</td><td>12970.00</td><td>56.16</td><td>88.20</td><td>-32.04</td><td>50.04</td><td>6.12</td><td>Peak</td><td>100</td><td>309</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8646.60	39.47	68.20	-28.73	33.59	5.88	Average	100	118	2	8646.60	52.49	88.20	-35.71	46.61	5.88	Peak	100	118	3	10808.30	42.81	54.00	-11.19	35.35	7.46	Average	100	240	4	10808.30	56.56	74.00	-17.44	49.10	7.46	Peak	100	240	5	12970.00	43.13	68.20	-25.07	37.01	6.12	Average	100	309	6	12970.00	56.16	88.20	-32.04	50.04	6.12	Peak	100	309
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8646.60	39.47	68.20	-28.73	33.59	5.88	Average	100	118																																																																
2	8646.60	52.49	88.20	-35.71	46.61	5.88	Peak	100	118																																																																
3	10808.30	42.81	54.00	-11.19	35.35	7.46	Average	100	240																																																																
4	10808.30	56.56	74.00	-17.44	49.10	7.46	Peak	100	240																																																																
5	12970.00	43.13	68.20	-25.07	37.01	6.12	Average	100	309																																																																
6	12970.00	56.16	88.20	-32.04	50.04	6.12	Peak	100	309																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6485																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m) UNII 5~8-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8646.60</td><td>39.43</td><td>68.20</td><td>-28.77</td><td>33.55</td><td>5.88</td><td>Average</td><td>100</td><td>263</td></tr><tr><td>2</td><td>8646.60</td><td>52.67</td><td>88.20</td><td>-35.53</td><td>46.79</td><td>5.88</td><td>Peak</td><td>100</td><td>263</td></tr><tr><td>3</td><td>10808.30</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>34.60</td><td>7.46</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>4</td><td>10808.30</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>48.53</td><td>7.46</td><td>Peak</td><td>100</td><td>156</td></tr><tr><td>5</td><td>12970.00</td><td>42.80</td><td>68.20</td><td>-25.40</td><td>36.68</td><td>6.12</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>12970.00</td><td>56.10</td><td>88.20</td><td>-32.10</td><td>49.98</td><td>6.12</td><td>Peak</td><td>100</td><td>80</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8646.60	39.43	68.20	-28.77	33.55	5.88	Average	100	263	2	8646.60	52.67	88.20	-35.53	46.79	5.88	Peak	100	263	3	10808.30	42.06	54.00	-11.94	34.60	7.46	Average	100	156	4	10808.30	55.99	74.00	-18.01	48.53	7.46	Peak	100	156	5	12970.00	42.80	68.20	-25.40	36.68	6.12	Average	100	80	6	12970.00	56.10	88.20	-32.10	49.98	6.12	Peak	100	80
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	8646.60	39.43	68.20	-28.77	33.55	5.88	Average	100	263																																																																																				
2	8646.60	52.67	88.20	-35.53	46.79	5.88	Peak	100	263																																																																																				
3	10808.30	42.06	54.00	-11.94	34.60	7.46	Average	100	156																																																																																				
4	10808.30	55.99	74.00	-18.01	48.53	7.46	Peak	100	156																																																																																				
5	12970.00	42.80	68.20	-25.40	36.68	6.12	Average	100	80																																																																																				
6	12970.00	56.10	88.20	-32.10	49.98	6.12	Peak	100	80																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

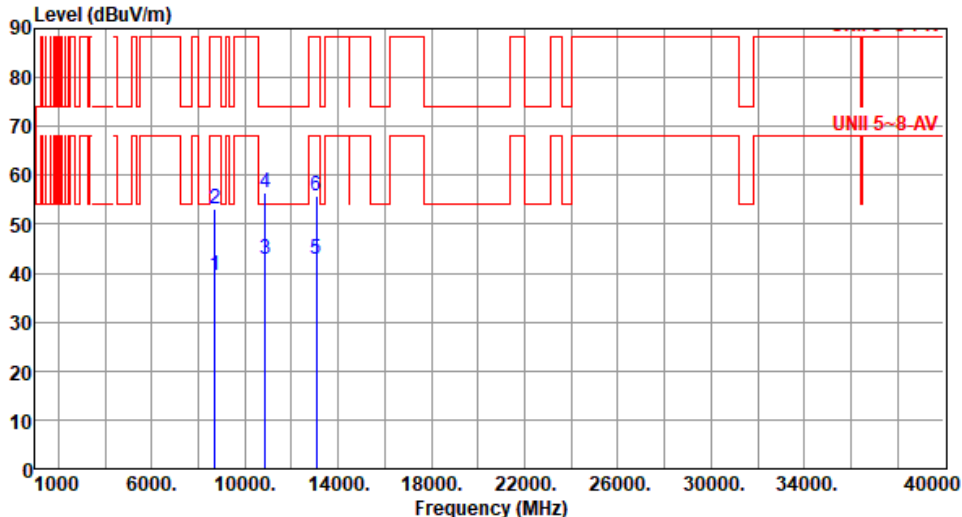


Modulation	be EHT40	Test Freq. (MHz)	6525																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>8700.00</td><td>39.66</td><td>68.20</td><td>-28.54</td><td>33.60</td><td>6.06</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>8700.00</td><td>53.21</td><td>88.20</td><td>-34.99</td><td>47.15</td><td>6.06</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>10875.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>35.12</td><td>7.56</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>4</td><td>10875.00</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>48.86</td><td>7.56</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>5</td><td>13050.00</td><td>42.96</td><td>68.20</td><td>-25.24</td><td>37.06</td><td>5.90</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>13050.00</td><td>55.96</td><td>88.20</td><td>-32.24</td><td>50.06</td><td>5.90</td><td>Peak</td><td>100</td><td>55</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8700.00	39.66	68.20	-28.54	33.60	6.06	Average	100	127	2	8700.00	53.21	88.20	-34.99	47.15	6.06	Peak	100	127	3	10875.00	42.68	54.00	-11.32	35.12	7.56	Average	100	254	4	10875.00	56.42	74.00	-17.58	48.86	7.56	Peak	100	254	5	13050.00	42.96	68.20	-25.24	37.06	5.90	Average	100	55	6	13050.00	55.96	88.20	-32.24	50.06	5.90	Peak	100	55
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	8700.00	39.66	68.20	-28.54	33.60	6.06	Average	100	127																																																																																				
2	8700.00	53.21	88.20	-34.99	47.15	6.06	Peak	100	127																																																																																				
3	10875.00	42.68	54.00	-11.32	35.12	7.56	Average	100	254																																																																																				
4	10875.00	56.42	74.00	-17.58	48.86	7.56	Peak	100	254																																																																																				
5	13050.00	42.96	68.20	-25.24	37.06	5.90	Average	100	55																																																																																				
6	13050.00	55.96	88.20	-32.24	50.06	5.90	Peak	100	55																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

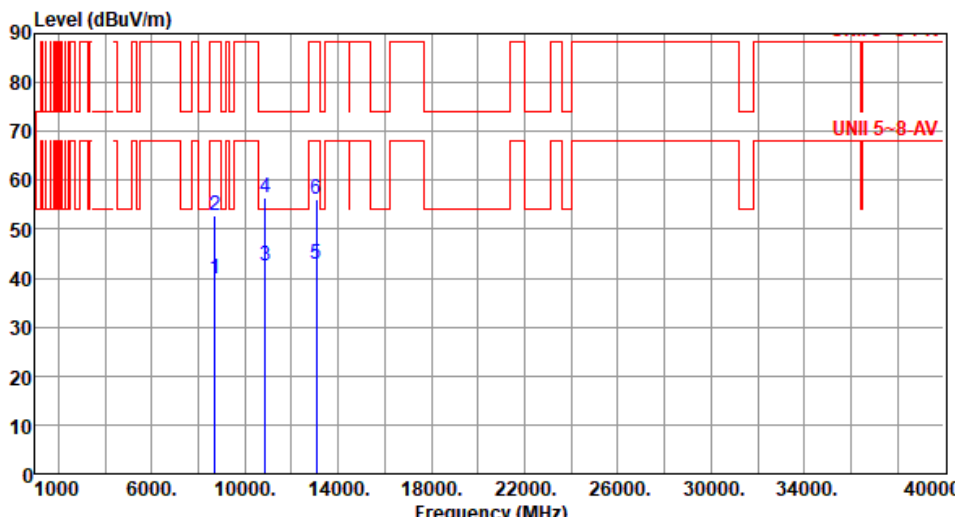

Modulation	be EHT40	Test Freq. (MHz)	6525																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8700.00</td><td>39.71</td><td>68.20</td><td>-28.49</td><td>33.65</td><td>6.06</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>8700.00</td><td>52.75</td><td>88.20</td><td>-35.45</td><td>46.69</td><td>6.06</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>10875.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>35.08</td><td>7.56</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>10875.00</td><td>56.49</td><td>74.00</td><td>-17.51</td><td>48.93</td><td>7.56</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>13050.00</td><td>42.96</td><td>68.20</td><td>-25.24</td><td>37.06</td><td>5.90</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>6</td><td>13050.00</td><td>56.01</td><td>88.20</td><td>-32.19</td><td>50.11</td><td>5.90</td><td>Peak</td><td>100</td><td>84</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8700.00	39.71	68.20	-28.49	33.65	6.06	Average	100	245	2	8700.00	52.75	88.20	-35.45	46.69	6.06	Peak	100	245	3	10875.00	42.64	54.00	-11.36	35.08	7.56	Average	100	112	4	10875.00	56.49	74.00	-17.51	48.93	7.56	Peak	100	112	5	13050.00	42.96	68.20	-25.24	37.06	5.90	Average	100	84	6	13050.00	56.01	88.20	-32.19	50.11	5.90	Peak	100	84
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8700.00	39.71	68.20	-28.49	33.65	6.06	Average	100	245																																																																
2	8700.00	52.75	88.20	-35.45	46.69	6.06	Peak	100	245																																																																
3	10875.00	42.64	54.00	-11.36	35.08	7.56	Average	100	112																																																																
4	10875.00	56.49	74.00	-17.51	48.93	7.56	Peak	100	112																																																																
5	13050.00	42.96	68.20	-25.24	37.06	5.90	Average	100	84																																																																
6	13050.00	56.01	88.20	-32.19	50.11	5.90	Peak	100	84																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

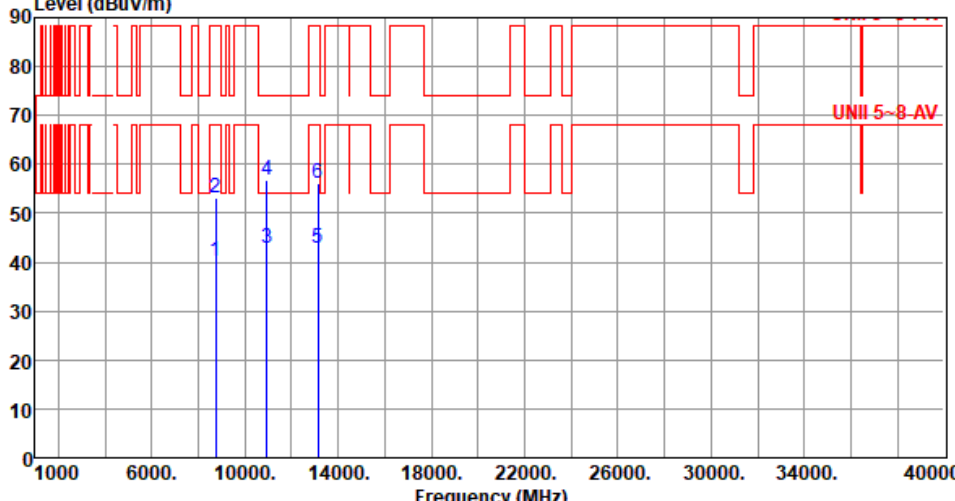

Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8753.30</td><td>40.07</td><td>68.20</td><td>-28.13</td><td>33.73</td><td>6.34</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>8753.30</td><td>53.03</td><td>88.20</td><td>-35.17</td><td>46.69</td><td>6.34</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>10941.60</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>35.26</td><td>7.66</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>4</td><td>10941.60</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>49.03</td><td>7.66</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>5</td><td>13130.00</td><td>42.91</td><td>68.20</td><td>-25.29</td><td>37.13</td><td>5.78</td><td>Average</td><td>100</td><td>312</td></tr><tr><td>6</td><td>13130.00</td><td>55.98</td><td>88.20</td><td>-32.22</td><td>50.20</td><td>5.78</td><td>Peak</td><td>100</td><td>312</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8753.30	40.07	68.20	-28.13	33.73	6.34	Average	100	124	2	8753.30	53.03	88.20	-35.17	46.69	6.34	Peak	100	124	3	10941.60	42.92	54.00	-11.08	35.26	7.66	Average	100	242	4	10941.60	56.69	74.00	-17.31	49.03	7.66	Peak	100	242	5	13130.00	42.91	68.20	-25.29	37.13	5.78	Average	100	312	6	13130.00	55.98	88.20	-32.22	50.20	5.78	Peak	100	312
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8753.30	40.07	68.20	-28.13	33.73	6.34	Average	100	124																																																																
2	8753.30	53.03	88.20	-35.17	46.69	6.34	Peak	100	124																																																																
3	10941.60	42.92	54.00	-11.08	35.26	7.66	Average	100	242																																																																
4	10941.60	56.69	74.00	-17.31	49.03	7.66	Peak	100	242																																																																
5	13130.00	42.91	68.20	-25.29	37.13	5.78	Average	100	312																																																																
6	13130.00	55.98	88.20	-32.22	50.20	5.78	Peak	100	312																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6565						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8753.30	40.04	68.20	-28.16	33.70	6.34	Average	100	226
2	8753.30	53.07	88.20	-35.13	46.73	6.34	Peak	100	226
3	10941.60	42.90	54.00	-11.10	35.24	7.66	Average	100	109
4	10941.60	56.65	74.00	-17.35	48.99	7.66	Peak	100	109
5	13130.00	42.91	68.20	-25.29	37.13	5.78	Average	100	13
6	13130.00	55.84	88.20	-32.36	50.06	5.78	Peak	100	13
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8966.60</td><td>39.82</td><td>68.20</td><td>-28.38</td><td>33.85</td><td>5.97</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>8966.60</td><td>52.77</td><td>88.20</td><td>-35.43</td><td>46.80</td><td>5.97</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>11208.30</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>35.49</td><td>6.67</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>4</td><td>11208.30</td><td>55.87</td><td>74.00</td><td>-18.13</td><td>49.20</td><td>6.67</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>5</td><td>13450.00</td><td>43.41</td><td>68.20</td><td>-24.79</td><td>37.40</td><td>6.01</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>6</td><td>13450.00</td><td>56.58</td><td>88.20</td><td>-31.62</td><td>50.57</td><td>6.01</td><td>Peak</td><td>100</td><td>92</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8966.60	39.82	68.20	-28.38	33.85	5.97	Average	100	137	2	8966.60	52.77	88.20	-35.43	46.80	5.97	Peak	100	137	3	11208.30	42.16	54.00	-11.84	35.49	6.67	Average	100	220	4	11208.30	55.87	74.00	-18.13	49.20	6.67	Peak	100	220	5	13450.00	43.41	68.20	-24.79	37.40	6.01	Average	100	92	6	13450.00	56.58	88.20	-31.62	50.57	6.01	Peak	100	92
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8966.60	39.82	68.20	-28.38	33.85	5.97	Average	100	137																																																																
2	8966.60	52.77	88.20	-35.43	46.80	5.97	Peak	100	137																																																																
3	11208.30	42.16	54.00	-11.84	35.49	6.67	Average	100	220																																																																
4	11208.30	55.87	74.00	-18.13	49.20	6.67	Peak	100	220																																																																
5	13450.00	43.41	68.20	-24.79	37.40	6.01	Average	100	92																																																																
6	13450.00	56.58	88.20	-31.62	50.57	6.01	Peak	100	92																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

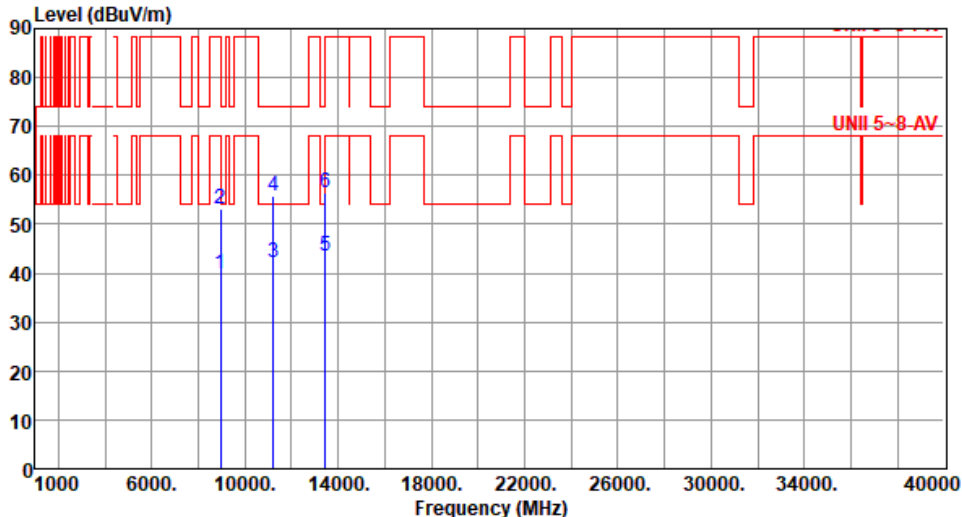

Modulation	be EHT40		Test Freq. (MHz)		6725																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8966.60</td><td>39.83</td><td>68.20</td><td>-28.37</td><td>33.86</td><td>5.97</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>2</td><td>8966.60</td><td>53.17</td><td>88.20</td><td>-35.03</td><td>47.20</td><td>5.97</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>3</td><td>11208.30</td><td>42.20</td><td>54.00</td><td>-11.80</td><td>35.53</td><td>6.67</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>4</td><td>11208.30</td><td>55.83</td><td>74.00</td><td>-18.17</td><td>49.16</td><td>6.67</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>5</td><td>13450.00</td><td>43.41</td><td>68.20</td><td>-24.79</td><td>37.40</td><td>6.01</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>6</td><td>13450.00</td><td>56.50</td><td>88.20</td><td>-31.70</td><td>50.49</td><td>6.01</td><td>Peak</td><td>100</td><td>66</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8966.60	39.83	68.20	-28.37	33.86	5.97	Average	100	248	2	8966.60	53.17	88.20	-35.03	47.20	5.97	Peak	100	248	3	11208.30	42.20	54.00	-11.80	35.53	6.67	Average	100	123	4	11208.30	55.83	74.00	-18.17	49.16	6.67	Peak	100	123	5	13450.00	43.41	68.20	-24.79	37.40	6.01	Average	100	66	6	13450.00	56.50	88.20	-31.70	50.49	6.01	Peak	100	66
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	8966.60	39.83	68.20	-28.37	33.86	5.97	Average	100	248																																																																																										
2	8966.60	53.17	88.20	-35.03	47.20	5.97	Peak	100	248																																																																																										
3	11208.30	42.20	54.00	-11.80	35.53	6.67	Average	100	123																																																																																										
4	11208.30	55.83	74.00	-18.17	49.16	6.67	Peak	100	123																																																																																										
5	13450.00	43.41	68.20	-24.79	37.40	6.01	Average	100	66																																																																																										
6	13450.00	56.50	88.20	-31.70	50.49	6.01	Peak	100	66																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT40		Test Freq. (MHz)		6845																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9126.60</td><td>40.65</td><td>54.00</td><td>-13.35</td><td>34.09</td><td>6.56</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>9126.60</td><td>53.90</td><td>74.00</td><td>-20.10</td><td>47.34</td><td>6.56</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>11408.30</td><td>42.80</td><td>54.00</td><td>-11.20</td><td>35.61</td><td>7.19</td><td>Average</td><td>100</td><td>262</td></tr><tr><td>4</td><td>11408.30</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>49.23</td><td>7.19</td><td>Peak</td><td>100</td><td>262</td></tr><tr><td>5</td><td>13690.00</td><td>43.71</td><td>68.20</td><td>-24.49</td><td>37.71</td><td>6.00</td><td>Average</td><td>100</td><td>320</td></tr><tr><td>6</td><td>13690.00</td><td>56.77</td><td>88.20</td><td>-31.43</td><td>50.77</td><td>6.00</td><td>Peak</td><td>100</td><td>320</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	9126.60	40.65	54.00	-13.35	34.09	6.56	Average	100	126	2	9126.60	53.90	74.00	-20.10	47.34	6.56	Peak	100	126	3	11408.30	42.80	54.00	-11.20	35.61	7.19	Average	100	262	4	11408.30	56.42	74.00	-17.58	49.23	7.19	Peak	100	262	5	13690.00	43.71	68.20	-24.49	37.71	6.00	Average	100	320	6	13690.00	56.77	88.20	-31.43	50.77	6.00	Peak	100	320
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	9126.60	40.65	54.00	-13.35	34.09	6.56	Average	100	126																																																																																										
2	9126.60	53.90	74.00	-20.10	47.34	6.56	Peak	100	126																																																																																										
3	11408.30	42.80	54.00	-11.20	35.61	7.19	Average	100	262																																																																																										
4	11408.30	56.42	74.00	-17.58	49.23	7.19	Peak	100	262																																																																																										
5	13690.00	43.71	68.20	-24.49	37.71	6.00	Average	100	320																																																																																										
6	13690.00	56.77	88.20	-31.43	50.77	6.00	Peak	100	320																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT40	Test Freq. (MHz)	6845																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9126.60</td><td>40.65</td><td>54.00</td><td>-13.35</td><td>34.09</td><td>6.56</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>2</td><td>9126.60</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>47.38</td><td>6.56</td><td>Peak</td><td>100</td><td>221</td></tr><tr><td>3</td><td>11408.30</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>35.67</td><td>7.19</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>11408.30</td><td>56.83</td><td>74.00</td><td>-17.17</td><td>49.64</td><td>7.19</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>5</td><td>13690.00</td><td>43.67</td><td>68.20</td><td>-24.53</td><td>37.67</td><td>6.00</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>6</td><td>13690.00</td><td>56.86</td><td>88.20</td><td>-31.34</td><td>50.86</td><td>6.00</td><td>Peak</td><td>100</td><td>74</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	9126.60	40.65	54.00	-13.35	34.09	6.56	Average	100	221	2	9126.60	53.94	74.00	-20.06	47.38	6.56	Peak	100	221	3	11408.30	42.86	54.00	-11.14	35.67	7.19	Average	100	135	4	11408.30	56.83	74.00	-17.17	49.64	7.19	Peak	100	135	5	13690.00	43.67	68.20	-24.53	37.67	6.00	Average	100	74	6	13690.00	56.86	88.20	-31.34	50.86	6.00	Peak	100	74
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	9126.60	40.65	54.00	-13.35	34.09	6.56	Average	100	221																																																																																				
2	9126.60	53.94	74.00	-20.06	47.38	6.56	Peak	100	221																																																																																				
3	11408.30	42.86	54.00	-11.14	35.67	7.19	Average	100	135																																																																																				
4	11408.30	56.83	74.00	-17.17	49.64	7.19	Peak	100	135																																																																																				
5	13690.00	43.67	68.20	-24.53	37.67	6.00	Average	100	74																																																																																				
6	13690.00	56.86	88.20	-31.34	50.86	6.00	Peak	100	74																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	be EHT40	Test Freq. (MHz)	6885																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9180.00</td><td>40.00</td><td>54.00</td><td>-14.00</td><td>33.26</td><td>6.74</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>2</td><td>9180.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>46.81</td><td>6.74</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>3</td><td>11475.00</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>35.68</td><td>7.26</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>4</td><td>11475.00</td><td>56.63</td><td>74.00</td><td>-17.37</td><td>49.37</td><td>7.26</td><td>Peak</td><td>100</td><td>231</td></tr><tr><td>5</td><td>13770.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>37.82</td><td>6.12</td><td>Average</td><td>100</td><td>319</td></tr><tr><td>6</td><td>13770.00</td><td>57.00</td><td>88.20</td><td>-31.20</td><td>50.88</td><td>6.12</td><td>Peak</td><td>100</td><td>319</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9180.00	40.00	54.00	-14.00	33.26	6.74	Average	100	133	2	9180.00	53.55	74.00	-20.45	46.81	6.74	Peak	100	133	3	11475.00	42.94	54.00	-11.06	35.68	7.26	Average	100	231	4	11475.00	56.63	74.00	-17.37	49.37	7.26	Peak	100	231	5	13770.00	43.94	68.20	-24.26	37.82	6.12	Average	100	319	6	13770.00	57.00	88.20	-31.20	50.88	6.12	Peak	100	319
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9180.00	40.00	54.00	-14.00	33.26	6.74	Average	100	133																																																																
2	9180.00	53.55	74.00	-20.45	46.81	6.74	Peak	100	133																																																																
3	11475.00	42.94	54.00	-11.06	35.68	7.26	Average	100	231																																																																
4	11475.00	56.63	74.00	-17.37	49.37	7.26	Peak	100	231																																																																
5	13770.00	43.94	68.20	-24.26	37.82	6.12	Average	100	319																																																																
6	13770.00	57.00	88.20	-31.20	50.88	6.12	Peak	100	319																																																																

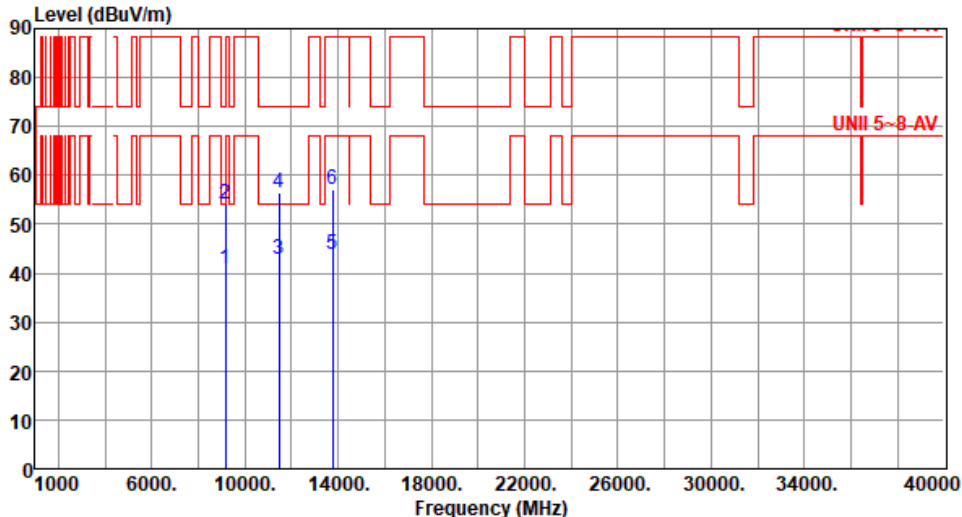

Modulation	be EHT40	Test Freq. (MHz)	6885																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9180.00</td><td>40.80</td><td>54.00</td><td>-13.20</td><td>34.06</td><td>6.74</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>2</td><td>9180.00</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>47.49</td><td>6.74</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>3</td><td>11475.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>35.66</td><td>7.26</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>11475.00</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>49.26</td><td>7.26</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>13770.00</td><td>43.85</td><td>68.20</td><td>-24.35</td><td>37.73</td><td>6.12</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>6</td><td>13770.00</td><td>57.04</td><td>88.20</td><td>-31.16</td><td>50.92</td><td>6.12</td><td>Peak</td><td>100</td><td>66</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9180.00	40.80	54.00	-13.20	34.06	6.74	Average	100	254	2	9180.00	54.23	74.00	-19.77	47.49	6.74	Peak	100	254	3	11475.00	42.92	54.00	-11.08	35.66	7.26	Average	100	134	4	11475.00	56.52	74.00	-17.48	49.26	7.26	Peak	100	134	5	13770.00	43.85	68.20	-24.35	37.73	6.12	Average	100	66	6	13770.00	57.04	88.20	-31.16	50.92	6.12	Peak	100	66
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9180.00	40.80	54.00	-13.20	34.06	6.74	Average	100	254																																																																
2	9180.00	54.23	74.00	-19.77	47.49	6.74	Peak	100	254																																																																
3	11475.00	42.92	54.00	-11.08	35.66	7.26	Average	100	134																																																																
4	11475.00	56.52	74.00	-17.48	49.26	7.26	Peak	100	134																																																																
5	13770.00	43.85	68.20	-24.35	37.73	6.12	Average	100	66																																																																
6	13770.00	57.04	88.20	-31.16	50.92	6.12	Peak	100	66																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

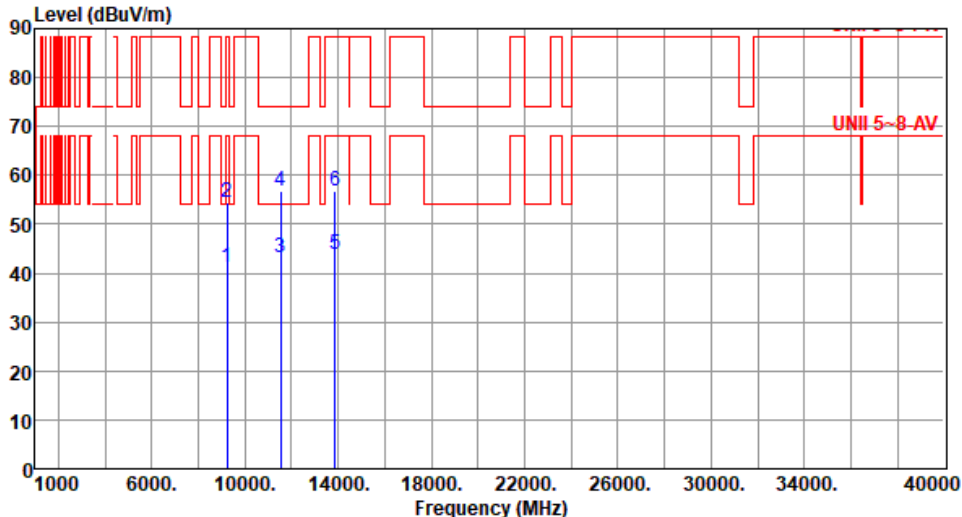

Modulation	be EHT40	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9233.30</td><td>41.25</td><td>68.20</td><td>-26.95</td><td>34.33</td><td>6.92</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>9233.30</td><td>54.32</td><td>88.20</td><td>-33.88</td><td>47.40</td><td>6.92</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>11541.60</td><td>43.01</td><td>54.00</td><td>-10.99</td><td>35.67</td><td>7.34</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>4</td><td>11541.60</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>49.45</td><td>7.34</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>5</td><td>13850.00</td><td>43.91</td><td>68.20</td><td>-24.29</td><td>37.86</td><td>6.05</td><td>Average</td><td>100</td><td>322</td></tr><tr><td>6</td><td>13850.00</td><td>56.94</td><td>88.20</td><td>-31.26</td><td>50.89</td><td>6.05</td><td>Peak</td><td>100</td><td>322</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9233.30	41.25	68.20	-26.95	34.33	6.92	Average	100	137	2	9233.30	54.32	88.20	-33.88	47.40	6.92	Peak	100	137	3	11541.60	43.01	54.00	-10.99	35.67	7.34	Average	100	247	4	11541.60	56.79	74.00	-17.21	49.45	7.34	Peak	100	247	5	13850.00	43.91	68.20	-24.29	37.86	6.05	Average	100	322	6	13850.00	56.94	88.20	-31.26	50.89	6.05	Peak	100	322
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9233.30	41.25	68.20	-26.95	34.33	6.92	Average	100	137																																																																
2	9233.30	54.32	88.20	-33.88	47.40	6.92	Peak	100	137																																																																
3	11541.60	43.01	54.00	-10.99	35.67	7.34	Average	100	247																																																																
4	11541.60	56.79	74.00	-17.21	49.45	7.34	Peak	100	247																																																																
5	13850.00	43.91	68.20	-24.29	37.86	6.05	Average	100	322																																																																
6	13850.00	56.94	88.20	-31.26	50.89	6.05	Peak	100	322																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6925																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) UNII 5~8-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9233.30</td><td>41.18</td><td>68.20</td><td>-27.02</td><td>34.26</td><td>6.92</td><td>Average</td><td>100</td><td>235</td></tr><tr><td>2</td><td>9233.30</td><td>54.41</td><td>88.20</td><td>-33.79</td><td>47.49</td><td>6.92</td><td>Peak</td><td>100</td><td>235</td></tr><tr><td>3</td><td>11541.60</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>35.84</td><td>7.34</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>4</td><td>11541.60</td><td>56.75</td><td>74.00</td><td>-17.25</td><td>49.41</td><td>7.34</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>5</td><td>13850.00</td><td>43.89</td><td>68.20</td><td>-24.31</td><td>37.84</td><td>6.05</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>6</td><td>13850.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>50.90</td><td>6.05</td><td>Peak</td><td>100</td><td>83</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	9233.30	41.18	68.20	-27.02	34.26	6.92	Average	100	235	2	9233.30	54.41	88.20	-33.79	47.49	6.92	Peak	100	235	3	11541.60	43.18	54.00	-10.82	35.84	7.34	Average	100	123	4	11541.60	56.75	74.00	-17.25	49.41	7.34	Peak	100	123	5	13850.00	43.89	68.20	-24.31	37.84	6.05	Average	100	83	6	13850.00	56.95	88.20	-31.25	50.90	6.05	Peak	100	83
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	9233.30	41.18	68.20	-27.02	34.26	6.92	Average	100	235																																																																																				
2	9233.30	54.41	88.20	-33.79	47.49	6.92	Peak	100	235																																																																																				
3	11541.60	43.18	54.00	-10.82	35.84	7.34	Average	100	123																																																																																				
4	11541.60	56.75	74.00	-17.25	49.41	7.34	Peak	100	123																																																																																				
5	13850.00	43.89	68.20	-24.31	37.84	6.05	Average	100	83																																																																																				
6	13850.00	56.95	88.20	-31.25	50.90	6.05	Peak	100	83																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	be EHT40	Test Freq. (MHz)	7005																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9340.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>34.10</td><td>7.06</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>9340.00</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>47.40</td><td>7.06</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>11675.00</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>35.71</td><td>6.52</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>4</td><td>11675.00</td><td>54.87</td><td>74.00</td><td>-19.13</td><td>48.35</td><td>6.52</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>5</td><td>14010.00</td><td>45.07</td><td>68.20</td><td>-23.13</td><td>38.32</td><td>6.75</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>6</td><td>14010.00</td><td>58.34</td><td>88.20</td><td>-29.86</td><td>51.59</td><td>6.75</td><td>Peak</td><td>100</td><td>70</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	9340.00	41.16	54.00	-12.84	34.10	7.06	Average	100	137	2	9340.00	54.46	74.00	-19.54	47.40	7.06	Peak	100	137	3	11675.00	42.23	54.00	-11.77	35.71	6.52	Average	100	248	4	11675.00	54.87	74.00	-19.13	48.35	6.52	Peak	100	248	5	14010.00	45.07	68.20	-23.13	38.32	6.75	Average	100	70	6	14010.00	58.34	88.20	-29.86	51.59	6.75	Peak	100	70
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	9340.00	41.16	54.00	-12.84	34.10	7.06	Average	100	137																																																																																				
2	9340.00	54.46	74.00	-19.54	47.40	7.06	Peak	100	137																																																																																				
3	11675.00	42.23	54.00	-11.77	35.71	6.52	Average	100	248																																																																																				
4	11675.00	54.87	74.00	-19.13	48.35	6.52	Peak	100	248																																																																																				
5	14010.00	45.07	68.20	-23.13	38.32	6.75	Average	100	70																																																																																				
6	14010.00	58.34	88.20	-29.86	51.59	6.75	Peak	100	70																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT40		Test Freq. (MHz)		7005																																																																										
Polarization	Vertical																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9340.00</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>34.20</td><td>7.06</td><td>Average</td><td>100</td><td>237</td></tr><tr><td>2</td><td>9340.00</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>47.56</td><td>7.06</td><td>Peak</td><td>100</td><td>237</td></tr><tr><td>3</td><td>11675.00</td><td>42.12</td><td>54.00</td><td>-11.88</td><td>35.60</td><td>6.52</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>11675.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>49.34</td><td>6.52</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>14010.00</td><td>45.09</td><td>68.20</td><td>-23.11</td><td>38.34</td><td>6.75</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>6</td><td>14010.00</td><td>58.37</td><td>88.20</td><td>-29.83</td><td>51.62</td><td>6.75</td><td>Peak</td><td>100</td><td>85</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9340.00	41.26	54.00	-12.74	34.20	7.06	Average	100	237	2	9340.00	54.62	74.00	-19.38	47.56	7.06	Peak	100	237	3	11675.00	42.12	54.00	-11.88	35.60	6.52	Average	100	134	4	11675.00	55.86	74.00	-18.14	49.34	6.52	Peak	100	134	5	14010.00	45.09	68.20	-23.11	38.34	6.75	Average	100	85	6	14010.00	58.37	88.20	-29.83	51.62	6.75	Peak	100	85
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	9340.00	41.26	54.00	-12.74	34.20	7.06	Average	100	237																																																																						
2	9340.00	54.62	74.00	-19.38	47.56	7.06	Peak	100	237																																																																						
3	11675.00	42.12	54.00	-11.88	35.60	6.52	Average	100	134																																																																						
4	11675.00	55.86	74.00	-18.14	49.34	6.52	Peak	100	134																																																																						
5	14010.00	45.09	68.20	-23.11	38.34	6.75	Average	100	85																																																																						
6	14010.00	58.37	88.20	-29.83	51.62	6.75	Peak	100	85																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

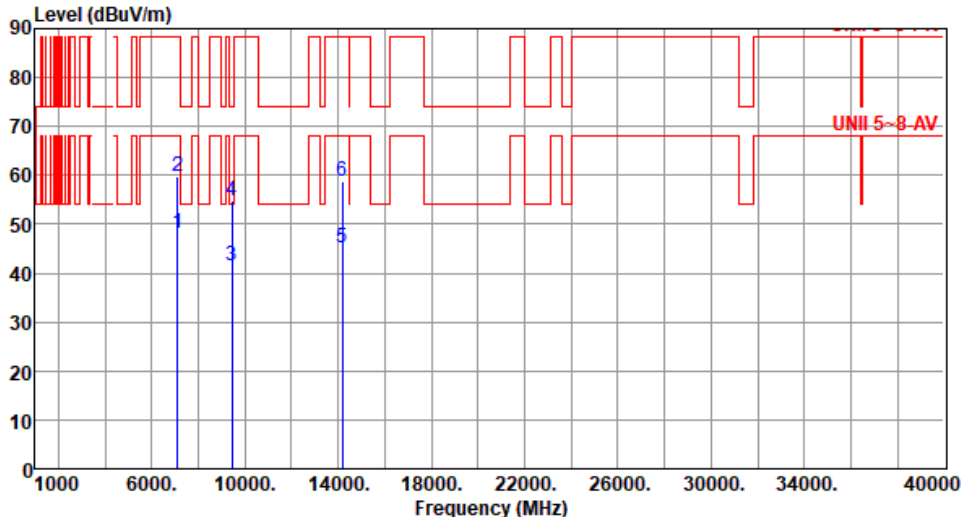

Modulation	be EHT40	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>48.24</td><td>68.20</td><td>-19.96</td><td>43.38</td><td>4.86</td><td>Average</td><td>190</td><td>267</td></tr><tr><td>2</td><td>7125.00</td><td>59.72</td><td>88.20</td><td>-28.48</td><td>54.86</td><td>4.86</td><td>Peak</td><td>190</td><td>267</td></tr><tr><td>3</td><td>9446.60</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>34.41</td><td>7.17</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>4</td><td>9446.60</td><td>54.84</td><td>74.00</td><td>-19.16</td><td>47.67</td><td>7.17</td><td>Peak</td><td>100</td><td>149</td></tr><tr><td>5</td><td>14170.00</td><td>45.03</td><td>68.20</td><td>-23.17</td><td>38.24</td><td>6.79</td><td>Average</td><td>100</td><td>326</td></tr><tr><td>6</td><td>14170.00</td><td>58.74</td><td>88.20</td><td>-29.46</td><td>51.95</td><td>6.79</td><td>Peak</td><td>100</td><td>326</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.24	68.20	-19.96	43.38	4.86	Average	190	267	2	7125.00	59.72	88.20	-28.48	54.86	4.86	Peak	190	267	3	9446.60	41.58	54.00	-12.42	34.41	7.17	Average	100	149	4	9446.60	54.84	74.00	-19.16	47.67	7.17	Peak	100	149	5	14170.00	45.03	68.20	-23.17	38.24	6.79	Average	100	326	6	14170.00	58.74	88.20	-29.46	51.95	6.79	Peak	100	326
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.24	68.20	-19.96	43.38	4.86	Average	190	267																																																																
2	7125.00	59.72	88.20	-28.48	54.86	4.86	Peak	190	267																																																																
3	9446.60	41.58	54.00	-12.42	34.41	7.17	Average	100	149																																																																
4	9446.60	54.84	74.00	-19.16	47.67	7.17	Peak	100	149																																																																
5	14170.00	45.03	68.20	-23.17	38.24	6.79	Average	100	326																																																																
6	14170.00	58.74	88.20	-29.46	51.95	6.79	Peak	100	326																																																																




Modulation	be EHT40	Test Freq. (MHz)	7085																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>47.87</td><td>68.20</td><td>-20.33</td><td>43.01</td><td>4.86</td><td>Average</td><td>173</td><td>226</td></tr><tr><td>2</td><td>7125.00</td><td>59.37</td><td>88.20</td><td>-28.83</td><td>54.51</td><td>4.86</td><td>Peak</td><td>173</td><td>226</td></tr><tr><td>3</td><td>9446.60</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>34.09</td><td>7.17</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>4</td><td>9446.60</td><td>55.60</td><td>74.00</td><td>-18.40</td><td>48.43</td><td>7.17</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>5</td><td>14170.00</td><td>45.00</td><td>68.20</td><td>-23.20</td><td>38.21</td><td>6.79</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>6</td><td>14170.00</td><td>58.31</td><td>88.20</td><td>-29.89</td><td>51.52</td><td>6.79</td><td>Peak</td><td>100</td><td>76</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.87	68.20	-20.33	43.01	4.86	Average	173	226	2	7125.00	59.37	88.20	-28.83	54.51	4.86	Peak	173	226	3	9446.60	41.26	54.00	-12.74	34.09	7.17	Average	100	240	4	9446.60	55.60	74.00	-18.40	48.43	7.17	Peak	100	240	5	14170.00	45.00	68.20	-23.20	38.21	6.79	Average	100	76	6	14170.00	58.31	88.20	-29.89	51.52	6.79	Peak	100	76
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.87	68.20	-20.33	43.01	4.86	Average	173	226																																																																
2	7125.00	59.37	88.20	-28.83	54.51	4.86	Peak	173	226																																																																
3	9446.60	41.26	54.00	-12.74	34.09	7.17	Average	100	240																																																																
4	9446.60	55.60	74.00	-18.40	48.43	7.17	Peak	100	240																																																																
5	14170.00	45.00	68.20	-23.20	38.21	6.79	Average	100	76																																																																
6	14170.00	58.31	88.20	-29.89	51.52	6.79	Peak	100	76																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m)			

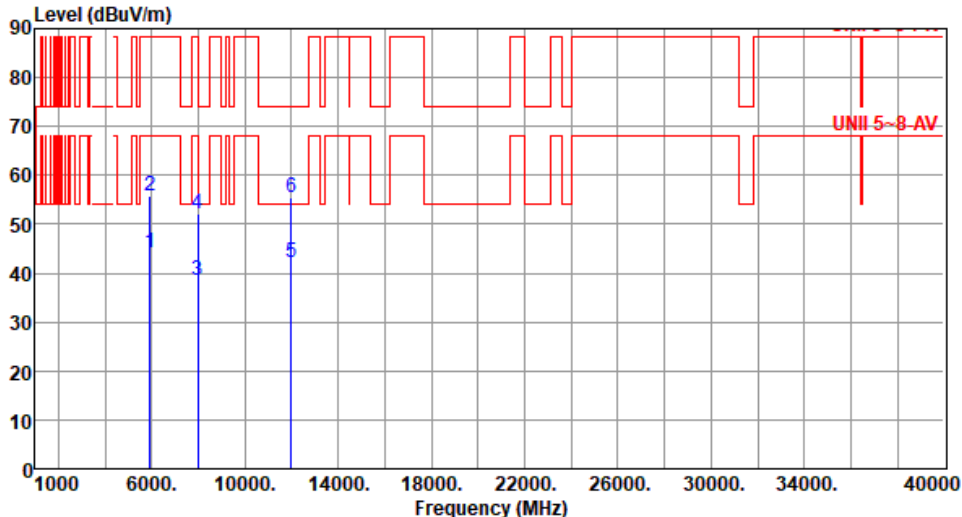


Modulation	be EHT80		Test Freq. (MHz)		5985																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>44.24</td><td>68.20</td><td>-23.96</td><td>43.11</td><td>1.13</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>5925.00</td><td>55.82</td><td>88.20</td><td>-32.38</td><td>54.69</td><td>1.13</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>7980.00</td><td>38.45</td><td>68.20</td><td>-29.75</td><td>32.89</td><td>5.56</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>4</td><td>7980.00</td><td>52.09</td><td>88.20</td><td>-36.11</td><td>46.53</td><td>5.56</td><td>Peak</td><td>100</td><td>228</td></tr><tr><td>5</td><td>11970.00</td><td>42.32</td><td>54.00</td><td>-11.68</td><td>36.15</td><td>6.17</td><td>Average</td><td>100</td><td>88</td></tr><tr><td>6</td><td>11970.00</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>49.34</td><td>6.17</td><td>Peak</td><td>100</td><td>88</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5925.00	44.24	68.20	-23.96	43.11	1.13	Average	100	245	2	5925.00	55.82	88.20	-32.38	54.69	1.13	Peak	100	245	3	7980.00	38.45	68.20	-29.75	32.89	5.56	Average	100	228	4	7980.00	52.09	88.20	-36.11	46.53	5.56	Peak	100	228	5	11970.00	42.32	54.00	-11.68	36.15	6.17	Average	100	88	6	11970.00	55.51	74.00	-18.49	49.34	6.17	Peak	100	88
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	5925.00	44.24	68.20	-23.96	43.11	1.13	Average	100	245																																																																																										
2	5925.00	55.82	88.20	-32.38	54.69	1.13	Peak	100	245																																																																																										
3	7980.00	38.45	68.20	-29.75	32.89	5.56	Average	100	228																																																																																										
4	7980.00	52.09	88.20	-36.11	46.53	5.56	Peak	100	228																																																																																										
5	11970.00	42.32	54.00	-11.68	36.15	6.17	Average	100	88																																																																																										
6	11970.00	55.51	74.00	-18.49	49.34	6.17	Peak	100	88																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT80	Test Freq. (MHz)	6145																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8193.30</td><td>38.72</td><td>54.00</td><td>-15.28</td><td>33.13</td><td>5.59</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>2</td><td>8193.30</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>46.62</td><td>5.59</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>3</td><td>10241.60</td><td>41.79</td><td>68.20</td><td>-26.41</td><td>34.69</td><td>7.10</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4</td><td>10241.60</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>48.26</td><td>7.10</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>5</td><td>12290.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>36.21</td><td>6.19</td><td>Average</td><td>100</td><td>341</td></tr><tr><td>6</td><td>12290.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>49.67</td><td>6.19</td><td>Peak</td><td>100</td><td>341</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8193.30	38.72	54.00	-15.28	33.13	5.59	Average	100	121	2	8193.30	52.21	74.00	-21.79	46.62	5.59	Peak	100	121	3	10241.60	41.79	68.20	-26.41	34.69	7.10	Average	100	211	4	10241.60	55.36	88.20	-32.84	48.26	7.10	Peak	100	211	5	12290.00	42.40	54.00	-11.60	36.21	6.19	Average	100	341	6	12290.00	55.86	74.00	-18.14	49.67	6.19	Peak	100	341
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	8193.30	38.72	54.00	-15.28	33.13	5.59	Average	100	121																																																																																				
2	8193.30	52.21	74.00	-21.79	46.62	5.59	Peak	100	121																																																																																				
3	10241.60	41.79	68.20	-26.41	34.69	7.10	Average	100	211																																																																																				
4	10241.60	55.36	88.20	-32.84	48.26	7.10	Peak	100	211																																																																																				
5	12290.00	42.40	54.00	-11.60	36.21	6.19	Average	100	341																																																																																				
6	12290.00	55.86	74.00	-18.14	49.67	6.19	Peak	100	341																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

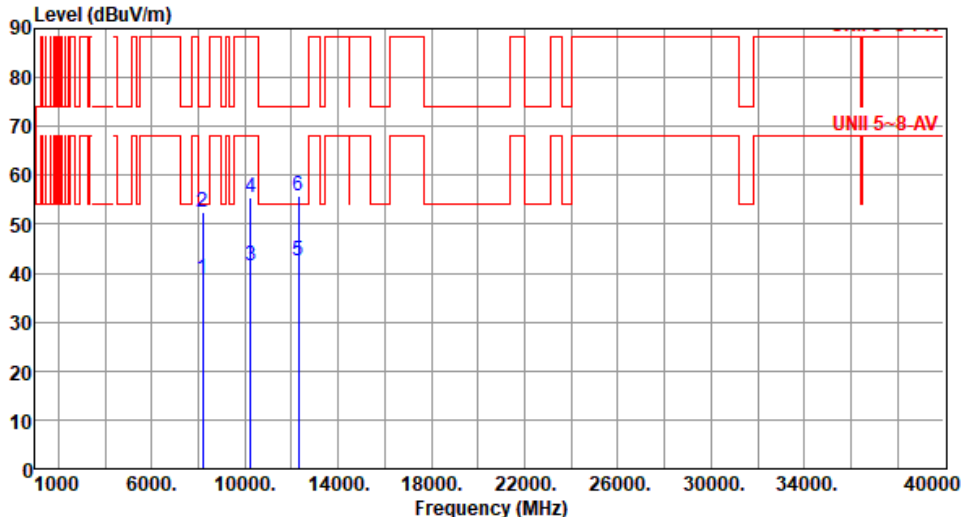


Modulation	be EHT80		Test Freq. (MHz)		6145																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8193.30</td><td>38.88</td><td>54.00</td><td>-15.12</td><td>33.29</td><td>5.59</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>2</td><td>8193.30</td><td>52.42</td><td>74.00</td><td>-21.58</td><td>46.83</td><td>5.59</td><td>Peak</td><td>100</td><td>196</td></tr><tr><td>3</td><td>10241.60</td><td>41.67</td><td>68.20</td><td>-26.53</td><td>34.57</td><td>7.10</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>4</td><td>10241.60</td><td>55.34</td><td>88.20</td><td>-32.86</td><td>48.24</td><td>7.10</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>5</td><td>12290.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>36.30</td><td>6.19</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>6</td><td>12290.00</td><td>55.83</td><td>74.00</td><td>-18.17</td><td>49.64</td><td>6.19</td><td>Peak</td><td>100</td><td>84</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8193.30	38.88	54.00	-15.12	33.29	5.59	Average	100	196	2	8193.30	52.42	74.00	-21.58	46.83	5.59	Peak	100	196	3	10241.60	41.67	68.20	-26.53	34.57	7.10	Average	100	248	4	10241.60	55.34	88.20	-32.86	48.24	7.10	Peak	100	248	5	12290.00	42.49	54.00	-11.51	36.30	6.19	Average	100	84	6	12290.00	55.83	74.00	-18.17	49.64	6.19	Peak	100	84
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	8193.30	38.88	54.00	-15.12	33.29	5.59	Average	100	196																																																																																										
2	8193.30	52.42	74.00	-21.58	46.83	5.59	Peak	100	196																																																																																										
3	10241.60	41.67	68.20	-26.53	34.57	7.10	Average	100	248																																																																																										
4	10241.60	55.34	88.20	-32.86	48.24	7.10	Peak	100	248																																																																																										
5	12290.00	42.49	54.00	-11.51	36.30	6.19	Average	100	84																																																																																										
6	12290.00	55.83	74.00	-18.17	49.64	6.19	Peak	100	84																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

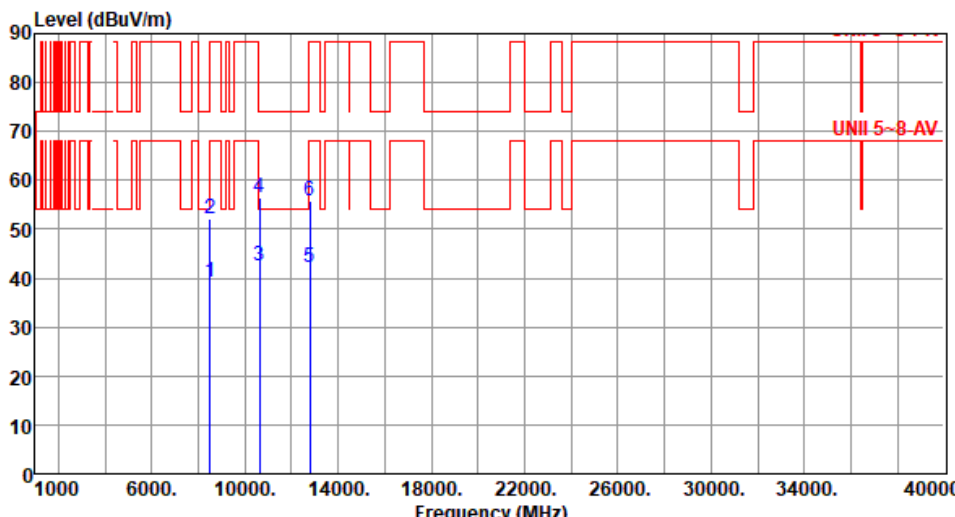

Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8513.30</td><td>39.03</td><td>68.20</td><td>-29.17</td><td>33.65</td><td>5.38</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>8513.30</td><td>52.09</td><td>88.20</td><td>-36.11</td><td>46.71</td><td>5.38</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>10641.60</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>34.90</td><td>7.60</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>4</td><td>10641.60</td><td>56.37</td><td>74.00</td><td>-17.63</td><td>48.77</td><td>7.60</td><td>Peak</td><td>100</td><td>216</td></tr><tr><td>5</td><td>12770.00</td><td>42.32</td><td>68.20</td><td>-25.88</td><td>36.43</td><td>5.89</td><td>Average</td><td>100</td><td>326</td></tr><tr><td>6</td><td>12770.00</td><td>55.75</td><td>88.20</td><td>-32.45</td><td>49.86</td><td>5.89</td><td>Peak</td><td>100</td><td>326</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8513.30	39.03	68.20	-29.17	33.65	5.38	Average	100	124	2	8513.30	52.09	88.20	-36.11	46.71	5.38	Peak	100	124	3	10641.60	42.50	54.00	-11.50	34.90	7.60	Average	100	216	4	10641.60	56.37	74.00	-17.63	48.77	7.60	Peak	100	216	5	12770.00	42.32	68.20	-25.88	36.43	5.89	Average	100	326	6	12770.00	55.75	88.20	-32.45	49.86	5.89	Peak	100	326
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8513.30	39.03	68.20	-29.17	33.65	5.38	Average	100	124																																																																
2	8513.30	52.09	88.20	-36.11	46.71	5.38	Peak	100	124																																																																
3	10641.60	42.50	54.00	-11.50	34.90	7.60	Average	100	216																																																																
4	10641.60	56.37	74.00	-17.63	48.77	7.60	Peak	100	216																																																																
5	12770.00	42.32	68.20	-25.88	36.43	5.89	Average	100	326																																																																
6	12770.00	55.75	88.20	-32.45	49.86	5.89	Peak	100	326																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

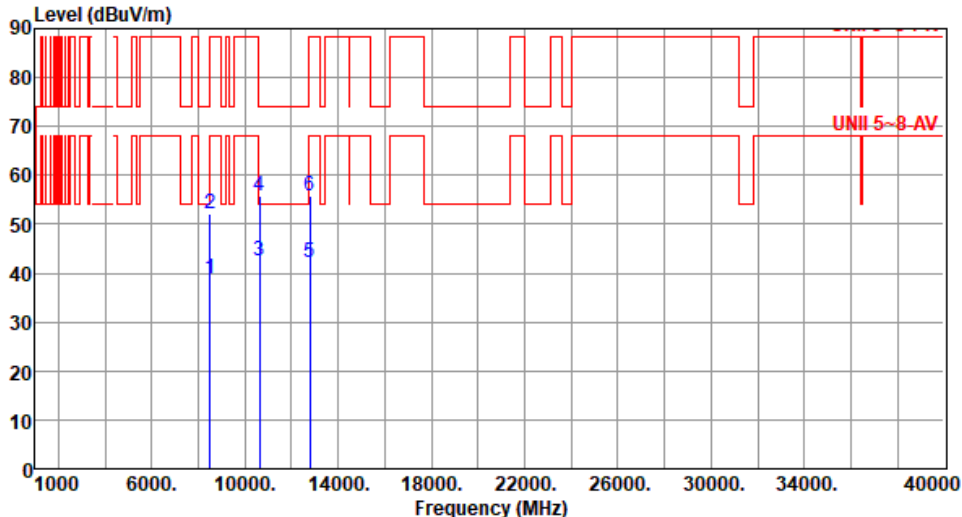


Modulation	be EHT80		Test Freq. (MHz)		6385																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8513.30</td><td>38.80</td><td>68.20</td><td>-29.40</td><td>33.42</td><td>5.38</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>2</td><td>8513.30</td><td>52.14</td><td>88.20</td><td>-36.06</td><td>46.76</td><td>5.38</td><td>Peak</td><td>100</td><td>233</td></tr><tr><td>3</td><td>10641.60</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>34.89</td><td>7.60</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>4</td><td>10641.60</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>48.34</td><td>7.60</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>5</td><td>12770.00</td><td>42.33</td><td>68.20</td><td>-25.87</td><td>36.44</td><td>5.89</td><td>Average</td><td>100</td><td>344</td></tr><tr><td>6</td><td>12770.00</td><td>55.77</td><td>88.20</td><td>-32.43</td><td>49.88</td><td>5.89</td><td>Peak</td><td>100</td><td>344</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8513.30	38.80	68.20	-29.40	33.42	5.38	Average	100	233	2	8513.30	52.14	88.20	-36.06	46.76	5.38	Peak	100	233	3	10641.60	42.49	54.00	-11.51	34.89	7.60	Average	100	137	4	10641.60	55.94	74.00	-18.06	48.34	7.60	Peak	100	137	5	12770.00	42.33	68.20	-25.87	36.44	5.89	Average	100	344	6	12770.00	55.77	88.20	-32.43	49.88	5.89	Peak	100	344
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	8513.30	38.80	68.20	-29.40	33.42	5.38	Average	100	233																																																																																										
2	8513.30	52.14	88.20	-36.06	46.76	5.38	Peak	100	233																																																																																										
3	10641.60	42.49	54.00	-11.51	34.89	7.60	Average	100	137																																																																																										
4	10641.60	55.94	74.00	-18.06	48.34	7.60	Peak	100	137																																																																																										
5	12770.00	42.33	68.20	-25.87	36.44	5.89	Average	100	344																																																																																										
6	12770.00	55.77	88.20	-32.43	49.88	5.89	Peak	100	344																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	6465																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8620.00</td><td>39.34</td><td>68.20</td><td>-28.86</td><td>33.56</td><td>5.78</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>2</td><td>8620.00</td><td>52.25</td><td>88.20</td><td>-35.95</td><td>46.47</td><td>5.78</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>3</td><td>10775.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>35.08</td><td>7.41</td><td>Average</td><td>100</td><td>235</td></tr><tr><td>4</td><td>10775.00</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>48.75</td><td>7.41</td><td>Peak</td><td>100</td><td>235</td></tr><tr><td>5</td><td>12930.00</td><td>42.60</td><td>68.20</td><td>-25.60</td><td>36.56</td><td>6.04</td><td>Average</td><td>100</td><td>335</td></tr><tr><td>6</td><td>12930.00</td><td>55.89</td><td>88.20</td><td>-32.31</td><td>49.85</td><td>6.04</td><td>Peak</td><td>100</td><td>335</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8620.00	39.34	68.20	-28.86	33.56	5.78	Average	100	133	2	8620.00	52.25	88.20	-35.95	46.47	5.78	Peak	100	133	3	10775.00	42.49	54.00	-11.51	35.08	7.41	Average	100	235	4	10775.00	56.16	74.00	-17.84	48.75	7.41	Peak	100	235	5	12930.00	42.60	68.20	-25.60	36.56	6.04	Average	100	335	6	12930.00	55.89	88.20	-32.31	49.85	6.04	Peak	100	335
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8620.00	39.34	68.20	-28.86	33.56	5.78	Average	100	133																																																																
2	8620.00	52.25	88.20	-35.95	46.47	5.78	Peak	100	133																																																																
3	10775.00	42.49	54.00	-11.51	35.08	7.41	Average	100	235																																																																
4	10775.00	56.16	74.00	-17.84	48.75	7.41	Peak	100	235																																																																
5	12930.00	42.60	68.20	-25.60	36.56	6.04	Average	100	335																																																																
6	12930.00	55.89	88.20	-32.31	49.85	6.04	Peak	100	335																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

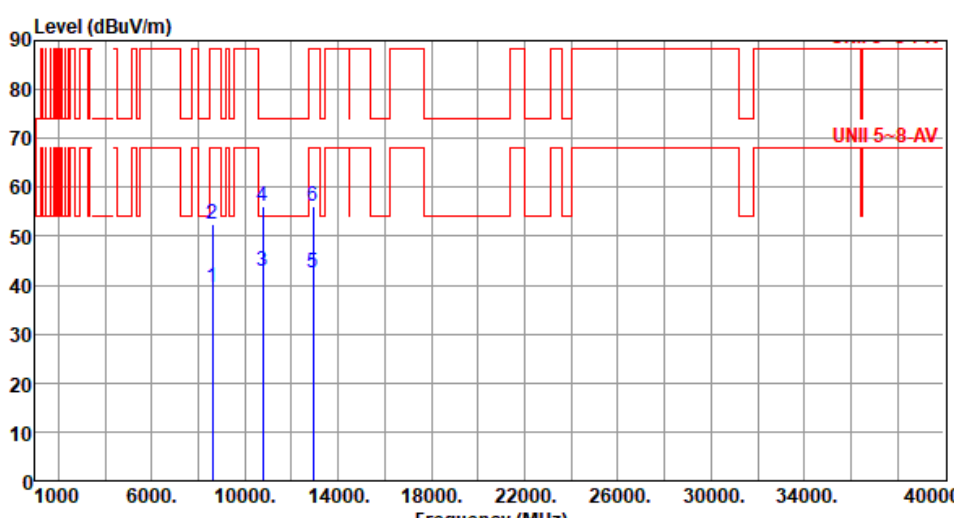

Modulation	be EHT80	Test Freq. (MHz)	6465																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8620.00</td><td>39.38</td><td>68.20</td><td>-28.82</td><td>33.60</td><td>5.78</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>2</td><td>8620.00</td><td>52.53</td><td>88.20</td><td>-35.67</td><td>46.75</td><td>5.78</td><td>Peak</td><td>100</td><td>233</td></tr><tr><td>3</td><td>10775.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>35.28</td><td>7.41</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>4</td><td>10775.00</td><td>55.97</td><td>74.00</td><td>-18.03</td><td>48.56</td><td>7.41</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>5</td><td>12930.00</td><td>42.59</td><td>68.20</td><td>-25.61</td><td>36.55</td><td>6.04</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>6</td><td>12930.00</td><td>56.09</td><td>88.20</td><td>-32.11</td><td>50.05</td><td>6.04</td><td>Peak</td><td>100</td><td>76</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8620.00	39.38	68.20	-28.82	33.60	5.78	Average	100	233	2	8620.00	52.53	88.20	-35.67	46.75	5.78	Peak	100	233	3	10775.00	42.69	54.00	-11.31	35.28	7.41	Average	100	218	4	10775.00	55.97	74.00	-18.03	48.56	7.41	Peak	100	218	5	12930.00	42.59	68.20	-25.61	36.55	6.04	Average	100	76	6	12930.00	56.09	88.20	-32.11	50.05	6.04	Peak	100	76
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8620.00	39.38	68.20	-28.82	33.60	5.78	Average	100	233																																																																
2	8620.00	52.53	88.20	-35.67	46.75	5.78	Peak	100	233																																																																
3	10775.00	42.69	54.00	-11.31	35.28	7.41	Average	100	218																																																																
4	10775.00	55.97	74.00	-18.03	48.56	7.41	Peak	100	218																																																																
5	12930.00	42.59	68.20	-25.61	36.55	6.04	Average	100	76																																																																
6	12930.00	56.09	88.20	-32.11	50.05	6.04	Peak	100	76																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8726.60</td><td>39.97</td><td>68.20</td><td>-28.23</td><td>33.76</td><td>6.21</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>2</td><td>8726.60</td><td>53.00</td><td>88.20</td><td>-35.20</td><td>46.79</td><td>6.21</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>3</td><td>10908.30</td><td>42.83</td><td>54.00</td><td>-11.17</td><td>35.21</td><td>7.62</td><td>Average</td><td>100</td><td>263</td></tr><tr><td>4</td><td>10908.30</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>48.85</td><td>7.62</td><td>Peak</td><td>100</td><td>263</td></tr><tr><td>5</td><td>13090.00</td><td>42.78</td><td>68.20</td><td>-25.42</td><td>37.09</td><td>5.69</td><td>Average</td><td>100</td><td>346</td></tr><tr><td>6</td><td>13090.00</td><td>55.73</td><td>88.20</td><td>-32.47</td><td>50.04</td><td>5.69</td><td>Peak</td><td>100</td><td>346</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8726.60	39.97	68.20	-28.23	33.76	6.21	Average	100	136	2	8726.60	53.00	88.20	-35.20	46.79	6.21	Peak	100	136	3	10908.30	42.83	54.00	-11.17	35.21	7.62	Average	100	263	4	10908.30	56.47	74.00	-17.53	48.85	7.62	Peak	100	263	5	13090.00	42.78	68.20	-25.42	37.09	5.69	Average	100	346	6	13090.00	55.73	88.20	-32.47	50.04	5.69	Peak	100	346
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8726.60	39.97	68.20	-28.23	33.76	6.21	Average	100	136																																																																
2	8726.60	53.00	88.20	-35.20	46.79	6.21	Peak	100	136																																																																
3	10908.30	42.83	54.00	-11.17	35.21	7.62	Average	100	263																																																																
4	10908.30	56.47	74.00	-17.53	48.85	7.62	Peak	100	263																																																																
5	13090.00	42.78	68.20	-25.42	37.09	5.69	Average	100	346																																																																
6	13090.00	55.73	88.20	-32.47	50.04	5.69	Peak	100	346																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6545																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8726.60</td><td>39.92</td><td>68.20</td><td>-28.28</td><td>33.71</td><td>6.21</td><td>Average</td><td>100</td><td>237</td></tr><tr><td>2</td><td>8726.60</td><td>52.90</td><td>88.20</td><td>-35.30</td><td>46.69</td><td>6.21</td><td>Peak</td><td>100</td><td>237</td></tr><tr><td>3</td><td>10908.30</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>35.22</td><td>7.62</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>10908.30</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>48.52</td><td>7.62</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>5</td><td>13090.00</td><td>42.74</td><td>68.20</td><td>-25.46</td><td>37.05</td><td>5.69</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>13090.00</td><td>55.72</td><td>88.20</td><td>-32.48</td><td>50.03</td><td>5.69</td><td>Peak</td><td>100</td><td>80</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8726.60	39.92	68.20	-28.28	33.71	6.21	Average	100	237	2	8726.60	52.90	88.20	-35.30	46.69	6.21	Peak	100	237	3	10908.30	42.84	54.00	-11.16	35.22	7.62	Average	100	135	4	10908.30	56.14	74.00	-17.86	48.52	7.62	Peak	100	135	5	13090.00	42.74	68.20	-25.46	37.05	5.69	Average	100	80	6	13090.00	55.72	88.20	-32.48	50.03	5.69	Peak	100	80
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8726.60	39.92	68.20	-28.28	33.71	6.21	Average	100	237																																																																
2	8726.60	52.90	88.20	-35.30	46.69	6.21	Peak	100	237																																																																
3	10908.30	42.84	54.00	-11.16	35.22	7.62	Average	100	135																																																																
4	10908.30	56.14	74.00	-17.86	48.52	7.62	Peak	100	135																																																																
5	13090.00	42.74	68.20	-25.46	37.05	5.69	Average	100	80																																																																
6	13090.00	55.72	88.20	-32.48	50.03	5.69	Peak	100	80																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6625																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8833.30</td><td>40.04</td><td>68.20</td><td>-28.16</td><td>33.81</td><td>6.23</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>2</td><td>8833.30</td><td>53.05</td><td>88.20</td><td>-35.15</td><td>46.82</td><td>6.23</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>3</td><td>11041.60</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>35.41</td><td>7.53</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>4</td><td>11041.60</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>49.05</td><td>7.53</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>5</td><td>13250.00</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>37.26</td><td>5.65</td><td>Average</td><td>100</td><td>323</td></tr><tr><td>6</td><td>13250.00</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>50.29</td><td>5.65</td><td>Peak</td><td>100</td><td>323</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	8833.30	40.04	68.20	-28.16	33.81	6.23	Average	100	131	2	8833.30	53.05	88.20	-35.15	46.82	6.23	Peak	100	131	3	11041.60	42.94	54.00	-11.06	35.41	7.53	Average	100	241	4	11041.60	56.58	74.00	-17.42	49.05	7.53	Peak	100	241	5	13250.00	42.91	54.00	-11.09	37.26	5.65	Average	100	323	6	13250.00	55.94	74.00	-18.06	50.29	5.65	Peak	100	323
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	8833.30	40.04	68.20	-28.16	33.81	6.23	Average	100	131																																																																																				
2	8833.30	53.05	88.20	-35.15	46.82	6.23	Peak	100	131																																																																																				
3	11041.60	42.94	54.00	-11.06	35.41	7.53	Average	100	241																																																																																				
4	11041.60	56.58	74.00	-17.42	49.05	7.53	Peak	100	241																																																																																				
5	13250.00	42.91	54.00	-11.09	37.26	5.65	Average	100	323																																																																																				
6	13250.00	55.94	74.00	-18.06	50.29	5.65	Peak	100	323																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8833.30</td><td>40.02</td><td>68.20</td><td>-28.18</td><td>33.79</td><td>6.23</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>8833.30</td><td>52.89</td><td>88.20</td><td>-35.31</td><td>46.66</td><td>6.23</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>11041.60</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>35.43</td><td>7.53</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>11041.60</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>49.13</td><td>7.53</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>13250.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>37.30</td><td>5.65</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>6</td><td>13250.00</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>50.34</td><td>5.65</td><td>Peak</td><td>100</td><td>83</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8833.30	40.02	68.20	-28.18	33.79	6.23	Average	100	279	2	8833.30	52.89	88.20	-35.31	46.66	6.23	Peak	100	279	3	11041.60	42.96	54.00	-11.04	35.43	7.53	Average	100	134	4	11041.60	56.66	74.00	-17.34	49.13	7.53	Peak	100	134	5	13250.00	42.95	54.00	-11.05	37.30	5.65	Average	100	83	6	13250.00	55.99	74.00	-18.01	50.34	5.65	Peak	100	83
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8833.30	40.02	68.20	-28.18	33.79	6.23	Average	100	279																																																																
2	8833.30	52.89	88.20	-35.31	46.66	6.23	Peak	100	279																																																																
3	11041.60	42.96	54.00	-11.04	35.43	7.53	Average	100	134																																																																
4	11041.60	56.66	74.00	-17.34	49.13	7.53	Peak	100	134																																																																
5	13250.00	42.95	54.00	-11.05	37.30	5.65	Average	100	83																																																																
6	13250.00	55.99	74.00	-18.01	50.34	5.65	Peak	100	83																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6705																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8940.00</td><td>40.00</td><td>68.20</td><td>-28.20</td><td>34.03</td><td>5.97</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>8940.00</td><td>52.57</td><td>88.20</td><td>-35.63</td><td>46.60</td><td>5.97</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>11175.00</td><td>42.46</td><td>54.00</td><td>-11.54</td><td>35.63</td><td>6.83</td><td>Average</td><td>100</td><td>235</td></tr><tr><td>4</td><td>11175.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>49.23</td><td>6.83</td><td>Peak</td><td>100</td><td>235</td></tr><tr><td>5</td><td>13410.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>37.40</td><td>5.90</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>6</td><td>13410.00</td><td>56.36</td><td>88.20</td><td>-31.84</td><td>50.46</td><td>5.90</td><td>Peak</td><td>100</td><td>334</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8940.00	40.00	68.20	-28.20	34.03	5.97	Average	100	124	2	8940.00	52.57	88.20	-35.63	46.60	5.97	Peak	100	124	3	11175.00	42.46	54.00	-11.54	35.63	6.83	Average	100	235	4	11175.00	56.06	74.00	-17.94	49.23	6.83	Peak	100	235	5	13410.00	43.30	68.20	-24.90	37.40	5.90	Average	100	334	6	13410.00	56.36	88.20	-31.84	50.46	5.90	Peak	100	334
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8940.00	40.00	68.20	-28.20	34.03	5.97	Average	100	124																																																																
2	8940.00	52.57	88.20	-35.63	46.60	5.97	Peak	100	124																																																																
3	11175.00	42.46	54.00	-11.54	35.63	6.83	Average	100	235																																																																
4	11175.00	56.06	74.00	-17.94	49.23	6.83	Peak	100	235																																																																
5	13410.00	43.30	68.20	-24.90	37.40	5.90	Average	100	334																																																																
6	13410.00	56.36	88.20	-31.84	50.46	5.90	Peak	100	334																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6705																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8940.00</td><td>40.03</td><td>68.20</td><td>-28.17</td><td>34.06</td><td>5.97</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>2</td><td>8940.00</td><td>52.81</td><td>88.20</td><td>-35.39</td><td>46.84</td><td>5.97</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>3</td><td>11175.00</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>35.53</td><td>6.83</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>11175.00</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>49.30</td><td>6.83</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>5</td><td>13410.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>37.39</td><td>5.90</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>13410.00</td><td>56.33</td><td>88.20</td><td>-31.87</td><td>50.43</td><td>5.90</td><td>Peak</td><td>100</td><td>90</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	8940.00	40.03	68.20	-28.17	34.06	5.97	Average	100	234	2	8940.00	52.81	88.20	-35.39	46.84	5.97	Peak	100	234	3	11175.00	42.36	54.00	-11.64	35.53	6.83	Average	100	124	4	11175.00	56.13	74.00	-17.87	49.30	6.83	Peak	100	124	5	13410.00	43.29	68.20	-24.91	37.39	5.90	Average	100	90	6	13410.00	56.33	88.20	-31.87	50.43	5.90	Peak	100	90
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	8940.00	40.03	68.20	-28.17	34.06	5.97	Average	100	234																																																																																				
2	8940.00	52.81	88.20	-35.39	46.84	5.97	Peak	100	234																																																																																				
3	11175.00	42.36	54.00	-11.64	35.53	6.83	Average	100	124																																																																																				
4	11175.00	56.13	74.00	-17.87	49.30	6.83	Peak	100	124																																																																																				
5	13410.00	43.29	68.20	-24.91	37.39	5.90	Average	100	90																																																																																				
6	13410.00	56.33	88.20	-31.87	50.43	5.90	Peak	100	90																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9046.60	40.50	54.00	-13.50	34.23	6.27	Average	100	134
2	9046.60	54.34	74.00	-19.66	48.07	6.27	Peak	100	134
3	11308.30	42.57	54.00	-11.43	35.69	6.88	Average	100	249
4	11308.30	56.09	74.00	-17.91	49.21	6.88	Peak	100	249
5	13570.00	43.92	68.20	-24.28	37.63	6.29	Average	100	337
6	13570.00	56.93	88.20	-31.27	50.64	6.29	Peak	100	337

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

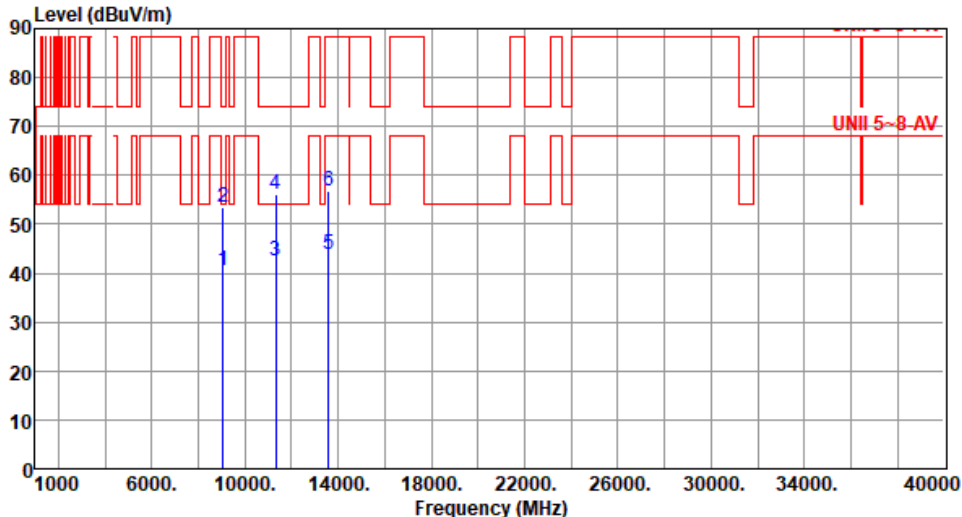

Modulation	be EHT80	Test Freq. (MHz)	6785																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9046.60</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>34.23</td><td>6.27</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>2</td><td>9046.60</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>47.34</td><td>6.27</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>3</td><td>11308.30</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>35.48</td><td>6.88</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>4</td><td>11308.30</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>49.15</td><td>6.88</td><td>Peak</td><td>100</td><td>149</td></tr><tr><td>5</td><td>13570.00</td><td>43.84</td><td>68.20</td><td>-24.36</td><td>37.55</td><td>6.29</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>13570.00</td><td>56.82</td><td>88.20</td><td>-31.38</td><td>50.53</td><td>6.29</td><td>Peak</td><td>100</td><td>68</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9046.60	40.50	54.00	-13.50	34.23	6.27	Average	100	223	2	9046.60	53.61	74.00	-20.39	47.34	6.27	Peak	100	223	3	11308.30	42.36	54.00	-11.64	35.48	6.88	Average	100	149	4	11308.30	56.03	74.00	-17.97	49.15	6.88	Peak	100	149	5	13570.00	43.84	68.20	-24.36	37.55	6.29	Average	100	68	6	13570.00	56.82	88.20	-31.38	50.53	6.29	Peak	100	68
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9046.60	40.50	54.00	-13.50	34.23	6.27	Average	100	223																																																																
2	9046.60	53.61	74.00	-20.39	47.34	6.27	Peak	100	223																																																																
3	11308.30	42.36	54.00	-11.64	35.48	6.88	Average	100	149																																																																
4	11308.30	56.03	74.00	-17.97	49.15	6.88	Peak	100	149																																																																
5	13570.00	43.84	68.20	-24.36	37.55	6.29	Average	100	68																																																																
6	13570.00	56.82	88.20	-31.38	50.53	6.29	Peak	100	68																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

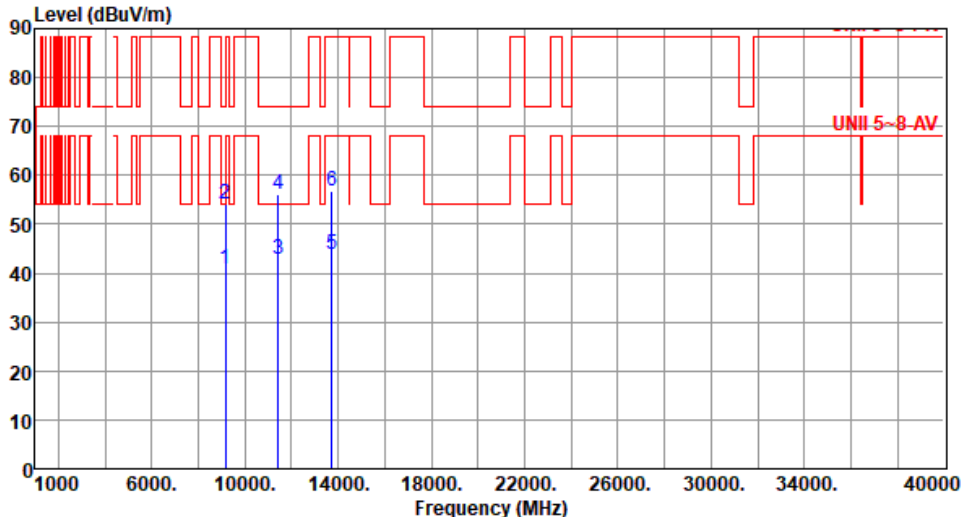


Modulation	be EHT80	Test Freq. (MHz)	6865																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9153.30</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>34.30</td><td>6.64</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>2</td><td>9153.30</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>47.47</td><td>6.64</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>3</td><td>11441.60</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>35.51</td><td>7.17</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>4</td><td>11441.60</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>49.04</td><td>7.17</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>5</td><td>13730.00</td><td>43.77</td><td>68.20</td><td>-24.43</td><td>37.76</td><td>6.01</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>6</td><td>13730.00</td><td>56.88</td><td>88.20</td><td>-31.32</td><td>50.87</td><td>6.01</td><td>Peak</td><td>100</td><td>321</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9153.30	40.94	54.00	-13.06	34.30	6.64	Average	100	130	2	9153.30	54.11	74.00	-19.89	47.47	6.64	Peak	100	130	3	11441.60	42.68	54.00	-11.32	35.51	7.17	Average	100	251	4	11441.60	56.21	74.00	-17.79	49.04	7.17	Peak	100	251	5	13730.00	43.77	68.20	-24.43	37.76	6.01	Average	100	321	6	13730.00	56.88	88.20	-31.32	50.87	6.01	Peak	100	321
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9153.30	40.94	54.00	-13.06	34.30	6.64	Average	100	130																																																																
2	9153.30	54.11	74.00	-19.89	47.47	6.64	Peak	100	130																																																																
3	11441.60	42.68	54.00	-11.32	35.51	7.17	Average	100	251																																																																
4	11441.60	56.21	74.00	-17.79	49.04	7.17	Peak	100	251																																																																
5	13730.00	43.77	68.20	-24.43	37.76	6.01	Average	100	321																																																																
6	13730.00	56.88	88.20	-31.32	50.87	6.01	Peak	100	321																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6865																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9153.30</td><td>40.91</td><td>54.00</td><td>-13.09</td><td>34.27</td><td>6.64</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>2</td><td>9153.30</td><td>54.14</td><td>74.00</td><td>-19.86</td><td>47.50</td><td>6.64</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>3</td><td>11441.60</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>35.69</td><td>7.17</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>4</td><td>11441.60</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>49.89</td><td>7.17</td><td>Peak</td><td>100</td><td>149</td></tr><tr><td>5</td><td>13730.00</td><td>43.72</td><td>68.20</td><td>-24.48</td><td>37.71</td><td>6.01</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>6</td><td>13730.00</td><td>56.74</td><td>88.20</td><td>-31.46</td><td>50.73</td><td>6.01</td><td>Peak</td><td>100</td><td>89</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	9153.30	40.91	54.00	-13.09	34.27	6.64	Average	100	226	2	9153.30	54.14	74.00	-19.86	47.50	6.64	Peak	100	226	3	11441.60	42.86	54.00	-11.14	35.69	7.17	Average	100	149	4	11441.60	57.06	74.00	-16.94	49.89	7.17	Peak	100	149	5	13730.00	43.72	68.20	-24.48	37.71	6.01	Average	100	89	6	13730.00	56.74	88.20	-31.46	50.73	6.01	Peak	100	89
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	9153.30	40.91	54.00	-13.09	34.27	6.64	Average	100	226																																																																																				
2	9153.30	54.14	74.00	-19.86	47.50	6.64	Peak	100	226																																																																																				
3	11441.60	42.86	54.00	-11.14	35.69	7.17	Average	100	149																																																																																				
4	11441.60	57.06	74.00	-16.94	49.89	7.17	Peak	100	149																																																																																				
5	13730.00	43.72	68.20	-24.48	37.71	6.01	Average	100	89																																																																																				
6	13730.00	56.74	88.20	-31.46	50.73	6.01	Peak	100	89																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

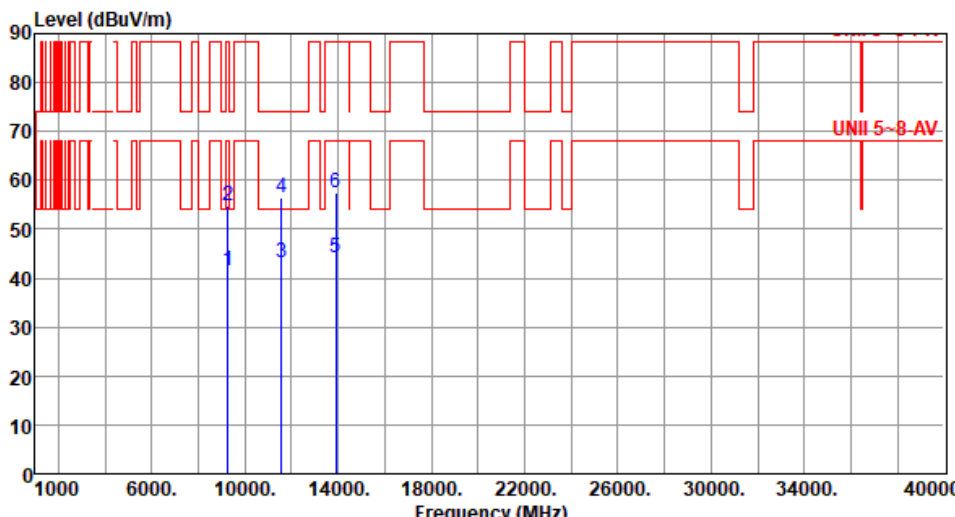


Modulation	be EHT80	Test Freq. (MHz)	6945																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9260.00</td><td>41.51</td><td>68.20</td><td>-26.69</td><td>34.49</td><td>7.02</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>2</td><td>9260.00</td><td>54.71</td><td>88.20</td><td>-33.49</td><td>47.69</td><td>7.02</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>3</td><td>11575.00</td><td>43.05</td><td>54.00</td><td>-10.95</td><td>35.86</td><td>7.19</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>4</td><td>11575.00</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>49.39</td><td>7.19</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>5</td><td>13890.00</td><td>44.30</td><td>68.20</td><td>-23.90</td><td>37.96</td><td>6.34</td><td>Average</td><td>100</td><td>328</td></tr><tr><td>6</td><td>13890.00</td><td>57.30</td><td>88.20</td><td>-30.90</td><td>50.96</td><td>6.34</td><td>Peak</td><td>100</td><td>328</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9260.00	41.51	68.20	-26.69	34.49	7.02	Average	100	143	2	9260.00	54.71	88.20	-33.49	47.69	7.02	Peak	100	143	3	11575.00	43.05	54.00	-10.95	35.86	7.19	Average	100	283	4	11575.00	56.58	74.00	-17.42	49.39	7.19	Peak	100	283	5	13890.00	44.30	68.20	-23.90	37.96	6.34	Average	100	328	6	13890.00	57.30	88.20	-30.90	50.96	6.34	Peak	100	328
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9260.00	41.51	68.20	-26.69	34.49	7.02	Average	100	143																																																																
2	9260.00	54.71	88.20	-33.49	47.69	7.02	Peak	100	143																																																																
3	11575.00	43.05	54.00	-10.95	35.86	7.19	Average	100	283																																																																
4	11575.00	56.58	74.00	-17.42	49.39	7.19	Peak	100	283																																																																
5	13890.00	44.30	68.20	-23.90	37.96	6.34	Average	100	328																																																																
6	13890.00	57.30	88.20	-30.90	50.96	6.34	Peak	100	328																																																																

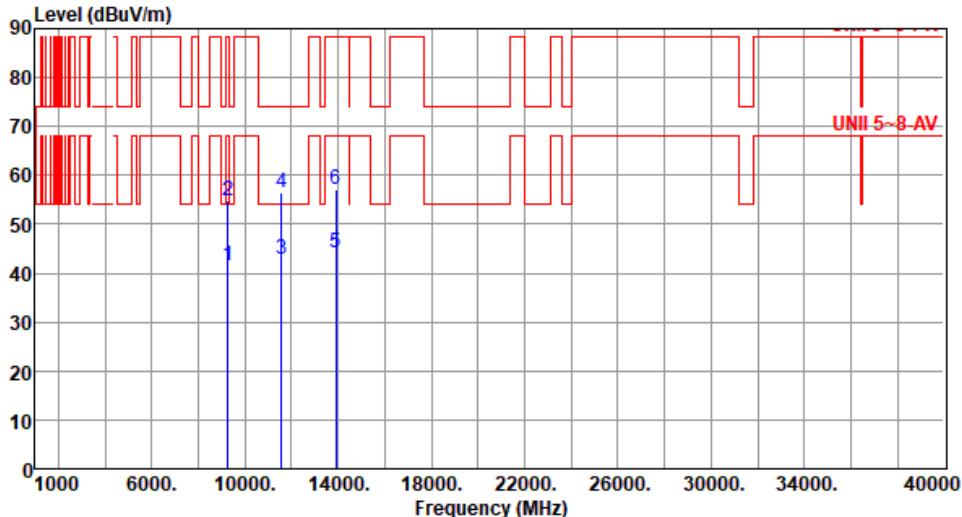


Modulation	be EHT80	Test Freq. (MHz)	6945						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	9260.00	41.42	68.20	-26.78	34.40	7.02	Average	100	234
2	9260.00	54.65	88.20	-33.55	47.63	7.02	Peak	100	234
3	11575.00	42.69	54.00	-11.31	35.50	7.19	Average	100	150
4	11575.00	56.45	74.00	-17.55	49.26	7.19	Peak	100	150
5	13890.00	44.20	68.20	-24.00	37.86	6.34	Average	100	85
6	13890.00	57.16	88.20	-31.04	50.82	6.34	Peak	100	85
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

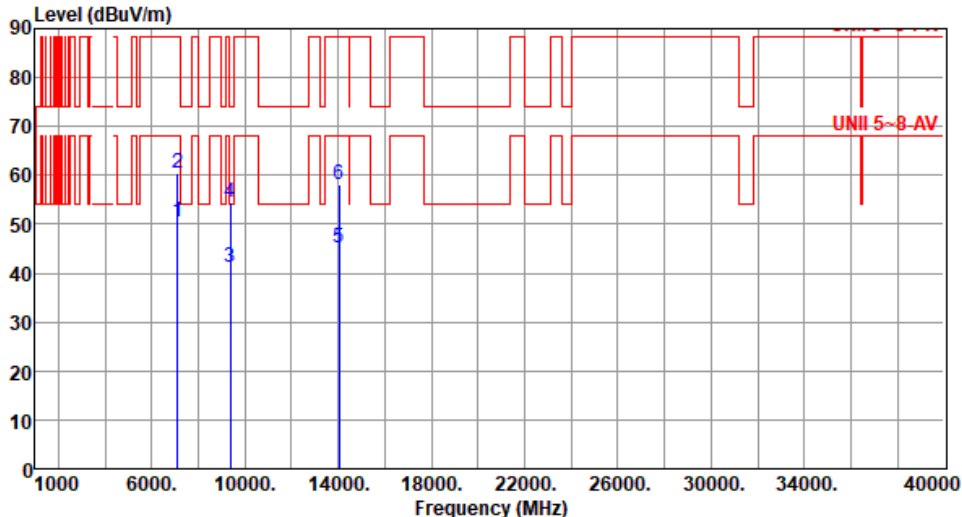


Modulation	be EHT80	Test Freq. (MHz)	7025																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>50.56</td><td>68.20</td><td>-17.64</td><td>45.70</td><td>4.86</td><td>Average</td><td>169</td><td>267</td></tr><tr><td>2</td><td>7125.00</td><td>60.38</td><td>88.20</td><td>-27.82</td><td>55.52</td><td>4.86</td><td>Peak</td><td>169</td><td>267</td></tr><tr><td>3</td><td>9366.60</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>34.15</td><td>7.06</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>9366.60</td><td>54.42</td><td>74.00</td><td>-19.58</td><td>47.36</td><td>7.06</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>14050.00</td><td>45.05</td><td>68.20</td><td>-23.15</td><td>38.31</td><td>6.74</td><td>Average</td><td>100</td><td>332</td></tr><tr><td>6</td><td>14050.00</td><td>58.22</td><td>88.20</td><td>-29.98</td><td>51.48</td><td>6.74</td><td>Peak</td><td>100</td><td>332</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	50.56	68.20	-17.64	45.70	4.86	Average	169	267	2	7125.00	60.38	88.20	-27.82	55.52	4.86	Peak	169	267	3	9366.60	41.21	54.00	-12.79	34.15	7.06	Average	100	134	4	9366.60	54.42	74.00	-19.58	47.36	7.06	Peak	100	134	5	14050.00	45.05	68.20	-23.15	38.31	6.74	Average	100	332	6	14050.00	58.22	88.20	-29.98	51.48	6.74	Peak	100	332
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	50.56	68.20	-17.64	45.70	4.86	Average	169	267																																																																
2	7125.00	60.38	88.20	-27.82	55.52	4.86	Peak	169	267																																																																
3	9366.60	41.21	54.00	-12.79	34.15	7.06	Average	100	134																																																																
4	9366.60	54.42	74.00	-19.58	47.36	7.06	Peak	100	134																																																																
5	14050.00	45.05	68.20	-23.15	38.31	6.74	Average	100	332																																																																
6	14050.00	58.22	88.20	-29.98	51.48	6.74	Peak	100	332																																																																

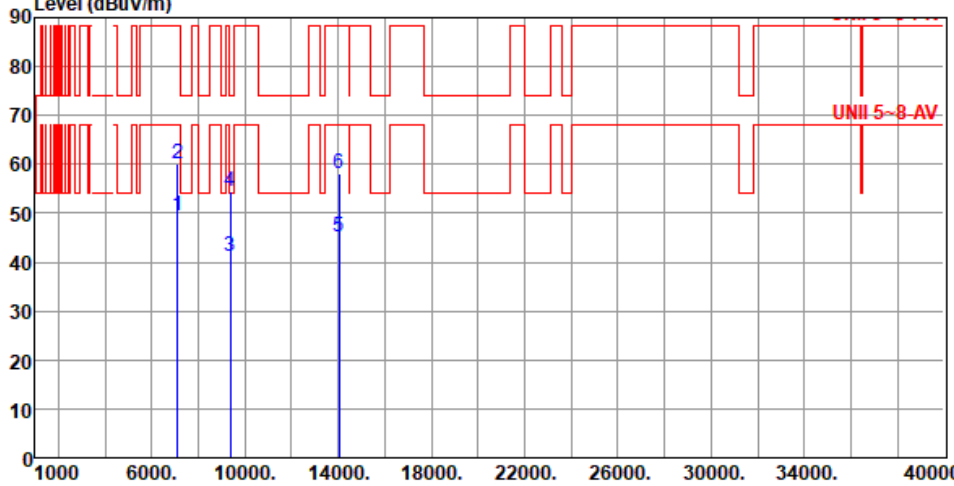

Modulation	be EHT80	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>49.51</td><td>68.20</td><td>-18.69</td><td>44.65</td><td>4.86</td><td>Average</td><td>172</td><td>236</td></tr><tr><td>2</td><td>7125.00</td><td>60.15</td><td>88.20</td><td>-28.05</td><td>55.29</td><td>4.86</td><td>Peak</td><td>172</td><td>236</td></tr><tr><td>3</td><td>9366.60</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>34.18</td><td>7.06</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>4</td><td>9366.60</td><td>54.37</td><td>74.00</td><td>-19.63</td><td>47.31</td><td>7.06</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>5</td><td>14050.00</td><td>45.03</td><td>68.20</td><td>-23.17</td><td>38.29</td><td>6.74</td><td>Average</td><td>100</td><td>96</td></tr><tr><td>6</td><td>14050.00</td><td>58.15</td><td>88.20</td><td>-30.05</td><td>51.41</td><td>6.74</td><td>Peak</td><td>100</td><td>96</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	49.51	68.20	-18.69	44.65	4.86	Average	172	236	2	7125.00	60.15	88.20	-28.05	55.29	4.86	Peak	172	236	3	9366.60	41.24	54.00	-12.76	34.18	7.06	Average	100	246	4	9366.60	54.37	74.00	-19.63	47.31	7.06	Peak	100	246	5	14050.00	45.03	68.20	-23.17	38.29	6.74	Average	100	96	6	14050.00	58.15	88.20	-30.05	51.41	6.74	Peak	100	96
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	49.51	68.20	-18.69	44.65	4.86	Average	172	236																																																																
2	7125.00	60.15	88.20	-28.05	55.29	4.86	Peak	172	236																																																																
3	9366.60	41.24	54.00	-12.76	34.18	7.06	Average	100	246																																																																
4	9366.60	54.37	74.00	-19.63	47.31	7.06	Peak	100	246																																																																
5	14050.00	45.03	68.20	-23.17	38.29	6.74	Average	100	96																																																																
6	14050.00	58.15	88.20	-30.05	51.41	6.74	Peak	100	96																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT160

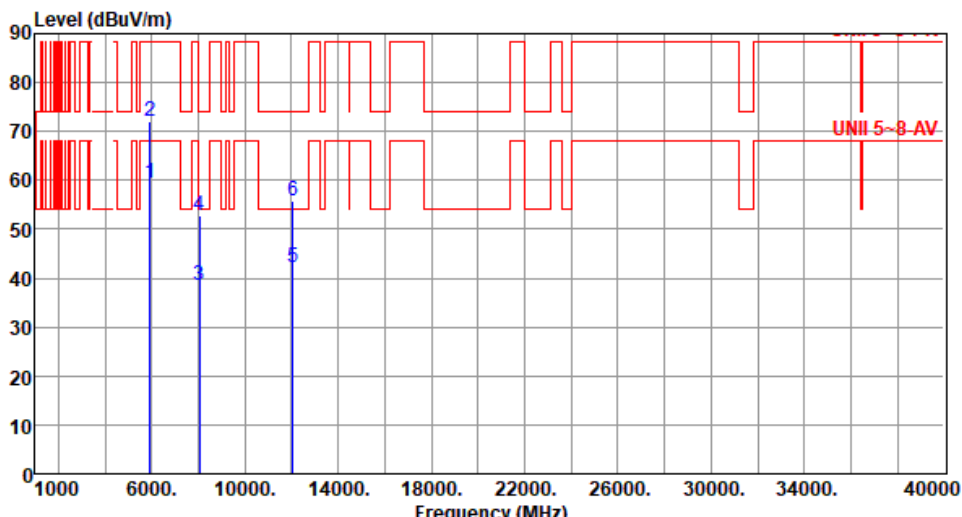
Modulation	be EHT160	Test Freq. (MHz)	6025						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		High cm	Table deg
1	5925.00	59.57	68.20	-8.63	58.44	1.13	Average	191	243
2	5925.00	71.97	88.20	-16.23	70.84	1.13	Peak	191	243
3	8033.30	38.63	54.00	-15.37	33.01	5.62	Average	100	117
4	8033.30	52.79	74.00	-21.21	47.17	5.62	Peak	100	117
5	12050.00	42.27	54.00	-11.73	36.02	6.25	Average	100	236
6	12050.00	55.84	74.00	-18.16	49.59	6.25	Peak	100	236

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6025																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>58.13</td><td>1.13</td><td>Average</td><td>134</td><td>241</td></tr><tr><td>2</td><td>5925.00</td><td>73.91</td><td>88.20</td><td>-14.29</td><td>72.78</td><td>1.13</td><td>Peak</td><td>134</td><td>241</td></tr><tr><td>3</td><td>8033.30</td><td>38.63</td><td>54.00</td><td>-15.37</td><td>33.01</td><td>5.62</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>4</td><td>8033.30</td><td>52.15</td><td>74.00</td><td>-21.85</td><td>46.53</td><td>5.62</td><td>Peak</td><td>100</td><td>233</td></tr><tr><td>5</td><td>12050.00</td><td>42.39</td><td>54.00</td><td>-11.61</td><td>36.14</td><td>6.25</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>6</td><td>12050.00</td><td>55.92</td><td>74.00</td><td>-18.08</td><td>49.67</td><td>6.25</td><td>Peak</td><td>100</td><td>85</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	59.26	68.20	-8.94	58.13	1.13	Average	134	241	2	5925.00	73.91	88.20	-14.29	72.78	1.13	Peak	134	241	3	8033.30	38.63	54.00	-15.37	33.01	5.62	Average	100	233	4	8033.30	52.15	74.00	-21.85	46.53	5.62	Peak	100	233	5	12050.00	42.39	54.00	-11.61	36.14	6.25	Average	100	85	6	12050.00	55.92	74.00	-18.08	49.67	6.25	Peak	100	85
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	59.26	68.20	-8.94	58.13	1.13	Average	134	241																																																																
2	5925.00	73.91	88.20	-14.29	72.78	1.13	Peak	134	241																																																																
3	8033.30	38.63	54.00	-15.37	33.01	5.62	Average	100	233																																																																
4	8033.30	52.15	74.00	-21.85	46.53	5.62	Peak	100	233																																																																
5	12050.00	42.39	54.00	-11.61	36.14	6.25	Average	100	85																																																																
6	12050.00	55.92	74.00	-18.08	49.67	6.25	Peak	100	85																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

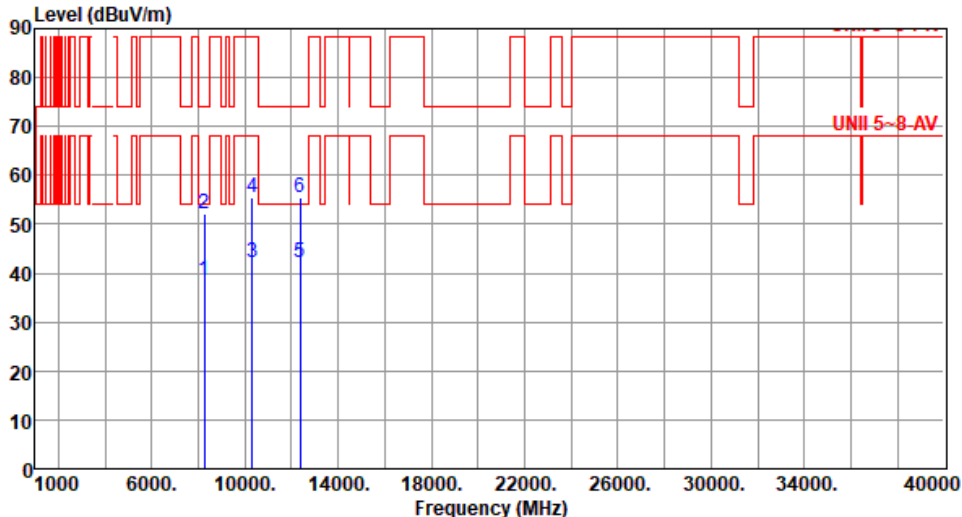

Modulation	be EHT160	Test Freq. (MHz)	6185						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8246.60	38.67	54.00	-15.33	33.27	5.40	Average	100	127
2	8246.60	51.99	74.00	-22.01	46.59	5.40	Peak	100	127
3	10308.30	42.04	68.20	-26.16	34.82	7.22	Average	100	234
4	10308.30	55.58	88.20	-32.62	48.36	7.22	Peak	100	234
5	12370.00	42.04	54.00	-11.96	36.34	5.70	Average	100	319
6	12370.00	55.56	74.00	-18.44	49.86	5.70	Peak	100	319
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8246.60</td><td>38.59</td><td>54.00</td><td>-15.41</td><td>33.19</td><td>5.40</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>8246.60</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>46.66</td><td>5.40</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>10308.30</td><td>41.80</td><td>68.20</td><td>-26.40</td><td>34.58</td><td>7.22</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>4</td><td>10308.30</td><td>55.56</td><td>88.20</td><td>-32.64</td><td>48.34</td><td>7.22</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>5</td><td>12370.00</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>36.33</td><td>5.70</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>6</td><td>12370.00</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>49.69</td><td>5.70</td><td>Peak</td><td>100</td><td>85</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8246.60	38.59	54.00	-15.41	33.19	5.40	Average	100	218	2	8246.60	52.06	74.00	-21.94	46.66	5.40	Peak	100	218	3	10308.30	41.80	68.20	-26.40	34.58	7.22	Average	100	158	4	10308.30	55.56	88.20	-32.64	48.34	7.22	Peak	100	158	5	12370.00	42.03	54.00	-11.97	36.33	5.70	Average	100	85	6	12370.00	55.39	74.00	-18.61	49.69	5.70	Peak	100	85
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8246.60	38.59	54.00	-15.41	33.19	5.40	Average	100	218																																																																
2	8246.60	52.06	74.00	-21.94	46.66	5.40	Peak	100	218																																																																
3	10308.30	41.80	68.20	-26.40	34.58	7.22	Average	100	158																																																																
4	10308.30	55.56	88.20	-32.64	48.34	7.22	Peak	100	158																																																																
5	12370.00	42.03	54.00	-11.97	36.33	5.70	Average	100	85																																																																
6	12370.00	55.39	74.00	-18.61	49.69	5.70	Peak	100	85																																																																




Modulation	be EHT160		Test Freq. (MHz)		6345																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8460.00</td><td>38.78</td><td>54.00</td><td>-15.22</td><td>33.60</td><td>5.18</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>2</td><td>8460.00</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>46.76</td><td>5.18</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>3</td><td>10575.00</td><td>42.16</td><td>68.20</td><td>-26.04</td><td>34.85</td><td>7.31</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>4</td><td>10575.00</td><td>56.02</td><td>88.20</td><td>-32.18</td><td>48.71</td><td>7.31</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>5</td><td>12690.00</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>36.78</td><td>5.79</td><td>Average</td><td>100</td><td>340</td></tr><tr><td>6</td><td>12690.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>50.27</td><td>5.79</td><td>Peak</td><td>100</td><td>340</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8460.00	38.78	54.00	-15.22	33.60	5.18	Average	100	131	2	8460.00	51.94	74.00	-22.06	46.76	5.18	Peak	100	131	3	10575.00	42.16	68.20	-26.04	34.85	7.31	Average	100	246	4	10575.00	56.02	88.20	-32.18	48.71	7.31	Peak	100	246	5	12690.00	42.57	54.00	-11.43	36.78	5.79	Average	100	340	6	12690.00	56.06	74.00	-17.94	50.27	5.79	Peak	100	340
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	8460.00	38.78	54.00	-15.22	33.60	5.18	Average	100	131																																																																						
2	8460.00	51.94	74.00	-22.06	46.76	5.18	Peak	100	131																																																																						
3	10575.00	42.16	68.20	-26.04	34.85	7.31	Average	100	246																																																																						
4	10575.00	56.02	88.20	-32.18	48.71	7.31	Peak	100	246																																																																						
5	12690.00	42.57	54.00	-11.43	36.78	5.79	Average	100	340																																																																						
6	12690.00	56.06	74.00	-17.94	50.27	5.79	Peak	100	340																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

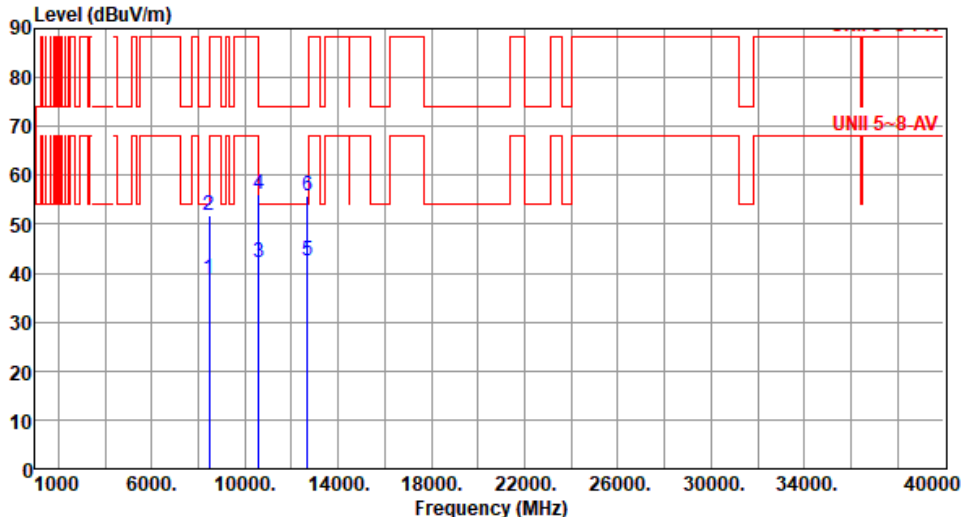


Modulation	be EHT160	Test Freq. (MHz)	6345																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8460.00</td><td>38.94</td><td>54.00</td><td>-15.06</td><td>33.76</td><td>5.18</td><td>Average</td><td>100</td><td>239</td></tr><tr><td>2</td><td>8460.00</td><td>51.85</td><td>74.00</td><td>-22.15</td><td>46.67</td><td>5.18</td><td>Peak</td><td>100</td><td>239</td></tr><tr><td>3</td><td>10575.00</td><td>42.19</td><td>68.20</td><td>-26.01</td><td>34.88</td><td>7.31</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>4</td><td>10575.00</td><td>55.99</td><td>88.20</td><td>-32.21</td><td>48.68</td><td>7.31</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>5</td><td>12690.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>36.61</td><td>5.79</td><td>Average</td><td>100</td><td>87</td></tr><tr><td>6</td><td>12690.00</td><td>55.95</td><td>74.00</td><td>-18.05</td><td>50.16</td><td>5.79</td><td>Peak</td><td>100</td><td>87</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8460.00	38.94	54.00	-15.06	33.76	5.18	Average	100	239	2	8460.00	51.85	74.00	-22.15	46.67	5.18	Peak	100	239	3	10575.00	42.19	68.20	-26.01	34.88	7.31	Average	100	130	4	10575.00	55.99	88.20	-32.21	48.68	7.31	Peak	100	130	5	12690.00	42.40	54.00	-11.60	36.61	5.79	Average	100	87	6	12690.00	55.95	74.00	-18.05	50.16	5.79	Peak	100	87
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	8460.00	38.94	54.00	-15.06	33.76	5.18	Average	100	239																																																																																				
2	8460.00	51.85	74.00	-22.15	46.67	5.18	Peak	100	239																																																																																				
3	10575.00	42.19	68.20	-26.01	34.88	7.31	Average	100	130																																																																																				
4	10575.00	55.99	88.20	-32.21	48.68	7.31	Peak	100	130																																																																																				
5	12690.00	42.40	54.00	-11.60	36.61	5.79	Average	100	87																																																																																				
6	12690.00	55.95	74.00	-18.05	50.16	5.79	Peak	100	87																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

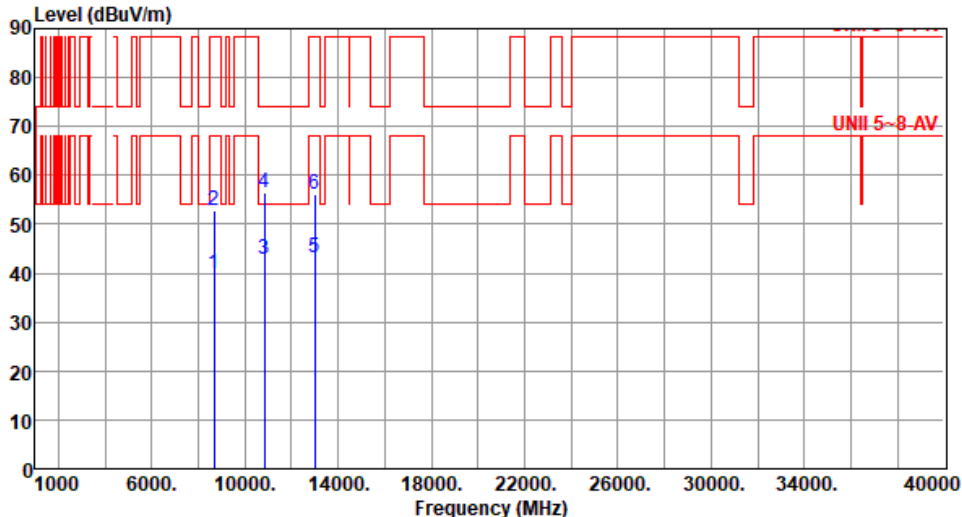


Modulation	be EHT160	Test Freq. (MHz)	6505																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8673.30</td><td>39.98</td><td>68.20</td><td>-28.22</td><td>34.01</td><td>5.97</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>2</td><td>8673.30</td><td>52.75</td><td>88.20</td><td>-35.45</td><td>46.78</td><td>5.97</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>3</td><td>10841.60</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>35.22</td><td>7.50</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>4</td><td>10841.60</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>48.97</td><td>7.50</td><td>Peak</td><td>100</td><td>221</td></tr><tr><td>5</td><td>13010.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>37.05</td><td>6.11</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>6</td><td>13010.00</td><td>56.27</td><td>88.20</td><td>-31.93</td><td>50.16</td><td>6.11</td><td>Peak</td><td>100</td><td>334</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8673.30	39.98	68.20	-28.22	34.01	5.97	Average	100	135	2	8673.30	52.75	88.20	-35.45	46.78	5.97	Peak	100	135	3	10841.60	42.72	54.00	-11.28	35.22	7.50	Average	100	221	4	10841.60	56.47	74.00	-17.53	48.97	7.50	Peak	100	221	5	13010.00	43.16	68.20	-25.04	37.05	6.11	Average	100	334	6	13010.00	56.27	88.20	-31.93	50.16	6.11	Peak	100	334
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8673.30	39.98	68.20	-28.22	34.01	5.97	Average	100	135																																																																
2	8673.30	52.75	88.20	-35.45	46.78	5.97	Peak	100	135																																																																
3	10841.60	42.72	54.00	-11.28	35.22	7.50	Average	100	221																																																																
4	10841.60	56.47	74.00	-17.53	48.97	7.50	Peak	100	221																																																																
5	13010.00	43.16	68.20	-25.04	37.05	6.11	Average	100	334																																																																
6	13010.00	56.27	88.20	-31.93	50.16	6.11	Peak	100	334																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

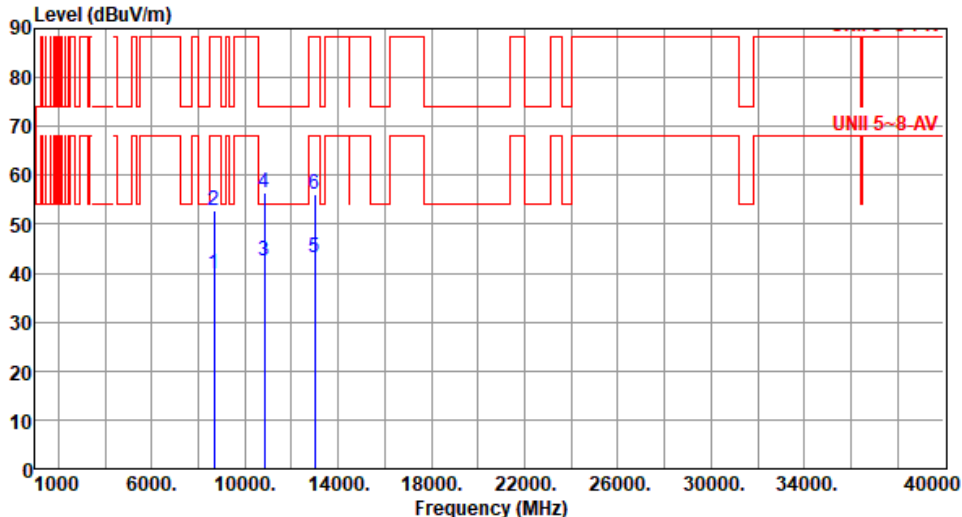


Modulation	be EHT160	Test Freq. (MHz)	6505																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8673.30</td><td>39.95</td><td>68.20</td><td>-28.25</td><td>33.98</td><td>5.97</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>2</td><td>8673.30</td><td>52.77</td><td>88.20</td><td>-35.43</td><td>46.80</td><td>5.97</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>3</td><td>10841.60</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>35.11</td><td>7.50</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>4</td><td>10841.60</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>48.95</td><td>7.50</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>5</td><td>13010.00</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>36.95</td><td>6.11</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>13010.00</td><td>56.24</td><td>88.20</td><td>-31.96</td><td>50.13</td><td>6.11</td><td>Peak</td><td>100</td><td>65</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	8673.30	39.95	68.20	-28.25	33.98	5.97	Average	100	249	2	8673.30	52.77	88.20	-35.43	46.80	5.97	Peak	100	249	3	10841.60	42.61	54.00	-11.39	35.11	7.50	Average	100	110	4	10841.60	56.45	74.00	-17.55	48.95	7.50	Peak	100	110	5	13010.00	43.06	68.20	-25.14	36.95	6.11	Average	100	65	6	13010.00	56.24	88.20	-31.96	50.13	6.11	Peak	100	65
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																				
		dBUV/m			dBUV			cm	deg																																																																																				
1	8673.30	39.95	68.20	-28.25	33.98	5.97	Average	100	249																																																																																				
2	8673.30	52.77	88.20	-35.43	46.80	5.97	Peak	100	249																																																																																				
3	10841.60	42.61	54.00	-11.39	35.11	7.50	Average	100	110																																																																																				
4	10841.60	56.45	74.00	-17.55	48.95	7.50	Peak	100	110																																																																																				
5	13010.00	43.06	68.20	-25.14	36.95	6.11	Average	100	65																																																																																				
6	13010.00	56.24	88.20	-31.96	50.13	6.11	Peak	100	65																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

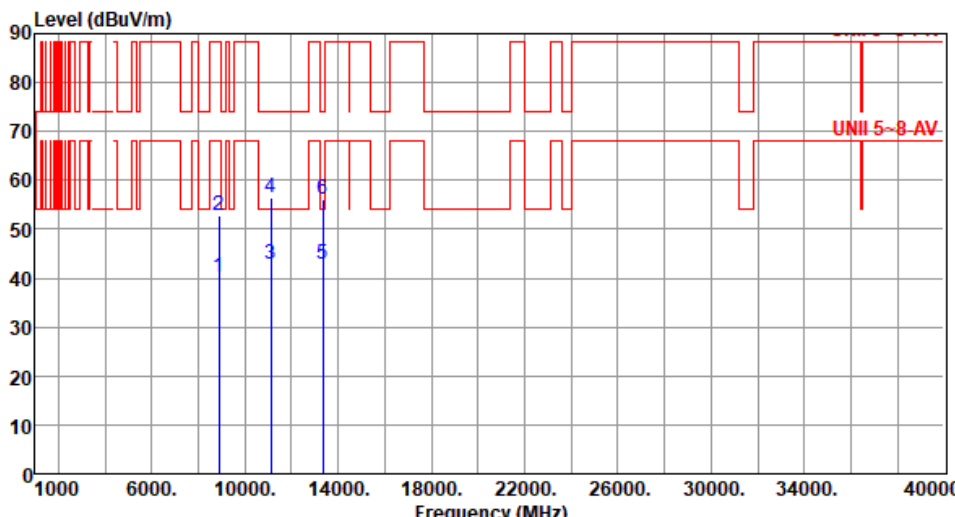

Modulation	be EHT160	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8886.60</td><td>40.31</td><td>68.20</td><td>-27.89</td><td>34.21</td><td>6.10</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>8886.60</td><td>52.92</td><td>88.20</td><td>-35.28</td><td>46.82</td><td>6.10</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>11108.30</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>35.46</td><td>7.26</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>4</td><td>11108.30</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>49.21</td><td>7.26</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>5</td><td>13330.00</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>37.36</td><td>5.64</td><td>Average</td><td>100</td><td>324</td></tr><tr><td>6</td><td>13330.00</td><td>56.00</td><td>74.00</td><td>-18.00</td><td>50.36</td><td>5.64</td><td>Peak</td><td>100</td><td>324</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8886.60	40.31	68.20	-27.89	34.21	6.10	Average	100	127	2	8886.60	52.92	88.20	-35.28	46.82	6.10	Peak	100	127	3	11108.30	42.72	54.00	-11.28	35.46	7.26	Average	100	246	4	11108.30	56.47	74.00	-17.53	49.21	7.26	Peak	100	246	5	13330.00	43.00	54.00	-11.00	37.36	5.64	Average	100	324	6	13330.00	56.00	74.00	-18.00	50.36	5.64	Peak	100	324
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8886.60	40.31	68.20	-27.89	34.21	6.10	Average	100	127																																																																
2	8886.60	52.92	88.20	-35.28	46.82	6.10	Peak	100	127																																																																
3	11108.30	42.72	54.00	-11.28	35.46	7.26	Average	100	246																																																																
4	11108.30	56.47	74.00	-17.53	49.21	7.26	Peak	100	246																																																																
5	13330.00	43.00	54.00	-11.00	37.36	5.64	Average	100	324																																																																
6	13330.00	56.00	74.00	-18.00	50.36	5.64	Peak	100	324																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

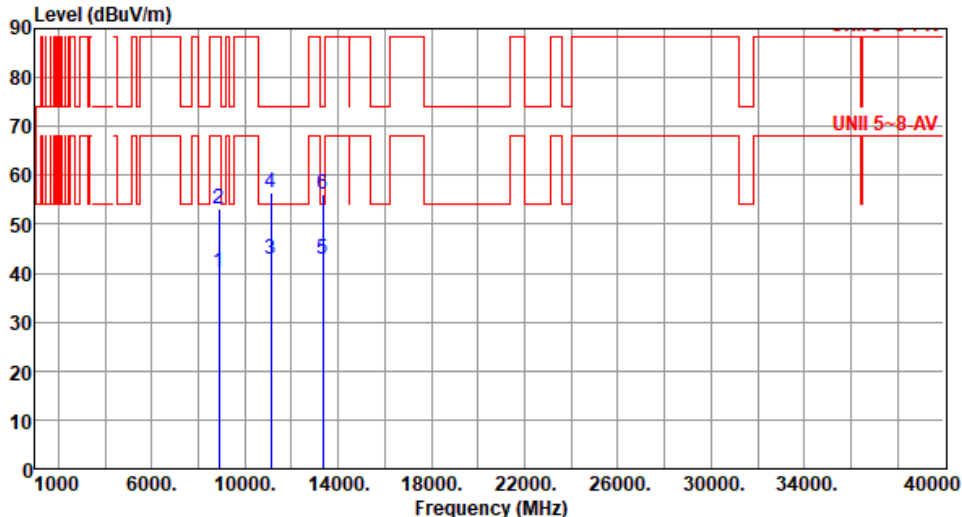

Modulation	be EHT160		Test Freq. (MHz)		6665																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
 The graph displays the emission level in dBuV/m on the y-axis (0 to 90) against frequency in MHz on the x-axis (1000 to 40000). A red line represents the limit, and blue vertical lines indicate measurement points. A label 'UNI 5~8-AV' is present on the right side of the graph. <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8886.60</td><td>40.29</td><td>68.20</td><td>-27.91</td><td>34.19</td><td>6.10</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>2</td><td>8886.60</td><td>52.99</td><td>88.20</td><td>-35.21</td><td>46.89</td><td>6.10</td><td>Peak</td><td>100</td><td>219</td></tr><tr><td>3</td><td>11108.30</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>35.62</td><td>7.26</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>4</td><td>11108.30</td><td>56.62</td><td>74.00</td><td>-17.38</td><td>49.36</td><td>7.26</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>5</td><td>13330.00</td><td>42.98</td><td>54.00</td><td>-11.02</td><td>37.34</td><td>5.64</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>6</td><td>13330.00</td><td>56.00</td><td>74.00</td><td>-18.00</td><td>50.36</td><td>5.64</td><td>Peak</td><td>100</td><td>84</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	8886.60	40.29	68.20	-27.91	34.19	6.10	Average	100	219	2	8886.60	52.99	88.20	-35.21	46.89	6.10	Peak	100	219	3	11108.30	42.88	54.00	-11.12	35.62	7.26	Average	100	126	4	11108.30	56.62	74.00	-17.38	49.36	7.26	Peak	100	126	5	13330.00	42.98	54.00	-11.02	37.34	5.64	Average	100	84	6	13330.00	56.00	74.00	-18.00	50.36	5.64	Peak	100	84
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	8886.60	40.29	68.20	-27.91	34.19	6.10	Average	100	219																																																																																										
2	8886.60	52.99	88.20	-35.21	46.89	6.10	Peak	100	219																																																																																										
3	11108.30	42.88	54.00	-11.12	35.62	7.26	Average	100	126																																																																																										
4	11108.30	56.62	74.00	-17.38	49.36	7.26	Peak	100	126																																																																																										
5	13330.00	42.98	54.00	-11.02	37.34	5.64	Average	100	84																																																																																										
6	13330.00	56.00	74.00	-18.00	50.36	5.64	Peak	100	84																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT160	Test Freq. (MHz)	6825																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9100.00</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>34.29</td><td>6.47</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>2</td><td>9100.00</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>47.58</td><td>6.47</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>3</td><td>11375.00</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>35.59</td><td>7.15</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>4</td><td>11375.00</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>49.51</td><td>7.15</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>5</td><td>13650.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>37.69</td><td>5.86</td><td>Average</td><td>100</td><td>316</td></tr><tr><td>6</td><td>13650.00</td><td>56.59</td><td>88.20</td><td>-31.61</td><td>50.73</td><td>5.86</td><td>Peak</td><td>100</td><td>316</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9100.00	40.76	54.00	-13.24	34.29	6.47	Average	100	130	2	9100.00	54.05	74.00	-19.95	47.58	6.47	Peak	100	130	3	11375.00	42.74	54.00	-11.26	35.59	7.15	Average	100	259	4	11375.00	56.66	74.00	-17.34	49.51	7.15	Peak	100	259	5	13650.00	43.55	68.20	-24.65	37.69	5.86	Average	100	316	6	13650.00	56.59	88.20	-31.61	50.73	5.86	Peak	100	316
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9100.00	40.76	54.00	-13.24	34.29	6.47	Average	100	130																																																																
2	9100.00	54.05	74.00	-19.95	47.58	6.47	Peak	100	130																																																																
3	11375.00	42.74	54.00	-11.26	35.59	7.15	Average	100	259																																																																
4	11375.00	56.66	74.00	-17.34	49.51	7.15	Peak	100	259																																																																
5	13650.00	43.55	68.20	-24.65	37.69	5.86	Average	100	316																																																																
6	13650.00	56.59	88.20	-31.61	50.73	5.86	Peak	100	316																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6825																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9100.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>34.24</td><td>6.47</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>2</td><td>9100.00</td><td>53.67</td><td>74.00</td><td>-20.33</td><td>47.20</td><td>6.47</td><td>Peak</td><td>100</td><td>225</td></tr><tr><td>3</td><td>11375.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>35.69</td><td>7.15</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>4</td><td>11375.00</td><td>56.54</td><td>74.00</td><td>-17.46</td><td>49.39</td><td>7.15</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>5</td><td>13650.00</td><td>43.49</td><td>68.20</td><td>-24.71</td><td>37.63</td><td>5.86</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>6</td><td>13650.00</td><td>56.47</td><td>88.20</td><td>-31.73</td><td>50.61</td><td>5.86</td><td>Peak</td><td>100</td><td>92</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9100.00	40.71	54.00	-13.29	34.24	6.47	Average	100	225	2	9100.00	53.67	74.00	-20.33	47.20	6.47	Peak	100	225	3	11375.00	42.84	54.00	-11.16	35.69	7.15	Average	100	131	4	11375.00	56.54	74.00	-17.46	49.39	7.15	Peak	100	131	5	13650.00	43.49	68.20	-24.71	37.63	5.86	Average	100	92	6	13650.00	56.47	88.20	-31.73	50.61	5.86	Peak	100	92
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9100.00	40.71	54.00	-13.29	34.24	6.47	Average	100	225																																																																
2	9100.00	53.67	74.00	-20.33	47.20	6.47	Peak	100	225																																																																
3	11375.00	42.84	54.00	-11.16	35.69	7.15	Average	100	131																																																																
4	11375.00	56.54	74.00	-17.46	49.39	7.15	Peak	100	131																																																																
5	13650.00	43.49	68.20	-24.71	37.63	5.86	Average	100	92																																																																
6	13650.00	56.47	88.20	-31.73	50.61	5.86	Peak	100	92																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT160	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>53.39</td><td>68.20</td><td>-14.81</td><td>48.53</td><td>4.86</td><td>Average</td><td>203</td><td>268</td></tr><tr><td>2</td><td>7125.00</td><td>63.26</td><td>88.20</td><td>-24.94</td><td>58.40</td><td>4.86</td><td>Peak</td><td>203</td><td>268</td></tr><tr><td>3</td><td>9313.30</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>34.60</td><td>7.12</td><td>Average</td><td>100</td><td>139</td></tr><tr><td>4</td><td>9313.30</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>47.70</td><td>7.12</td><td>Peak</td><td>100</td><td>139</td></tr><tr><td>5</td><td>13970.00</td><td>44.69</td><td>68.20</td><td>-23.51</td><td>38.03</td><td>6.66</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>6</td><td>13970.00</td><td>57.65</td><td>88.20</td><td>-30.55</td><td>50.99</td><td>6.66</td><td>Peak</td><td>100</td><td>305</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	53.39	68.20	-14.81	48.53	4.86	Average	203	268	2	7125.00	63.26	88.20	-24.94	58.40	4.86	Peak	203	268	3	9313.30	41.72	54.00	-12.28	34.60	7.12	Average	100	139	4	9313.30	54.82	74.00	-19.18	47.70	7.12	Peak	100	139	5	13970.00	44.69	68.20	-23.51	38.03	6.66	Average	100	305	6	13970.00	57.65	88.20	-30.55	50.99	6.66	Peak	100	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	53.39	68.20	-14.81	48.53	4.86	Average	203	268																																																																
2	7125.00	63.26	88.20	-24.94	58.40	4.86	Peak	203	268																																																																
3	9313.30	41.72	54.00	-12.28	34.60	7.12	Average	100	139																																																																
4	9313.30	54.82	74.00	-19.18	47.70	7.12	Peak	100	139																																																																
5	13970.00	44.69	68.20	-23.51	38.03	6.66	Average	100	305																																																																
6	13970.00	57.65	88.20	-30.55	50.99	6.66	Peak	100	305																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6985
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) <			

Unwanted Emissions (Above 1GHz) for be EHT320

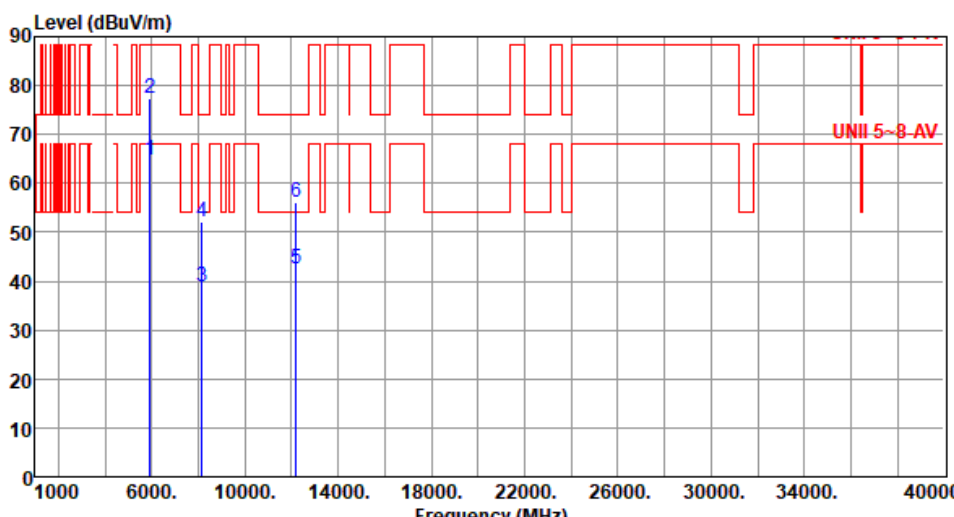Modulation	be EHT320	Test Freq. (MHz)	6105																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>64.70</td><td>68.20</td><td>-3.50</td><td>63.57</td><td>1.13</td><td>Average</td><td>188</td><td>244</td></tr><tr><td>2</td><td>5925.00</td><td>77.39</td><td>88.20</td><td>-10.81</td><td>76.26</td><td>1.13</td><td>Peak</td><td>188</td><td>244</td></tr><tr><td>3</td><td>8140.00</td><td>38.72</td><td>54.00</td><td>-15.28</td><td>33.15</td><td>5.57</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>8140.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>46.59</td><td>5.57</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>12210.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>36.22</td><td>6.42</td><td>Average</td><td>100</td><td>187</td></tr><tr><td>6</td><td>12210.00</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>49.85</td><td>6.42</td><td>Peak</td><td>100</td><td>187</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	64.70	68.20	-3.50	63.57	1.13	Average	188	244	2	5925.00	77.39	88.20	-10.81	76.26	1.13	Peak	188	244	3	8140.00	38.72	54.00	-15.28	33.15	5.57	Average	100	105	4	8140.00	52.16	74.00	-21.84	46.59	5.57	Peak	100	105	5	12210.00	42.64	54.00	-11.36	36.22	6.42	Average	100	187	6	12210.00	56.27	74.00	-17.73	49.85	6.42	Peak	100	187
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	64.70	68.20	-3.50	63.57	1.13	Average	188	244																																																																
2	5925.00	77.39	88.20	-10.81	76.26	1.13	Peak	188	244																																																																
3	8140.00	38.72	54.00	-15.28	33.15	5.57	Average	100	105																																																																
4	8140.00	52.16	74.00	-21.84	46.59	5.57	Peak	100	105																																																																
5	12210.00	42.64	54.00	-11.36	36.22	6.42	Average	100	187																																																																
6	12210.00	56.27	74.00	-17.73	49.85	6.42	Peak	100	187																																																																




Modulation	be EHT320	Test Freq. (MHz)	6105																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>66.15</td><td>68.20</td><td>-2.05</td><td>65.02</td><td>1.13</td><td>Average</td><td>115</td><td>231</td></tr><tr><td>2</td><td>5925.00</td><td>78.49</td><td>88.20</td><td>-9.71</td><td>77.36</td><td>1.13</td><td>Peak</td><td>115</td><td>231</td></tr><tr><td>3</td><td>8140.00</td><td>38.63</td><td>54.00</td><td>-15.37</td><td>33.06</td><td>5.57</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>4</td><td>8140.00</td><td>52.20</td><td>74.00</td><td>-21.80</td><td>46.63</td><td>5.57</td><td>Peak</td><td>100</td><td>224</td></tr><tr><td>5</td><td>12210.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>36.27</td><td>6.42</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>6</td><td>12210.00</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>49.75</td><td>6.42</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	66.15	68.20	-2.05	65.02	1.13	Average	115	231	2	5925.00	78.49	88.20	-9.71	77.36	1.13	Peak	115	231	3	8140.00	38.63	54.00	-15.37	33.06	5.57	Average	100	224	4	8140.00	52.20	74.00	-21.80	46.63	5.57	Peak	100	224	5	12210.00	42.69	54.00	-11.31	36.27	6.42	Average	100	176	6	12210.00	56.17	74.00	-17.83	49.75	6.42	Peak	100	176
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	66.15	68.20	-2.05	65.02	1.13	Average	115	231																																																																
2	5925.00	78.49	88.20	-9.71	77.36	1.13	Peak	115	231																																																																
3	8140.00	38.63	54.00	-15.37	33.06	5.57	Average	100	224																																																																
4	8140.00	52.20	74.00	-21.80	46.63	5.57	Peak	100	224																																																																
5	12210.00	42.69	54.00	-11.31	36.27	6.42	Average	100	176																																																																
6	12210.00	56.17	74.00	-17.83	49.75	6.42	Peak	100	176																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT320	Test Freq. (MHz)	6265																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8353.30</td><td>38.77</td><td>54.00</td><td>-15.23</td><td>33.59</td><td>5.18</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>8353.30</td><td>51.77</td><td>74.00</td><td>-22.23</td><td>46.59</td><td>5.18</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>10441.60</td><td>42.21</td><td>68.20</td><td>-25.99</td><td>34.89</td><td>7.32</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>4</td><td>10441.60</td><td>56.08</td><td>88.20</td><td>-32.12</td><td>48.76</td><td>7.32</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>5</td><td>12530.00</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>35.66</td><td>5.71</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>6</td><td>12530.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>49.48</td><td>5.71</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8353.30	38.77	54.00	-15.23	33.59	5.18	Average	100	123	2	8353.30	51.77	74.00	-22.23	46.59	5.18	Peak	100	123	3	10441.60	42.21	68.20	-25.99	34.89	7.32	Average	100	243	4	10441.60	56.08	88.20	-32.12	48.76	7.32	Peak	100	243	5	12530.00	41.37	54.00	-12.63	35.66	5.71	Average	100	178	6	12530.00	55.19	74.00	-18.81	49.48	5.71	Peak	100	178
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8353.30	38.77	54.00	-15.23	33.59	5.18	Average	100	123																																																																
2	8353.30	51.77	74.00	-22.23	46.59	5.18	Peak	100	123																																																																
3	10441.60	42.21	68.20	-25.99	34.89	7.32	Average	100	243																																																																
4	10441.60	56.08	88.20	-32.12	48.76	7.32	Peak	100	243																																																																
5	12530.00	41.37	54.00	-12.63	35.66	5.71	Average	100	178																																																																
6	12530.00	55.19	74.00	-18.81	49.48	5.71	Peak	100	178																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

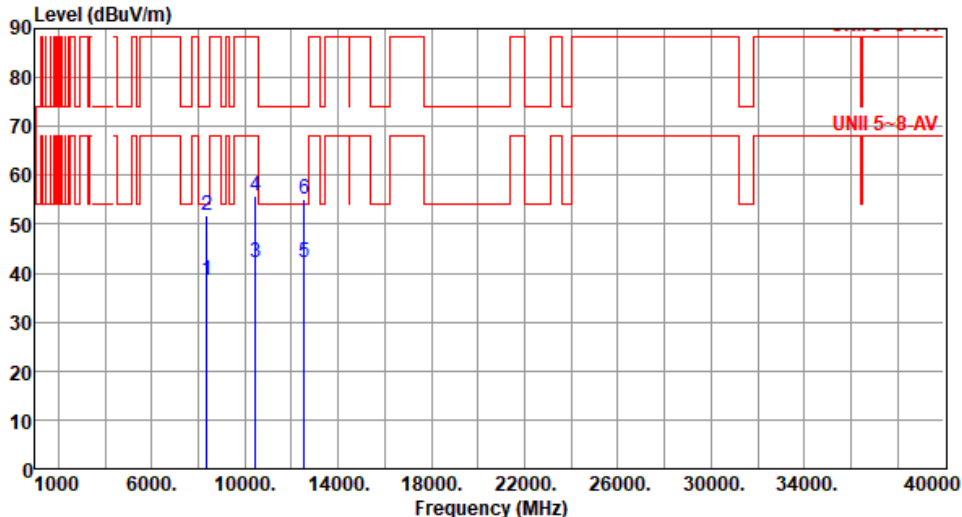


Modulation	be EHT320	Test Freq. (MHz)	6265						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8353.30	38.48	54.00	-15.52	33.30	5.18	Average	100	249
2	8353.30	51.80	74.00	-22.20	46.62	5.18	Peak	100	249
3	10441.60	42.09	68.20	-26.11	34.77	7.32	Average	100	132
4	10441.60	55.91	88.20	-32.29	48.59	7.32	Peak	100	132
5	12530.00	42.15	54.00	-11.85	36.44	5.71	Average	100	176
6	12530.00	55.19	74.00	-18.81	49.48	5.71	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

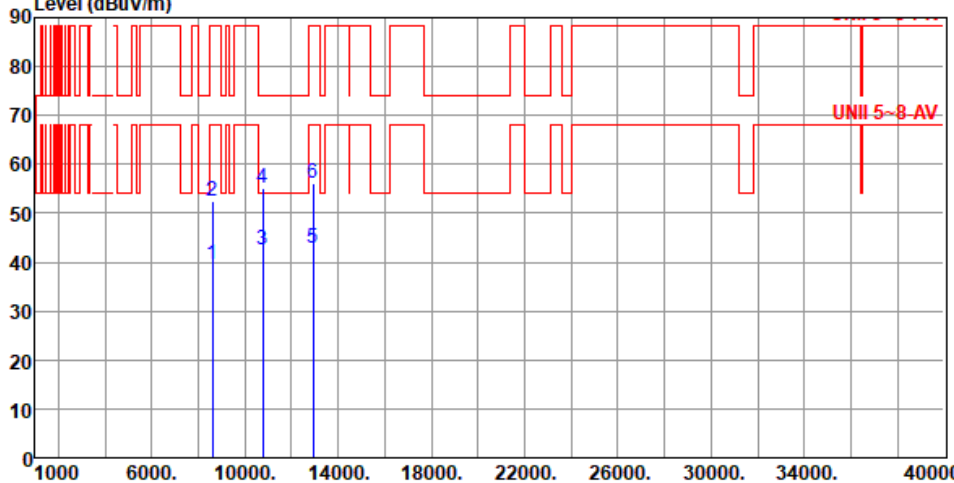


Modulation	be EHT320	Test Freq. (MHz)	6425																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8620.00</td><td>39.54</td><td>68.20</td><td>-28.66</td><td>33.76</td><td>5.78</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>2</td><td>8620.00</td><td>52.46</td><td>88.20</td><td>-35.74</td><td>46.68</td><td>5.78</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>3</td><td>10775.00</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>34.95</td><td>7.41</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>4</td><td>10775.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>47.83</td><td>7.41</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>5</td><td>12930.00</td><td>42.88</td><td>68.20</td><td>-25.32</td><td>36.84</td><td>6.04</td><td>Average</td><td>100</td><td>342</td></tr><tr><td>6</td><td>12930.00</td><td>56.09</td><td>88.20</td><td>-32.11</td><td>50.05</td><td>6.04</td><td>Peak</td><td>100</td><td>342</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8620.00	39.54	68.20	-28.66	33.76	5.78	Average	100	144	2	8620.00	52.46	88.20	-35.74	46.68	5.78	Peak	100	144	3	10775.00	42.36	54.00	-11.64	34.95	7.41	Average	100	259	4	10775.00	55.24	74.00	-18.76	47.83	7.41	Peak	100	259	5	12930.00	42.88	68.20	-25.32	36.84	6.04	Average	100	342	6	12930.00	56.09	88.20	-32.11	50.05	6.04	Peak	100	342
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8620.00	39.54	68.20	-28.66	33.76	5.78	Average	100	144																																																																
2	8620.00	52.46	88.20	-35.74	46.68	5.78	Peak	100	144																																																																
3	10775.00	42.36	54.00	-11.64	34.95	7.41	Average	100	259																																																																
4	10775.00	55.24	74.00	-18.76	47.83	7.41	Peak	100	259																																																																
5	12930.00	42.88	68.20	-25.32	36.84	6.04	Average	100	342																																																																
6	12930.00	56.09	88.20	-32.11	50.05	6.04	Peak	100	342																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

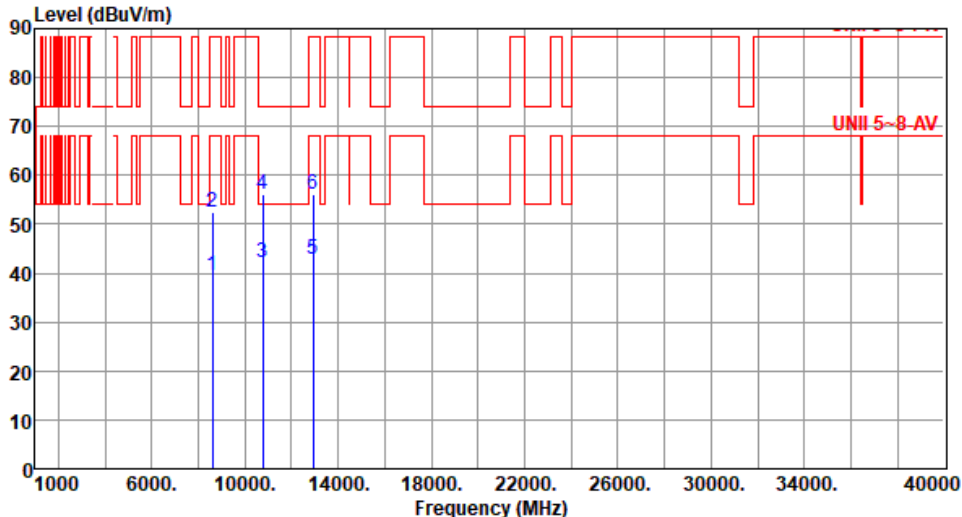

Modulation	be EHT320	Test Freq. (MHz)	6425																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8620.00</td><td>39.58</td><td>68.20</td><td>-28.62</td><td>33.80</td><td>5.78</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>8620.00</td><td>52.55</td><td>88.20</td><td>-35.65</td><td>46.77</td><td>5.78</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>10775.00</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>34.90</td><td>7.41</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>4</td><td>10775.00</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>48.75</td><td>7.41</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>5</td><td>12930.00</td><td>42.75</td><td>68.20</td><td>-25.45</td><td>36.71</td><td>6.04</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>6</td><td>12930.00</td><td>56.07</td><td>88.20</td><td>-32.13</td><td>50.03</td><td>6.04</td><td>Peak</td><td>100</td><td>82</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8620.00	39.58	68.20	-28.62	33.80	5.78	Average	100	218	2	8620.00	52.55	88.20	-35.65	46.77	5.78	Peak	100	218	3	10775.00	42.31	54.00	-11.69	34.90	7.41	Average	100	234	4	10775.00	56.16	74.00	-17.84	48.75	7.41	Peak	100	234	5	12930.00	42.75	68.20	-25.45	36.71	6.04	Average	100	82	6	12930.00	56.07	88.20	-32.13	50.03	6.04	Peak	100	82
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8620.00	39.58	68.20	-28.62	33.80	5.78	Average	100	218																																																																
2	8620.00	52.55	88.20	-35.65	46.77	5.78	Peak	100	218																																																																
3	10775.00	42.31	54.00	-11.69	34.90	7.41	Average	100	234																																																																
4	10775.00	56.16	74.00	-17.84	48.75	7.41	Peak	100	234																																																																
5	12930.00	42.75	68.20	-25.45	36.71	6.04	Average	100	82																																																																
6	12930.00	56.07	88.20	-32.13	50.03	6.04	Peak	100	82																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

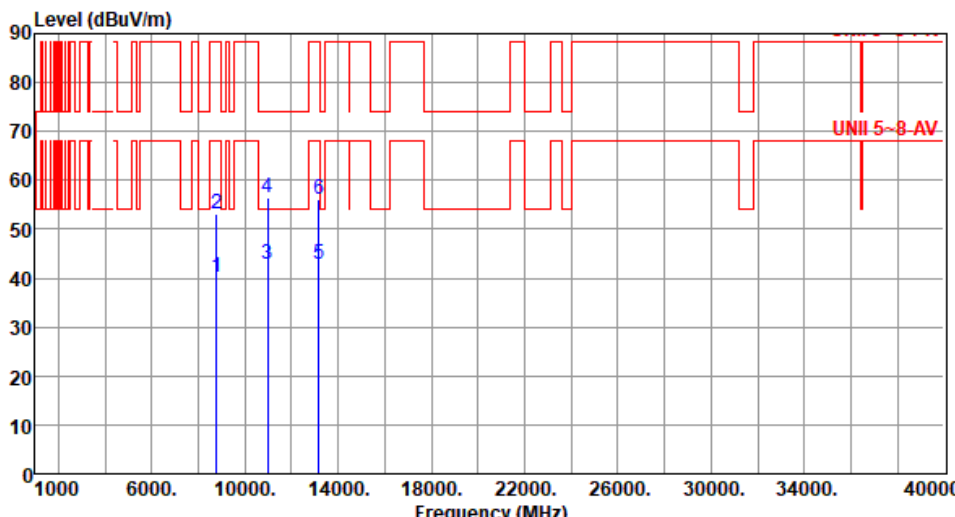


Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8780.00</td><td>40.33</td><td>68.20</td><td>-27.87</td><td>34.00</td><td>6.33</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>2</td><td>8780.00</td><td>53.22</td><td>88.20</td><td>-34.98</td><td>46.89</td><td>6.33</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>3</td><td>10975.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>35.29</td><td>7.61</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>4</td><td>10975.00</td><td>56.57</td><td>74.00</td><td>-17.43</td><td>48.96</td><td>7.61</td><td>Peak</td><td>100</td><td>229</td></tr><tr><td>5</td><td>13170.00</td><td>43.00</td><td>68.20</td><td>-25.20</td><td>37.19</td><td>5.81</td><td>Average</td><td>100</td><td>337</td></tr><tr><td>6</td><td>13170.00</td><td>56.02</td><td>88.20</td><td>-32.18</td><td>50.21</td><td>5.81</td><td>Peak</td><td>100</td><td>337</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8780.00	40.33	68.20	-27.87	34.00	6.33	Average	100	136	2	8780.00	53.22	88.20	-34.98	46.89	6.33	Peak	100	136	3	10975.00	42.90	54.00	-11.10	35.29	7.61	Average	100	229	4	10975.00	56.57	74.00	-17.43	48.96	7.61	Peak	100	229	5	13170.00	43.00	68.20	-25.20	37.19	5.81	Average	100	337	6	13170.00	56.02	88.20	-32.18	50.21	5.81	Peak	100	337
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8780.00	40.33	68.20	-27.87	34.00	6.33	Average	100	136																																																																
2	8780.00	53.22	88.20	-34.98	46.89	6.33	Peak	100	136																																																																
3	10975.00	42.90	54.00	-11.10	35.29	7.61	Average	100	229																																																																
4	10975.00	56.57	74.00	-17.43	48.96	7.61	Peak	100	229																																																																
5	13170.00	43.00	68.20	-25.20	37.19	5.81	Average	100	337																																																																
6	13170.00	56.02	88.20	-32.18	50.21	5.81	Peak	100	337																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT320	Test Freq. (MHz)	6585																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8780.00</td><td>40.28</td><td>68.20</td><td>-27.92</td><td>33.95</td><td>6.33</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>2</td><td>8780.00</td><td>52.92</td><td>88.20</td><td>-35.28</td><td>46.59</td><td>6.33</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>3</td><td>10975.00</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>35.25</td><td>7.61</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>4</td><td>10975.00</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>48.86</td><td>7.61</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>5</td><td>13170.00</td><td>42.94</td><td>68.20</td><td>-25.26</td><td>37.13</td><td>5.81</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>6</td><td>13170.00</td><td>55.99</td><td>88.20</td><td>-32.21</td><td>50.18</td><td>5.81</td><td>Peak</td><td>100</td><td>79</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	8780.00	40.28	68.20	-27.92	33.95	6.33	Average	100	223	2	8780.00	52.92	88.20	-35.28	46.59	6.33	Peak	100	223	3	10975.00	42.86	54.00	-11.14	35.25	7.61	Average	100	137	4	10975.00	56.47	74.00	-17.53	48.86	7.61	Peak	100	137	5	13170.00	42.94	68.20	-25.26	37.13	5.81	Average	100	79	6	13170.00	55.99	88.20	-32.21	50.18	5.81	Peak	100	79
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	8780.00	40.28	68.20	-27.92	33.95	6.33	Average	100	223																																																																																				
2	8780.00	52.92	88.20	-35.28	46.59	6.33	Peak	100	223																																																																																				
3	10975.00	42.86	54.00	-11.14	35.25	7.61	Average	100	137																																																																																				
4	10975.00	56.47	74.00	-17.53	48.86	7.61	Peak	100	137																																																																																				
5	13170.00	42.94	68.20	-25.26	37.13	5.81	Average	100	79																																																																																				
6	13170.00	55.99	88.20	-32.21	50.18	5.81	Peak	100	79																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

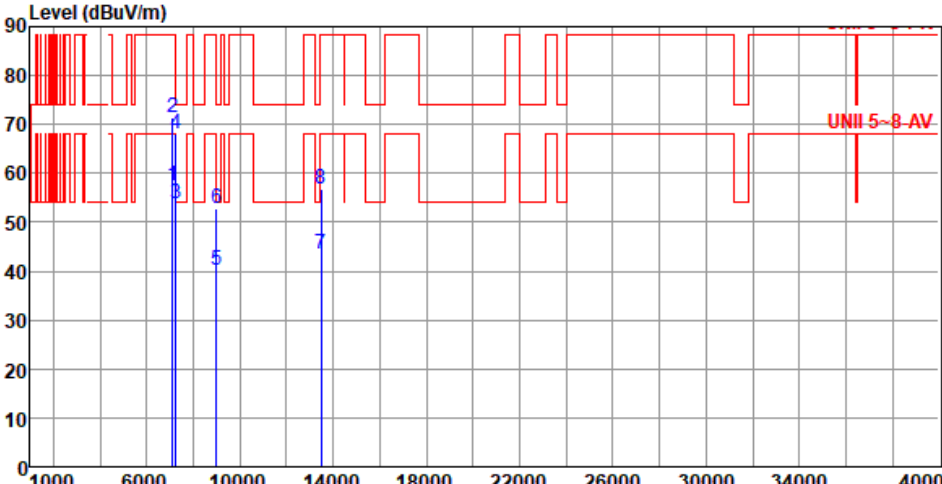

Modulation	be EHT320	Test Freq. (MHz)	6745																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>57.40</td><td>68.20</td><td>-10.80</td><td>52.54</td><td>4.86</td><td>Average</td><td>177</td><td>251</td></tr><tr><td>2</td><td>7125.00</td><td>71.33</td><td>88.20</td><td>-16.87</td><td>66.47</td><td>4.86</td><td>Peak</td><td>177</td><td>251</td></tr><tr><td>3</td><td>7250.00</td><td>53.65</td><td>54.00</td><td>-0.35</td><td>48.44</td><td>5.21</td><td>Average</td><td>177</td><td>251</td></tr><tr><td>4</td><td>7250.00</td><td>68.07</td><td>74.00</td><td>-5.93</td><td>62.86</td><td>5.21</td><td>Peak</td><td>177</td><td>251</td></tr><tr><td>5</td><td>8993.30</td><td>40.19</td><td>68.20</td><td>-28.01</td><td>34.17</td><td>6.02</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>6</td><td>8993.30</td><td>52.97</td><td>88.20</td><td>-35.23</td><td>46.95</td><td>6.02</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>7</td><td>13490.00</td><td>43.63</td><td>68.20</td><td>-24.57</td><td>37.59</td><td>6.04</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>8</td><td>13490.00</td><td>56.90</td><td>88.20</td><td>-31.30</td><td>50.86</td><td>6.04</td><td>Peak</td><td>100</td><td>356</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	57.40	68.20	-10.80	52.54	4.86	Average	177	251	2	7125.00	71.33	88.20	-16.87	66.47	4.86	Peak	177	251	3	7250.00	53.65	54.00	-0.35	48.44	5.21	Average	177	251	4	7250.00	68.07	74.00	-5.93	62.86	5.21	Peak	177	251	5	8993.30	40.19	68.20	-28.01	34.17	6.02	Average	100	118	6	8993.30	52.97	88.20	-35.23	46.95	6.02	Peak	100	118	7	13490.00	43.63	68.20	-24.57	37.59	6.04	Average	100	356	8	13490.00	56.90	88.20	-31.30	50.86	6.04	Peak	100	356
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	7125.00	57.40	68.20	-10.80	52.54	4.86	Average	177	251																																																																																				
2	7125.00	71.33	88.20	-16.87	66.47	4.86	Peak	177	251																																																																																				
3	7250.00	53.65	54.00	-0.35	48.44	5.21	Average	177	251																																																																																				
4	7250.00	68.07	74.00	-5.93	62.86	5.21	Peak	177	251																																																																																				
5	8993.30	40.19	68.20	-28.01	34.17	6.02	Average	100	118																																																																																				
6	8993.30	52.97	88.20	-35.23	46.95	6.02	Peak	100	118																																																																																				
7	13490.00	43.63	68.20	-24.57	37.59	6.04	Average	100	356																																																																																				
8	13490.00	56.90	88.20	-31.30	50.86	6.04	Peak	100	356																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

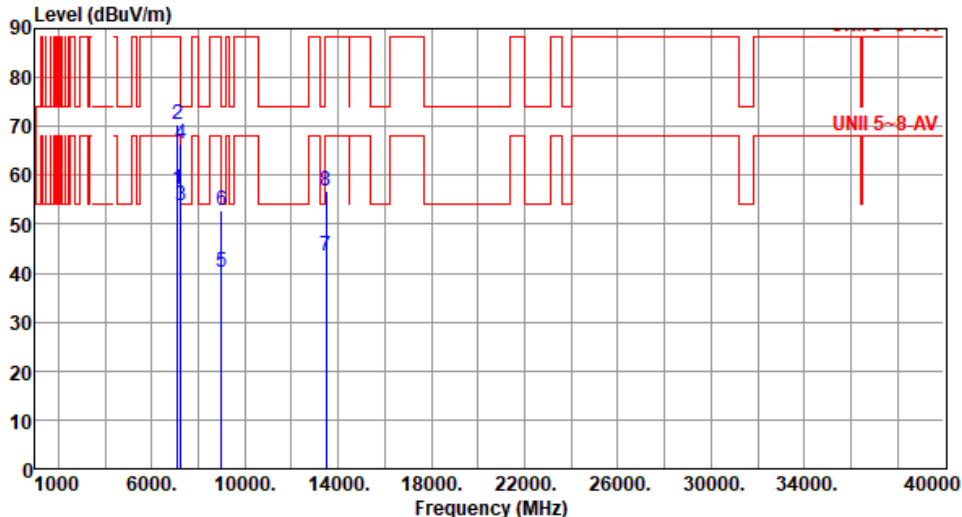

Modulation	be EHT320	Test Freq. (MHz)	6745																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
																																																																																													
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>57.11</td><td>68.20</td><td>-11.09</td><td>52.25</td><td>4.86</td><td>Average</td><td>172</td><td>223</td></tr><tr><td>2</td><td>7125.00</td><td>70.49</td><td>88.20</td><td>-17.71</td><td>65.63</td><td>4.86</td><td>Peak</td><td>172</td><td>223</td></tr><tr><td>3</td><td>7250.00</td><td>53.78</td><td>54.00</td><td>-0.22</td><td>48.57</td><td>5.21</td><td>Average</td><td>164</td><td>241</td></tr><tr><td>4</td><td>7250.00</td><td>66.54</td><td>74.00</td><td>-7.46</td><td>61.33</td><td>5.21</td><td>Peak</td><td>164</td><td>241</td></tr><tr><td>5</td><td>8993.30</td><td>40.11</td><td>68.20</td><td>-28.09</td><td>34.09</td><td>6.02</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>6</td><td>8993.30</td><td>52.73</td><td>88.20</td><td>-35.47</td><td>46.71</td><td>6.02</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>7</td><td>13490.00</td><td>43.50</td><td>68.20</td><td>-24.70</td><td>37.46</td><td>6.04</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>8</td><td>13490.00</td><td>56.80</td><td>88.20</td><td>-31.40</td><td>50.76</td><td>6.04</td><td>Peak</td><td>100</td><td>81</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	57.11	68.20	-11.09	52.25	4.86	Average	172	223	2	7125.00	70.49	88.20	-17.71	65.63	4.86	Peak	172	223	3	7250.00	53.78	54.00	-0.22	48.57	5.21	Average	164	241	4	7250.00	66.54	74.00	-7.46	61.33	5.21	Peak	164	241	5	8993.30	40.11	68.20	-28.09	34.09	6.02	Average	100	226	6	8993.30	52.73	88.20	-35.47	46.71	6.02	Peak	100	226	7	13490.00	43.50	68.20	-24.70	37.46	6.04	Average	100	81	8	13490.00	56.80	88.20	-31.40	50.76	6.04	Peak	100	81
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	7125.00	57.11	68.20	-11.09	52.25	4.86	Average	172	223																																																																																				
2	7125.00	70.49	88.20	-17.71	65.63	4.86	Peak	172	223																																																																																				
3	7250.00	53.78	54.00	-0.22	48.57	5.21	Average	164	241																																																																																				
4	7250.00	66.54	74.00	-7.46	61.33	5.21	Peak	164	241																																																																																				
5	8993.30	40.11	68.20	-28.09	34.09	6.02	Average	100	226																																																																																				
6	8993.30	52.73	88.20	-35.47	46.71	6.02	Peak	100	226																																																																																				
7	13490.00	43.50	68.20	-24.70	37.46	6.04	Average	100	81																																																																																				
8	13490.00	56.80	88.20	-31.40	50.76	6.04	Peak	100	81																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT320	Test Freq. (MHz)	6905
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):63			
Level (dBuV/m) <			



Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>55.57</td><td>68.20</td><td>-12.63</td><td>50.71</td><td>4.86</td><td>Average</td><td>189</td><td>227</td></tr><tr><td>2</td><td>7125.00</td><td>67.34</td><td>88.20</td><td>-20.86</td><td>62.48</td><td>4.86</td><td>Peak</td><td>189</td><td>227</td></tr><tr><td>3</td><td>7250.00</td><td>52.60</td><td>54.00</td><td>-1.40</td><td>47.39</td><td>5.21</td><td>Average</td><td>189</td><td>227</td></tr><tr><td>4</td><td>7250.00</td><td>64.97</td><td>74.00</td><td>-9.03</td><td>59.76</td><td>5.21</td><td>Peak</td><td>189</td><td>227</td></tr><tr><td>5</td><td>9206.60</td><td>41.21</td><td>68.20</td><td>-26.99</td><td>34.38</td><td>6.83</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>6</td><td>9206.60</td><td>54.21</td><td>88.20</td><td>-33.99</td><td>47.38</td><td>6.83</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>7</td><td>13810.00</td><td>44.07</td><td>68.20</td><td>-24.13</td><td>37.84</td><td>6.23</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>8</td><td>13810.00</td><td>57.09</td><td>88.20</td><td>-31.11</td><td>50.86</td><td>6.23</td><td>Peak</td><td>100</td><td>84</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	55.57	68.20	-12.63	50.71	4.86	Average	189	227	2	7125.00	67.34	88.20	-20.86	62.48	4.86	Peak	189	227	3	7250.00	52.60	54.00	-1.40	47.39	5.21	Average	189	227	4	7250.00	64.97	74.00	-9.03	59.76	5.21	Peak	189	227	5	9206.60	41.21	68.20	-26.99	34.38	6.83	Average	100	206	6	9206.60	54.21	88.20	-33.99	47.38	6.83	Peak	100	206	7	13810.00	44.07	68.20	-24.13	37.84	6.23	Average	100	84	8	13810.00	57.09	88.20	-31.11	50.86	6.23	Peak	100	84
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	7125.00	55.57	68.20	-12.63	50.71	4.86	Average	189	227																																																																																				
2	7125.00	67.34	88.20	-20.86	62.48	4.86	Peak	189	227																																																																																				
3	7250.00	52.60	54.00	-1.40	47.39	5.21	Average	189	227																																																																																				
4	7250.00	64.97	74.00	-9.03	59.76	5.21	Peak	189	227																																																																																				
5	9206.60	41.21	68.20	-26.99	34.38	6.83	Average	100	206																																																																																				
6	9206.60	54.21	88.20	-33.99	47.38	6.83	Peak	100	206																																																																																				
7	13810.00	44.07	68.20	-24.13	37.84	6.23	Average	100	84																																																																																				
8	13810.00	57.09	88.20	-31.11	50.86	6.23	Peak	100	84																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.18059G	-8.81	6.1935G	-40.69	-33.85	-6.84	1
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	5.97859G	-7.02	5.9974G	-37.11	-30.58	-6.53	1
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	5.99939G	-4.09	6.0286G	-31.25	-24.16	-7.09	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.10092G	-0.08	6.2698G	-47.28	-39.97	-7.31	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.1498G	2.80	6.5978G	-41.96	-36.98	-4.98	3
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.4726G	-8.97	6.4595G	-38.26	-30.75	-7.51	3
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.4818G	-6.98	6.452G	-38.36	-31.51	-6.85	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.55579G	-2.61	6.3846G	-49.19	-42.61	-6.58	1
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.44186G	-0.24	6.2594G	-48.15	-39.94	-8.21	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.5514G	3.30	7.1354G	-39.71	-36.70	-3.01	3
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.84881G	-10.40	6.8376G	-40.95	-34.26	-6.69	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.7216G	-6.60	6.687G	-39.92	-33.25	-6.67	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.77381G	-4.54	6.6246G	-50.34	-44.54	-5.80	1
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.63943G	-0.72	6.4186G	-49.40	-40.39	-9.01	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.88871G	-9.79	6.8779G	-40.33	-33.69	-6.64	1
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	7.07881G	-8.45	7.0512G	-38.76	-32.77	-5.99	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	7.01261G	-4.74	6.8646G	-49.18	-44.74	-4.44	1
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.90908G	-0.49	6.741G	-46.97	-40.15	-6.82	1
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.7098G	3.01	7.2394G	-39.98	-36.89	-3.09	3

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9599G	-8.90	5.9734G	-39.77	-31.99	-7.78	1
5955MHz	Pass	5.96009G	-9.22	5.972G	-39.36	-30.18	-9.18	2
5955MHz	Pass	5.9599G	-8.94	5.9709G	-38.23	-29.16	-9.07	3
5955MHz	Pass	5.9599G	-9.89	6.0038G	-59.53	-49.89	-9.64	4
6175MHz	Pass	6.18059G	-8.81	6.1935G	-40.69	-33.85	-6.84	1
6175MHz	Pass	6.1786G	-8.77	6.158G	-39.29	-31.26	-8.03	2
6175MHz	Pass	6.1774G	-8.82	6.1603G	-37.85	-29.26	-8.59	3
6175MHz	Pass	6.1712G	-9.13	6.1591G	-39.07	-29.28	-9.79	4
6415MHz	Pass	6.4137G	-9.05	6.3971G	-40.18	-32.50	-7.68	1
6415MHz	Pass	6.4199G	-8.52	6.3991G	-38.39	-29.81	-8.58	2
6415MHz	Pass	6.4172G	-9.23	6.3997G	-38.62	-29.26	-9.36	3
6415MHz	Pass	6.40991G	-9.55	6.4001G	-38.67	-29.90	-8.77	4
6435MHz	Pass	6.42861G	-8.81	6.4203G	-37.73	-29.03	-8.70	1
6435MHz	Pass	6.4399G	-8.81	6.4201G	-38.16	-29.58	-8.58	2
6435MHz	Pass	6.42991G	-9.33	6.419G	-38.87	-29.65	-9.22	3
6435MHz	Pass	6.42871G	-9.56	6.4202G	-38.31	-30.28	-8.03	4
6475MHz	Pass	6.4786G	-8.74	6.4584G	-38.73	-30.29	-8.44	1
6475MHz	Pass	6.4774G	-8.72	6.4577G	-39.45	-31.42	-8.03	2
6475MHz	Pass	6.4726G	-8.97	6.4595G	-38.26	-30.75	-7.51	3
6475MHz	Pass	6.47G	-9.48	6.4599G	-38.56	-30.07	-8.49	4
6515MHz	Pass	6.5198G	-8.40	6.5301G	-37.69	-29.28	-8.41	1
6515MHz	Pass	6.5173G	-8.73	6.4712G	-58.53	-48.61	-9.92	2
6515MHz	Pass	6.5124G	-8.85	6.5001G	-38.07	-29.02	-9.05	3
6515MHz	Pass	6.5173G	-9.29	6.5304G	-38.70	-29.46	-9.24	4
6535MHz	Pass	6.5374G	-8.47	6.5207G	-37.25	-28.54	-8.71	1
6535MHz	Pass	6.5374G	-8.73	6.5183G	-39.18	-30.12	-9.06	2
6535MHz	Pass	6.5374G	-8.92	6.5179G	-39.57	-30.72	-8.85	3
6535MHz	Pass	6.5325G	-9.45	6.4905G	-58.79	-49.45	-9.34	4
6715MHz	Pass	6.7162G	-8.48	6.7002G	-37.30	-29.30	-8.00	1
6715MHz	Pass	6.70981G	-8.52	6.6988G	-38.37	-29.29	-9.08	2
6715MHz	Pass	6.7112G	-8.60	6.6997G	-37.84	-29.69	-8.15	3
6715MHz	Pass	6.7111G	-9.28	6.6968G	-40.17	-32.14	-8.03	4
6855MHz	Pass	6.8599G	-10.16	6.8937G	-57.97	-50.06	-7.91	1
6855MHz	Pass	6.8512G	-10.25	6.8364G	-41.78	-34.57	-7.21	2
6855MHz	Pass	6.8586G	-9.92	6.8397G	-38.88	-31.73	-7.15	3
6855MHz	Pass	6.84881G	-10.40	6.8376G	-40.95	-34.26	-6.69	4
6875MHz Straddle 6.875-7.125GHz	Pass	6.86761G	-9.57	6.9182G	-58.15	-49.57	-8.58	1
6875MHz Straddle 6.875-7.125GHz	Pass	6.8727G	-9.71	6.8586G	-39.84	-32.48	-7.36	2
6875MHz Straddle 6.875-7.125GHz	Pass	6.86921G	-9.17	6.9195G	-58.23	-49.17	-9.06	3
6875MHz Straddle 6.875-7.125GHz	Pass	6.86861G	-9.94	6.922G	-58.29	-49.94	-8.35	4
6895MHz	Pass	6.88871G	-9.79	6.8779G	-40.33	-33.69	-6.64	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.88991G	-9.88	6.9367G	-57.92	-49.88	-8.04	2
6895MHz	Pass	6.8988G	-9.56	6.9361G	-57.94	-49.56	-8.38	3
6895MHz	Pass	6.88981G	-10.04	6.9436G	-58.12	-50.04	-8.08	4
7015MHz	Pass	7.0186G	-10.30	6.9694G	-57.86	-50.30	-7.56	1
7015MHz	Pass	7.00991G	-9.52	6.9736G	-57.67	-49.52	-8.15	2
7015MHz	Pass	7.00871G	-10.23	6.9715G	-57.78	-50.23	-7.55	3
7015MHz	Pass	7.0124G	-10.79	6.975G	-57.75	-50.79	-6.96	4
7095MHz	Pass	7.0937G	-10.27	7.1431G	-58.58	-50.27	-8.31	1
7095MHz	Pass	7.0999G	-10.12	7.1406G	-58.57	-50.12	-8.45	2
7095MHz	Pass	7.08871G	-10.49	7.1366G	-58.25	-50.49	-7.76	3
7095MHz	Pass	7.08991G	-11.27	7.1407G	-58.56	-51.27	-7.29	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.97859G	-7.02	5.9974G	-37.11	-30.58	-6.53	1
5965MHz	Pass	5.97239G	-7.36	6.0024G	-39.00	-32.21	-6.79	2
5965MHz	Pass	5.9698G	-7.04	6.0024G	-38.85	-31.41	-7.44	3
5965MHz	Pass	5.97759G	-7.20	5.9942G	-36.15	-28.90	-7.25	4
6165MHz	Pass	6.17119G	-6.92	6.1962G	-37.78	-30.49	-7.29	1
6165MHz	Pass	6.1688G	-6.58	6.1972G	-38.30	-30.32	-7.98	2
6165MHz	Pass	6.17019G	-6.27	6.1324G	-37.79	-30.24	-7.55	3
6165MHz	Pass	6.1698G	-7.01	6.1966G	-38.05	-30.41	-7.64	4
6405MHz	Pass	6.4086G	-6.62	6.3734G	-37.37	-30.35	-7.02	1
6405MHz	Pass	6.41G	-6.77	6.4398G	-39.27	-31.73	-7.54	2
6405MHz	Pass	6.41219G	-6.83	6.3766G	-36.76	-27.60	-9.16	3
6405MHz	Pass	6.41139G	-7.36	6.3684G	-40.10	-32.76	-7.34	4
6445MHz	Pass	6.43861G	-6.42	6.4118G	-37.94	-29.78	-8.16	1
6445MHz	Pass	6.43841G	-5.86	6.412G	-37.34	-30.03	-7.31	2
6445MHz	Pass	6.4422G	-6.31	6.411G	-38.41	-31.03	-7.38	3
6445MHz	Pass	6.43821G	-6.89	6.4104G	-39.06	-31.89	-7.17	4
6485MHz	Pass	6.47881G	-6.78	6.4482G	-39.73	-32.57	-7.16	1
6485MHz	Pass	6.48G	-6.26	6.4504G	-38.44	-31.18	-7.26	2
6485MHz	Pass	6.48G	-6.57	6.4514G	-38.38	-30.97	-7.41	3
6485MHz	Pass	6.4818G	-6.98	6.452G	-38.36	-31.51	-6.85	4
6525MHz Straddle 6.425-6.525GHz	Pass	6.53239G	-6.53	6.4926G	-37.67	-30.46	-7.21	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.529G	-6.11	6.492G	-37.49	-30.40	-7.09	2
6525MHz Straddle 6.425-6.525GHz	Pass	6.5278G	-6.35	6.5626G	-39.71	-32.14	-7.57	3
6525MHz Straddle 6.425-6.525GHz	Pass	6.53039G	-6.49	6.5588G	-38.46	-31.15	-7.31	4
6565MHz	Pass	6.5604G	-6.64	6.5306G	-38.73	-31.40	-7.33	1
6565MHz	Pass	6.55981G	-6.43	6.5286G	-39.36	-31.97	-7.39	2
6565MHz	Pass	6.56G	-6.32	6.5312G	-38.44	-30.88	-7.56	3
6565MHz	Pass	6.5698G	-6.83	6.527G	-40.28	-33.00	-7.28	4
6725MHz	Pass	6.73099G	-6.99	6.6874G	-40.20	-33.05	-7.15	1
6725MHz	Pass	6.71981G	-5.95	6.6914G	-37.86	-30.51	-7.35	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6725MHz	Pass	6.73099G	-6.43	6.6912G	-38.22	-30.56	-7.66	3
6725MHz	Pass	6.7216G	-6.60	6.687G	-39.92	-33.25	-6.67	4
6845MHz	Pass	6.83741G	-7.13	6.8124G	-38.12	-31.14	-6.98	1
6845MHz	Pass	6.85G	-6.62	6.8062G	-40.20	-33.40	-6.80	2
6845MHz	Pass	6.83941G	-6.48	6.8074G	-39.73	-32.64	-7.09	3
6845MHz	Pass	6.841G	-7.03	6.812G	-38.07	-31.20	-6.87	4
6885MHz Straddle 6.875-7.125GHz	Pass	6.87781G	-7.23	6.8462G	-40.63	-33.36	-7.27	1
6885MHz Straddle 6.875-7.125GHz	Pass	6.87981G	-6.54	6.8522G	-37.95	-29.50	-8.45	2
6885MHz Straddle 6.875-7.125GHz	Pass	6.87861G	-6.73	6.8504G	-38.42	-31.73	-6.69	3
6885MHz Straddle 6.875-7.125GHz	Pass	6.8812G	-6.99	6.8512G	-38.47	-31.62	-6.85	4
6925MHz	Pass	6.91601G	-7.01	6.9988G	-54.94	-47.01	-7.93	1
6925MHz	Pass	6.92G	-6.60	6.8888G	-38.97	-32.11	-6.86	2
6925MHz	Pass	6.91901G	-6.51	6.894G	-36.93	-29.01	-7.92	3
6925MHz	Pass	6.91881G	-6.75	6.8884G	-39.09	-31.58	-7.51	4
7005MHz	Pass	6.99981G	-7.60	6.9664G	-40.88	-34.20	-6.68	1
7005MHz	Pass	6.99961G	-6.84	6.9678G	-39.60	-32.70	-6.90	2
7005MHz	Pass	6.99981G	-7.29	6.9738G	-37.72	-30.86	-6.86	3
7005MHz	Pass	7.0002G	-7.33	6.9702G	-39.05	-32.29	-6.76	4
7085MHz	Pass	7.081G	-8.67	7.0074G	-55.59	-48.67	-6.92	1
7085MHz	Pass	7.07881G	-7.83	7.0544G	-37.05	-29.68	-7.37	2
7085MHz	Pass	7.07981G	-8.34	7.0478G	-39.88	-33.64	-6.24	3
7085MHz	Pass	7.07881G	-8.45	7.0512G	-38.76	-32.77	-5.99	4
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.99499G	-4.20	6.0286G	-31.45	-24.27	-7.18	1
5985MHz	Pass	5.99739G	-4.39	6.0294G	-31.97	-24.43	-7.54	2
5985MHz	Pass	5.99739G	-4.19	6.0298G	-32.00	-24.21	-7.79	3
5985MHz	Pass	5.99939G	-4.09	6.0286G	-31.25	-24.16	-7.09	4
6145MHz	Pass	6.15819G	-3.34	6.305G	-51.12	-43.34	-7.78	1
6145MHz	Pass	6.15659G	-3.44	6.1014G	-32.12	-23.51	-8.61	2
6145MHz	Pass	6.15699G	-3.40	6.1018G	-31.70	-23.42	-8.28	3
6145MHz	Pass	6.15659G	-3.63	6.1882G	-31.96	-23.70	-8.26	4
6385MHz	Pass	6.37301G	-3.85	6.2246G	-51.55	-43.85	-7.70	1
6385MHz	Pass	6.37141G	-4.12	6.3418G	-31.93	-24.16	-7.77	2
6385MHz	Pass	6.39699G	-4.16	6.2074G	-52.44	-44.16	-8.28	3
6385MHz	Pass	6.37341G	-4.19	6.3426G	-31.50	-24.21	-7.29	4
6465MHz	Pass	6.45261G	-2.87	6.305G	-50.14	-42.87	-7.27	1
6465MHz	Pass	6.45301G	-2.76	6.285G	-51.68	-42.76	-8.92	2
6465MHz	Pass	6.45141G	-3.09	6.4226G	-30.32	-23.11	-7.21	3
6465MHz	Pass	6.45101G	-2.85	6.4222G	-30.34	-22.87	-7.47	4
6545MHz Straddle 6.425-6.525GHz	Pass	6.55579G	-2.61	6.3846G	-49.19	-42.61	-6.58	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.55819G	-2.68	6.5018G	-30.66	-22.68	-7.98	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.55739G	-2.58	6.4922G	-33.43	-23.98	-9.45	3


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6545MHz Straddle 6.425-6.525GHz	Pass	6.55699G	-2.51	6.5026G	-29.64	-22.51	-7.13	4
6625MHz	Pass	6.61021G	-3.09	6.4646G	-49.55	-43.09	-6.46	1
6625MHz	Pass	6.61261G	-3.72	6.5818G	-31.64	-23.79	-7.85	2
6625MHz	Pass	6.63619G	-3.66	6.459G	-52.03	-43.66	-8.37	3
6625MHz	Pass	6.63619G	-3.71	6.459G	-51.97	-43.71	-8.26	4
6705MHz	Pass	6.69581G	-3.69	6.5446G	-50.76	-43.69	-7.07	1
6705MHz	Pass	6.69141G	-3.76	6.6618G	-31.94	-23.83	-8.11	2
6705MHz	Pass	6.69141G	-3.64	6.6626G	-31.13	-23.66	-7.47	3
6705MHz	Pass	6.69381G	-3.61	6.6622G	-31.06	-23.68	-7.38	4
6785MHz	Pass	6.77381G	-4.54	6.6246G	-50.34	-44.54	-5.80	1
6785MHz	Pass	6.77181G	-4.37	6.9138G	-52.29	-44.37	-7.92	2
6785MHz	Pass	6.77381G	-3.98	6.9546G	-52.08	-43.98	-8.10	3
6785MHz	Pass	6.77381G	-4.37	6.955G	-52.14	-44.37	-7.77	4
6865MHz Straddle 6.875-7.125GHz	Pass	6.85221G	-4.05	6.7046G	-49.71	-44.05	-5.66	1
6865MHz Straddle 6.875-7.125GHz	Pass	6.85261G	-4.12	6.9962G	-51.91	-44.12	-7.79	2
6865MHz Straddle 6.875-7.125GHz	Pass	6.85341G	-3.61	6.8218G	-31.51	-23.61	-7.90	3
6865MHz Straddle 6.875-7.125GHz	Pass	6.85301G	-4.06	6.993G	-51.76	-44.06	-7.70	4
6945MHz	Pass	6.93261G	-3.73	6.7846G	-48.30	-43.73	-4.57	1
6945MHz	Pass	6.93221G	-3.81	6.9026G	-30.42	-23.83	-6.59	2
6945MHz	Pass	6.93341G	-3.73	6.9014G	-31.52	-23.80	-7.72	3
6945MHz	Pass	6.93101G	-3.79	6.9014G	-31.44	-23.89	-7.55	4
7025MHz	Pass	7.01261G	-4.74	6.8646G	-49.18	-44.74	-4.44	1
7025MHz	Pass	7.01381G	-4.21	6.9814G	-31.99	-24.25	-7.74	2
7025MHz	Pass	7.01381G	-4.50	6.9818G	-31.87	-24.52	-7.35	3
7025MHz	Pass	7.01221G	-4.70	6.9818G	-32.02	-24.74	-7.28	4
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.10092G	-0.23	6.2698G	-48.32	-39.89	-8.43	1
6025MHz	Pass	6.04978G	-0.28	6.269G	-48.97	-40.17	-8.80	2
6025MHz	Pass	6.04658G	-0.41	6.269G	-48.65	-40.19	-8.46	3
6025MHz	Pass	6.10092G	-0.08	6.2698G	-47.28	-39.97	-7.31	4
6185MHz	Pass	6.26092G	-0.17	6.4282G	-49.45	-39.60	-9.85	1
6185MHz	Pass	6.16182G	0.16	6.429G	-49.13	-39.50	-9.63	2
6185MHz	Pass	6.24574G	-0.12	6.4282G	-49.50	-39.55	-9.95	3
6185MHz	Pass	6.24814G	0.12	6.4282G	-49.11	-39.31	-9.80	4
6345MHz	Pass	6.32102G	-1.10	6.5882G	-51.48	-40.53	-10.95	1
6345MHz	Pass	6.32102G	-1.07	6.5882G	-51.05	-40.73	-10.32	2
6345MHz	Pass	6.32102G	-0.80	6.589G	-51.09	-40.35	-10.74	3
6345MHz	Pass	6.31863G	-0.53	6.5898G	-51.16	-40.31	-10.85	4
6505MHz Straddle 6.425-6.525GHz	Pass	6.44266G	-0.75	6.2618G	-49.31	-40.15	-9.16	1
6505MHz Straddle 6.425-6.525GHz	Pass	6.44266G	-0.76	6.2618G	-49.79	-40.26	-9.53	2
6505MHz Straddle 6.425-6.525GHz	Pass	6.52898G	-0.43	6.261G	-49.45	-40.00	-9.45	3
6505MHz Straddle 6.425-6.525GHz	Pass	6.44186G	-0.24	6.2594G	-48.15	-39.94	-8.21	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6665MHz	Pass	6.63943G	-0.72	6.4186G	-49.40	-40.39	-9.01	1
6665MHz	Pass	6.69137G	-0.85	6.4202G	-50.31	-40.63	-9.68	2
6665MHz	Pass	6.64102G	-1.07	6.4218G	-49.81	-40.50	-9.31	3
6665MHz	Pass	6.68898G	-0.55	6.4218G	-49.20	-39.98	-9.22	4
6825MHz Straddle 6.875-7.125GHz	Pass	6.80182G	-1.17	6.5802G	-50.93	-40.91	-10.02	1
6825MHz Straddle 6.875-7.125GHz	Pass	6.76266G	-0.59	6.5818G	-49.88	-40.04	-9.84	2
6825MHz Straddle 6.875-7.125GHz	Pass	6.79783G	-1.03	6.5818G	-50.81	-40.38	-10.43	3
6825MHz Straddle 6.875-7.125GHz	Pass	6.79943G	-1.06	6.581G	-50.54	-40.63	-9.91	4
6985MHz	Pass	6.90908G	-0.49	6.741G	-46.97	-40.15	-6.82	1
6985MHz	Pass	6.90908G	-0.50	6.7402G	-47.33	-40.16	-7.17	2
6985MHz	Pass	6.90908G	-0.74	6.7402G	-48.36	-40.40	-7.96	3
6985MHz	Pass	6.90988G	-0.49	6.741G	-47.82	-40.15	-7.67	4
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.2073G	3.25	6.601G	-41.91	-36.75	-5.16	1
6105MHz	Pass	6.1386G	2.84	6.5994G	-42.67	-37.16	-5.51	2
6105MHz	Pass	6.1498G	2.80	6.5978G	-41.96	-36.98	-4.98	3
6105MHz	Pass	6.2105G	3.13	6.6042G	-42.93	-36.87	-6.06	4
6265MHz	Pass	6.2986G	2.97	6.761G	-42.87	-37.03	-5.84	1
6265MHz	Pass	6.2986G	3.24	6.7658G	-41.79	-36.76	-5.03	2
6265MHz	Pass	6.2986G	3.16	6.7642G	-41.87	-36.84	-5.03	3
6265MHz	Pass	6.3002G	3.34	6.761G	-41.95	-36.66	-5.29	4
6425MHz Straddle 5.925-6.425GHz	Pass	6.3914G	3.20	6.9258G	-41.87	-36.80	-5.07	1
6425MHz Straddle 5.925-6.425GHz	Pass	6.4586G	3.25	6.9546G	-42.49	-36.75	-5.74	2
6425MHz Straddle 5.925-6.425GHz	Pass	6.3914G	3.16	6.961G	-42.44	-36.77	-5.67	3
6425MHz Straddle 5.925-6.425GHz	Pass	6.3914G	3.16	6.9626G	-43.41	-36.84	-6.57	4
6585MHz Straddle 6.425-6.525GHz	Pass	6.5498G	2.99	7.1258G	-40.89	-37.01	-3.88	1
6585MHz Straddle 6.425-6.525GHz	Pass	6.5514G	3.39	7.1082G	-40.10	-36.61	-3.49	2
6585MHz Straddle 6.425-6.525GHz	Pass	6.5514G	3.30	7.1354G	-39.71	-36.70	-3.01	3
6585MHz Straddle 6.425-6.525GHz	Pass	6.5514G	3.37	7.137G	-39.94	-36.63	-3.31	4
6745MHz Straddle 6.875-7.125GHz	Pass	6.7146G	2.87	7.241G	-41.05	-37.13	-3.92	1
6745MHz Straddle 6.875-7.125GHz	Pass	6.7098G	2.53	7.2442G	-42.64	-37.47	-5.17	2
6745MHz Straddle 6.875-7.125GHz	Pass	6.7098G	3.01	7.2394G	-39.98	-36.89	-3.09	3
6745MHz Straddle 6.875-7.125GHz	Pass	6.7114G	2.96	7.2426G	-40.72	-37.04	-3.68	4
6905MHz Straddle 6.875-7.125GHz	Pass	6.8011G	0.67	7.4042G	-46.86	-39.33	-7.53	1
6905MHz Straddle 6.875-7.125GHz	Pass	6.7995G	0.96	7.4026G	-46.61	-39.04	-7.57	2
6905MHz Straddle 6.875-7.125GHz	Pass	6.8043G	0.63	7.401G	-47.05	-39.37	-7.68	3
6905MHz Straddle 6.875-7.125GHz	Pass	6.8027G	0.89	7.401G	-47.01	-39.11	-7.90	4

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


5955MHz_TX

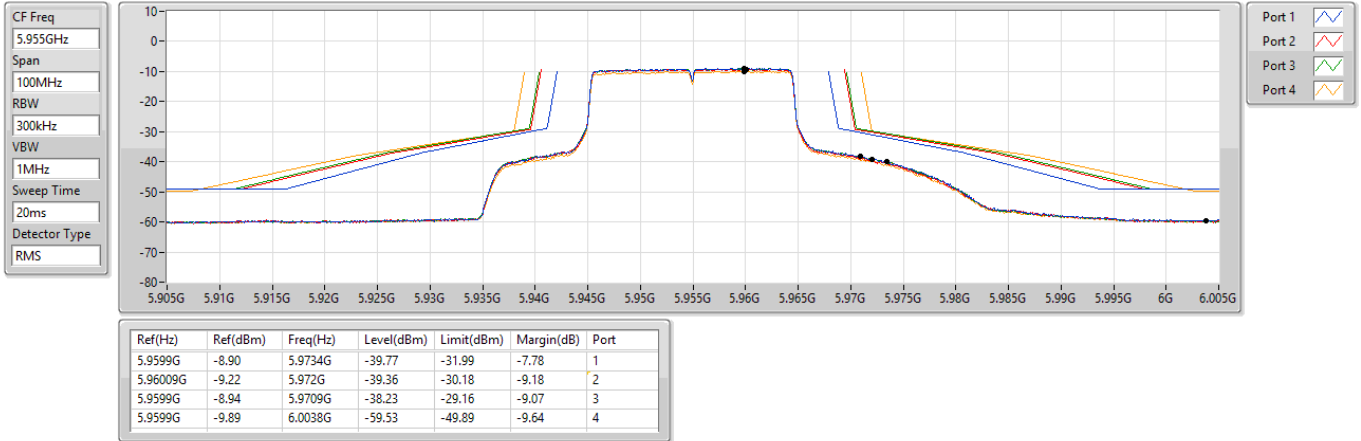

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6175MHz_TX

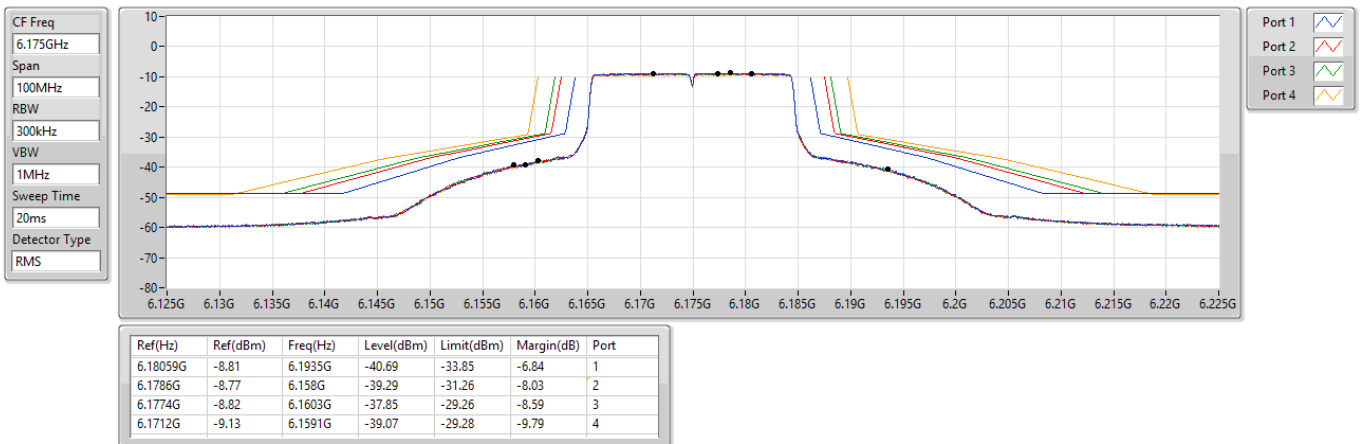

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6415MHz_TX

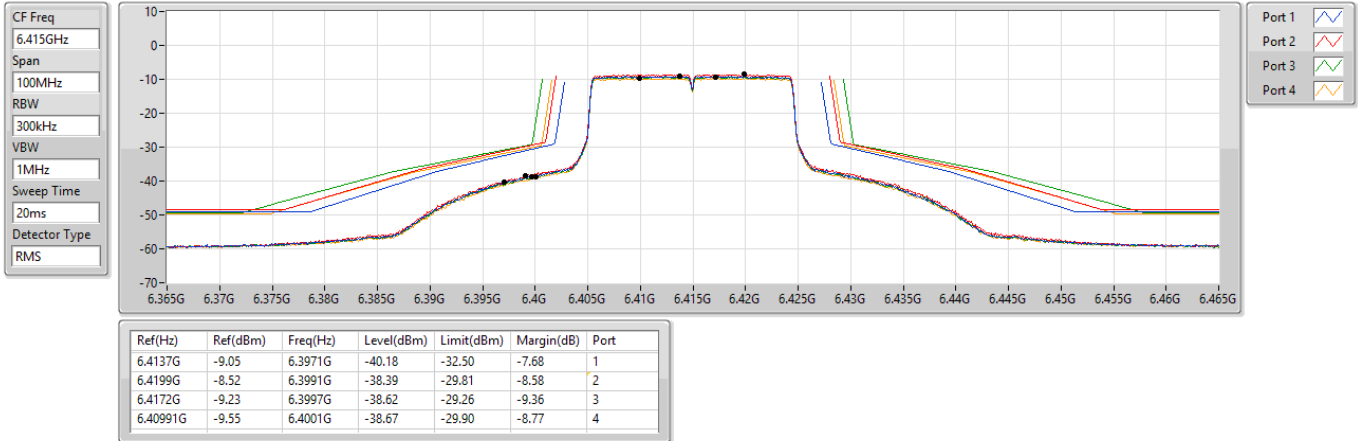

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6435MHz_TX

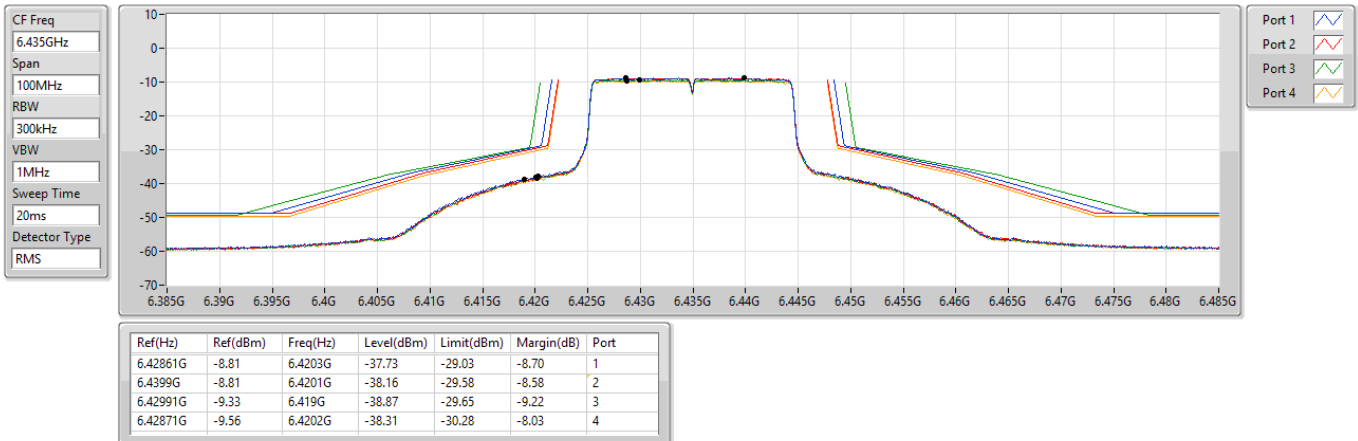

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6475MHz_TX

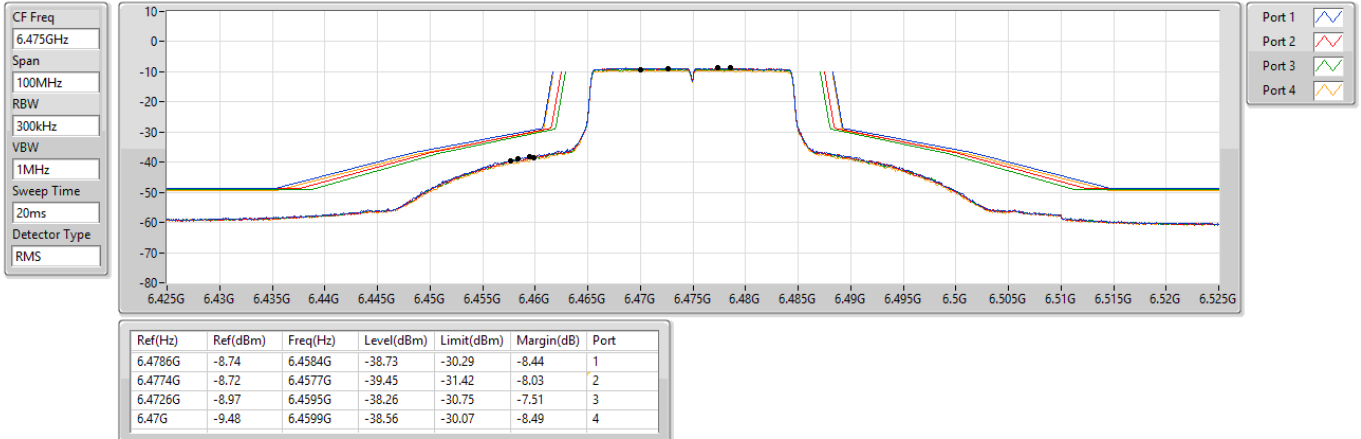

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6515MHz_TX

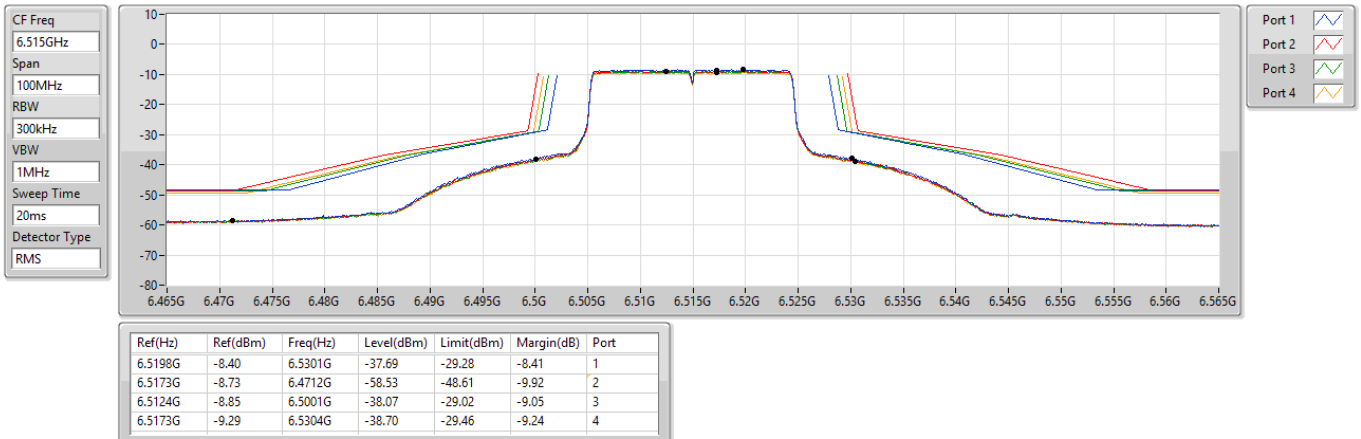

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6535MHz_TX

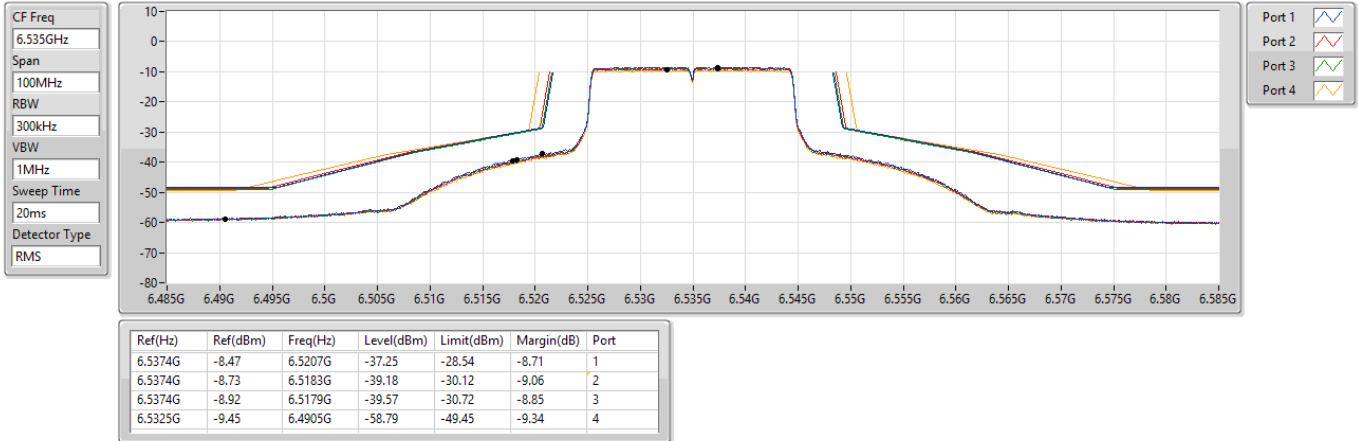

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6715MHz_TX

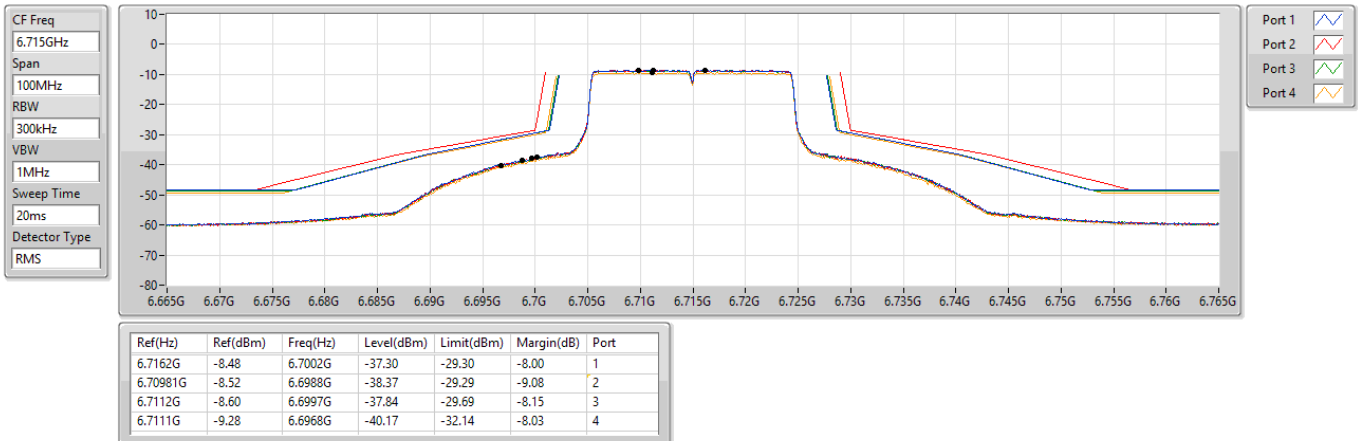

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6855MHz_TX

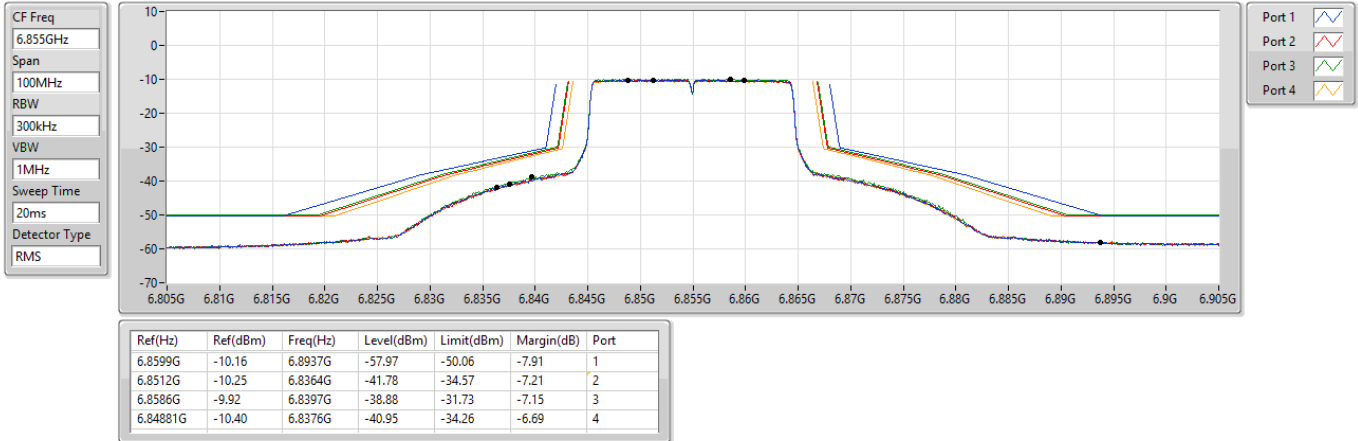

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6875MHz Straddle 6.875-7.125GHz_TX

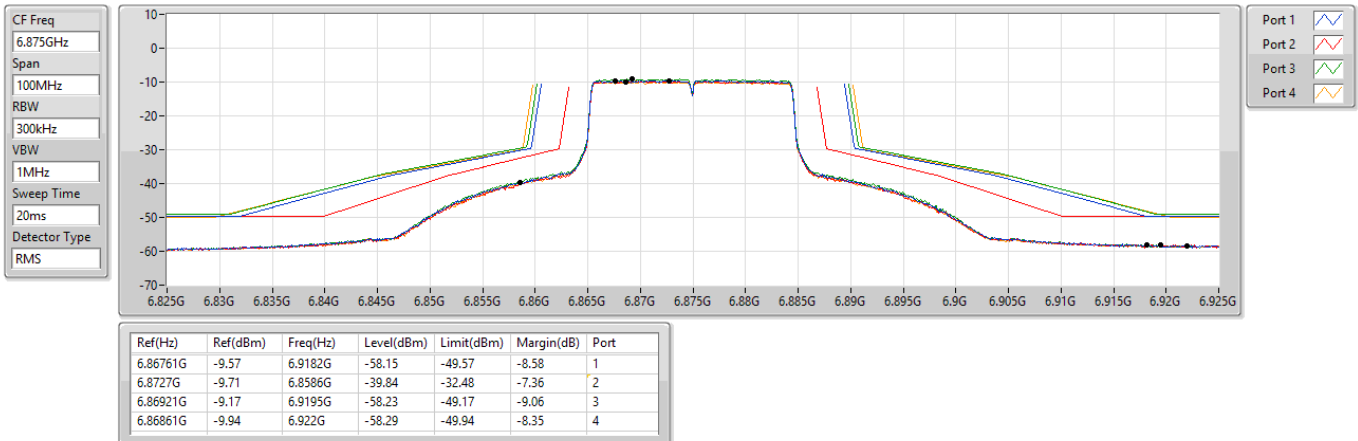

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6895MHz_TX

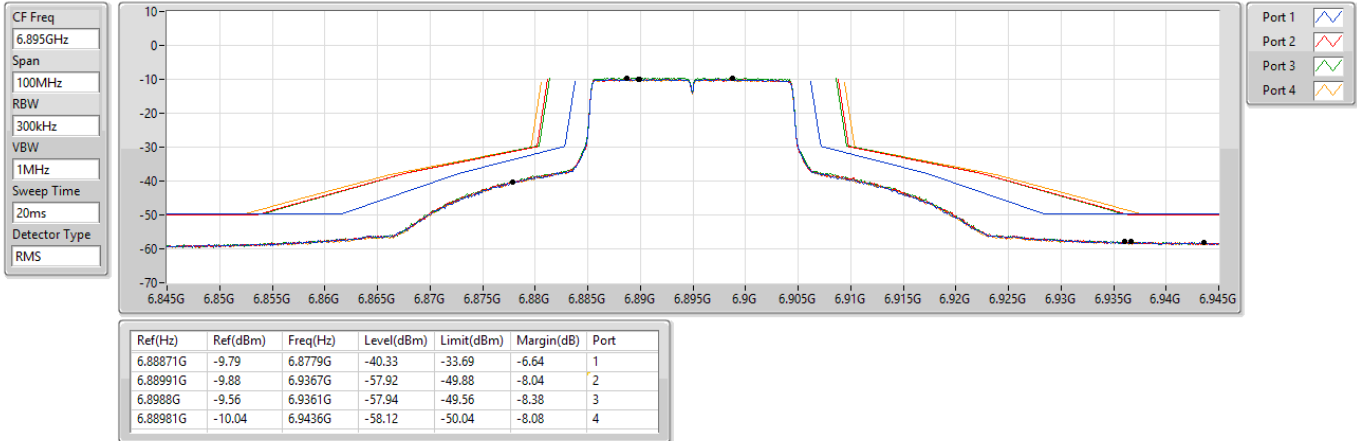

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7015MHz_TX

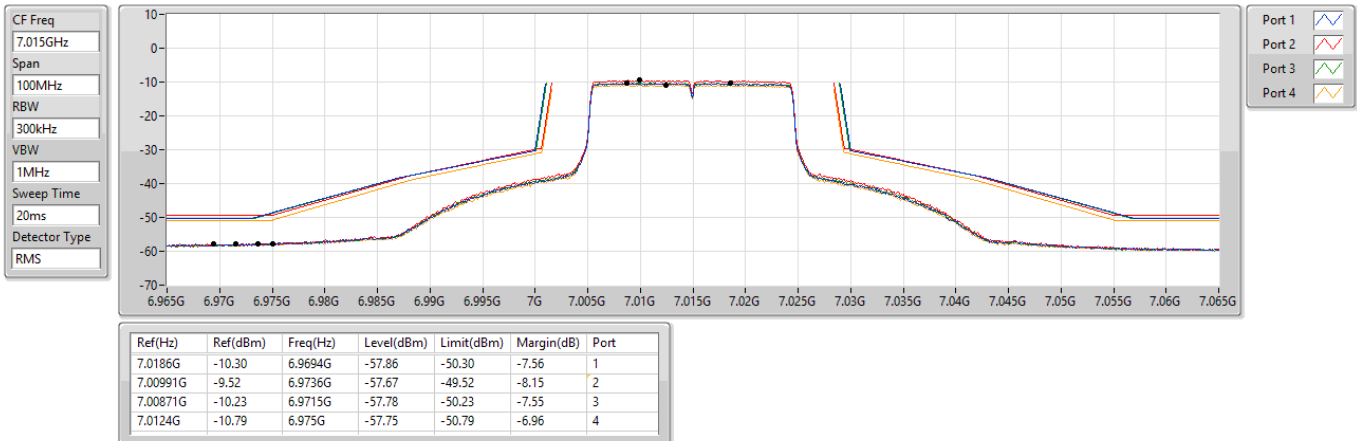

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7095MHz_TX

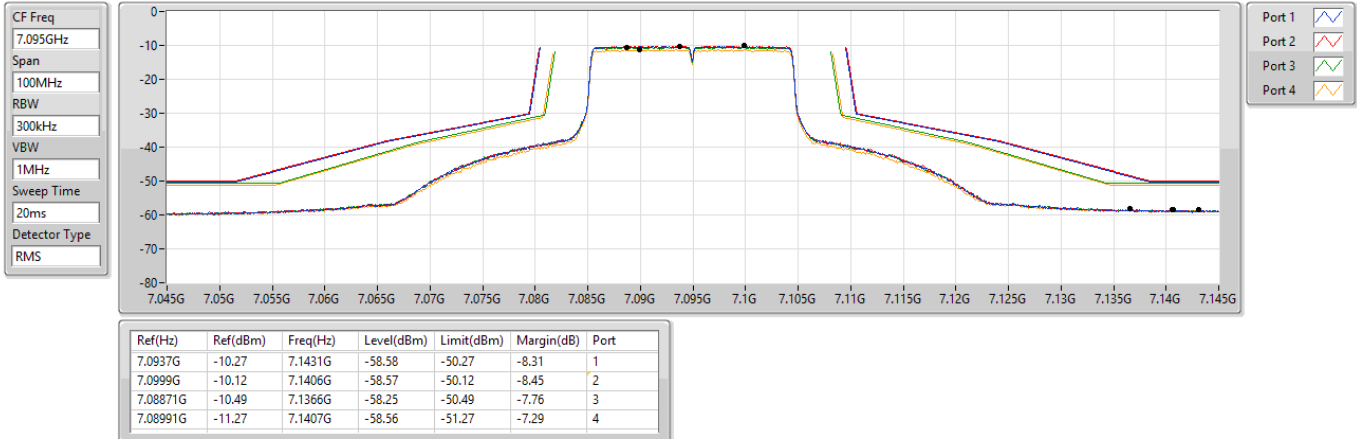

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


5965MHz_TX

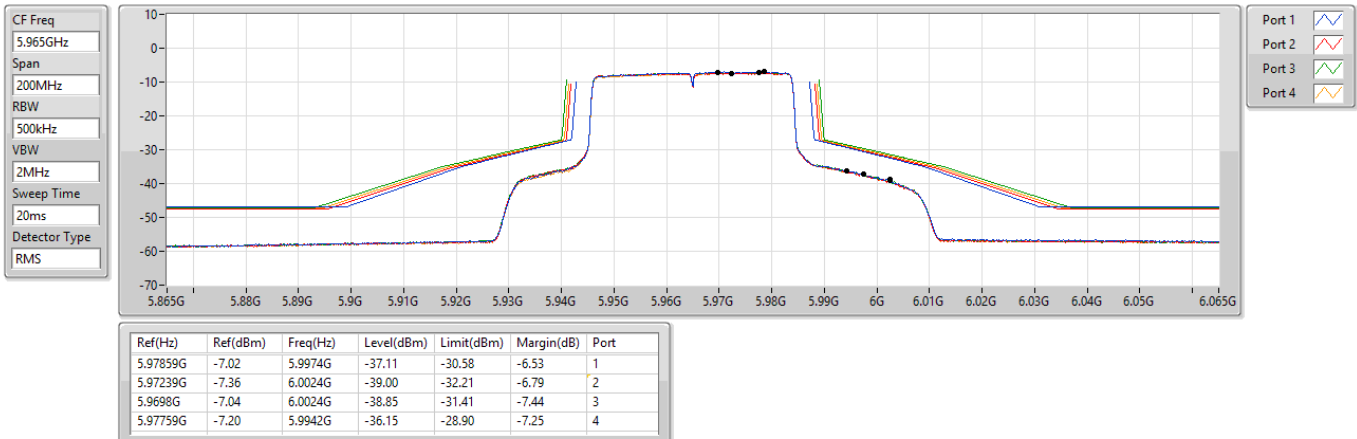

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6165MHz_TX

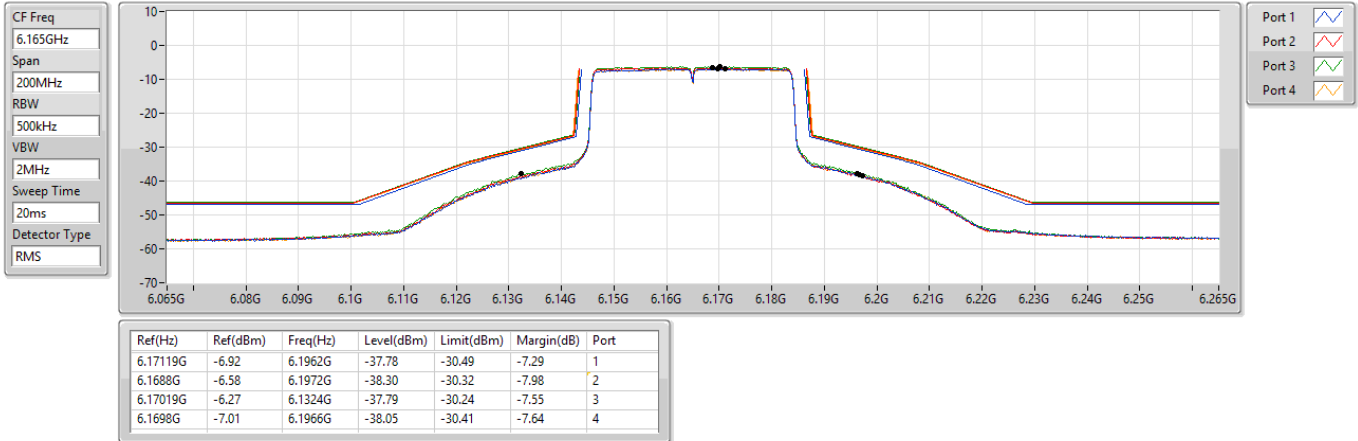

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6405MHz_TX

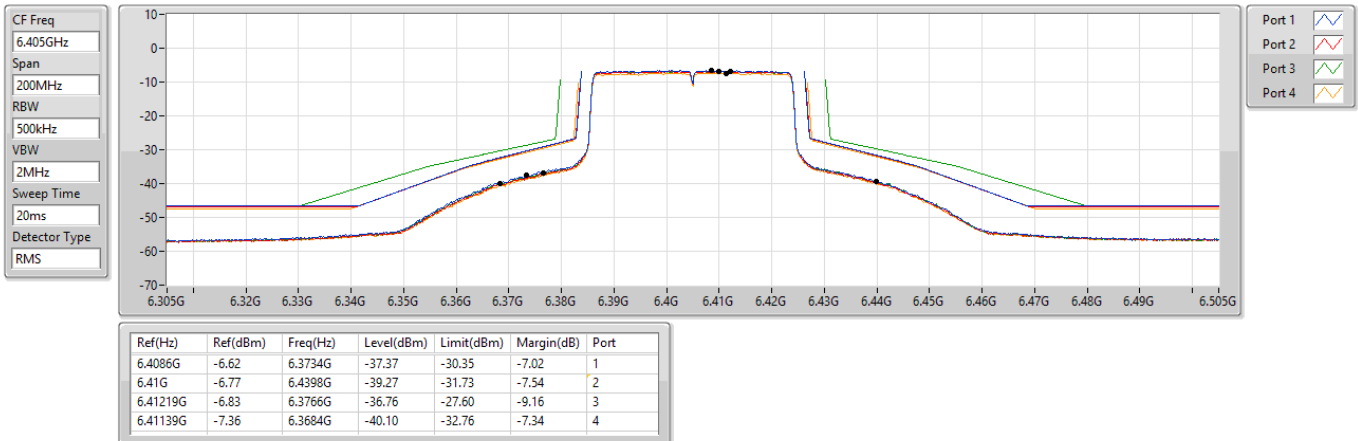

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6445MHz_TX

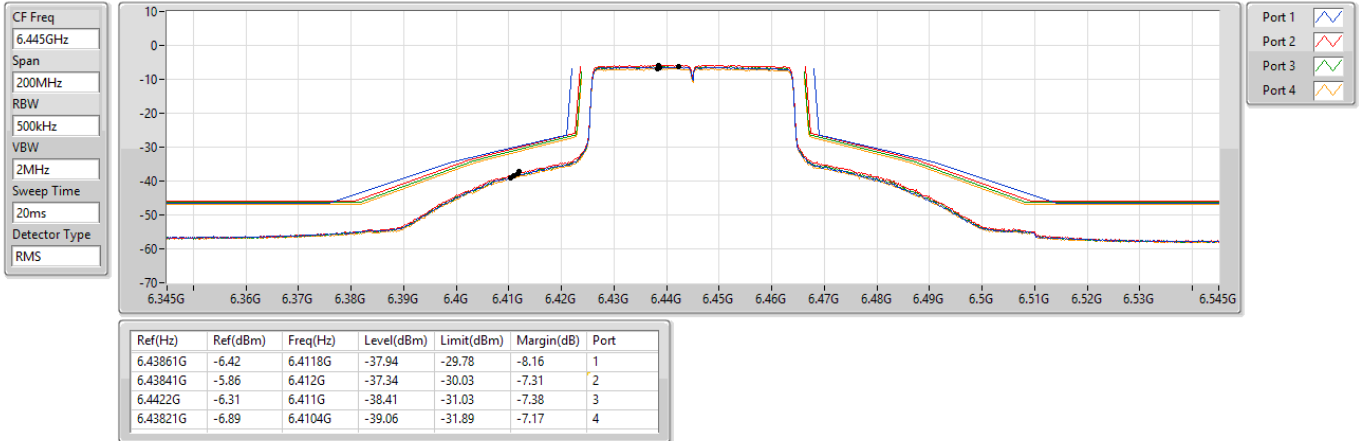

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6485MHz_TX

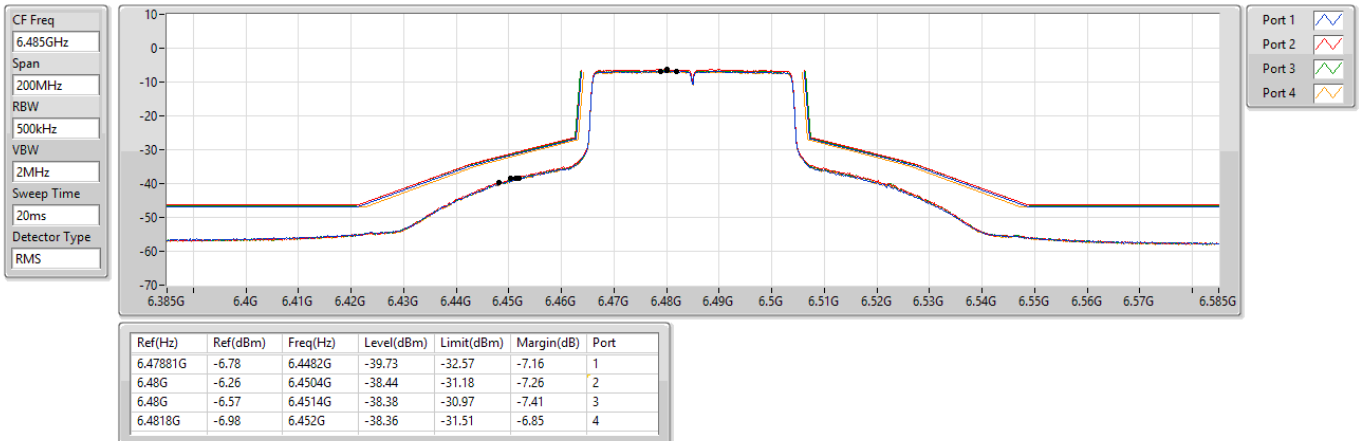

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6525MHz Straddle 6.425-6.525GHz_TX

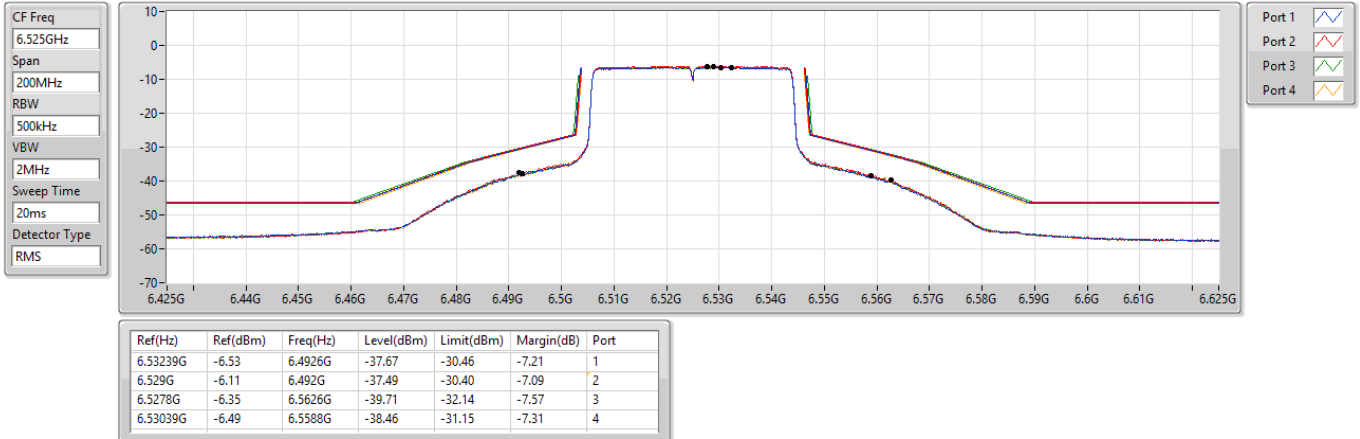

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6565MHz_TX

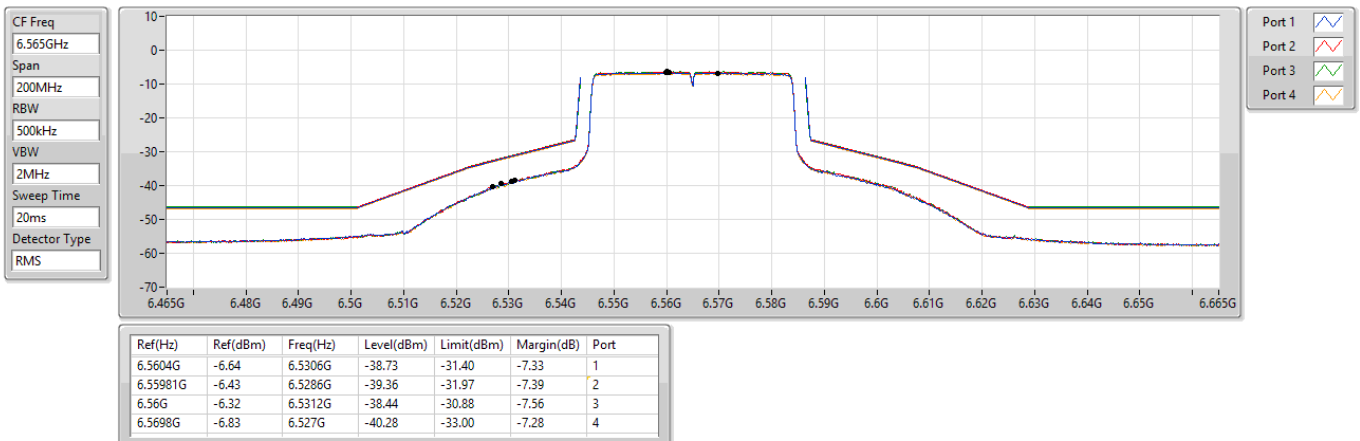

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6725MHz_TX

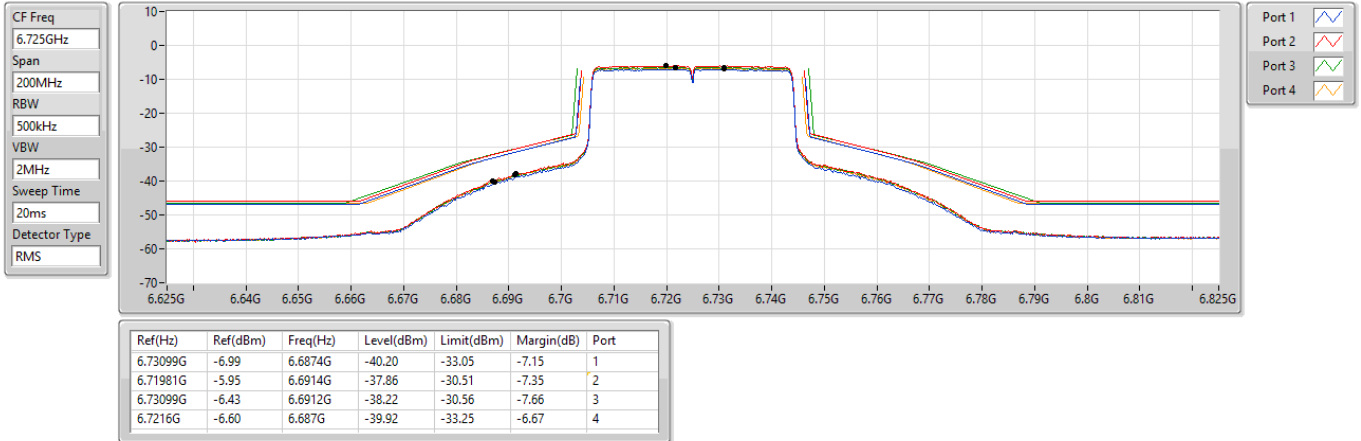

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6845MHz_TX

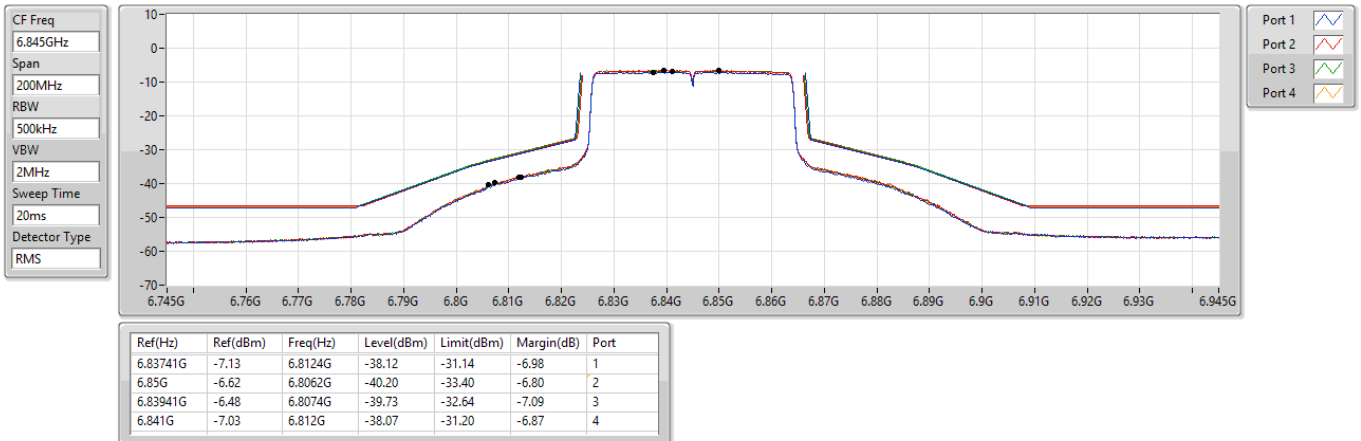

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6885MHz Straddle 6.875-7.125GHz_TX

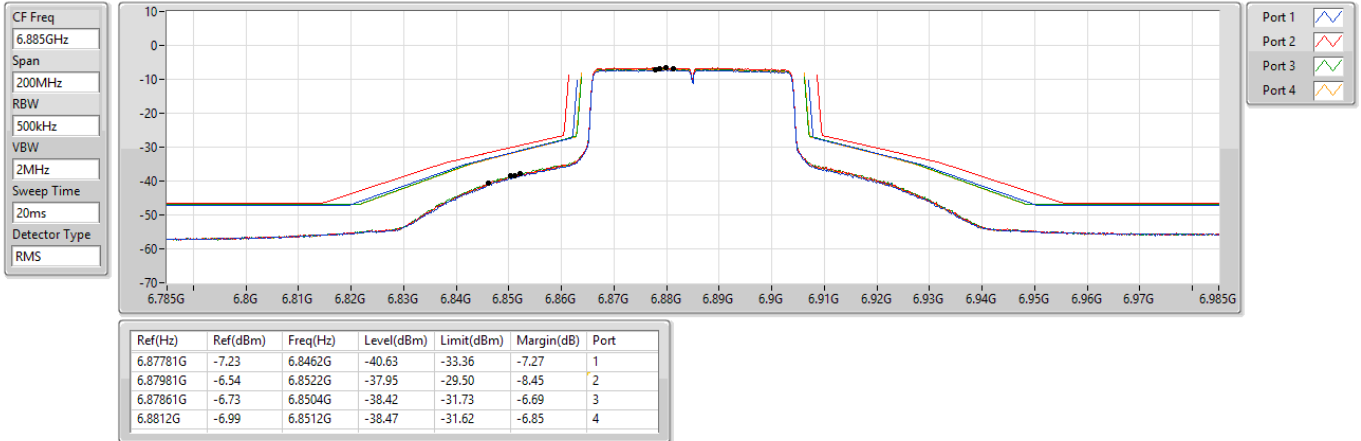

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6925MHz_TX

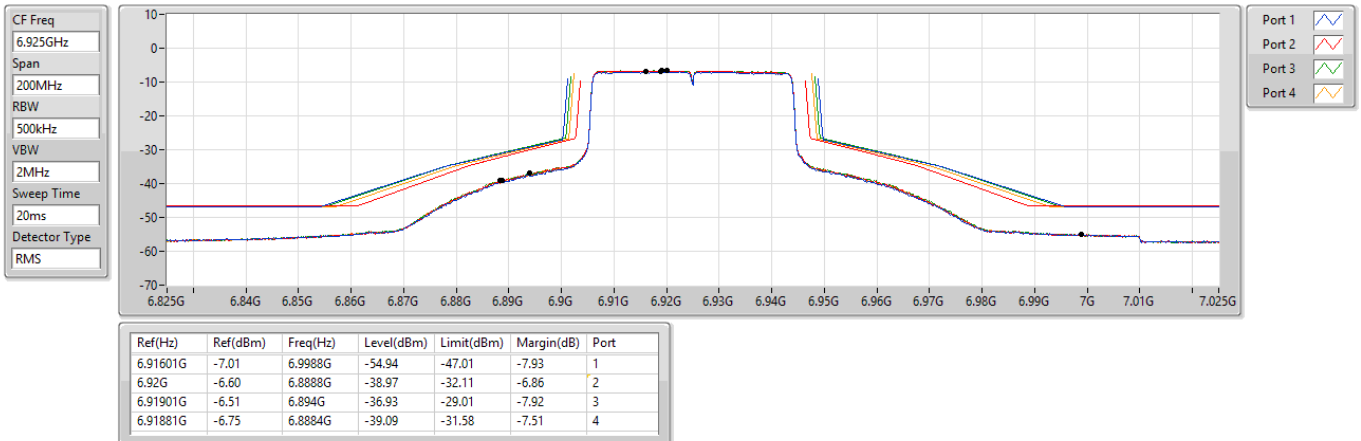

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7005MHz_TX

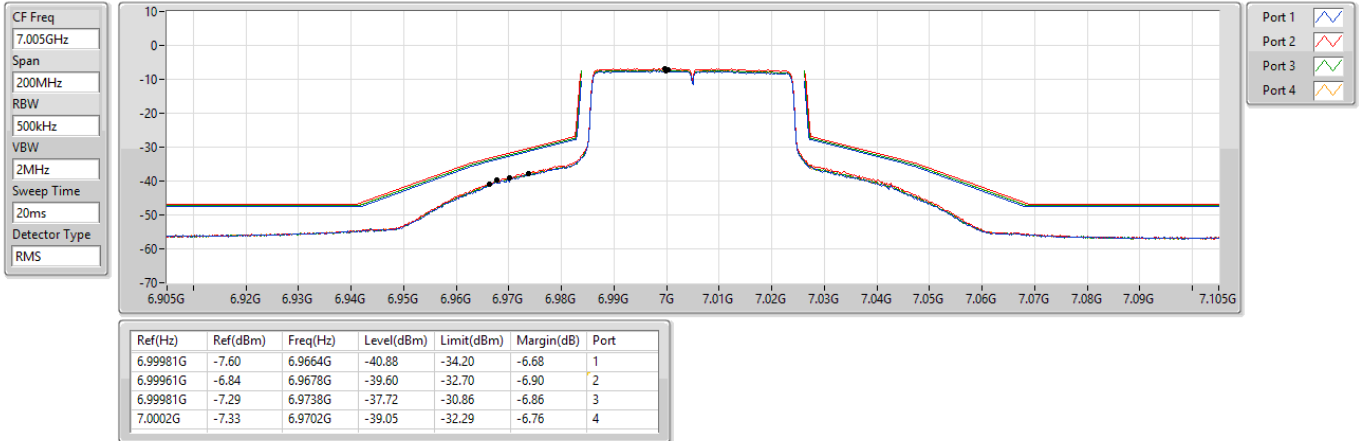

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7085MHz_TX

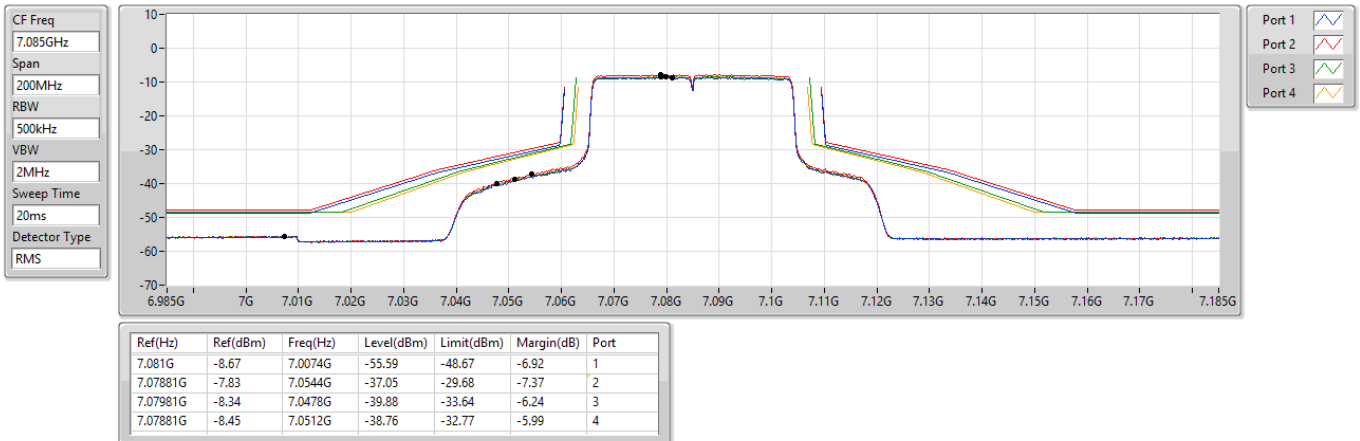

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


5985MHz_TX

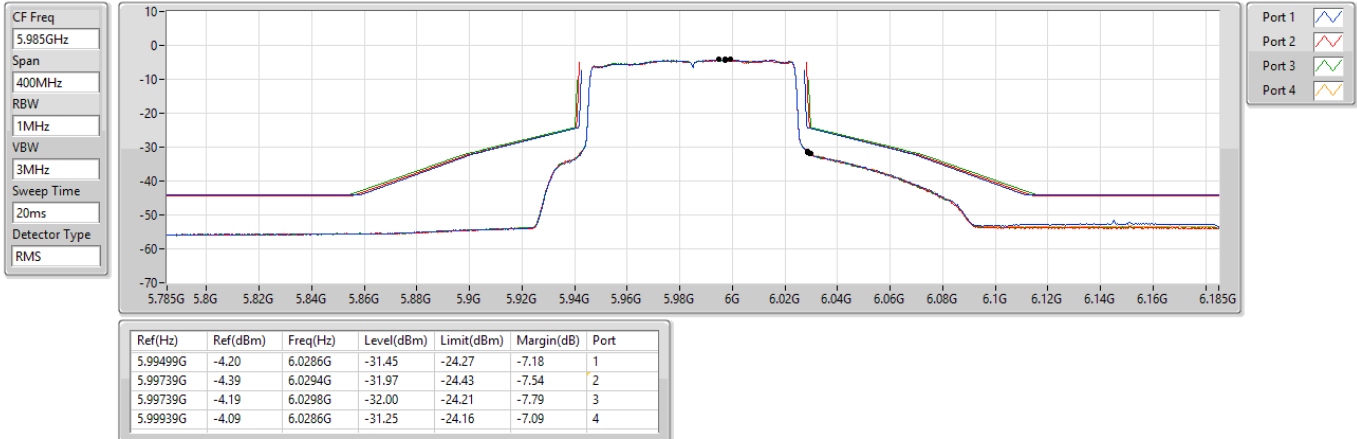

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6145MHz_TX

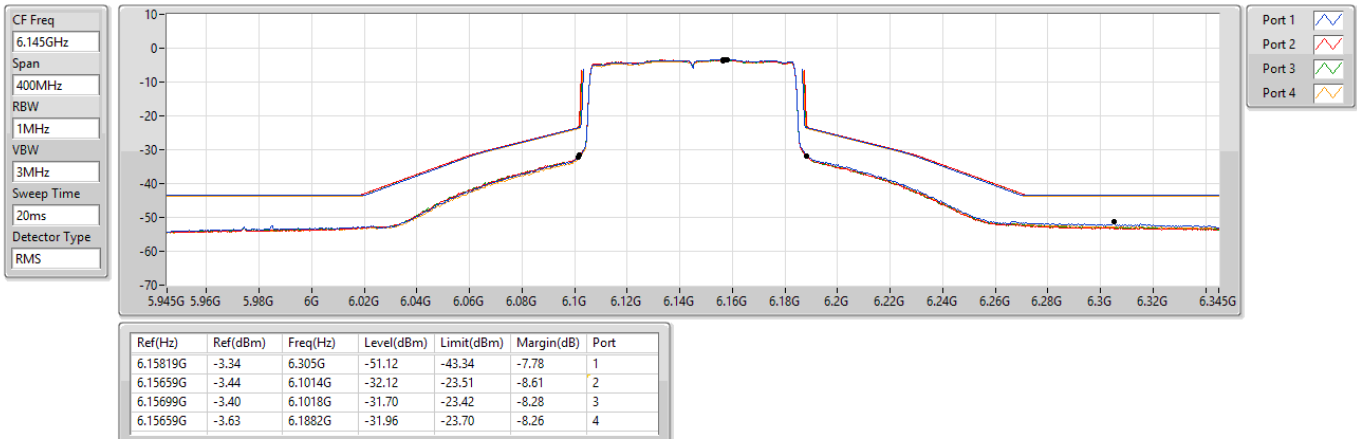

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6385MHz_TX

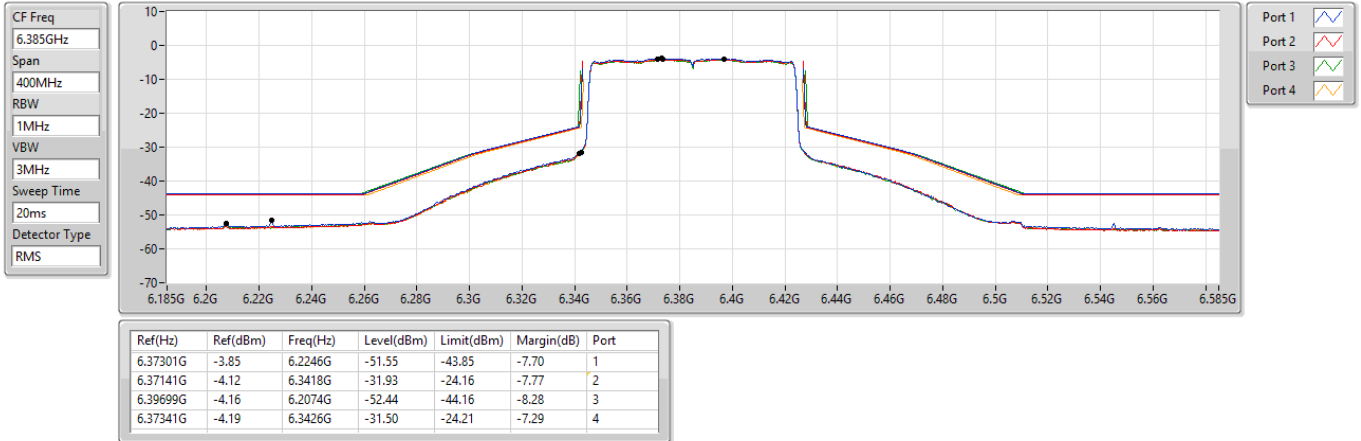

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6465MHz_TX

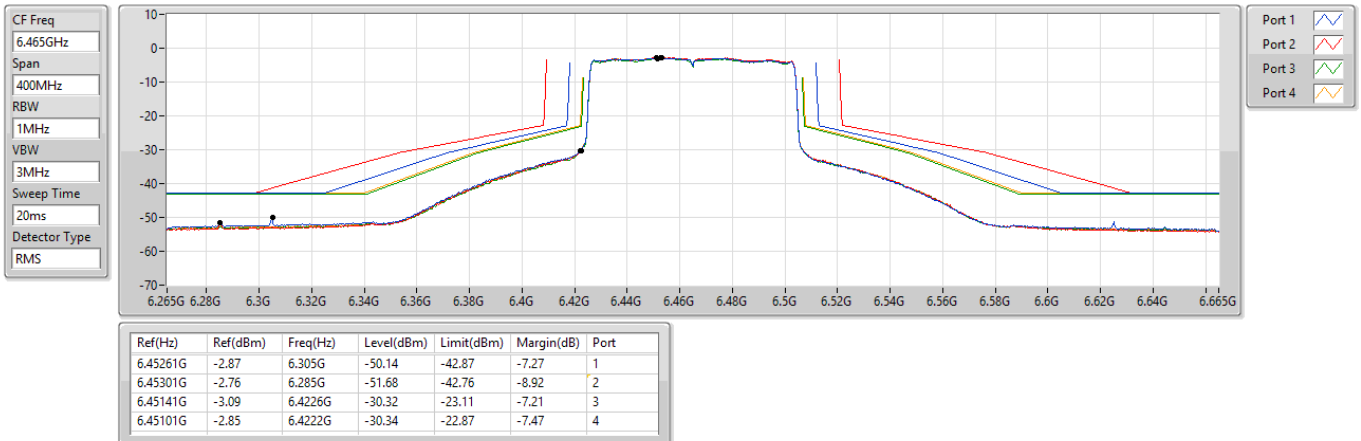

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6545MHz Straddle 6.425-6.525GHz_TX

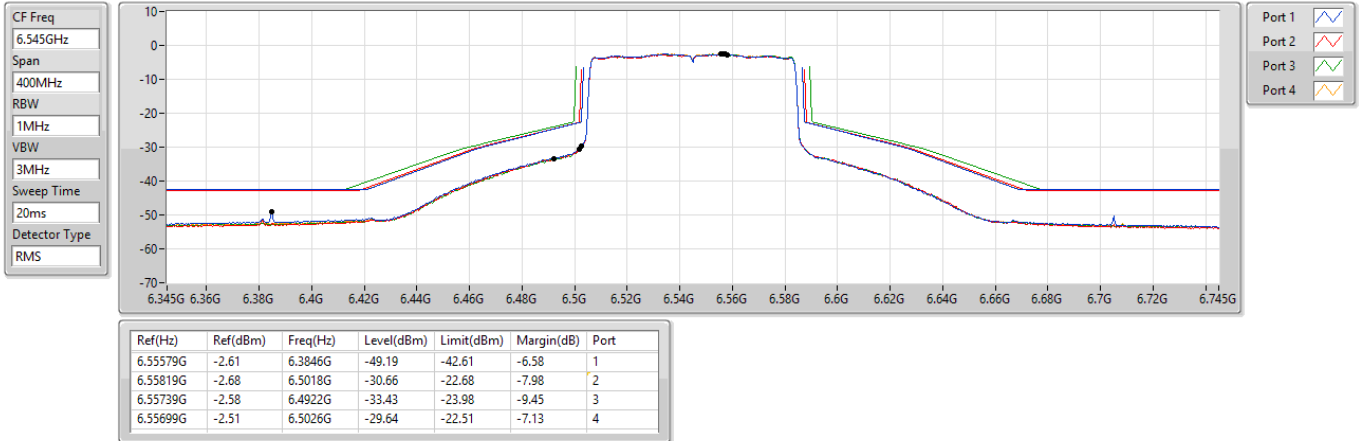

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6625MHz_TX

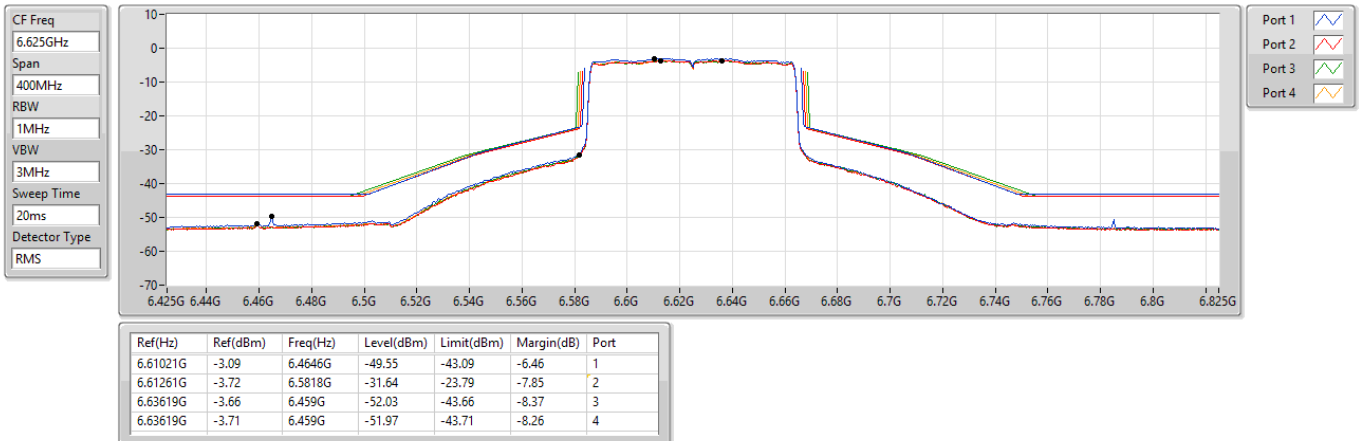

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6705MHz_TX

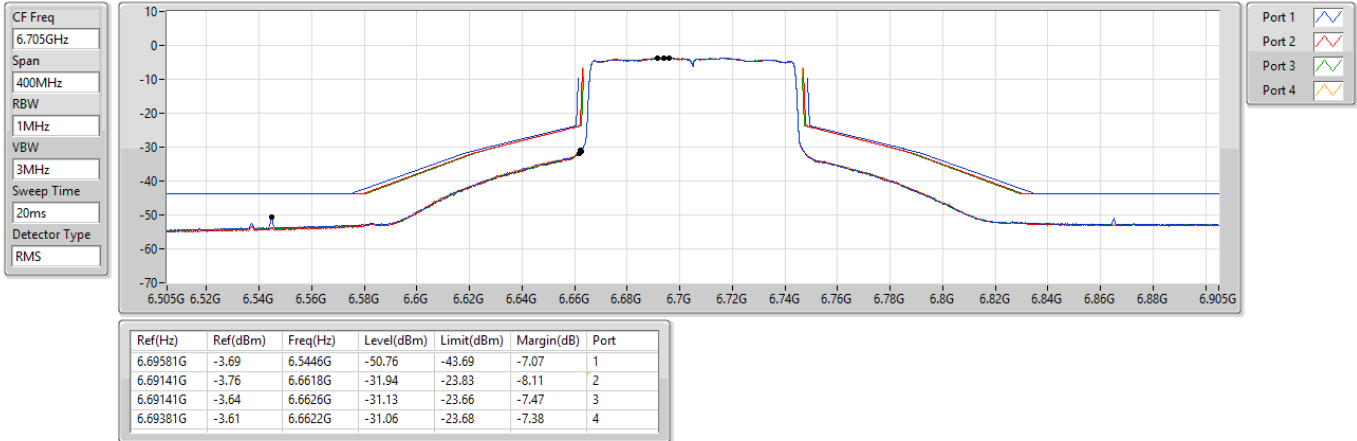

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6785MHz_TX

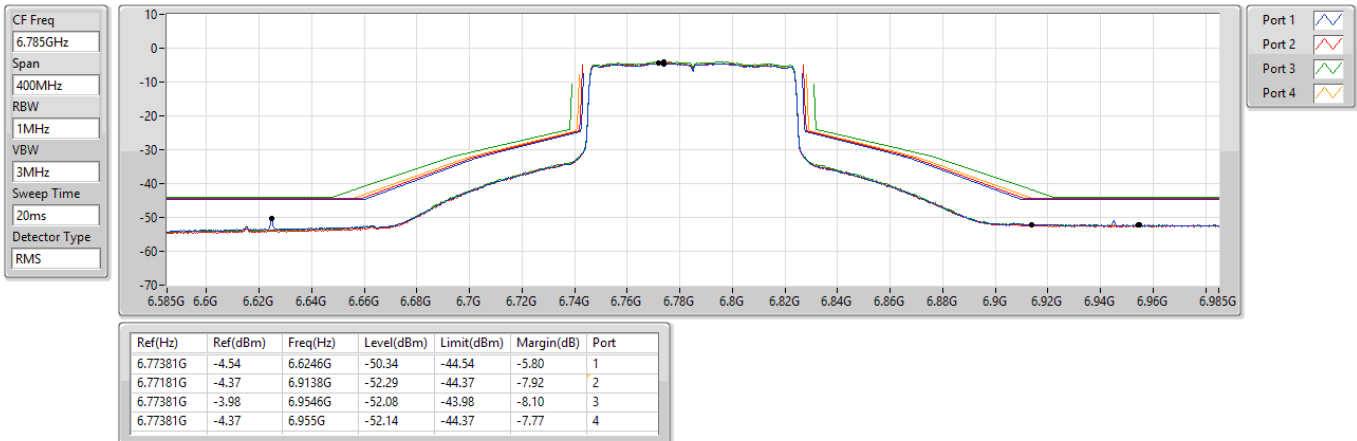

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6865MHz Straddle 6.875-7.125GHz_TX

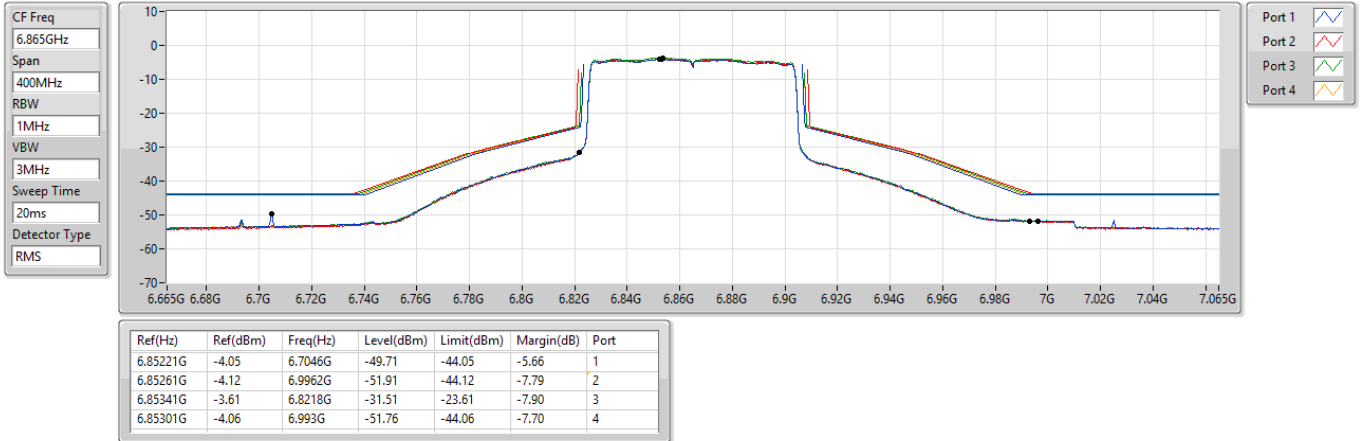

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6945MHz_TX

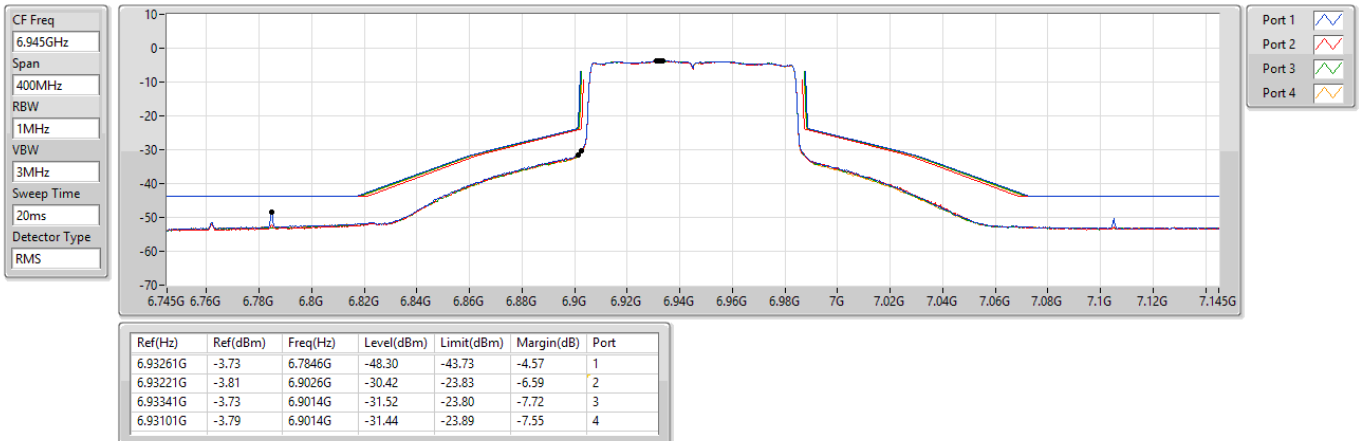

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


7025MHz_TX

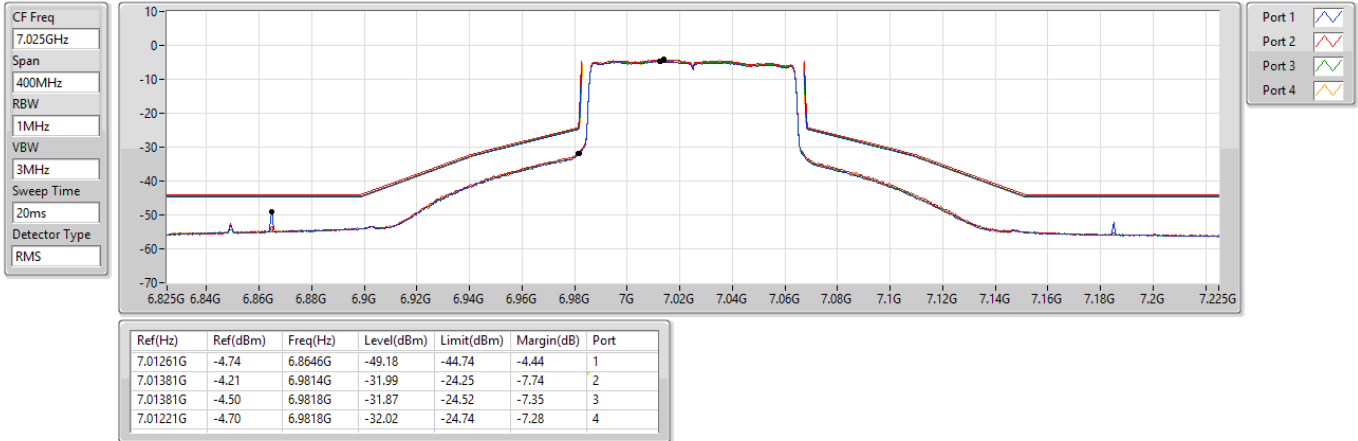

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6025MHz_TX

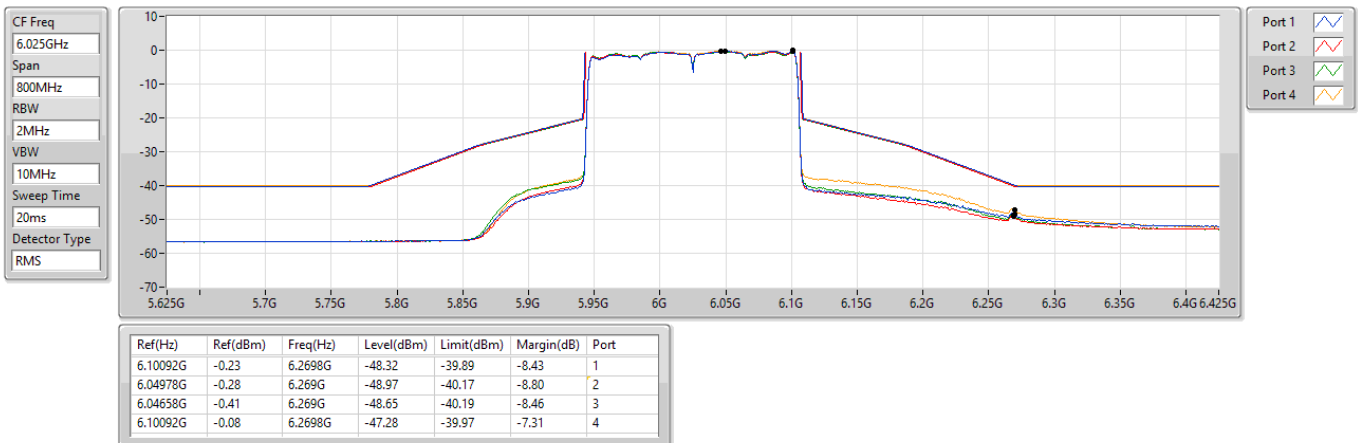

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6185MHz_TX

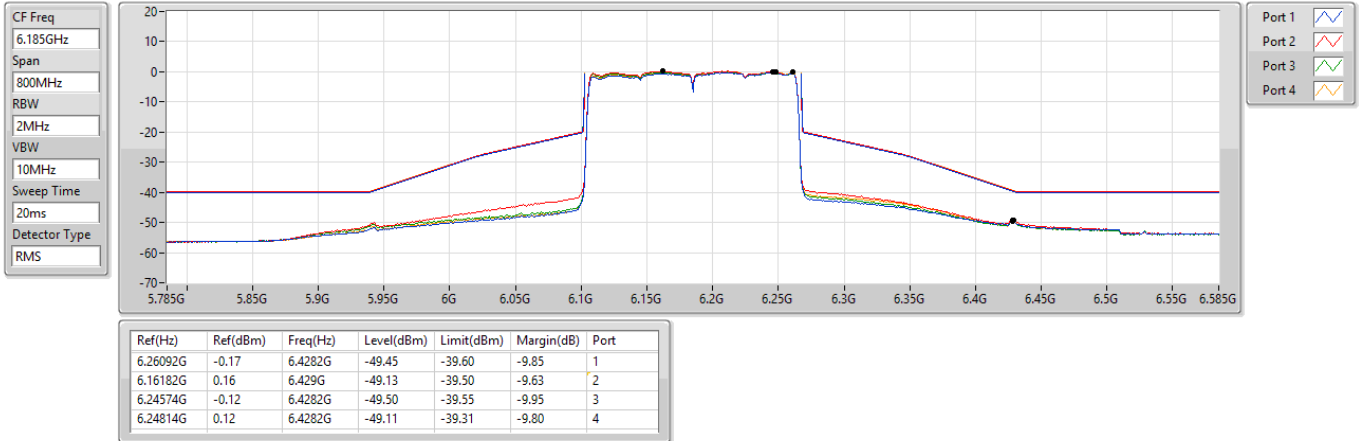

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6345MHz_TX

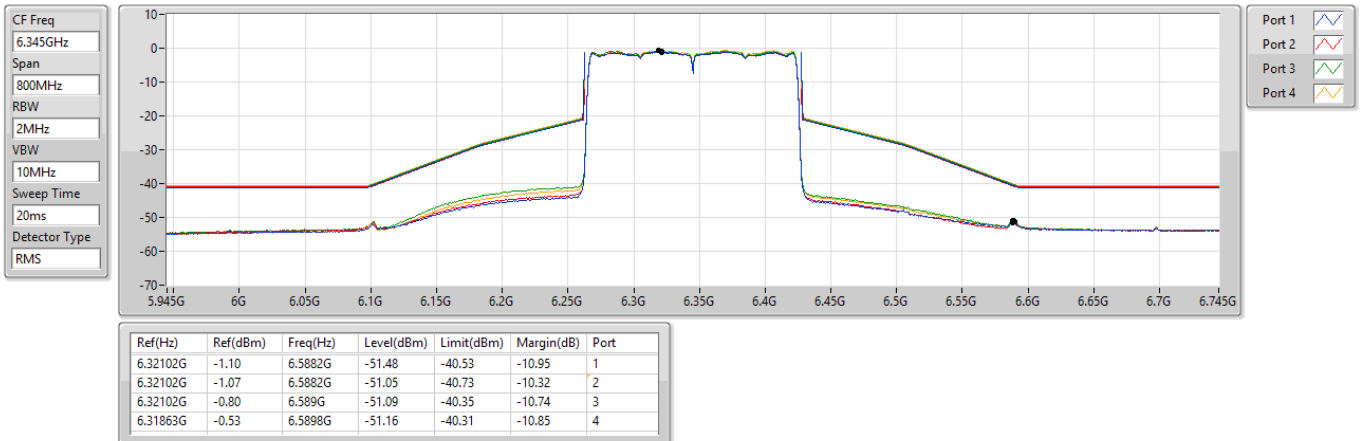

6.425-6.525GHz 802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6505MHz Straddle 6.425-6.525GHz_TX

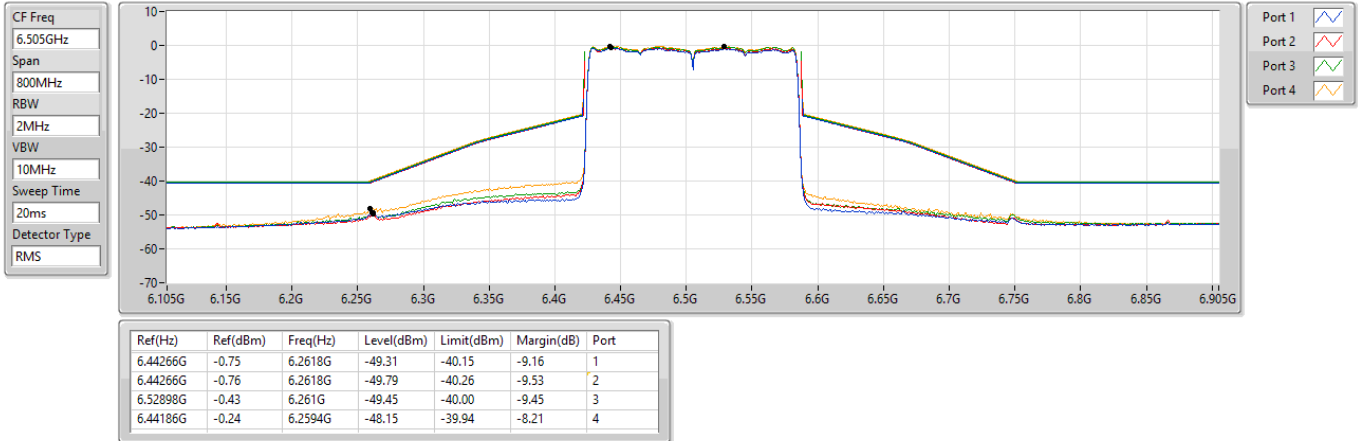

6.525-6.875GHz 802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6665MHz_TX

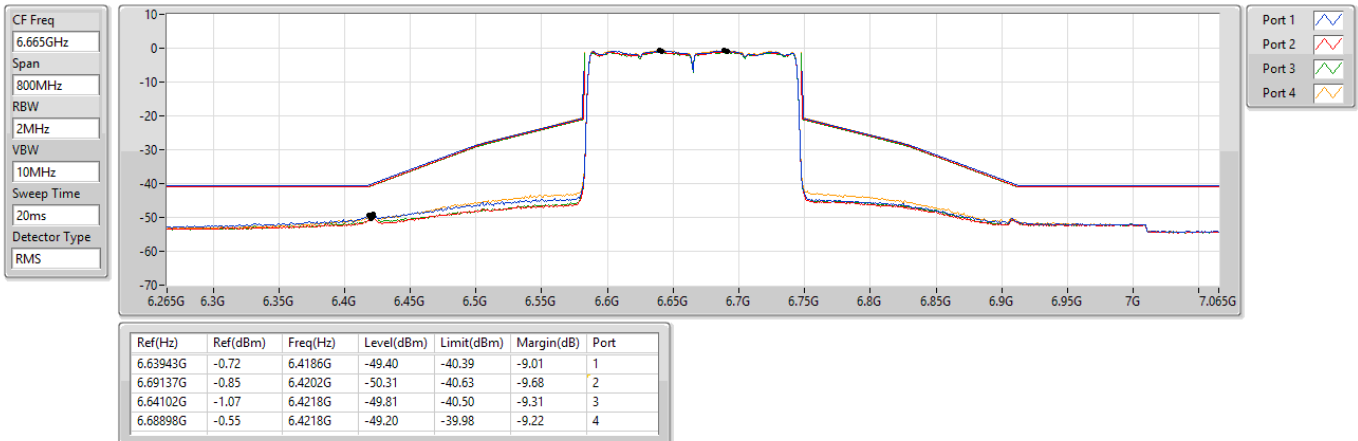

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6825MHz Straddle 6.875-7.125GHz_TX

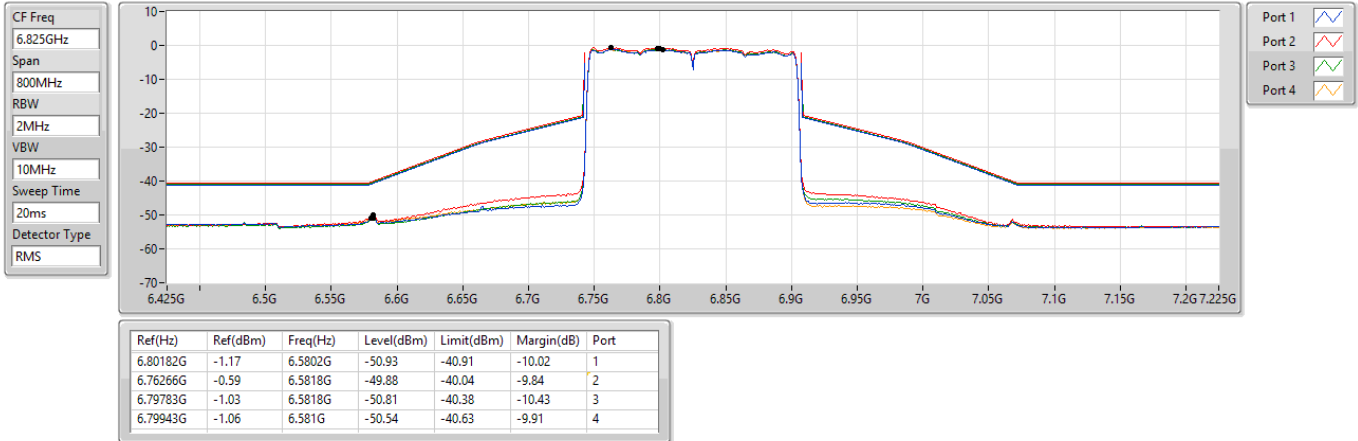

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6985MHz_TX

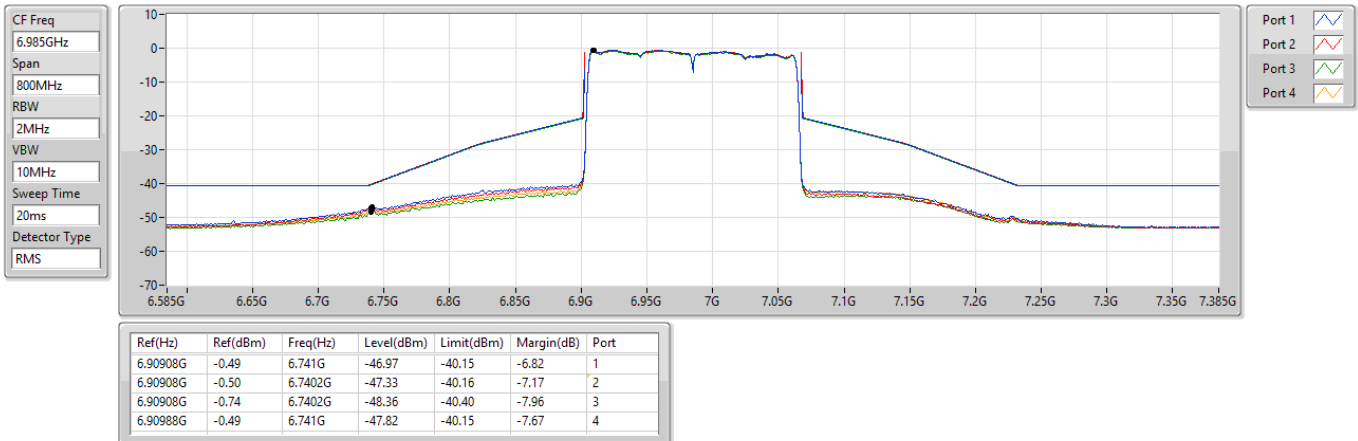

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6105MHz_TX

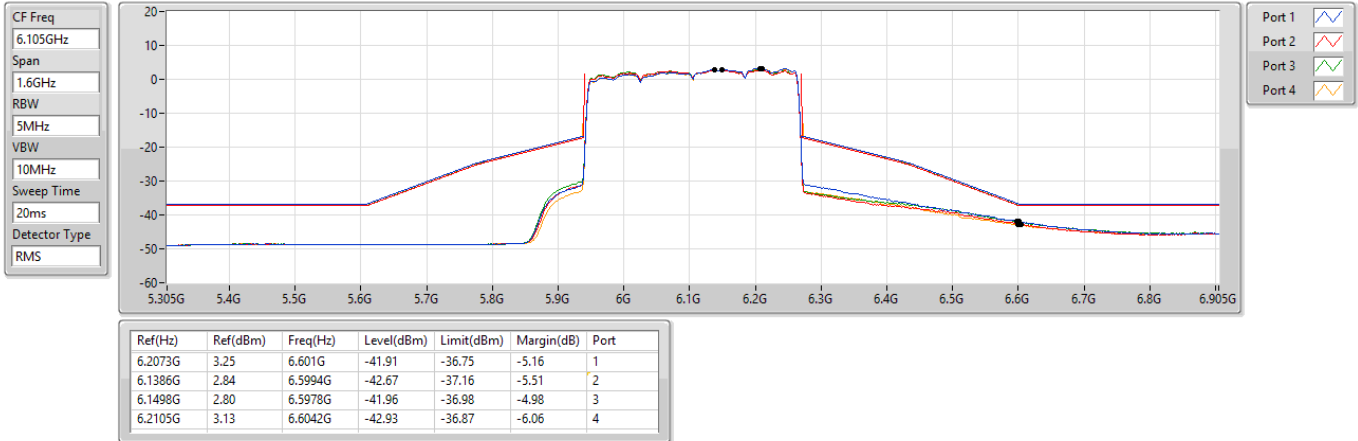

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6265MHz_TX

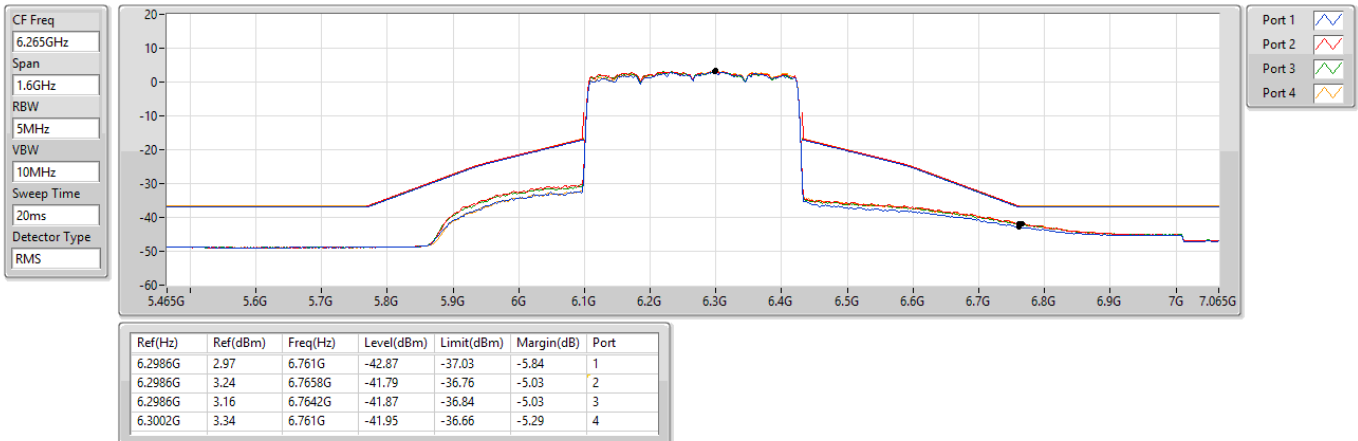

5.925-6.425GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6425MHz Straddle 5.925-6.425GHz_TX

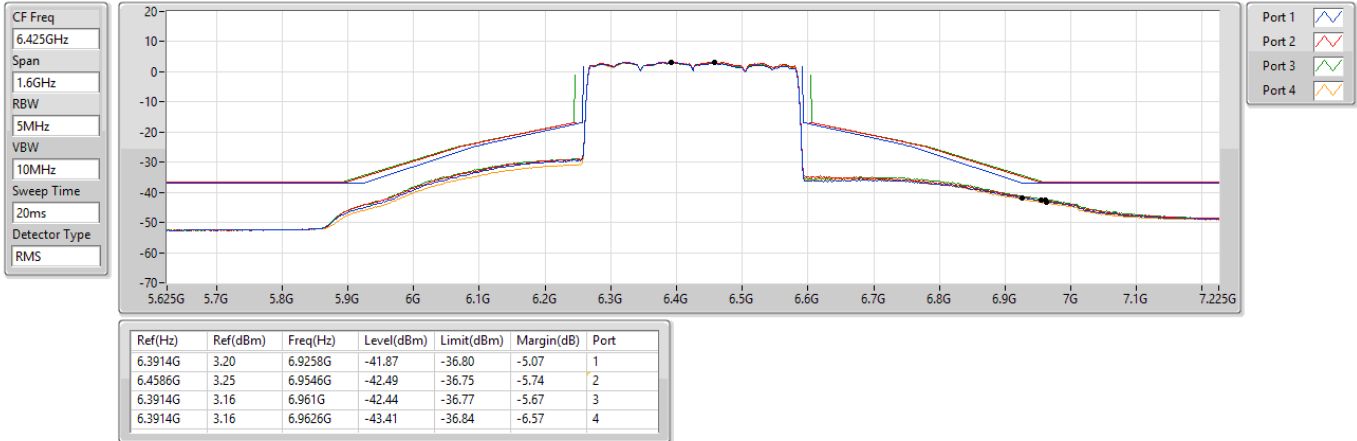

6.425-6.525GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6585MHz Straddle 6.425-6.525GHz_TX

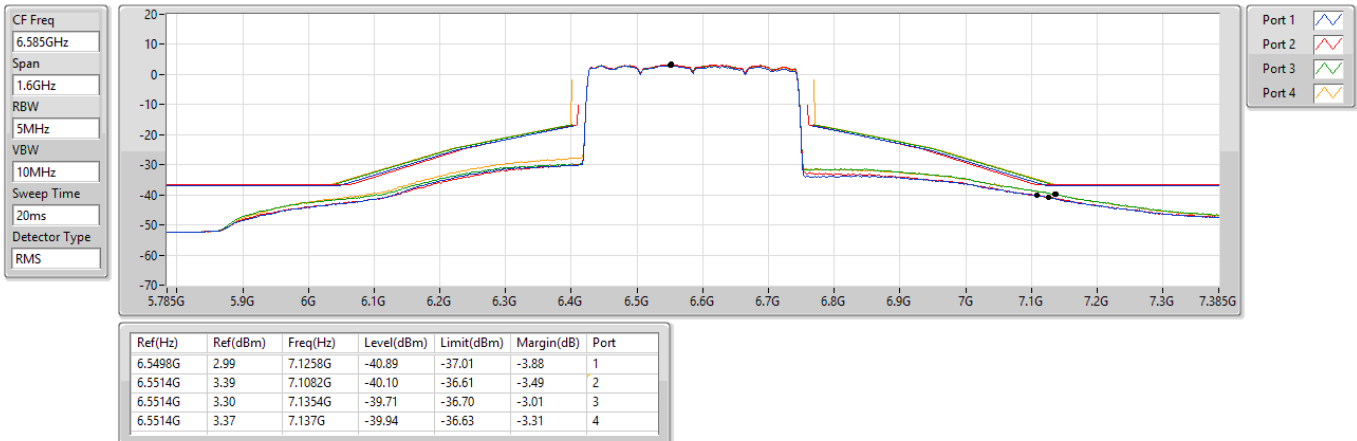

6.875-7.125GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6745MHz Straddle 6.875-7.125GHz_TX

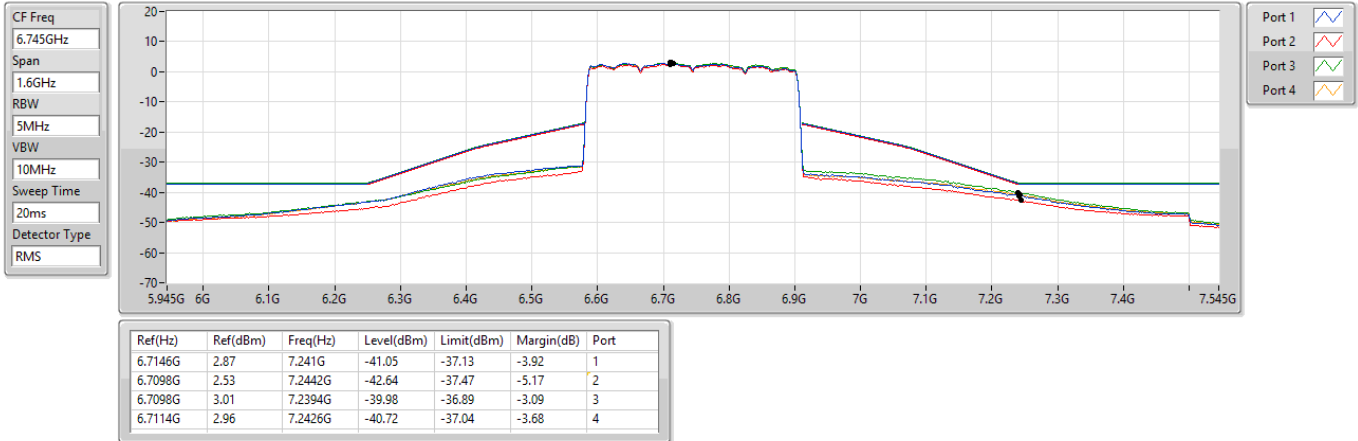

6.875-7.125GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6905MHz Straddle 6.875-7.125GHz_TX

