



# EUT Tx Waveform


## 802.11ax-HE20 / CH33

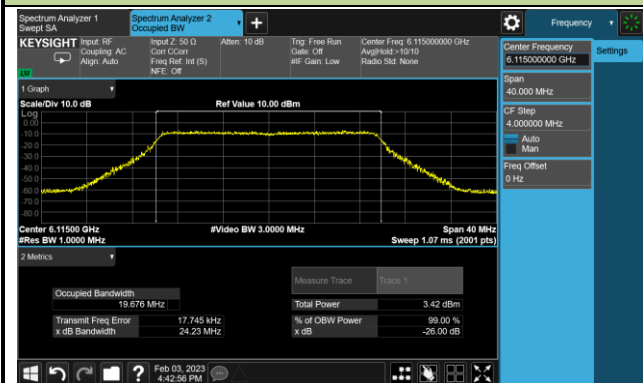


## 802.11ax-HE160 / CH47

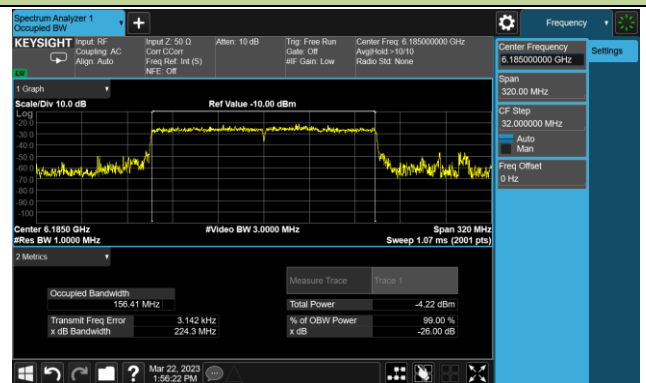


## 802.11ax-HE20 / CH97

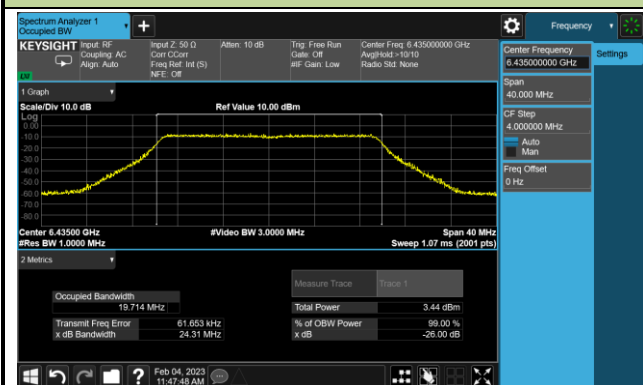


## 802.11ax-HE80 / CH103

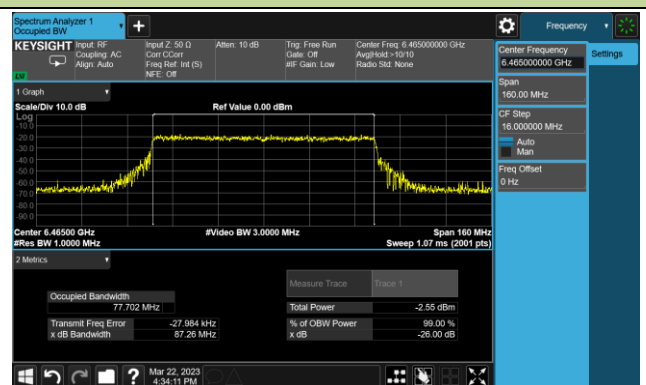


## 802.11ax-HE20 / CH153

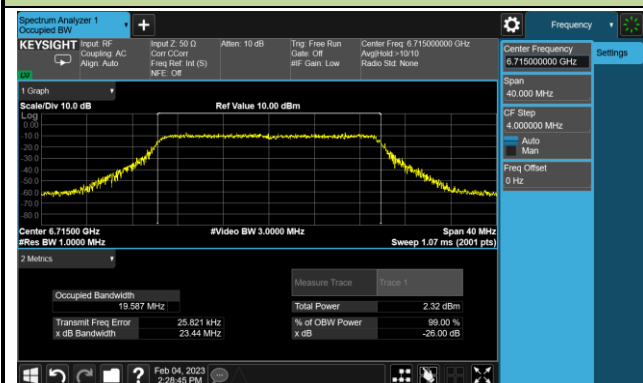


## 802.11ax-HE160 / CH143

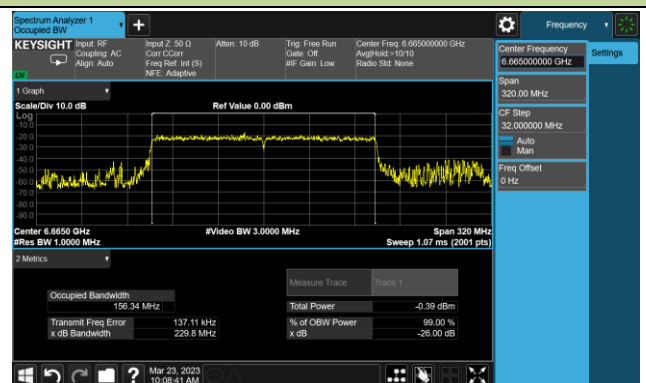

## 802.11ax-HE20 / CH213

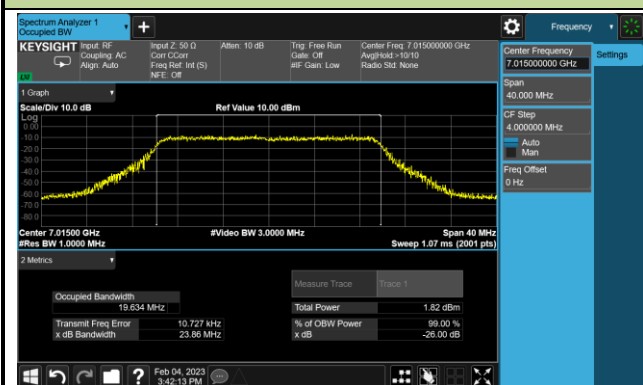


## 802.11ax-HE160 / CH207

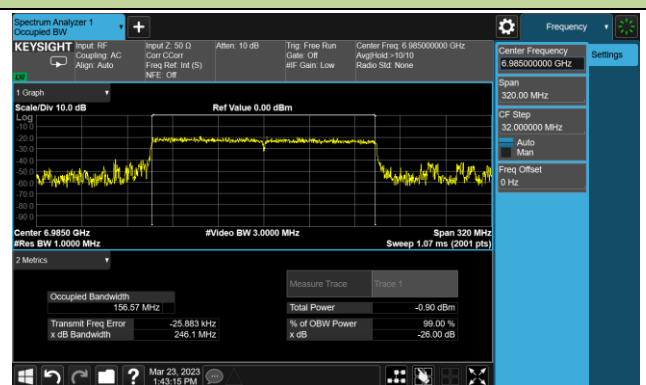


## Incumbent Signal Calibration Plots (NII-5 Band)


802.11ax-HE20 / CH33

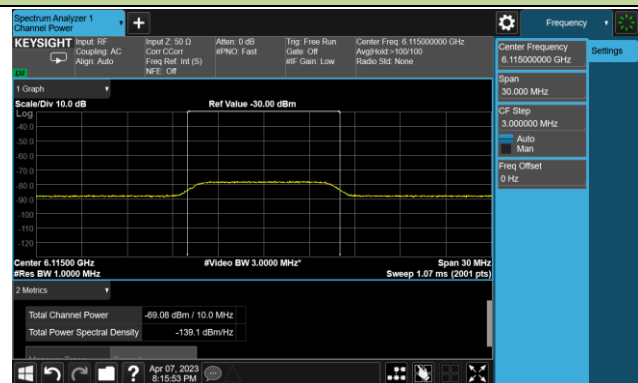


802.11ax-HE160 / CH47 (Low Edge)

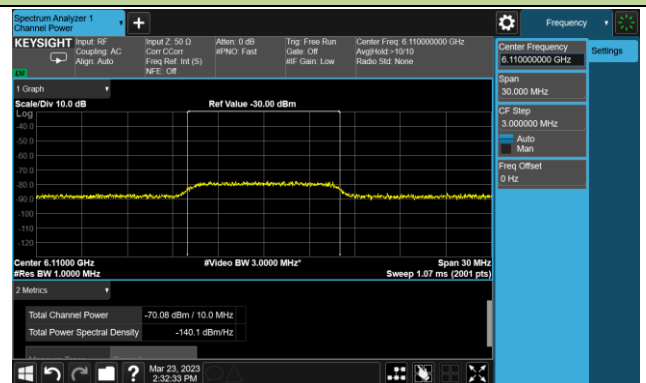

802.11ax-HE160 / CH47 (Middle)

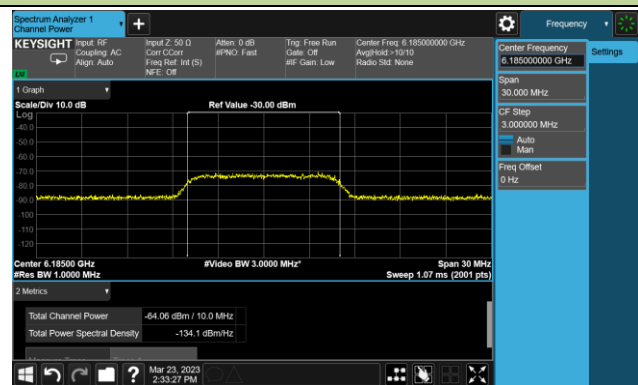


802.11ax-HE160 / CH47 (High Edge)

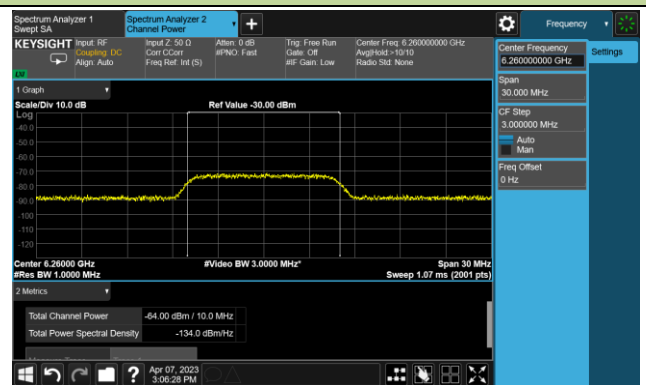


## Incumbent Signal Calibration Plots (NII-6 Band)


802.11ax-HE20 / CH97

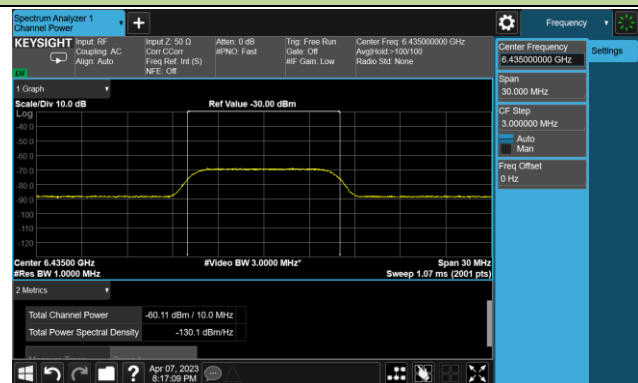


802.11ax-HE80 / CH103 (Low Edge)

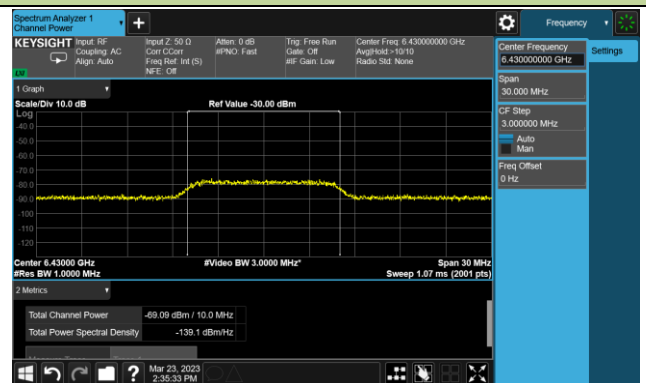

802.11ax-HE80 / CH103 (Middle)

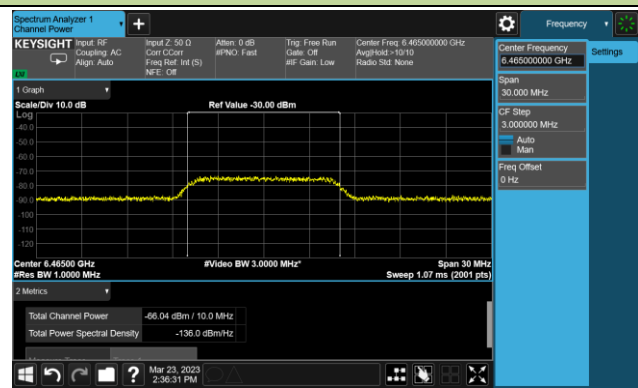


802.11ax-HE80 / CH103 (High Edge)

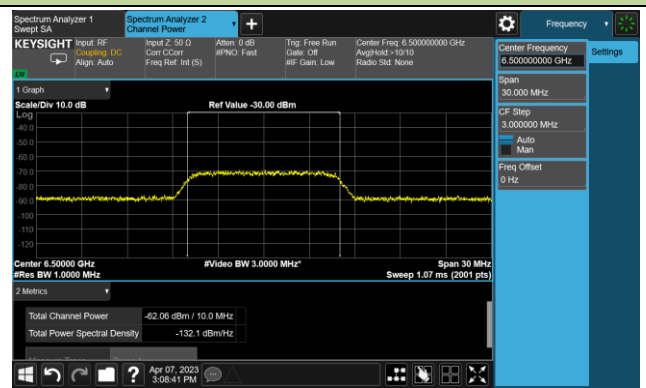

## Incumbent Signal Calibration Plots (NII-7 Band)


802.11ax-HE20 / CH153

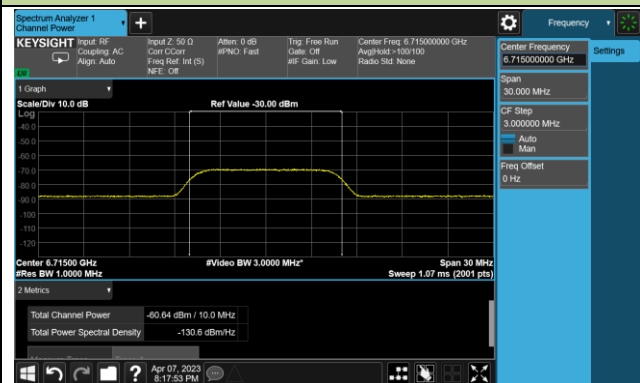


802.11ax-HE160 / CH143 (Low Edge)



802.11ax-HE160 / CH143 (Middle)

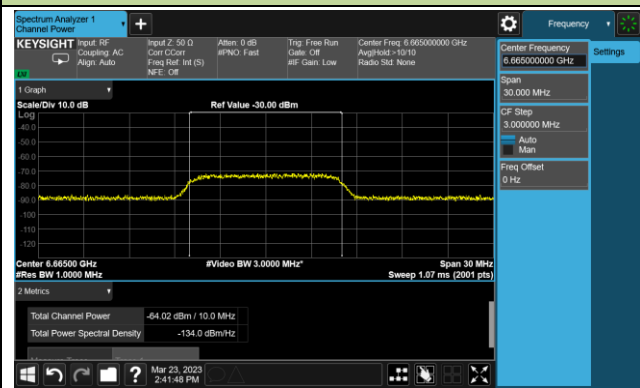


802.11ax-HE160 / CH143 (High Edge)

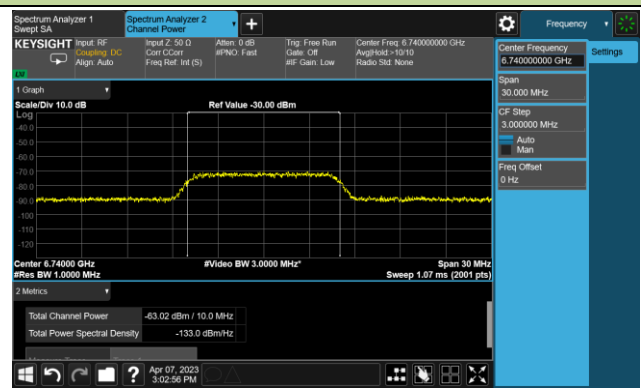


## Incumbent Signal Calibration Plots (NII-8 Band)


802.11ax-HE20 / CH213

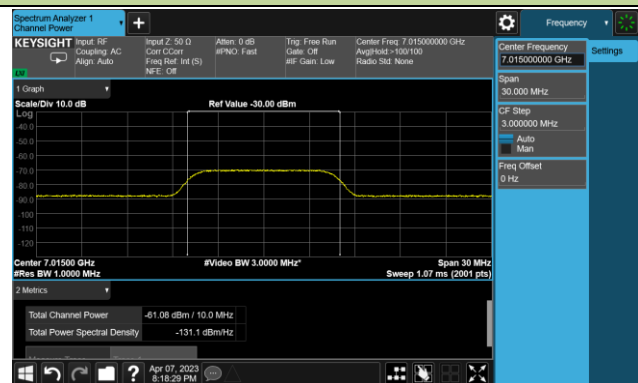


802.11ax-HE160 / CH207 (Low Edge)

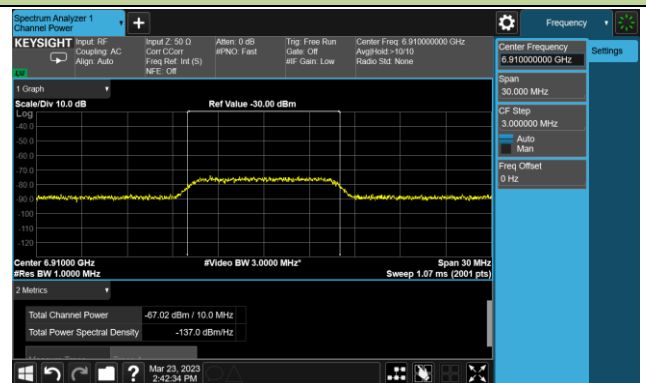

802.11ax-HE160 / CH207 (Middle)

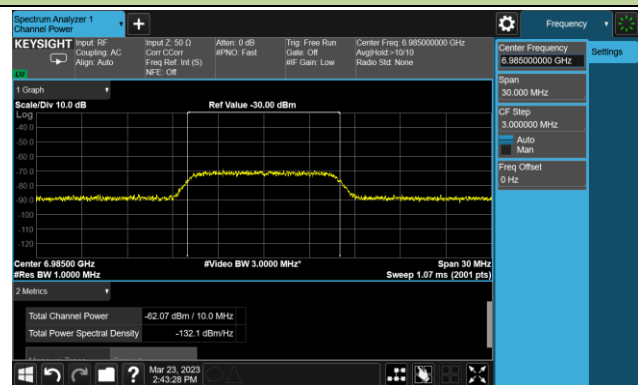

802.11ax-HE160 / CH207 (High Edge)

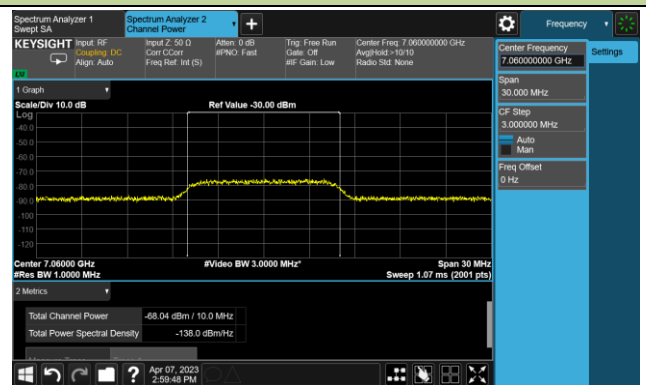


## Test Result of EUT ceased transmission (NII-5 Band)


## 802.11ax-HE20 / CH33




## 802.11ax-HE160 / CH47 (Low Edge)

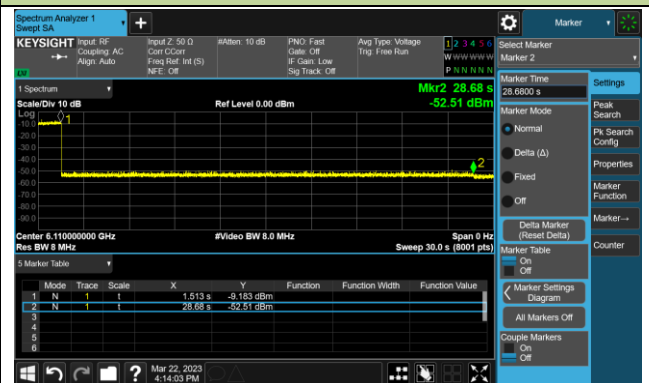

## 802.11ax-HE160 / CH47 (Middle)

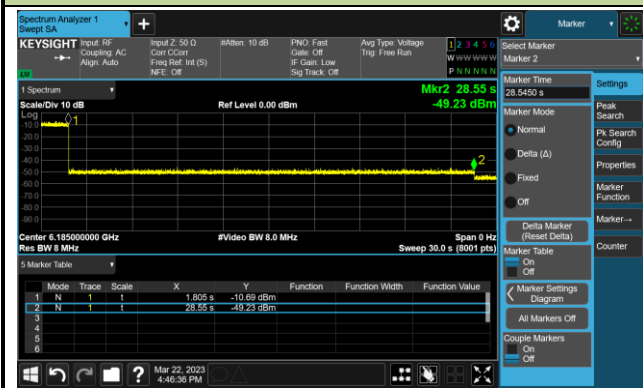

## 802.11ax-HE160 / CH47 (High Edge)

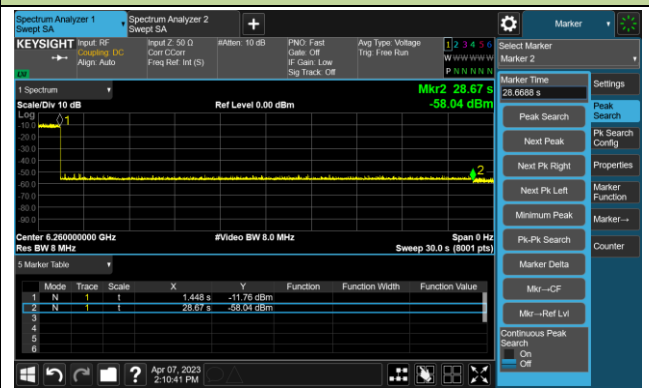


## Test Result of EUT ceased transmission (NII-6 Band)


## 802.11ax-HE20 / CH97




## 802.11ax-HE80 / CH103 (Low Edge)

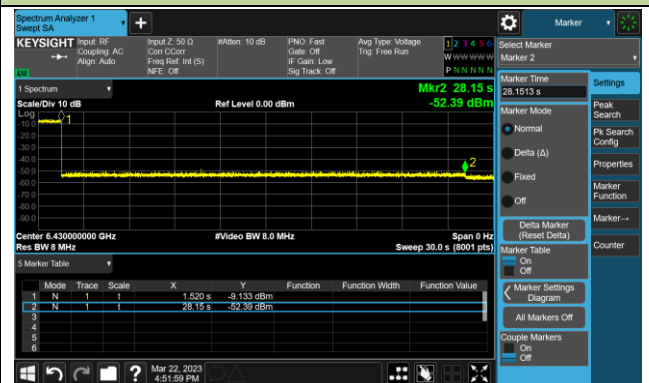

## 802.11ax-HE80 / CH103 (Middle)

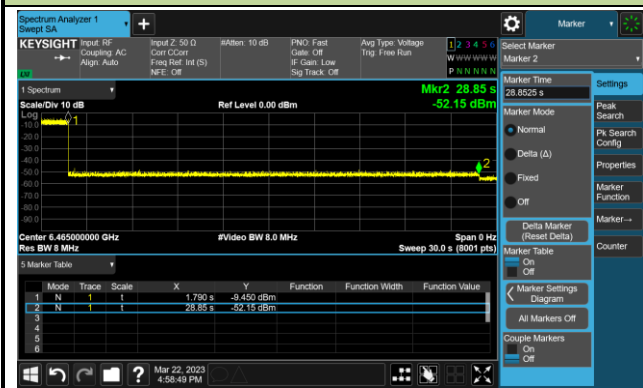


## 802.11ax-HE80 / CH103 (High Edge)

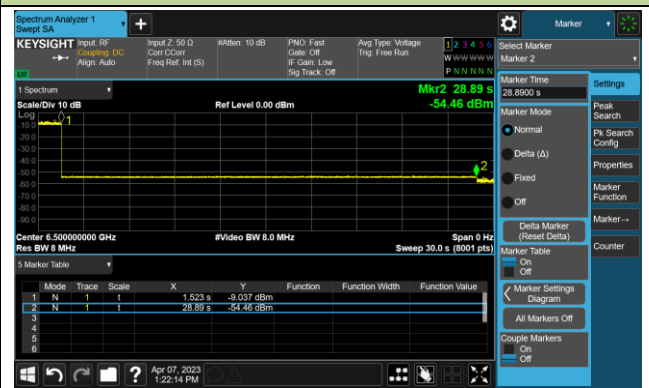


## Test Result of EUT ceased transmission (NII-7 Band)


## 802.11ax-HE20 / CH153

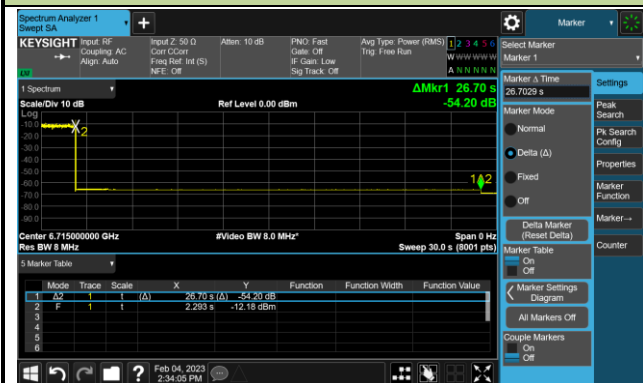


## 802.11ax-HE160 / CH143 (Low Edge)

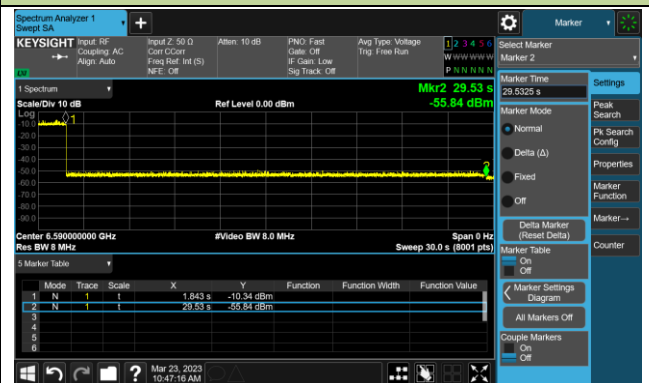

## 802.11ax-HE160 / CH143 (Middle)

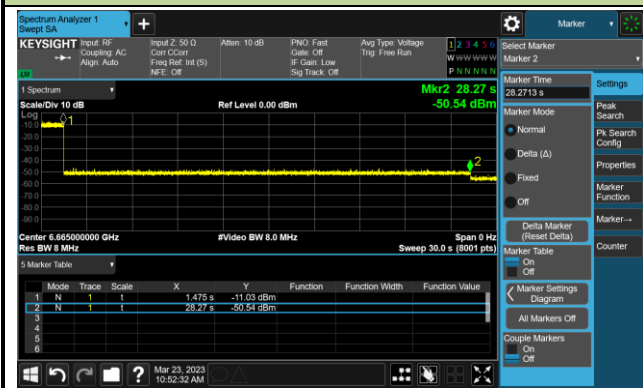


## 802.11ax-HE160 / CH143 (High Edge)

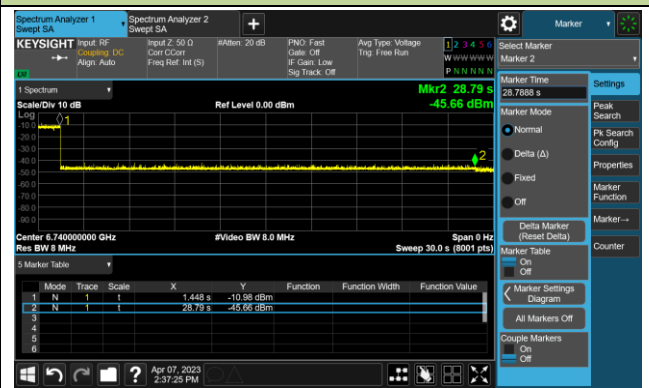


## Test Result of EUT ceased transmission (NII-8 Band)


## 802.11ax-HE20 / CH213

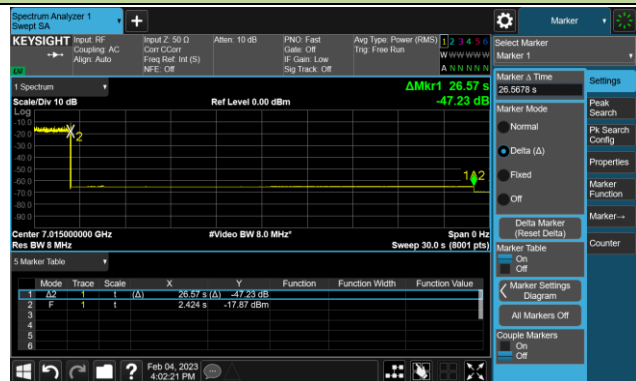


## 802.11ax-HE160 / CH207 (Low Edge)

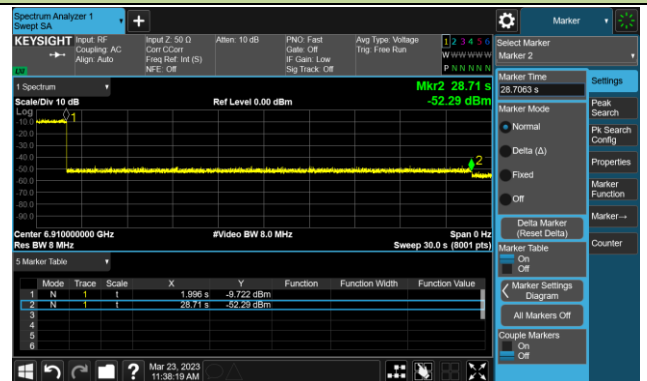

## 802.11ax-HE160 / CH207 (Middle)

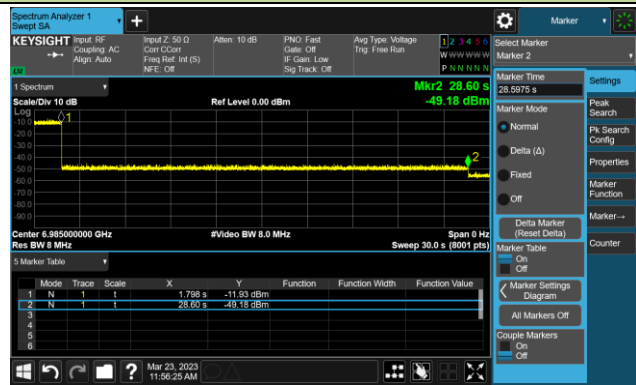

## 802.11ax-HE160 / CH207 (High Edge)

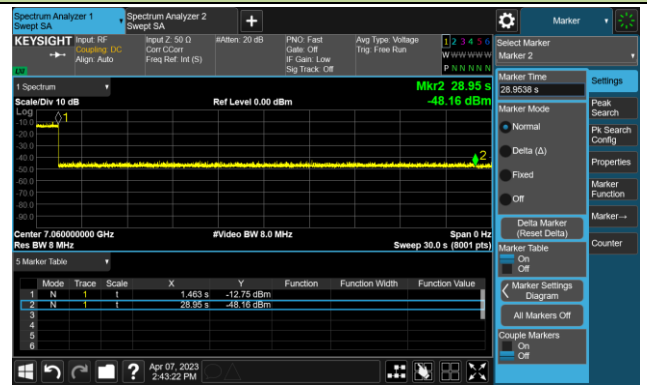

### A.8 Radiated Spurious Emission Test Result

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 01         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9704.0          | 47.7                 | -2.9          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10239.5         | 47.8                 | -2.4          | 45.4                   | 88.2           | -42.8       | Peak     | Horizontal   |
|      | 11480.5         | 49.1                 | -3.1          | 46.0                   | 74.0           | -28.0       | Peak     | Horizontal   |
|      | 12339.0         | 48.2                 | -2.5          | 45.7                   | 74.0           | -28.3       | Peak     | Horizontal   |
| *    | 10010.0         | 47.5                 | -2.3          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
| *    | 10537.0         | 48.0                 | -2.8          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
|      | 11939.5         | 48.7                 | -2.9          | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
|      | 12296.5         | 47.8                 | -2.4          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 49         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9831.5          | 47.6                 | -2.8          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10537.0         | 47.1                 | -2.8          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
|      | 11548.5         | 48.5                 | -3.3          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
|      | 12407.0         | 47.7                 | -2.3          | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
| *    | 9780.5          | 47.9                 | -2.7          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
| *    | 10222.5         | 47.8                 | -2.4          | 45.4                   | 88.2           | -42.8       | Peak     | Vertical     |
|      | 10605.0         | 47.2                 | -2.4          | 44.8                   | 74.0           | -29.2       | Peak     | Vertical     |
|      | 12322.0         | 47.9                 | -2.4          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 93         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                 | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                    | 9772.0          | 45.8                 | -2.7          | 43.1                   | 88.2           | -45.1       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 10307.5         | 45.8                 | -2.2          | 43.6                   | 88.2           | -44.6       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 11123.5         | 48.5                 | -2.6          | 45.9                   | 74.0           | -28.1       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 12288.0         | 47.0                 | -2.3          | 44.7                   | 74.0           | -29.3       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 10001.5         | 47.0                 | -2.2          | 44.8                   | 88.2           | -43.4       | Peak     | Vertical     |
| *                                                                                                                                                                                                    | 10579.5         | 47.3                 | -2.3          | 45.0                   | 88.2           | -43.2       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 11149.0         | 48.0                 | -2.6          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 12330.5         | 47.7                 | -2.5          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.<br>Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 97         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9721.0          | 46.8                 | -2.9          | 43.9                   | 88.2           | -44.3       | Peak     | Horizontal   |
| *    | 10282.0         | 46.7                 | -2.4          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
|      | 10775.0         | 47.9                 | -2.4          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
|      | 12092.5         | 47.8                 | -2.8          | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
| *    | 9644.5          | 46.1                 | -2.8          | 43.3                   | 88.2           | -44.9       | Peak     | Vertical     |
| *    | 10282.0         | 47.5                 | -2.4          | 45.1                   | 88.2           | -43.1       | Peak     | Vertical     |
|      | 10919.5         | 47.6                 | -2.4          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
|      | 12330.5         | 48.1                 | -2.5          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 105        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9831.5          | 47.4                 | -2.8          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
| *    | 10503.0         | 47.3                 | -2.4          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
|      | 11106.5         | 48.4                 | -2.7          | 45.7                   | 74.0           | -28.3       | Peak     | Horizontal   |
|      | 12619.5         | 47.7                 | -1.9          | 45.8                   | 74.0           | -28.2       | Peak     | Horizontal   |
| *    | 9874.0          | 47.5                 | -2.6          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
| *    | 10282.0         | 47.5                 | -2.4          | 45.1                   | 88.2           | -43.1       | Peak     | Vertical     |
|      | 10945.0         | 47.5                 | -2.4          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
|      | 12356.0         | 48.0                 | -2.3          | 45.7                   | 74.0           | -28.3       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 113        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9729.5          | 46.3                 | -2.9          | 43.4                   | 88.2           | -44.8       | Peak     | Horizontal   |
| *    | 10265.0         | 47.3                 | -2.4          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
|      | 10766.5         | 48.6                 | -2.5          | 46.1                   | 74.0           | -27.9       | Peak     | Horizontal   |
|      | 11939.5         | 48.4                 | -2.9          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *    | 10001.5         | 47.4                 | -2.2          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
| *    | 10350.0         | 46.9                 | -2.6          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
|      | 11642.0         | 48.9                 | -2.9          | 46.0                   | 74.0           | -28.0       | Peak     | Vertical     |
|      | 12373.0         | 47.6                 | -2.5          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 117        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                 | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                    | 9712.5          | 48.2                 | -2.9          | 45.3                   | 88.2           | -42.9       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 10248.0         | 47.4                 | -2.4          | 45.0                   | 88.2           | -43.2       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 11242.5         | 47.7                 | -2.6          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 12356.0         | 47.9                 | -2.3          | 45.6                   | 74.0           | -28.4       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 9712.5          | 48.2                 | -2.9          | 45.3                   | 88.2           | -42.9       | Peak     | Vertical     |
| *                                                                                                                                                                                                    | 10248.0         | 47.4                 | -2.4          | 45.0                   | 88.2           | -43.2       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 10826.0         | 46.8                 | -2.8          | 44.0                   | 74.0           | -30.0       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 11829.0         | 49.7                 | -3.2          | 46.5                   | 74.0           | -27.5       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.<br>Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 153        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                 | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                    | 9899.5          | 47.5                 | -2.6          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 10273.5         | 46.7                 | -2.4          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 10979.0         | 48.4                 | -2.5          | 45.9                   | 74.0           | -28.1       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 12296.5         | 47.9                 | -2.4          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 9678.5          | 47.6                 | -2.7          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
| *                                                                                                                                                                                                    | 10316.0         | 47.9                 | -2.3          | 45.6                   | 88.2           | -42.6       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 10877.0         | 47.6                 | -2.6          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 12322.0         | 47.8                 | -2.4          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.<br>Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 181        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9610.5          | 47.4                 | -2.9          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *                                                                                 | 10299.0         | 47.9                 | -2.1          | 45.8                   | 88.2           | -42.4       | Peak     | Horizontal   |
|                                                                                   | 11123.5         | 47.5                 | -2.6          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|                                                                                   | 11888.5         | 47.9                 | -2.9          | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
| *                                                                                 | 9619.0          | 47.7                 | -2.9          | 44.8                   | 88.2           | -43.4       | Peak     | Vertical     |
| *                                                                                 | 10358.5         | 47.7                 | -2.5          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
|                                                                                   | 11047.0         | 47.3                 | -2.4          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
|                                                                                   | 12262.5         | 48.4                 | -2.7          | 45.7                   | 74.0           | -28.3       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 185        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9644.5          | 48.4                 | -2.8          | 45.6                   | 88.2           | -42.6       | Peak     | Horizontal   |
| *    | 10154.5         | 47.4                 | -2.5          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
|      | 10783.5         | 46.7                 | -2.5          | 44.2                   | 74.0           | -29.8       | Peak     | Horizontal   |
|      | 12594.0         | 47.9                 | -2.1          | 45.8                   | 74.0           | -28.2       | Peak     | Horizontal   |
| *    | 9712.5          | 47.6                 | -2.9          | 44.7                   | 88.2           | -43.5       | Peak     | Vertical     |
| *    | 10579.5         | 47.2                 | -2.3          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
|      | 10996.0         | 47.3                 | -2.5          | 44.8                   | 74.0           | -29.2       | Peak     | Vertical     |
|      | 12313.5         | 48.3                 | -2.5          | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 189        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9653.0          | 47.5                 | -2.7          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10248.0         | 47.9                 | -2.4          | 45.5                   | 88.2           | -42.7       | Peak     | Horizontal   |
|      | 11038.5         | 47.3                 | -2.4          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 11854.5         | 48.6                 | -3.4          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
| *    | 9848.5          | 47.2                 | -2.6          | 44.6                   | 88.2           | -43.6       | Peak     | Vertical     |
| *    | 10452.0         | 47.2                 | -2.7          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
|      | 11140.5         | 47.5                 | -2.6          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
|      | 12517.5         | 47.7                 | -2.4          | 45.3                   | 74.0           | -28.7       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 213        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9891.0          | 47.2                 | -2.6          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
| *    | 10435.0         | 46.4                 | -2.7          | 43.7                   | 88.2           | -44.5       | Peak     | Horizontal   |
|      | 10877.0         | 46.9                 | -2.6          | 44.3                   | 74.0           | -29.7       | Peak     | Horizontal   |
|      | 11829.0         | 48.3                 | -3.2          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
| *    | 9789.0          | 47.1                 | -2.7          | 44.4                   | 88.2           | -43.8       | Peak     | Vertical     |
| *    | 10214.0         | 46.5                 | -2.6          | 43.9                   | 88.2           | -44.3       | Peak     | Vertical     |
|      | 10775.0         | 48.6                 | -2.4          | 46.2                   | 74.0           | -27.8       | Peak     | Vertical     |
|      | 12492.0         | 47.5                 | -2.4          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11a                                                                                                                                                                           | Test Channel  | 229        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                 | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                    | 9602.0          | 46.8                 | -2.8          | 44.0                   | 88.2           | -44.2       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 10579.5         | 46.2                 | -2.3          | 43.9                   | 88.2           | -44.3       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 10902.5         | 47.1                 | -2.5          | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 12381.5         | 47.5                 | -2.6          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 9806.0          | 46.4                 | -2.8          | 43.6                   | 88.2           | -44.6       | Peak     | Vertical     |
| *                                                                                                                                                                                                    | 10545.5         | 48.6                 | -2.7          | 45.9                   | 88.2           | -42.3       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 11234.0         | 47.5                 | -2.5          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |
| *                                                                                                                                                                                                    | 11948.0         | 47.8                 | -2.6          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.<br>Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 01         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9789.0          | 47.5                 | -2.7          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10171.5         | 48.6                 | -2.5          | 46.1                   | 88.2           | -42.1       | Peak     | Horizontal   |
|      | 11021.5         | 48.5                 | -2.5          | 46.0                   | 74.0           | -28.0       | Peak     | Horizontal   |
|      | 11905.5         | 48.3                 | -2.8          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *    | 9772.0          | 47.9                 | -2.7          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
| *    | 10392.5         | 47.5                 | -2.4          | 45.1                   | 88.2           | -43.1       | Peak     | Vertical     |
|      | 10911.0         | 48.0                 | -2.4          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |
|      | 12152.0         | 48.5                 | -3.2          | 45.3                   | 74.0           | -28.7       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 49         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9670.0          | 46.9                 | -2.6          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
| *    | 10239.5         | 47.6                 | -2.4          | 45.2                   | 88.2           | -43.0       | Peak     | Horizontal   |
|      | 11030.0         | 47.3                 | -2.4          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 11897.0         | 48.0                 | -2.8          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
| *    | 9746.5          | 47.2                 | -2.8          | 44.4                   | 88.2           | -43.8       | Peak     | Vertical     |
| *    | 10588.0         | 46.7                 | -2.1          | 44.6                   | 88.2           | -43.6       | Peak     | Vertical     |
|      | 11183.0         | 49.2                 | -3.1          | 46.1                   | 74.0           | -27.9       | Peak     | Vertical     |
|      | 12517.5         | 47.7                 | -2.4          | 45.3                   | 74.0           | -28.7       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 93         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9874.0          | 47.4                 | -2.6          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10231.0         | 47.1                 | -2.3          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
|      | 10911.0         | 47.3                 | -2.4          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 12687.5         | 48.0                 | -1.7          | 46.3                   | 74.0           | -27.7       | Peak     | Horizontal   |
| *    | 9721.0          | 46.8                 | -2.9          | 43.9                   | 88.2           | -44.3       | Peak     | Vertical     |
| *    | 10443.5         | 46.7                 | -2.7          | 44.0                   | 88.2           | -44.2       | Peak     | Vertical     |
|      | 11047.0         | 46.9                 | -2.4          | 44.5                   | 74.0           | -29.5       | Peak     | Vertical     |
|      | 12347.5         | 48.1                 | -2.4          | 45.7                   | 74.0           | -28.3       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 97         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9780.5          | 47.5                 | -2.7          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10418.0         | 47.3                 | -2.6          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
|      | 11157.5         | 47.6                 | -2.7          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 12492.0         | 47.9                 | -2.4          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *    | 9568.0          | 47.2                 | -2.9          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *    | 10171.5         | 48.0                 | -2.5          | 45.5                   | 88.2           | -42.7       | Peak     | Vertical     |
|      | 11106.5         | 47.8                 | -2.7          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
|      | 11922.5         | 49.9                 | -3.0          | 46.9                   | 74.0           | -27.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 105        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9678.5          | 47.7                 | -2.7          | 45.0                   | 88.2           | -43.2       | Peak     | Horizontal   |
| *                                                                                 | 9993.0          | 48.0                 | -2.2          | 45.8                   | 88.2           | -42.4       | Peak     | Horizontal   |
|                                                                                   | 11353.0         | 48.2                 | -2.8          | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
|                                                                                   | 12330.5         | 46.7                 | -2.5          | 44.2                   | 74.0           | -29.8       | Peak     | Horizontal   |
| *                                                                                 | 9610.5          | 47.5                 | -2.9          | 44.6                   | 88.2           | -43.6       | Peak     | Vertical     |
| *                                                                                 | 10571.0         | 47.7                 | -2.4          | 45.3                   | 88.2           | -42.9       | Peak     | Vertical     |
|                                                                                   | 11412.5         | 47.5                 | -2.9          | 44.6                   | 74.0           | -29.4       | Peak     | Vertical     |
|                                                                                   | 12339.0         | 48.0                 | -2.5          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 113        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9789.0          | 47.2                 | -2.7          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *    | 10214.0         | 48.2                 | -2.6          | 45.6                   | 88.2           | -42.6       | Peak     | Horizontal   |
|      | 10987.5         | 47.4                 | -2.5          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 12398.5         | 48.9                 | -2.5          | 46.4                   | 74.0           | -27.6       | Peak     | Horizontal   |
| *    | 9644.5          | 47.9                 | -2.8          | 45.1                   | 88.2           | -43.1       | Peak     | Vertical     |
| *    | 10248.0         | 47.8                 | -2.4          | 45.4                   | 88.2           | -42.8       | Peak     | Vertical     |
|      | 11208.5         | 48.4                 | -2.9          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |
|      | 12033.0         | 47.6                 | -2.7          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 117        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9857.0          | 48.0                 | -2.4          | 45.6                   | 88.2           | -42.6       | Peak     | Horizontal   |
| *    | 10265.0         | 47.0                 | -2.4          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
|      | 11149.0         | 47.8                 | -2.6          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
|      | 12220.0         | 48.4                 | -2.9          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *    | 9993.0          | 48.2                 | -2.2          | 46.0                   | 88.2           | -42.2       | Peak     | Vertical     |
| *    | 10401.0         | 46.4                 | -2.3          | 44.1                   | 88.2           | -44.1       | Peak     | Vertical     |
|      | 11089.5         | 48.7                 | -2.8          | 45.9                   | 74.0           | -28.1       | Peak     | Vertical     |
|      | 12441.0         | 47.7                 | -2.5          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 153        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                                                                                                                                                 | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                                                                                                                                    | 9908.0          | 47.1                 | -2.6          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 10299.0         | 46.8                 | -2.1          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 10911.0         | 47.6                 | -2.4          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
|                                                                                                                                                                                                      | 12322.0         | 48.1                 | -2.4          | 45.7                   | 74.0           | -28.3       | Peak     | Horizontal   |
| *                                                                                                                                                                                                    | 9644.5          | 47.1                 | -2.8          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *                                                                                                                                                                                                    | 10171.5         | 47.5                 | -2.5          | 45.0                   | 88.2           | -43.2       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 10953.5         | 48.2                 | -2.4          | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
|                                                                                                                                                                                                      | 11914.0         | 48.0                 | -2.8          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.<br>Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 181        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9959.0          | 46.9                 | -2.1          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10324.5         | 47.6                 | -2.5          | 45.1                   | 88.2           | -43.1       | Peak     | Horizontal   |
|      | 10945.0         | 47.4                 | -2.4          | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
|      | 12237.0         | 48.3                 | -2.5          | 45.8                   | 74.0           | -28.2       | Peak     | Horizontal   |
| *    | 9678.5          | 47.0                 | -2.7          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *    | 10520.0         | 47.2                 | -2.7          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
|      | 11319.0         | 47.6                 | -2.7          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
|      | 12313.5         | 47.9                 | -2.5          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 185        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9636.0          | 47.2                 | -2.9          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
| *    | 10358.5         | 47.7                 | -2.5          | 45.2                   | 88.2           | -43.0       | Peak     | Horizontal   |
|      | 11030.0         | 46.9                 | -2.4          | 44.5                   | 74.0           | -29.5       | Peak     | Horizontal   |
|      | 11854.5         | 48.6                 | -3.4          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
| *    | 10027.0         | 47.4                 | -2.2          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
| *    | 10554.0         | 47.6                 | -2.6          | 45.0                   | 88.2           | -43.2       | Peak     | Vertical     |
|      | 11472.0         | 48.7                 | -3.1          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |
|      | 12288.0         | 47.9                 | -2.3          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 189        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9721.0          | 46.3                 | -2.9          | 43.4                   | 88.2           | -44.8       | Peak     | Horizontal   |
| *    | 10214.0         | 46.4                 | -2.6          | 43.8                   | 88.2           | -44.4       | Peak     | Horizontal   |
|      | 10758.0         | 47.2                 | -2.6          | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
|      | 11939.5         | 48.1                 | -2.9          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
| *    | 9746.5          | 47.1                 | -2.8          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *    | 10435.0         | 47.6                 | -2.7          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
|      | 11081.0         | 48.6                 | -2.8          | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
|      | 12534.5         | 47.9                 | -2.3          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 213        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9687.0          | 46.1                 | -2.8          | 43.3                   | 88.2           | -44.9       | Peak     | Horizontal   |
| *    | 10350.0         | 46.8                 | -2.6          | 44.2                   | 88.2           | -44.0       | Peak     | Horizontal   |
|      | 10902.5         | 47.5                 | -2.5          | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
|      | 12220.0         | 45.1                 | -2.9          | 42.2                   | 74.0           | -31.8       | Peak     | Horizontal   |
| *    | 9789.0          | 47.2                 | -2.7          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *    | 10401.0         | 45.9                 | -2.3          | 43.6                   | 88.2           | -44.6       | Peak     | Vertical     |
|      | 11004.5         | 47.5                 | -2.5          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |
|      | 12322.0         | 48.0                 | -2.4          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE20                                                                                                                                                                     | Test Channel  | 229        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9763.5          | 47.2                 | -2.7          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *                                                                                 | 10044.0         | 47.3                 | -1.9          | 45.4                   | 88.2           | -42.8       | Peak     | Horizontal   |
|                                                                                   | 10639.0         | 47.5                 | -2.4          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
|                                                                                   | 12398.5         | 48.0                 | -2.5          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *                                                                                 | 9789.0          | 47.6                 | -2.7          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
| *                                                                                 | 10256.5         | 47.3                 | -2.4          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
|                                                                                   | 10987.5         | 48.6                 | -2.5          | 46.1                   | 74.0           | -27.9       | Peak     | Vertical     |
|                                                                                   | 12245.5         | 47.3                 | -2.7          | 44.6                   | 74.0           | -29.4       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 03         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9602.0          | 47.1                 | -2.8          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
| *                                                                                 | 10477.5         | 47.4                 | -2.4          | 45.0                   | 88.2           | -43.2       | Peak     | Horizontal   |
|                                                                                   | 11004.5         | 47.1                 | -2.5          | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
|                                                                                   | 12322.0         | 47.8                 | -2.4          | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
| *                                                                                 | 9678.5          | 46.7                 | -2.7          | 44.0                   | 88.2           | -44.2       | Peak     | Vertical     |
| *                                                                                 | 10231.0         | 46.9                 | -2.3          | 44.6                   | 88.2           | -43.6       | Peak     | Vertical     |
|                                                                                   | 11115.0         | 47.4                 | -2.7          | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|                                                                                   | 11922.5         | 47.7                 | -3.0          | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 51         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9653.0          | 47.4                 | -2.7          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
| *    | 10163.0         | 48.5                 | -2.3          | 46.2                   | 88.2           | -42.0       | Peak     | Horizontal   |
|      | 10970.5         | 48.0                 | -2.5          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
|      | 12296.5         | 48.5                 | -2.4          | 46.1                   | 74.0           | -27.9       | Peak     | Horizontal   |
| *    | 9593.5          | 47.4                 | -2.8          | 44.6                   | 88.2           | -43.6       | Peak     | Vertical     |
| *    | 10239.5         | 47.2                 | -2.4          | 44.8                   | 88.2           | -43.4       | Peak     | Vertical     |
|      | 10953.5         | 47.1                 | -2.4          | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|      | 12033.0         | 47.7                 | -2.7          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 91         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9610.5          | 47.4                 | -2.9          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *    | 10307.5         | 46.5                 | -2.2          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
|      | 10902.5         | 48.2                 | -2.5          | 45.7                   | 74.0           | -28.3       | Peak     | Horizontal   |
|      | 12322.0         | 47.8                 | -2.4          | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
| *    | 9619.0          | 47.4                 | -2.9          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *    | 10265.0         | 46.5                 | -2.4          | 44.1                   | 88.2           | -44.1       | Peak     | Vertical     |
|      | 11038.5         | 47.8                 | -2.4          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
|      | 12288.0         | 47.6                 | -2.3          | 45.3                   | 74.0           | -28.7       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 99         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9670.0          | 46.3                 | -2.6          | 43.7                   | 88.2           | -44.5       | Peak     | Horizontal   |
| *                                                                                 | 10367.0         | 47.0                 | -2.4          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
|                                                                                   | 11081.0         | 48.2                 | -2.8          | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
|                                                                                   | 12492.0         | 47.9                 | -2.4          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *                                                                                 | 9916.5          | 47.4                 | -2.6          | 44.8                   | 88.2           | -43.4       | Peak     | Vertical     |
| *                                                                                 | 10307.5         | 46.3                 | -2.2          | 44.1                   | 88.2           | -44.1       | Peak     | Vertical     |
|                                                                                   | 11251.0         | 47.7                 | -2.6          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
|                                                                                   | 12050.0         | 47.8                 | -2.9          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 107        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9602.0          | 47.5                 | -2.8          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
| *    | 10265.0         | 46.7                 | -2.4          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
|      | 10860.0         | 47.0                 | -2.6          | 44.4                   | 74.0           | -29.6       | Peak     | Horizontal   |
|      | 12288.0         | 46.9                 | -2.3          | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
| *    | 9661.5          | 47.4                 | -2.7          | 44.7                   | 88.2           | -43.5       | Peak     | Vertical     |
| *    | 10316.0         | 48.1                 | -2.3          | 45.8                   | 88.2           | -42.4       | Peak     | Vertical     |
|      | 10690.0         | 47.5                 | -2.3          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
|      | 11939.5         | 47.8                 | -2.9          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 115        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9712.5          | 47.3                 | -2.9          | 44.4                   | 88.2           | -43.8       | Peak     | Horizontal   |
| *                                                                                 | 10188.5         | 46.9                 | -2.7          | 44.2                   | 88.2           | -44.0       | Peak     | Horizontal   |
|                                                                                   | 11098.0         | 48.9                 | -2.7          | 46.2                   | 74.0           | -27.8       | Peak     | Horizontal   |
|                                                                                   | 11948.0         | 47.2                 | -2.6          | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
| *                                                                                 | 9746.5          | 47.3                 | -2.8          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *                                                                                 | 10307.5         | 46.7                 | -2.2          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
|                                                                                   | 10851.5         | 47.4                 | -2.7          | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|                                                                                   | 12390.0         | 47.9                 | -2.7          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 123        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9687.0          | 46.8                 | -2.8          | 44.0                   | 88.2           | -44.2       | Peak     | Horizontal   |
| *    | 10375.5         | 47.1                 | -2.4          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
|      | 11055.5         | 47.4                 | -2.6          | 44.8                   | 74.0           | -29.2       | Peak     | Horizontal   |
|      | 12517.5         | 47.9                 | -2.4          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *    | 9593.5          | 45.6                 | -2.8          | 42.8                   | 88.2           | -45.4       | Peak     | Vertical     |
| *    | 10520.0         | 47.7                 | -2.7          | 45.0                   | 88.2           | -43.2       | Peak     | Vertical     |
|      | 11285.0         | 47.7                 | -2.8          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
|      | 12330.5         | 48.2                 | -2.5          | 45.7                   | 74.0           | -28.3       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 147        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9772.0          | 46.6                 | -2.7          | 43.9                   | 88.2           | -44.3       | Peak     | Horizontal   |
| *    | 10554.0         | 47.9                 | -2.6          | 45.3                   | 88.2           | -42.9       | Peak     | Horizontal   |
|      | 11140.5         | 47.7                 | -2.6          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
|      | 12424.0         | 48.1                 | -2.3          | 45.8                   | 74.0           | -28.2       | Peak     | Horizontal   |
| *    | 9670.0          | 46.6                 | -2.6          | 44.0                   | 88.2           | -44.2       | Peak     | Vertical     |
| *    | 10214.0         | 46.9                 | -2.6          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
|      | 10987.5         | 48.0                 | -2.5          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |
|      | 12305.0         | 47.5                 | -2.5          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 179        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9602.0          | 47.4                 | -2.8          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
| *    | 10299.0         | 46.3                 | -2.1          | 44.2                   | 88.2           | -44.0       | Peak     | Horizontal   |
|      | 11166.0         | 47.7                 | -2.8          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 12398.5         | 48.0                 | -2.5          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *    | 9780.5          | 46.6                 | -2.7          | 43.9                   | 88.2           | -44.3       | Peak     | Vertical     |
| *    | 10341.5         | 48.4                 | -2.7          | 45.7                   | 88.2           | -42.5       | Peak     | Vertical     |
|      | 11098.0         | 48.1                 | -2.7          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
|      | 11948.0         | 48.1                 | -2.6          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 187        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9602.0          | 46.3                 | -2.8          | 43.5                   | 88.2           | -44.7       | Peak     | Horizontal   |
| *    | 10290.5         | 46.7                 | -2.3          | 44.4                   | 88.2           | -43.8       | Peak     | Horizontal   |
|      | 11089.5         | 47.7                 | -2.8          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 12024.5         | 47.7                 | -2.7          | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
| *    | 9780.5          | 47.0                 | -2.7          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *    | 10324.5         | 46.7                 | -2.5          | 44.2                   | 88.2           | -44.0       | Peak     | Vertical     |
|      | 10970.5         | 47.5                 | -2.5          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |
|      | 12024.5         | 47.7                 | -2.7          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 195        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9636.0          | 46.9                 | -2.9          | 44.0                   | 88.2           | -44.2       | Peak     | Horizontal   |
| *    | 10333.0         | 47.8                 | -2.8          | 45.0                   | 88.2           | -43.2       | Peak     | Horizontal   |
|      | 11157.5         | 48.0                 | -2.7          | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
|      | 12373.0         | 47.7                 | -2.5          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
| *    | 9670.0          | 46.7                 | -2.6          | 44.1                   | 88.2           | -44.1       | Peak     | Vertical     |
| *    | 10299.0         | 47.8                 | -2.1          | 45.7                   | 88.2           | -42.5       | Peak     | Vertical     |
|      | 11455.0         | 47.7                 | -3.0          | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|      | 12203.0         | 47.8                 | -2.7          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 211        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9772.0          | 47.6                 | -2.7          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
| *    | 10307.5         | 48.3                 | -2.2          | 46.1                   | 88.2           | -42.1       | Peak     | Horizontal   |
|      | 10970.5         | 47.6                 | -2.5          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
|      | 12594.0         | 48.0                 | -2.1          | 45.9                   | 74.0           | -28.1       | Peak     | Horizontal   |
| *    | 9670.0          | 46.4                 | -2.6          | 43.8                   | 88.2           | -44.4       | Peak     | Vertical     |
| *    | 10299.0         | 47.5                 | -2.1          | 45.4                   | 88.2           | -42.8       | Peak     | Vertical     |
|      | 10783.5         | 45.9                 | -2.5          | 43.4                   | 74.0           | -30.6       | Peak     | Vertical     |
|      | 12585.5         | 47.7                 | -2.2          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE40                                                                                                                                                                     | Test Channel  | 227        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9814.5          | 47.4                 | -2.8          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
| *    | 10324.5         | 48.5                 | -2.5          | 46.0                   | 88.2           | -42.2       | Peak     | Horizontal   |
|      | 10809.0         | 47.9                 | -2.7          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
|      | 11761.0         | 48.2                 | -3.1          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
| *    | 9882.5          | 46.9                 | -2.6          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *    | 10401.0         | 46.3                 | -2.3          | 44.0                   | 88.2           | -44.2       | Peak     | Vertical     |
|      | 11276.5         | 46.4                 | -2.8          | 43.6                   | 74.0           | -30.4       | Peak     | Vertical     |
|      | 12296.5         | 47.7                 | -2.4          | 45.3                   | 74.0           | -28.7       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 07         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9593.5          | 47.5                 | -2.8          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
| *                                                                                 | 10086.5         | 47.7                 | -2.4          | 45.3                   | 88.2           | -42.9       | Peak     | Horizontal   |
|                                                                                   | 10656.0         | 48.1                 | -2.5          | 45.6                   | 74.0           | -28.4       | Peak     | Horizontal   |
|                                                                                   | 12296.5         | 48.0                 | -2.4          | 45.6                   | 74.0           | -28.4       | Peak     | Horizontal   |
| *                                                                                 | 9797.5          | 47.2                 | -2.7          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *                                                                                 | 10316.0         | 47.2                 | -2.3          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
|                                                                                   | 11251.0         | 48.0                 | -2.6          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
|                                                                                   | 12364.5         | 48.9                 | -2.4          | 46.5                   | 74.0           | -27.5       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 55         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9984.5          | 47.0                 | -2.1          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
| *    | 10231.0         | 47.2                 | -2.3          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
|      | 10894.0         | 47.3                 | -2.6          | 44.7                   | 74.0           | -29.3       | Peak     | Horizontal   |
|      | 12007.5         | 47.7                 | -2.8          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
| *    | 9585.0          | 47.3                 | -2.8          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *    | 10078.0         | 47.5                 | -2.3          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
|      | 11098.0         | 47.2                 | -2.7          | 44.5                   | 74.0           | -29.5       | Peak     | Vertical     |
|      | 11837.5         | 48.2                 | -3.3          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 87         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9704.0          | 47.2                 | -2.9          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
| *                                                                                 | 10384.0         | 46.7                 | -2.4          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
|                                                                                   | 11106.5         | 47.9                 | -2.7          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
|                                                                                   | 12211.5         | 47.0                 | -2.8          | 44.2                   | 74.0           | -29.8       | Peak     | Horizontal   |
| *                                                                                 | 9627.5          | 47.4                 | -2.9          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *                                                                                 | 10231.0         | 47.4                 | -2.3          | 45.1                   | 88.2           | -43.1       | Peak     | Vertical     |
|                                                                                   | 10758.0         | 48.2                 | -2.6          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |
|                                                                                   | 12050.0         | 48.0                 | -2.9          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 103        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9636.0          | 46.0                 | -2.9          | 43.1                   | 88.2           | -45.1       | Peak     | Horizontal   |
| *    | 10316.0         | 46.7                 | -2.3          | 44.4                   | 88.2           | -43.8       | Peak     | Horizontal   |
|      | 11047.0         | 47.3                 | -2.4          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 12373.0         | 48.1                 | -2.5          | 45.6                   | 74.0           | -28.4       | Peak     | Horizontal   |
| *    | 9610.5          | 48.2                 | -2.9          | 45.3                   | 88.2           | -42.9       | Peak     | Vertical     |
| *    | 10129.0         | 47.8                 | -2.8          | 45.0                   | 88.2           | -43.2       | Peak     | Vertical     |
|      | 10902.5         | 47.1                 | -2.5          | 44.6                   | 74.0           | -29.4       | Peak     | Vertical     |
|      | 12067.0         | 48.0                 | -2.8          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 119        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9593.5          | 46.2                 | -2.8          | 43.4                   | 88.2           | -44.8       | Peak     | Horizontal   |
| *                                                                                 | 10273.5         | 47.0                 | -2.4          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
|                                                                                   | 11157.5         | 47.6                 | -2.7          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|                                                                                   | 12543.0         | 47.8                 | -2.3          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *                                                                                 | 9848.5          | 47.1                 | -2.6          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *                                                                                 | 10316.0         | 47.8                 | -2.3          | 45.5                   | 88.2           | -42.7       | Peak     | Vertical     |
|                                                                                   | 11047.0         | 47.6                 | -2.4          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
|                                                                                   | 12398.5         | 48.1                 | -2.5          | 45.6                   | 74.0           | -28.4       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 135        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9780.5          | 47.0                 | -2.7          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
| *    | 10418.0         | 47.3                 | -2.6          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
|      | 11047.0         | 47.3                 | -2.4          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 12330.5         | 47.0                 | -2.5          | 44.5                   | 74.0           | -29.5       | Peak     | Horizontal   |
| *    | 9644.5          | 47.6                 | -2.8          | 44.8                   | 88.2           | -43.4       | Peak     | Vertical     |
| *    | 10180.0         | 48.2                 | -2.6          | 45.6                   | 88.2           | -42.6       | Peak     | Vertical     |
|      | 10885.5         | 47.3                 | -2.6          | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|      | 11965.0         | 48.1                 | -3.1          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 151        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9789.0          | 47.2                 | -2.7          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *    | 10290.5         | 47.9                 | -2.3          | 45.6                   | 88.2           | -42.6       | Peak     | Horizontal   |
|      | 11089.5         | 47.7                 | -2.8          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|      | 11948.0         | 47.9                 | -2.6          | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
| *    | 9593.5          | 47.4                 | -2.8          | 44.6                   | 88.2           | -43.6       | Peak     | Vertical     |
| *    | 10163.0         | 47.8                 | -2.3          | 45.5                   | 88.2           | -42.7       | Peak     | Vertical     |
|      | 10715.5         | 48.9                 | -2.5          | 46.4                   | 74.0           | -27.6       | Peak     | Vertical     |
|      | 11625.0         | 48.5                 | -3.0          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 183        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9687.0          | 46.7                 | -2.8          | 43.9                   | 88.2           | -44.3       | Peak     | Horizontal   |
| *    | 10180.0         | 48.0                 | -2.6          | 45.4                   | 88.2           | -42.8       | Peak     | Horizontal   |
|      | 11055.5         | 47.8                 | -2.6          | 45.2                   | 74.0           | -28.8       | Peak     | Horizontal   |
|      | 12313.5         | 47.8                 | -2.5          | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
| *    | 9644.5          | 47.0                 | -2.8          | 44.2                   | 88.2           | -44.0       | Peak     | Vertical     |
| *    | 10154.5         | 47.8                 | -2.5          | 45.3                   | 88.2           | -42.9       | Peak     | Vertical     |
|      | 11157.5         | 47.7                 | -2.7          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |
|      | 12024.5         | 47.9                 | -2.7          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 199        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9610.5          | 47.7                 | -2.9          | 44.8                   | 88.2           | -43.4       | Peak     | Horizontal   |
| *    | 10248.0         | 47.6                 | -2.4          | 45.2                   | 88.2           | -43.0       | Peak     | Horizontal   |
|      | 10775.0         | 47.4                 | -2.4          | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
|      | 12288.0         | 47.2                 | -2.3          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
| *    | 9721.0          | 47.7                 | -2.9          | 44.8                   | 88.2           | -43.4       | Peak     | Vertical     |
| *    | 10537.0         | 46.4                 | -2.8          | 43.6                   | 88.2           | -44.6       | Peak     | Vertical     |
|      | 11140.5         | 47.5                 | -2.6          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
|      | 12058.5         | 47.7                 | -2.8          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE80                                                                                                                                                                     | Test Channel  | 215        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9891.0          | 47.2                 | -2.6          | 44.6                   | 88.2           | -43.6       | Peak     | Horizontal   |
| *    | 10265.0         | 46.1                 | -2.4          | 43.7                   | 88.2           | -44.5       | Peak     | Horizontal   |
|      | 11038.5         | 46.6                 | -2.4          | 44.2                   | 74.0           | -29.8       | Peak     | Horizontal   |
|      | 12288.0         | 47.6                 | -2.3          | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
| *    | 9687.0          | 47.1                 | -2.8          | 44.3                   | 88.2           | -43.9       | Peak     | Vertical     |
| *    | 10469.0         | 47.2                 | -2.5          | 44.7                   | 88.2           | -43.5       | Peak     | Vertical     |
|      | 11157.5         | 47.5                 | -2.7          | 44.8                   | 74.0           | -29.2       | Peak     | Vertical     |
|      | 11914.0         | 47.7                 | -2.8          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 15         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9653.0          | 47.0                 | -2.7          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
| *    | 10205.5         | 48.3                 | -2.7          | 45.6                   | 88.2           | -42.6       | Peak     | Horizontal   |
|      | 10715.5         | 47.9                 | -2.5          | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
|      | 12313.5         | 48.2                 | -2.5          | 45.7                   | 74.0           | -28.3       | Peak     | Horizontal   |
| *    | 9729.5          | 47.4                 | -2.9          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
| *    | 10214.0         | 47.9                 | -2.6          | 45.3                   | 88.2           | -42.9       | Peak     | Vertical     |
|      | 11378.5         | 48.0                 | -2.9          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
|      | 12075.5         | 48.3                 | -2.8          | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 47         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9984.5          | 47.5                 | -2.1          | 45.4                   | 88.2           | -42.8       | Peak     | Horizontal   |
| *                                                                                 | 10324.5         | 47.4                 | -2.5          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
|                                                                                   | 11030.0         | 47.4                 | -2.4          | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
|                                                                                   | 12373.0         | 47.4                 | -2.5          | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
| *                                                                                 | 9627.5          | 48.1                 | -2.9          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
| *                                                                                 | 9993.0          | 47.5                 | -2.2          | 45.3                   | 88.2           | -42.9       | Peak     | Vertical     |
|                                                                                   | 10868.5         | 47.5                 | -2.6          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
|                                                                                   | 12058.5         | 47.8                 | -2.8          | 45.0                   | 74.0           | -29.0       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 79         |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9627.5          | 46.4                 | -2.9          | 43.5                   | 88.2           | -44.7       | Peak     | Horizontal   |
| *    | 10239.5         | 47.1                 | -2.4          | 44.7                   | 88.2           | -43.5       | Peak     | Horizontal   |
|      | 10970.5         | 47.0                 | -2.5          | 44.5                   | 74.0           | -29.5       | Peak     | Horizontal   |
|      | 12024.5         | 48.6                 | -2.7          | 45.9                   | 74.0           | -28.1       | Peak     | Horizontal   |
| *    | 9576.5          | 47.4                 | -2.8          | 44.6                   | 88.2           | -43.6       | Peak     | Vertical     |
| *    | 10554.0         | 48.4                 | -2.6          | 45.8                   | 88.2           | -42.4       | Peak     | Vertical     |
|      | 11013.0         | 48.3                 | -2.5          | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
|      | 12585.5         | 48.2                 | -2.2          | 46.0                   | 74.0           | -28.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 111        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9585.0          | 47.2                 | -2.8          | 44.4                   | 88.2           | -43.8       | Peak     | Horizontal   |
| *                                                                                 | 10367.0         | 47.3                 | -2.4          | 44.9                   | 88.2           | -43.3       | Peak     | Horizontal   |
|                                                                                   | 11089.5         | 48.1                 | -2.8          | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
|                                                                                   | 12432.5         | 47.9                 | -2.4          | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
| *                                                                                 | 9653.0          | 47.9                 | -2.7          | 45.2                   | 88.2           | -43.0       | Peak     | Vertical     |
| *                                                                                 | 10316.0         | 47.2                 | -2.3          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
|                                                                                   | 10911.0         | 47.5                 | -2.4          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
|                                                                                   | 12220.0         | 48.1                 | -2.9          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 143        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9602.0          | 47.0                 | -2.8          | 44.2                   | 88.2           | -44.0       | Peak     | Horizontal   |
| *    | 10231.0         | 46.6                 | -2.3          | 44.3                   | 88.2           | -43.9       | Peak     | Horizontal   |
|      | 10877.0         | 45.6                 | -2.6          | 43.0                   | 74.0           | -31.0       | Peak     | Horizontal   |
|      | 12169.0         | 47.4                 | -3.2          | 44.2                   | 74.0           | -29.8       | Peak     | Horizontal   |
| *    | 9848.5          | 47.5                 | -2.6          | 44.9                   | 88.2           | -43.3       | Peak     | Vertical     |
| *    | 10222.5         | 47.4                 | -2.4          | 45.0                   | 88.2           | -43.2       | Peak     | Vertical     |
|      | 11157.5         | 47.8                 | -2.7          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |
|      | 12356.0         | 47.7                 | -2.3          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 175        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark                                                                              | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *                                                                                 | 9619.0          | 47.4                 | -2.9          | 44.5                   | 88.2           | -43.7       | Peak     | Horizontal   |
| *                                                                                 | 10163.0         | 47.7                 | -2.3          | 45.4                   | 88.2           | -42.8       | Peak     | Horizontal   |
|                                                                                   | 11004.5         | 47.6                 | -2.5          | 45.1                   | 74.0           | -28.9       | Peak     | Horizontal   |
|                                                                                   | 12543.0         | 48.2                 | -2.3          | 45.9                   | 74.0           | -28.1       | Peak     | Horizontal   |
| *                                                                                 | 9678.5          | 46.7                 | -2.7          | 44.0                   | 88.2           | -44.2       | Peak     | Vertical     |
| *                                                                                 | 10265.0         | 46.9                 | -2.4          | 44.5                   | 88.2           | -43.7       | Peak     | Vertical     |
|                                                                                   | 10911.0         | 48.7                 | -2.4          | 46.3                   | 74.0           | -27.7       | Peak     | Vertical     |
|                                                                                   | 12126.5         | 48.5                 | -3.1          | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
| Note 1: "*" is not in restricted band.                                            |                 |                      |               |                        |                |             |          |              |
| Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)             |                 |                      |               |                        |                |             |          |              |
| Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Product   | Tri-band Wi-Fi 6E Wireless AP                                                                                                                                                     | Test Engineer | Mero Zhou  |
| Test Site | SIP-AC3                                                                                                                                                                           | Test Date     | 2023-01-14 |
| Test Mode | 802.11ax-HE160                                                                                                                                                                    | Test Channel  | 207        |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10018.5         | 47.8                 | -2.2          | 45.6                   | 88.2           | -42.6       | Peak     | Horizontal   |
| *    | 10392.5         | 47.9                 | -2.4          | 45.5                   | 88.2           | -42.7       | Peak     | Horizontal   |
|      | 11455.0         | 47.6                 | -3.0          | 44.6                   | 74.0           | -29.4       | Peak     | Horizontal   |
|      | 12628.0         | 47.7                 | -2.0          | 45.7                   | 74.0           | -28.3       | Peak     | Horizontal   |
| *    | 9636.0          | 46.6                 | -2.9          | 43.7                   | 88.2           | -44.5       | Peak     | Vertical     |
| *    | 10265.0         | 46.1                 | -2.4          | 43.7                   | 88.2           | -44.5       | Peak     | Vertical     |
|      | 10902.5         | 47.7                 | -2.5          | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
|      | 12050.0         | 48.0                 | -2.9          | 45.1                   | 74.0           | -28.9       | Peak     | Vertical     |


Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 1GHz:

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: SIP-AC1                                          | Test Date: 2023-01-17 |
| Limit: FCC_Part15.209_RSE(3m)_6G                       | Engineer: Mero Zhou   |
| Probe: VULB 9168_00998_25-2000MHz                      | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP                     | Power: AC 120V/60Hz   |
| <b>Test Mode:</b> Transmit by 802.11ax-HE80 at 6945MHz |                       |

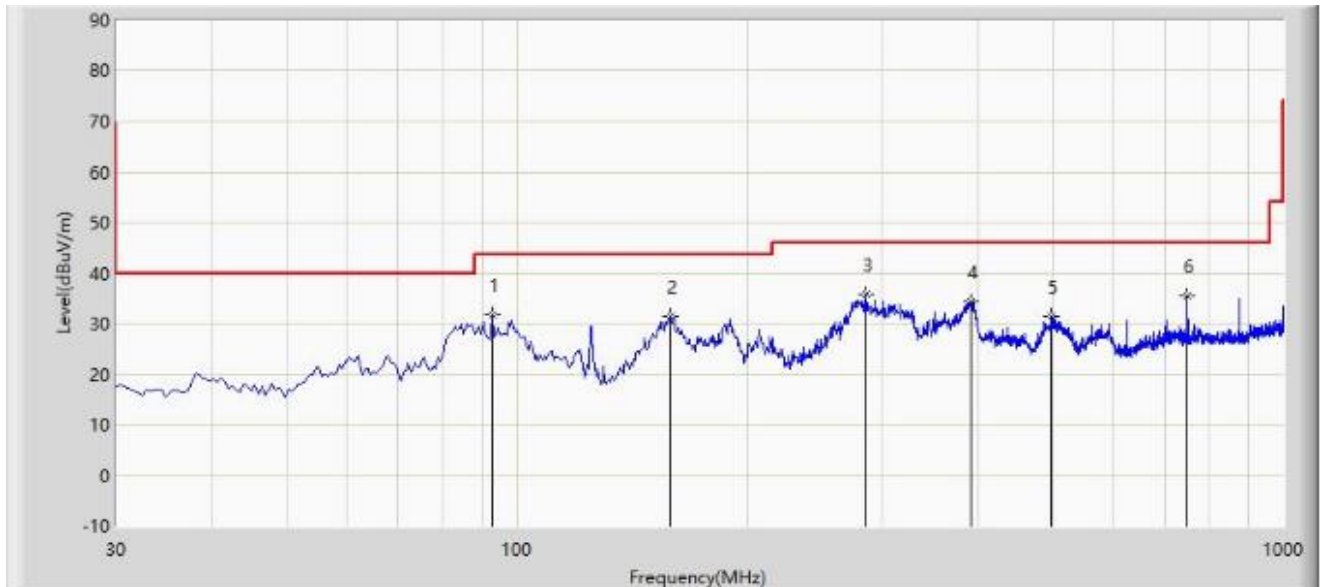

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 93.050          | 31.840                 | 19.328               | -11.660     | 43.500         | 12.512        | PK   |
| 2  |      | 158.525         | 31.577                 | 13.466               | -11.923     | 43.500         | 18.111        | PK   |
| 3  | *    | 285.595         | 35.724                 | 17.502               | -10.276     | 46.000         | 18.222        | PK   |
| 4  |      | 390.840         | 34.319                 | 13.802               | -11.681     | 46.000         | 20.517        | PK   |
| 5  |      | 498.025         | 31.465                 | 8.428                | -14.535     | 46.000         | 23.038        | PK   |
| 6  |      | 750.225         | 35.420                 | 7.320                | -10.580     | 46.000         | 28.100        | PK   |

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: SIP-AC1                                          | Test Date: 2023-01-17 |
| Limit: FCC_Part15.209_RSE(3m)_6G                       | Engineer: Mero Zhou   |
| Probe: VULB 9168_00998_25-2000MHz                      | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP                     | Power: AC 120V/60Hz   |
| <b>Test Mode:</b> Transmit by 802.11ax-HE80 at 6945MHz |                       |

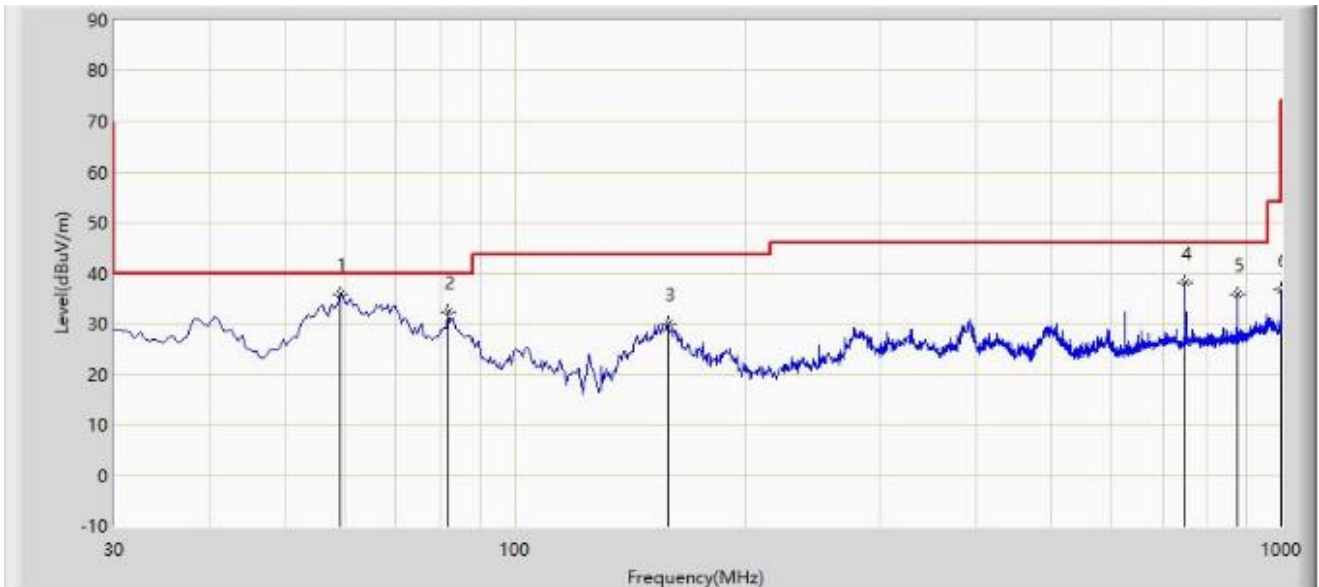

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 59.100          | 35.810                 | 18.241               | -4.190      | 40.000         | 17.569        | PK   |
| 2  |      | 81.895          | 32.262                 | 19.192               | -7.738      | 40.000         | 13.071        | PK   |
| 3  |      | 158.525         | 29.954                 | 11.843               | -13.546     | 43.500         | 18.111        | PK   |
| 4  |      | 750.225         | 37.996                 | 9.896                | -8.004      | 46.000         | 28.100        | PK   |
| 5  |      | 875.355         | 35.860                 | 7.297                | -10.140     | 46.000         | 28.563        | PK   |
| 6  |      | 1000.000        | 36.756                 | 6.373                | -17.244     | 54.000         | 30.383        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)


Note 2: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

### A.9 Radiated Restricted Band Edge Test Result

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 5955MHz |                       |

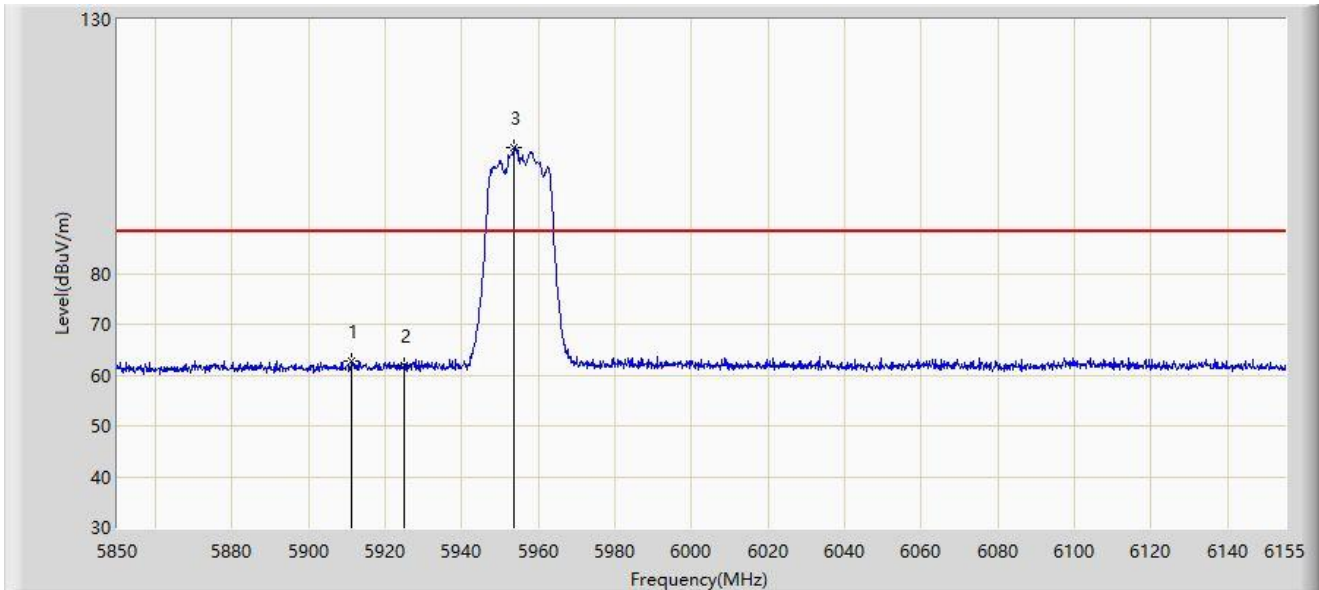


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5911.305        | 62.752                 | 64.653               | -25.448     | 88.200         | -1.901        | PK   |
| 2  |      | 5925.000        | 61.752                 | 63.507               | -26.448     | 88.200         | -1.754        | PK   |
| 3  |      | 5953.700        | 104.829                | 106.345              | N/A         | N/A            | -1.517        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 5955MHz |                       |

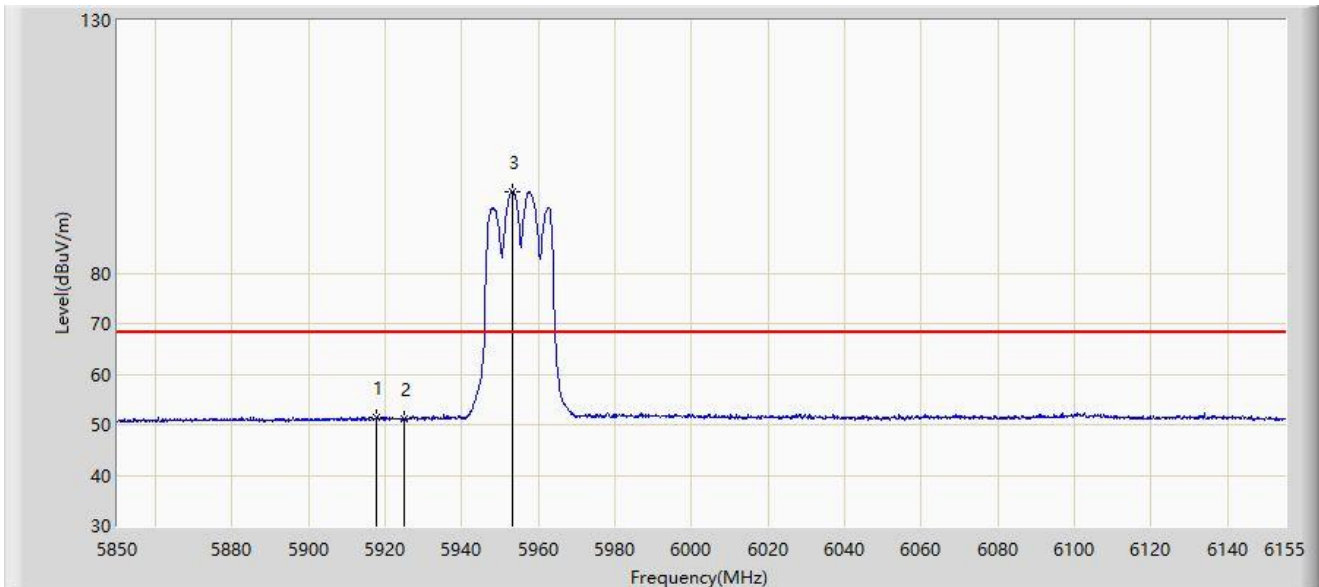


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5917.710        | 51.475                 | 53.316               | -16.725     | 68.200         | -1.840        | AV   |
| 2  |      | 5925.000        | 51.176                 | 52.931               | -17.024     | 68.200         | -1.754        | AV   |
| 3  |      | 5953.243        | 96.168                 | 97.686               | N/A         | N/A            | -1.517        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 5955MHz |                       |

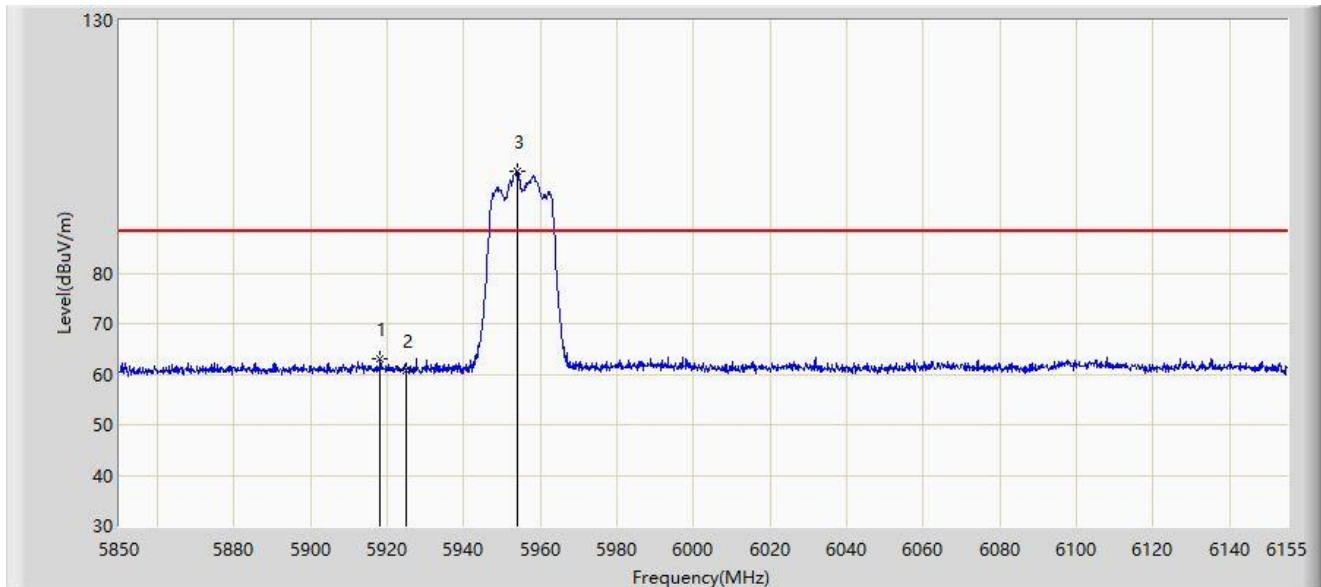


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5918.015        | 62.902                 | 64.739               | -25.298     | 88.200         | -1.837        | PK   |
| 2  |      | 5925.000        | 60.795                 | 62.550               | -27.405     | 88.200         | -1.754        | PK   |
| 3  |      | 5953.853        | 100.148                | 101.664              | N/A         | N/A            | -1.515        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 5955MHz |                       |

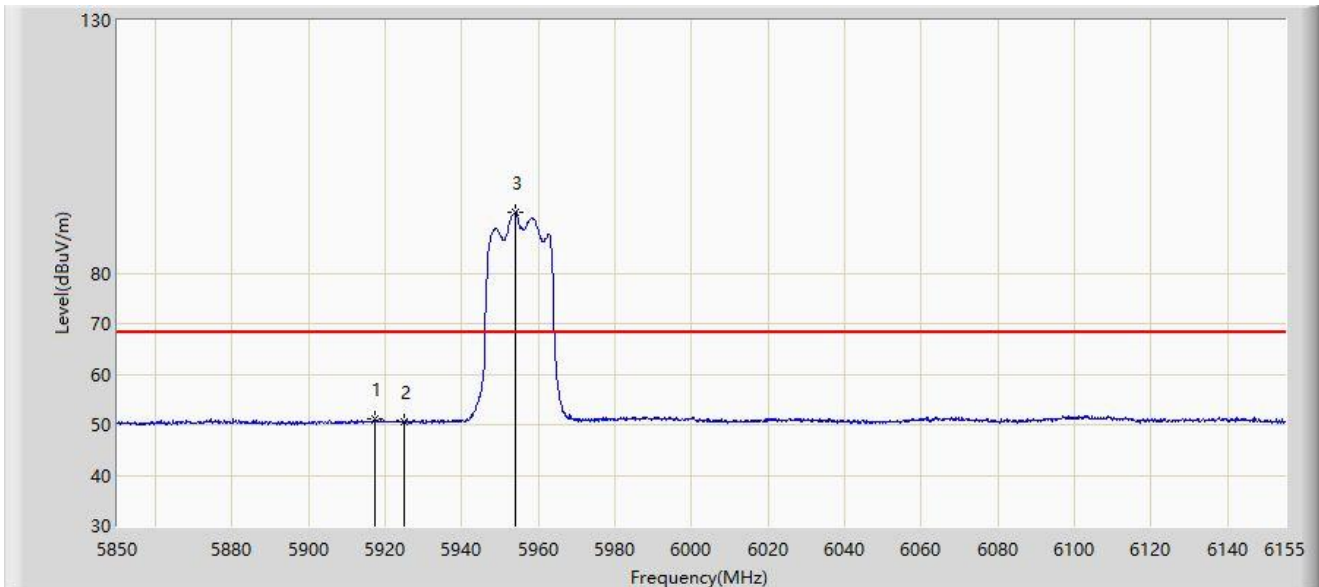


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5917.100        | 51.132                 | 52.980               | -17.068     | 68.200         | -1.848        | AV   |
| 2  |      | 5925.000        | 50.551                 | 52.306               | -17.649     | 68.200         | -1.754        | AV   |
| 3  |      | 5953.853        | 91.961                 | 93.477               | N/A         | N/A            | -1.515        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 7095MHz |                       |

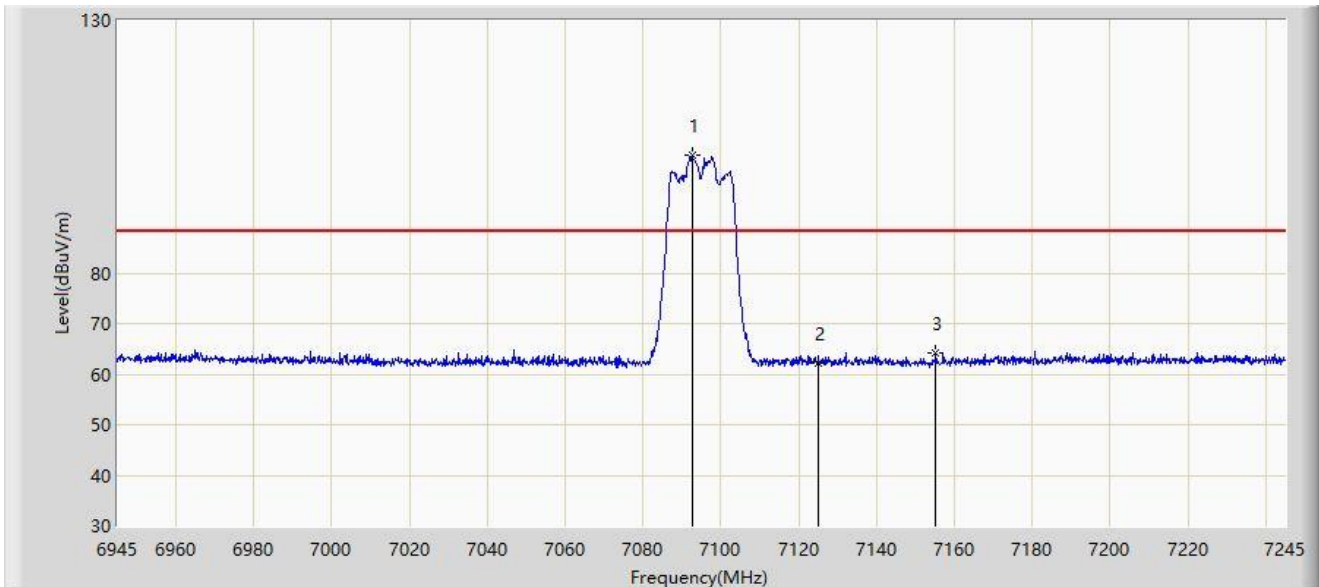


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7092.750        | 103.189                | 103.026              | N/A         | N/A            | 0.162         | PK   |
| 2  |      | 7125.000        | 62.195                 | 61.947               | -26.005     | 88.200         | 0.248         | PK   |
| 3  | *    | 7155.150        | 64.315                 | 64.310               | -23.885     | 88.200         | 0.004         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 7095MHz |                       |

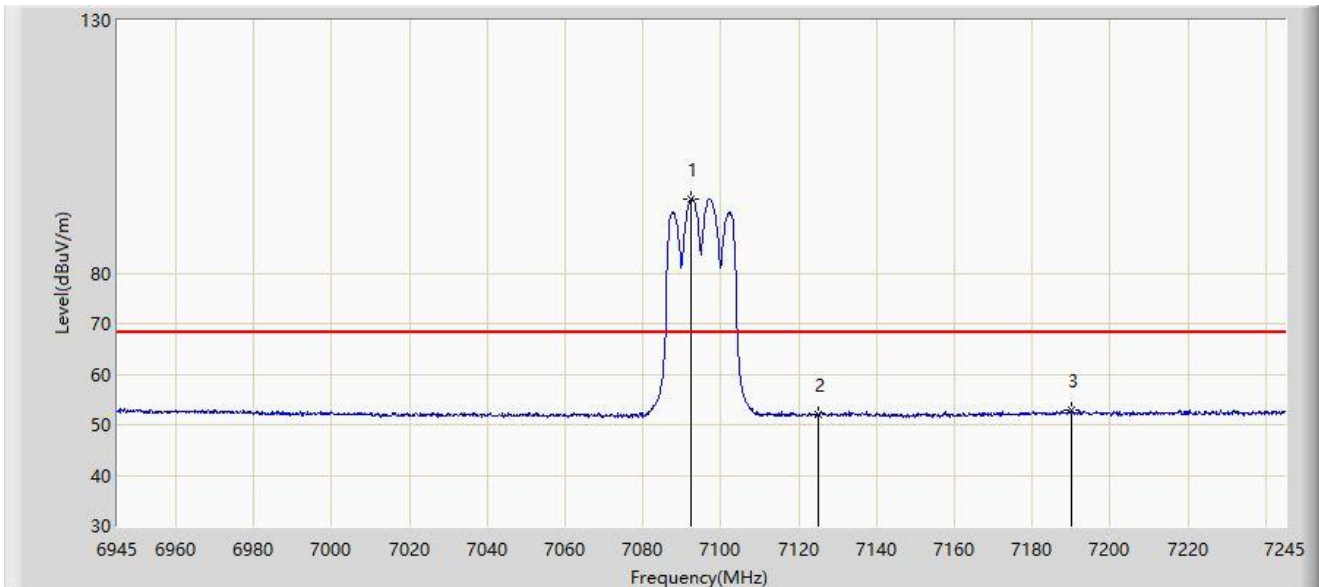


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7092.300        | 94.513                 | 94.349               | N/A         | N/A            | 0.163         | AV   |
| 2  |      | 7125.000        | 51.956                 | 51.708               | -16.244     | 68.200         | 0.248         | AV   |
| 3  | *    | 7190.100        | 52.893                 | 52.328               | -15.307     | 68.200         | 0.566         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 7095MHz |                       |

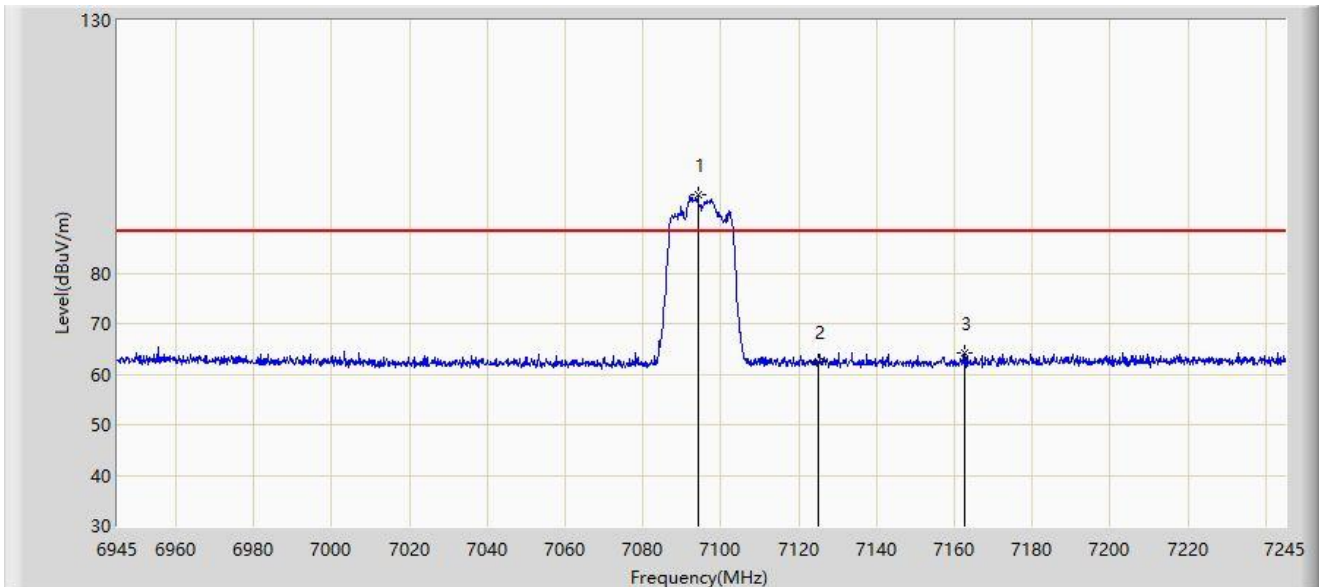


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7094.100        | 95.394                 | 95.233               | N/A         | N/A            | 0.161         | PK   |
| 2  |      | 7125.000        | 62.342                 | 62.094               | -25.858     | 88.200         | 0.248         | PK   |
| 3  | *    | 7162.800        | 64.231                 | 64.068               | -23.969     | 88.200         | 0.163         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                           |                       |
|-------------------------------------------|-----------------------|
| Site: SIP-AC2                             | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                      | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz           | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP        | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11a at 7095MHz |                       |

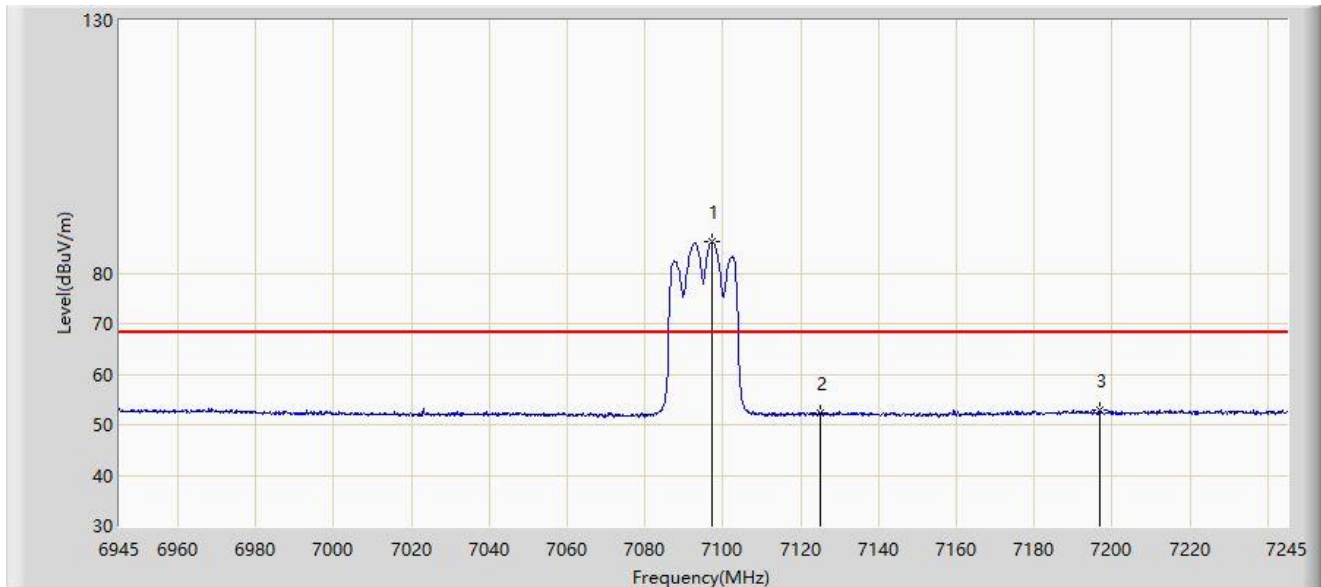


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7097.400        | 86.218                 | 86.061               | N/A         | N/A            | 0.158         | AV   |
| 2  |      | 7125.000        | 52.266                 | 52.018               | -15.934     | 68.200         | 0.248         | AV   |
| 3  | *    | 7196.850        | 52.787                 | 52.257               | -15.413     | 68.200         | 0.530         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

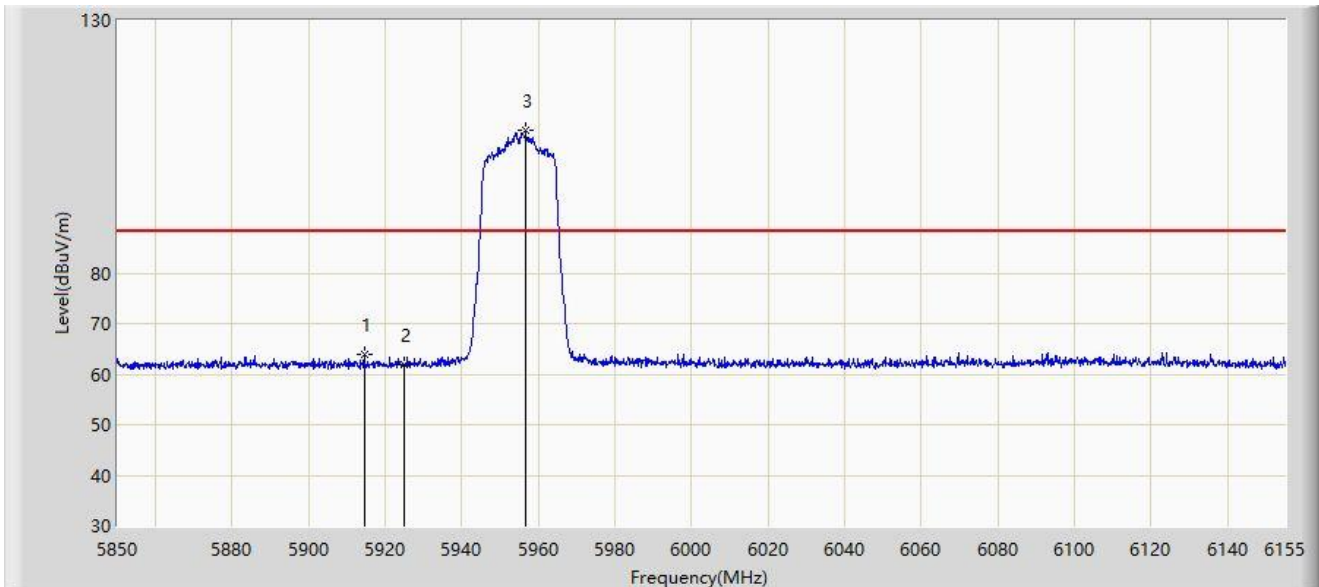


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5914.507        | 64.029                 | 65.908               | -24.171     | 88.200         | -1.879        | PK   |
| 2  |      | 5925.000        | 61.854                 | 63.609               | -26.346     | 88.200         | -1.754        | PK   |
| 3  |      | 5956.598        | 108.252                | 109.760              | N/A         | N/A            | -1.508        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

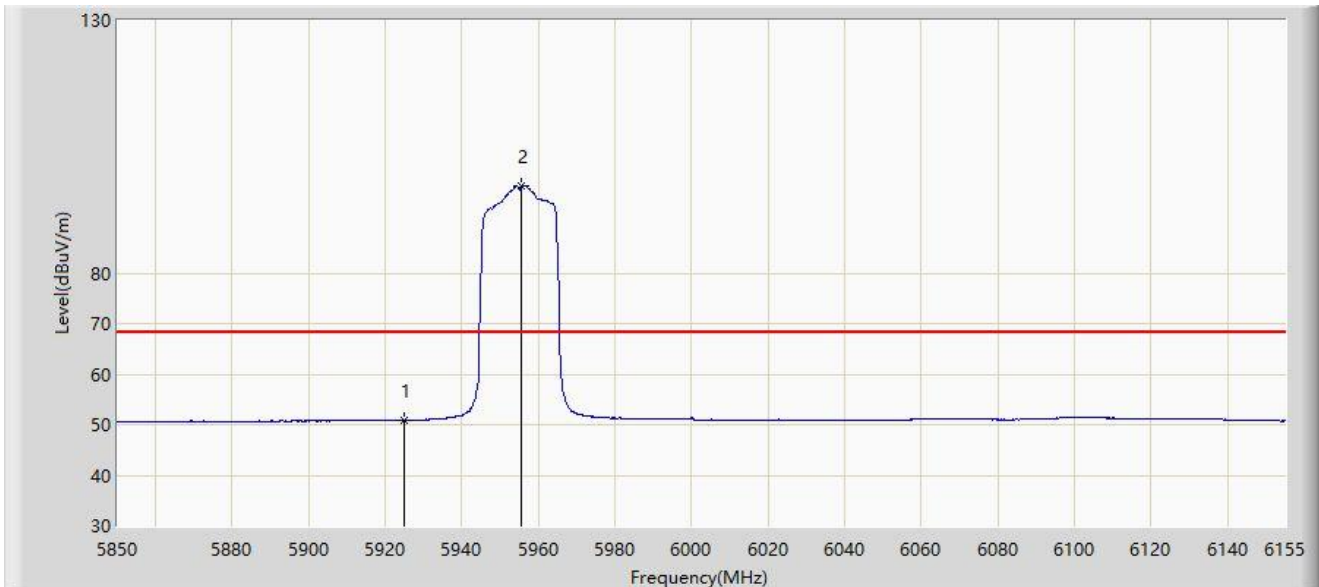


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 50.847                 | 52.602               | -17.353     | 68.200         | -1.754        | AV   |
| 2  |      | 5955.530        | 97.257                 | 98.768               | N/A         | N/A            | -1.512        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

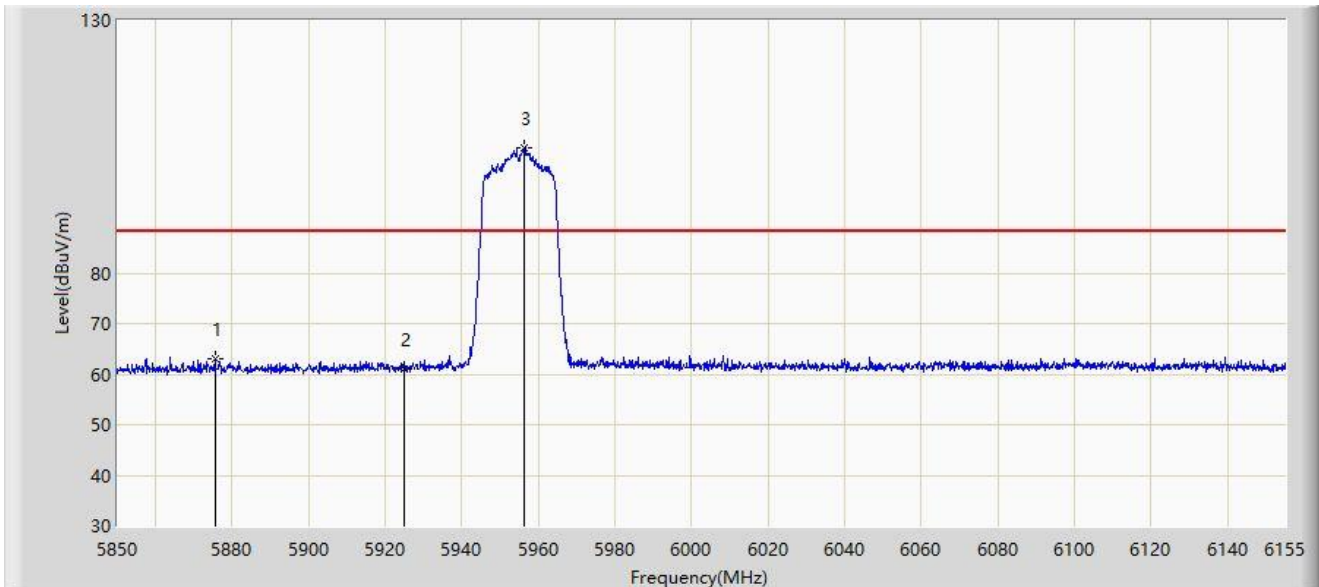


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5875.467        | 63.077                 | 65.084               | -25.123     | 88.200         | -2.006        | PK   |
| 2  |      | 5925.000        | 60.999                 | 62.754               | -27.201     | 88.200         | -1.754        | PK   |
| 3  |      | 5956.292        | 104.759                | 106.268              | N/A         | N/A            | -1.509        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 5955MHz |                       |

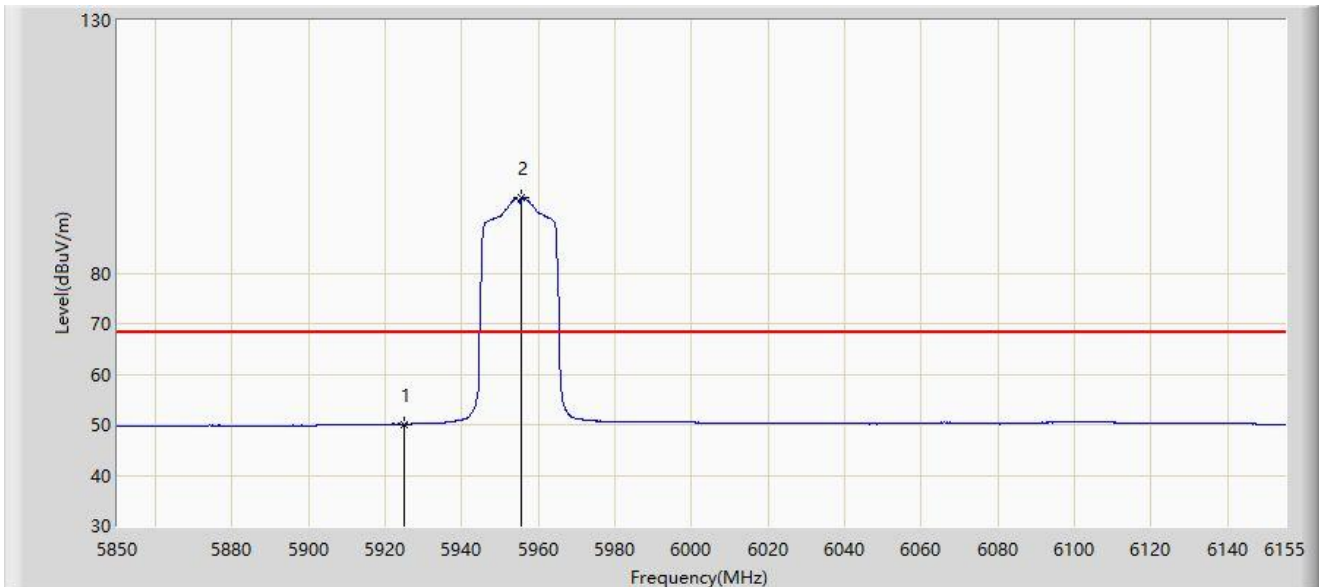


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 50.128                 | 51.883               | -18.072     | 68.200         | -1.754        | AV   |
| 2  |      | 5955.530        | 94.830                 | 96.341               | N/A         | N/A            | -1.512        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 7095MHz |                       |

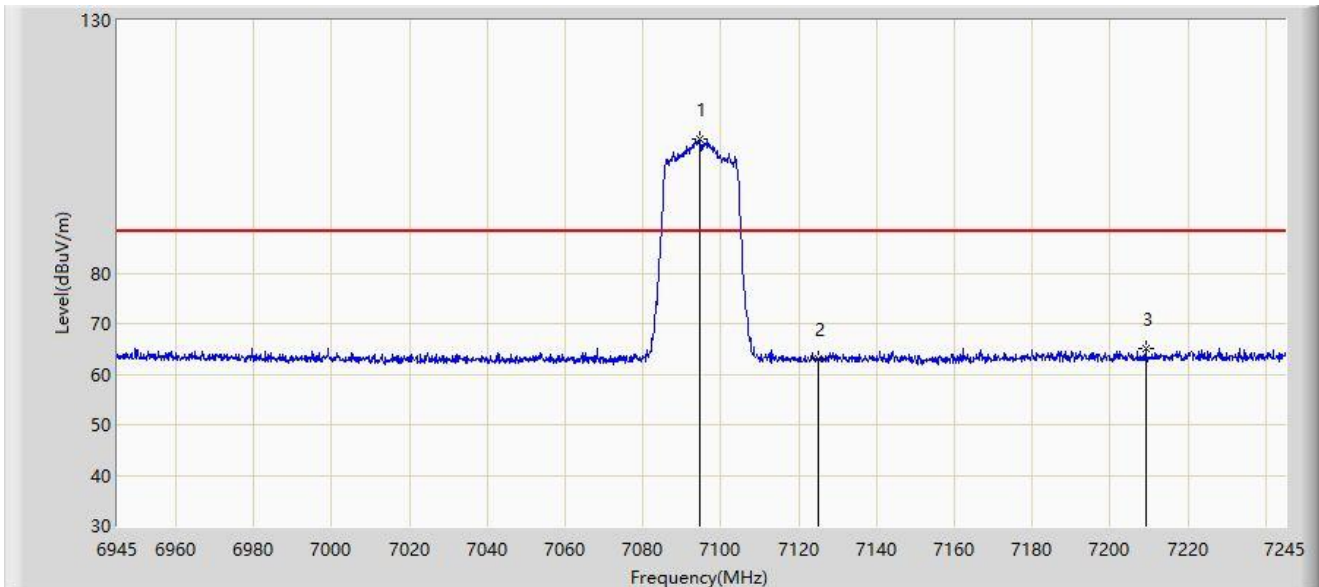


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7094.550        | 106.465                | 106.304              | N/A         | N/A            | 0.160         | PK   |
| 2  |      | 7125.000        | 62.905                 | 62.657               | -25.295     | 88.200         | 0.248         | PK   |
| 3  | *    | 7209.150        | 65.087                 | 64.570               | -23.113     | 88.200         | 0.517         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 7095MHz |                       |

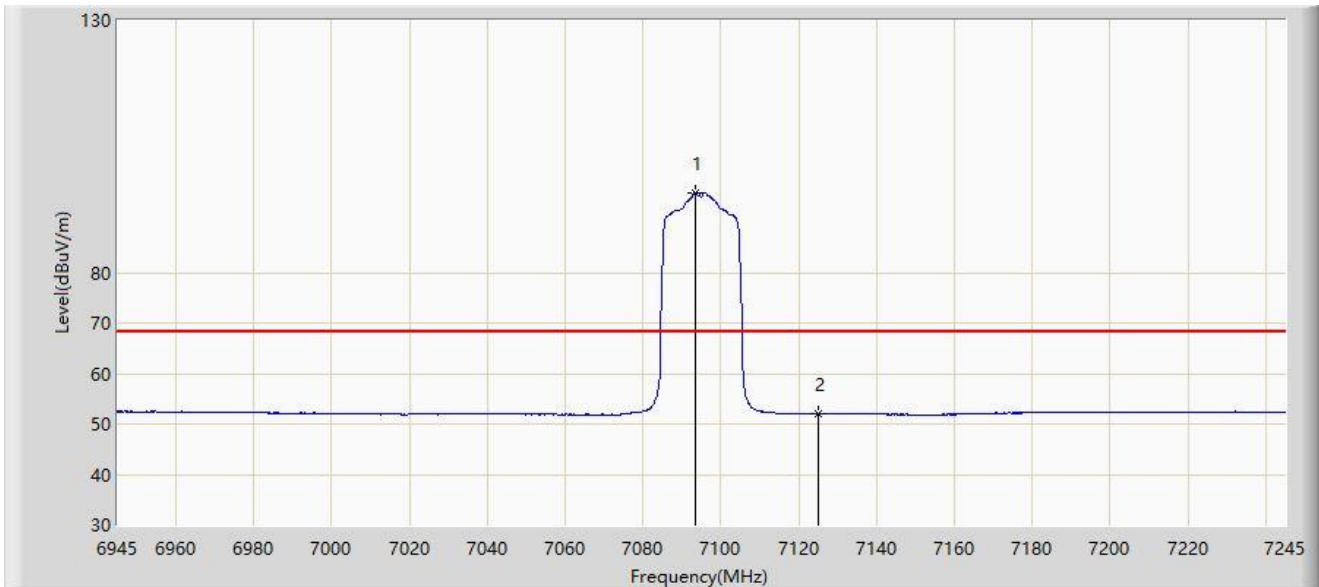


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7093.350        | 95.739                 | 95.577               | N/A         | N/A            | 0.161         | AV   |
| 2  | *    | 7125.000        | 52.019                 | 51.771               | -16.181     | 68.200         | 0.248         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 7095MHz |                       |

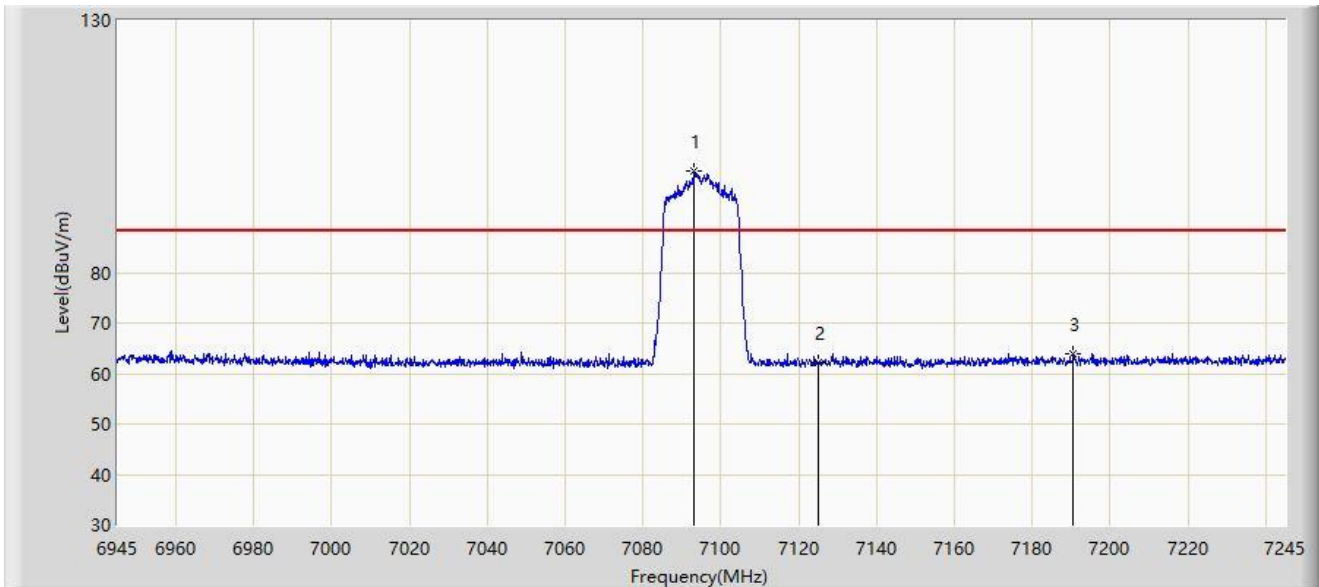


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7093.200        | 100.096                | 99.934               | N/A         | N/A            | 0.162         | PK   |
| 2  |      | 7125.000        | 62.145                 | 61.897               | -26.055     | 88.200         | 0.248         | PK   |
| 3  | *    | 7190.550        | 63.864                 | 63.301               | -24.336     | 88.200         | 0.562         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE20 at 7095MHz |                       |

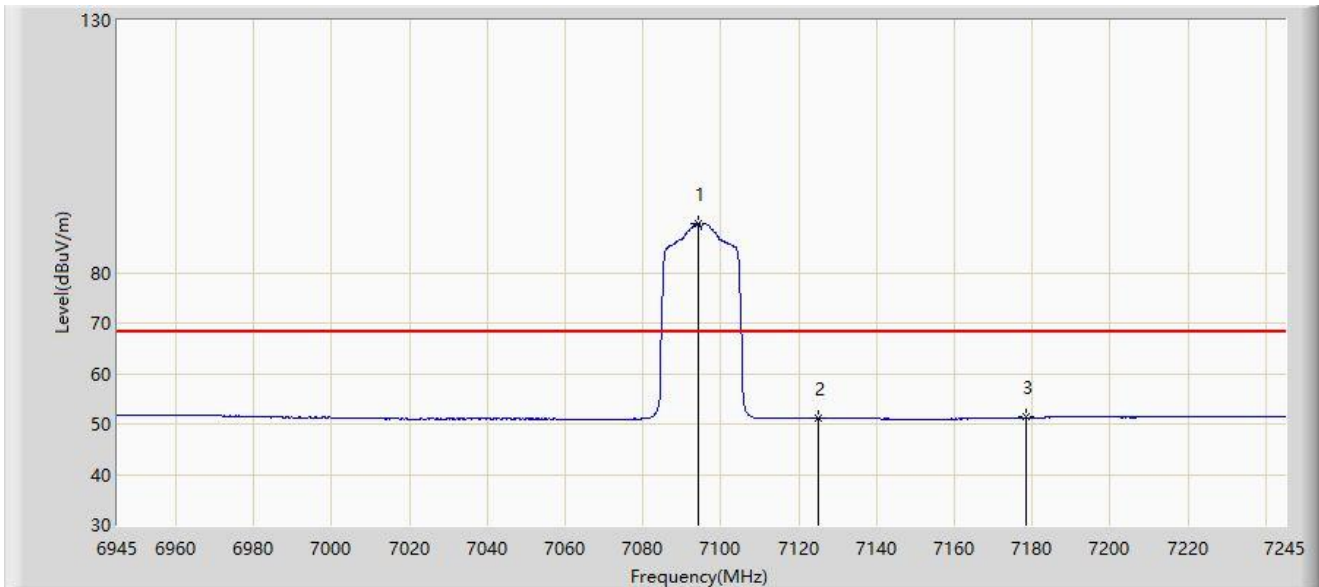


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7094.100        | 89.855                 | 89.694               | N/A         | N/A            | 0.161         | AV   |
| 2  |      | 7125.000        | 51.108                 | 50.860               | -17.092     | 68.200         | 0.248         | AV   |
| 3  | *    | 7178.400        | 51.311                 | 50.873               | -16.889     | 68.200         | 0.438         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

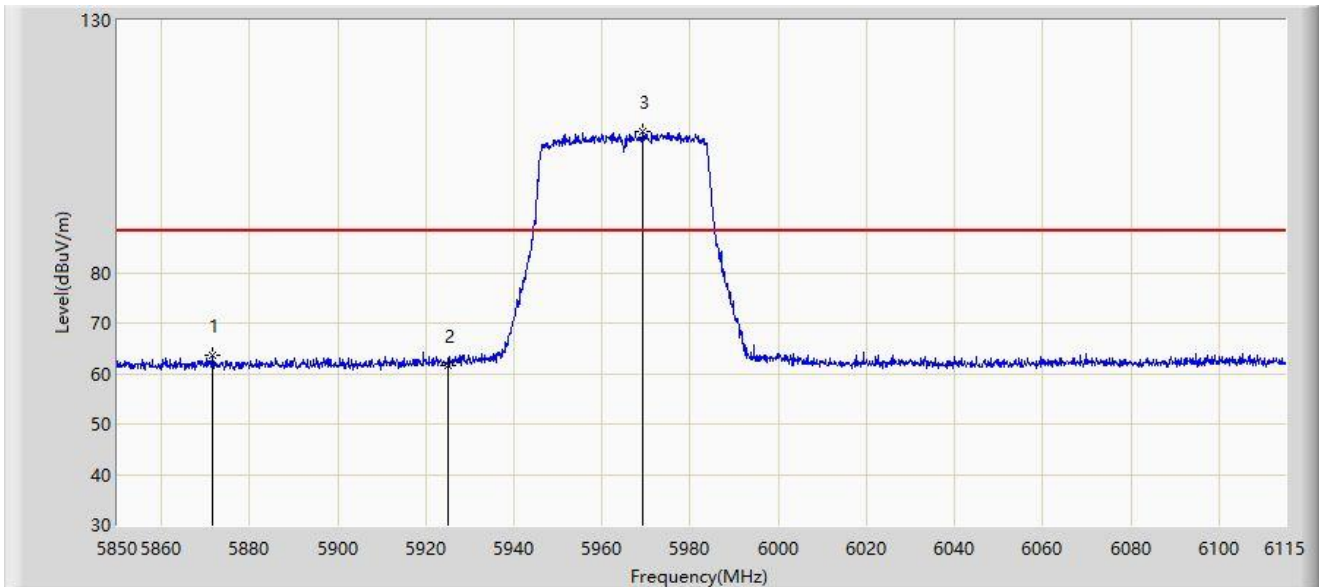


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5871.465        | 63.766                 | 65.789               | -24.434     | 88.200         | -2.023        | PK   |
| 2  |      | 5925.000        | 61.488                 | 63.243               | -26.712     | 88.200         | -1.754        | PK   |
| 3  |      | 5969.382        | 107.990                | 109.411              | N/A         | N/A            | -1.421        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

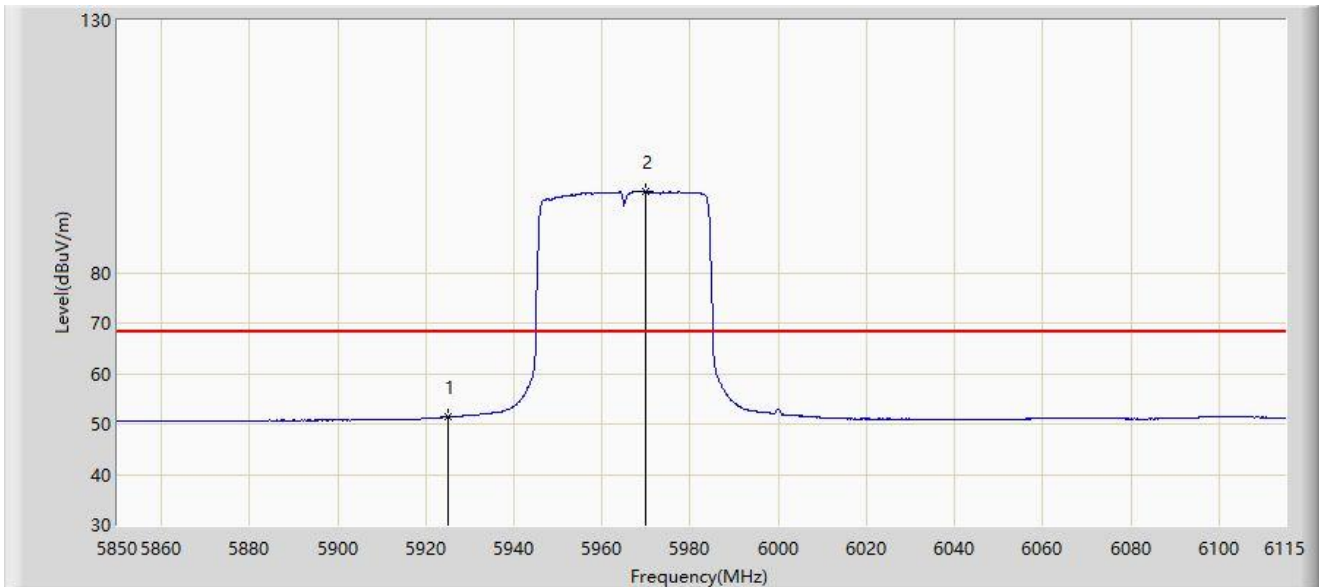


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 51.386                 | 53.141               | -16.814     | 68.200         | -1.754        | AV   |
| 2  |      | 5969.780        | 96.013                 | 97.429               | N/A         | N/A            | -1.416        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

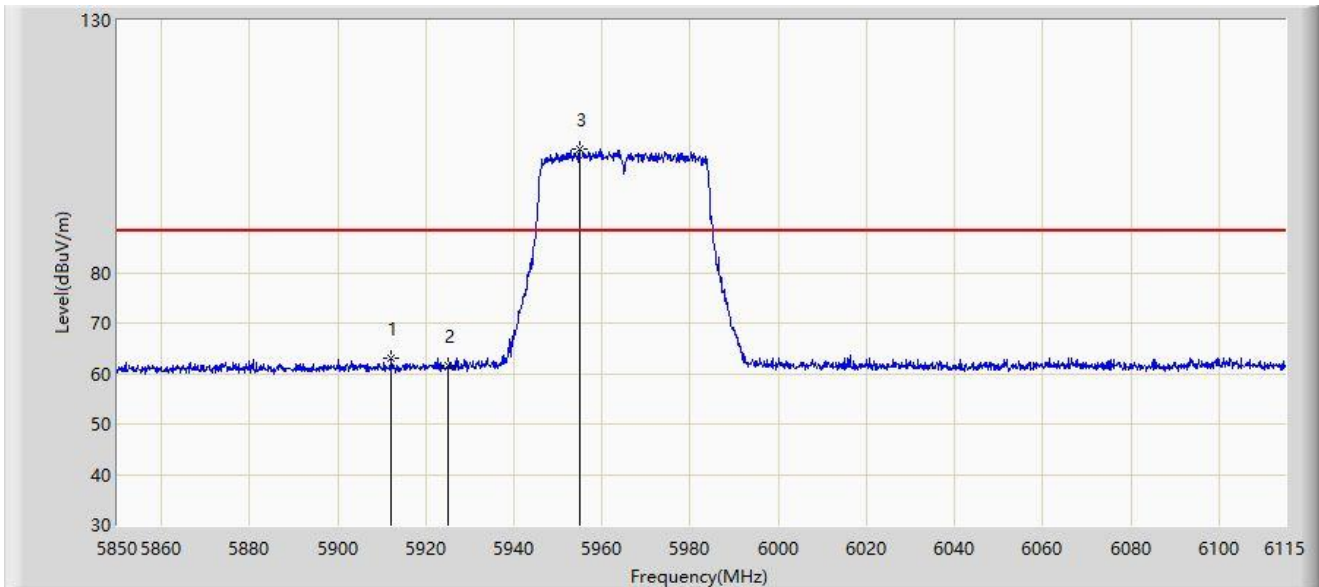


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5912.143        | 63.059                 | 64.958               | -25.141     | 88.200         | -1.899        | PK   |
| 2  |      | 5925.000        | 61.543                 | 63.298               | -26.657     | 88.200         | -1.754        | PK   |
| 3  |      | 5954.808        | 104.540                | 106.053              | N/A         | N/A            | -1.513        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5965MHz |                       |

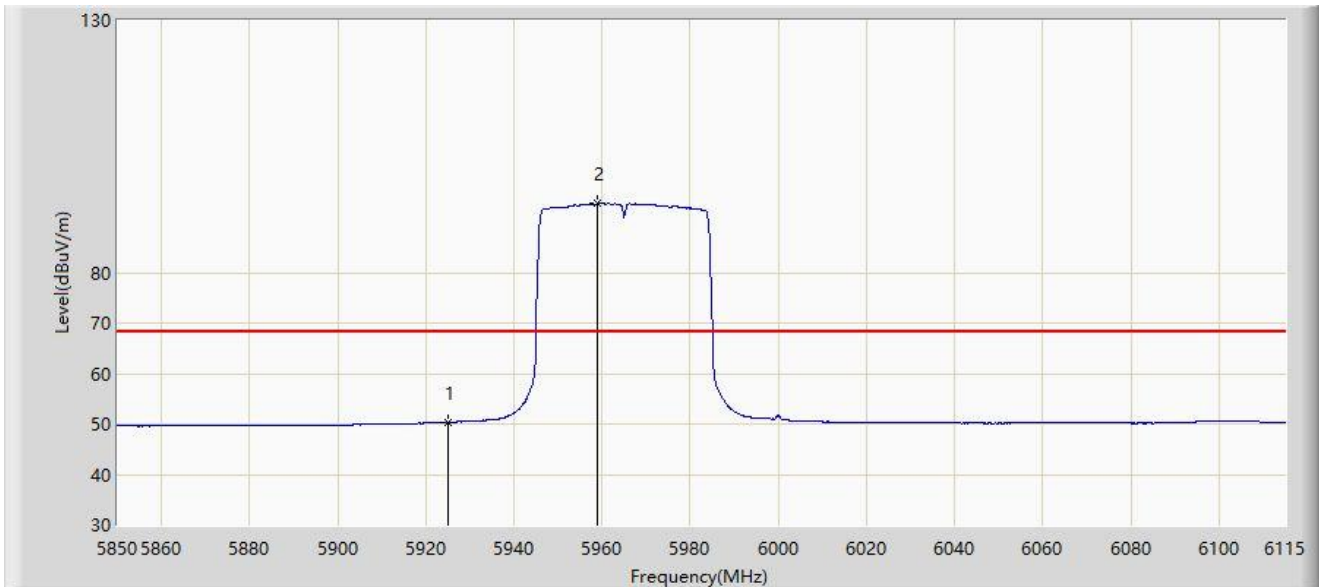


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 50.346                 | 52.101               | -17.854     | 68.200         | -1.754        | AV   |
| 2  |      | 5959.047        | 93.698                 | 95.200               | N/A         | N/A            | -1.502        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 7085MHz |                       |

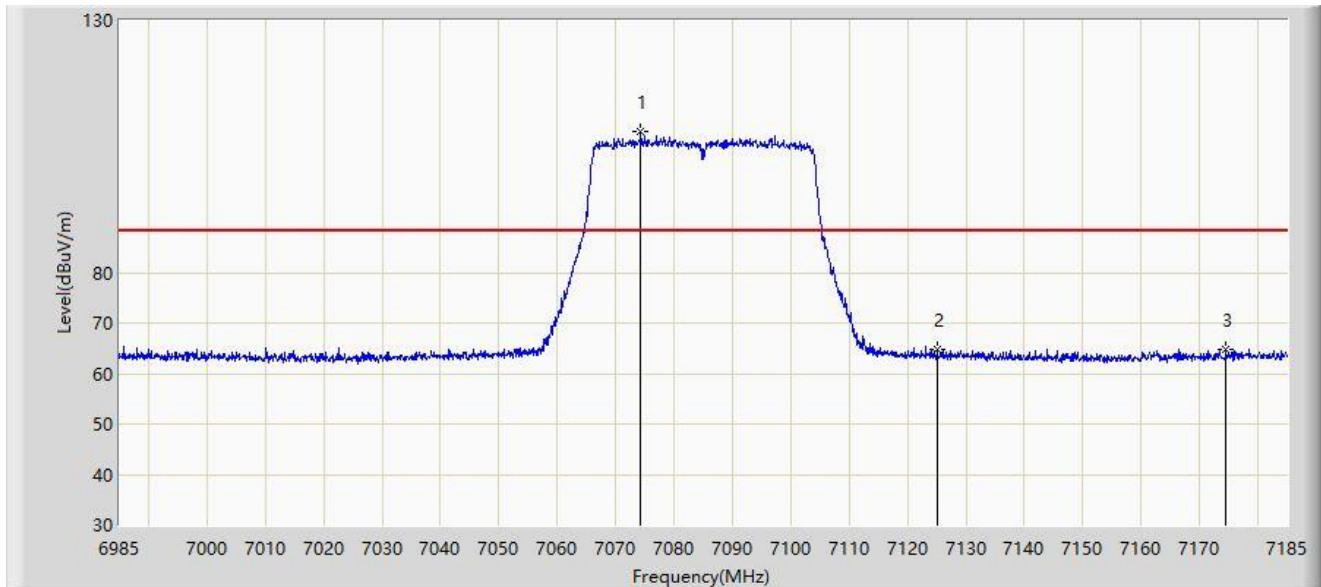


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7074.300        | 107.887                | 107.670              | N/A         | N/A            | 0.217         | PK   |
| 2  |      | 7125.000        | 64.675                 | 64.427               | -23.525     | 88.200         | 0.248         | PK   |
| 3  | *    | 7174.500        | 64.896                 | 64.514               | -23.304     | 88.200         | 0.382         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 7085MHz |                       |

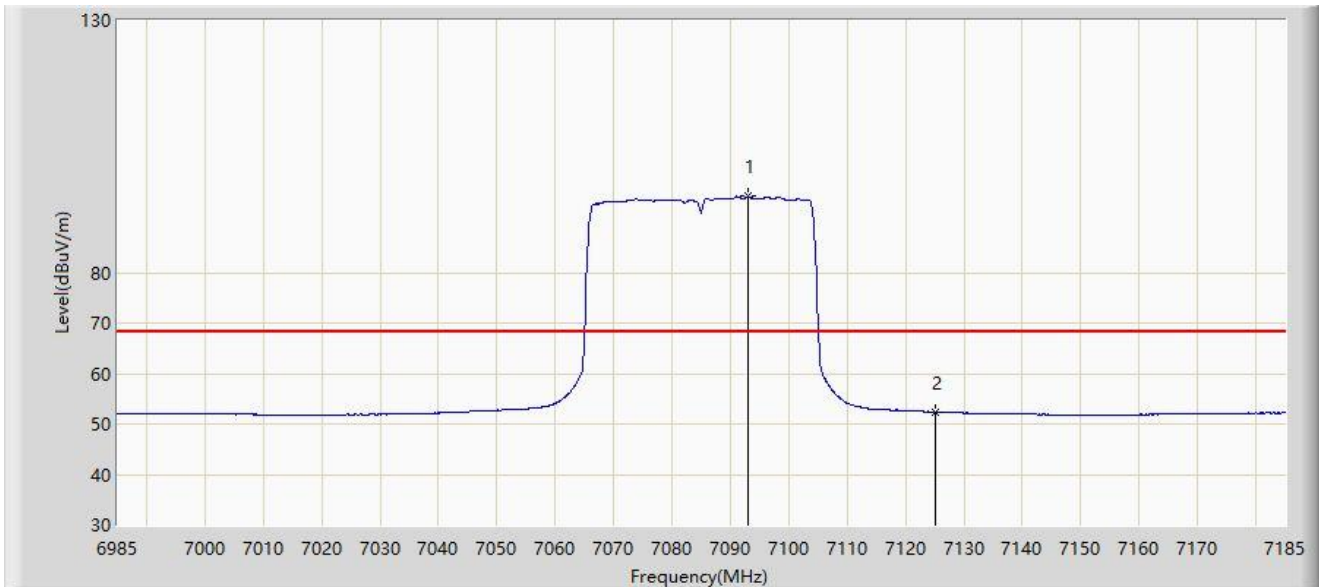


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7093.100        | 95.073                 | 94.910               | N/A         | N/A            | 0.162         | AV   |
| 2  | *    | 7125.000        | 52.411                 | 52.163               | -15.789     | 68.200         | 0.248         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 7085MHz |                       |

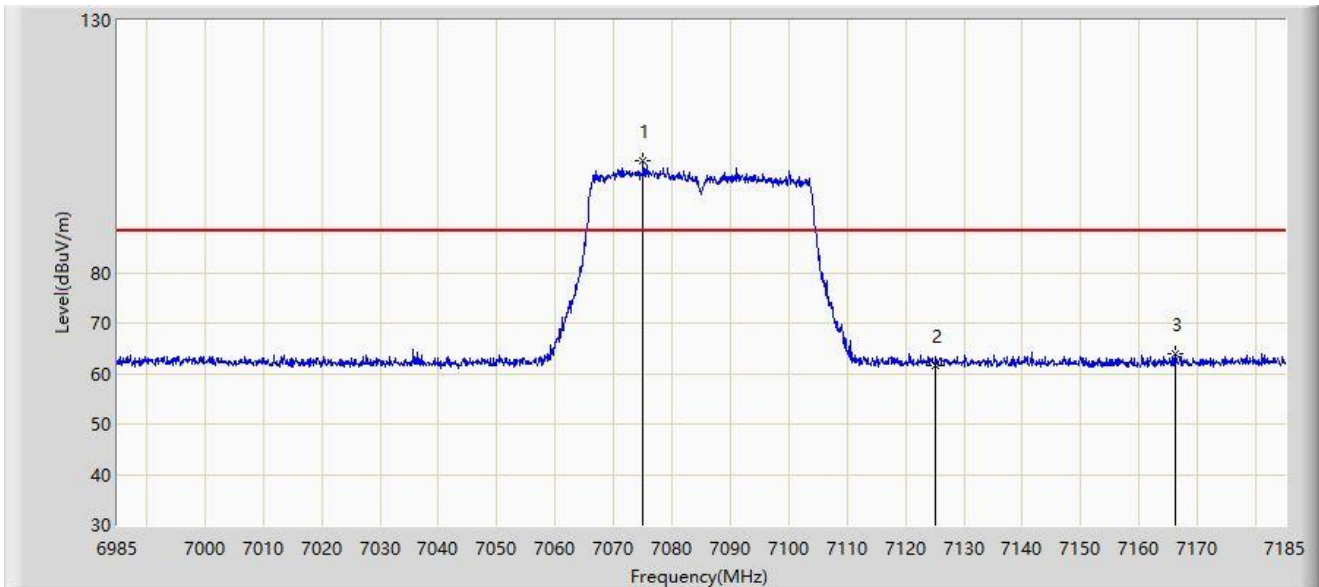


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7075.100        | 102.288                | 102.075              | N/A         | N/A            | 0.213         | PK   |
| 2  |      | 7125.000        | 61.676                 | 61.428               | -26.524     | 88.200         | 0.248         | PK   |
| 3  | *    | 7166.300        | 64.018                 | 63.783               | -24.182     | 88.200         | 0.235         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 7085MHz |                       |

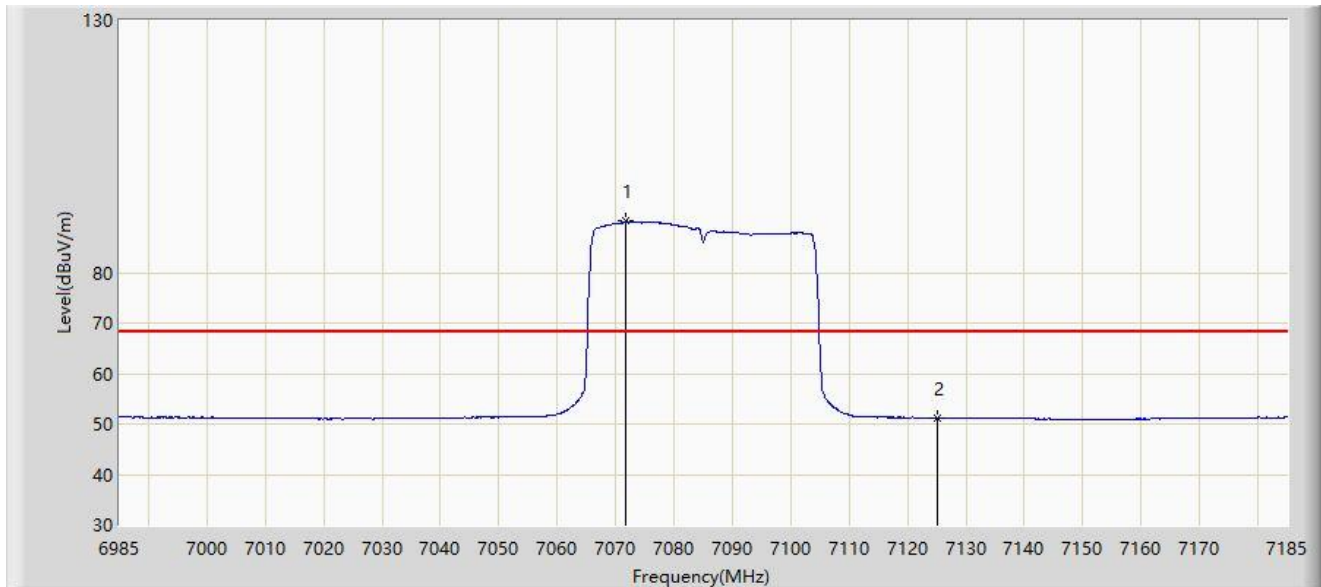


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7071.700        | 90.151                 | 89.924               | N/A         | N/A            | 0.227         | AV   |
| 2  | *    | 7125.000        | 51.249                 | 51.001               | -16.951     | 68.200         | 0.248         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

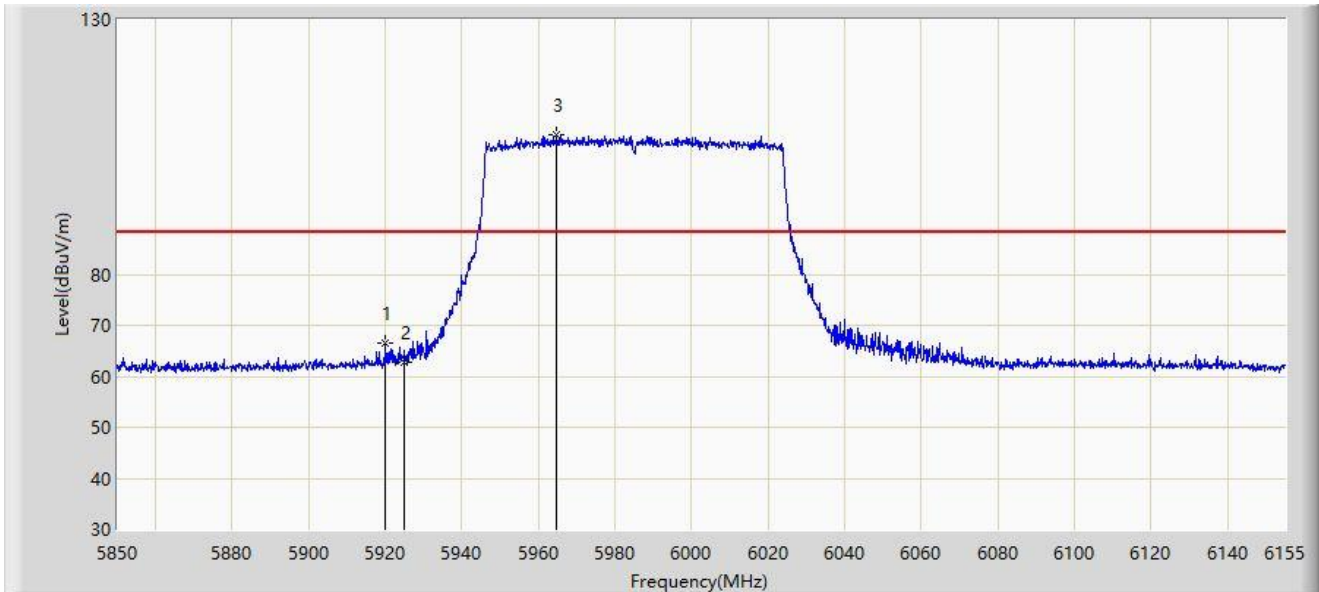


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5919.998        | 66.581                 | 68.395               | -21.619     | 88.200         | -1.814        | PK   |
| 2  |      | 5925.000        | 62.886                 | 64.641               | -25.314     | 88.200         | -1.754        | PK   |
| 3  |      | 5964.833        | 107.345                | 108.823              | N/A         | N/A            | -1.478        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

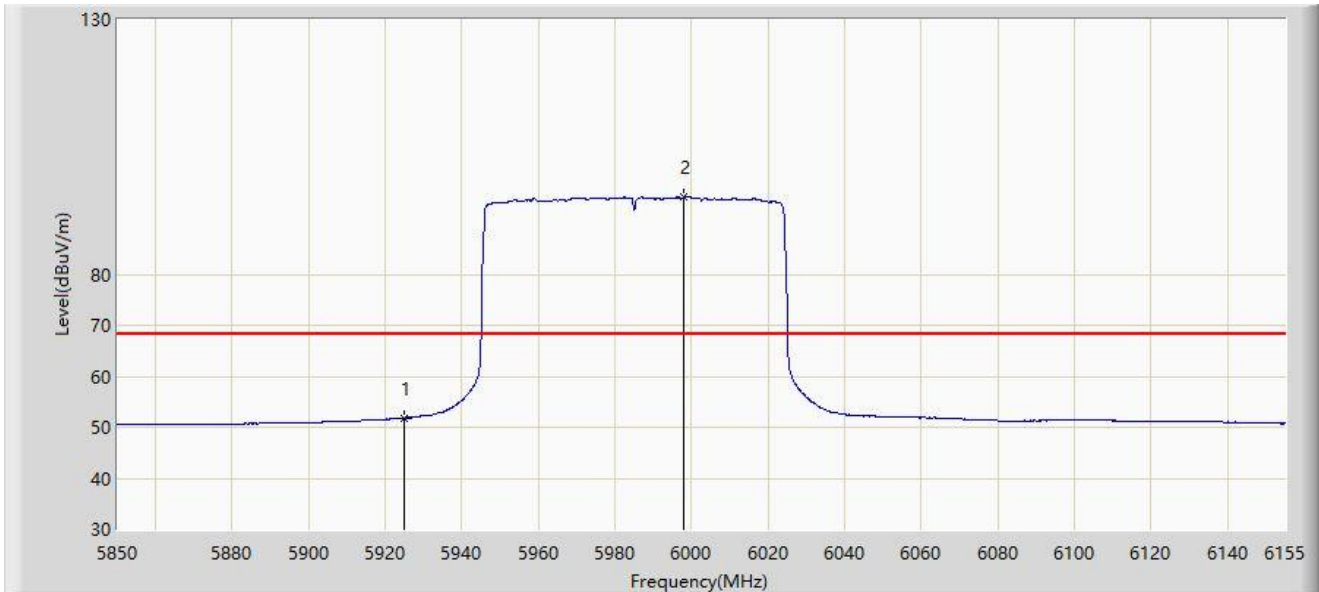


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 51.828                 | 53.583               | -16.372     | 68.200         | -1.754        | AV   |
| 2  |      | 5997.925        | 95.075                 | 96.403               | N/A         | N/A            | -1.328        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

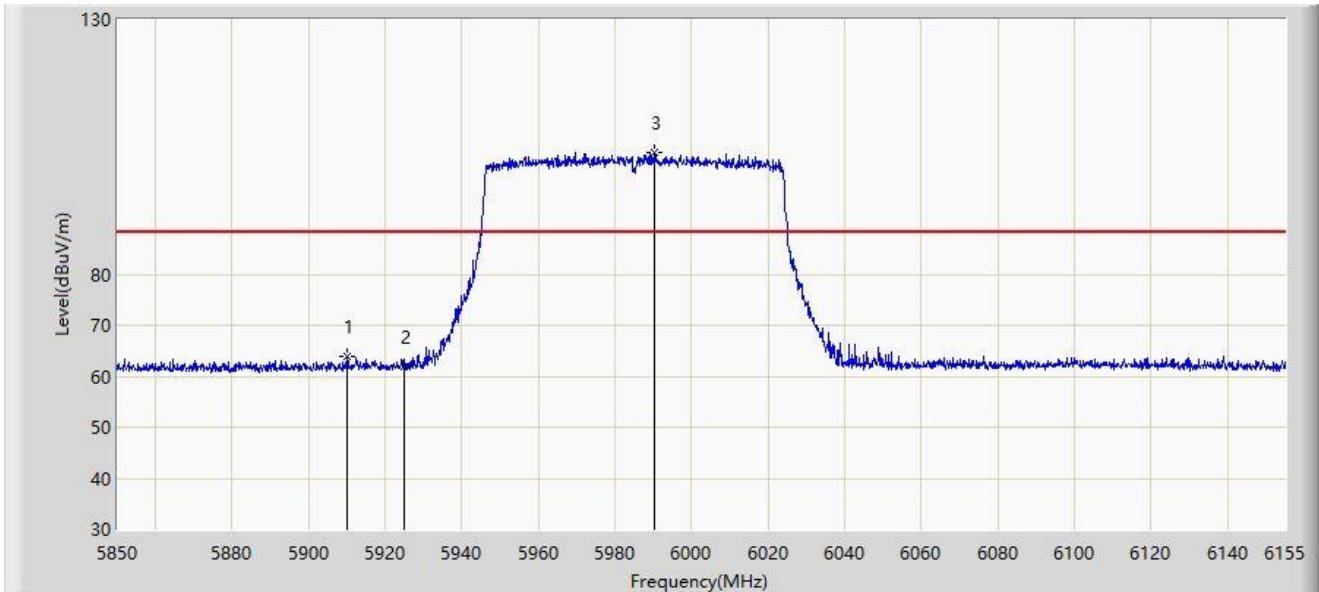


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5909.933        | 63.993                 | 65.897               | -24.207     | 88.200         | -1.903        | PK   |
| 2  |      | 5925.000        | 61.967                 | 63.722               | -26.233     | 88.200         | -1.754        | PK   |
| 3  |      | 5990.147        | 103.914                | 105.218              | N/A         | N/A            | -1.305        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5985MHz |                       |

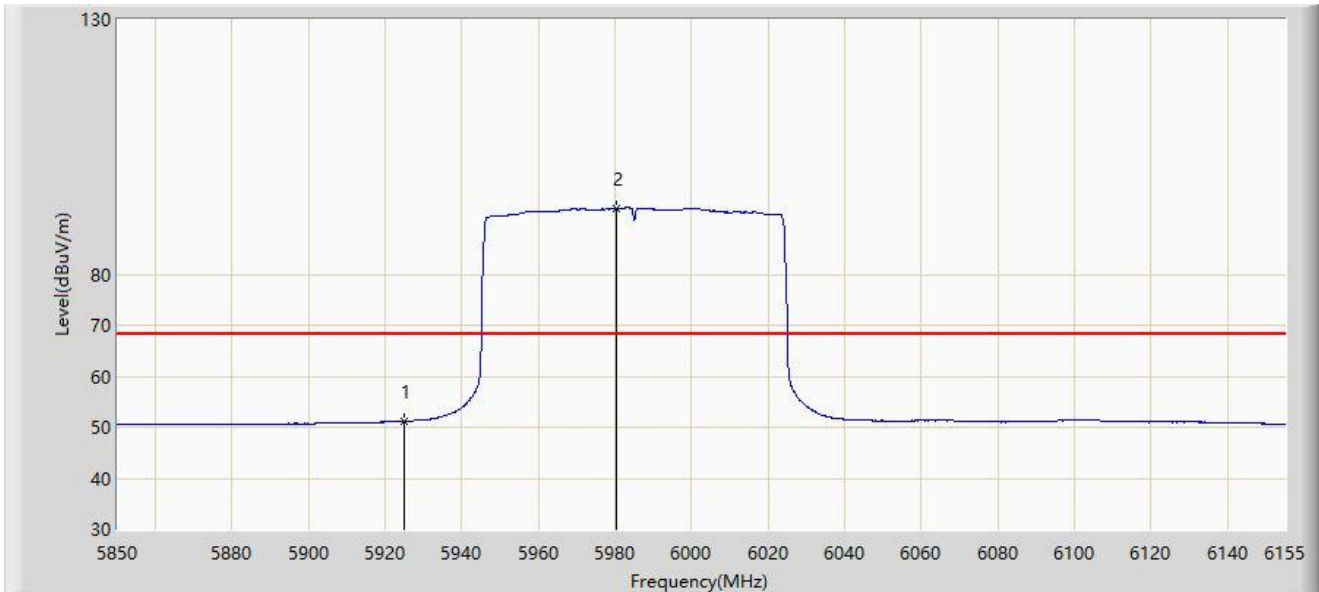


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 51.193                 | 52.948               | -17.007     | 68.200         | -1.754        | AV   |
| 2  |      | 5980.388        | 92.893                 | 94.178               | N/A         | N/A            | -1.285        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 7025MHz |                       |

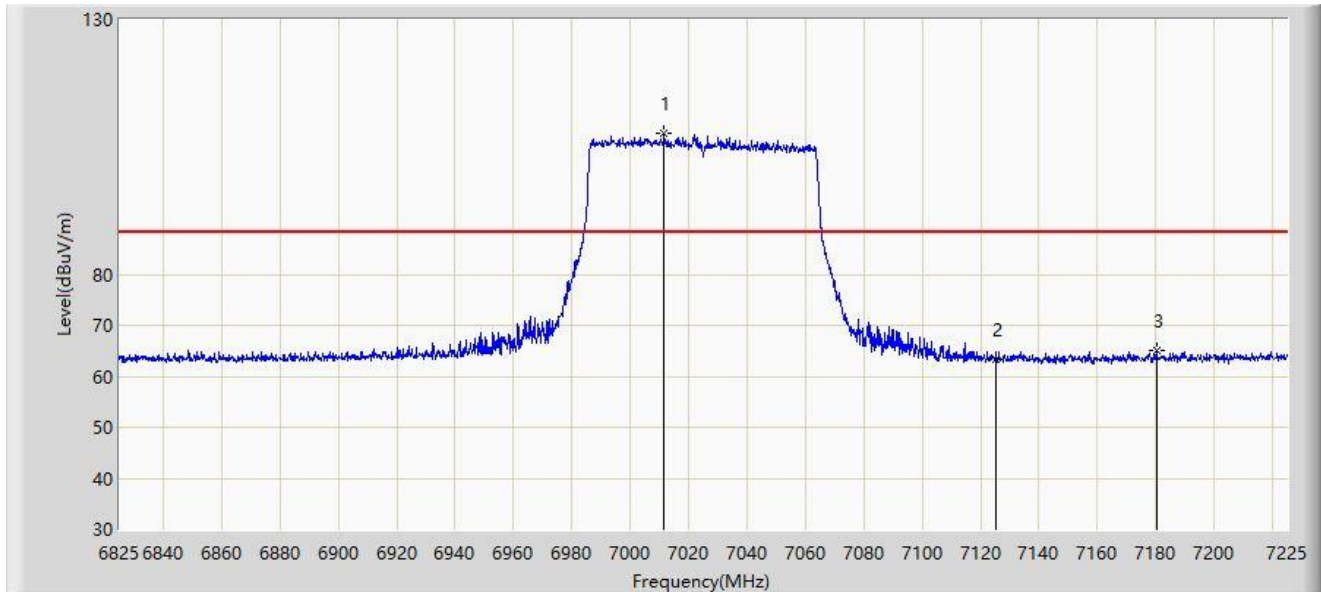


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 7011.600        | 107.720                | 107.334              | N/A         | N/A            | 0.385         | PK   |
| 2  |      | 7125.000        | 63.381                 | 63.133               | -24.819     | 88.200         | 0.248         | PK   |
| 3  | *    | 7180.200        | 65.158                 | 64.694               | -23.042     | 88.200         | 0.465         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 7025MHz |                       |

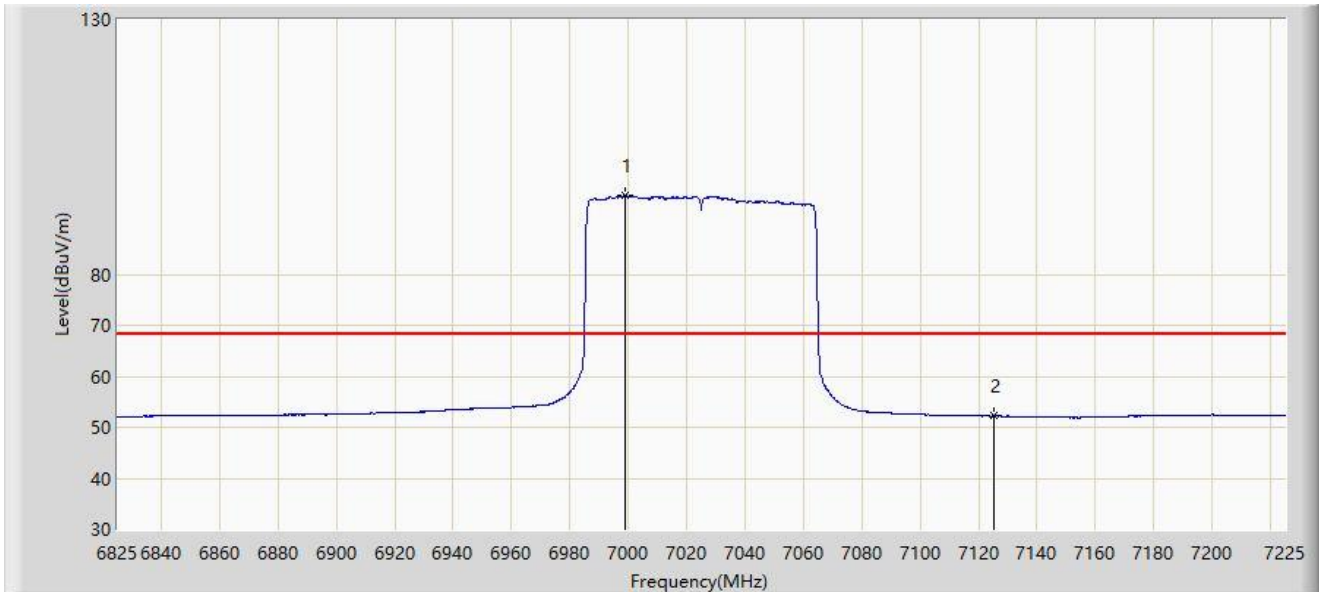


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 6999.000        | 95.434                 | 94.934               | N/A         | N/A            | 0.500         | AV   |
| 2  | *    | 7125.000        | 52.194                 | 51.946               | -16.006     | 68.200         | 0.248         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 7025MHz |                       |

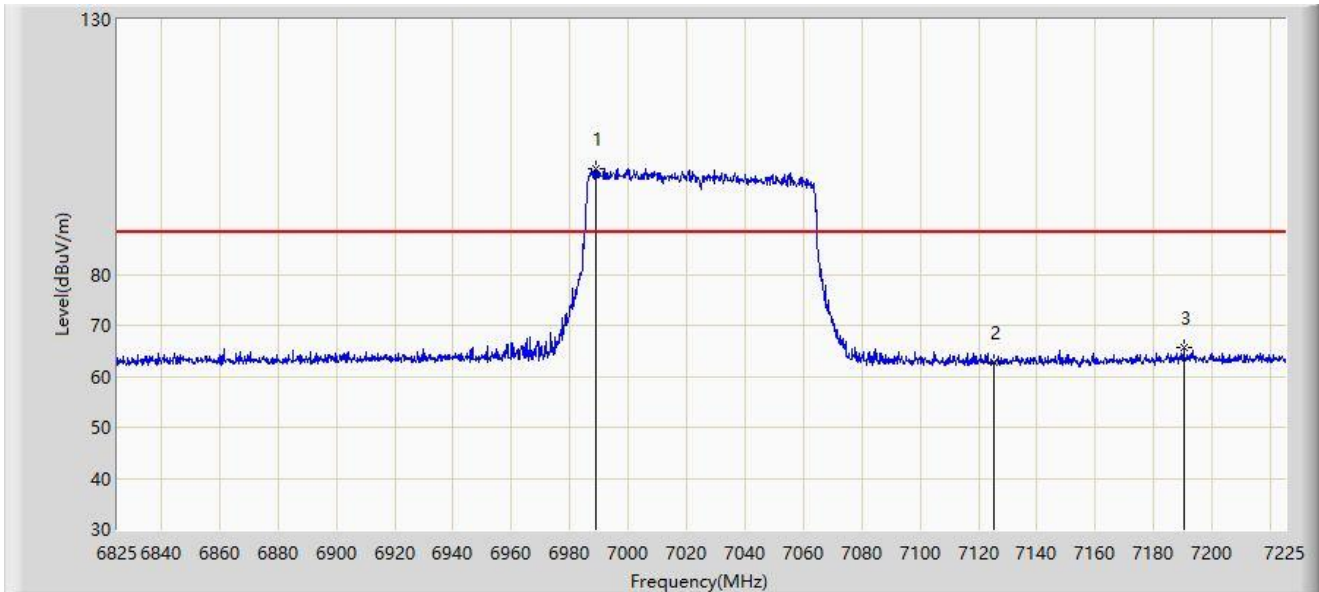


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 6988.800        | 100.711                | 100.164              | N/A         | N/A            | 0.547         | PK   |
| 2  |      | 7125.000        | 62.831                 | 62.583               | -25.369     | 88.200         | 0.248         | PK   |
| 3  | *    | 7190.200        | 65.696                 | 65.131               | -22.504     | 88.200         | 0.565         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC2                                   | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                            | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                 | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP              | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 7025MHz |                       |

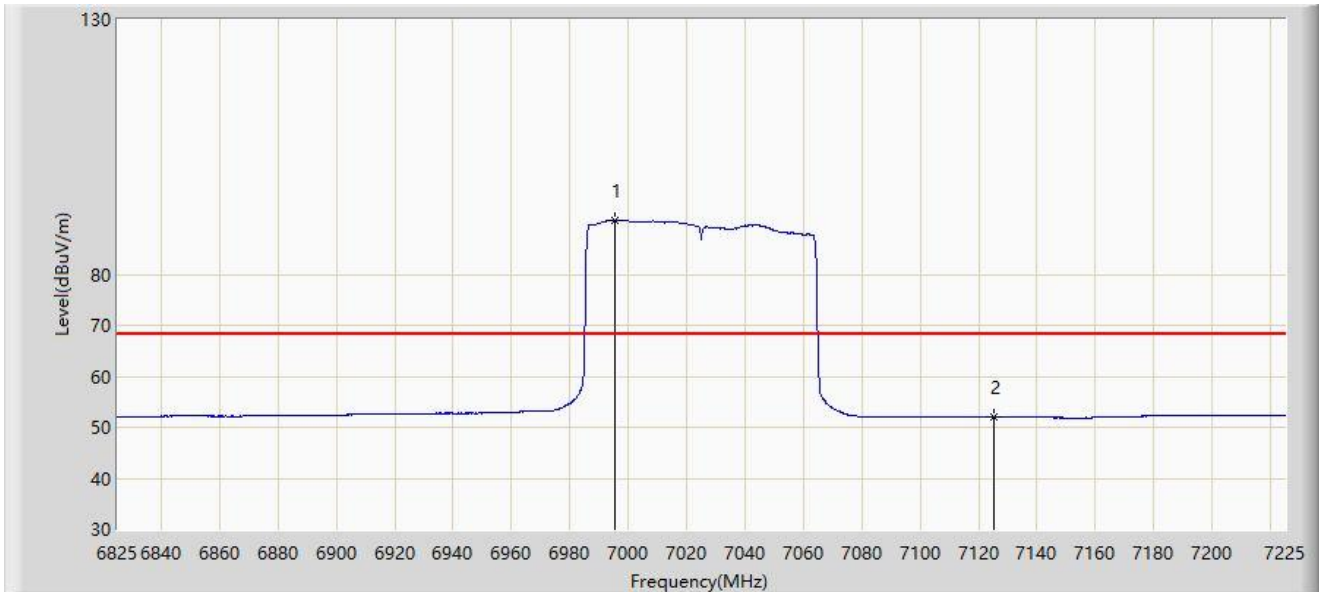


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 6995.200        | 90.664                 | 90.146               | N/A         | N/A            | 0.518         | AV   |
| 2  | *    | 7125.000        | 52.038                 | 51.790               | -16.162     | 68.200         | 0.248         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

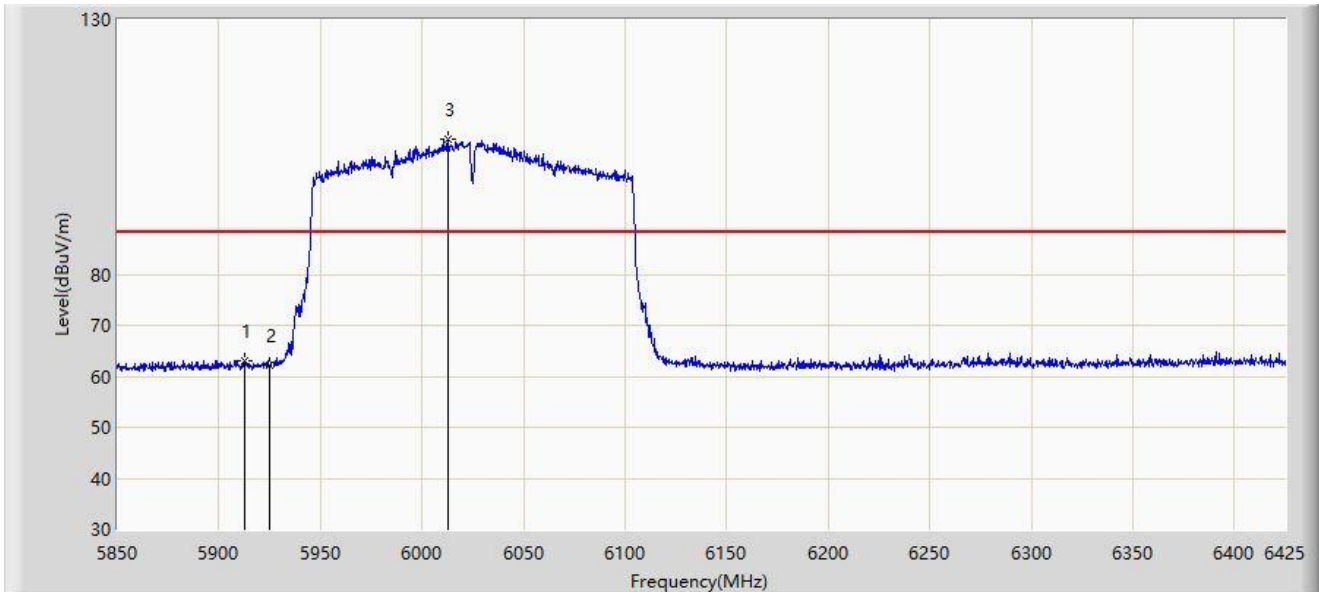


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5912.675        | 63.108                 | 65.006               | -25.092     | 88.200         | -1.898        | PK   |
| 2  |      | 5925.000        | 62.246                 | 64.001               | -25.954     | 88.200         | -1.754        | PK   |
| 3  |      | 6012.725        | 106.567                | 108.061              | N/A         | N/A            | -1.493        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

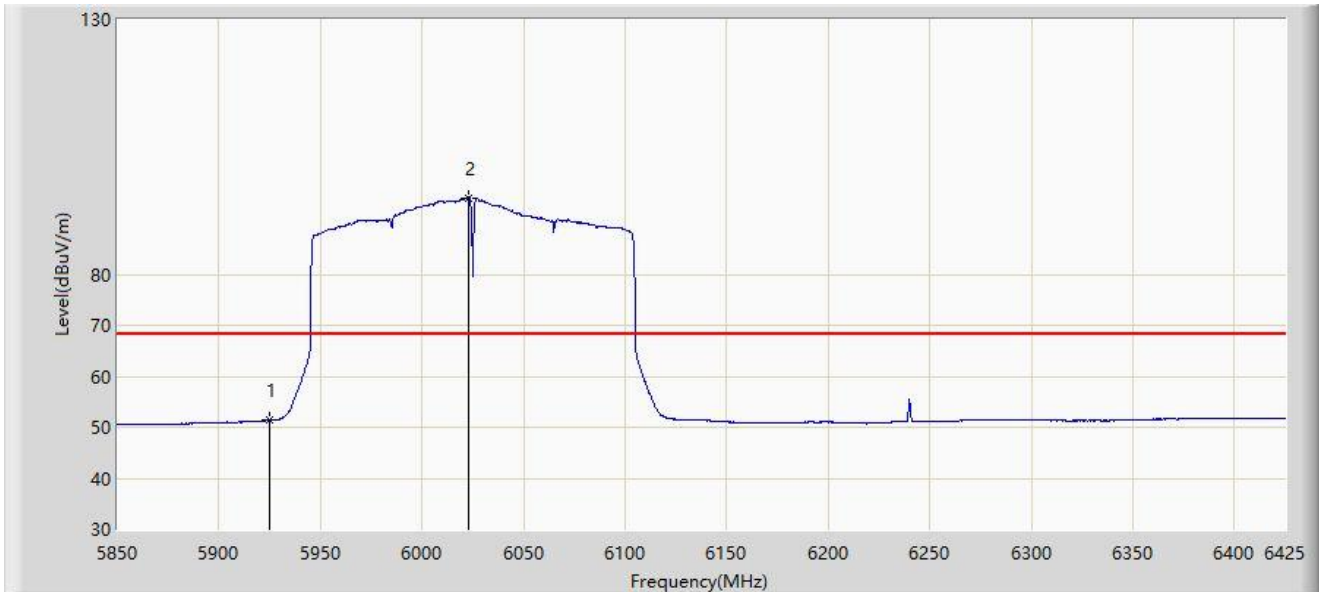


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 51.342                 | 53.097               | -16.858     | 68.200         | -1.754        | AV   |
| 2  |      | 6022.788        | 95.064                 | 96.515               | N/A         | N/A            | -1.450        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

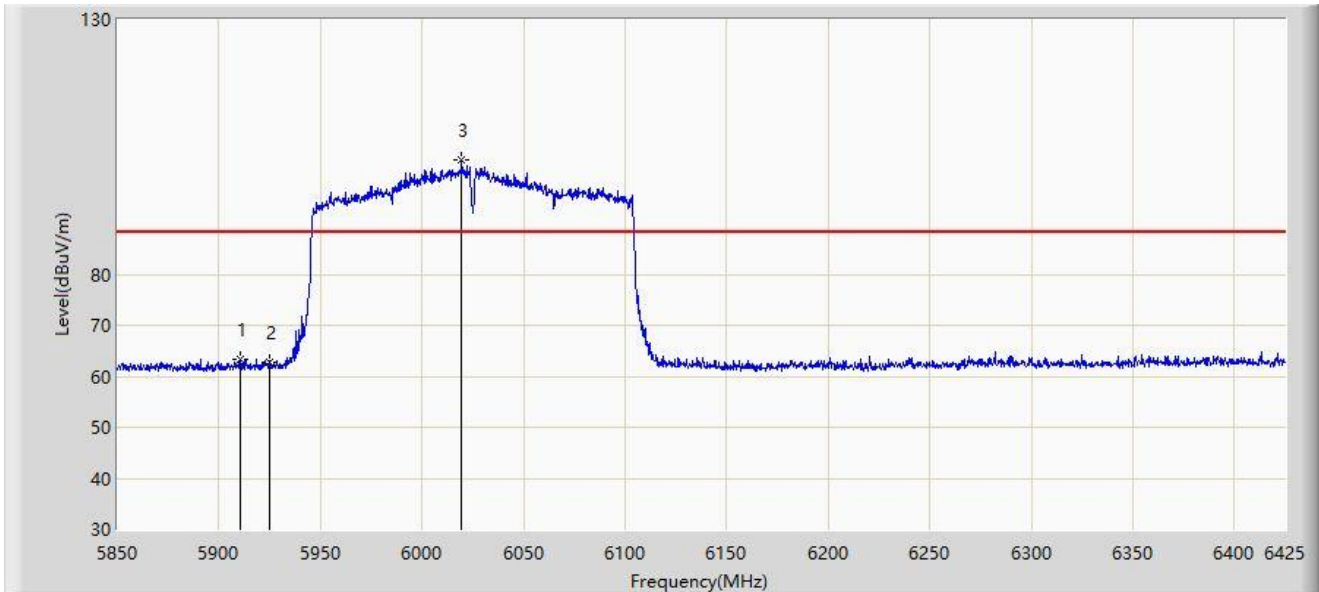


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5910.375        | 63.445                 | 65.348               | -24.755     | 88.200         | -1.903        | PK   |
| 2  |      | 5925.000        | 62.871                 | 64.626               | -25.329     | 88.200         | -1.754        | PK   |
| 3  |      | 6019.625        | 102.326                | 103.805              | N/A         | N/A            | -1.478        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6025MHz |                       |

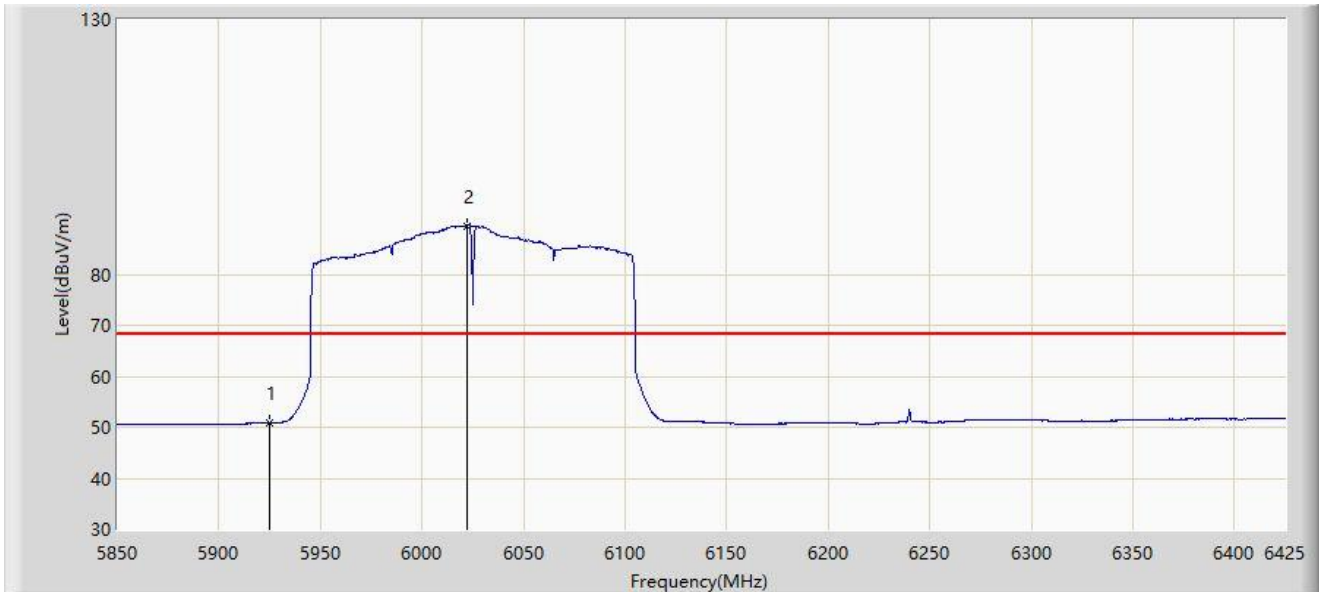


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5925.000        | 50.874                 | 52.629               | -17.326     | 68.200         | -1.754        | AV   |
| 2  |      | 6022.212        | 89.553                 | 91.009               | N/A         | N/A            | -1.456        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6985MHz |                       |

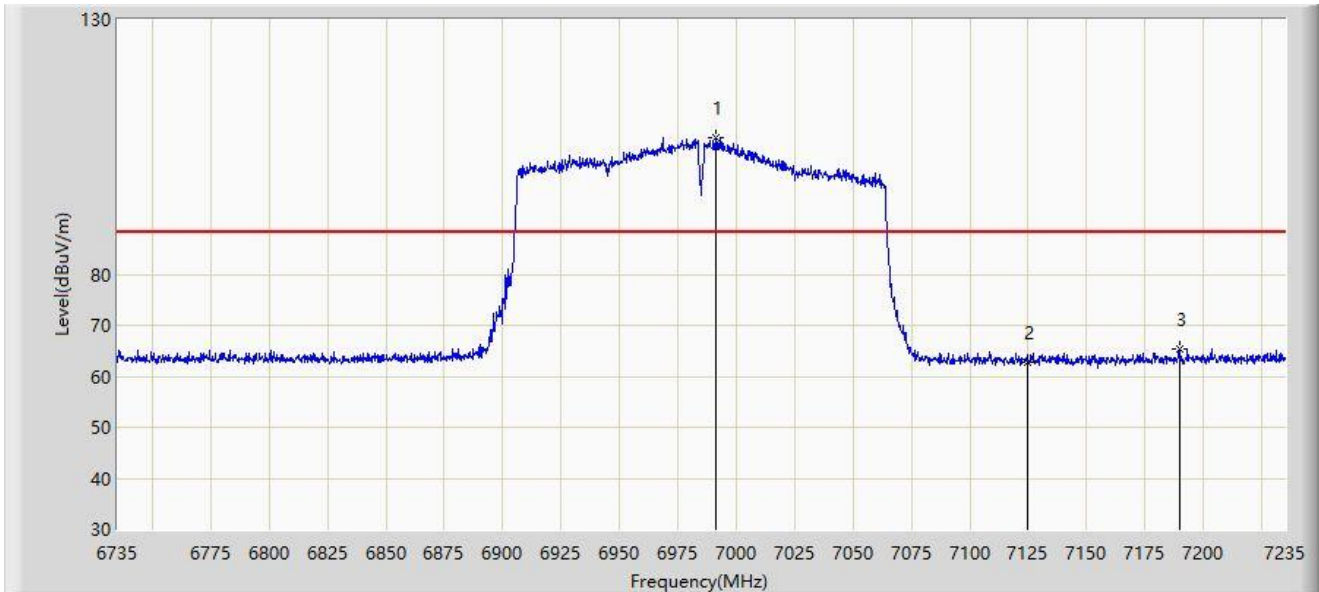


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 6991.500        | 106.948                | 106.413              | N/A         | N/A            | 0.534         | PK   |
| 2  |      | 7125.000        | 62.739                 | 62.491               | -25.461     | 88.200         | 0.248         | PK   |
| 3  | *    | 7190.000        | 65.444                 | 64.878               | -22.756     | 88.200         | 0.566         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Horizontal  |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6985MHz |                       |

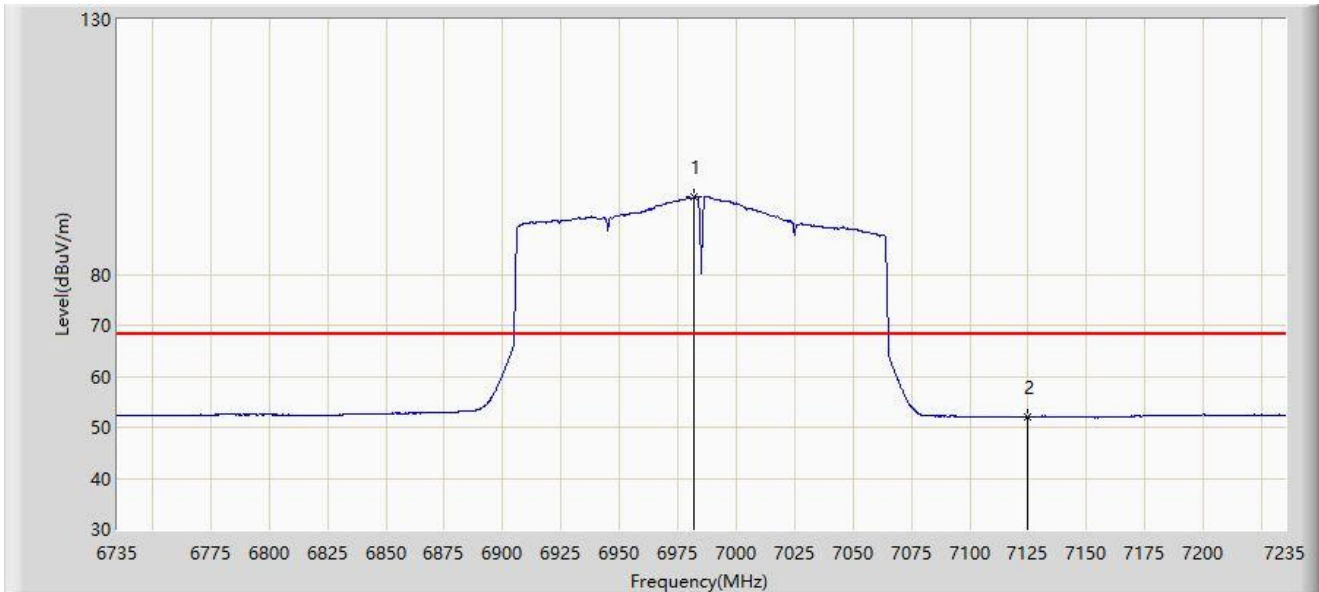


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 6982.000        | 95.138                 | 94.533               | N/A         | N/A            | 0.605         | AV   |
| 2  | *    | 7125.000        | 52.141                 | 51.893               | -16.059     | 68.200         | 0.248         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6985MHz |                       |

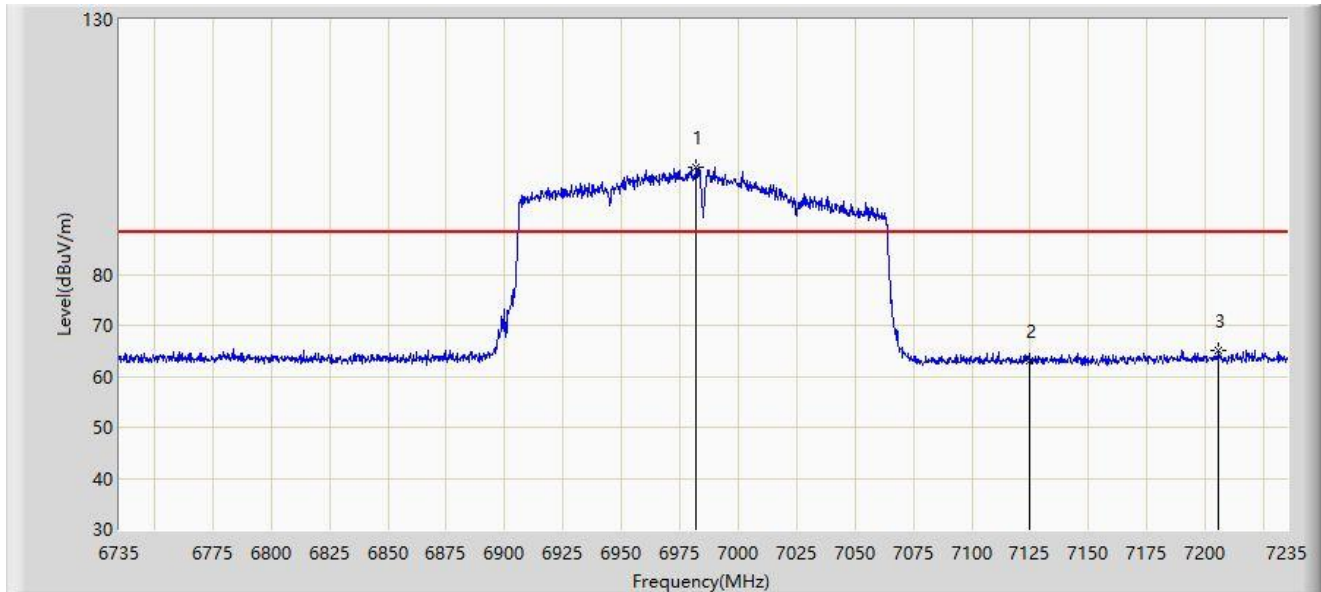


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 6982.000        | 101.019                | 100.414              | N/A         | N/A            | 0.605         | PK   |
| 2  |      | 7125.000        | 62.945                 | 62.697               | -25.255     | 88.200         | 0.248         | PK   |
| 3  | *    | 7205.750        | 64.949                 | 64.456               | -23.251     | 88.200         | 0.494         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: SIP-AC2                                    | Test Date: 2023-01-14 |
| Limit: FCC_6G_RE(3m)                             | Engineer: Mero Zhou   |
| Probe: BBHA 9120D_02042_1-18GHz                  | Polarity: Vertical    |
| EUT: Tri-band Wi-Fi 6E Wireless AP               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 6985MHz |                       |

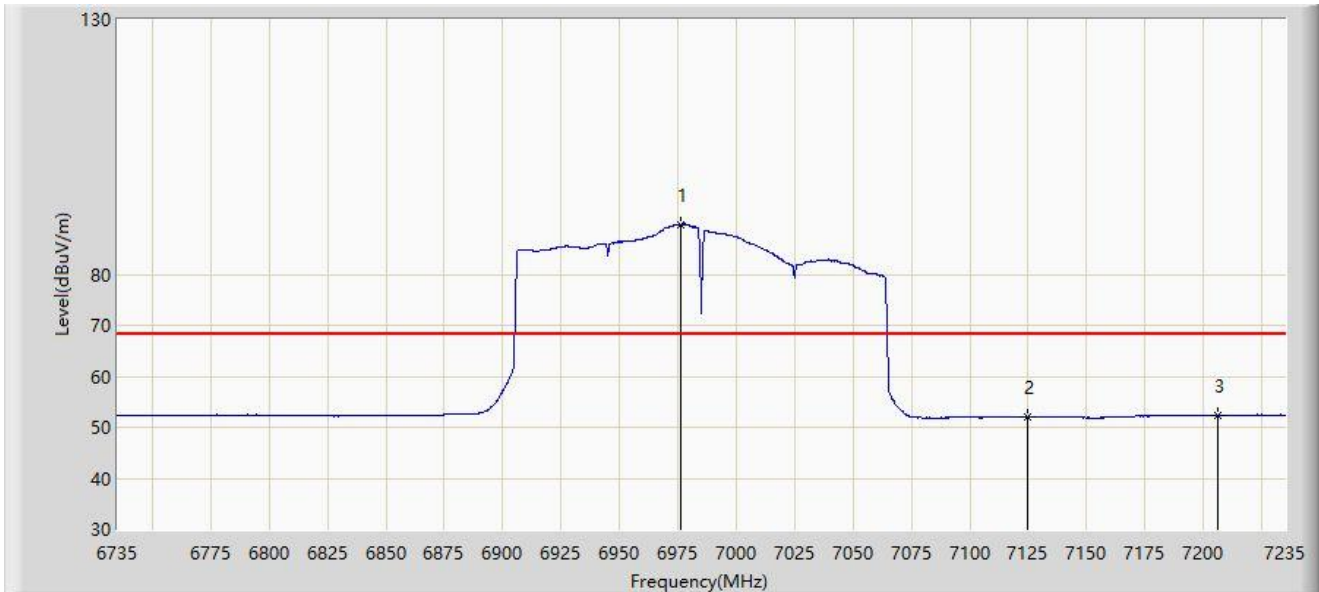

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 6976.500        | 89.783                 | 89.082               | N/A         | N/A            | 0.702         | AV   |
| 2  |      | 7125.000        | 52.040                 | 51.792               | -16.160     | 68.200         | 0.248         | AV   |
| 3  | *    | 7206.000        | 52.321                 | 51.826               | -15.879     | 68.200         | 0.495         | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

### A.10 AC Conducted Emissions Test Result

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: SIP-SR2                                          | Time: 2023/03/23 - 19:02 |
| Temperature: 19.8°C                                    | Humidity: 63.1%          |
| Limit: FCC_Part15.207_CE_AC Power                      | Engineer: Barry Wu       |
| Probe: SIP-SR2-ENV216_101684_E                         | Polarity: Line           |
| EUT: Tri-band Wi-Fi 6E Wireless AP                     | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11ax-HE80 at 6945MHz |                          |

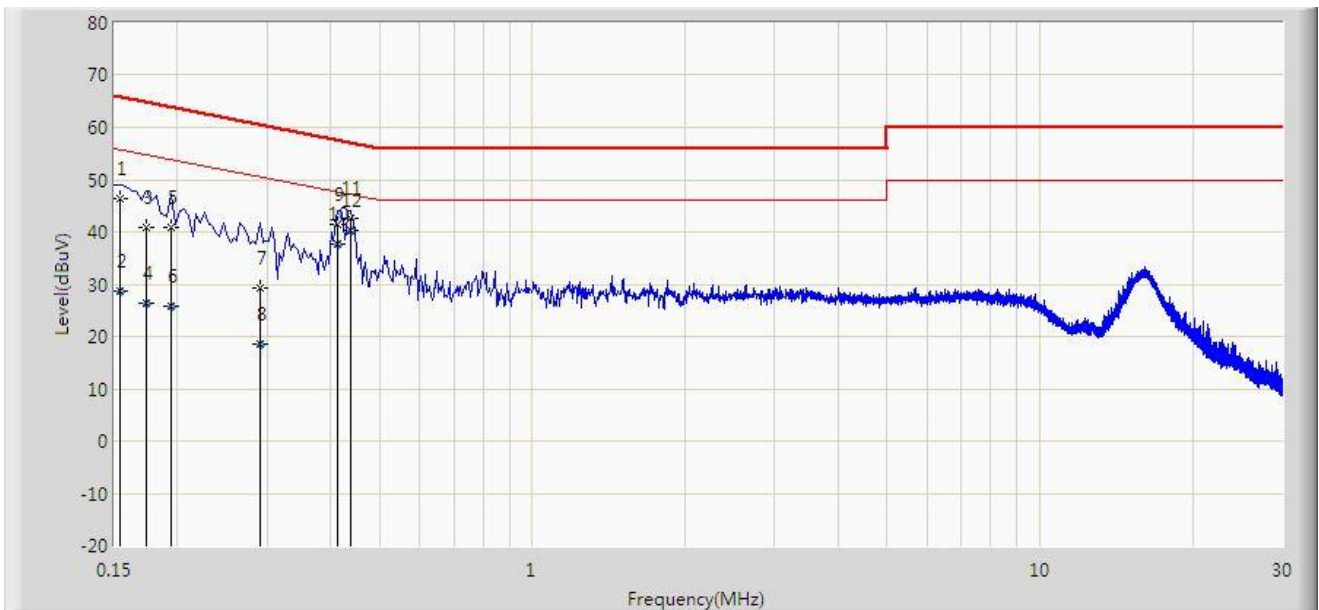


| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | 0.154           | 46.473               | 36.692               | -19.309     | 65.781       | 9.781       | QP   |
| 2  |      | 0.154           | 28.616               | 18.835               | -27.166     | 55.781       | 9.781       | AV   |
| 3  |      | 0.174           | 41.013               | 31.233               | -23.755     | 64.767       | 9.780       | QP   |
| 4  |      | 0.174           | 26.267               | 16.487               | -28.500     | 54.767       | 9.780       | AV   |
| 5  |      | 0.194           | 41.002               | 31.203               | -22.862     | 63.864       | 9.799       | QP   |
| 6  |      | 0.194           | 25.843               | 16.044               | -28.021     | 53.864       | 9.799       | AV   |
| 7  |      | 0.290           | 29.318               | 19.471               | -31.207     | 60.524       | 9.847       | QP   |
| 8  |      | 0.290           | 18.522               | 8.675                | -32.003     | 50.524       | 9.847       | AV   |
| 9  |      | 0.414           | 41.305               | 31.445               | -16.263     | 57.568       | 9.860       | QP   |
| 10 |      | 0.414           | 37.621               | 27.761               | -9.947      | 47.568       | 9.860       | AV   |
| 11 |      | 0.438           | 42.538               | 32.678               | -14.561     | 57.100       | 9.860       | QP   |
| 12 | *    | 0.438           | 40.343               | 30.483               | -6.757      | 47.100       | 9.860       | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: SIP-SR2                                          | Time: 2023/03/23 - 19:08 |
| Temperature: 19.8°C                                    | Humidity: 63.1%          |
| Limit: FCC_Part15.207_CE_AC Power                      | Engineer: Barry Wu       |
| Probe: SIP-SR2-ENV216_101684_E                         | Polarity: Neutral        |
| EUT: Tri-band Wi-Fi 6E Wireless AP                     | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11ax-HE80 at 6945MHz |                          |

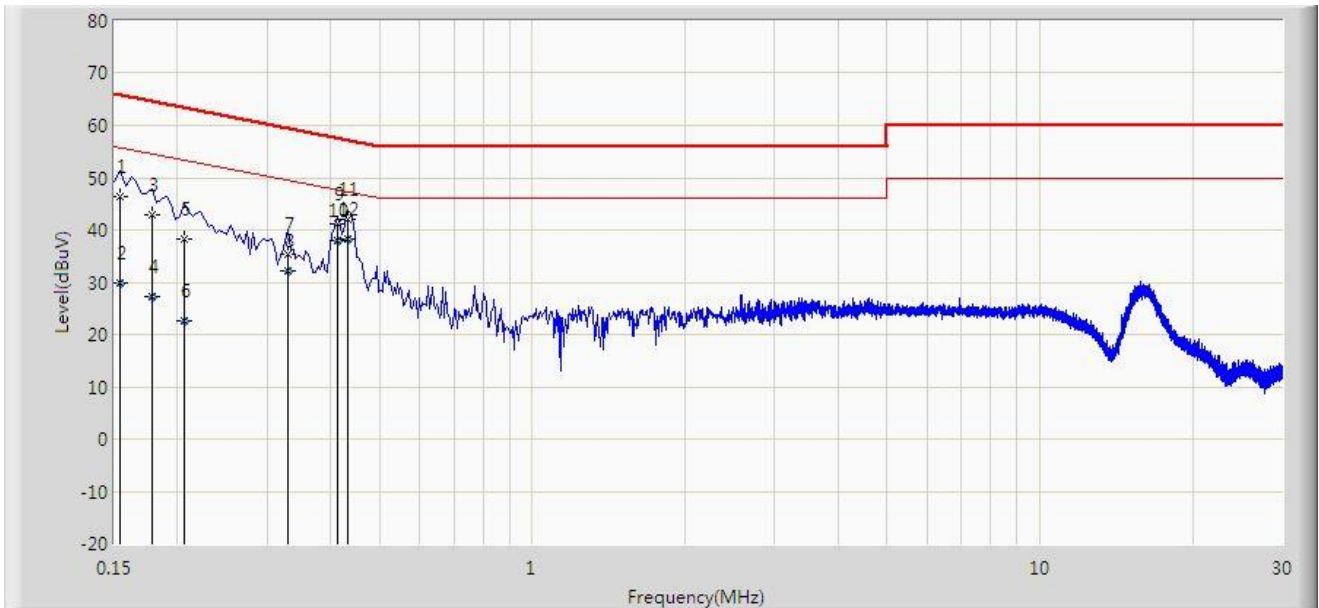

| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | 0.154           | 46.340               | 36.549               | -19.441     | 65.781       | 9.791       | QP   |
| 2  |      | 0.154           | 29.814               | 20.023               | -25.967     | 55.781       | 9.791       | AV   |
| 3  |      | 0.178           | 42.775               | 32.985               | -21.803     | 64.578       | 9.790       | QP   |
| 4  |      | 0.178           | 27.236               | 17.446               | -27.342     | 54.578       | 9.790       | AV   |
| 5  |      | 0.206           | 38.289               | 28.464               | -25.076     | 63.365       | 9.825       | QP   |
| 6  |      | 0.206           | 22.472               | 12.647               | -30.893     | 53.365       | 9.825       | AV   |
| 7  |      | 0.330           | 35.316               | 25.446               | -24.135     | 59.451       | 9.870       | QP   |
| 8  |      | 0.330           | 32.036               | 22.166               | -17.416     | 49.451       | 9.870       | AV   |
| 9  |      | 0.414           | 41.100               | 31.230               | -16.467     | 57.568       | 9.870       | QP   |
| 10 |      | 0.414           | 37.839               | 27.969               | -9.728      | 47.568       | 9.870       | AV   |
| 11 |      | 0.434           | 41.945               | 32.075               | -15.230     | 57.176       | 9.870       | QP   |
| 12 | *    | 0.434           | 38.118               | 28.248               | -9.057      | 47.176       | 9.870       | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2210RSU047-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2210RSU047-UE” file.

---

The End

---