



# FCC Test Report

APPLICANT : Xiaomi Communications Co., Ltd.  
EQUIPMENT : Mobile Phone  
BRAND NAME : POCO  
MODEL NAME : 2201116PG  
FCC ID : 2AFZZ16PG  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Dec. 10, 2021

We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International (KunShan) Inc.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055  
People's Republic of China**



## TABLE OF CONTENTS

|                                                               |    |
|---------------------------------------------------------------|----|
| REVISION HISTORY .....                                        | 3  |
| SUMMARY OF TEST RESULT .....                                  | 4  |
| 1. GENERAL DESCRIPTION .....                                  | 5  |
| 1.1. Applicant.....                                           | 5  |
| 1.2. Manufacturer .....                                       | 5  |
| 1.3. Product Feature of Equipment Under Test .....            | 5  |
| 1.4. Product Specification of Equipment Under Test .....      | 6  |
| 1.5. Modification of EUT .....                                | 7  |
| 1.6. Test Location .....                                      | 8  |
| 1.7. Test Software .....                                      | 8  |
| 1.8. Applicable Standards .....                               | 8  |
| 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....           | 9  |
| 2.1. Test Mode .....                                          | 9  |
| 2.2. Connection Diagram of Test System .....                  | 11 |
| 2.3. Support Unit used in test configuration and system ..... | 12 |
| 2.4. EUT Operation Test Setup .....                           | 12 |
| 3. TEST RESULT .....                                          | 13 |
| 3.1. Test of AC Conducted Emission Measurement .....          | 13 |
| 3.2. Test of Radiated Emission Measurement .....              | 17 |
| 4. LIST OF MEASURING EQUIPMENT .....                          | 22 |
| 5. UNCERTAINTY OF EVALUATION .....                            | 23 |
| APPENDIX A. SETUP PHOTOGRAPHS                                 |    |



## REVISION HISTORY

| REPORT NO.  | VERSION | DESCRIPTION             | ISSUED DATE   |
|-------------|---------|-------------------------|---------------|
| FC1N1013-01 | Rev. 01 | Initial issue of report | Jan. 05, 2022 |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description           | Limit           | Result | Remark                                    |
|----------------|----------|-----------------------|-----------------|--------|-------------------------------------------|
| 3.1            | 15.107   | AC Conducted Emission | < 15.107 limits | PASS   | Under limit<br>6.93 dB at<br>0.169 MHz    |
| 3.2            | 15.109   | Radiated Emission     | < 15.109 limits | PASS   | Under limit<br>10.02 dB at<br>605.210 MHz |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



## 1. General Description

### 1.1. Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

### 1.2. Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

### 1.3. Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                       | Mobile Phone                                                                                                                                                                                                              |
| Brand Name                      | POCO                                                                                                                                                                                                                      |
| Model Name                      | 2201116PG                                                                                                                                                                                                                 |
| FCC ID                          | 2AFZZ16PG                                                                                                                                                                                                                 |
| EUT supports Radios application | GSM/WCDMA/LTE/NFC/5G NR<br>WLAN 2.4GHz 802.11b/g/n HT20/HT40<br>WLAN 5GHz 802.11a/n HT20/HT40<br>WLAN 5GHz 802.11ac VHT20/VHT40/VHT80<br>Bluetooth BR/EDR/LE, GNSS, FM                                                    |
| IMEI Code                       | Conduction:<br>864654050017929/864654050017937 for Sample 1<br>864654050020149/864654050020156 for Sample 2<br>Radiation:<br>864654050021921/864654050021939 for Sample 1<br>864654050011807/864654050011815 for Sample 2 |
| HW Version                      | P1.1                                                                                                                                                                                                                      |
| SW Version                      | MIUI 13                                                                                                                                                                                                                   |
| EUT Stage                       | Identical Prototype                                                                                                                                                                                                       |

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three types of EUT, the sample 1 is 6+128GB capacity and the sample 2 is 8+256GB capacity. According to the difference, we choose sample 1 to perform full tests and the sample 2 is verified the difference.



## 1.4. Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                     | GSM850: 824 MHz ~ 849 MHz<br>GSM1900: 1850MHz ~ 1910MHz<br>WCDMA Band II: 1850 MHz ~ 1910 MHz<br>WCDMA Band IV : 1710 MHz ~ 1755 MHz<br>WCDMA Band V: 824 MHz ~ 849 MHz<br>LTE Band 2 : 1850 MHz ~ 1910 MHz<br>LTE Band 4 : 1710 MHz ~ 1755 MHz<br>LTE Band 5 : 824 MHz ~ 849 MHz<br>LTE Band 7 : 2500 MHz ~ 2570 MHz<br>LTE Band 12 : 699 MHz ~ 716 MHz<br>LTE Band 17 : 704 MHz ~ 716 MHz<br>LTE Band 26 : 814 MHz ~ 849 MHz<br>LTE Band 38 : 2570 MHz ~ 2620 MHz<br>LTE Band 41 : 2496 MHz ~ 2690 MHz<br>5G NR n5 : 824 MHz ~ 849 MHz<br>5G NR n7 : 2500 MHz ~ 2570 MHz<br>5G NR n38 : 2570 MHz ~ 2620 MHz<br>5G NR n41 : 2496 MHz ~ 2690 MHz<br>5G NR n77: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz<br>5G NR n78: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz<br>802.11b/g/n: 2400 MHz ~ 2483.5 MHz<br>802.11a/n/ac: 5180 MHz ~ 5240 MHz;<br>5260 MHz ~ 5320 MHz;<br>5500 MHz ~ 5720 MHz<br>5745 MHz ~ 5825 MHz<br>Bluetooth: 2400 MHz ~ 2483.5 MHz<br>NFC : 13.56 MHz |
| <b>Rx Frequency</b>                     | GSM850: 869 MHz ~ 894 MHz<br>GSM1900: 1930 MHz ~ 1990 MHz<br>WCDMA Band II: 1930 MHz ~ 1990 MHz<br>WCDMA Band IV : 2110 MHz ~ 2155 MHz<br>WCDMA Band V: 869 MHz ~ 894 MHz<br>LTE Band 2 : 1930 MHz ~ 1990 MHz<br>LTE Band 4 : 2110 MHz ~ 2155 MHz<br>LTE Band 5 : 869 MHz ~ 894 MHz<br>LTE Band 7 : 2620 MHz ~ 2690 MHz<br>LTE Band 12 : 729 MHz ~ 746 MHz<br>LTE Band 17 : 734 MHz ~ 746 MHz<br>LTE Band 26 : 859 MHz ~ 894 MHz<br>LTE Band 38: 2570 MHz ~ 2620 MHz<br>LTE Band 41 : 2496 MHz ~ 2690 MHz<br>5G NR n5 : 869 MHz ~ 894 MHz<br>5G NR n7 : 2620 MHz ~ 2690 MHz<br>5G NR n38: 2570 MHz ~ 2620 MHz<br>5G NR n41 : 2496 MHz ~ 2690 MHz<br>5G NR n77: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz<br>5G NR n78: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz<br>802.11b/g/n: 2400 MHz ~ 2483.5 MHz<br>802.11a/n/ac: 5180 MHz ~ 5240 MHz;<br>5260 MHz ~ 5320 MHz;                                                                                                      |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                           | 5500 MHz ~ 5720 MHz<br>5745 MHz ~ 5825 MHz<br>Bluetooth: 2400 MHz ~ 2483.5 MHz<br>NFC : 13.56 MHz<br>GNSS : 1559 MHz ~ 1610 MHz<br>FM : 87.5 MHz ~ 108 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Antenna Type</b>       | WWAN : PIFA Antenna<br>WLAN : PIFA Antenna<br>Bluetooth : PIFA Antenna<br>GNSS: PIFA Antenna<br>NFC: FPC Antenna<br>FM : External Earphone Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Type of Modulation</b> | GSM/GPRS: GMSK<br>EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK<br>WCDMA : BPSK<br>HSDPA/DC-HSDPA : QPSK<br>HSUPA : QPSK<br>HSPA+ : 16QAM (16QAM uplink is not supported)<br>DC-HSDPA : 64QAM<br>LTE: QPSK / 16QAM / 64QAM / 256QAM(Downlink only)<br>5G NR:<br>DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM)<br>CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)<br>802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)<br>Bluetooth LE : GFSK<br>Bluetooth (1Mbps) : GFSK<br>Bluetooth (2Mbps) : $\pi/4$ -DQPSK<br>Bluetooth (3Mbps) : 8-DPSK<br>GNSS : BPSK<br>NFC: ASK<br>FM |

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

|                    |                                                                                                                                                                          |                     |                                |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------|
| Test Firm          | Sporton International (Kunshan) Inc.                                                                                                                                     |                     |                                |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone<br>Jiangsu Province 215300 People's Republic of China<br>TEL : +86-512-57900158<br>FAX : +86-512-57900958 |                     |                                |
| Test Site No.      | Sporton Site No.                                                                                                                                                         | FCC Designation No. | FCC Test Firm Registration No. |
|                    | CO01-KS                                                                                                                                                                  | CN1257              | 314309                         |

Test data subcontracted: AC Conducted Emission in section 3.1 of this report.

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

|                    |                                                                                                                                                                                           |                     |                                |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------|
| Test Firm          | Sporton International (Shenzhen) Inc.                                                                                                                                                     |                     |                                |
| Test Site Location | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103<br>TEL: +86-755-33202398 |                     |                                |
| Test Site No.      | Sporton Site No.                                                                                                                                                                          | FCC Designation No. | FCC Test Firm Registration No. |
|                    | 03CH05-SZ                                                                                                                                                                                 | CN1256              | 421272                         |

## 1.7. Test Software

| Item | Site      | Manufacturer | Name | Version     |
|------|-----------|--------------|------|-------------|
| 1.   | CO01-KS   | AUDIX        | E3   | 6.2009-8-24 |
| 2.   | 03CH05-SZ | AUDIX        | E3   | 6.2009-8-24 |

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

| Test Items            | Function Type                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission | Mode 1: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + USB Cable1 (Charging from Adapter) + SIM 1 for Sample 1        |
|                       | Mode 2: WCDMA 850 Rx(High) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + USB Cable2 (Charging from Adapter) + SIM 2 for Sample 1         |
|                       | Mode 3: LTE Band 5 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable1(Charging from Adapter) + SIM 1 for Sample 1 |
|                       | Mode 4: LTE Band 12 Rx(Middle) Bluetooth Idle + WLAN (5G) Idle + FM( 98)MHz Rx + Earphone + Battery + USB Cable1(Charging from Adapter) + SIM 2 for Sample 1      |
|                       | Mode 5: LTE Band 17 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + NFC on + Earphone + Battery + USB Cable1(Charging from Adapter) + SIM 1 for Sample 1              |
|                       | Mode 6: LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (Data Link with Notebook) + SIM 2 for Sample 1            |
|                       | Mode 7: GSM 850 Rx(Middle) +Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Cable2 (Data Link with Notebook) + SIM 1 for Sample 1          |
|                       | Mode 8: GSM 850 Rx(Middle)+ Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1(Data Link with Notebook)+ SIM 2 for Sample 2              |
|                       | Mode 9: GSM 850 Rx(Middle)+ Bluetooth Idle+ WLAN (2.4G) Idle+Camera(Rear)+ USB Cable1(Charging from Adapter)+Earphone+ Battery + SIM 1 for Sample 2               |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radiated Emissions                                                                                                                                                                                                                                                                                                                                                                                                                                     | <p>Mode 1: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + USB Cable1 (Charging from Adapter) + SIM 1 for Sample 1</p> <p>Mode 2: WCDMA 850 Rx(High) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + USB Cable2 (Charging from Adapter) + SIM 2 for Sample 1</p> <p>Mode 3: LTE Band 5 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable1(Charging from Adapter) + SIM 1 for Sample 1</p> <p>Mode 4: LTE Band 12 Rx(Middle) Bluetooth Idle + WLAN (5G) Idle + FM( 98)MHz Rx + Earphone + Battery + USB Cable1(Charging from Adapter) + SIM 2 for Sample 1</p> <p>Mode 5: LTE Band 17 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + NFC on + Earphone + Battery + USB Cable1(Charging from Adapter) + SIM 1 for Sample 1</p> <p>Mode 6: LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (Data Link with Notebook) + SIM 2 for Sample 1</p> <p>Mode 7: LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Cable2 (Data Link with Notebook) + SIM 1 for Sample 1</p> <p>Mode 8: LTE Band 26 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (Data Link with Notebook) + SIM 2 for Sample 2</p> |
| <p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 1; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 8; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook means data application transferred mode between EUT and Notebook.</li> <li>4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.</li> </ol> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## 2.2. Connection Diagram of Test System

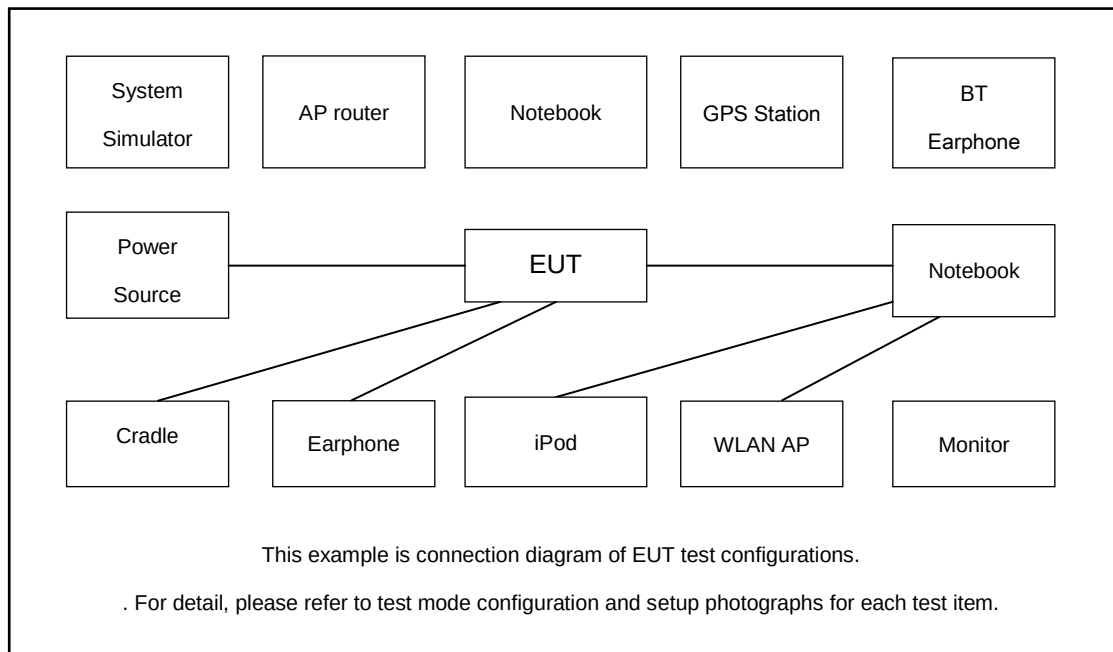

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

| Item | Equipment               | Trade Name | Model Name       | FCC ID        | Data Cable      | Power Cord                                                 |
|------|-------------------------|------------|------------------|---------------|-----------------|------------------------------------------------------------|
| 1.   | Base Station            | Anritsu    | MT8821C          | N/A           | N/A             | Unshielded,1.8m                                            |
| 2.   | Base Station            | Anritsu    | MT8820C          | N/A           | N/A             | Unshielded,1.8m                                            |
| 3.   | Base Station            | Anritsu    | MT8000A          | N/A           | N/A             | Unshielded,1.8m                                            |
| 4.   | Vector Signal Generator | R&S        | SMBV100A         | N/A           | N/A             | Unshielded,1.8m                                            |
| 5.   | GPS Station             | ADIVIE     | MP9000           | N/A           | N/A             | Unshielded,1.8m                                            |
| 6.   | WLAN AP                 | D-Link     | DIR-655          | KA21R655B1    | N/A             | Unshielded,1.8m                                            |
| 7.   | WLAN AP                 | ASUSTek    | RT-AC66U         | MSQ-RTAC66U   | N/A             | Unshielded,2.7m with Core                                  |
| 8.   | Bluetooth Earphone      | Xiaomi     | LYEJ02LM         | N/A           | N/A             | N/A                                                        |
| 9.   | Notebook                | Lenovo     | G480             | QDS-BRCM1050I | N/A             | AC I/P:<br>Unshielded, 1.8 m<br>DC O/P:<br>Shielded, 1.8 m |
| 10.  | Notebook                | DELL       | Inspiron 15-7570 | Fcc DoC       | N/A             | AC I/P:<br>Unshielded, 1.8 m<br>DC O/P:<br>Shielded, 1.8 m |
| 11.  | Hard Disk               | Lenovo     | F310             | DoC           | Shielded, 1.2m  | N/A                                                        |
| 12.  | SD Card                 | Kingston   | 8GB              | N/A           | N/A             | N/A                                                        |
| 13.  | iPod                    | Apple      | MC525 ZP/A       | Fcc DoC       | Shielded, 1.0m  | N/A                                                        |
| 14.  | Earphone                | MI         | EM023            | N/A           | Unshielded,1.2m | N/A                                                        |
| 15.  | NFC Card                | N/A        | N/A              | N/A           | N/A             | N/A                                                        |

## 2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on NFC function

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

| Frequency of emission<br>(MHz) | Conducted limit (dBuV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

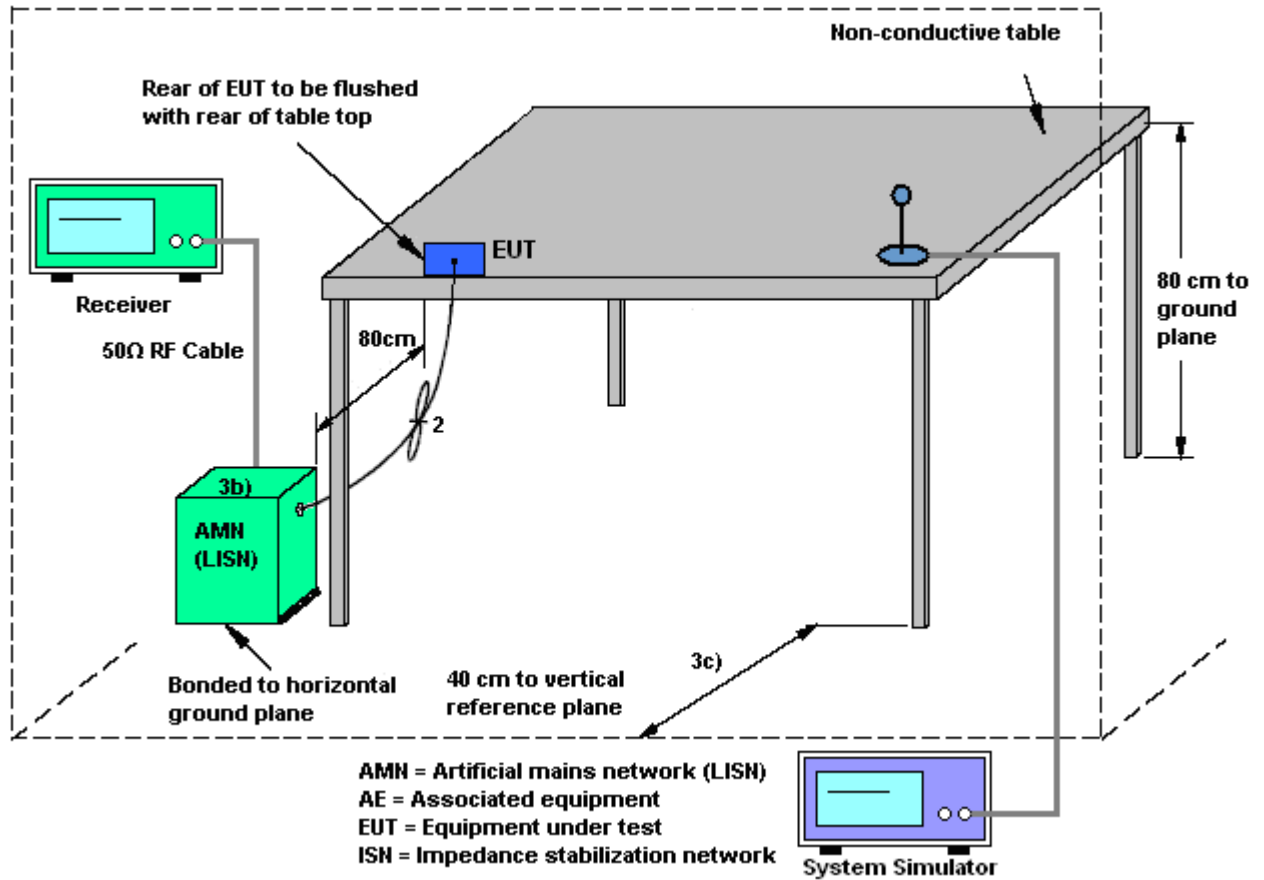



## 3.1.5 Test Result of AC Conducted Emission

|                 |                                                                                 |                     |             |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Test Engineer : | Amos Zhang                                                                      | Temperature :       | 25.3~26.2°C |
|                 |                                                                                 | Relative Humidity : | 38~40%      |
| Test Voltage :  | 120Vac / 60Hz                                                                   | Phase :             | Line        |
| Remark :        | All emissions not reported here are more than 10 dB below the prescribed limit. |                     |             |

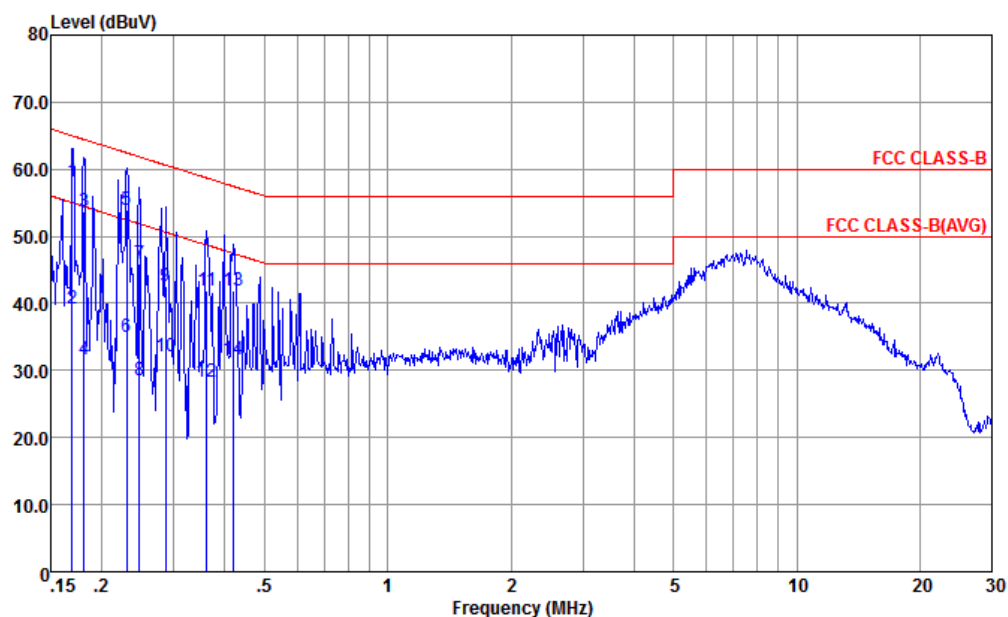


Site : CO01-KS  
Condition : FCC CLASS-B LISN-060105-L LINE

|     | Freq  | Level | Over   | Limit | Read  | LISN   | Cable | Remark  |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
|     | MHz   | dBuV  | Limit  | Line  | Level | Factor | Loss  |         |
|     |       |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1 * | 0.169 | 58.06 | -6.93  | 64.99 | 47.60 | 0.03   | 10.43 | QP      |
| 2   | 0.169 | 39.26 | -15.73 | 54.99 | 28.80 | 0.03   | 10.43 | Average |
| 3   | 0.181 | 53.74 | -10.72 | 64.46 | 43.31 | 0.03   | 10.40 | QP      |
| 4   | 0.181 | 31.64 | -22.82 | 54.46 | 21.21 | 0.03   | 10.40 | Average |
| 5   | 0.230 | 53.90 | -8.54  | 62.44 | 43.51 | 0.05   | 10.34 | QP      |
| 6   | 0.230 | 35.00 | -17.44 | 52.44 | 24.61 | 0.05   | 10.34 | Average |
| 7   | 0.247 | 45.89 | -15.97 | 61.86 | 35.49 | 0.06   | 10.34 | QP      |
| 8   | 0.247 | 28.59 | -23.27 | 51.86 | 18.19 | 0.06   | 10.34 | Average |
| 9   | 0.286 | 42.58 | -18.05 | 60.63 | 32.20 | 0.07   | 10.31 | QP      |
| 10  | 0.286 | 31.98 | -18.65 | 50.63 | 21.60 | 0.07   | 10.31 | Average |
| 11  | 0.361 | 41.86 | -16.83 | 58.69 | 31.50 | 0.08   | 10.28 | QP      |
| 12  | 0.361 | 28.38 | -20.31 | 48.69 | 18.02 | 0.08   | 10.28 | Average |
| 13  | 0.419 | 41.85 | -15.61 | 57.46 | 31.50 | 0.09   | 10.26 | QP      |
| 14  | 0.419 | 31.55 | -15.91 | 47.46 | 21.20 | 0.09   | 10.26 | Average |



|                        |                                                                                 |                            |             |
|------------------------|---------------------------------------------------------------------------------|----------------------------|-------------|
| <b>Test Engineer :</b> | Amos Zhang                                                                      | <b>Temperature :</b>       | 25.3~26.2°C |
|                        |                                                                                 | <b>Relative Humidity :</b> | 38~40%      |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                   | <b>Phase :</b>             | Neutral     |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit. |                            |             |

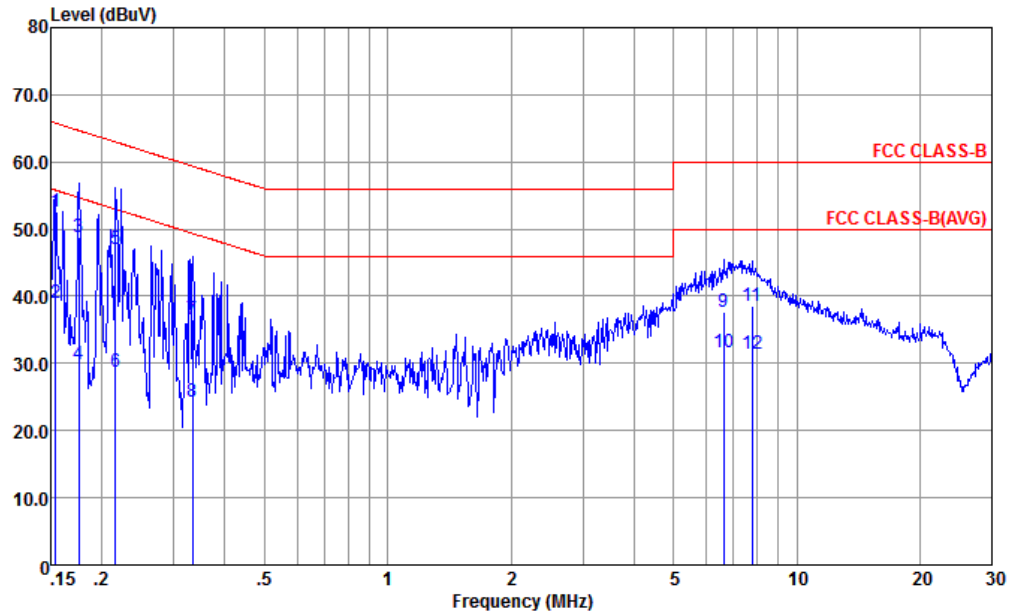

Site : CO01-KS  
Condition : FCC CLASS-B LISN-060105-N NEUTRAL

|     | Freq  | Level | Over   | Limit | Read  | LISN   | Cable |         |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
|     | MHz   | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  |
|     |       |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1 * | 0.154 | 52.68 | -13.10 | 65.78 | 42.10 | 0.11   | 10.47 | QP      |
| 2   | 0.154 | 39.08 | -16.70 | 55.78 | 28.50 | 0.11   | 10.47 | Average |
| 3   | 0.176 | 48.72 | -15.96 | 64.68 | 38.20 | 0.10   | 10.42 | QP      |
| 4   | 0.176 | 29.82 | -24.86 | 54.68 | 19.30 | 0.10   | 10.42 | Average |
| 5   | 0.216 | 47.05 | -15.91 | 62.96 | 36.60 | 0.10   | 10.35 | QP      |
| 6   | 0.216 | 28.65 | -24.31 | 52.96 | 18.20 | 0.10   | 10.35 | Average |
| 7   | 0.334 | 36.59 | -22.76 | 59.35 | 26.20 | 0.10   | 10.29 | QP      |
| 8   | 0.334 | 24.19 | -25.16 | 49.35 | 13.80 | 0.10   | 10.29 | Average |
| 9   | 6.627 | 37.69 | -22.31 | 60.00 | 27.19 | 0.20   | 10.30 | QP      |
| 10  | 6.627 | 31.69 | -18.31 | 50.00 | 21.19 | 0.20   | 10.30 | Average |
| 11  | 7.769 | 38.62 | -21.38 | 60.00 | 28.10 | 0.21   | 10.31 | QP      |
| 12  | 7.769 | 31.42 | -18.58 | 50.00 | 20.90 | 0.21   | 10.31 | Average |

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

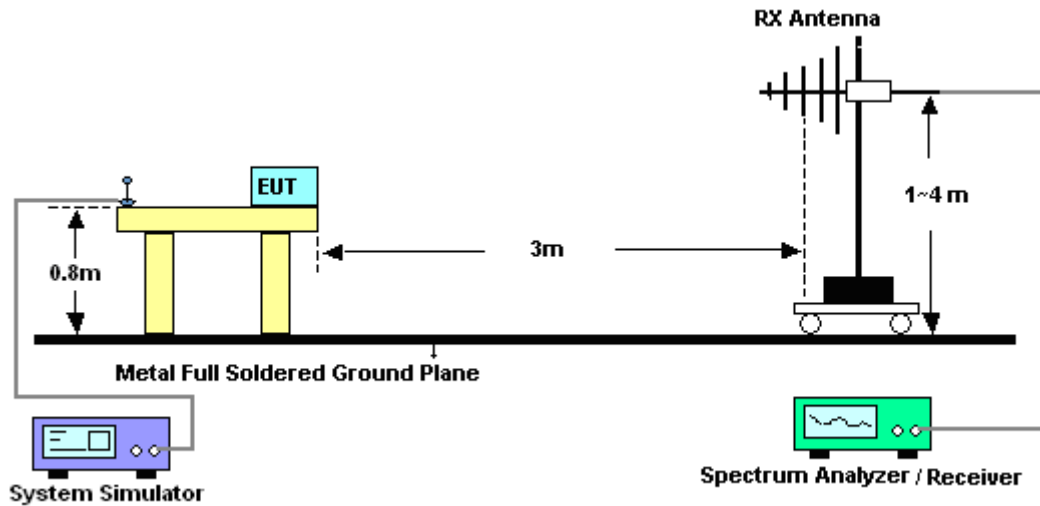


For radiated emissions above 1GHz

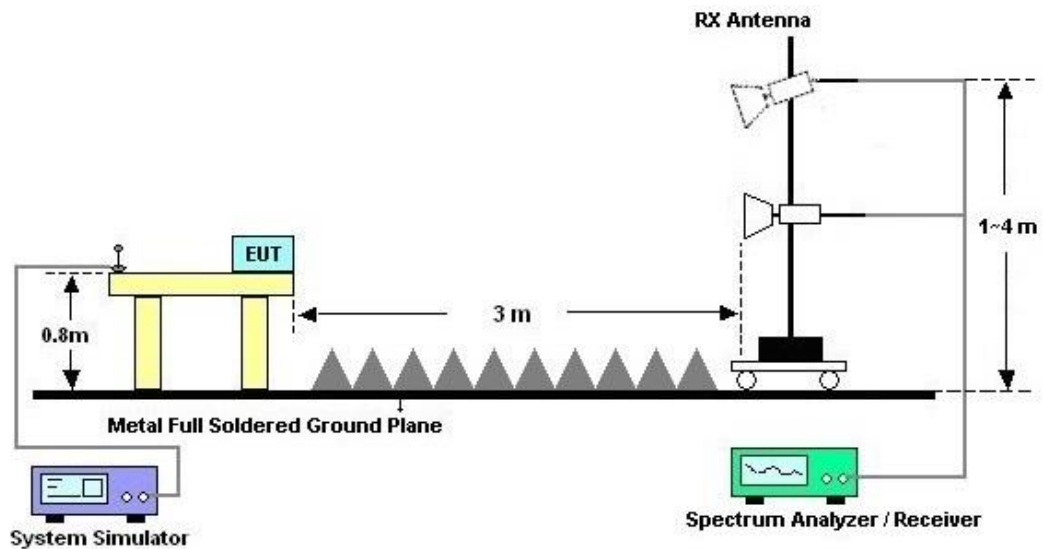



## 3.2.5. Test Result of Radiated Emission

|                 |                                                                                                                                                                                     |                     |            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Test Engineer : | Zhicheng Li                                                                                                                                                                         | Temperature :       | 24~25°C    |
|                 |                                                                                                                                                                                     | Relative Humidity : | 48~49%     |
| Test Distance : | 3m                                                                                                                                                                                  | Polarization :      | Horizontal |
| Remark :        | #7 is system simulator signal which can be ignored.<br>#9 and #10 are RF signals which come from Bluetooth and WLAN Access Point used to connect the EUT, and which can be ignored. |                     |            |

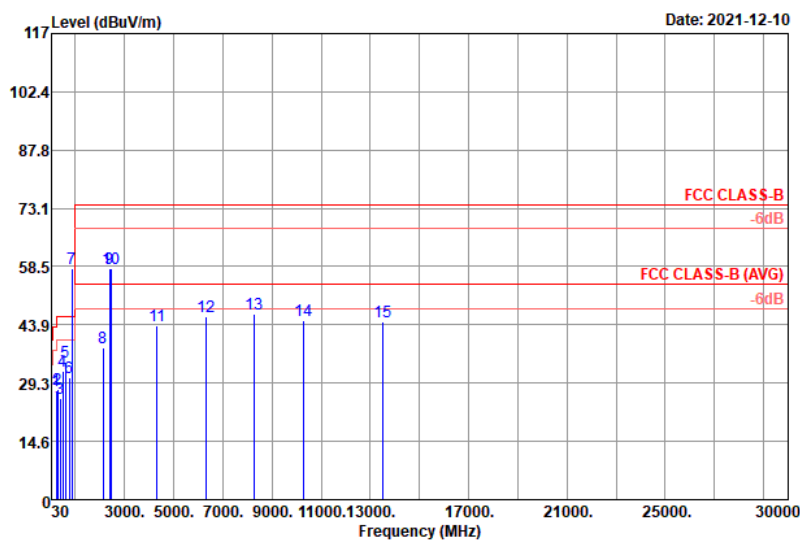


Site : 03CH05-SZ  
Condition : FCC CLASS-B 3m VULB9168-01001 HORIZONTAL

|     | Freq     | Level  | Over<br>Limit | Limit<br>Line | ReadAntenna<br>Level Factor | Cable<br>Loss | Preamp<br>Factor | A/Pos | T/Pos | Remark |      |
|-----|----------|--------|---------------|---------------|-----------------------------|---------------|------------------|-------|-------|--------|------|
|     | MHz      | dBuV/m | dB            | dBuV/m        | dBuV                        | dB/m          | dB               | dB    | cm    | deg    |      |
| 1   | 223.03   | 27.34  | -18.66        | 46.00         | 42.36                       | 17.23         | 2.80             | 35.05 | ---   | ---    | Peak |
| 2   | 279.29   | 27.81  | -18.19        | 46.00         | 40.39                       | 19.31         | 3.05             | 34.94 | ---   | ---    | Peak |
| 3   | 383.08   | 25.54  | -20.46        | 46.00         | 35.35                       | 21.74         | 3.28             | 34.83 | ---   | ---    | Peak |
| 4   | 480.08   | 32.17  | -13.83        | 46.00         | 39.93                       | 23.54         | 3.40             | 34.70 | ---   | ---    | Peak |
| 5   | 605.21   | 34.71  | -11.29        | 46.00         | 39.47                       | 25.85         | 3.89             | 34.50 | ---   | ---    | Peak |
| 6   | 758.47   | 30.60  | -15.40        | 46.00         | 33.14                       | 27.95         | 3.89             | 34.38 | ---   | ---    | Peak |
| 7 * | 864.20   | 58.03  |               |               | 59.52                       | 28.69         | 4.12             | 34.30 | ---   | ---    | Peak |
| 8   | 2122.00  | 38.08  | -35.92        | 74.00         | 53.46                       | 27.41         | 7.48             | 50.27 | ---   | ---    | Peak |
| 9   | 2402.00  | 58.07  |               |               | 72.91                       | 27.79         | 7.81             | 50.44 | ---   | ---    | Peak |
| 10  | 2437.00  | 57.89  |               |               | 72.84                       | 27.65         | 7.86             | 50.46 | ---   | ---    | Peak |
| 11  | 4332.00  | 43.53  | -30.47        | 74.00         | 52.87                       | 30.43         | 9.83             | 49.60 | ---   | ---    | Peak |
| 12  | 6340.00  | 46.02  | -27.98        | 74.00         | 50.41                       | 33.41         | 11.13            | 48.93 | ---   | ---    | Peak |
| 13  | 8286.00  | 46.65  | -27.35        | 74.00         | 46.46                       | 37.21         | 12.81            | 49.83 | ---   | ---    | Peak |
| 14  | 10276.00 | 44.85  | -29.15        | 74.00         | 41.45                       | 39.50         | 12.61            | 48.71 | ---   | ---    | Peak |
| 15  | 13532.00 | 44.80  | -29.20        | 74.00         | 38.01                       | 39.97         | 13.86            | 47.04 | ---   | ---    | Peak |



|                 |                                                                                                                                                                                    |                     |          |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Test Engineer : | Zhicheng Li                                                                                                                                                                        | Temperature :       | 24~25°C  |
|                 |                                                                                                                                                                                    | Relative Humidity : | 48~49%   |
| Test Distance : | 3m                                                                                                                                                                                 | Polarization :      | Vertical |
| Remark :        | #7 is system simulator signal which can be ignored.<br>#8 and #9 are RF signals which come from Bluetooth and WLAN Access Point used to connect the EUT, and which can be ignored. |                     |          |

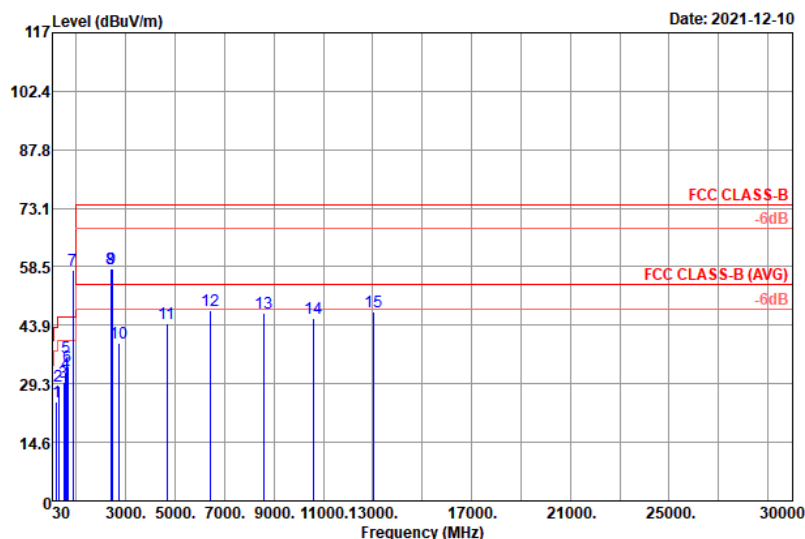

Site : 03CH05-SZ  
Condition : FCC CLASS-B 3m VULB9168-01001 VERTICAL

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Factor | Preamp Loss | A/Pos | T/Pos | Remark |
|-----|----------|--------|------------|------------|-------------------|--------------|-------------|-------|-------|--------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m         | dB          | dB    | cm    | deg    |
| 1   | 199.75   | 24.62  | -18.88     | 43.50      | 40.53             | 16.44        | 2.75        | 35.10 | ---   | Peak   |
| 2   | 279.29   | 28.63  | -17.37     | 46.00      | 41.21             | 19.31        | 3.05        | 34.94 | ---   | Peak   |
| 3   | 480.08   | 29.79  | -16.21     | 46.00      | 37.55             | 23.54        | 3.40        | 34.70 | ---   | Peak   |
| 4   | 558.65   | 32.09  | -13.91     | 46.00      | 38.01             | 24.97        | 3.69        | 34.58 | ---   | Peak   |
| 5   | 605.21   | 35.98  | -10.02     | 46.00      | 40.74             | 25.85        | 3.89        | 34.50 | ---   | Peak   |
| 6   | 644.01   | 33.51  | -12.49     | 46.00      | 37.86             | 26.26        | 3.89        | 34.50 | ---   | Peak   |
| 7 * | 864.20   | 57.80  |            |            | 59.29             | 28.69        | 4.12        | 34.30 | ---   | Peak   |
| 8   | 2402.00  | 58.10  |            |            | 72.94             | 27.79        | 7.81        | 50.44 | ---   | Peak   |
| 9   | 2436.00  | 58.12  |            |            | 73.07             | 27.66        | 7.85        | 50.46 | ---   | Peak   |
| 10  | 2752.00  | 39.59  | -34.41     | 74.00      | 53.36             | 28.01        | 8.42        | 50.20 | ---   | Peak   |
| 11  | 4666.00  | 44.39  | -29.61     | 74.00      | 52.65             | 31.07        | 10.24       | 49.57 | ---   | Peak   |
| 12  | 6428.00  | 47.52  | -26.48     | 74.00      | 51.42             | 33.79        | 11.22       | 48.91 | ---   | Peak   |
| 13  | 8588.00  | 47.08  | -26.92     | 74.00      | 46.60             | 37.12        | 13.02       | 49.66 | ---   | Peak   |
| 14  | 10614.00 | 45.75  | -28.25     | 74.00      | 41.06             | 40.06        | 12.94       | 48.31 | ---   | Peak   |
| 15  | 13046.00 | 47.26  | -26.74     | 74.00      | 38.37             | 39.17        | 16.36       | 46.64 | ---   | Peak   |

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) - Limit Line(dBuV/m)



## 4. List of Measuring Equipment

| Instrument                           | Manufacturer   | Model No. | Serial No.   | Characteristics         | Calibration Date | Test Date     | Due Date      | Remark                |
|--------------------------------------|----------------|-----------|--------------|-------------------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver                         | R&S            | ESCI7     | 100768       | 9kHz~7GHz;              | Apr. 21, 2021    | Dec. 10, 2021 | Apr. 20, 2022 | Conduction (CO01-KS)  |
| AC LISN<br>(for auxiliary equipment) | MessTec        | AN3016    | 060103       | 9kHz~30MHz              | Oct. 17, 2021    | Dec. 10, 2021 | Oct. 16, 2022 | Conduction (CO01-KS)  |
| AC LISN                              | R&S            | ENV216    | 100334       | 9kHz~30MHz              | Oct. 17, 2021    | Dec. 10, 2021 | Oct. 16, 2022 | Conduction (CO01-KS)  |
| AC Power Source                      | Chroma         | 61602     | ABP000000811 | AC 0V~300V, 45Hz~1000Hz | Oct. 17, 2021    | Dec. 10, 2021 | Oct. 16, 2022 | Conduction (CO01-KS)  |
| EMI Test Receiver                    | R&S            | ESR7      | 102261       | 9kHz~7GHz               | May 21, 2021     | Dec. 10, 2021 | May 20, 2022  | Radiation (03CH05-SZ) |
| EXA Spectrum Analyzer                | KEYSIGHT       | N9010B    | MY59071191   | 10Hz~44GHz              | Apr. 07, 2021    | Dec. 10, 2021 | Apr. 06, 2022 | Radiation (03CH05-SZ) |
| Log-periodic Antenna                 | SCHWARZBECK    | VULB 9168 | 01001        | 20MHz~1.5GHz            | Mar. 25, 2021    | Dec. 10, 2021 | Mar. 24, 2022 | Radiation (03CH05-SZ) |
| Amplifier                            | EM Electronics | EM330     | 060756       | 0.01Hz~3000MHz          | Apr. 07, 2021    | Dec. 10, 2021 | Apr. 06, 2022 | Radiation (03CH05-SZ) |
| Double Ridge Horn Antenna            | SCHWARZBECK    | BBHA9120D | 9120D-2206   | 1GHz~18GHz              | Apr. 11, 2021    | Dec. 10, 2021 | Apr. 10, 2022 | Radiation (03CH05-SZ) |
| HF Amplifier                         | EM Electronics | EM01G18GA | 060781       | 1GHz~18GHz              | Apr. 07, 2021    | Dec. 10, 2021 | Apr. 06, 2022 | Radiation (03CH05-SZ) |
| HF Amplifier                         | EM Electronics | EM18G40G  | 060778       | 18GHz~40GHz             | Apr. 07, 2021    | Dec. 10, 2021 | Apr. 06, 2022 | Radiation (03CH05-SZ) |
| Horn Antenna                         | SCHWARZBECK    | BBHA9170  | 00983        | 15GHz~40GHz             | Apr. 11, 2021    | Dec. 10, 2021 | Apr. 10, 2022 | Radiation (03CH05-SZ) |
| AC Power Source                      | APC            | AFV-S-600 | F119050013   | N/A                     | NCR              | Dec. 10, 2021 | NCR           | Radiation (03CH05-SZ) |
| Turn Table                           | EMEC           | T-200-S-1 | 060925-T     | 0~360 degree            | NCR              | Dec. 10, 2021 | NCR           | Radiation (03CH05-SZ) |
| Antenna Mast                         | EMEC           | MBS-400-1 | 060927       | 1 m~4 m                 | NCR              | Dec. 10, 2021 | NCR           | Radiation (03CH05-SZ) |

NCR: No Calibration Required

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.94dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |       |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.2dB |
|-------------------------------------------------------------------------|-------|

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

|                                                                         |       |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 5.1dB |
|-------------------------------------------------------------------------|-------|

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

|                                                                         |       |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.1dB |
|-------------------------------------------------------------------------|-------|